




Test Mode: 802.11ac VHT20

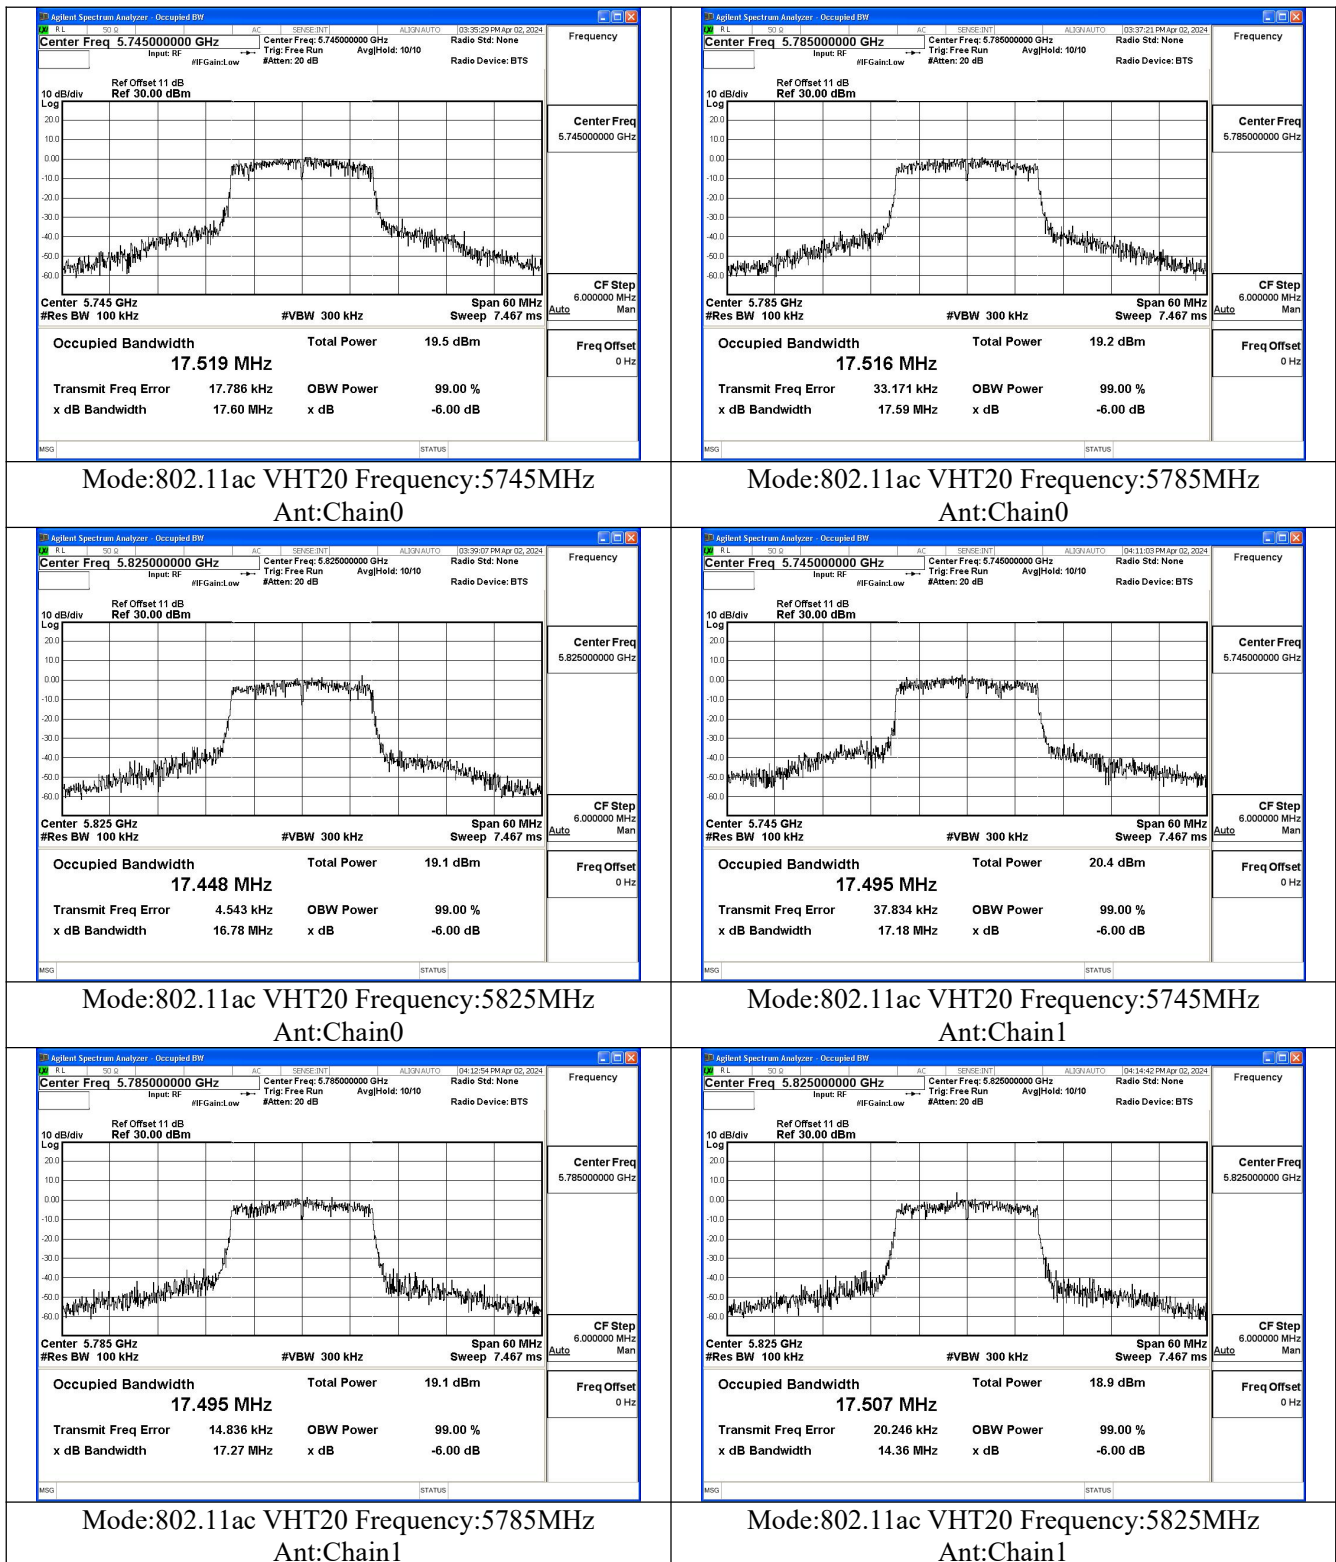


Test Mode: 802.11n HT40

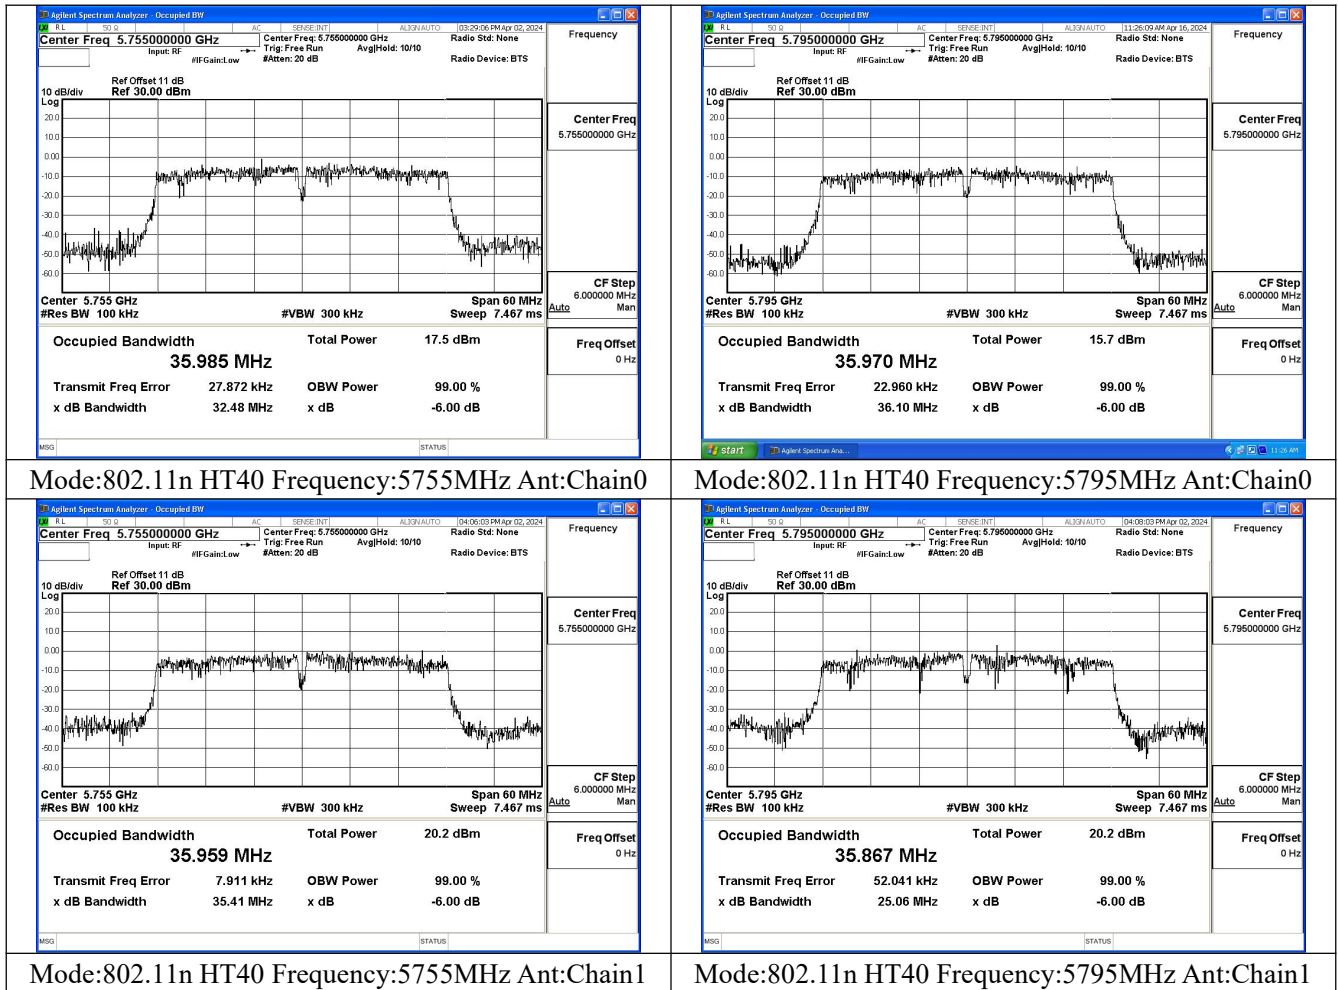


Test Mode: 802.11ac VHT40

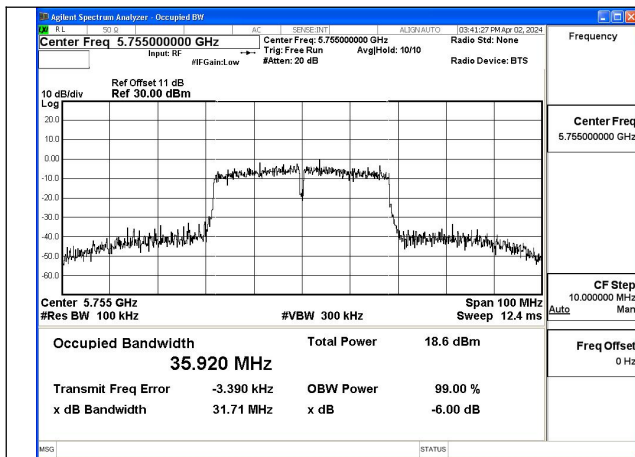


Mode:802.11ac VHT40 Frequency:5755MHz
Ant:Chain0

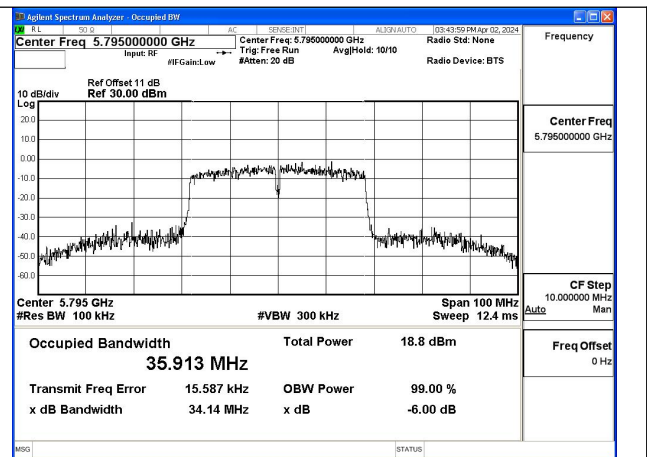

Mode:802.11ac VHT40 Frequency:5795MHz
Ant:Chain0

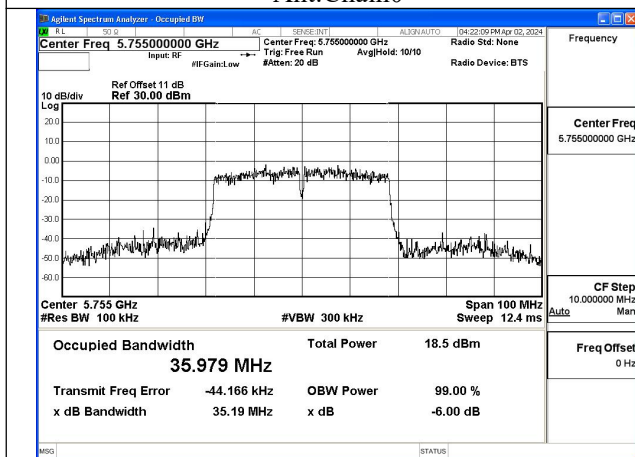


Mode:802.11ac VHT40 Frequency:5755MHz
Ant:Chain1

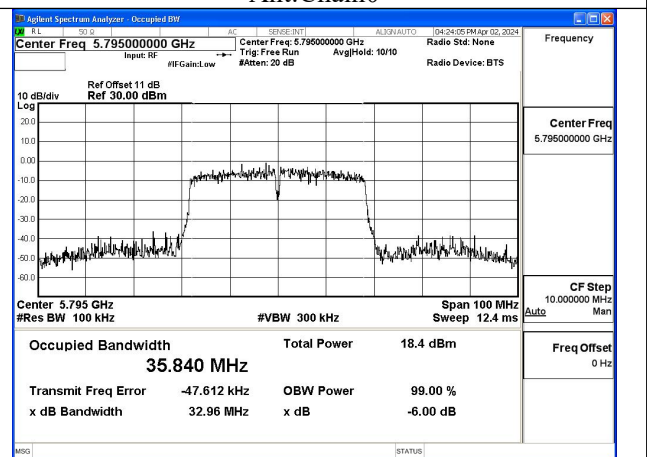


Mode:802.11ac VHT40 Frequency:5795MHz
Ant:Chain1

Test Mode: 802.11ac VHT80

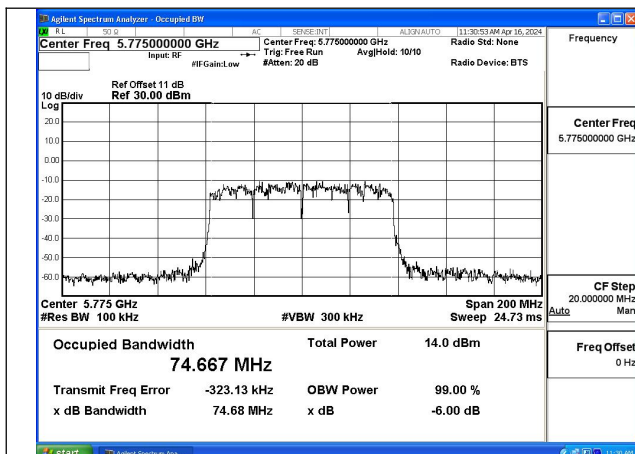

Mode:802.11ac VHT80 Frequency:5775MHz
Ant:Chain0

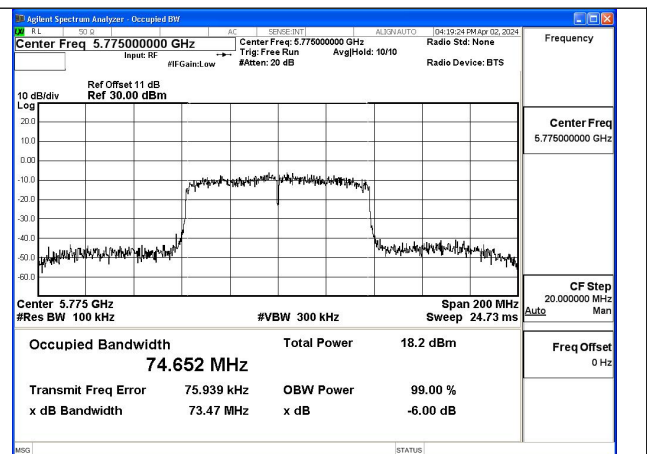

Mode:802.11ac VHT80 Frequency:5775MHz
Ant:Chain1

Transmitter Power Spectral Density

Offset 21dB = Attenuator + Temporary antenna connector loss + Cable loss

Test Mode	Antenna	Tones	5745MHz		5785MHz		5825MHz	
			Correction Factor (dB)	Power Density (dBm/500KHz)	Correction Factor (dB)	Power Density (dBm/500KHz)	Correction Factor (dB)	Power Density (dBm/500KHz)
802.11a	Chain0	NA	0	0.548	0	-0.078	0	0.202
802.11a	Chain1	NA	0	-0.531	0	-1.209	0	0.953
802.11n HT20	Chain0	NA	0	0.279	0	1.246	0	1.099
802.11n HT20	Chain1	NA	0	3.292	0	3.106	0	2.053
802.11n HT20	MIMO	NA	0	5.052	0	5.285	0	4.612
802.11ac VHT20	Chain0	NA	0	2.379	0	1.983	0	2.205
802.11ac VHT20	Chain1	NA	0	3.114	0	2.116	0	1.990
802.11ac VHT20	MIMO	NA	0	5.772	0	5.060	0	5.109

Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result.


Test Mode	Antenna	Tones	5755MHz		---		5795MHz	
			Correction Factor (dB)	Power Density (dBm/500KHz)	Correction Factor (dB)	Power Density (dBm/500KHz)	Correction Factor (dB)	Power Density (dBm/500KHz)
802.11n HT40	Chain0	NA	0.11	-3.276	---	---	0.11	-0.929
802.11n HT40	Chain1	NA	0.11	-0.018	---	---	0.11	-0.201
802.11n HT40	MIMO	NA	0.11	1.662	---	---	0.11	2.461
802.11ac VHT40	Chain0	NA	0.11	-0.750	---	---	0.11	-0.391
802.11ac VHT40	Chain1	NA	0.11	-1.137	---	---	0.11	-1.150
802.11ac VHT40	MIMO	NA	0.11	2.071	---	---	0.11	2.256


Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result.

Test Mode	Antenna	Tones	5775MHz		---		---	
			Correction Factor (dB)	Power Density (dBm/500KHz)	Correction Factor (dB)	Power Density (dBm/500KHz)	Correction Factor (dB)	Power Density (dBm/500KHz)
802.11ac VHT80	Chain0	NA	0.15	-5.389	---	---	---	---
802.11ac VHT80	Chain1	NA	0.15	-5.239	---	---	---	---
802.11ac VHT80	MIMO	NA	0.15	-2.303	---	---	---	---


Note: As measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result.

Test Mode: 802.11a

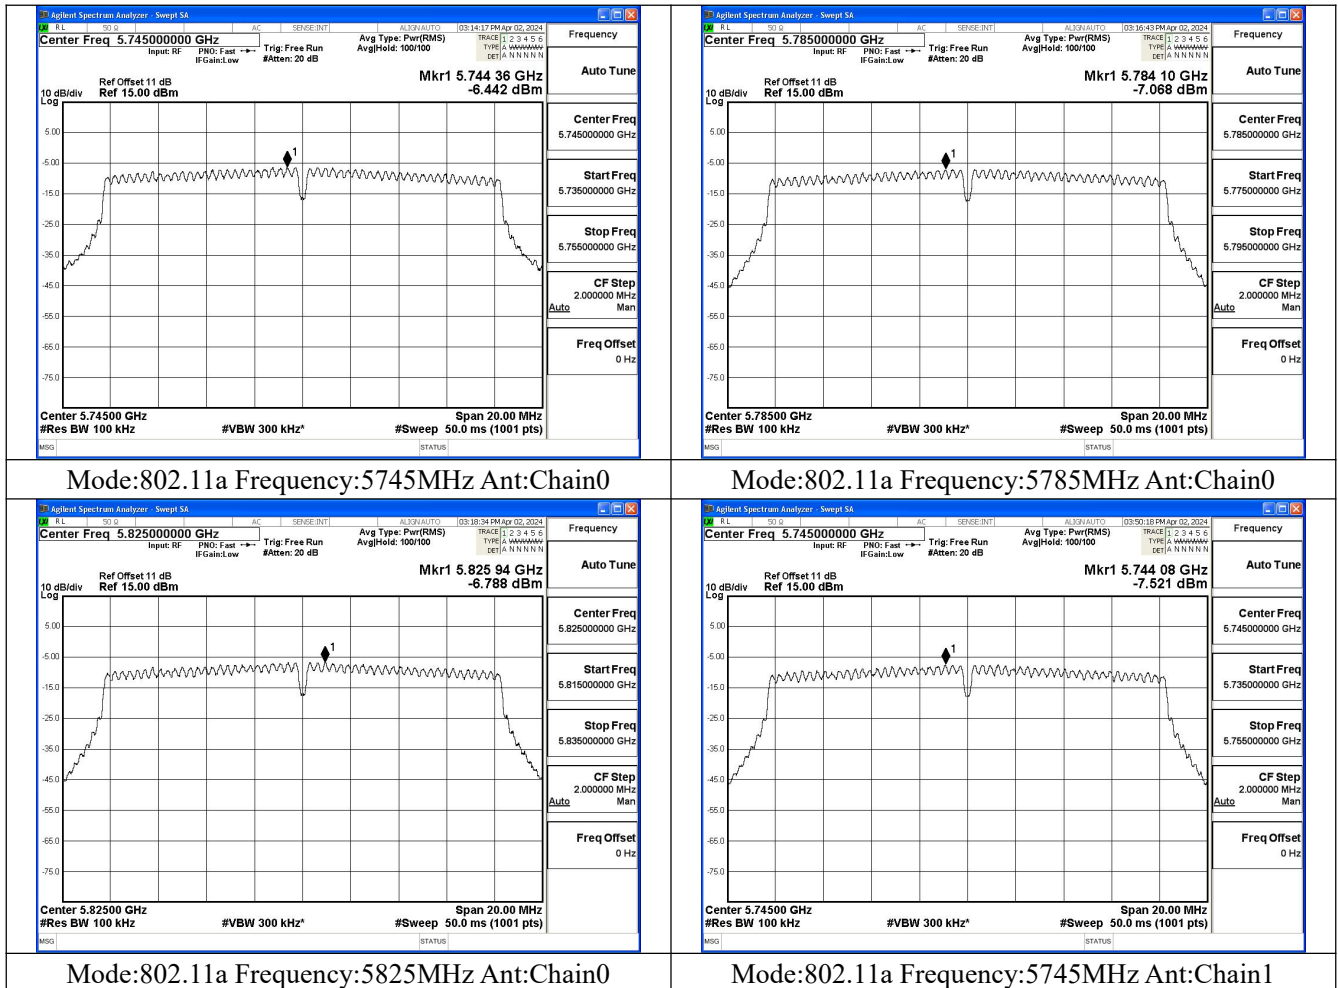

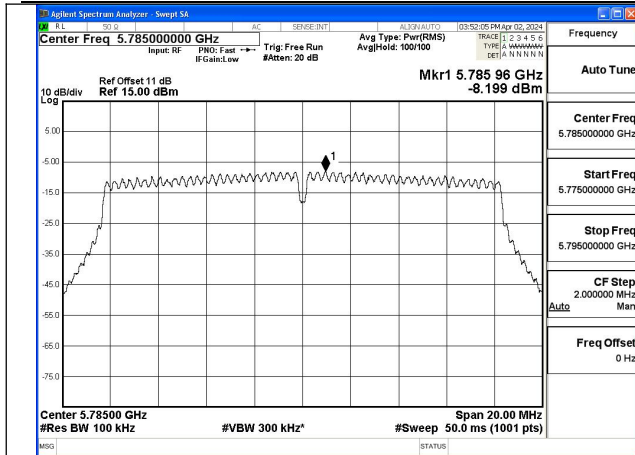


Mode:802.11a Frequency:5785MHz Ant:Chain1

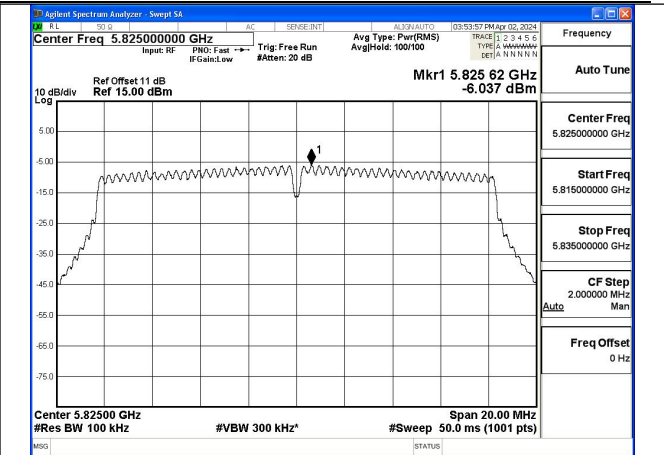


Mode:802.11a Frequency:5825MHz Ant:Chain1


Test Mode: 802.11n HT20

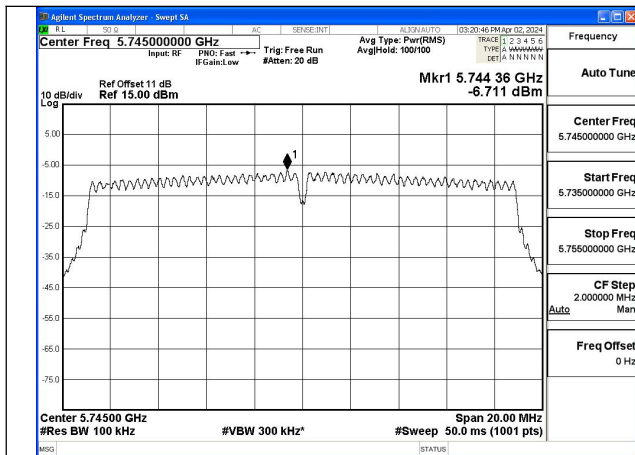


Mode:802.11n HT20 Frequency:5745MHz Ant:Chain0

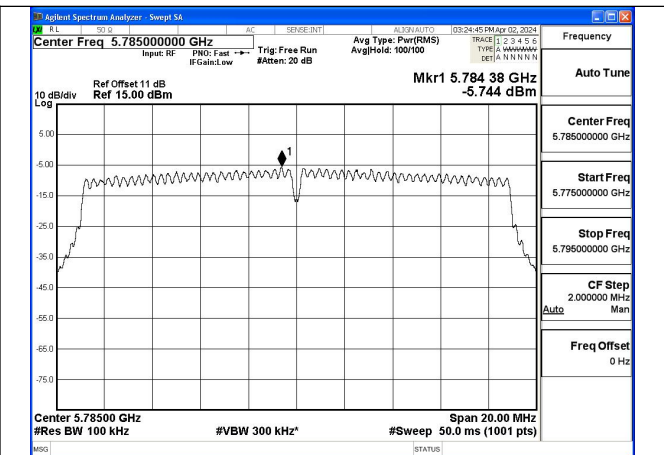


Mode:802.11n HT20 Frequency:5785MHz Ant:Chain0

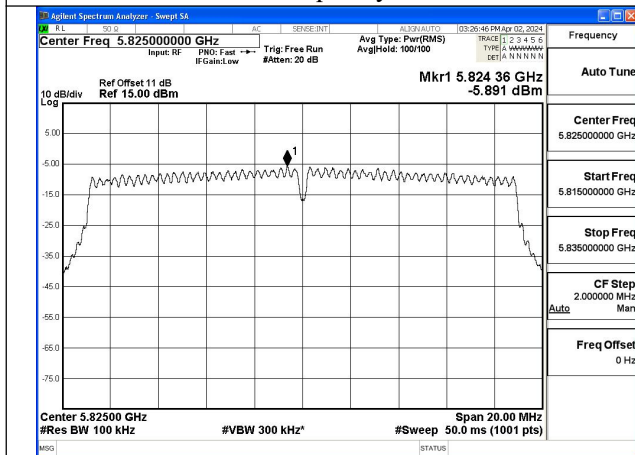


Mode:802.11n HT20 Frequency:5825MHz Ant:Chain0

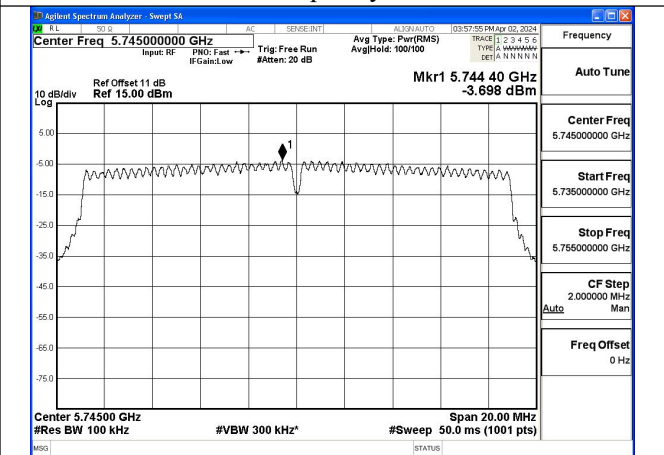

Mode:802.11n HT20 Frequency:5745MHz Ant:Chain1

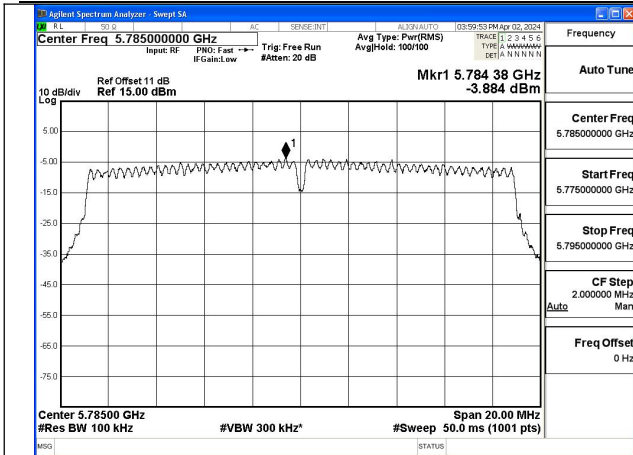


Mode:802.11n HT20 Frequency:5785MHz Ant:Chain1

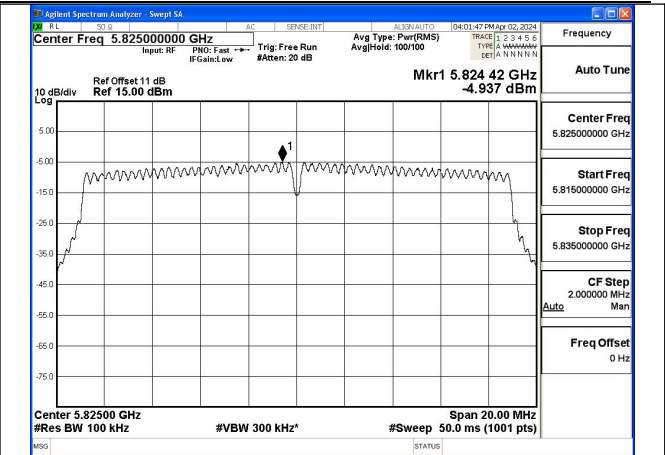


Mode:802.11n HT20 Frequency:5825MHz Ant:Chain1


Test Mode: 802.11ac VHT20

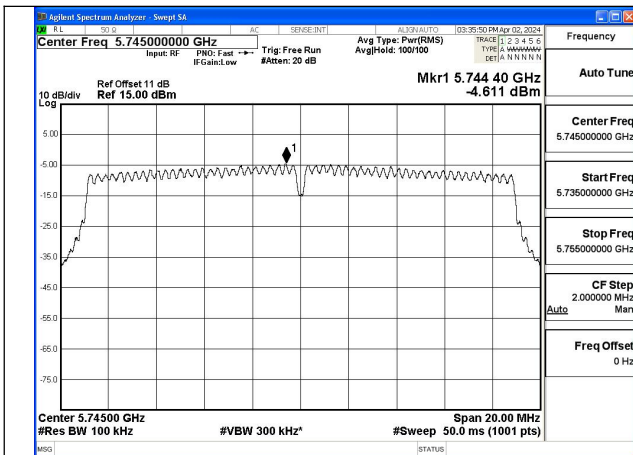


Mode:802.11ac VHT20 Frequency:5745MHz
Ant:Chain0

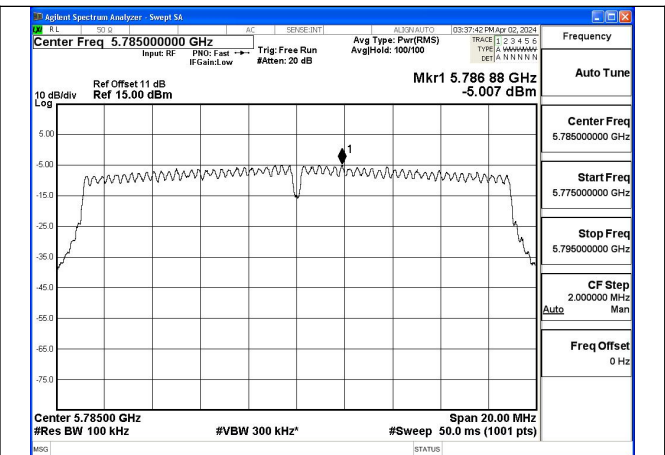


Mode:802.11ac VHT20 Frequency:5785MHz
Ant:Chain0

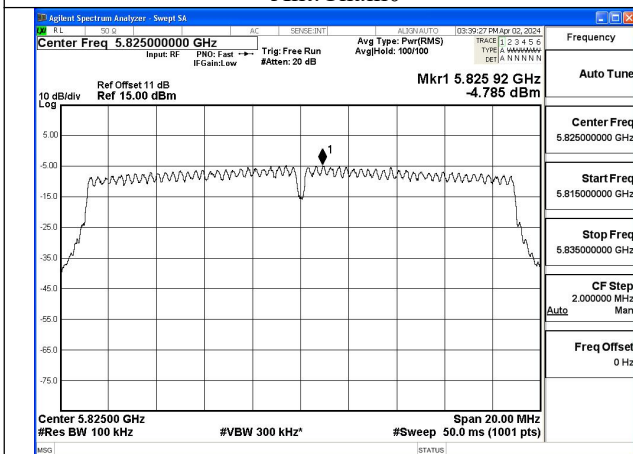


Mode:802.11ac VHT20 Frequency:5825MHz
Ant:Chain0

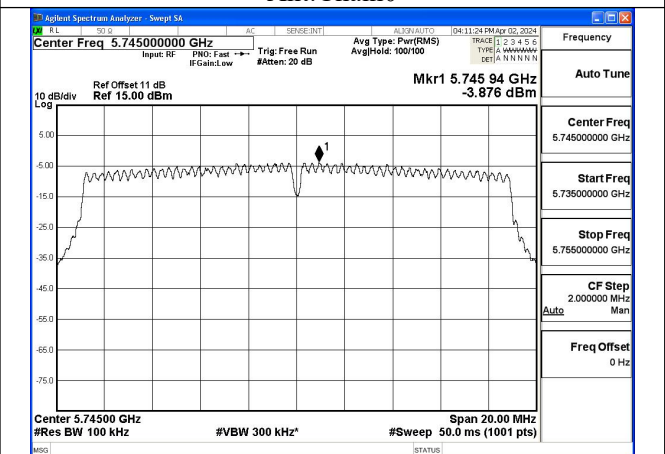

Mode:802.11ac VHT20 Frequency:5745MHz
Ant:Chain1

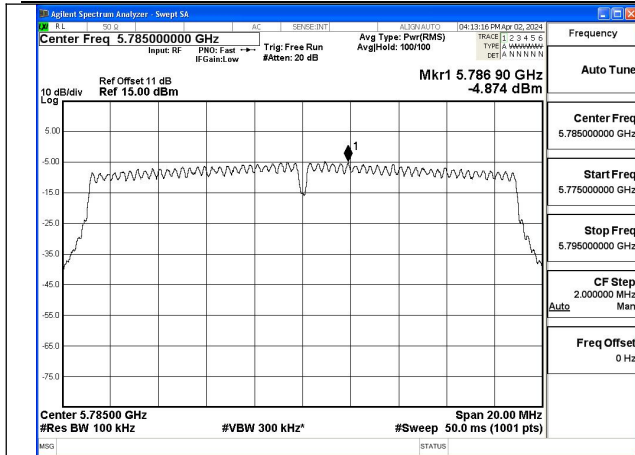


Mode:802.11ac VHT20 Frequency:5785MHz
Ant:Chain1

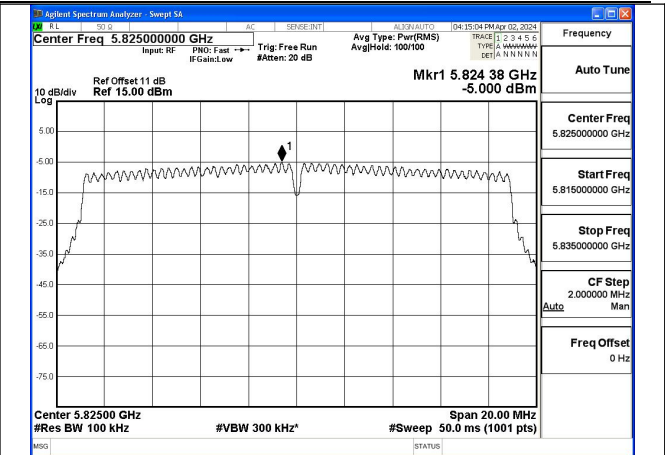


Mode:802.11ac VHT20 Frequency:5825MHz
Ant:Chain1


Test Mode: 802.11n HT40

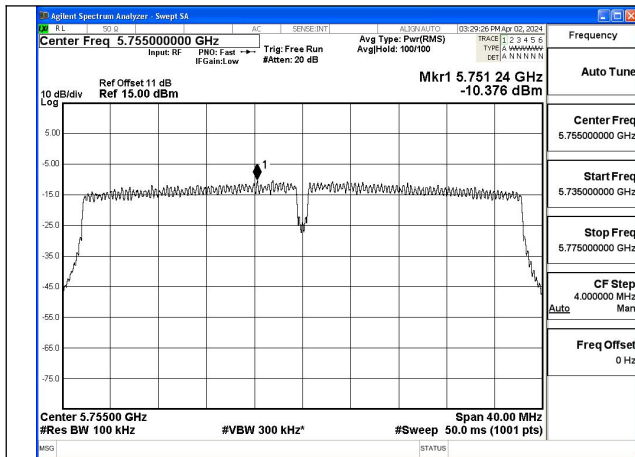


Mode:802.11n HT40 Frequency:5755MHz Ant:Chain0

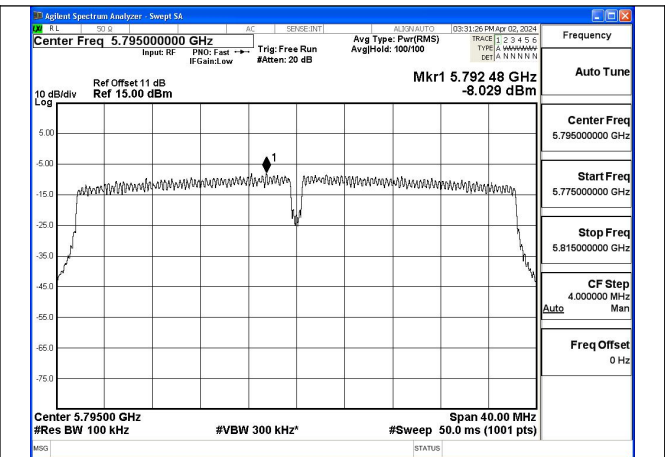

Mode:802.11n HT40 Frequency:5795MHz Ant:Chain0

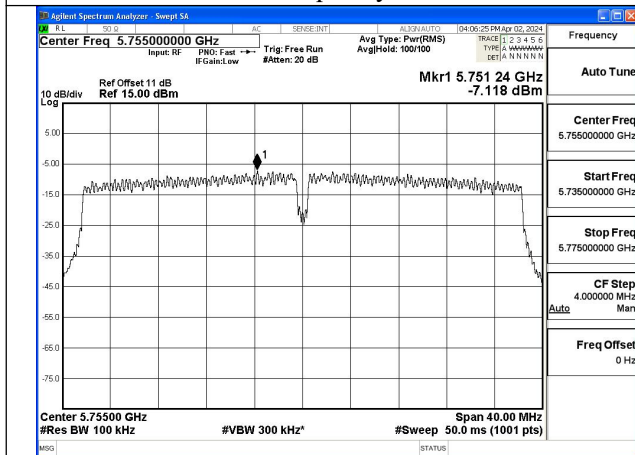

Mode:802.11n HT40 Frequency:5755MHz Ant:Chain1

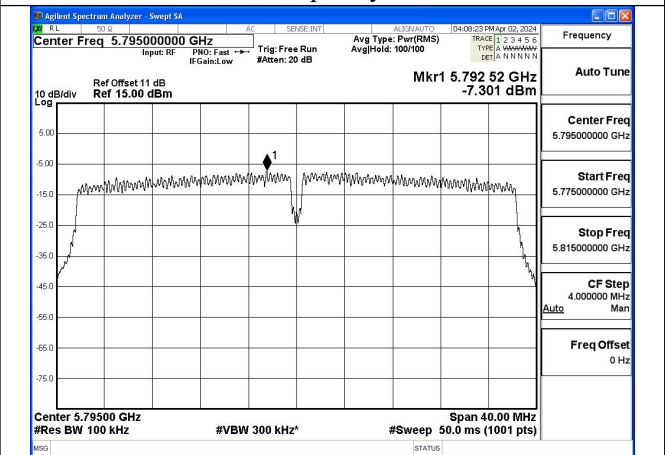

Mode:802.11n HT40 Frequency:5795MHz Ant:Chain1