



Test report No:

25C0463R.701

TEST REPORT

Product Name	WiFi/BT Module
Trademark	Hisense
Model and /or type reference	MWH653S
FCC ID	2AJVQ-MWH653S
Applicant's name / address	Qingdao Intelligent & Precise Electronics Co., Ltd. No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province, China
Test method requested, standard	47 CFR FCC Part 15 (Section 15.247) ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
Verdict Summary	IN COMPLIANCE
Tested By (name / position & signature)	Tim Cao / Project Manager 
Approved by (name / position & signature)	Frank He / Technical Manager 
Date of issue	2026-01-27
Report Version	V1.0
Report template No.	Template_FCC Part 15C-RF-V1.0

INDEX

	page
Competences and Guarantees	4
General conditions	4
Document History	5
Test Summary	6
Used Equipment.....	7
Uncertainty	8
1 General Information	9
2 Description of Test Setup.....	13
3 Verdict summary section.....	14
3.1 Standards	14
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	14
4 Test Results	15
4.1 AC Power Line Conducted Emission.....	15
4.1.1 Limit	15
4.1.2 Test Setup	15
4.1.3 Test Procedure	15
4.2 Emissions in restricted frequency bands	16
4.2.1 Limit	16
4.2.2 Test Setup	17
4.2.3 Test Procedure	18
4.3 Emissions in non-restricted frequency band	19
4.3.1 Limit	19
4.3.2 Test Setup	19
4.3.3 Test Procedure	19
4.4 Duty cycle	20
4.4.1 Limit	20
4.4.2 Test Setup	20
4.4.3 Test Procedure	20
4.5 Radiated Emission Band Edge	21
4.5.1 Limit	21
4.5.2 Test Setup	21
4.5.3 Test Procedure	21
4.6 DTS Bandwidth	22
4.6.1 Limit	22
4.6.2 Test Setup	22

4.6.3	Test Procedure	22
4.7	Fundamental emission output power.....	23
4.7.1	Limit	23
4.7.2	Test Setup	23
4.7.3	Test Procedure	23
4.8	Power Density.....	24
4.8.1	Limit:	24
4.8.2	Test Setup	24
4.8.3	Test Procedure	24
4.9	Antenna Requirement.....	25
4.9.1	Limit:	25
4.9.2	Antenna Connector Construction:	25
5	Test setup photo and EUT Photo	26
Appendix		27
	DTS Bandwidth	28
	Maximum conducted output power	38
	Maximum power spectral density	39
	Reference level measurement	52
	Conducted Band edge measurements	61
	Conducted Spurious Emission	67
	Duty Cycle.....	85
	Band edge measurements.....	95
	Emissions in Restricted Bands	167

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location A	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Test Facility A	A2LA (Certificate No. 3235.01) CNAS (Certificate No. L5313) FCC - Designation Number: CN1199 Test Firm Registration Number: 566524 ISED - CAB identifier: CN0040 IC#: 4075B
Test Location B	No. 8213, Fanhua Avenue, Baohe District, Hefei City, Anhui Province, China
Test Facility B	A2LA (Certificate No. 6579.01) CNAS (Certificate No. L21125) FCC - Designation Number: CN1231 Test Firm Registration Number: 690292 ISED - CAB identifier: CN0175 IC#: 32222
Date(receive sample)	Dec. 15, 2025
Date (start test)	Dec. 16, 2025
Date (finish test)	Jan. 21, 2026

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
25C0463R.701	V1.0	Initial issue of report.	2026-01-27

TEST SUMMARY

Requirement – Test Item	Standard(s)	Location	Verdict	Remark
DTS Bandwidth	FCC 15.247(a)(2)	A	PASS	Test data please refer to appendix
Maximum conducted output power	15.247 (b)(3)	A	PASS	Test data please refer to appendix
Maximum power spectral density	FCC 15.247(e)	A	PASS	Test data please refer to appendix
Band edge measurements	FCC 15.247(d) FCC 15.205 FCC 15.209	B	PASS	Test data please refer to appendix
Conducted Spurious Emission	FCC 15.247(d), FCC 15.209	A	PASS	Test data please refer to appendix
Duty cycle	ANSI C63.10	A	PASS	Test data please refer to appendix
Emissions in Restricted Bands	FCC 15.205 FCC 15.209	B	PASS	Test data please refer to appendix
AC Power Line Conducted Emission	FCC 15.207	N/A	N/A	Note ¹⁾
Antenna Requirement	FCC 15.203	A	PASS	---

Notes:

1. EUT is DC powered.
2. Radiated Emission and Radiated Emission Band Edge were completed at Test Location B, and other tests were completed at Test Location A.

USED EQUIPMENT

Test Location A: Conducted Test/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Wireless Connectivity Tester	R&S	CMW 270	102593	2025.05.10	2026.05.09
High and low temperature and fast temperature change test box	ASTUOD	ASTD-FBT-225K	N/A	2025.03.15	2026.03.14
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2025.06.17	2026.06.16
MAX Signal Analyzer	Agilent	N9020A	MY49100159	2025.10.15	2026.10.14
RF Control Unit	Tonscend	JS0806-2	22G8060594	2025.01.26	2026.01.25
Vector Signal Genertor	R&S	SMM 100A	101853	2025.09.20	2026.09.19
EXG-B MW Analog Signal Generator	Keysight	N5173B	MY61252566	2025.05.10	2026.05.09
Test Software	Tonscend	TS1120	JS1120-3	N/A	N/A

Test Location A: Radiated Emission(9KHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Anechoic chamber	Quietek	9m*6m*6m	AC2	2024.07.07	2029.07.06
EMI Test Receiver	R&S	ESCI	100573	2025.12.07	2026.12.06
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2025.03.24	2026.03.23
Temperature/Humidity Meter	RTS	RTS-1909	THM-021	2025.04.30	2026.04.29
Dekra test software	Dekra	N/A	N/A	N/A	N/A

Test Location B: Radiated Emission Band Edge / AC103

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Fully-anechoic chamber	Maorui	9m*6m*6m	AC103	2023.08.23	2028.08.22
MAX Signal Analyzer	Keysight	N9020B	MY63490118	2025.08.08	2026.08.07
Horn Antenna	RF SPIN	DRH18-E	KV2D11A18ES	2025.09.06	2026.09.05
Low Noise Amplifier	Tonscend	TAP01018048S	AP23J8060307	2025.10.17	2026.10.16
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	01312	2025.10.18	2026.10.17
Low Noise Amplifier	ESE	LNA1840	LNA23070301	2025.10.17	2026.10.16
Temperature/Humidity Meter	RITERS	RTS-8S	029	2025.08.25	2026.08.24
Temperature/Humidity Meter	RITERS	RTS-8S	010	2025.08.25	2026.08.24
Test Software	Tonscend	J536	JS36-RSE	N/A	N/A

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Test item Test Location A	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.8 dB 150kHz~30MHz: 2.4 dB
Peak Power Output	± 1.3 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.5 dB 300MHz~1GHz: 3.6 dB Vertical: 30MHz~200MHz: 3.6 dB 300MHz~1GHz: 3.5 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.0 dB Vertical: 1GHz~18GHz: 4.8 dB Horizontal: 18GHz~26.5GHz: 5.3 dB Vertical: 18GHz~26.5GHz: 4.9 dB
RF antenna conducted test	± 1.3 dB
Carrier Frequency Separation	± 1.0 kHz
Number of Hopping Frequencies	± 1.0 kHz
Time of Occupancy (Dwell Time)	± 0.10 us
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 1.0 kHz
Occupied Bandwidth	± 1.0 kHz
Power Density	± 1.3 dB

Test item Test Location B	Uncertainty
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 4.86 dB 300MHz~1GHz: 4.86 dB Vertical: 30MHz~200MHz: 4.92 dB 300MHz~1GHz: 4.92 dB
Radiated Emission(1GHz~40GHz)	Horizontal: 1GHz~18GHz: 5.99 dB Vertical: 1GHz~18GHz: 5.76 dB Horizontal: 18GHz~40GHz: 5.99 dB Vertical: 18GHz~40GHz: 5.76 dB
Radiated Emission Band Edge	± 5.99 dB

1 GENERAL INFORMATION

Product Name	WiFi/BT Module	
Model No.	MWH653S	
Trademark.	Hisense	
FCC ID.....	2AJVQ-MWH653S	
SN.....	Conducted: 25C0463R-1	
	Radiated: 25C0463R-3	
Manufacturer	Qingdao Intelligent & Precise Electronics Co., Ltd.	
Manufacturer Address	No.218, Qianwangang Road, Economic and Technological Development Zone, Qingdao, Shandong Province, China	
Power Supply	3.3 Vdc	
Wireless specification	Wi-Fi	
Operating frequency range(s)	2400~2483.5MHz	
Channel Spacing	802.11b/g/n/ax: 20MHz 802.11n/ax: 40MHz	
Modulation technology	DSSS / OFDM / OFDMA	
Smart System.....	☒	SISO
	☒	MIMO-CDD
Device category.....	☐	Fixed point-to-point
	☐	Emit multiple directional beams, simultaneously or sequentially
	☒	Other cases
Antenna type	FPCB	
Antenna Gain	SISO	Main: 5.24 dBi Aux: 5.18 dBi
	MIMO-CDD	5.24dBi for power, 8.25dBi for PSD
Remark: 1. As above information is provided and confirmed by the applicant. DEKRA is not liable to the accuracy, suitability, reliability or/and integrity of the information. 2. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix, all the other test case were performed with full RU with its maximum power/PSD. 3. 4. This device is equipped with two Wi-Fi 2.4GHz antennas. We tested the output power of both chains separately. When testing other conduction test items, only the chain with higher power was selected for testing. When testing radiated spurious emissions, we tested the data of both antenna chains and MIMO mode, but only the data of the MIMO(ANT0+ANT2), was shown in the report.		

<Small size RU 52+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	26	52	1	38	1
20MHz	52	26	38	4	2
20MHz	52	26	39	7	3

<Small size RU 106+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	106	26	53	4	1
20MHz	26	106	4	54	2

1.1 Power setting in test

Mode	Channel/ Frequency (MHz)	Data rate	Power setting
802.11b	1 / 2412	1	13.0
	6 / 2437	1	15.0
	11 / 2462	1	16.0
802.11g	1 / 2412	6	14.5
	6 / 2437	6	14.5
	11 / 2462	6	15.0
802.11n(20MHz)	1 / 2412	MCS0	12.5
	6 / 2437	MCS0	12.0
	11 / 2462	MCS0	12.5
802.11n(40MHz)	3 / 2422	MCS0	12.5
	6 / 2437	MCS0	12.0
	9 / 2452	MCS0	12.0
802.11ax(20MHz)	1 / 2412	MCS0	13.0
	6 / 2437	MCS0	13.0
	11 / 2462	MCS0	13.0
802.11ax(40MHz)	3 / 2422	MCS0	13.0
	6 / 2437	MCS0	13.0
	9 / 2452	MCS0	12.5

Channel/ Frequency (MHz)	RU configure	Data rate	Power setting
1 / 2412	26/0	MCS0	6.0
1 / 2412	52/37	MCS0	6.0
1 / 2412	106/53	MCS0	6.0
11 / 2462	26/8	MCS0	7.0
11 / 2462	52/40	MCS0	7.0
11 / 2462	106/54	MCS0	7.0


1.2 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:


Modulation Type	SISO - Data Rate	MIMO - Data Rate
802.11b	1Mbps	N/A
802.11g	6Mbps	N/A
802.11n (HT 20)	MCS0(6.5 Mbps)	MCS0(6.5 Mbps)
802.11n (HT 40)	MCS0(13.5 Mbps)	MCS0(13.5 Mbps)
802.11ax (HE 20)	MCS0(6.5 Mbps)	MCS0(7.3 Mbps)
802.11ax (HE 40)	MCS0(13.5 Mbps)	MCS0(14.6 Mbps)
Note: EUT supports SISO Ant 1 antenna mode, SISO Ant 2 mode and MIMO Ant 1+2 mode. What is shown in the report is the data of the worst antenna mode.		

2 DESCRIPTION OF TEST SETUP


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
(1) Notebook	Think pad x220	Lenovo	Adapter
(2) Ethernet cable	N/A	N/A	N/A
(3) Ethernet cable	N/A	N/A	N/A
Software	Type / Version	Manufacturer	Supplied by
Hammer	1.4.5.2	Seekwave	N/A

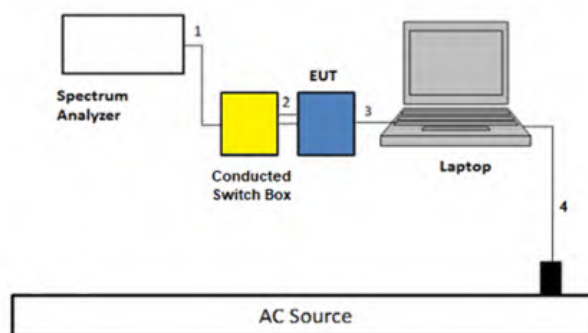

Conducted RF

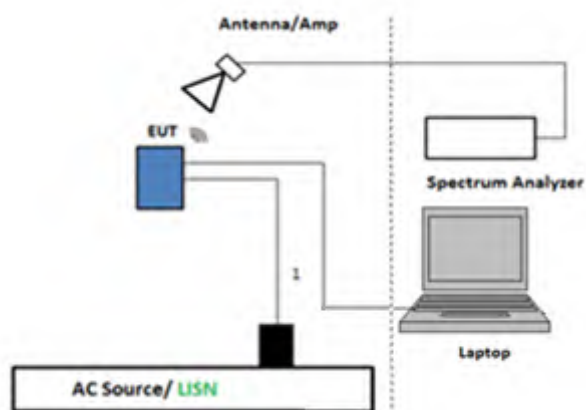

Radiated Test Above 1GHz

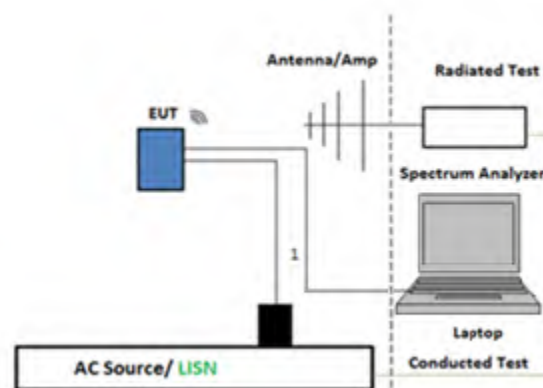

Radiate Test Below 1GHz

Accessories Information	Cable		
	Length used during test [m]	Attached during test	Shielded
(2) Ethernet cable	1	☒	☒
(3) Ethernet cable	8	☒	☒

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2020	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024	2024	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01V05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
KDB 662911 D01V02r01	2020	Provision to Allow Measurement of Directional Gain of Multi-Antenna Systems for Compliance Verification

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: N/A


4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50

¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

4.1.2 Test Setup

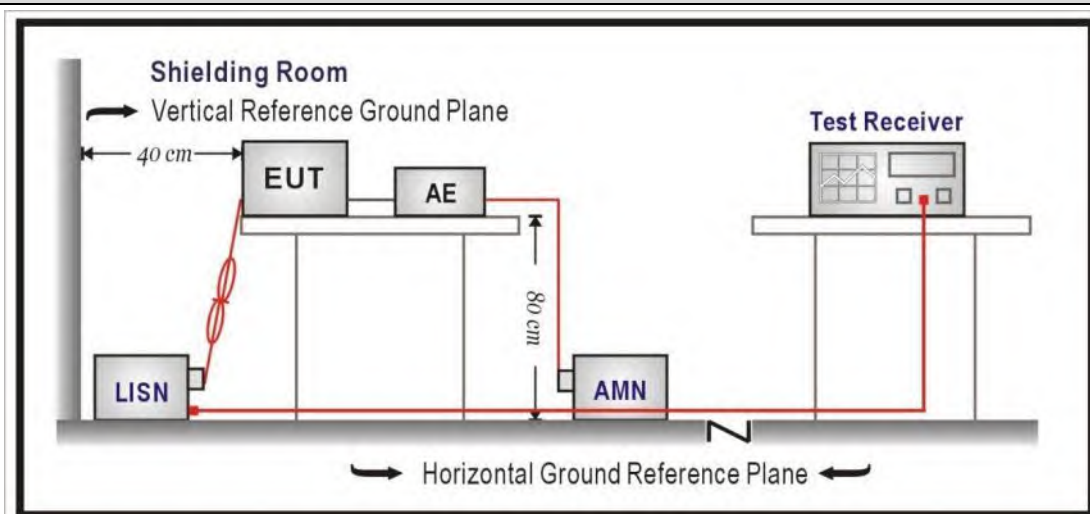

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.205; 15.209

Restricted Bands of operation for FCC

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6
13.36 – 13.41	--	--	--

Restricted Band Emissions Limit

Frequency (MHz)	Field strength (μV/m)	Field strength (dBμV/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation


factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

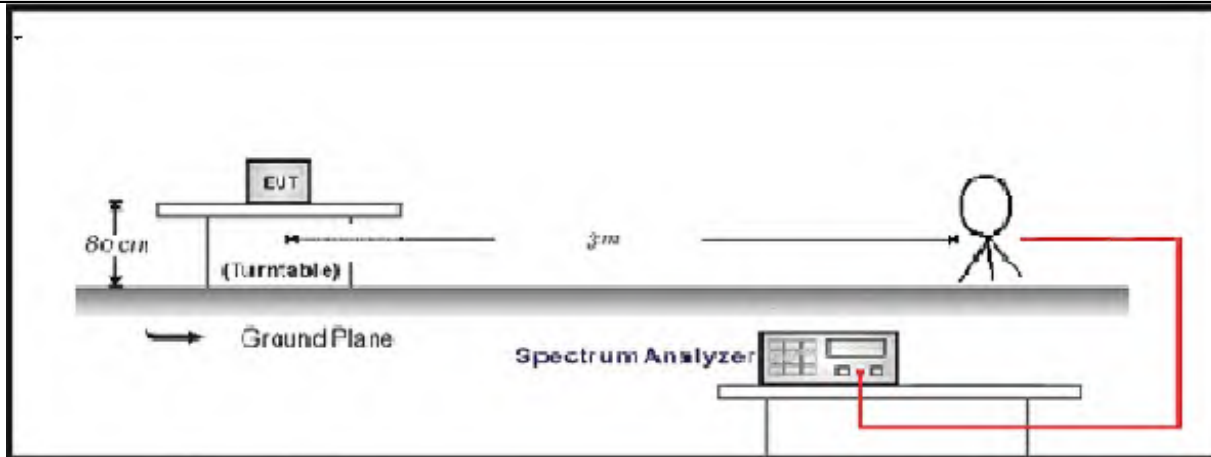

30MHz-1GHz Test Setup:

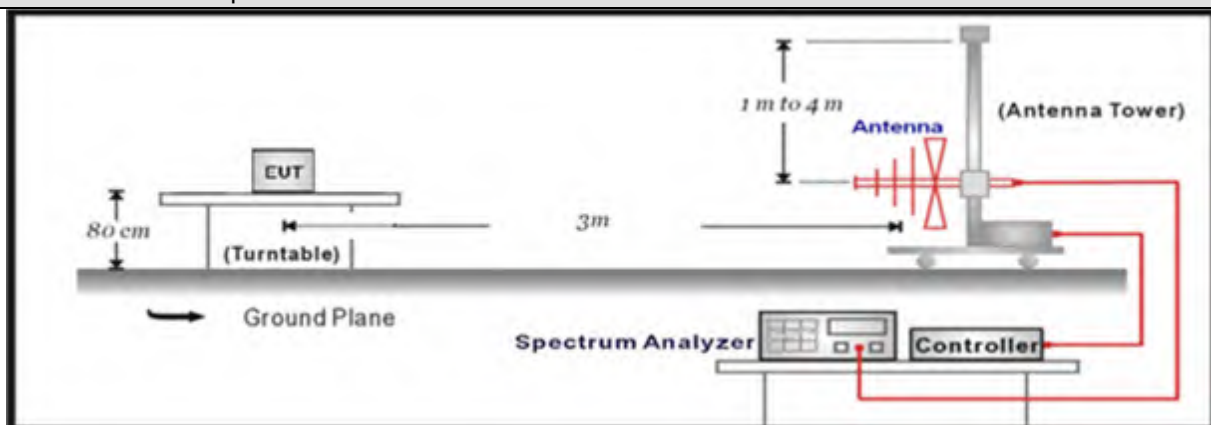

Above 1GHz Test Setup:

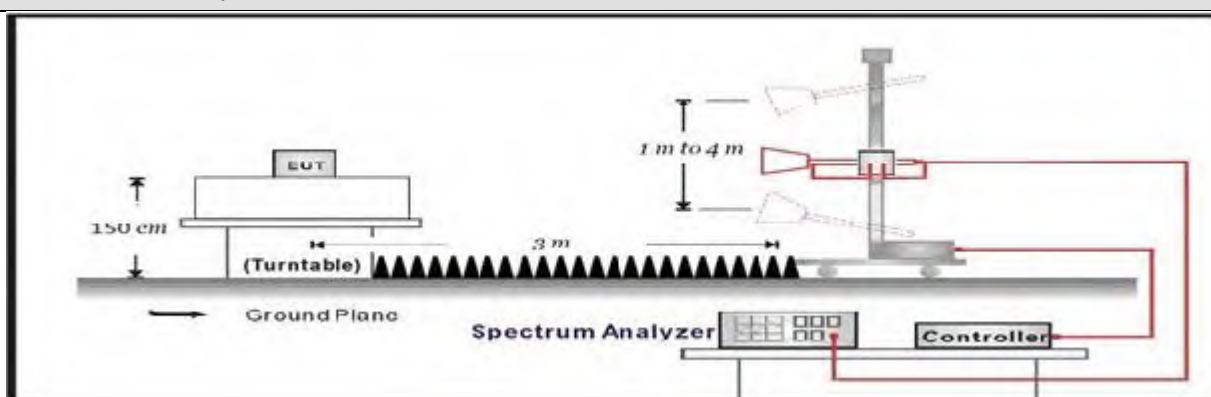

4.2.3 Test Procedure


	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	6.3	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
	☒	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
	☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).


Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

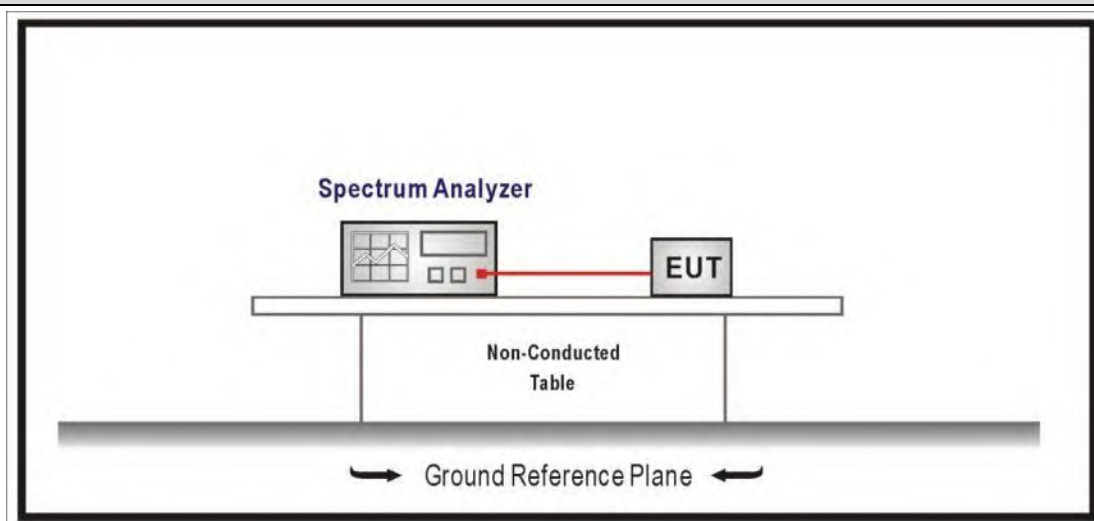4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.4 Duty cycle**VERDICT: PASS****4.4.1 Limit**

N/A

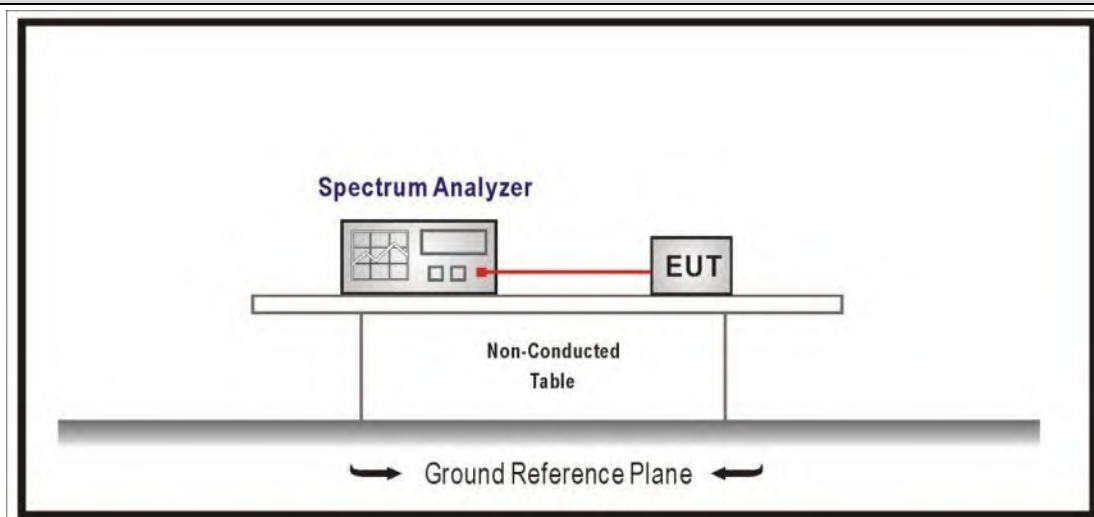4.4.2 Test Setup**4.4.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.5 Radiated Emission Band Edge**VERDICT: PASS****4.5.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) , 15.205, 15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

Above 1GHz Test Setup:

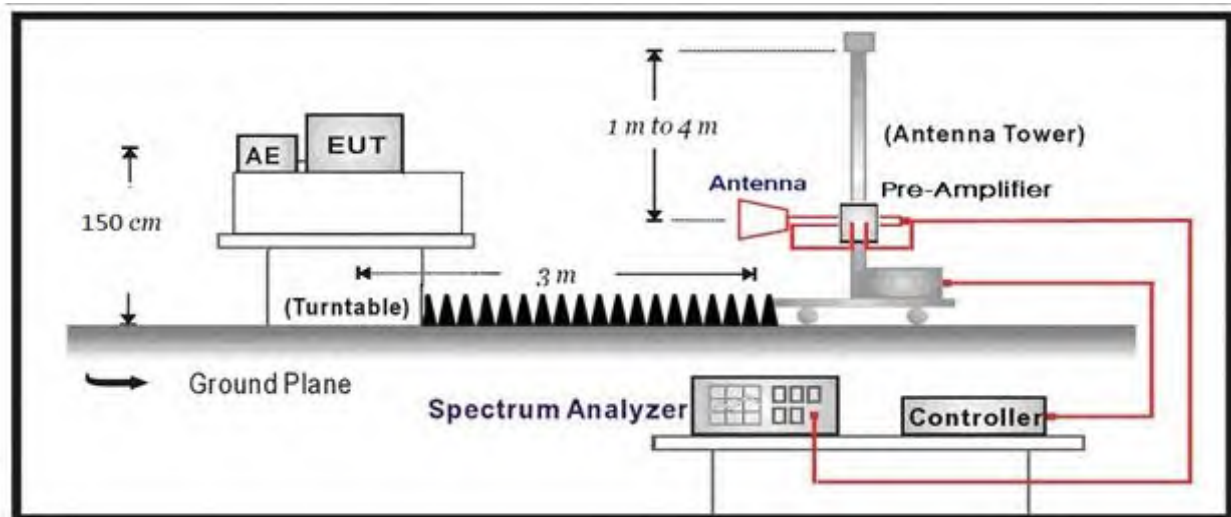**4.5.3 Test Procedure**

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
☒	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
☒	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
☒	☒ ANSI C63.10	11.12.1	Radiated emission measurements
☒	☒ ANSI C63.10	6.3	Radiated spurious emission test
☐	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.6 DTS Bandwidth**VERDICT: PASS****4.6.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247 (a)(2)
-----------------	---

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

Standard	ANSI C63.10 Paragraph 6.7
-----------------	---------------------------

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs. The occupied bandwidth should be within the required frequency range.

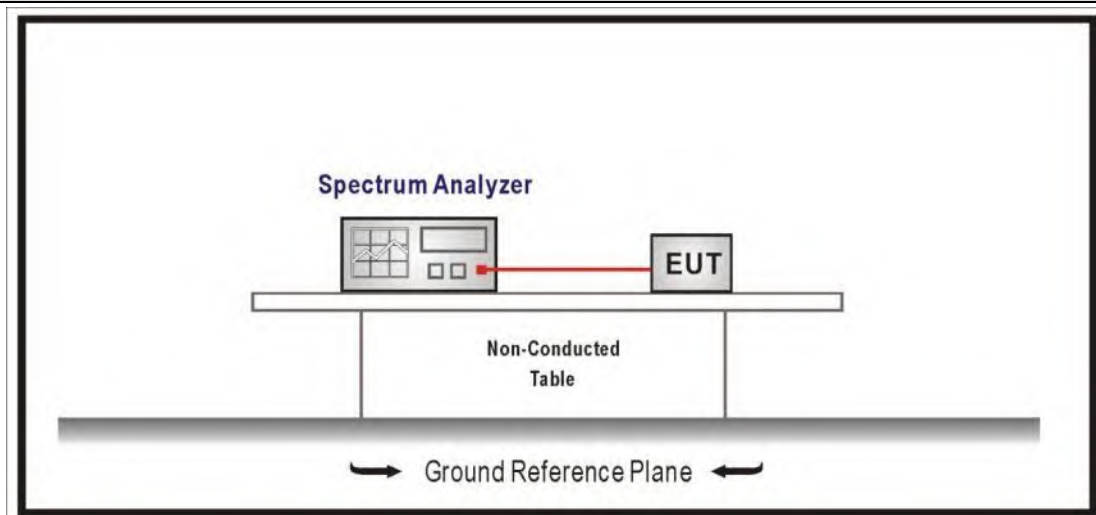4.6.2 Test Setup**4.6.3 Test Procedure**


	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
	☒ ANSI C63.10	11.8.1	Option 1
	☐ ANSI C63.10	11.8.2	Option 2
☒	ANSI C63.10	6.9	Occupied bandwidth
	☐ ANSI C63.10	6.9.2	relative measurement procedure
	☒ ANSI C63.10	6.9.3	power bandwidth (99%) measurement procedure

4.7 Fundamental emission output power**VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX <6dBi	Pout≤30dBm
☐	GTX >6dBi	
☐	Non-Fix point-point	Pout≤30-(GTX -6)
☐	Fix point-point	Pout≤30-[(GTX-6)]/3
☐	Point-to-multipoint	Pout≤30-(GTX-6)
☐	Overlap Beams	Pout≤30-[(GTX-6)]/3
☐	Avgregate power transmitted simultaneously on all beams	Pout≤30-[(GTX-6)]/3
☐	single directional beam	Pout≤30-[(GTX-6)]/3+8dB

Note 1 : GTX directional gain of transmitting antennas.


Note 2 : Pout is maximum conducted output power .

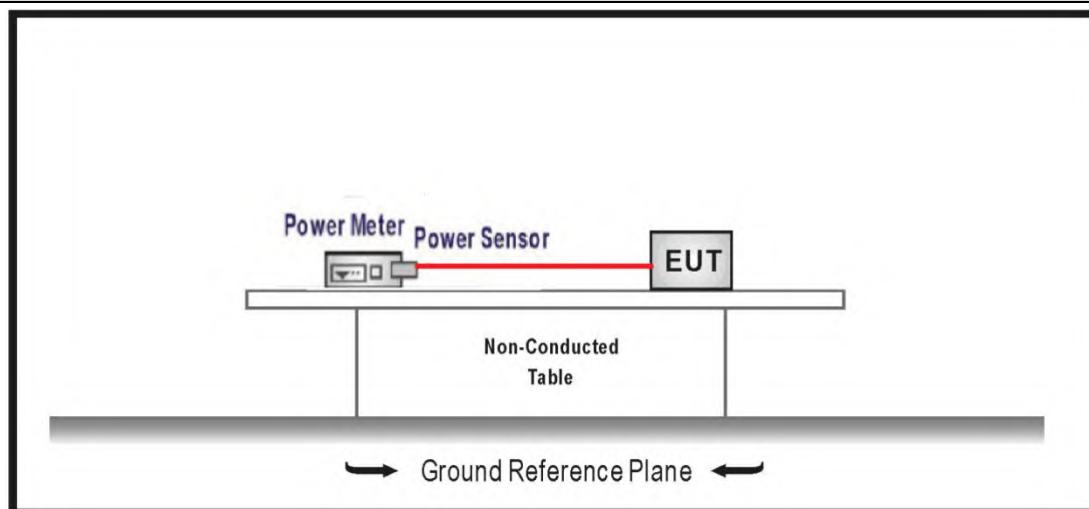4.7.2 Test Setup**4.7.3 Test Procedure**

	References Rule		Chapter	Description
☒	ANSI C63.10		11.9	Fundamental emission output power
☒	ANSI C63.10		11.9.1	Maximum peak conducted output power
	☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth
	☒	ANSI C63.10	11.9.1.2	PKPM1 Peak power meter method

4.8 Power Density**VERDICT: PASS****4.8.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (e)

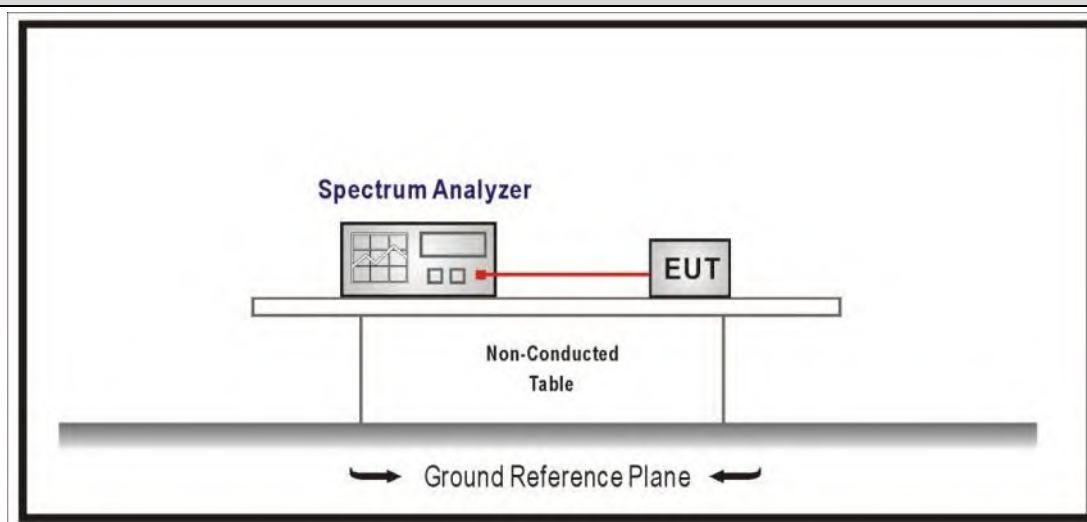Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ **4.8.2 Test Setup****4.8.3 Test Procedure**

	References Rule	Chapter	Description
☒	ANSI C63.10	11.10	Maximum power spectral density level in the fundamental emission
☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
☒	KDB 662911	E2)c)	In-Band Power Spectral Density (PSD) Measurements

4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☐ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☒ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

APPENDIX


DTS Bandwidth Test Result

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	8.240	2407.880	2416.120	0.5	PASS
11B	2437	8.240	2432.880	2441.120	0.5	PASS
11B	2462	8.240	2457.880	2466.120	0.5	PASS
11G	2412	16.400	2403.720	2420.120	0.5	PASS
11G	2437	16.520	2428.760	2445.280	0.5	PASS
11G	2462	16.960	2453.600	2470.560	0.5	PASS
11N20	2412	18.160	2402.720	2420.880	0.5	PASS
11N20	2437	17.880	2428.080	2445.960	0.5	PASS
11N20	2462	17.840	2453.120	2470.960	0.5	PASS
11N40	2422	36.400	2403.840	2440.240	0.5	PASS
11N40	2437	36.400	2418.840	2455.240	0.5	PASS
11N40	2452	36.960	2433.360	2470.320	0.5	PASS
11AX20	2412	18.920	2402.560	2421.480	0.5	PASS
11AX20	2437	18.920	2427.560	2446.480	0.5	PASS
11AX20	2462	19.000	2452.480	2471.480	0.5	PASS
11AX40	2422	38.000	2403.120	2441.120	0.5	PASS
11AX40	2437	37.600	2418.200	2455.800	0.5	PASS
11AX40	2452	38.160	2432.880	2471.040	0.5	PASS


Note : We have evaluated both SISO-Ant1, SISO-Ant2 and MIMO mode, only worst data shown in this report.

Test Graphs




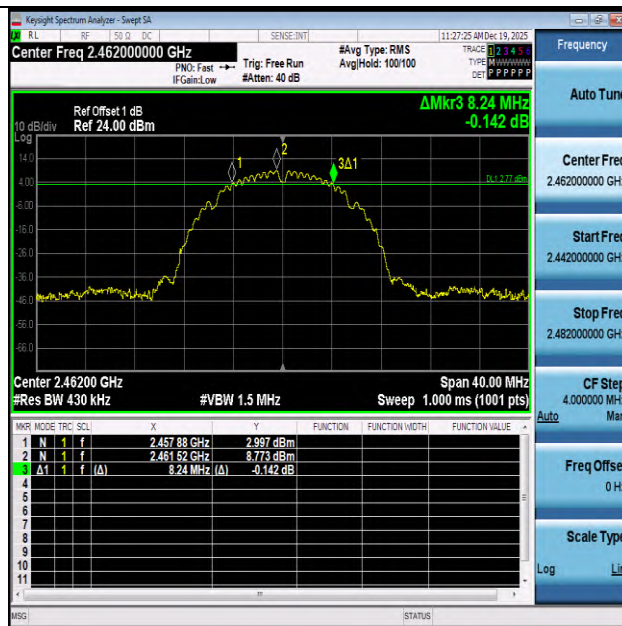


11B-2462-PASS

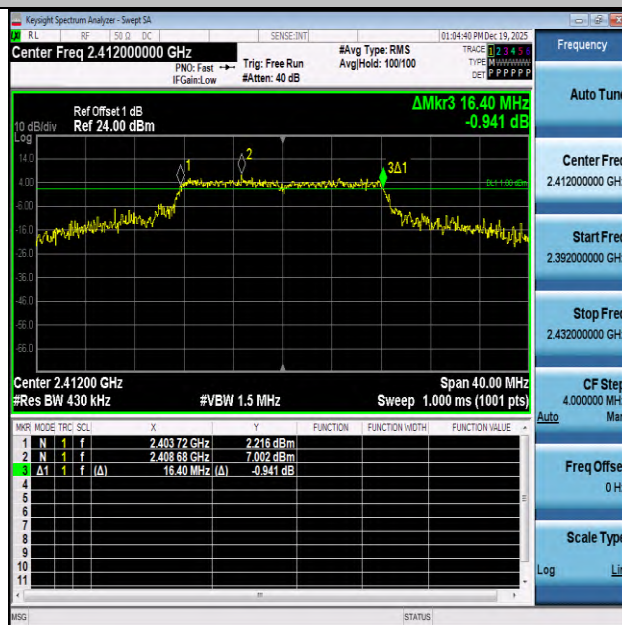


11G-2412-PASS

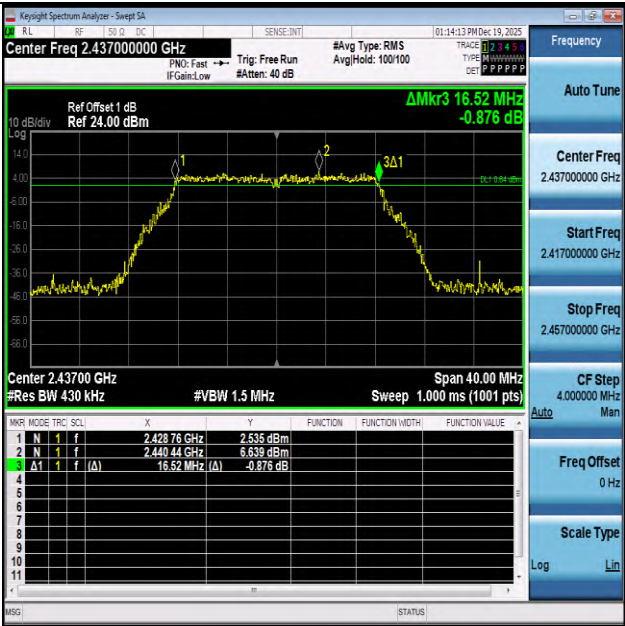


11G-2437-PASS

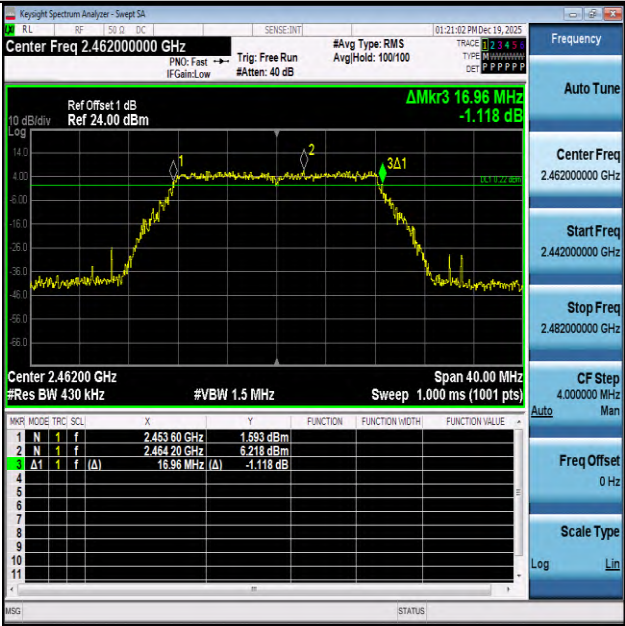


11G-2462-PASS

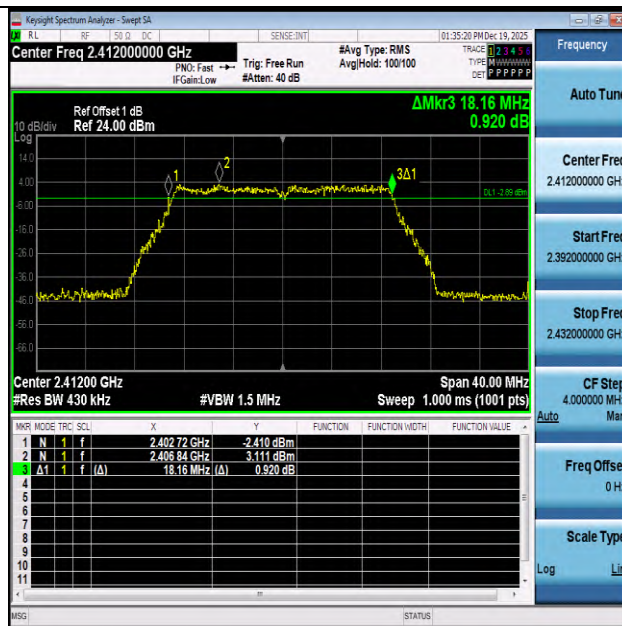


11N20-2412-PASS

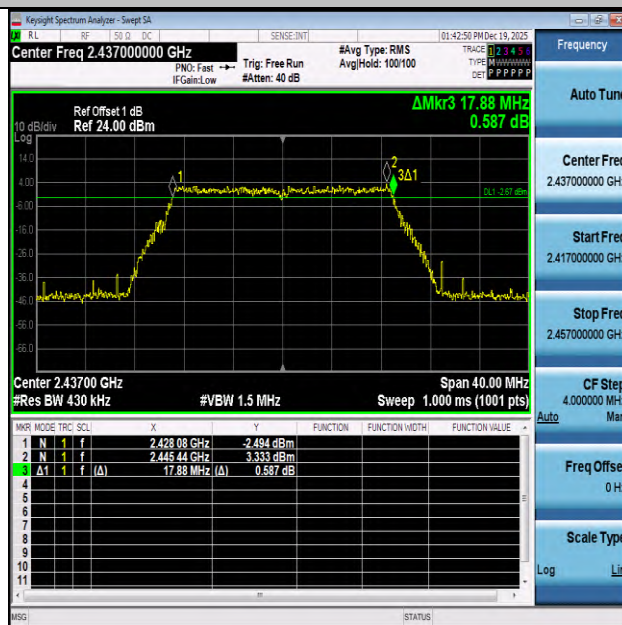


11N20-2437-PASS

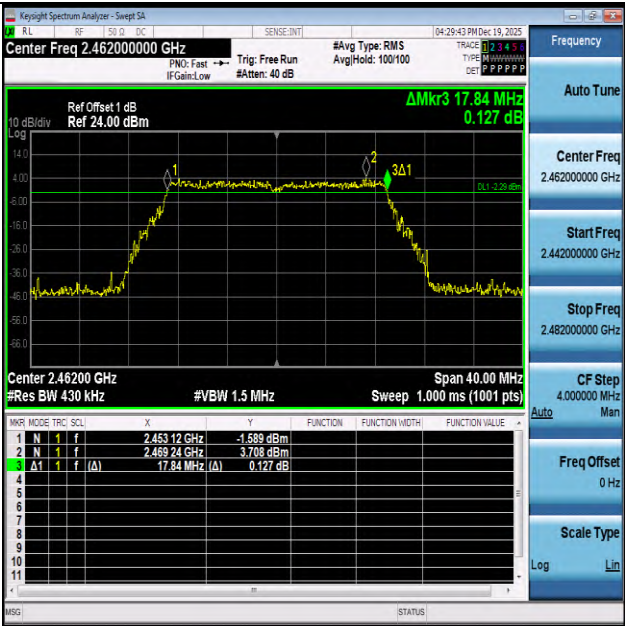


11N20-2462-PASS

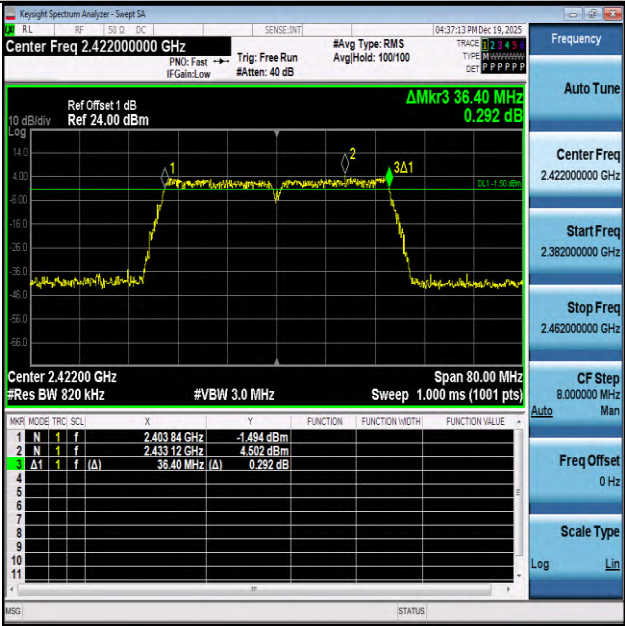


11N40-2422-PASS

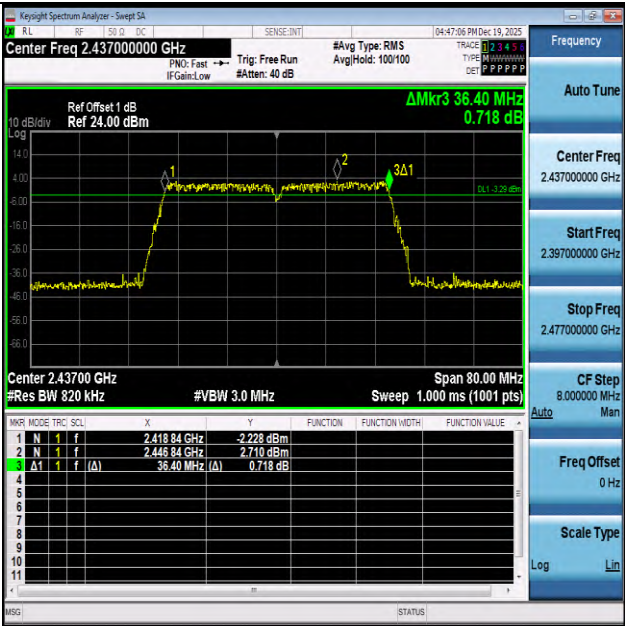


11N40-2437-PASS

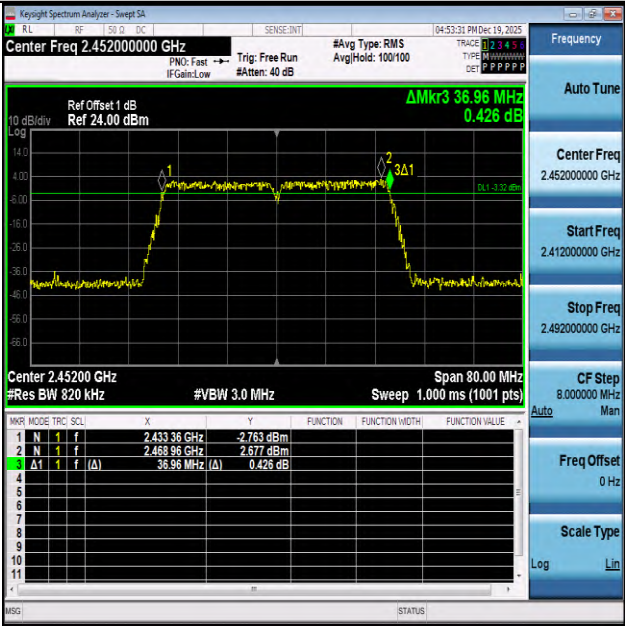


11N40-2452-PASS

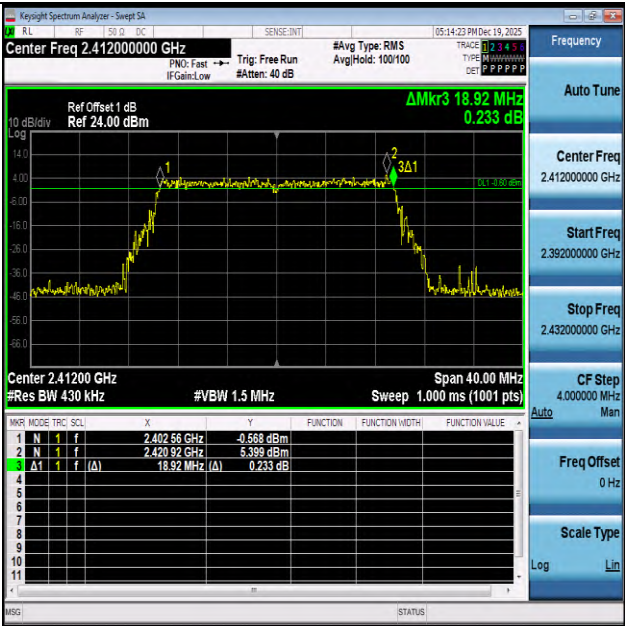


11AX20-2412-PASS

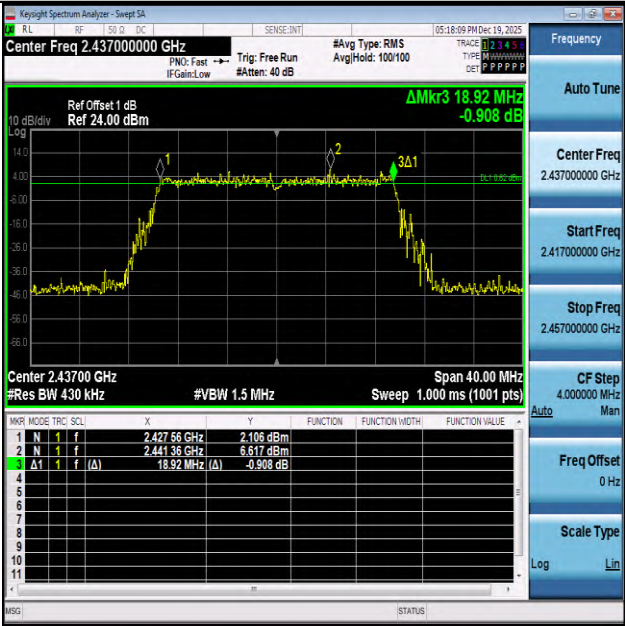


11AX20-2437-PASS

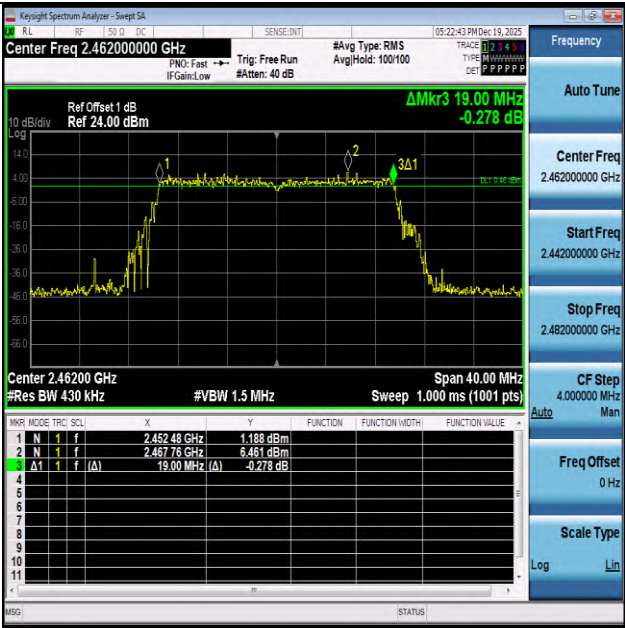


11AX20-2462-PASS

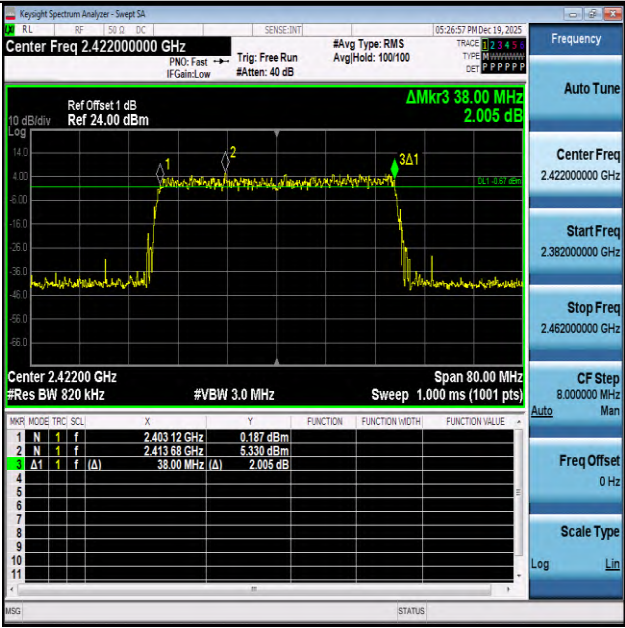

11AX40-2422-PASS

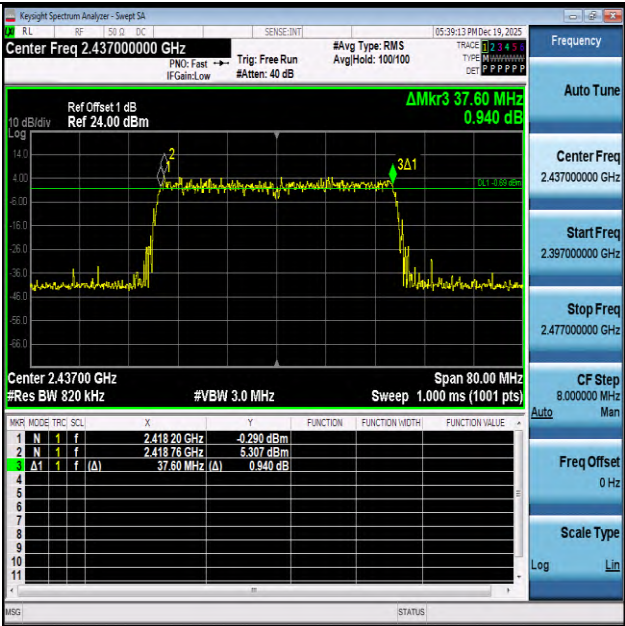

11AX40-2437-PASS

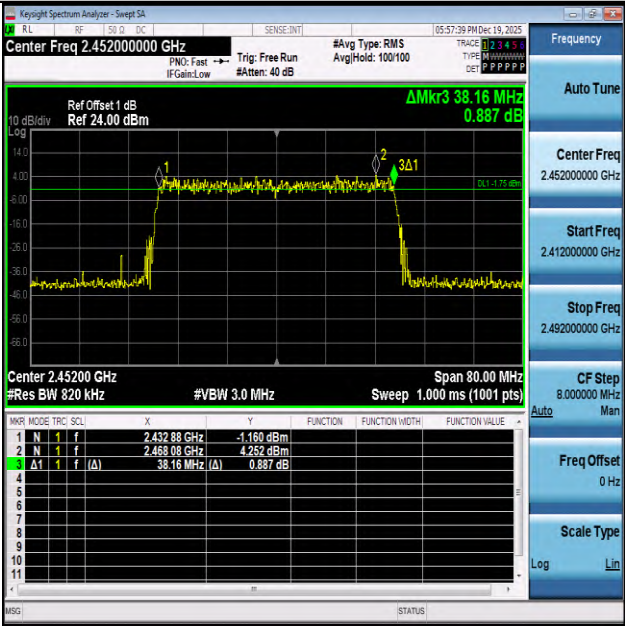

11AX40-2452-PASS

Maximum conducted output power

Test Mode	Frequency[MHz]	Average Output power [dBm]			Limit [dBm]	Verdict
		SISO-Main	SISO-Aux	MIMO-Mian+Aux		
11B	2412	11.87	12.75	N/A	≤30.00	PASS
11B	2437	14.52	14.68	N/A	≤30.00	PASS
11B	2462	15.52	15.98	N/A	≤30.00	PASS
11G	2412	13.66	15.88	N/A	≤30.00	PASS
11G	2437	13.91	15.47	N/A	≤30.00	PASS
11G	2462	13.46	15.82	N/A	≤30.00	PASS
11N20	2412	11.34	13.21	15.39	≤30.00	PASS
11N20	2437	12.54	12.78	15.67	≤30.00	PASS
11N20	2462	11.22	13.25	15.36	≤30.00	PASS
11N40	2422	11.27	12.41	14.89	≤30.00	PASS
11N40	2437	10.72	12.01	14.42	≤30.00	PASS
11N40	2452	10.64	12.47	14.66	≤30.00	PASS
11AX20	2412	11.96	12.98	15.51	≤30.00	PASS
11AX20	2437	12.21	12.96	15.61	≤30.00	PASS
11AX20	2462	12.37	12.97	15.69	≤30.00	PASS
11AX40	2422	11.74	11.96	14.86	≤30.00	PASS
11AX40	2437	11.64	11.85	14.76	≤30.00	PASS
11AX40	2452	10.97	12.12	14.59	≤30.00	PASS

Partial RU:

Test Mode	Frequency[MHz]	RU Configuration	Average Output power [dBm]			Limit [dBm]	Verdict
			SISO-Main	SISO-Aux	MIMO- Mian+Aux		
11AX20	2412	26/0	5.02	4.66	7.85	≤30.00	PASS
11AX20	2412	52/37	5.59	5.63	8.62	≤30.00	PASS
11AX20	2412	106/53	4.84	4.73	7.80	≤30.00	PASS
11AX20	2462	26/0	5.36	5.93	8.66	≤30.00	PASS
11AX20	2462	52/37	6.27	5.81	9.06	≤30.00	PASS
11AX20	2462	106/53	6.98	6.12	9.58	≤30.00	PASS

Maximum power spectral density

Test Result

Test Mode	Frequency [MHz]	Result [dBm/3kHz]		Limit [dBm/3kHz]		Verdict
		SISO	MIMO	SISO	MIMO	
11B	2412	-4.80	N/A	≤8.00	N/A	PASS
11B	2437	-4.44	N/A	≤8.00	N/A	PASS
11B	2462	-3.74	N/A	≤8.00	N/A	PASS
11G	2412	-10.37	N/A	≤8.00	N/A	PASS
11G	2437	-10.45	N/A	≤8.00	N/A	PASS
11G	2462	-10.52	N/A	≤8.00	N/A	PASS
11N20	2412	-13.19	-10.18	≤8.00	≤5.75	PASS
11N20	2437	-13.89	-10.88	≤8.00	≤5.75	PASS
11N20	2462	-12.75	-9.74	≤8.00	≤5.75	PASS
11N40	2422	-15.74	-12.73	≤8.00	≤5.75	PASS
11N40	2437	-15.96	-12.95	≤8.00	≤5.75	PASS
11N40	2452	-16.91	-13.90	≤8.00	≤5.75	PASS
11AX20	2412	-13.63	-10.62	≤8.00	≤5.75	PASS
11AX20	2437	-13.21	-10.20	≤8.00	≤5.75	PASS
11AX20	2462	-13.05	-10.04	≤8.00	≤5.75	PASS
11AX40	2422	-17.10	-14.09	≤8.00	≤5.75	PASS
11AX40	2437	-17.01	-14.00	≤8.00	≤5.75	PASS
11AX40	2452	-17.98	-14.97	≤8.00	≤5.75	PASS

Note1: We have evaluated both SISO-Ant1, SISO-Ant2 and MIMO mode, only worst data shown in this report.

Note2: $PSD_{MIMO} = PSD_{SISO} + 10 \cdot \log(N)$, N = Antenna number.

Partial RU:

Test Mode	Frequency [MHz]	RU Configuration	Result [dBm/3kHz]		Limit [dBm/3kHz]		Verdict
			SISO	MIMO	SISO	MIMO	
11AX20	2412	26/0	-14.63	-11.62	≤8.00	≤5.75	PASS
11AX20	2412	52/37	-16.25	-13.24	≤8.00	≤5.75	PASS
11AX20	2412	106/53	-19.88	-16.87	≤8.00	≤5.75	PASS
11AX20	2462	26/0	-13.13	-10.12	≤8.00	≤5.75	PASS
11AX20	2462	52/37	-15.16	-12.15	≤8.00	≤5.75	PASS
11AX20	2462	106/53	-14.98	-11.97	≤8.00	≤5.75	PASS

Note1: We have evaluated both SISO-Ant1, SISO-Ant2 and MIMO mode, only worst data shown in this report.


Note2: $PSD_{MIMO} = PSD_{SISO} + 10 \cdot \log(N)$, N = Antenna number.

Test Graphs







11B-2462-PASS

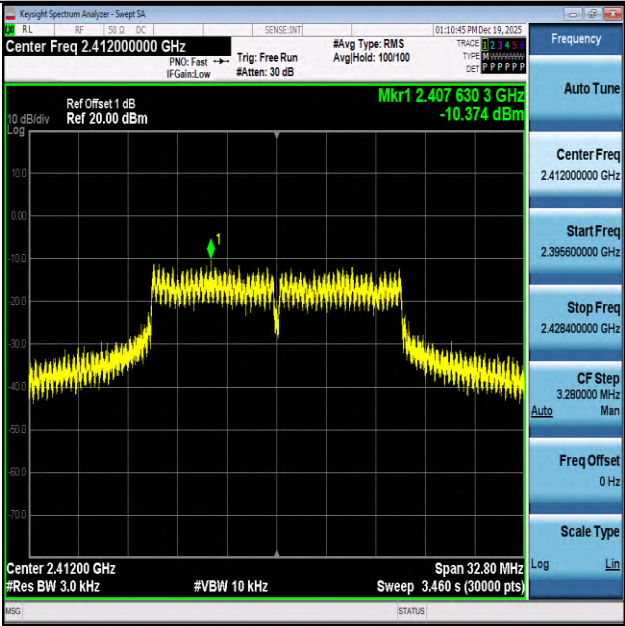


11G-2412-PASS

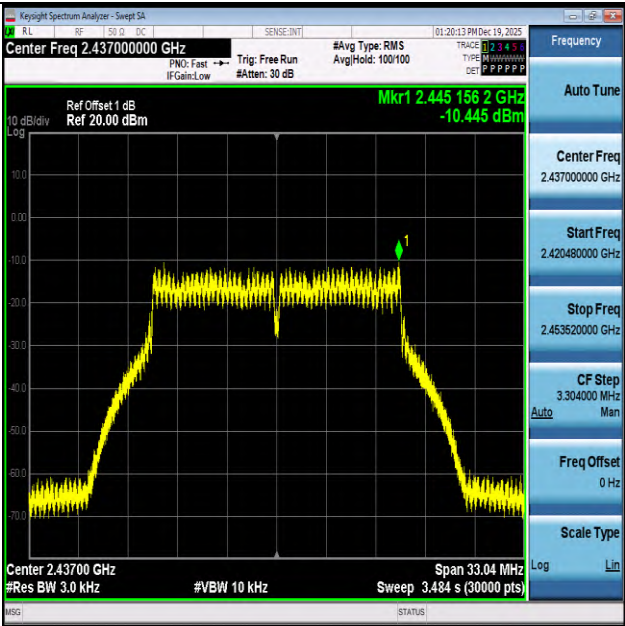


11G-2437-PASS

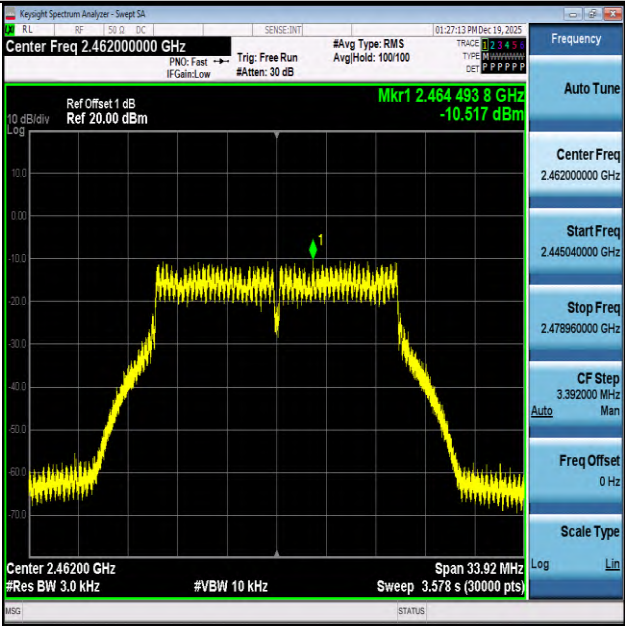


11G-2462-PASS

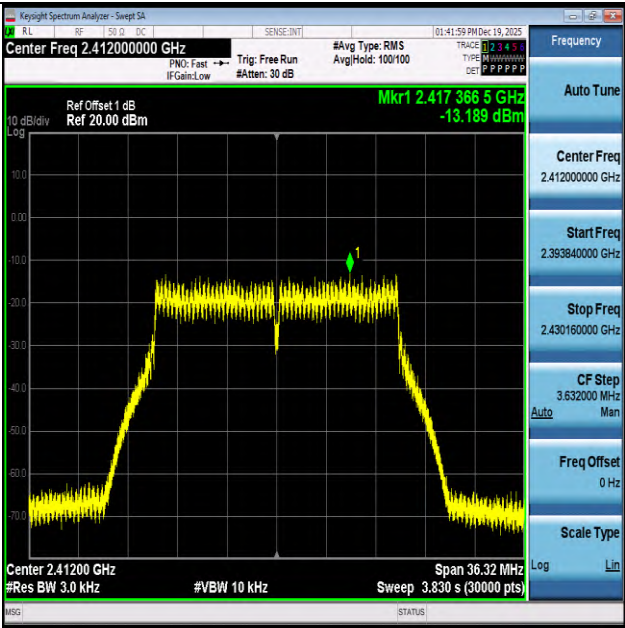


11N20-2412-PASS

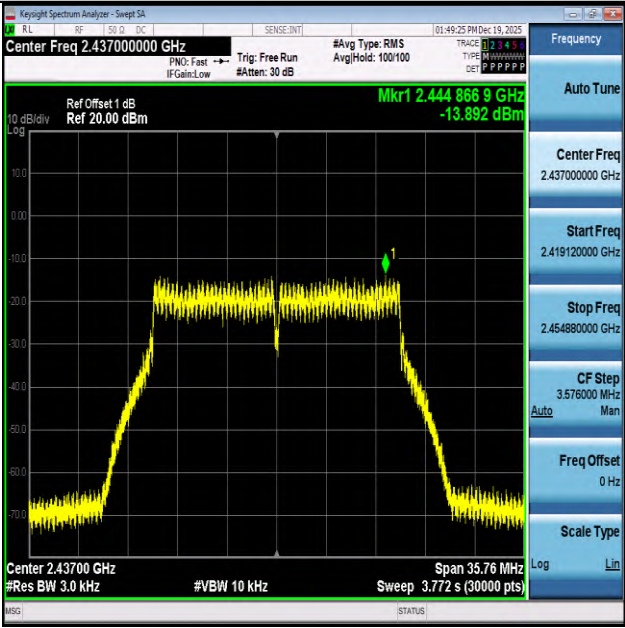


11N20-2437-PASS

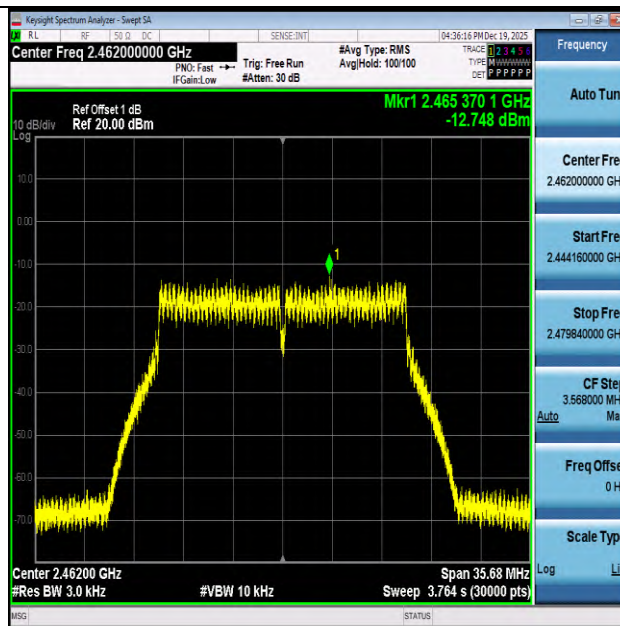


11N20-2462-PASS

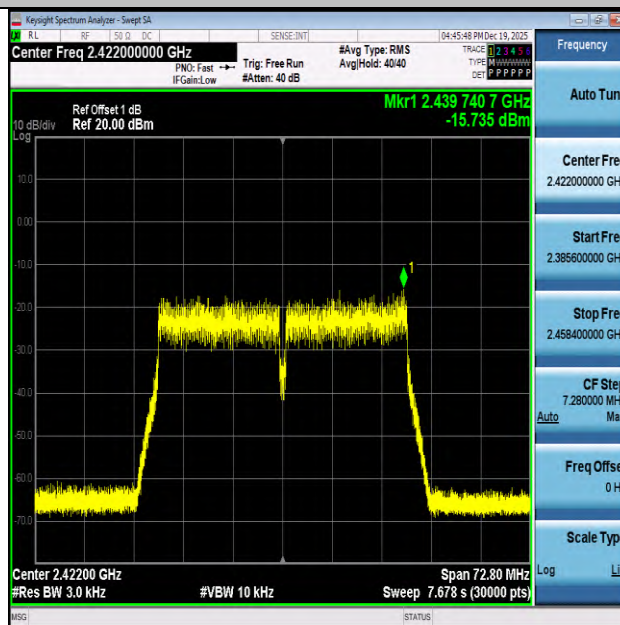


11N40-2422-PASS

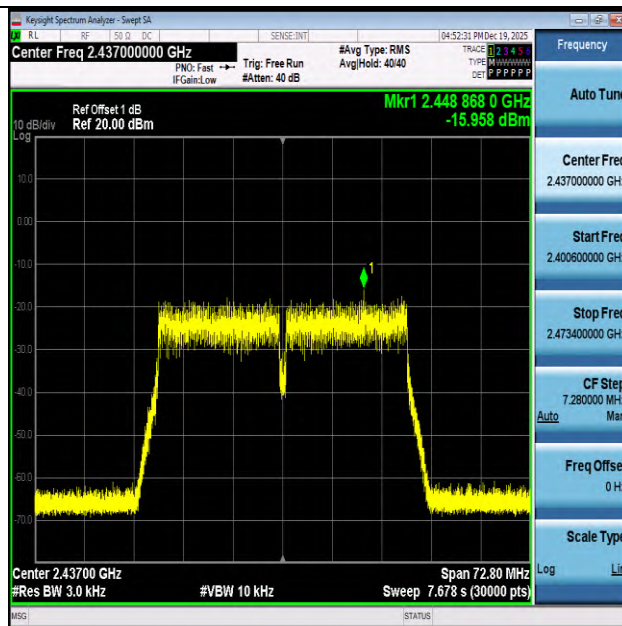


11N40-2437-PASS

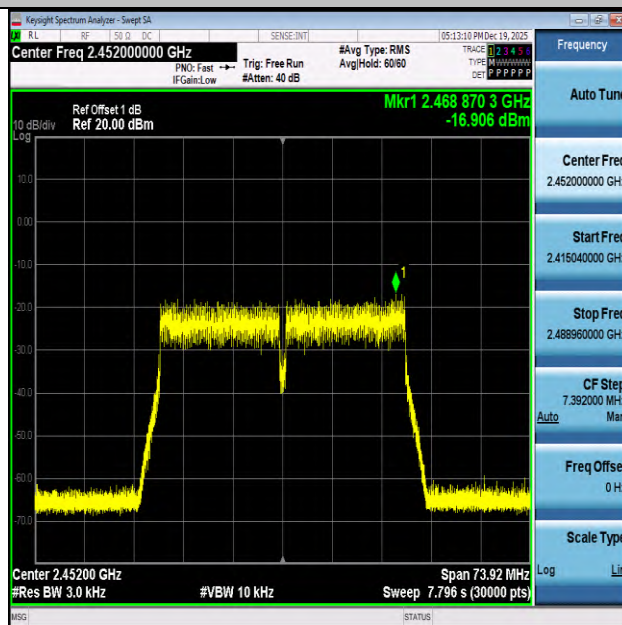


11N40-2452-PASS

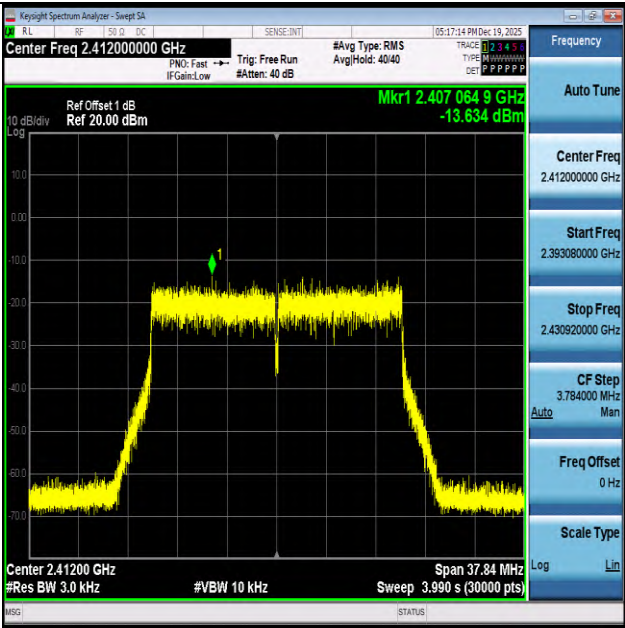


11AX20-2412-PASS

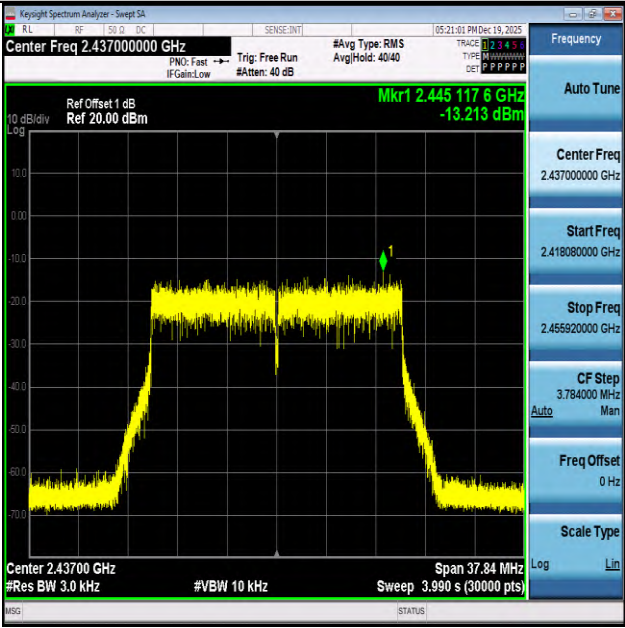


11AX20-2437-PASS

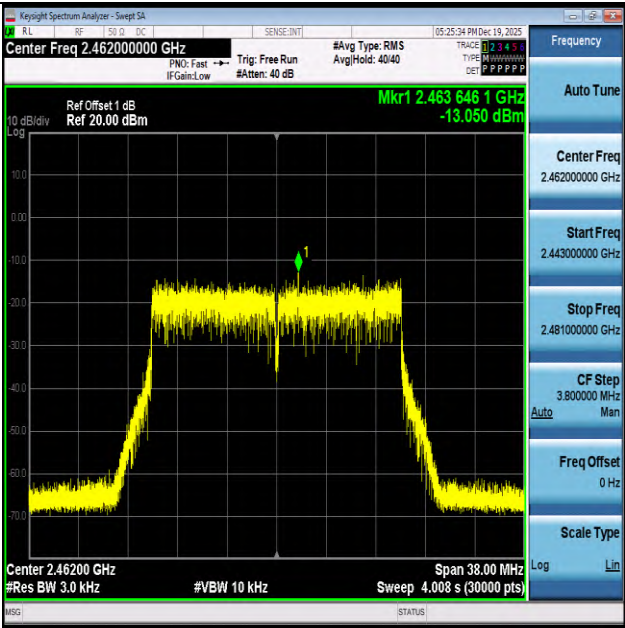


11AX20-2462-PASS

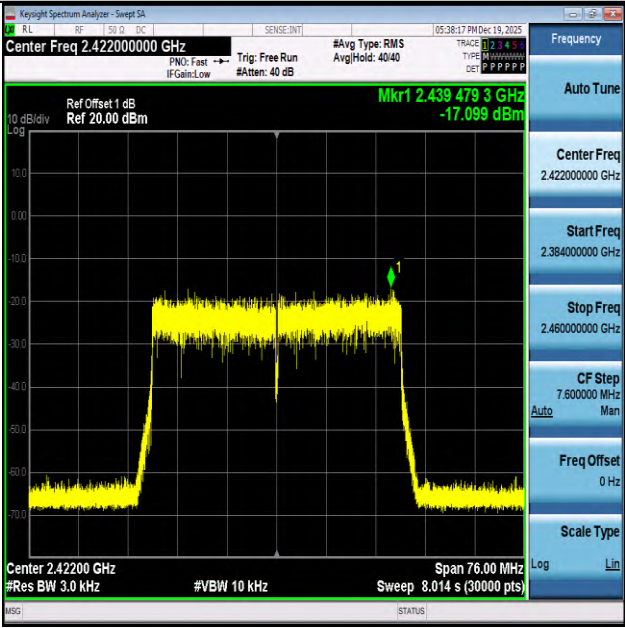


11AX40-2422-PASS

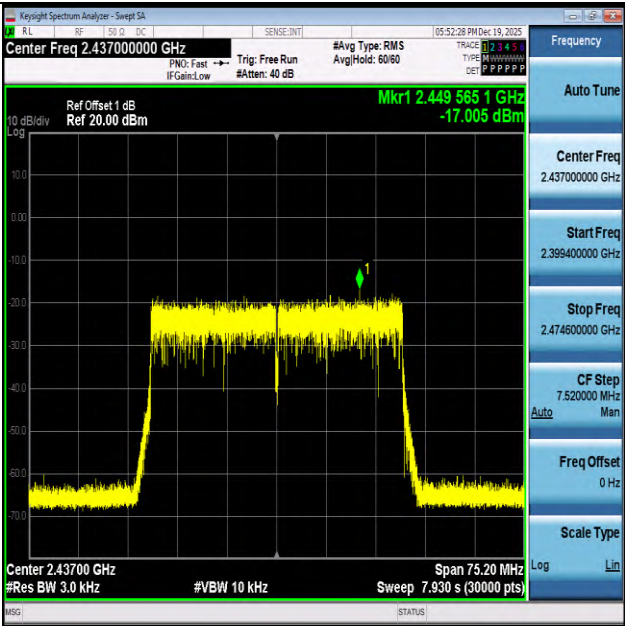


11AX40-2437-PASS

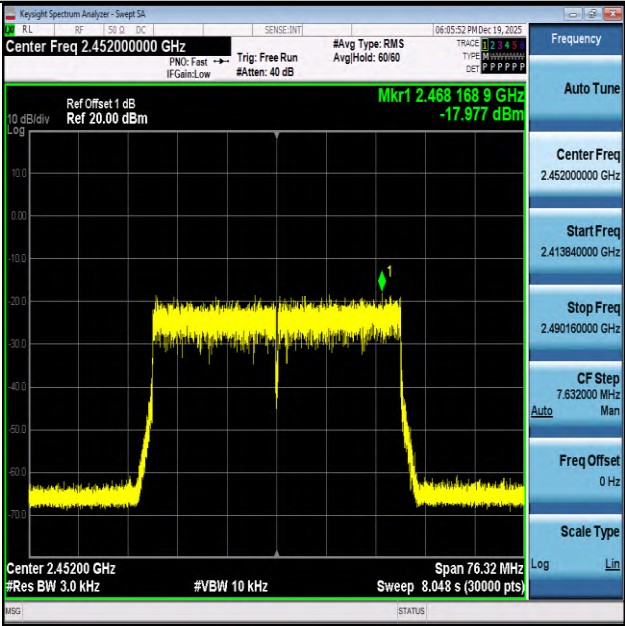


11AX40-2452-PASS

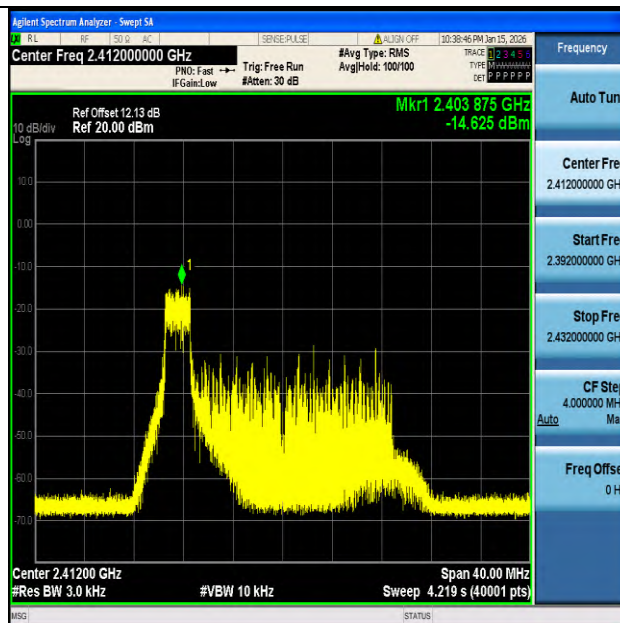


11AX20SISO-Ant1-2412-26Tone-RU0-PASS

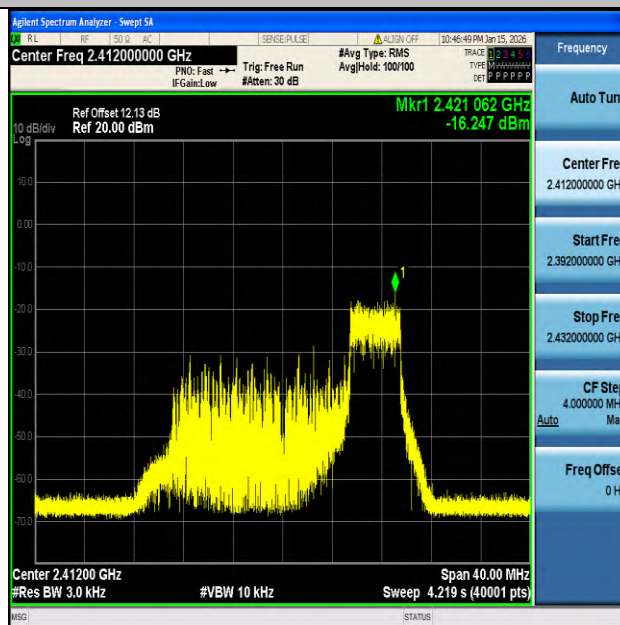


11AX20SISO-Ant1-2412-52Tone-RU37-PASS

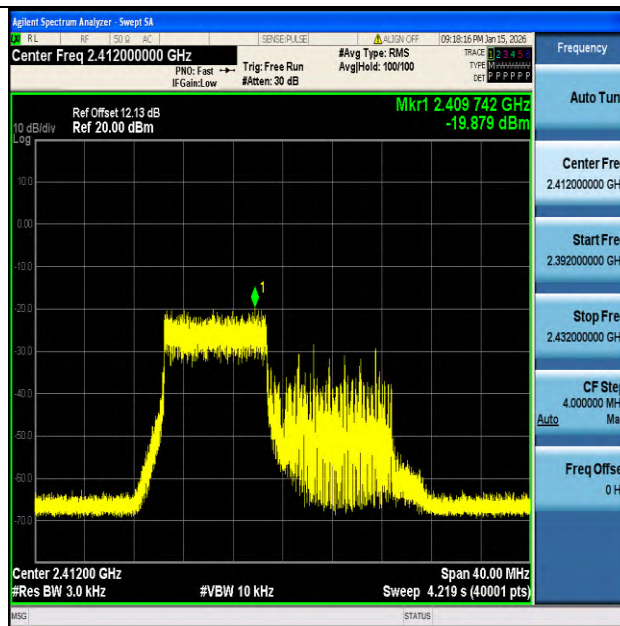


11AX20SISO-Ant1-2412-106Tone-RU53-PASS

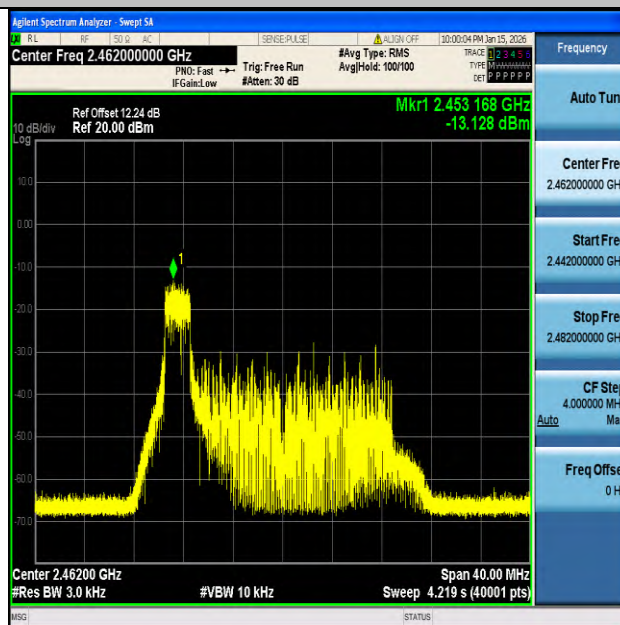

11AX20SISO-Ant1-2462-26Tone-RU0-PASS

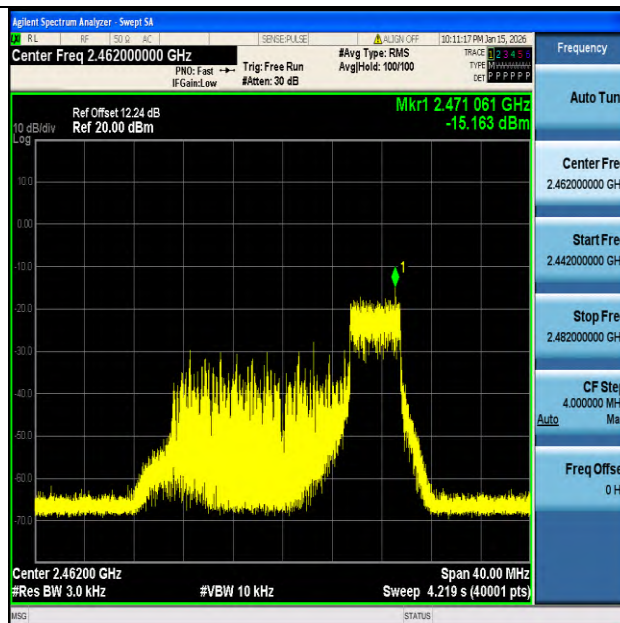


11AX20SISO-Ant1-2462-52Tone-RU37-PASS

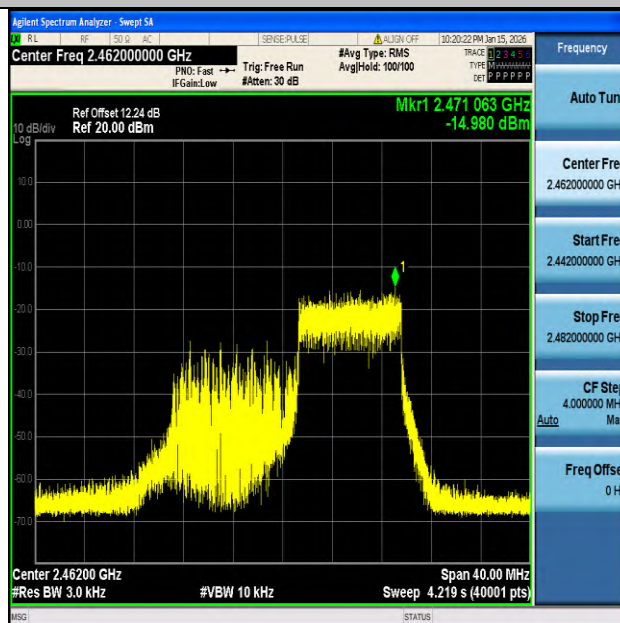


11AX20SISO-Ant1-2462-106Tone-RU53-PASS

Reference level measurement Test Graphs

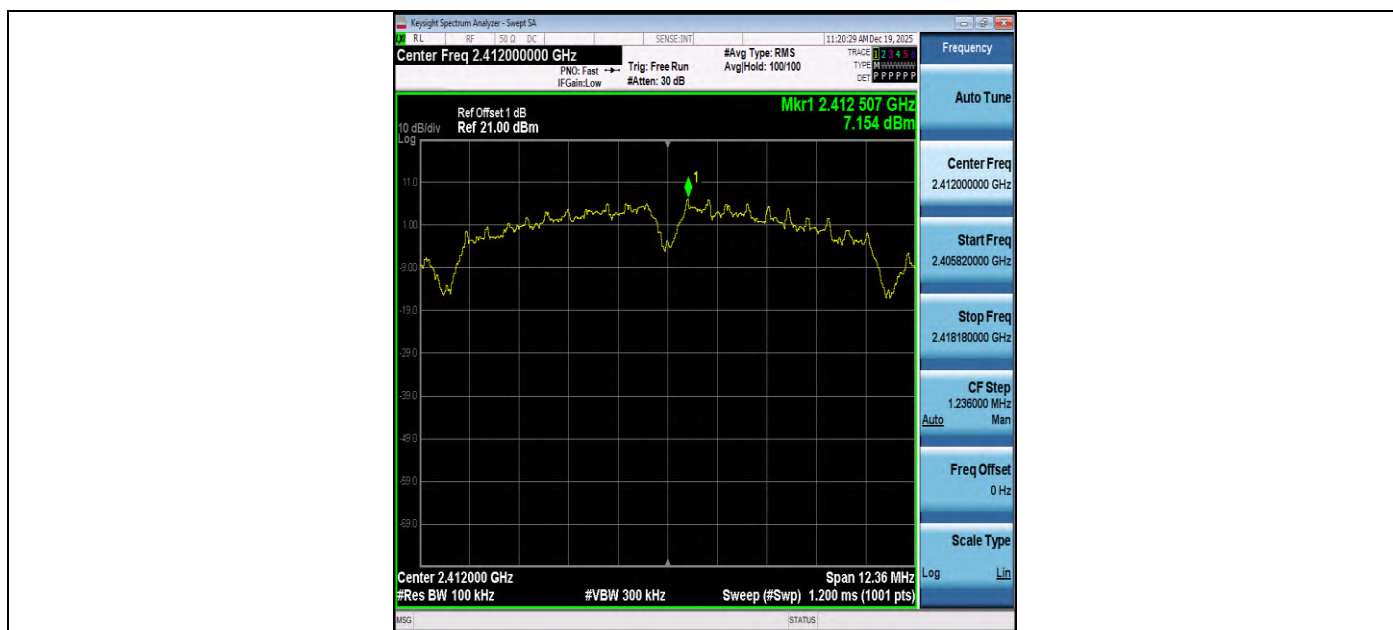


11B-2412-PASS

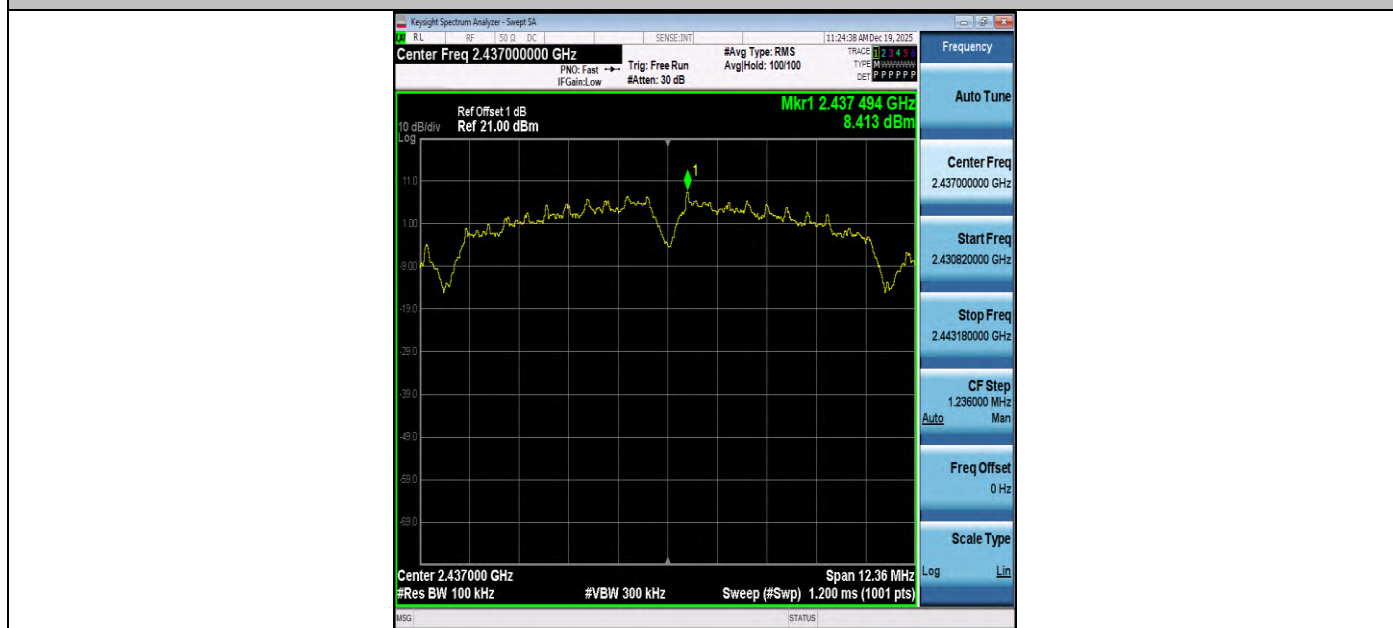


11B-2437-PASS




11B-2462-PASS

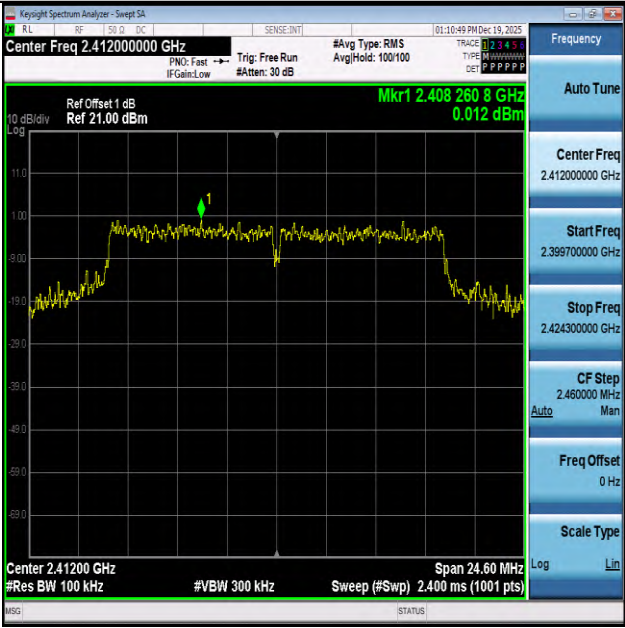


11G-2412-PASS

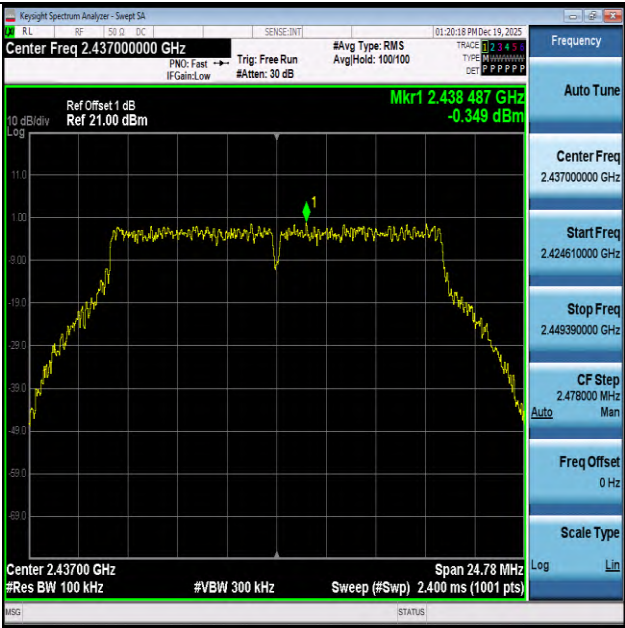

11G-2437-PASS

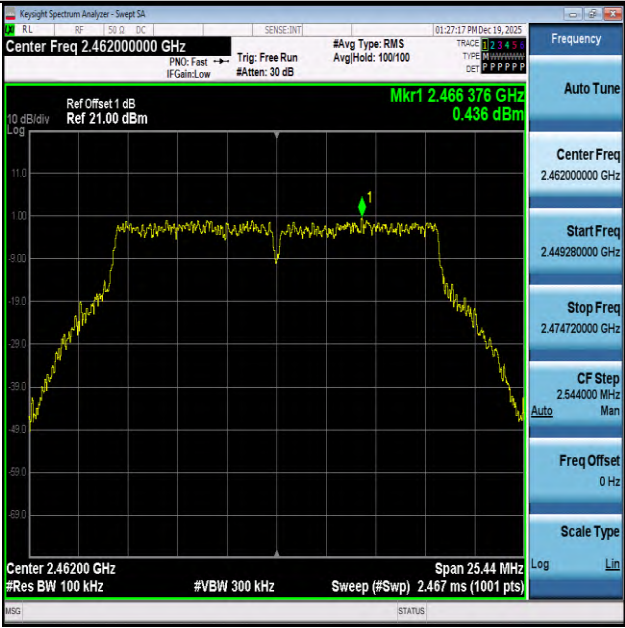

11G-2462-PASS

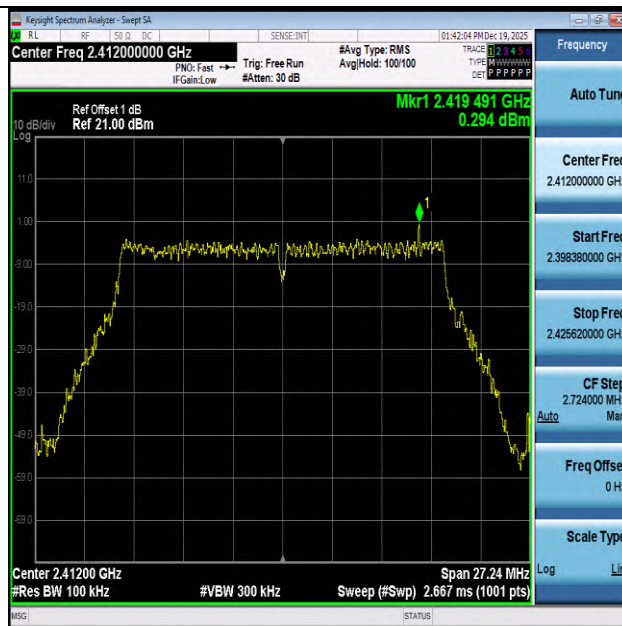

11N20-2412-PASS



11N20-2437-PASS




11N20-2462-PASS




11N40-2422-PASS



11N40-2437-PASS

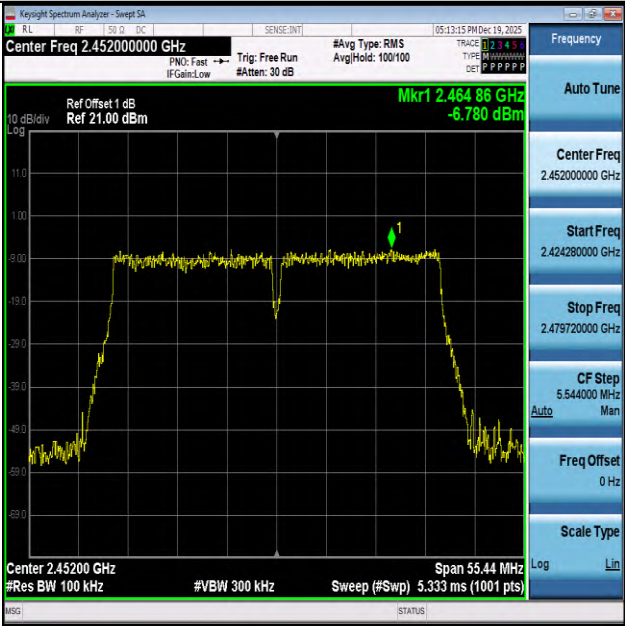

11N40-2452-PASS

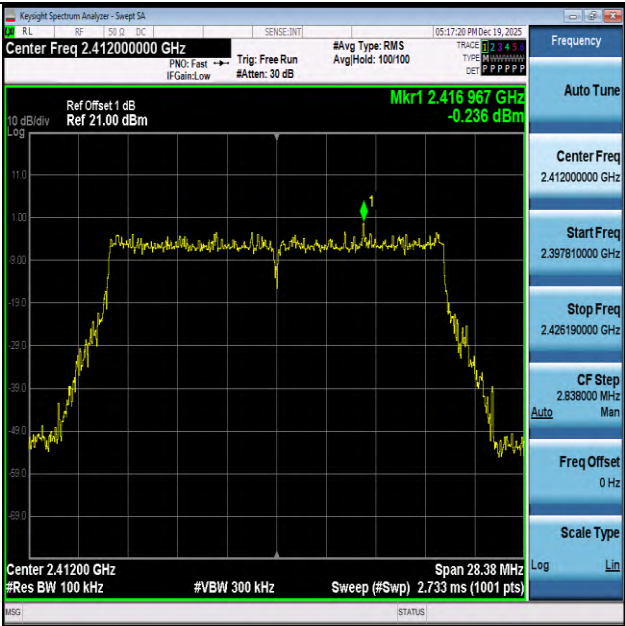


11AX20-2412-PASS




11AX20-2437-PASS



11AX20-2462-PASS

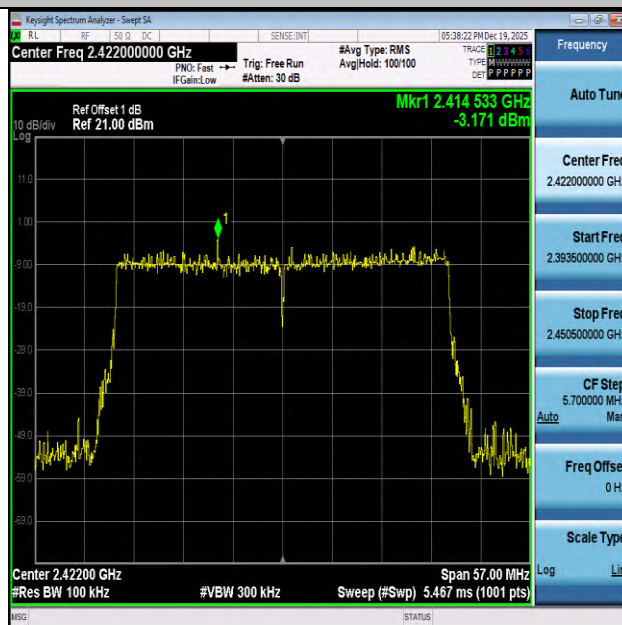

11AX40-2422-PASS

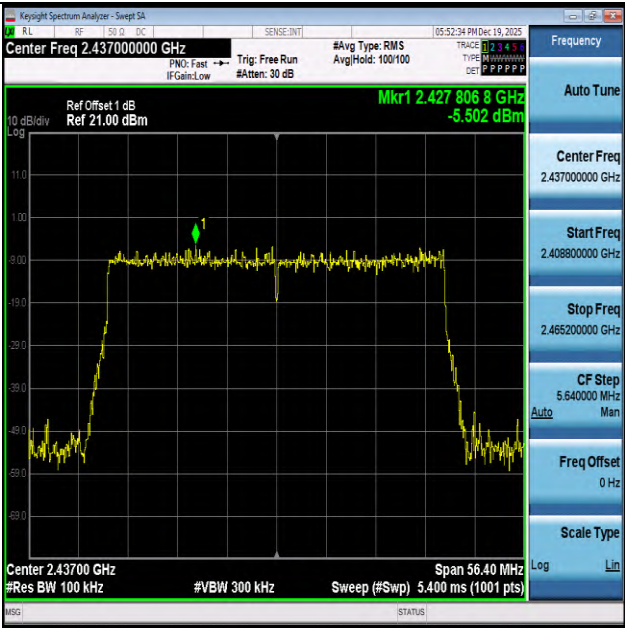

11AX40-2437-PASS




11AX40-2452-PASS

Note: We have evaluated both SISO-Main, SISO-Aux and MIMO-Main+Aux mode, only worst data shown in this report.


Conducted Band edge measurements Test Graphs




11B-2412-PASS

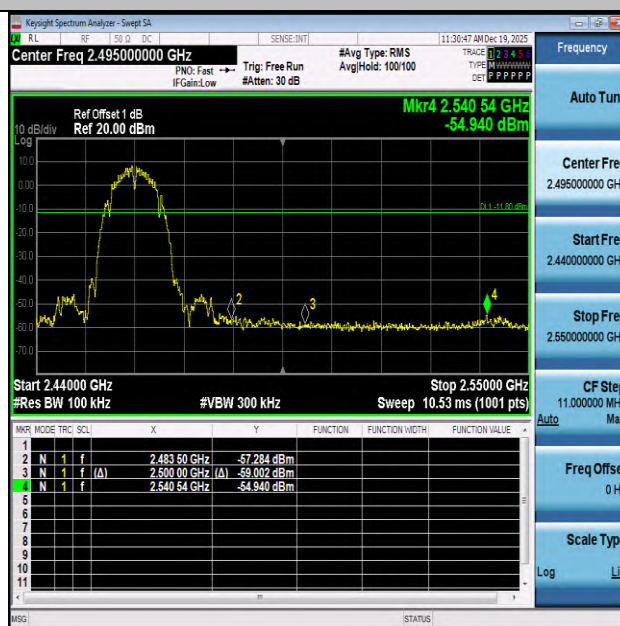


11B-2462-PASS

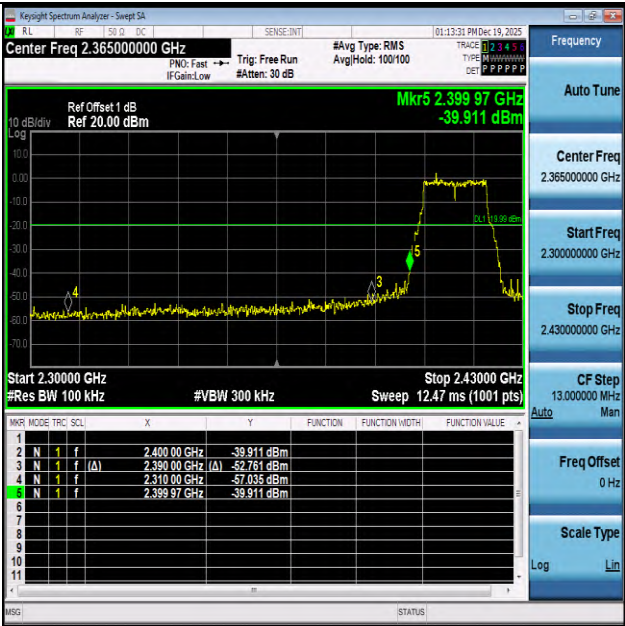

11G-2412-PASS

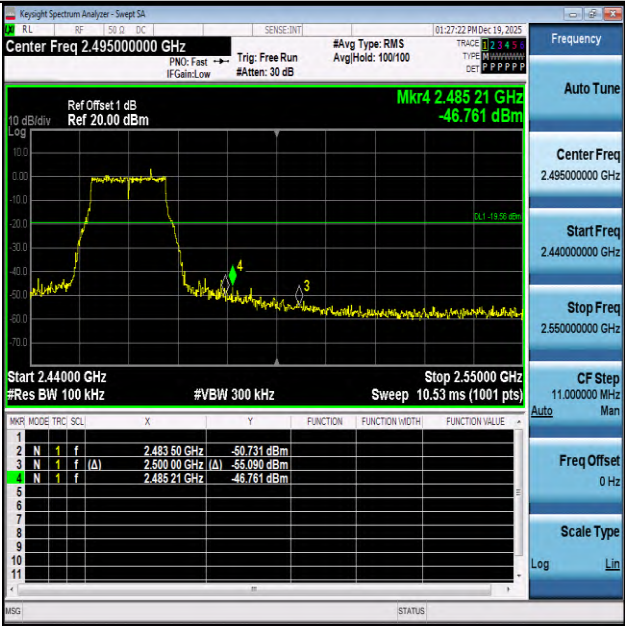


11G-2462-PASS

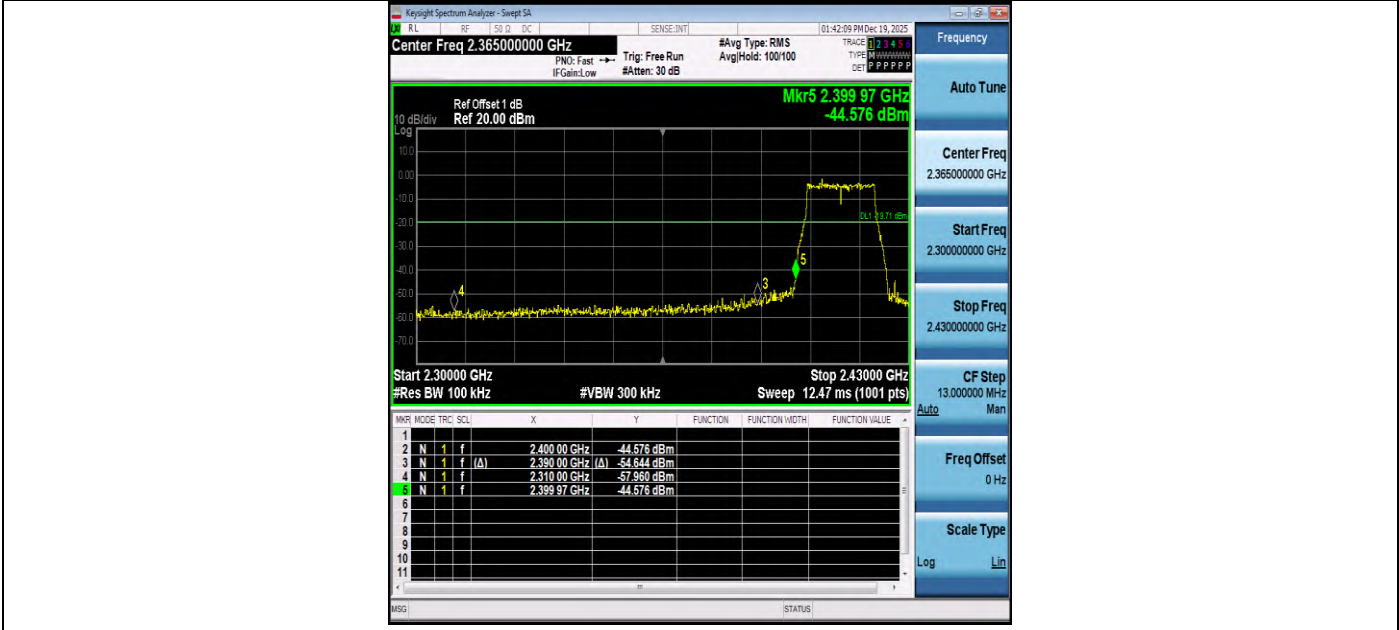


11N20-2412-PASS




11N20-2462-PASS

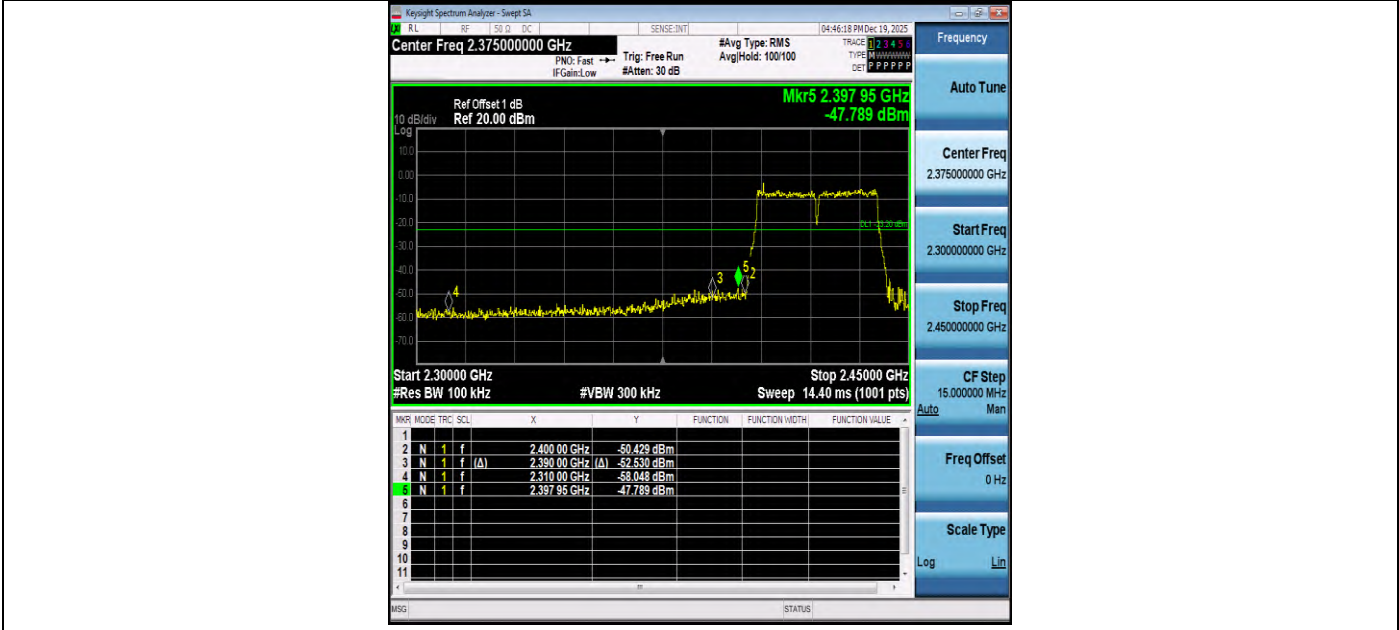


11N40-2422-PASS

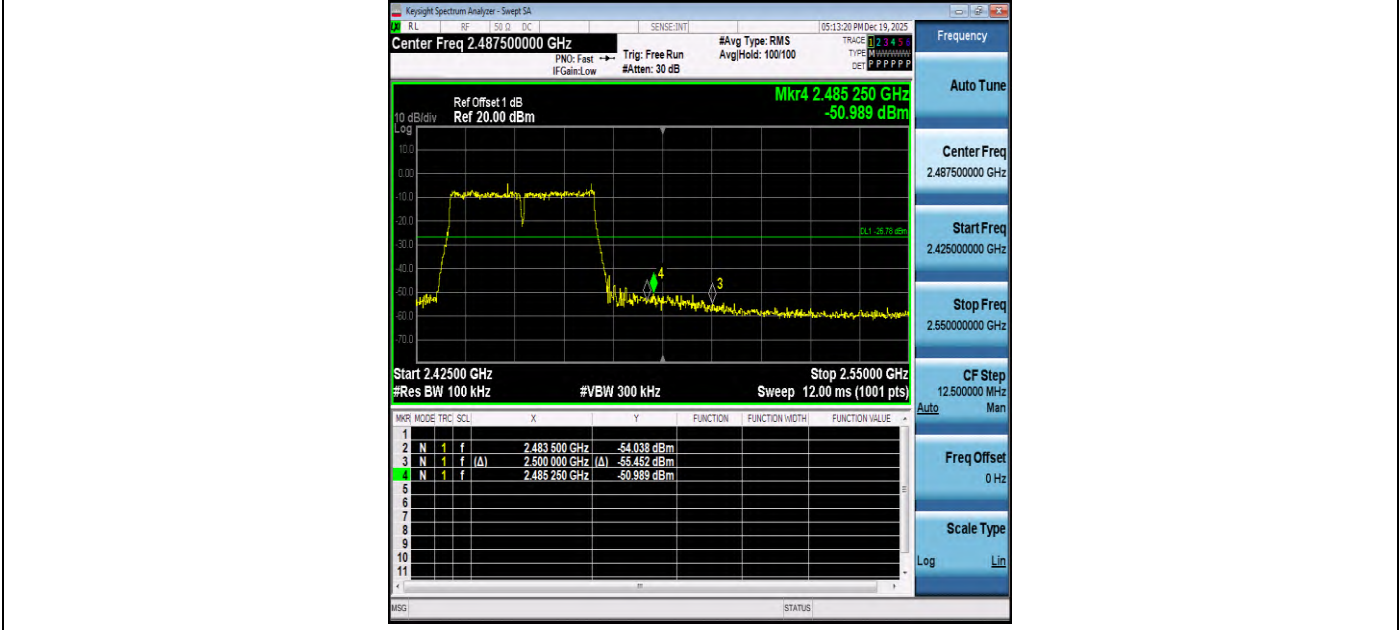


11N40-2452-PASS

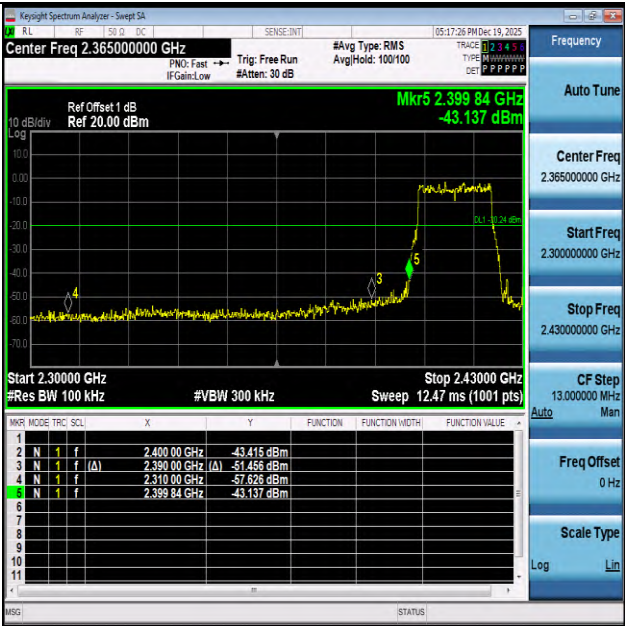


11AX20-2412-PASS

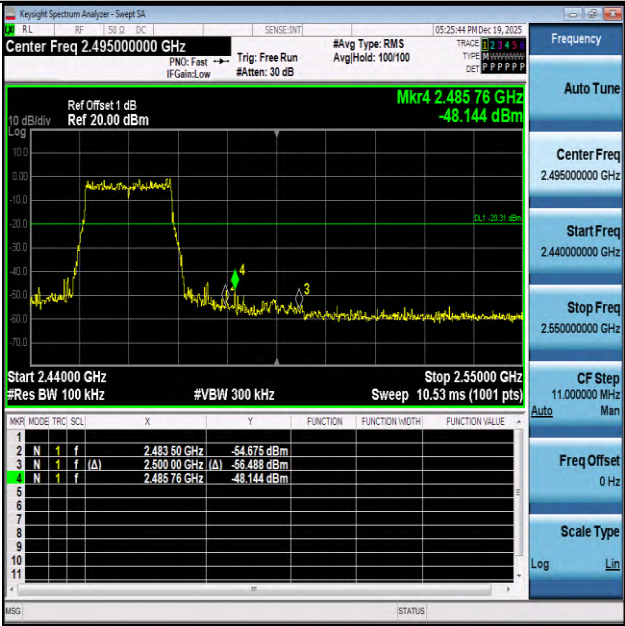

11AX20-2462-PASS

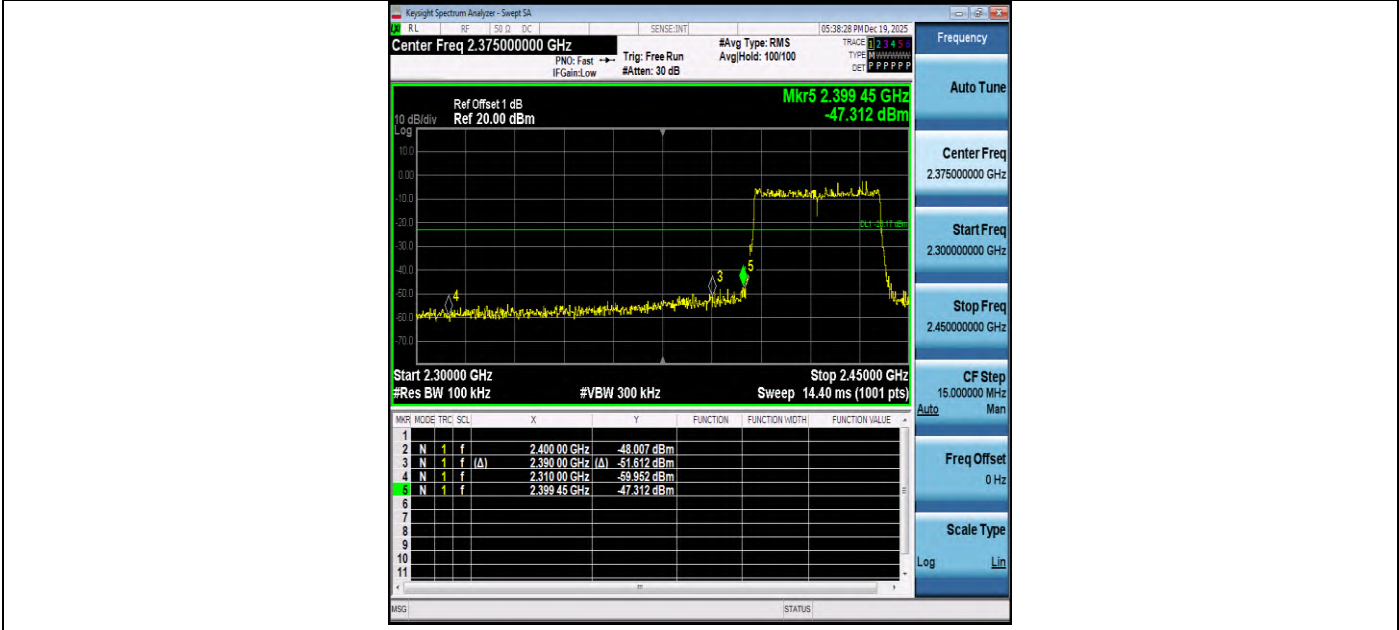

11AX40-2422-PASS

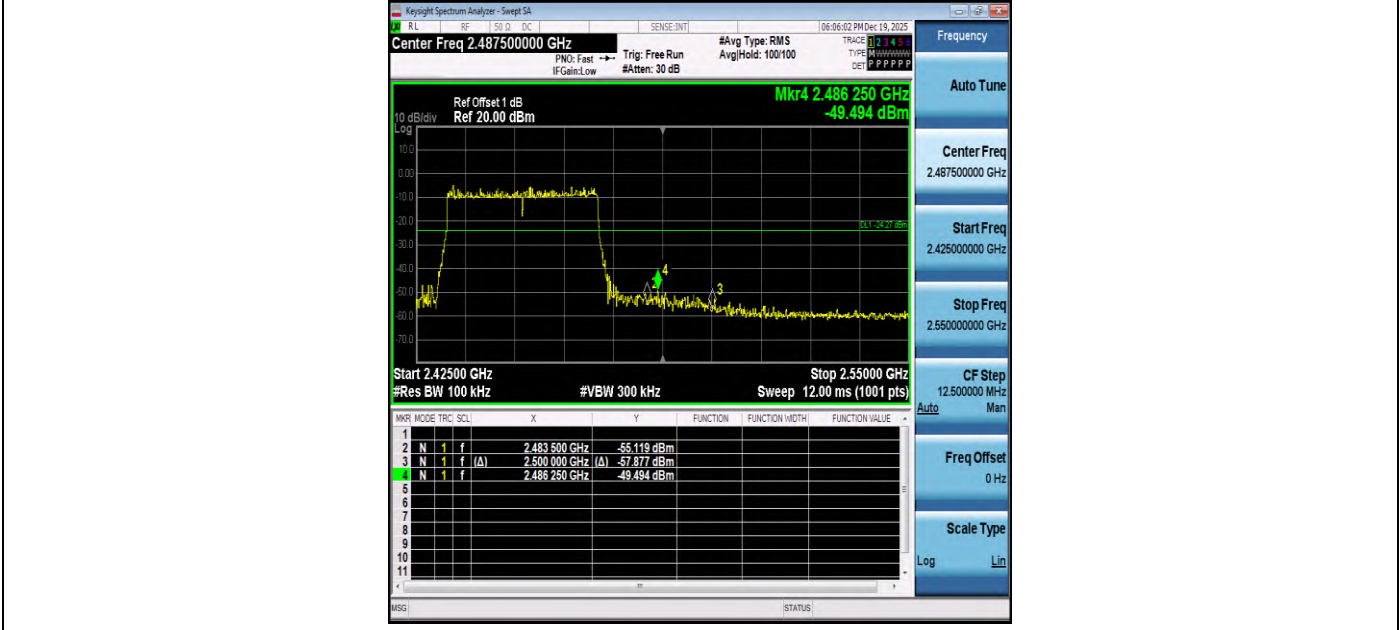


11AX40-2452-PASS


Note: We have evaluated both SISO-Main, SISO-Aux and MIMO-Main+Aux mode, only worst data shown in this report.

Conducted Spurious Emission
Test Graphs




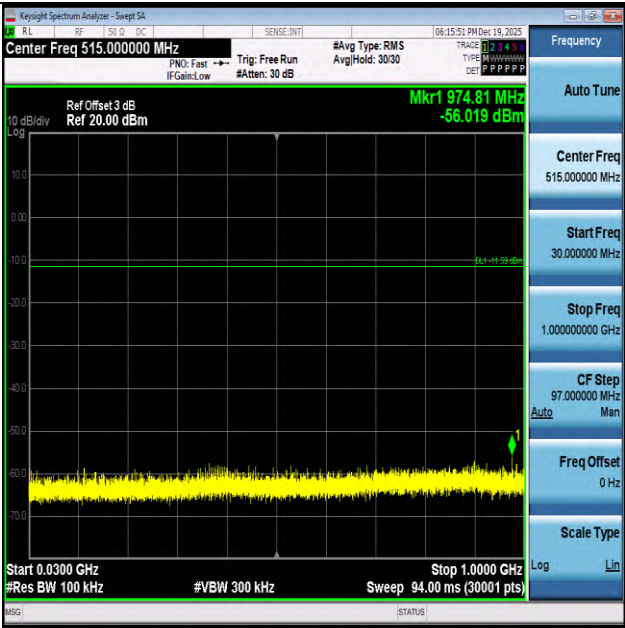


11B-2437-30~1000-PASS

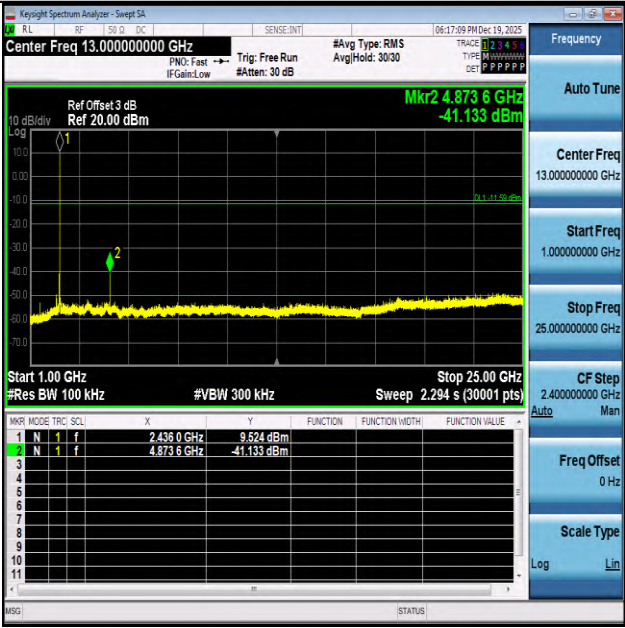


11B-2437-1000~25000-PASS

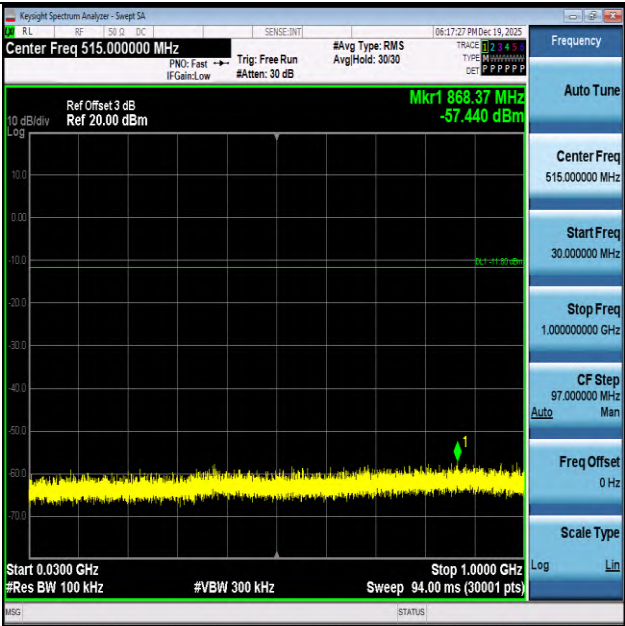


11B-2462-30~1000-PASS

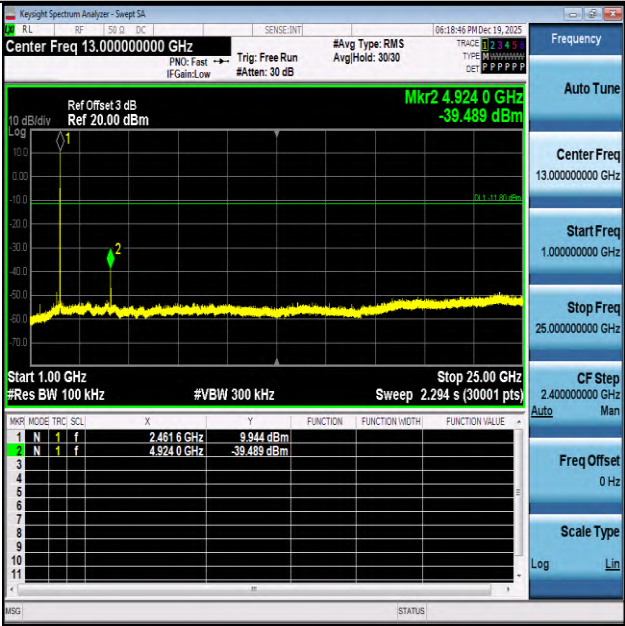


11B-2462-1000~25000-PASS

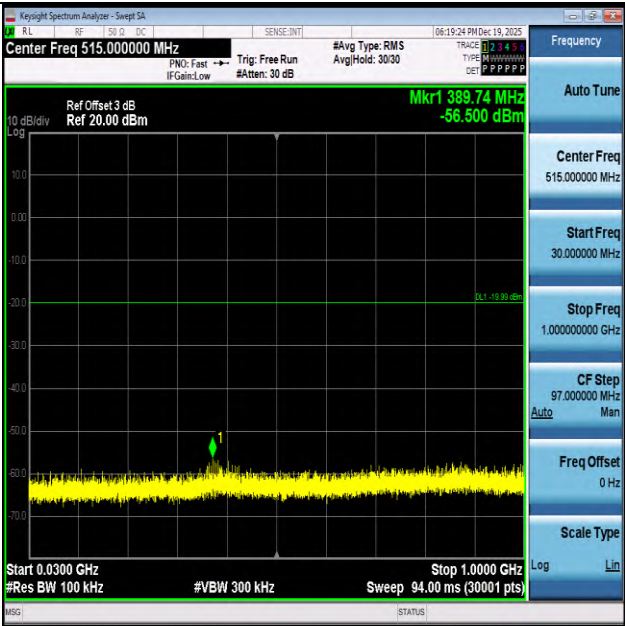


11G-2412-30~1000-PASS

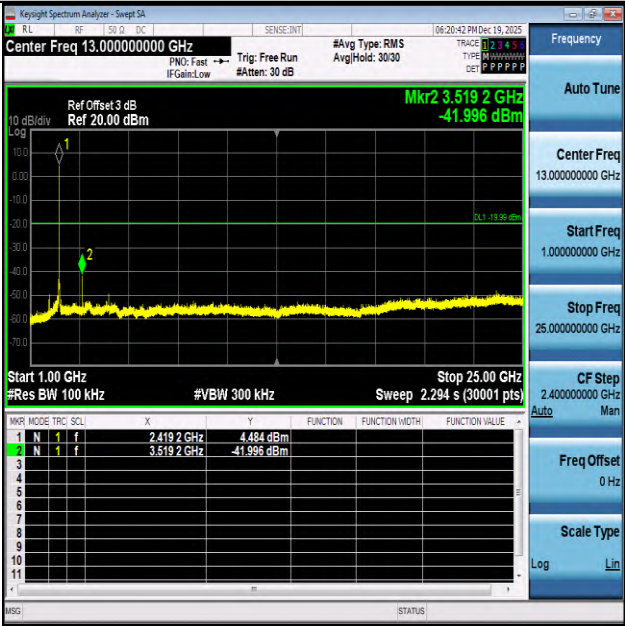

11G-2412-1000~25000-PASS

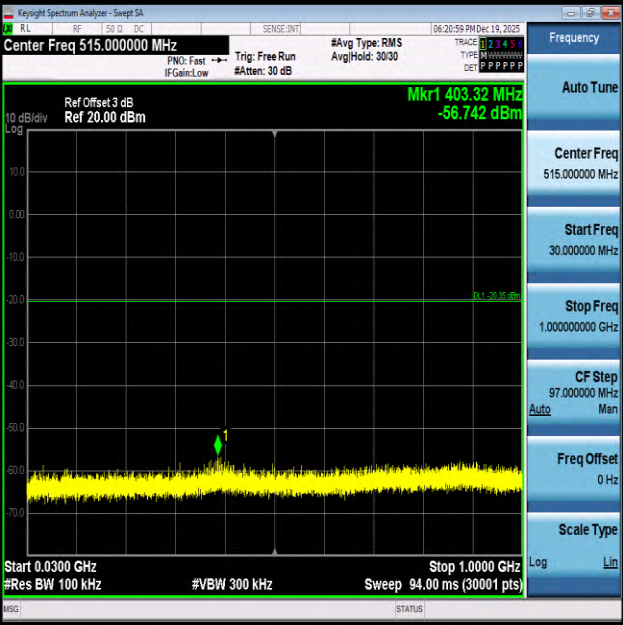

11G-2437-30~1000-PASS

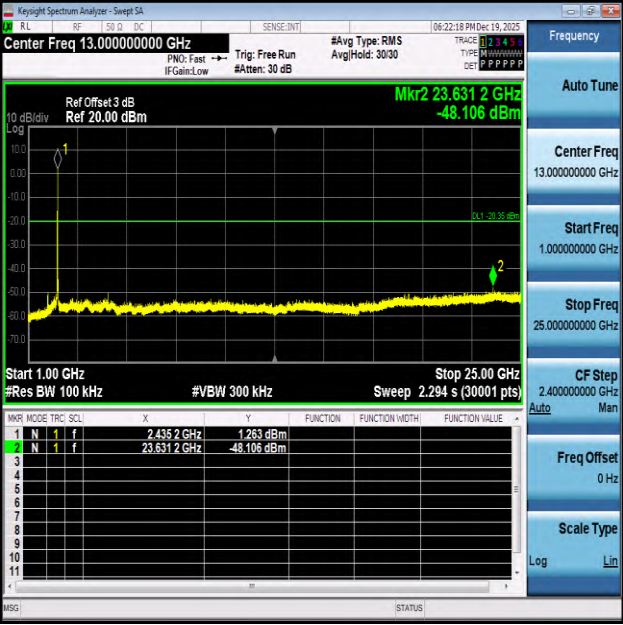

11G-2437-1000~25000-PASS