

Shenzhen Qianmu Communication Technology Co., Ltd


Shenzhen Qianmu Communication Technology Co., Ltd.

Acceptance of antenna sample

Applicable model	G25		
Customer	Dongxin Taihe (Guangzhou) Co., Ltd.		
Specification description			
	Product content	Specification	Customer material code
Specification description	Bluetooth antenna	Aluminum alloy middle frame, Surface sandblasting oxidation, 46.5*39.2*7.6mm	Y.01.02.0130
Change resume			
Serial number	Date	Version	Brief introduction of changes
1	2025-4-15	V1.0	New project
2			
3			

Supplier sample confirmation					
R&D	Structure		Audit	Judge	
				PASS ☒ FAIL ☐	
Customer sample confirmation					
Electron	Structure	Project	Procurement	Quality	Audit
Reasons for rejection or other precautions:					

1、 Matching circuit-BT antenna

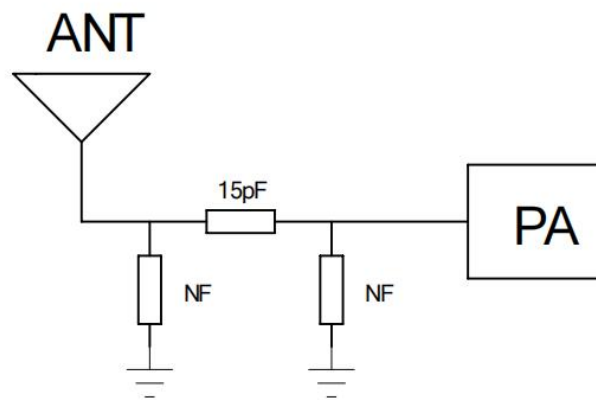


2、 BT antenna size



BT antenna 46.5mm*39.2mm*7.6mm

3、VSWR

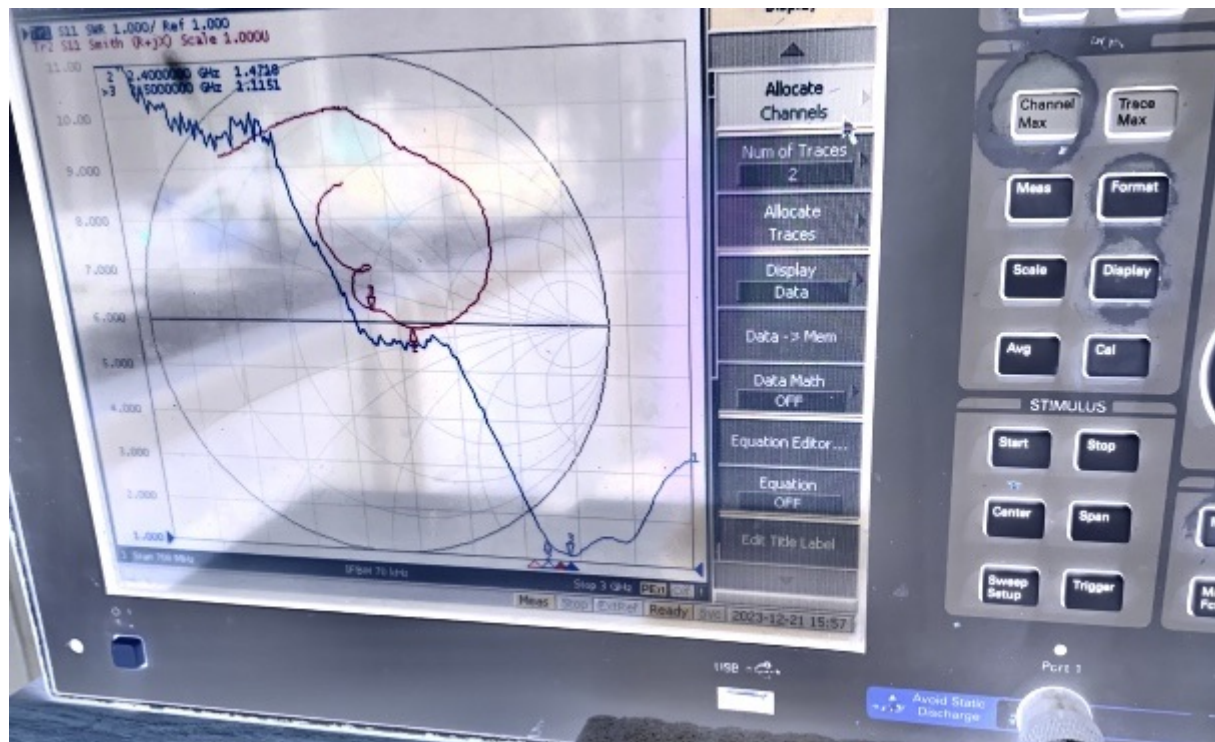


4、WIFI/BT Antenna-Antenna Passive Efficiency and Gain


	A	B	C	D	E	F	G	H	I	J	K
1	Passive Test For 2.4GWIFI										
2	Freq	Effi	Effi	Gain	Gain	UHS	DHS	Max	Min	Attenut	Attenut
3	(MHz)	(%)	(dB)	(dBi)	(dBd)	(%)	(%)	(dB)	(dB)	Hor	Ver
4	2400	18.36	-7.36	-1.71	-3.86	8.129	10.232	-1.71	-14.59	48.51	48.38
5	2410	19.44	-7.11	-1.48	-3.63	8.483	10.956	-1.48	-14.79	48.83	48.65
6	2420	19.83	-7.03	-1.41	-3.56	8.474	11.352	-1.41	-16.27	49.05	49
7	2430	19.14	-7.18	-1.72	-3.87	7.893	11.244	-1.72	-21.14	49.05	48.89
8	2440	18.43	-7.35	-1.8	-3.95	7.284	11.144	-1.8	-31.27	49.08	48.97
9	2450	18.52	-7.32	-1.19	-3.34	7.118	11.404	-1.19	-23.99	49.01	48.85
10	2460	17.78	-7.5	-0.93	-3.08	6.699	11.077	-0.93	-22.35	48.86	48.7
11	2470	17.32	-7.61	-0.81	-2.96	6.521	10.803	-0.81	-24.35	48.86	48.78
12	2480	16.81	-7.74	-0.96	-3.11	6.386	10.421	-0.96	-25.65	49.29	49.19
13	2490	18.25	-7.39	-0.53	-2.68	7.124	11.125	-0.53	-25.82	49.92	49.75
14	2500	17.68	-7.53	-0.81	-2.96	7.09	10.586	-0.81	-24.49	49.95	49.77
15	2400.00MHz - 2500.00MHz Gain										

5、 Antenna Pattern and Apple Pattern


2400.000MHz E1

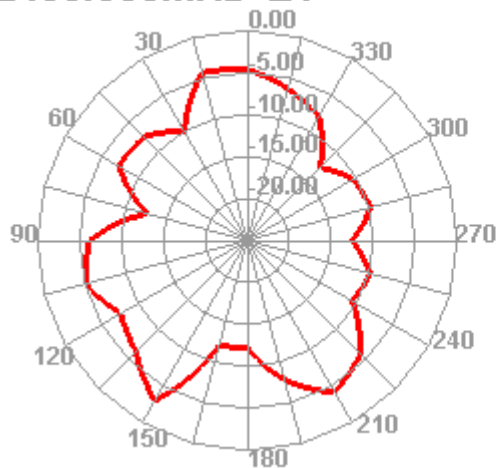


2400.000MHz E2

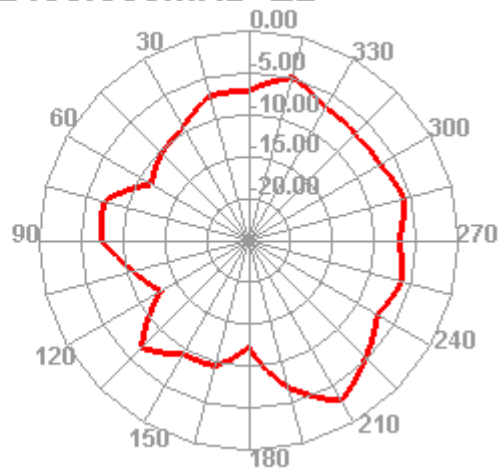


2450.000MHz E1

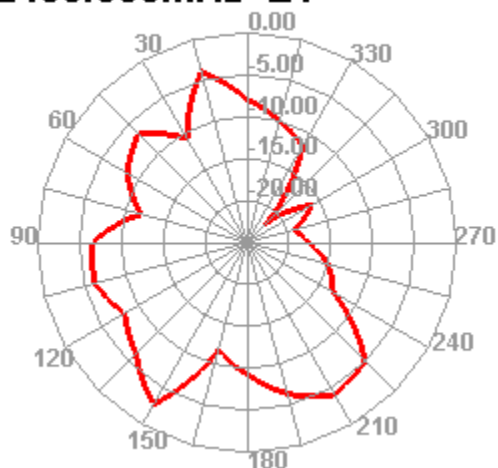


2450.000MHz E2

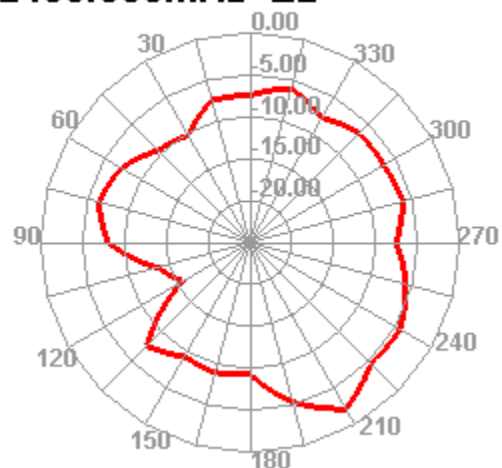

2500.000MHz E1

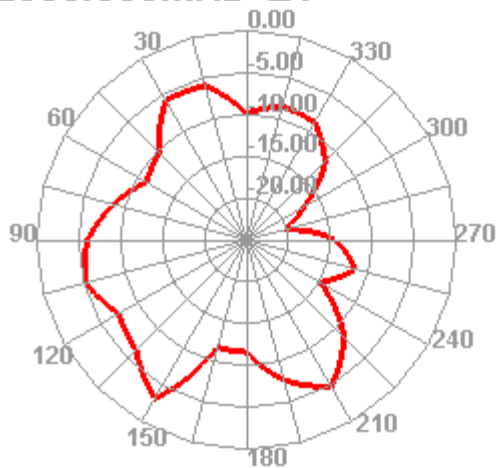

2500.000MHz E2

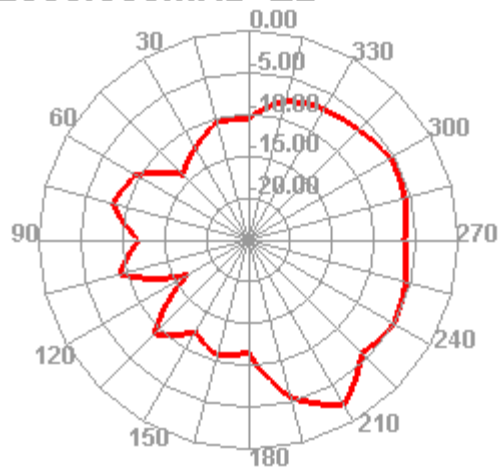

6、Structural drawing

