

TEST REPORT

Application No.: SZCR2602000525AT
Applicant: AX Technologies LLC
Address of Applicant: 1441 Broadway 27th Floor, New York, 10018 United States
Manufacturer: Shenzhen Gold-East Electronic Co.,Ltd
Address of Manufacturer: Floor 6, Building 11, Rundongsheng Industrial Park Longteng Community, Xixiang Street, Bao'an District, Shenzhen, China
Factory: Shenzhen Gold-East Electronic Co.,Ltd
Address of Factory: Floor 6, Building 11, Rundongsheng Industrial Park Longteng Community, Xixiang Street, Bao'an District, Shenzhen, China
Equipment Under Test (EUT):
EUT Name: iTOUCH ACTIVE 5 , iTECH ACTIVE 4
Model No.: TC5S01,TC5S03,TC5S04,TC5S08,TC5S16,IA4S01, IA4S03,IA4S04,IA4S07,IA4S08,IA4S16,IA4S01A, IA4S03A,IA4S07A,IA4S08A,IA4S16A ♣
 ♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: iTOUCH,iTECH
FCC ID: 2AJXA-TC5
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-02-03
Date of Test: 2026-02-04 to 2026-02-10
Date of Issue: 2026-02-27

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Ken Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 2 of 72

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-02-27		Original

Authorized for issue by:				
		<i>Martin Li</i>		
		Martin Li/Project Engineer		
		<i>Eric Fu</i>		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectral Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

Declaration of EUT Family Grouping:

Model No.: TC5S01,TC5S03,TC5S04,TC5S08,TC5S16,IA4S01,

IA4S03,IA4S04,IA4S07,IA4S08,IA4S16,IA4S01A,IA4S03A,IA4S07A,IA4S08A,IA4S16A

Only the model TC5S01 was tested. According to the declaration from the applicant, the electrical circuit design, layout, components used, internal wiring and functions were identical for the above models, with only difference on model name, color and strap style, trademark.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	6
4.4 Test Location	7
4.5 Test Facility	7
4.6 Deviation from Standards	7
4.7 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement	10
6.1 Antenna Requirement	10
6.1.1 Test Requirement:	10
6.1.2 Conclusion	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	11
7.1.1 E.U.T. Operation	11
7.1.2 Test Mode Description	11
7.1.3 Test Setup Diagram	12
7.1.4 Measurement Procedure and Data	12
7.2 Radiated Emissions which fall in the restricted bands	15
7.2.1 E.U.T. Operation	15
7.2.2 Test Mode Description	15
7.2.3 Test Setup Diagram	16
7.2.4 Measurement Procedure and Data	17
7.3 Radiated Spurious Emissions Below 1GHz	22
7.3.1 E.U.T. Operation	22
7.3.2 Test Mode Description	22
7.3.3 Test Setup Diagram	23
7.3.4 Measurement Procedure and Data	23
7.4 Radiated Spurious Emissions Above 1GHz	30
7.4.1 E.U.T. Operation	30
7.4.2 Test Mode Description	30
7.4.3 Test Setup Diagram	31
7.4.4 Measurement Procedure and Data	32
7.5 Maximum Conducted Output Power	40
7.5.1 E.U.T. Operation	40



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 5 of 72

7.5.2	Test Mode Description	40
7.5.3	Test Setup Diagram	41
7.5.4	Measurement Procedure and Data.....	41
7.6	Minimum 6dB Bandwidth	42
7.6.1	E.U.T. Operation	42
7.6.2	Test Mode Description	42
7.6.3	Test Setup Diagram	42
7.6.4	Measurement Procedure and Data.....	42
7.7	Power Spectral Density	43
7.7.1	E.U.T. Operation	43
7.7.2	Test Mode Description	43
7.7.3	Test Setup Diagram	43
7.7.4	Measurement Procedure and Data.....	43
7.8	Conducted Band Edges Measurement	44
7.8.1	E.U.T. Operation	44
7.8.2	Test Mode Description	44
7.8.3	Test Setup Diagram	45
7.8.4	Measurement Procedure and Data.....	45
7.9	Conducted Spurious Emissions	46
7.9.1	E.U.T. Operation	46
7.9.2	Test Mode Description	46
7.9.3	Test Setup Diagram	47
7.9.4	Measurement Procedure and Data.....	47
8	Test Setup Photo	48
9	EUT Constructional Details (EUT Photos)	48
10	Appendix.....	49



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	Lithium-Ion Polymer Battery: 3.8V 230mAh rechargeable battery which charged by USB port DC 5V from adapter
Cable(s):	USB cable: 60cm unshielded
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Data rate:	1Mbps & 2Mbps
Antenna Type:	Monopole antenna
Antenna Gain:	0.17dBi

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
RF cable	supplied by SGS	N/A(cable loss:0.6dB)	REF. No.SEL000089

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	± 3.2dB
Radiated Emissions which fall in the restricted bands	± 6.0dB (Below 1GHz); ± 4.6dB (Above 1GHz)
Radiated Spurious Emissions Below 1GHz	± 6.0dB for 3m; ± 5.0dB for 10m
Radiated Spurious Emissions Above 1GHz	± 4.6dB (1-18GHz); ± 4.8dB (18-40GHz)
Maximum Conducted Output Power	± 0.4dB
Minimum 6dB Bandwidth	± 0.3%
Power Spectral Density	± 0.4dB
Conducted Band Edges Measurement	± 2.7dB
Conducted Spurious Emissions	± 2.7dB

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{CISPR/ETSI}$ (CISPR/ETSI Uncertainty), so the test results
 – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
 – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 7 of 72

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2026-02-02	2027-02-01

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-12-16	2026-12-15
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2026-02-02	2027-02-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 9 of 72

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-12-16	2026-12-15
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-12-16	2026-12-15
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-12-16	2026-12-15
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2025-12-13	2026-12-12
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2025-12-13	2026-12-12
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2025-07-23	2026-07-22

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2026-02-04	2027-02-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2026-02-04	2027-02-03
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2026-02-03	2027-02-02
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2026-02-02	2027-02-01

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch Laboratory
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.17dBi

Antenna location: Refer to internal photo.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
 Test Method: ANSI C63.10 (2020) Section 6.2
 Test Engineer: Mason Wu

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 45.8 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Pre-scan	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 13 of 72

Test Mode: 00; Line: Live line

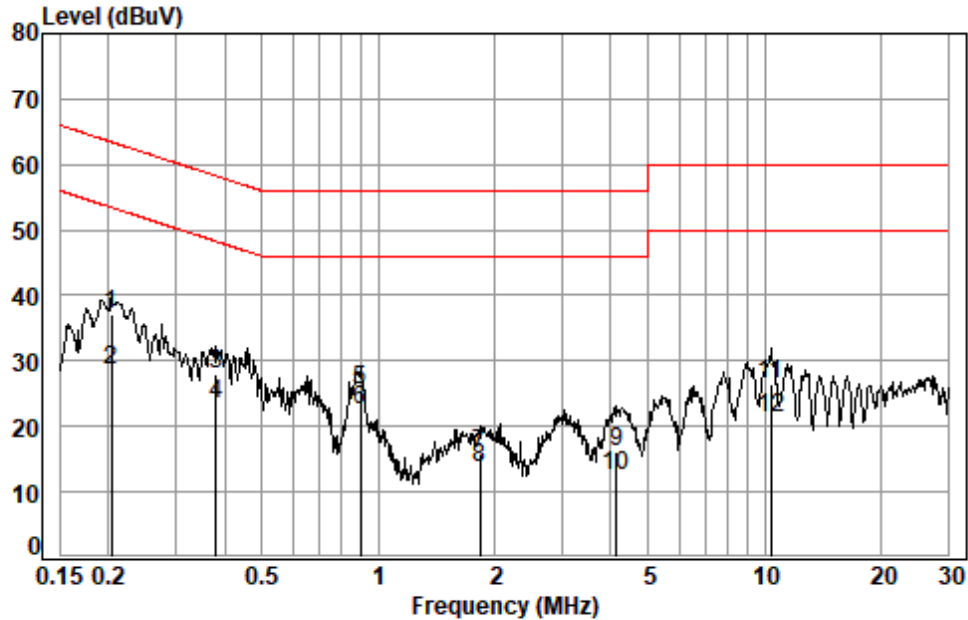

Site : Shielding Room
Condition: Line
Job No. : 00525AT/00526AT
Test mode: 00

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.2040	0.07	9.63	27.45	37.15	63.45	-26.30	QP
2	0.2040	0.07	9.63	18.78	28.48	53.45	-24.97	Average
3	0.3811	0.08	9.63	18.14	27.85	58.25	-30.40	QP
4	0.3811	0.08	9.63	13.84	23.55	48.25	-24.70	Average
5	0.8992	0.11	9.66	15.88	25.65	56.00	-30.35	QP
6 *	0.8992	0.11	9.66	12.67	22.44	46.00	-23.56	Average
7	1.8386	0.12	9.71	5.95	15.78	56.00	-40.22	QP
8	1.8386	0.12	9.71	3.87	13.70	46.00	-32.30	Average
9	4.1356	0.14	9.89	6.11	16.14	56.00	-39.86	QP
10	4.1356	0.14	9.89	2.57	12.60	46.00	-33.40	Average
11	10.3972	0.15	10.74	15.60	26.49	60.00	-33.51	QP
12	10.3972	0.15	10.74	10.48	21.37	50.00	-28.63	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen EMC Laboratory)

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 14 of 72

Test Mode: 00; Line: Neutral Line

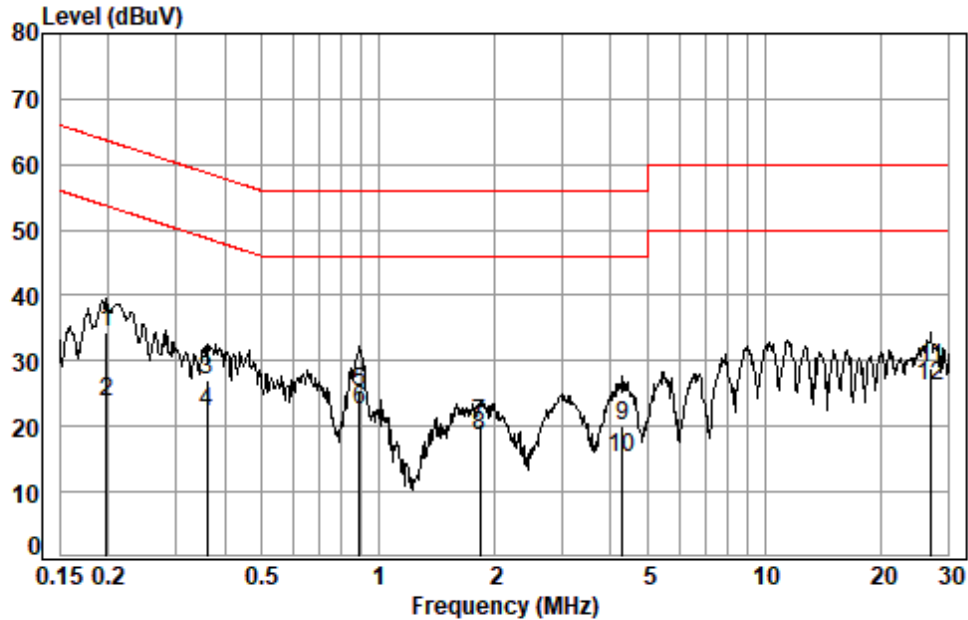

Site : Shielding Room
Condition: Neutral
Job No. : 00525AT/00526AT
Test mode: 00

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1976	0.07	9.66	24.61	34.34	63.71	-29.37	QP
2	0.1976	0.07	9.66	14.08	23.81	53.71	-29.90	Average
3	0.3615	0.08	9.64	17.33	27.05	58.69	-31.64	QP
4	0.3615	0.08	9.64	12.39	22.11	48.69	-26.58	Average
5	0.8944	0.11	9.65	15.34	25.10	56.00	-30.90	QP
6 *	0.8944	0.11	9.65	12.85	22.61	46.00	-23.39	Average
7	1.8386	0.12	9.71	10.49	20.32	56.00	-35.68	QP
8	1.8386	0.12	9.71	8.64	18.47	46.00	-27.53	Average
9	4.2918	0.14	9.92	10.15	20.21	56.00	-35.79	QP
10	4.2918	0.14	9.92	5.10	15.16	46.00	-30.84	Average
11	26.9837	0.26	13.60	14.90	28.76	60.00	-31.24	QP
12	26.9837	0.26	13.60	12.24	26.10	50.00	-23.90	Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.10.5 & 11.12
 Measurement Distance: 3m
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:


Temperature: 24.5 °C Humidity: 50.8 % RH Atmospheric Pressure: 1020 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.2.3 Test Setup Diagram

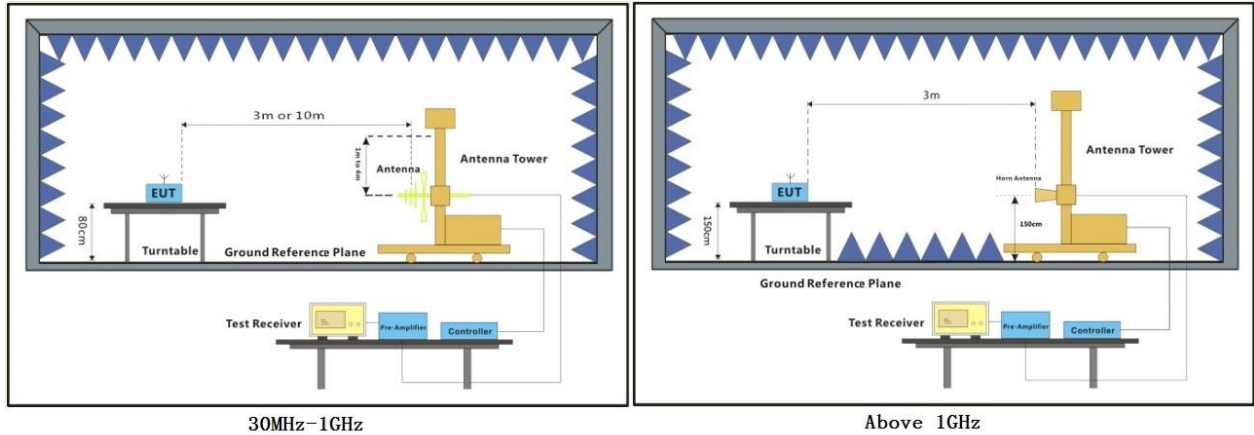

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


BLE_1M_TX_CH_00_Horizontal-Peak

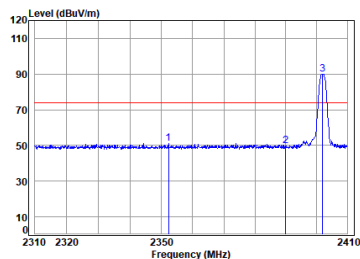

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2352.282	6.81	27.60	30.60	47.43	51.24	74.00	-22.76	Peak	0.00
2	2390.000	6.83	27.68	30.60	45.98	49.89	74.00	-24.11	Peak	0.00
3 pp	2402.000	6.84	27.70	30.60	85.95	89.89	74.00	15.89	Peak	0.00


BLE_1M_TX_CH_00_Horizontal-AVG

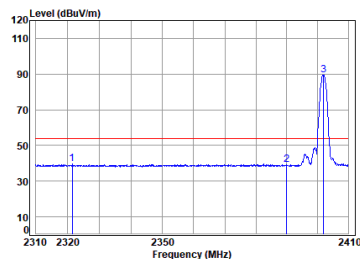

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2321.482	6.79	27.60	30.60	35.91	39.70	54.00	-14.30	Average	0.00
2	2390.000	6.83	27.68	30.60	35.36	39.27	54.00	-14.73	Average	0.00
3 pp	2402.000	6.84	27.70	30.60	85.48	89.42	54.00	35.42	Average	0.00


BLE_1M_TX_CH_00_Vertical-Peak

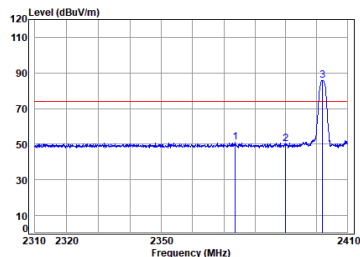

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2373.712	6.82	27.65	30.60	47.09	50.96	74.00	-23.04	Peak	0.00
2	2390.000	6.83	27.68	30.60	46.06	49.97	74.00	-24.03	Peak	0.00
3 pp	2402.000	6.84	27.70	30.60	81.80	85.74	74.00	11.74	Peak	0.00

BLE_1M_TX_CH_00_Vertical-AVG

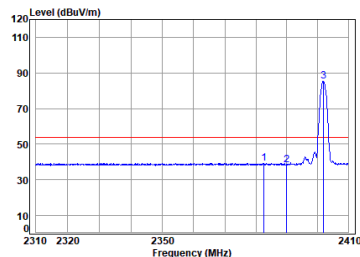


Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2382.682	6.82	27.67	30.60	35.54	39.43	54.00	-14.57	Average	0.00
2	2390.000	6.83	27.68	30.60	34.35	38.26	54.00	-15.74	Average	0.00
3 pp	2402.000	6.84	27.70	30.60	81.26	85.20	54.00	31.20	Average	0.00




BLE_1M_TX_CH_39_Horizontal-Peak

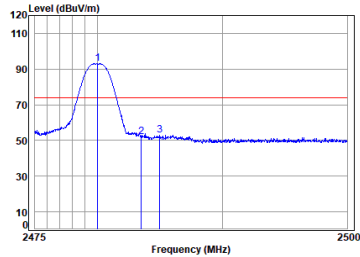

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		88.18	92.88	74.00	18.88	Peak	0.00
2	2483.500	7.40	27.93	30.60		47.50	52.23	74.00	-21.77	Peak	0.00
3	2484.978	7.41	27.94	30.60		48.26	53.01	74.00	-20.99	Peak	0.00


BLE_1M_TX_CH_39_Horizontal-AVG

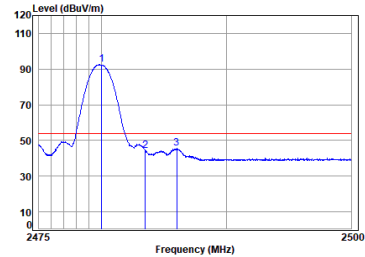

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		87.73	92.43	54.00	38.43	Average	0.00
2	2483.500	7.40	27.93	30.60		39.67	44.40	54.00	-9.60	Average	0.00
3	2486.019	7.42	27.94	30.60		40.76	45.52	54.00	-8.48	Average	0.00


BLE_1M_TX_CH_39_Vertical-Peak

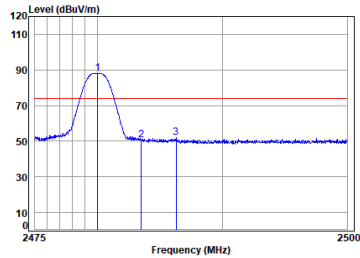

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		83.40	88.10	74.00	14.10	Peak	0.00
2	2483.500	7.40	27.93	30.60		45.87	50.60	74.00	-23.40	Peak	0.00
3	2486.269	7.42	27.95	30.60		47.25	52.02	74.00	-21.98	Peak	0.00

BLE_1M_TX_CH_39_Vertical-AVG

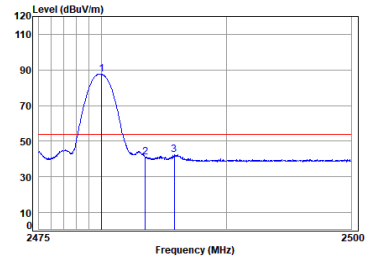


Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		82.92	87.62	54.00	33.62	Average	0.00
2	2483.500	7.40	27.93	30.60		36.46	41.19	54.00	-12.81	Average	0.00
3	2486.819	7.42	27.94	30.60		37.85	42.61	54.00	-11.39	Average	0.00




BLE_2M_TX_CH_00_Horizontal-Peak

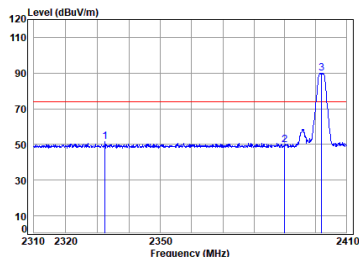

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2332.428	6.80	27.60	30.60		47.55	51.35	74.00	-22.65	Peak	0.00
2	2390.000	6.83	27.68	30.60		45.86	49.77	74.00	-24.23	Peak	0.00
3 pp	2402.000	6.84	27.70	30.60		85.94	89.88	74.00	15.88	Peak	0.00


BLE_2M_TX_CH_00_Horizontal-AVG

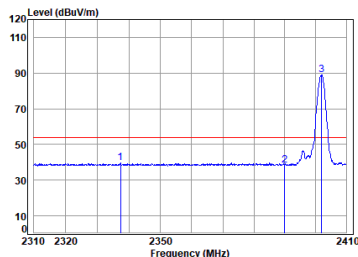

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2332.428	6.80	27.60	30.60		35.90	39.70	54.00	-14.30	Average	0.00
2	2390.000	6.83	27.68	30.60		34.52	38.43	54.00	-15.57	Average	0.00
3 pp	2402.000	6.84	27.70	30.60		84.97	88.91	54.00	34.91	Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak

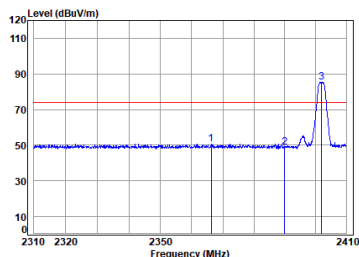

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2336.288	6.81	27.63	30.60		47.02	50.86	74.00	-23.14	Peak	0.00
2	2390.000	6.83	27.68	30.60		44.76	48.67	74.00	-25.33	Peak	0.00
3 pp	2402.000	6.84	27.70	30.60		81.45	85.39	74.00	11.39	Peak	0.00

BLE_2M_TX_CH_00_Vertical-AVG

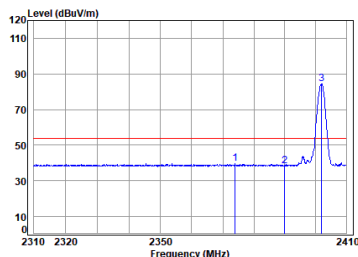


Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2336.288	6.82	27.65	30.60		35.80	39.67	54.00	-14.33	Average	0.00
2	2390.000	6.83	27.68	30.60		34.59	38.50	54.00	-15.50	Average	0.00
3 pp	2402.000	6.84	27.70	30.60		80.46	84.40	54.00	30.40	Average	0.00




BLE_2M_TX_CH_39_Horizontal-Peak

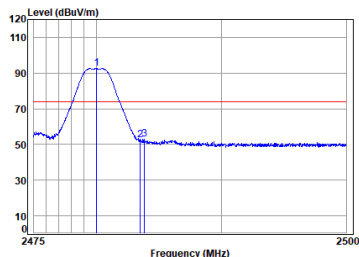

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		87.79	92.49	74.00	18.49	Peak	0.00
2	2483.500	7.40	27.93	30.60		47.54	52.27	74.00	-21.73	Peak	0.00
3	2483.621	7.40	27.94	30.60		48.07	52.81	74.00	-21.19	Peak	0.00


BLE_2M_TX_CH_39_Horizontal-AVG

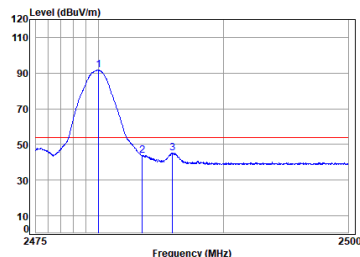

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		86.86	91.56	54.00	37.56	Average	0.00
2	2483.500	7.40	27.93	30.60		39.05	43.78	54.00	-10.22	Average	0.00
3	2485.894	7.42	27.94	30.60		40.37	45.13	54.00	-8.87	Average	0.00


BLE_2M_TX_CH_39_Vertical-Peak

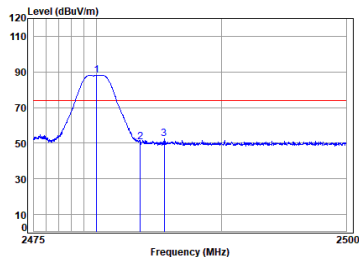

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		83.46	88.16	74.00	14.16	Peak	0.00
2	2483.500	7.40	27.93	30.60		45.96	50.69	74.00	-23.31	Peak	0.00
3	2485.395	7.41	27.94	30.60		47.52	52.27	74.00	-21.73	Peak	0.00

BLE_2M_TX_CH_39_Vertical-AVG

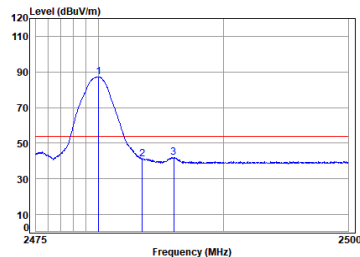

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2480 Band edge
BLE 2M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
	MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	pp 2480.000	7.38	27.92	30.60		82.56	87.26	54.00	33.26	Average	0.00
2	2483.500	7.40	27.93	30.60		36.43	41.16	54.00	-12.84	Average	0.00
3	2486.019	7.42	27.94	30.60		37.39	42.15	54.00	-11.85	Average	0.00



7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.4,6.5
 Measurement Distance: 3m
 Test Engineer: Kaito Zeng

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

7.3.1 E.U.T. Operation

Operating Environment:


Temperature: 23.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Pre-scan	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.3.3 Test Setup Diagram

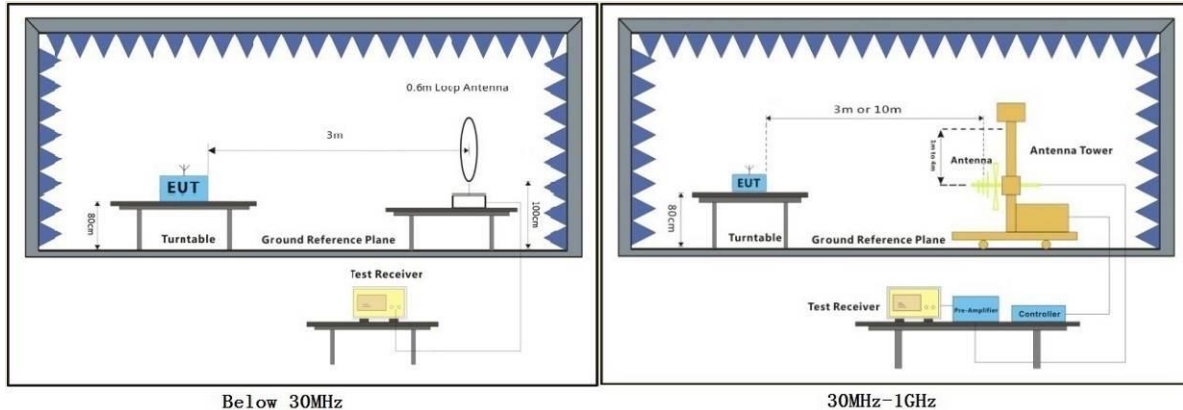


7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.

Test Mode: 00; Polarity: Horizontal

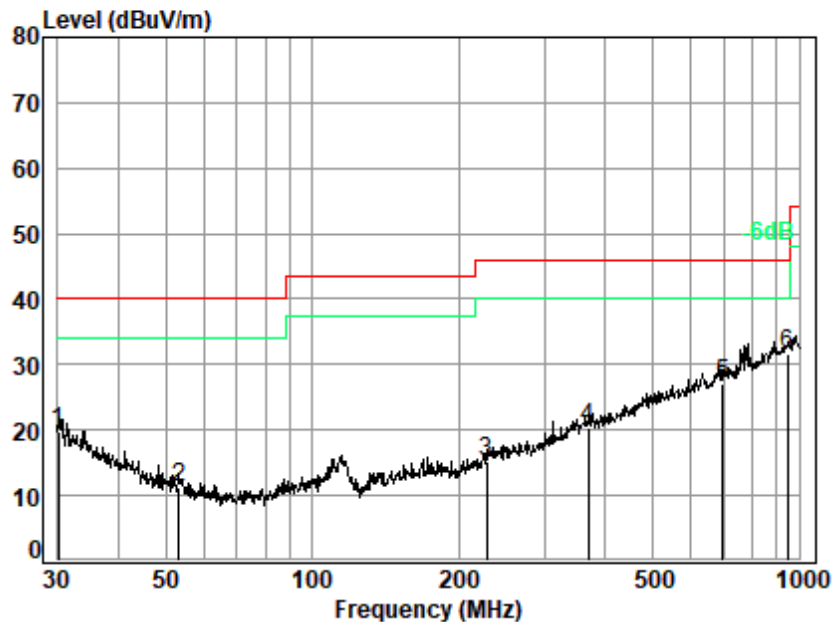


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 00525AT/00526AT
Test Mode: 00

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	30.105	21.40	0.74	27.65	25.34	19.83	40.00	-20.17 QP
2	53.131	12.41	0.91	27.63	25.65	11.34	40.00	-28.66 QP
3	227.691	16.33	1.83	27.70	24.65	15.11	46.00	-30.89 QP
4	369.405	20.26	2.38	27.68	25.46	20.42	46.00	-25.58 QP
5	696.857	25.83	3.40	27.84	25.80	27.19	46.00	-18.81 QP
6 q	945.440	29.06	4.07	26.70	25.08	31.51	46.00	-14.49 QP



Test Mode: 00; Polarity: Vertical

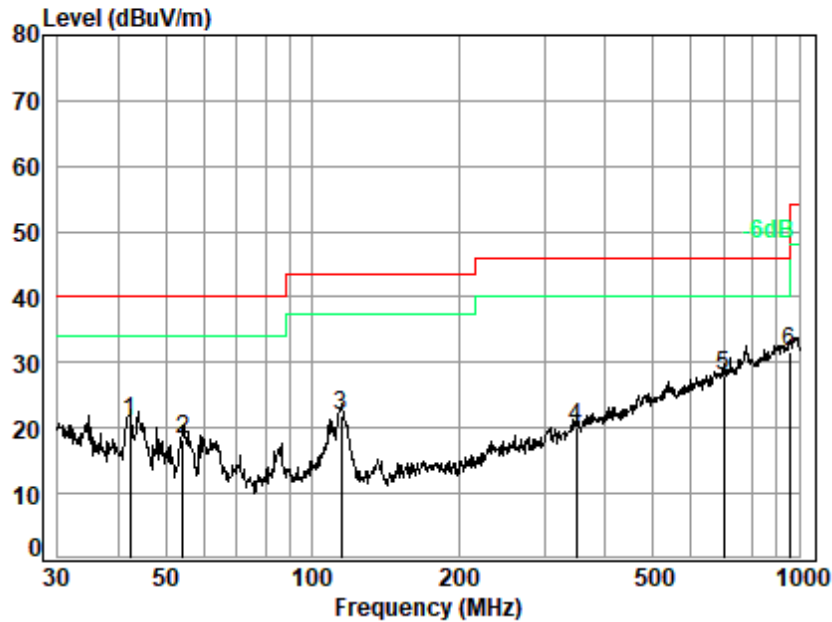

Site : chamber
Condition: 3m VERTICAL
Job No. : 00525AT/00526AT
Test Mode: 00

	Ant	Cable	Preamp	Read		Limit	Over	
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	42.302	15.27	0.84	27.64	32.41	20.88	40.00	-19.12 QP
2	54.261	12.20	0.91	27.63	32.88	18.36	40.00	-21.64 QP
3	114.917	11.88	1.32	27.64	36.30	21.86	43.50	-21.64 QP
4	349.250	19.61	2.31	27.63	25.91	20.20	46.00	-25.80 QP
5	699.305	25.89	3.41	27.83	26.49	27.96	46.00	-18.04 QP
6 q	955.438	29.27	4.09	26.65	24.80	31.51	46.00	-14.49 QP




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 26 of 72

Test Mode: 00

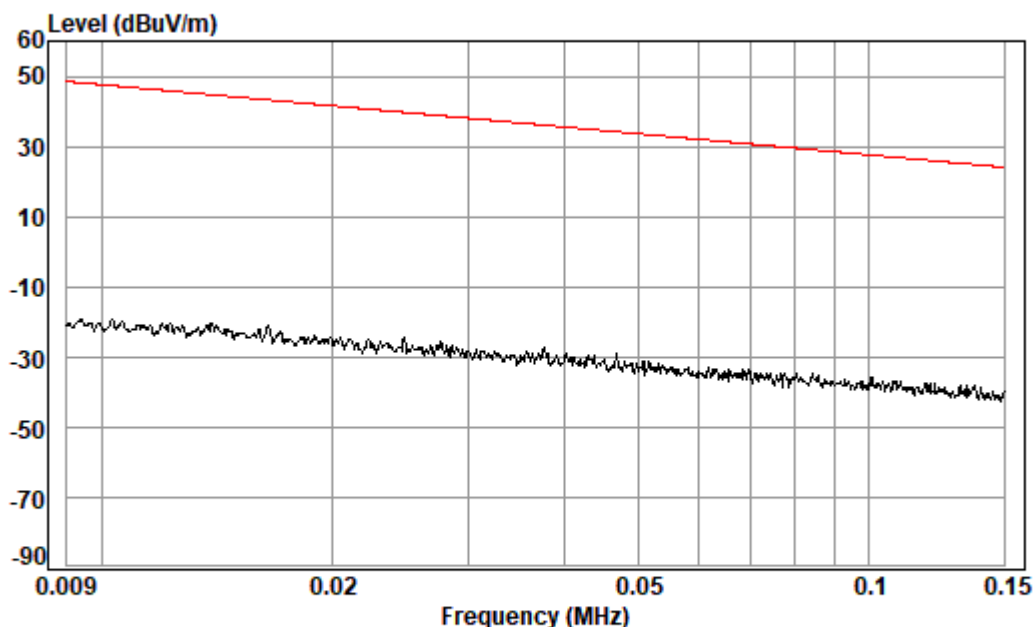

Condition: 3m

Job No. : 00525AT

Test Mode: 00

: coaxial

Remark margin more than 20dB



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 27 of 72

Test Mode: 00

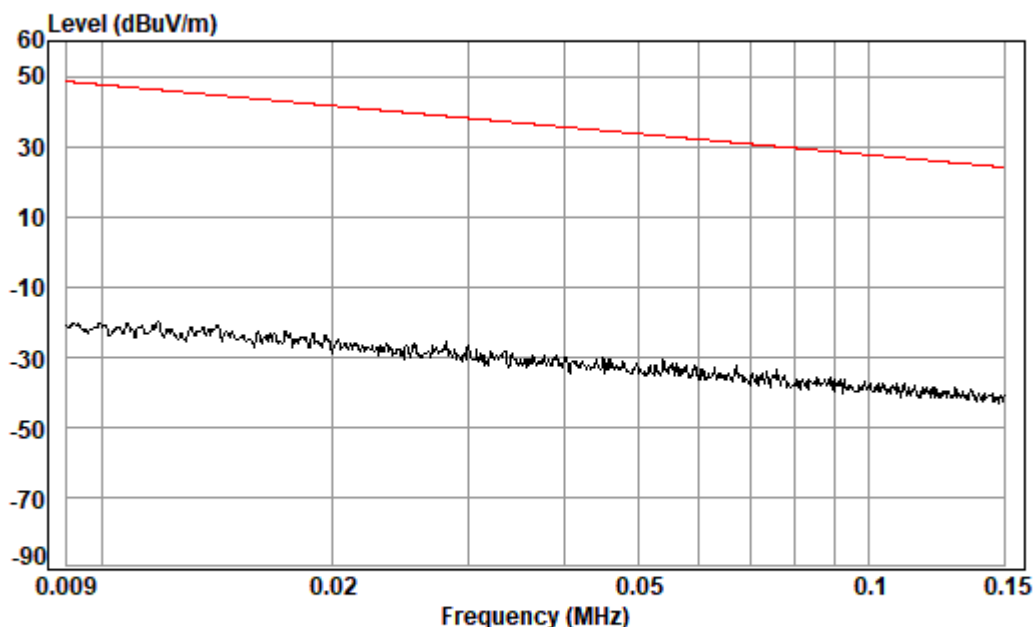

Condition: 3m

Job No. : 00525AT

Test Mode: 00

: coplanar

Remark margin more than 20dB



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 28 of 72

Test Mode: 00

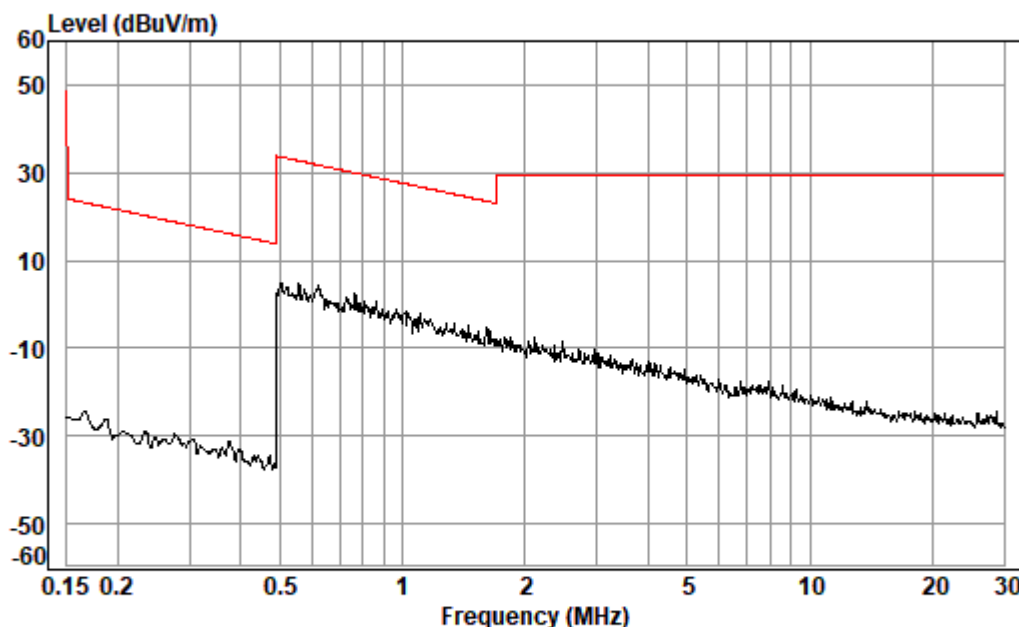

Condition: 3m

Job No. : 00525AT

Test Mode: 00

: coaxial

Remark margin more than 20dB



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260200052502

Page: 29 of 72

Test Mode: 00

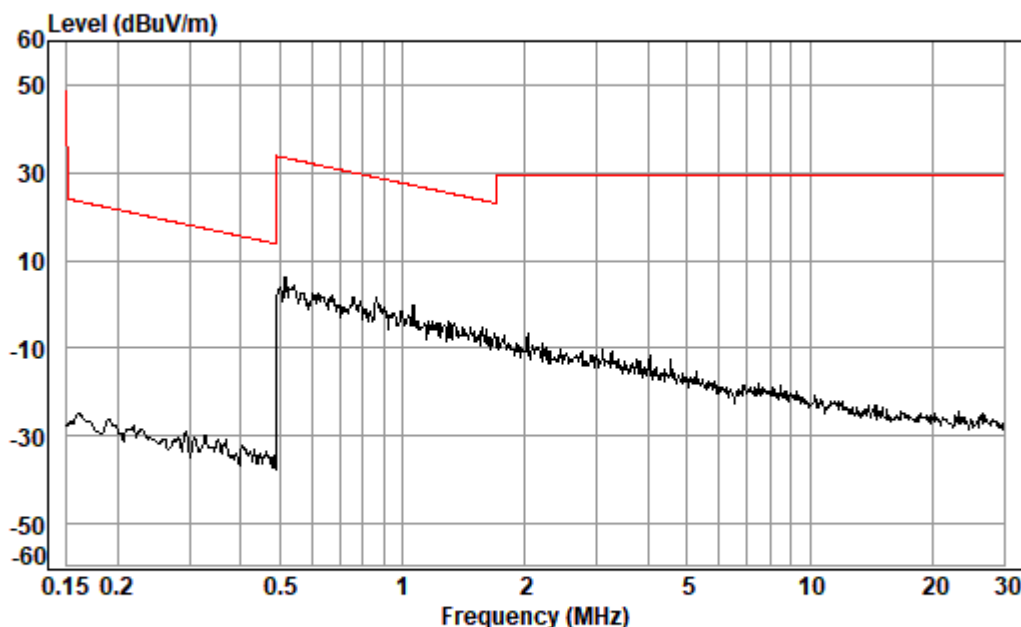

Condition: 3m

Job No. : 00525AT

Test Mode: 00

: coplanar

Remark margin more than 20dB



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.6 & 11.12
 Test Engineer: Xing Guo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 24.5 °C Humidity: 50.8 % RH Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.4.3 Test Setup Diagram

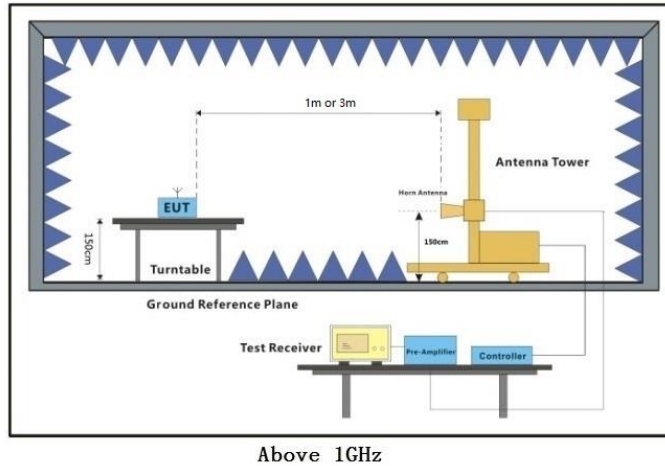

7.4.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Scan from 18GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
3. For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst-case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.




BLE_1M_TX_CH_00_Horizontal-Peak

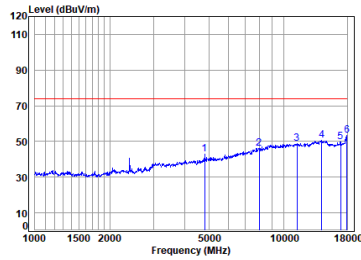

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 1M

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	4804.118	8.90	32.62	55.92	57.09	42.69	74.00	-31.31	Peak
2	7966.832	11.47	37.27	55.92	53.49	46.22	74.00	-27.78	Peak
3	11302.480	14.39	39.40	53.41	48.41	48.79	74.00	-25.21	Peak
4	14242.000	16.83	40.46	54.10	47.53	50.72	74.00	-23.28	Peak
5	16939.948	19.22	38.68	53.89	45.64	49.65	74.00	-24.35	Peak
6	pp17948.050	18.75	42.29	54.28	46.55	53.31	74.00	-28.69	Peak


BLE_1M_TX_CH_00_Horizontal-Avg

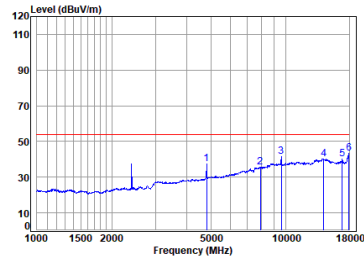

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 1M

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	4804.118	8.90	32.62	55.92	51.95	37.55	54.00	-16.45	Average
2	7920.911	11.48	37.30	55.94	42.86	35.79	54.00	-18.30	Average
3	9613.430	12.40	38.75	54.01	44.34	41.48	54.00	-12.52	Average
4	14201.690	16.67	40.50	54.10	37.23	40.30	54.00	-13.70	Average
5	16891.040	19.64	38.68	53.88	35.66	40.02	54.00	-13.98	Average
6	pp17948.050	18.75	42.29	54.28	36.42	43.18	54.00	-10.82	Average


BLE_1M_TX_CH_00_Vertical-Peak

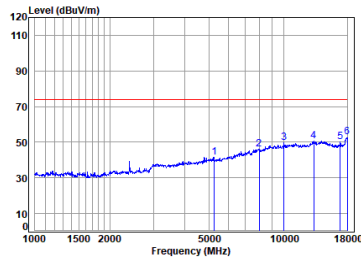

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 1M

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	5254.440	9.29	33.19	56.24	55.33	41.57	74.00	-32.43	Peak
2	7966.832	11.47	37.27	55.92	53.31	46.13	74.00	-27.87	Peak
3	10010.420	12.90	38.90	53.60	51.70	49.90	74.00	-24.10	Peak
4	13211.690	15.84	40.11	53.87	48.67	50.75	74.00	-23.25	Peak
5	16891.040	19.64	38.68	53.88	45.67	50.03	74.00	-23.97	Peak
6	pp18000.000	18.64	42.60	54.30	45.83	52.77	74.00	-21.23	Peak

BLE_1M_TX_CH_00_Vertical-Avg

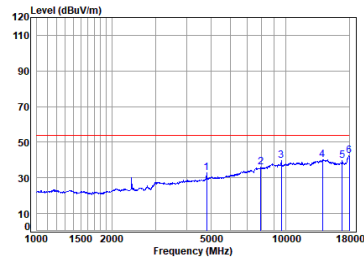


Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 1M

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	4804.118	8.90	32.62	55.92	47.47	33.07	54.00	-20.93	Average
2	7943.838	11.48	37.30	55.93	43.01	35.86	54.00	-18.14	Average
3	9613.430	12.40	38.75	54.01	42.47	39.61	54.00	-14.39	Average
4	14079.080	16.38	40.44	54.10	37.38	40.10	54.00	-13.90	Average
5	16891.040	19.64	38.68	53.88	35.29	39.65	54.00	-14.35	Average
6	pp18000.000	18.64	42.60	54.30	35.52	42.46	54.00	-11.54	Average




BLE_1M_TX_CH_19_Horizontal-Peak

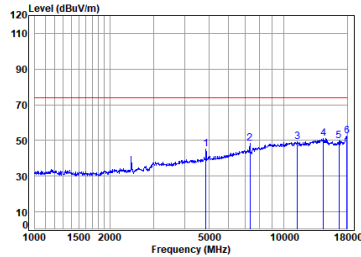

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	4874.043	8.97	32.85	55.99	59.49	45.32	74.00	-28.68	Peak	0.00	
2	7326.267	11.13	36.90	56.30	56.74	48.47	74.00	-25.53	Peak	0.00	
3	11355.198	14.29	39.36	53.40	48.99	49.24	74.00	-24.76	Peak	0.00	
4	14450.130	16.62	40.30	54.10	48.24	51.06	74.00	-22.94	Peak	0.00	
5	16648.698	17.87	38.45	53.83	47.31	49.80	74.00	-24.20	Peak	0.00	
6	pp17948.058	18.75	42.29	54.28	45.57	52.33	74.00	-21.67	Peak	0.00	


BLE_1M_TX_CH_19_Horizontal-Avg

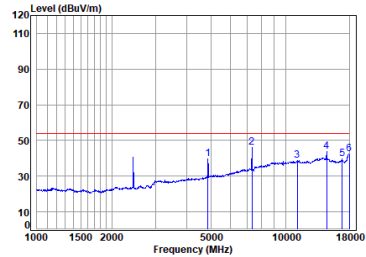

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	4874.043	8.97	32.85	55.99	54.07	39.90	54.00	-14.10	Average	0.00	
2	pp 7326.267	11.13	36.90	56.30	54.36	46.09	54.00	-7.91	Average	0.00	
3	11148.310	14.17	39.38	53.46	38.79	38.79	54.00	-15.21	Average	0.00	
4	14618.170	16.62	40.20	54.10	40.91	43.63	54.00	-10.37	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.55	39.91	54.00	-14.09	Average	0.00	
6	18000.000	18.64	42.60	54.30	35.52	42.46	54.00	-11.54	Average	0.00	


BLE_1M_TX_CH_19_Vertical-Peak

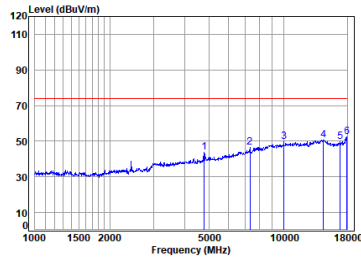

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	4790.245	8.89	32.56	55.91	58.27	43.81	74.00	-30.19	Peak	0.00	
2	7326.267	11.13	36.90	56.30	54.70	46.43	74.00	-27.57	Peak	0.00	
3	10010.420	12.90	38.90	53.60	51.57	49.77	74.00	-24.23	Peak	0.00	
4	14450.130	16.62	40.30	54.10	47.91	50.73	74.00	-23.27	Peak	0.00	
5	16891.040	19.64	38.60	53.88	45.16	49.52	74.00	-24.48	Peak	0.00	
6	pp17948.058	18.75	42.29	54.28	45.91	52.67	74.00	-21.33	Peak	0.00	

BLE_1M_TX_CH_19_Vertical-Avg

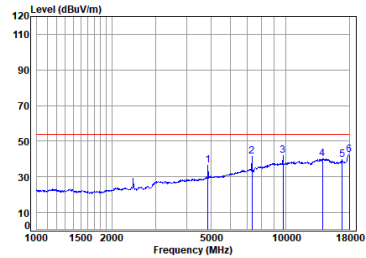


Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Limit	Factor
1	4874.043	8.97	32.85	55.99	50.82	36.65	54.00	-17.35	Average	0.00	
2	7326.267	11.13	36.90	56.30	49.04	41.57	54.00	-12.43	Average	0.00	
3	9753.371	12.82	38.41	53.86	44.67	42.04	54.00	-11.96	Average	0.00	
4	14079.080	16.38	40.44	54.10	37.55	40.27	54.00	-13.73	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.43	39.79	54.00	-14.21	Average	0.00	
6	pp18000.000	18.64	42.60	54.30	35.60	42.54	54.00	-11.46	Average	0.00	




BLE_1M_TX_CH_39_Horizontal-Peak

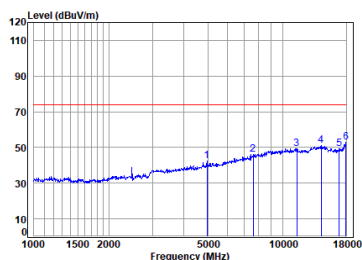

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2480 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4959.307	9.07	33.12	56.06	56.16	42.29	74.00	-31.71	Peak	0.00	
2	7606.788	11.03	36.77	56.13	54.63	46.30	74.00	-27.70	Peak	0.00	
3	11400.918	14.10	39.30	53.38	49.45	49.47	74.00	-24.53	Peak	0.00	
4	14204.630	17.00	40.42	54.10	47.72	51.04	74.00	-22.96	Peak	0.00	
5	16891.040	19.64	38.60	53.88	45.11	49.47	74.00	-24.53	Peak	0.00	
6	pp17948.058	18.75	42.29	54.28	46.09	52.85	74.00	-21.15	Peak	0.00	


BLE_1M_TX_CH_39_Horizontal-Avg

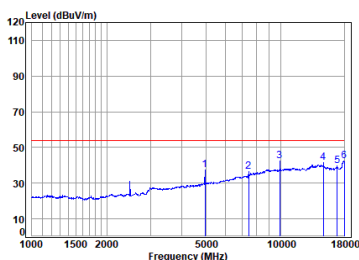

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2480 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4959.307	9.07	33.12	56.06	51.46	37.59	54.00	-16.41	Average	0.00	
2	7432.914	11.10	36.77	56.23	44.90	36.54	54.00	-17.46	Average	0.00	
3	9923.991	12.74	38.65	53.68	44.58	42.29	54.00	-11.71	Average	0.00	
4	14873.890	16.94	39.80	54.10	38.67	41.39	54.00	-12.61	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.31	39.67	54.00	-14.33	Average	0.00	
6	pp18000.000	18.64	42.60	54.30	35.66	42.60	54.00	-11.40	Average	0.00	


BLE_1M_TX_CH_39_Vertical-Peak

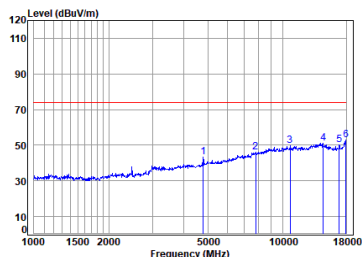

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2480 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4790.245	8.89	32.56	55.91	57.77	43.31	74.00	-30.69	Peak	0.00	
2	7704.729	11.21	37.00	56.02	53.78	45.97	74.00	-28.03	Peak	0.00	
3	10729.400	13.53	39.33	53.53	50.46	49.79	74.00	-24.21	Peak	0.00	
4	14533.910	16.36	40.20	54.10	48.60	51.06	74.00	-22.94	Peak	0.00	
5	16891.040	19.64	38.60	53.88	45.71	50.07	74.00	-23.93	Peak	0.00	
6	pp17948.058	18.75	42.29	54.28	46.07	52.83	74.00	-21.17	Peak	0.00	

BLE_1M_TX_CH_39_Vertical-Avg

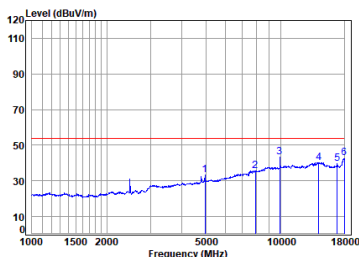


Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2480 TX RSE
BLE 1M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4959.307	9.07	33.12	56.06	47.38	33.51	54.00	-20.49	Average	0.00	
2	7920.911	11.48	37.30	55.94	42.91	35.75	54.00	-18.25	Average	0.00	
3	pp 9923.991	12.74	38.65	53.68	45.44	43.15	54.00	-10.85	Average	0.00	
4	14242.800	16.83	40.46	54.10	37.09	40.28	54.00	-13.72	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.41	39.77	54.00	-14.23	Average	0.00	
6	18000.000	18.64	42.60	54.30	35.75	42.69	54.00	-11.31	Average	0.00	




BLE_2M_TX_CH_00_Horizontal-Peak

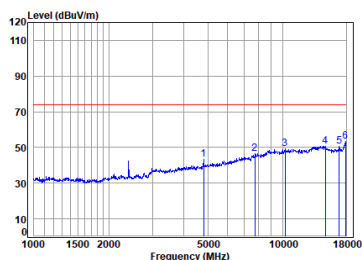

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	4804.110	8.90	32.62	55.92	57.88	43.48	74.00	-30.52	Peak	0.00	
2	7739.857	11.22	36.98	56.05	54.24	46.39	74.00	-27.61	Peak	0.00	
3	10215.028	12.91	39.12	53.58	51.01	49.46	74.00	-24.54	Peak	0.00	
4	14073.090	16.94	39.88	54.10	47.96	50.70	74.00	-23.30	Peak	0.00	
5	16891.040	19.64	38.60	53.88	46.29	50.65	74.00	-23.35	Peak	0.00	
6	pp17896.258	18.87	41.97	54.26	46.62	53.28	74.00	-20.80	Peak	0.00	


BLE_2M_TX_CH_00_Horizontal-Avg

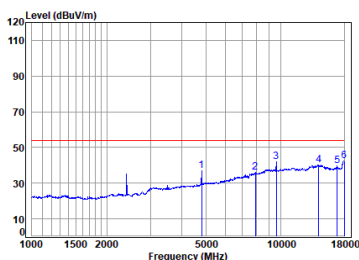

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	4804.110	8.90	32.62	55.92	51.36	36.96	54.00	-17.04	Average	0.00	
2	7920.911	11.48	37.30	55.94	43.06	35.90	54.00	-18.10	Average	0.00	
3	9613.430	12.40	38.75	54.01	45.05	42.19	54.00	-11.81	Average	0.00	
4	14242.000	16.83	40.46	54.10	37.04	40.23	54.00	-13.77	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.40	39.76	54.00	-14.24	Average	0.00	
6	pp18000.000	18.64	42.60	54.30	35.57	42.51	54.00	-11.49	Average	0.00	


BLE_2M_TX_CH_00_Vertical-Peak

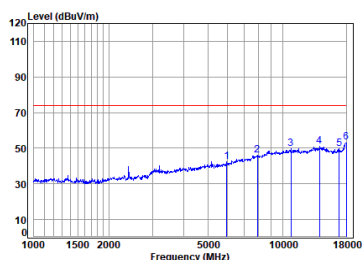

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	5967.033	10.03	34.27	56.58	54.72	42.44	74.00	-31.56	Peak	0.00	
2	7898.049	11.48	37.29	55.96	53.47	46.28	74.00	-27.72	Peak	0.00	
3	10791.090	13.49	39.39	53.52	50.52	49.88	74.00	-24.12	Peak	0.00	
4	14079.008	16.38	40.44	54.10	48.25	50.97	74.00	-23.03	Peak	0.00	
5	16891.040	19.64	38.60	53.88	45.41	49.77	74.00	-24.23	Peak	0.00	
6	pp18000.000	18.64	42.60	54.30	46.29	53.23	74.00	-20.77	Peak	0.00	

BLE_2M_TX_CH_00_Vertical-Avg

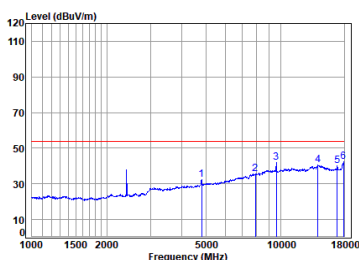

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2402 TX RSE
BLE 2M


	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	Remark	Factor
1	4804.110	8.90	32.62	55.92	46.59	32.19	54.00	-21.81	Average	0.00	
2	7920.911	11.48	37.30	55.94	42.93	35.77	54.00	-18.23	Average	0.00	
3	9613.430	12.40	38.75	54.01	44.72	41.86	54.00	-12.14	Average	0.00	
4	14119.830	16.40	40.42	54.10	37.77	40.49	54.00	-13.51	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.84	40.20	54.00	-13.80	Average	0.00	
6	pp17896.250	18.87	41.97	54.26	35.88	42.46	54.00	-11.54	Average	0.00	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


BLE_2M_TX_CH_19_Horizontal-Peak

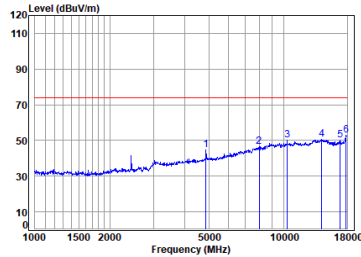

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB	dB
1	4874.043	8.97	32.85	55.99	58.69	44.52	74.00	-29.48	Peak	0.00		
2	7966.832	11.47	37.27	55.92	53.52	46.34	74.00	-27.66	Peak	0.00		
3	10333.808	13.51	39.20	53.57	50.93	50.07	74.00	-23.93	Peak	0.00		
4	14201.690	16.67	40.50	54.10	47.72	50.79	74.00	-23.21	Peak	0.00		
5	16891.040	19.64	38.60	53.88	46.06	50.42	74.00	-23.58	Peak	0.00		
6	pp17793.098	19.13	41.15	54.22	46.70	52.76	74.00	-21.24	Peak	0.00		


BLE_2M_TX_CH_19_Horizontal-Avg

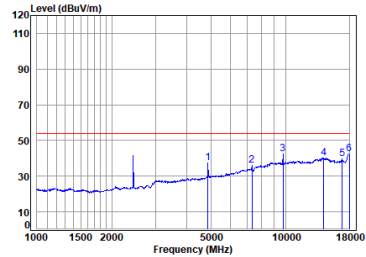

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB	dB
1	4874.043	8.97	32.85	55.99	51.63	37.46	54.00	-16.54	Average	0.00		
2	7326.267	11.13	36.90	56.30	44.41	36.14	54.00	-17.86	Average	0.00		
3	pp 9753.371	12.82	38.41	53.86	45.24	42.61	54.00	-11.39	Average	0.00		
4	14201.690	16.67	40.50	54.10	37.19	40.26	54.00	-13.74	Average	0.00		
5	16891.040	19.64	38.60	53.88	35.48	39.84	54.00	-14.16	Average	0.00		
6	18000.000	18.64	42.60	54.30	35.66	42.60	54.00	-11.40	Average	0.00		


BLE_2M_TX_CH_19_Vertical-Peak

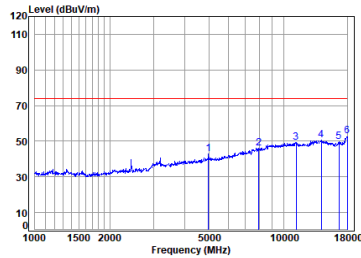

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB	dB
1	4988.058	9.10	33.18	56.09	56.71	42.90	74.00	-31.10	Peak	0.00		
2	7943.838	11.48	37.30	55.93	53.30	46.15	74.00	-27.85	Peak	0.00		
3	11204.900	14.25	39.50	53.44	48.97	49.28	74.00	-24.72	Peak	0.00		
4	14160.710	16.53	40.46	54.10	47.77	50.66	74.00	-23.34	Peak	0.00		
5	16648.690	17.87	38.45	53.83	47.07	49.56	74.00	-24.44	Peak	0.00		
6	pp18000.000	18.64	42.60	54.30	45.85	52.79	74.00	-21.21	Peak	0.00		

BLE_2M_TX_CH_19_Vertical-Avg

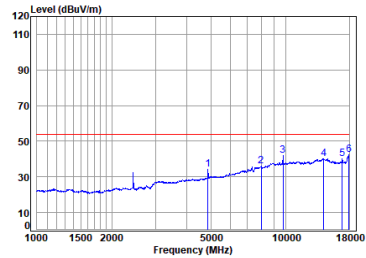

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB	dB
1	4874.043	8.97	32.85	55.99	48.27	34.10	54.00	-19.90	Average	0.00		
2	7966.832	11.47	37.27	55.92	43.11	35.93	54.00	-18.07	Average	0.00		
3	9753.371	12.82	38.41	53.86	44.77	42.14	54.00	-11.86	Average	0.00		
4	14242.800	16.83	40.46	54.10	37.16	40.35	54.00	-13.65	Average	0.00		
5	16891.040	19.64	38.60	53.88	35.74	40.10	54.00	-13.90	Average	0.00		
6	pp17948.050	18.75	42.29	54.28	35.70	42.46	54.00	-11.54	Average	0.00		




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, Inspection & Testing Services

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


BLE_2M_TX_CH_39_Horizontal-Peak

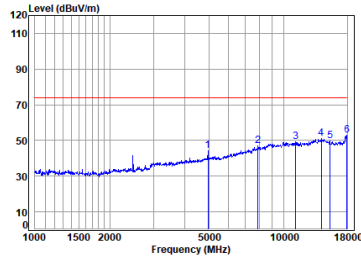

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2400 TX RSE
: BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4959.307	9.07	33.12	56.06	58.22	44.35	74.00	-29.65	Peak	0.00	
2	7875.254	11.42	37.20	55.97	54.17	46.82	74.00	-27.18	Peak	0.00	
3	11172.508	14.21	39.45	53.45	48.91	49.12	74.00	-24.88	Peak	0.00	
4	14160.710	16.53	40.46	54.10	48.27	51.16	74.00	-22.84	Peak	0.00	
5	15354.390	17.29	39.09	53.96	47.13	49.55	74.00	-24.45	Peak	0.00	
6	pp17948.058	18.75	42.29	54.28	45.95	52.71	74.00	-21.29	Peak	0.00	


BLE_2M_TX_CH_39_Horizontal-Avg

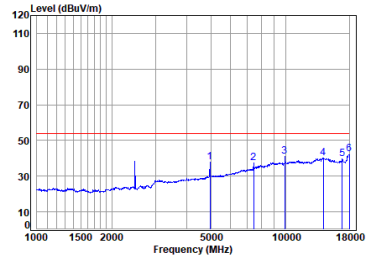

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2400 TX RSE
: BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4959.307	9.07	33.12	56.06	51.57	37.70	54.00	-16.30	Average	0.00	
2	7432.914	11.10	36.77	56.23	45.74	37.38	54.00	-16.62	Average	0.00	
3	9923.991	12.74	38.65	53.68	43.47	41.18	54.00	-12.82	Average	0.00	
4	14160.710	16.53	40.46	54.10	37.40	40.29	54.00	-13.71	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.33	39.69	54.00	-14.31	Average	0.00	
6	pp18000.000	18.64	42.60	54.30	35.40	42.34	54.00	-11.66	Average	0.00	


BLE_2M_TX_CH_39_Vertical-Peak

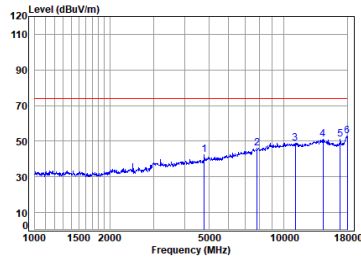

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2400 TX RSE
: BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4790.245	8.89	32.56	55.91	56.76	42.30	74.00	-31.70	Peak	0.00	
2	7887.262	11.23	37.01	56.01	53.80	46.03	74.00	-27.97	Peak	0.00	
3	11140.310	14.17	39.30	53.46	48.80	48.89	74.00	-25.11	Peak	0.00	
4	14366.840	16.99	40.40	54.10	47.96	51.25	74.00	-22.75	Peak	0.00	
5	16891.040	19.64	38.60	53.88	46.58	50.94	74.00	-23.06	Peak	0.00	
6	pp18000.000	18.64	42.60	54.30	46.04	52.98	74.00	-21.02	Peak	0.00	

BLE_2M_TX_CH_39_Vertical-Avg

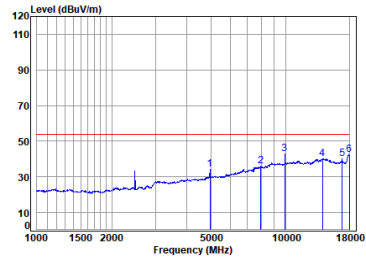

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2400 TX RSE
: BLE 2M

	Freq	Cable	Loss	Factor	Ant	Preamp	Read	Level	Limit	Over	Aux
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB	dB	dB
1	4959.307	9.07	33.12	56.06	48.25	34.38	54.00	-19.62	Average	0.00	
2	7943.838	11.48	37.30	55.93	43.11	35.96	54.00	-18.04	Average	0.00	
3	9923.991	12.74	38.65	53.68	45.19	42.90	54.00	-11.10	Average	0.00	
4	14038.450	16.47	40.52	54.10	37.48	40.37	54.00	-13.63	Average	0.00	
5	16891.040	19.64	38.60	53.88	35.64	40.00	54.00	-14.00	Average	0.00	
6	18000.000	18.64	42.60	54.30	35.38	42.32	54.00	-11.68	Average	0.00	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (Shenzhen) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


BLE_1M_TX_CH_19_Horizontal

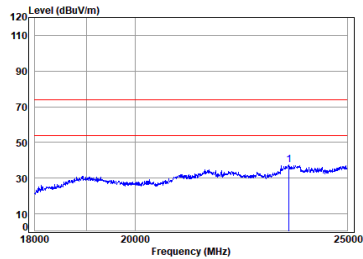

Condition: 3m HORIZONTAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 1M

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp23518.190	6.76	38.34	50.30	52.25	37.51	74.00	-36.49	Peak		-9.54

BLE_1M_TX_CH_19_Vertical

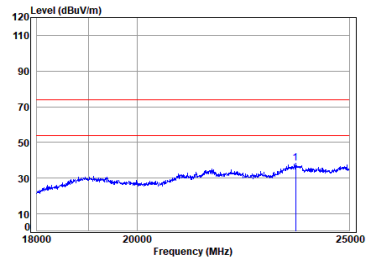

Condition: 3m VERTICAL
Job No : 00525AT/00526AT
Mode : 2440 TX RSE
BLE 1M

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 pp23626.600	6.77	38.55	50.33	52.73	38.18	74.00	-35.82	Peak		-9.54



7.5 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
 Test Method: ANSI C63.10 (2020) Section 11.9.1
 Test Engineer: Linvo Ding

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 29.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.5.3 Test Setup Diagram

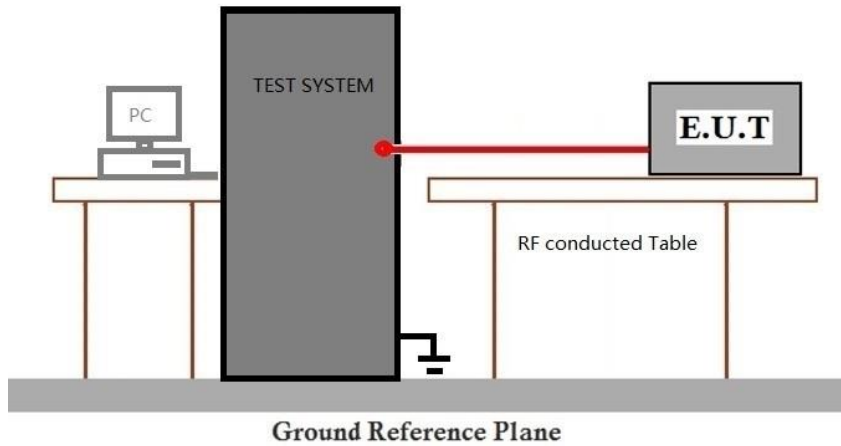

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details



7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
 Test Method: ANSI C63.10 (2020) Section 11.8.1
 Test Engineer: Linvo Ding

Limit:
 ≥500 kHz


7.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 29.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

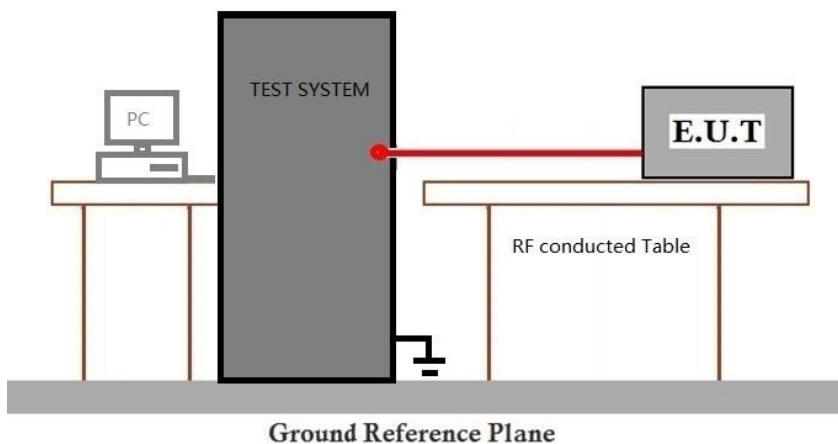

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.7 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
 Test Method: ANSI C63.10 (2020) Section 11.10.2
 Test Engineer: Linvo Ding

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 29.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

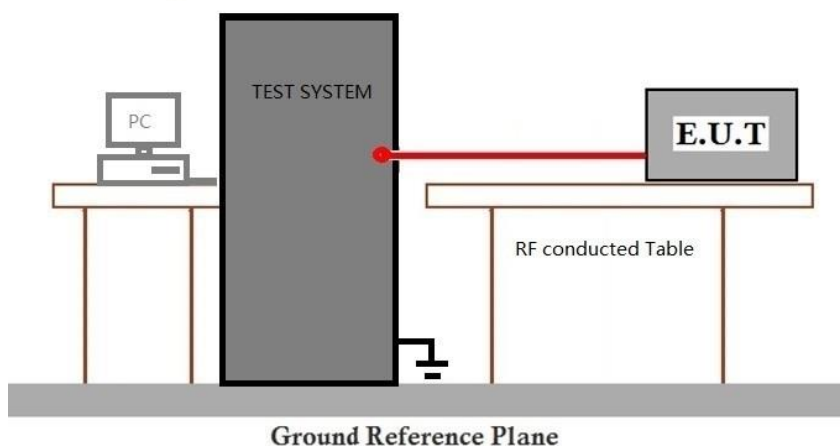

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 6.10.4
 Test Engineer: Linvo Ding

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 29.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.8.3 Test Setup Diagram

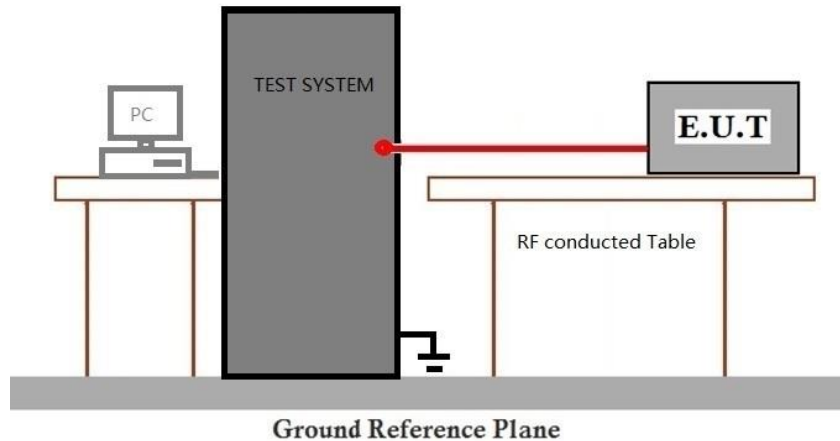

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 11.11
 Test Engineer: Linvo Ding

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:


Temperature: 29.7 °C Humidity: 42.3 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	Charge + TX mode(1Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.
Final test	01	Charge + TX mode(2Mbps)_Keep the EUT in charging and continuously transmitting mode with GFSK modulation.



7.9.3 Test Setup Diagram

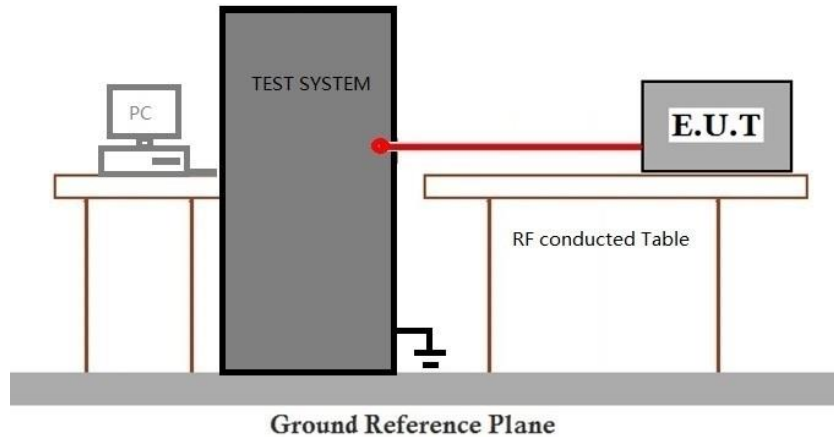

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix – Test Setup Photos for SZCR2602000525AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2602000525AT



10 Appendix

1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.443	0.625	70.88	1.49	0.03
		2440	0.467	0.625	74.72	1.27	0.03
		2480	0.467	0.625	74.72	1.27	0.03
2M	SISO	2402	0.259	0.625	41.44	3.83	0.00
		2440	0.283	0.625	45.28	3.44	0.02
		2480	0.284	0.625	45.44	3.43	0.00



1.2 Test Graph

1.2.1 Ant1

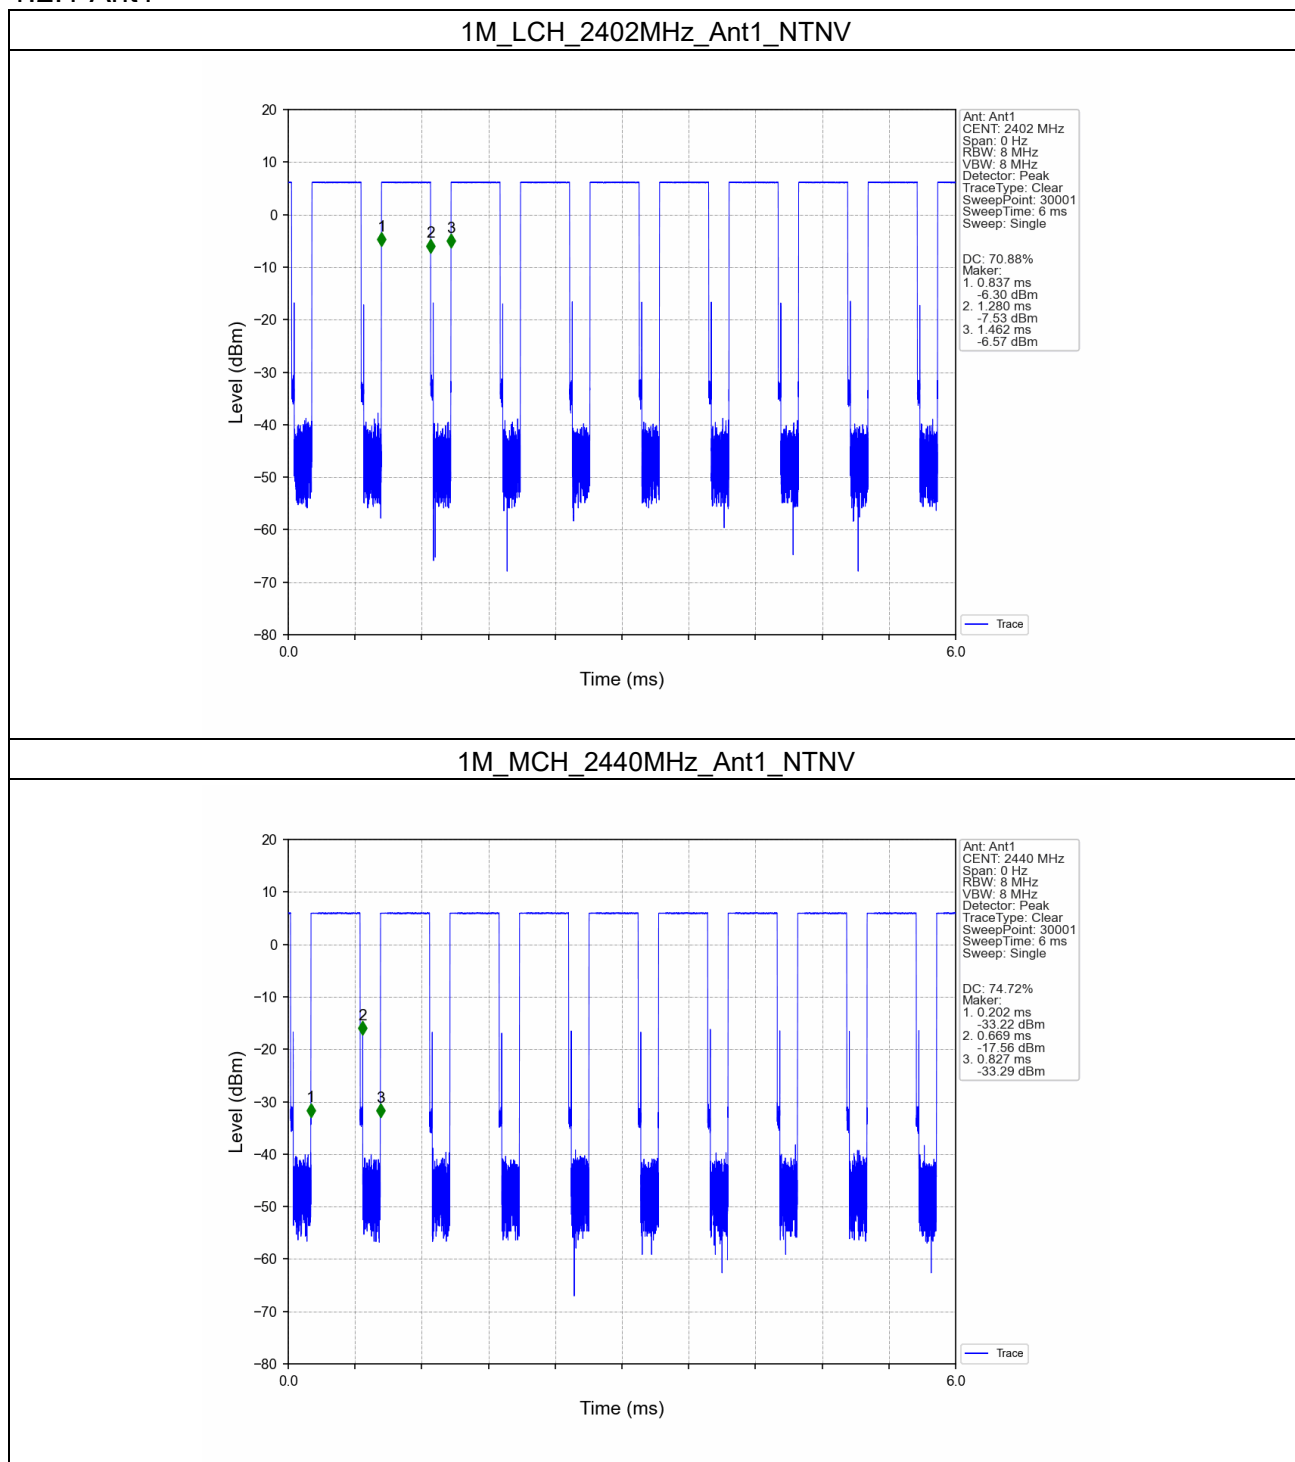


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch, Shenzhen EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


1M_HCH_2480MHz_Ant1_NTNV

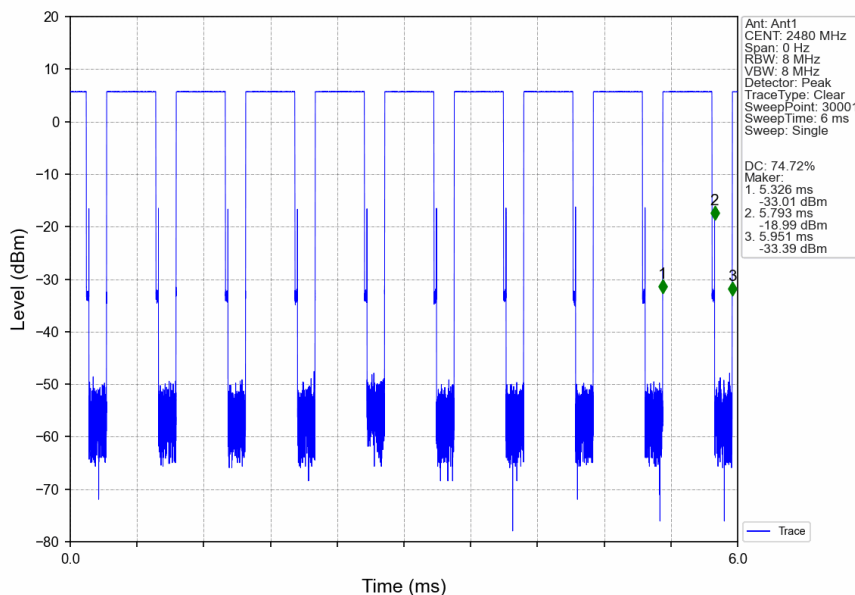


2M_LCH_2402MHz_Ant1_NTNV

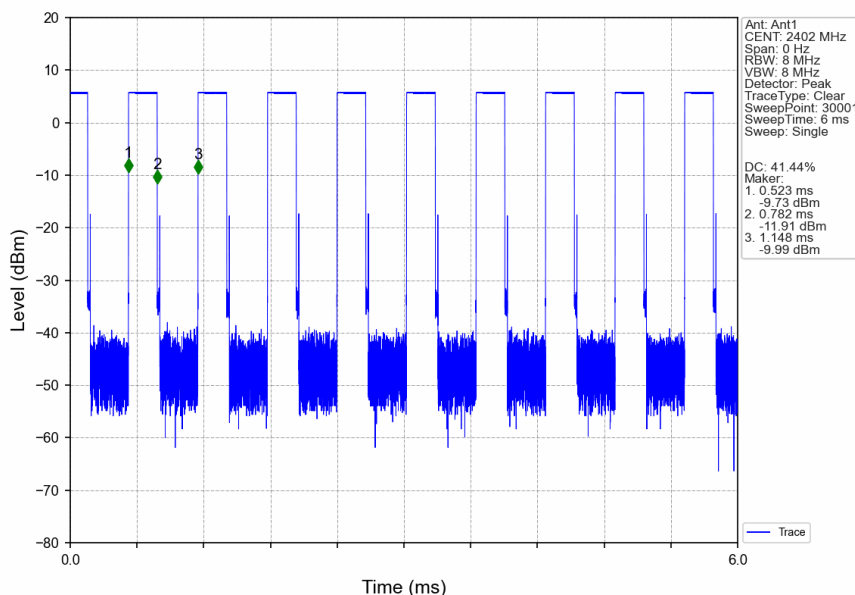

2M_MCH_2440MHz_Ant1_NTNV

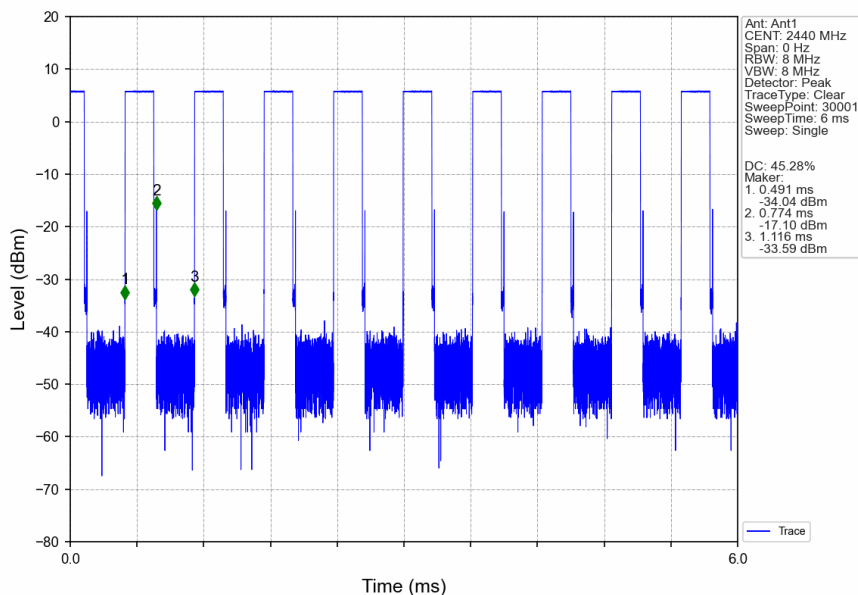

2M_HCH_2480MHz_Ant1_NTNV

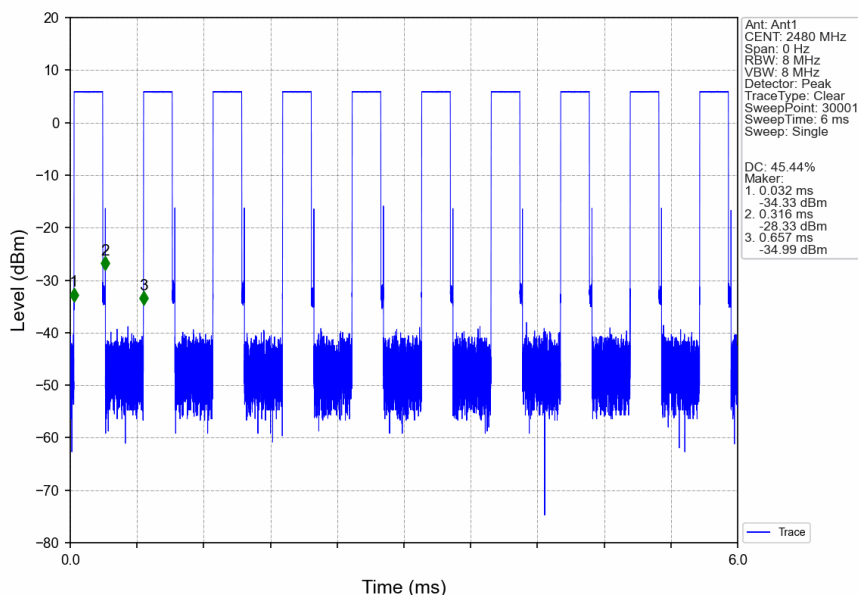

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.020	/	Pass
		2440	1	1.022	/	Pass
		2480	1	1.022	/	Pass
2M	SISO	2402	1	2.039	/	Pass
		2440	1	2.045	/	Pass
		2480	1	2.048	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.678	≥ 0.5	Pass
		2440	1	0.677	≥ 0.5	Pass
		2480	1	0.667	≥ 0.5	Pass
2M	SISO	2402	1	1.164	≥ 0.5	Pass
		2440	1	1.158	≥ 0.5	Pass
		2480	1	1.165	≥ 0.5	Pass




2.2 Test Graph


2.2.1 OBW

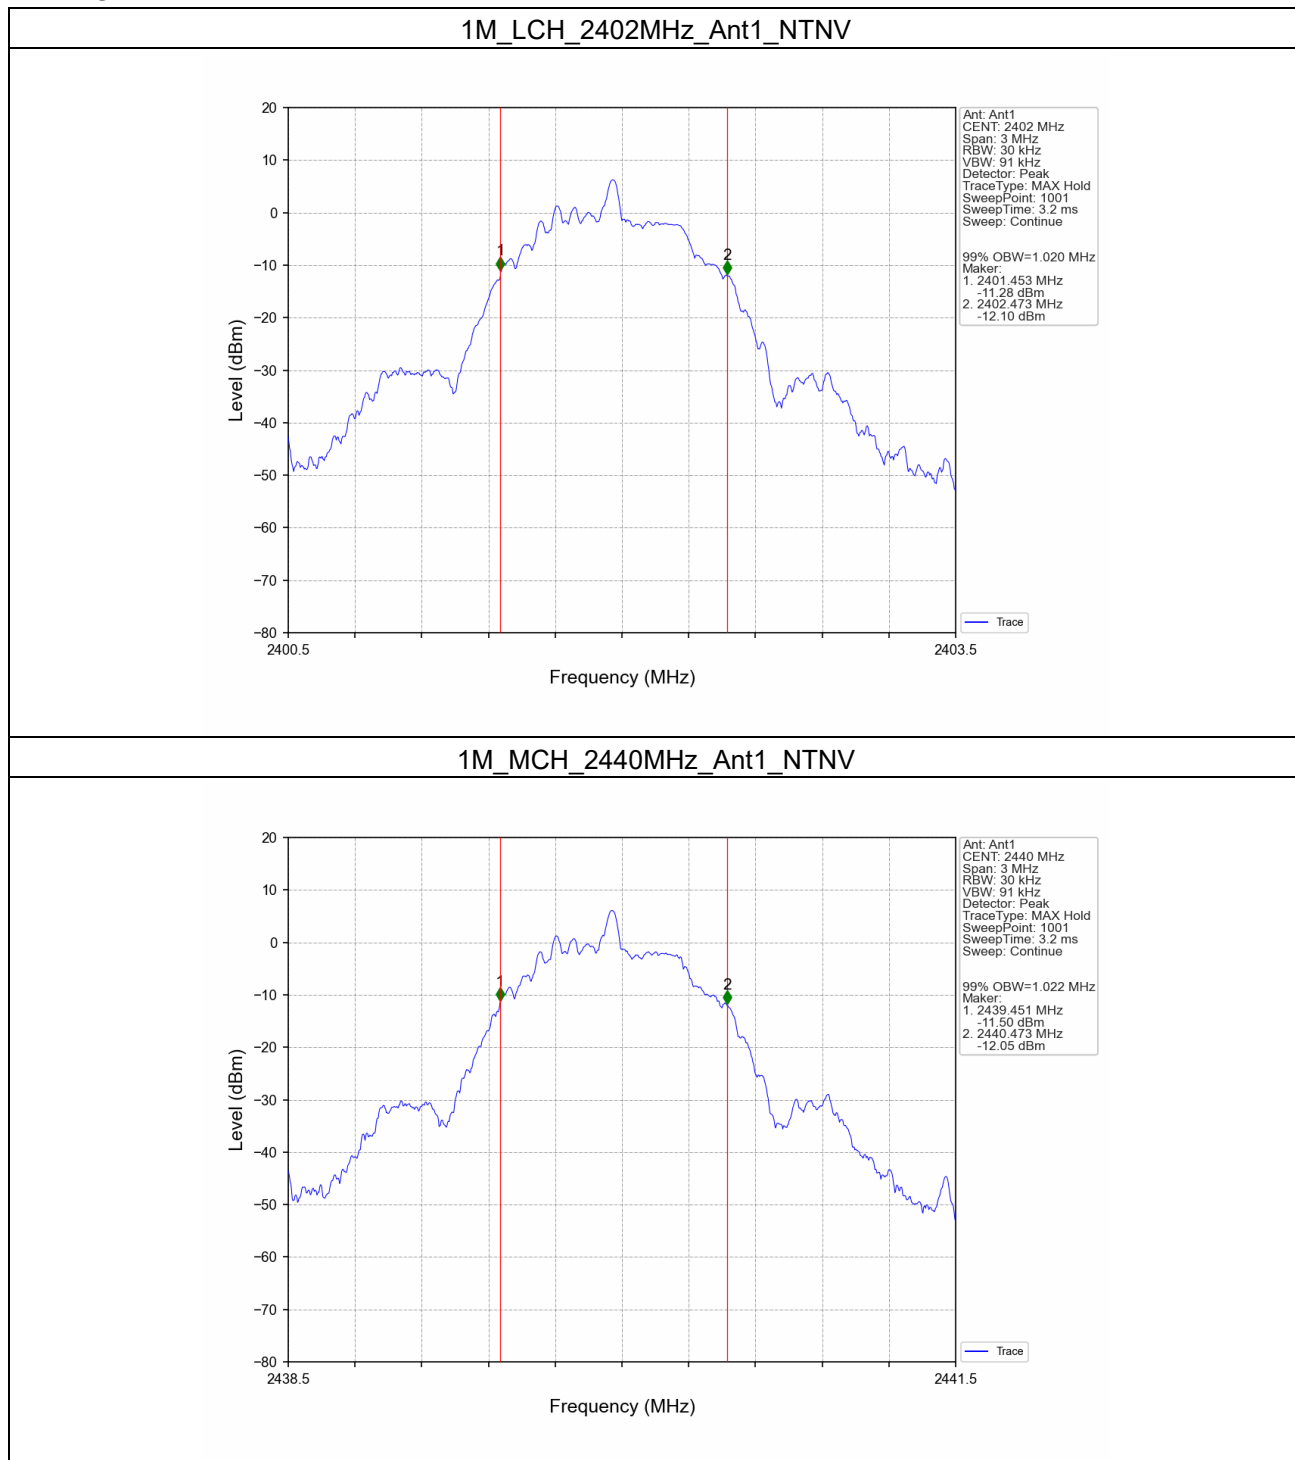


1M_HCH_2480MHz_Ant1_NTNV

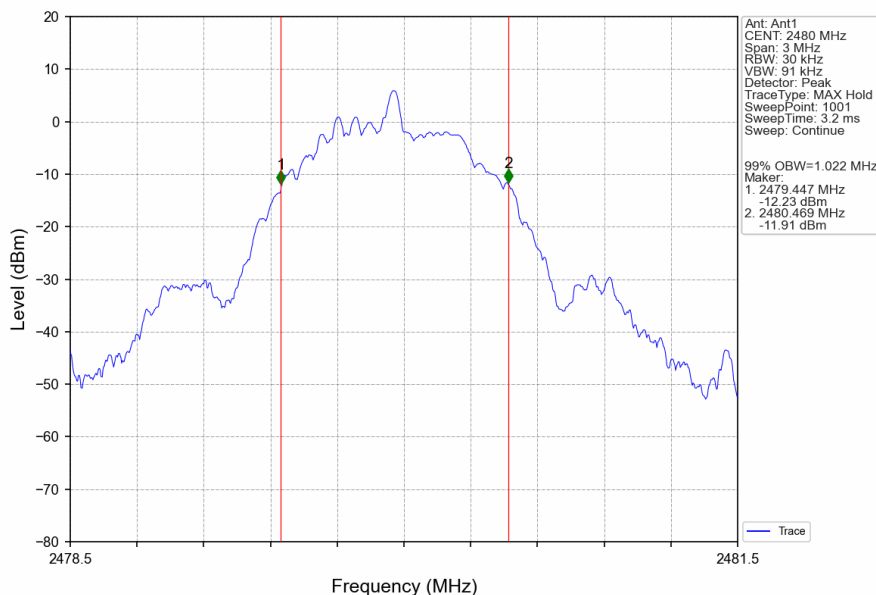


2M_LCH_2402MHz_Ant1_NTNV

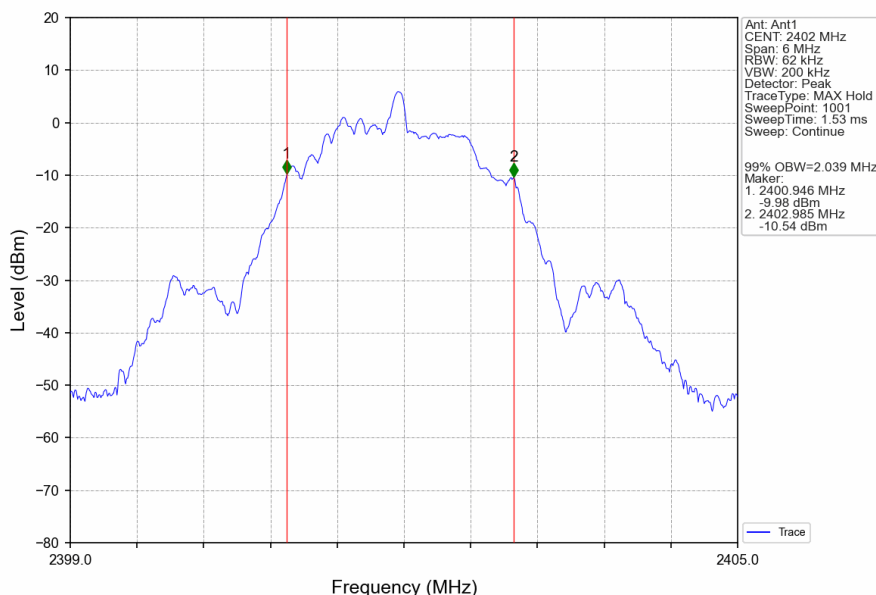

2M_MCH_2440MHz_Ant1_NTNV

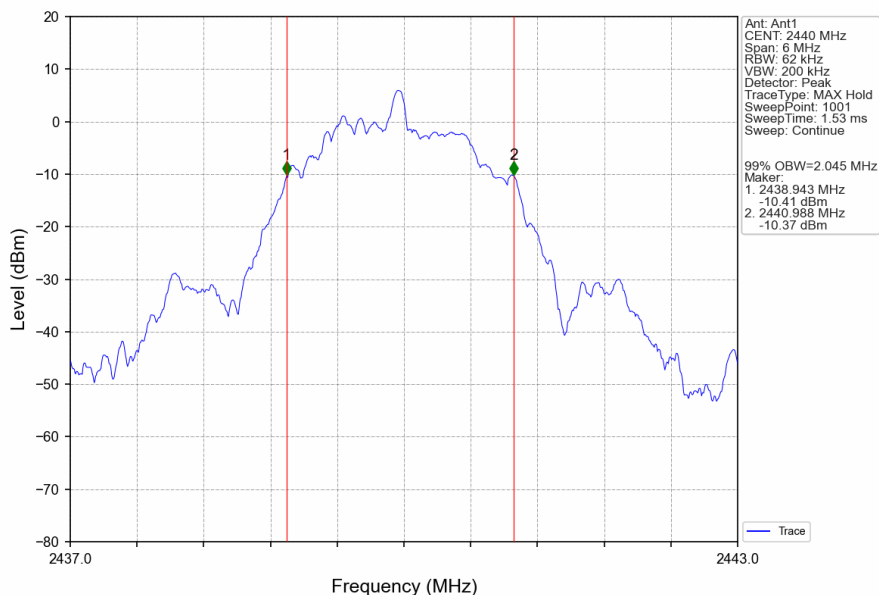

2M_HCH_2480MHz_Ant1_NTNV

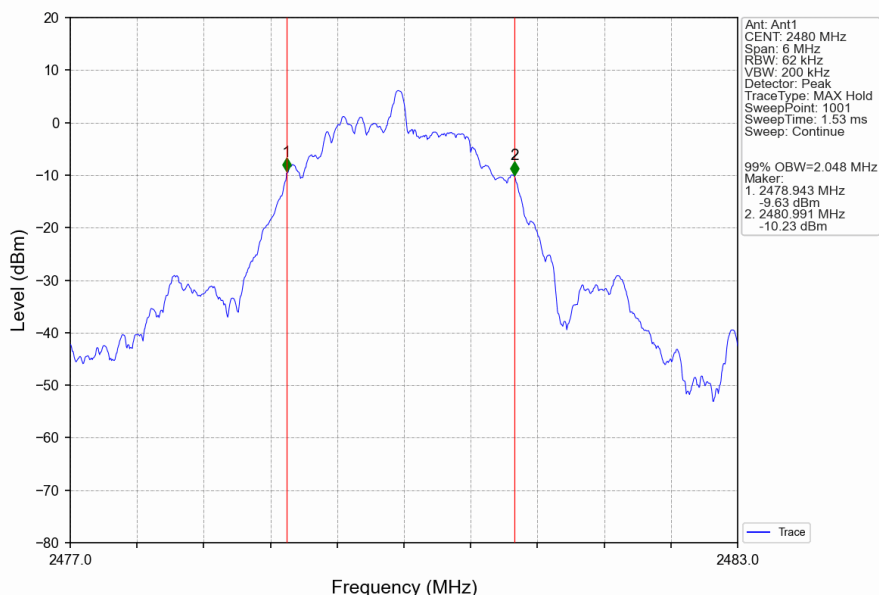


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch (SZEMC) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


2.2.2 6dB BW

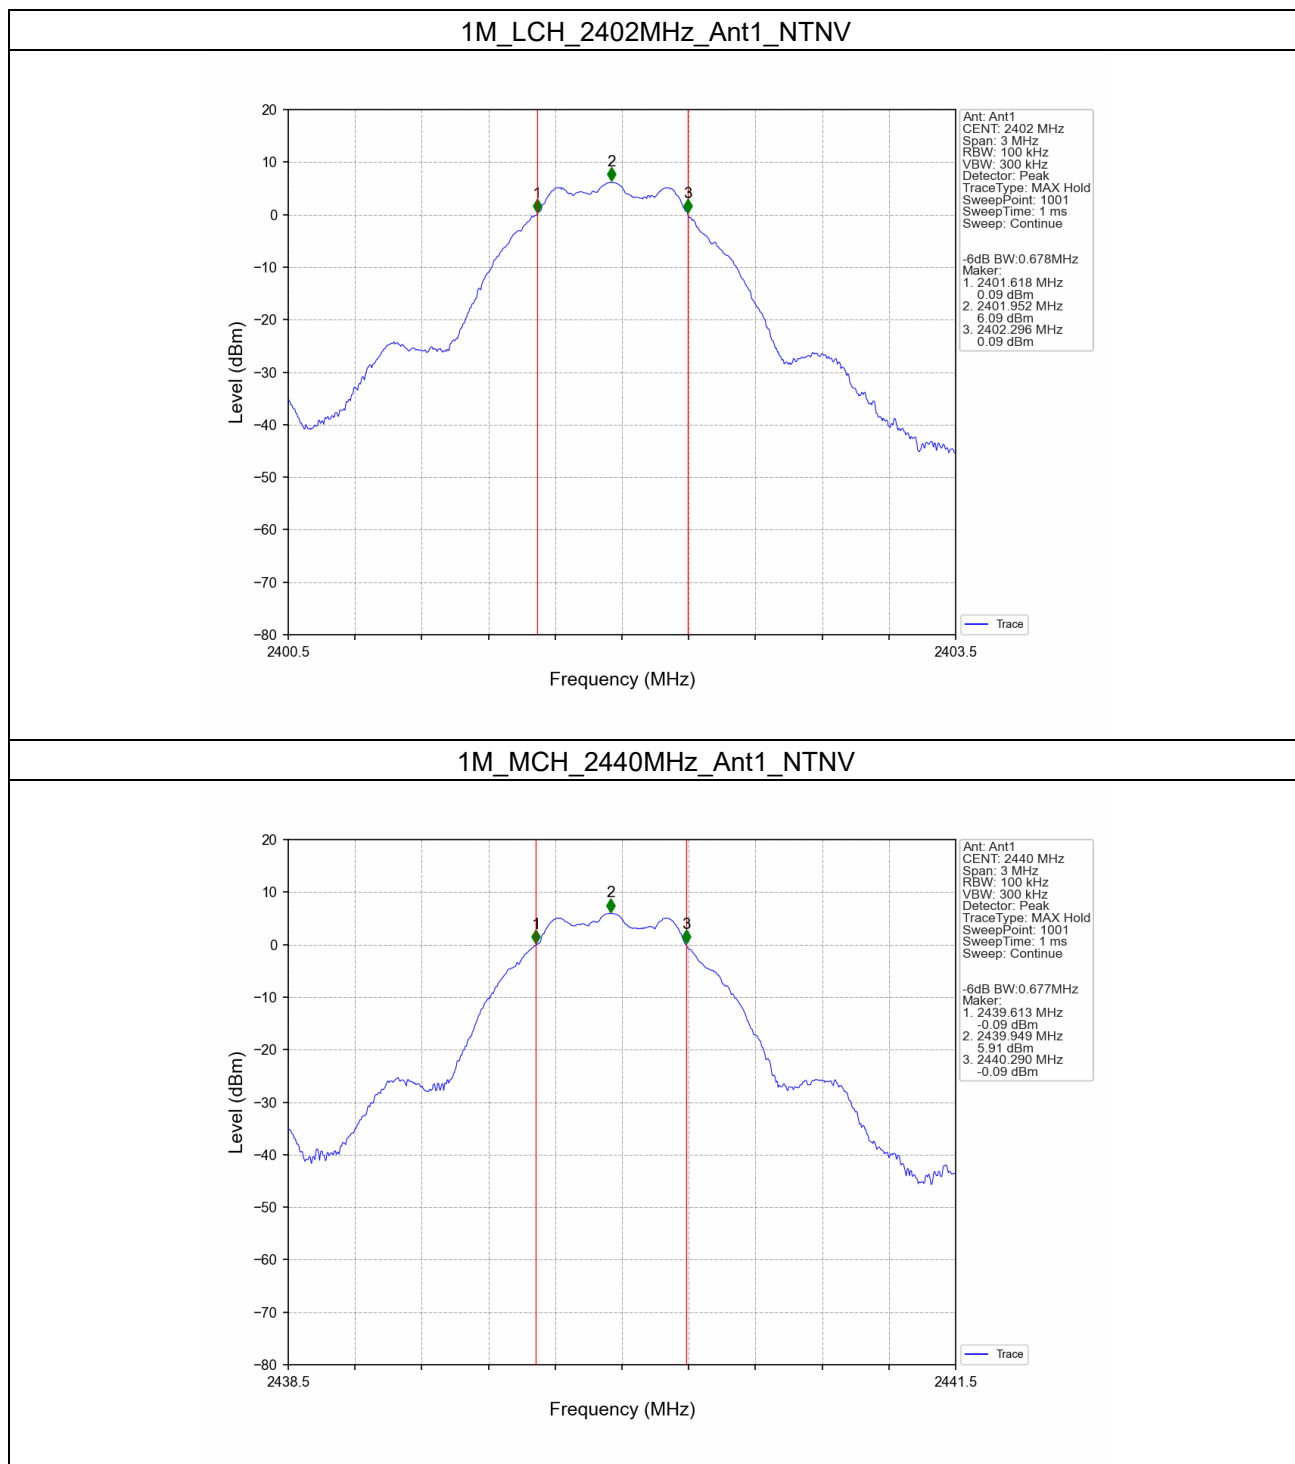


1M_HCH_2480MHz_Ant1_NTNV

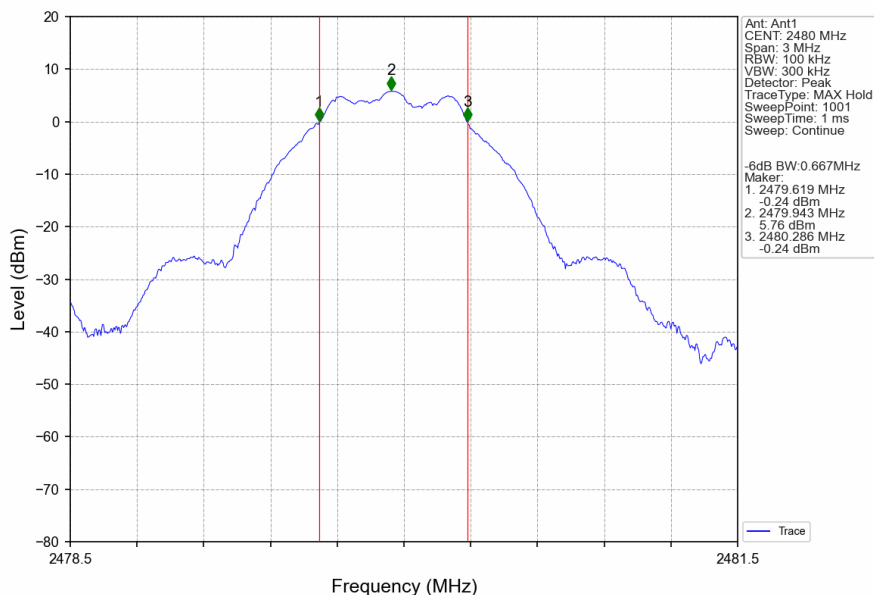


2M_LCH_2402MHz_Ant1_NTNV

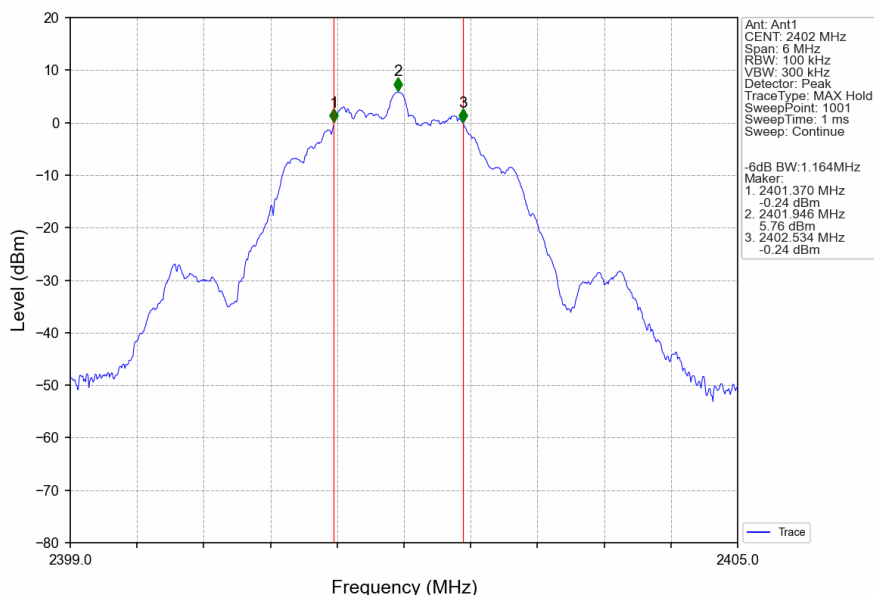

2M_MCH_2440MHz_Ant1_NTNV

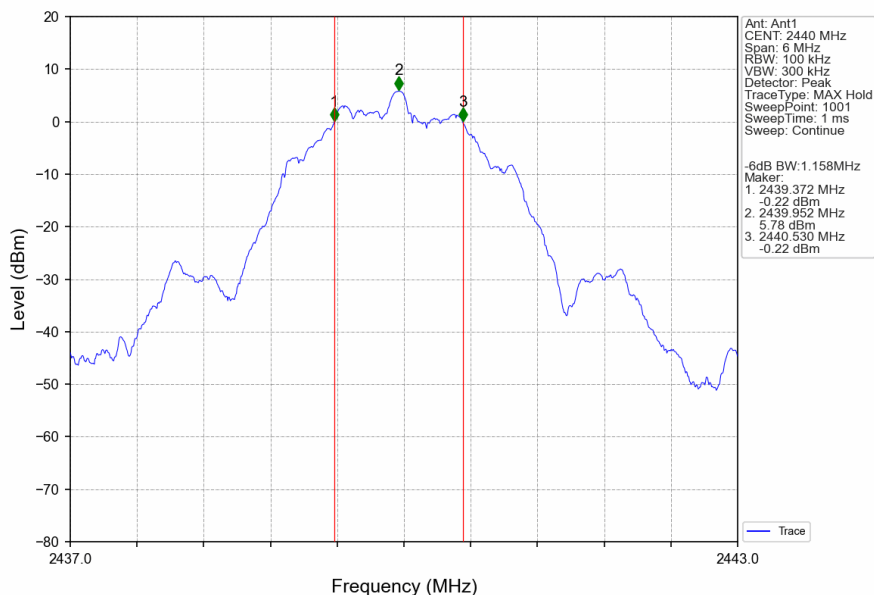

2M_HCH_2480MHz_Ant1_NTNV

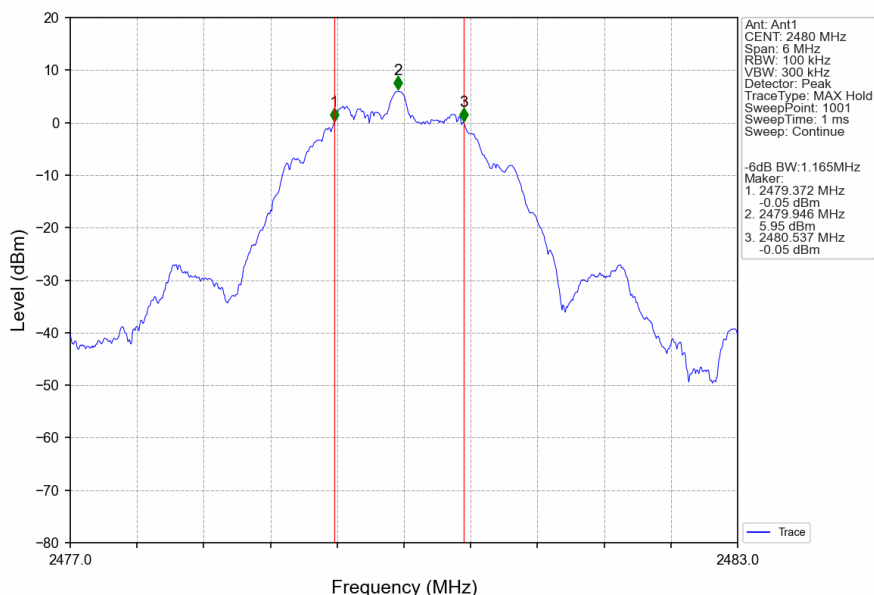

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	0.34	<=30	Pass
		2440	0.89	<=30	Pass
		2480	2.04	<=30	Pass
2M	SISO	2402	0.29	<=30	Pass
		2440	0.99	<=30	Pass
		2480	2.08	<=30	Pass

Note1: Antenna Gain: Ant1: 0.17dBi;

4. Maximum Power Spectral Density

4.1 Test Result


4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	0.17	<=8	Pass
		2440	0.75	<=8	Pass
		2480	1.90	<=8	Pass
2M	SISO	2402	0.10	<=8	Pass
		2440	0.81	<=8	Pass
		2480	1.90	<=8	Pass


Note1: Antenna Gain: Ant1: 0.17dBi;

4.2 Test Graph


4.2.1 PSD

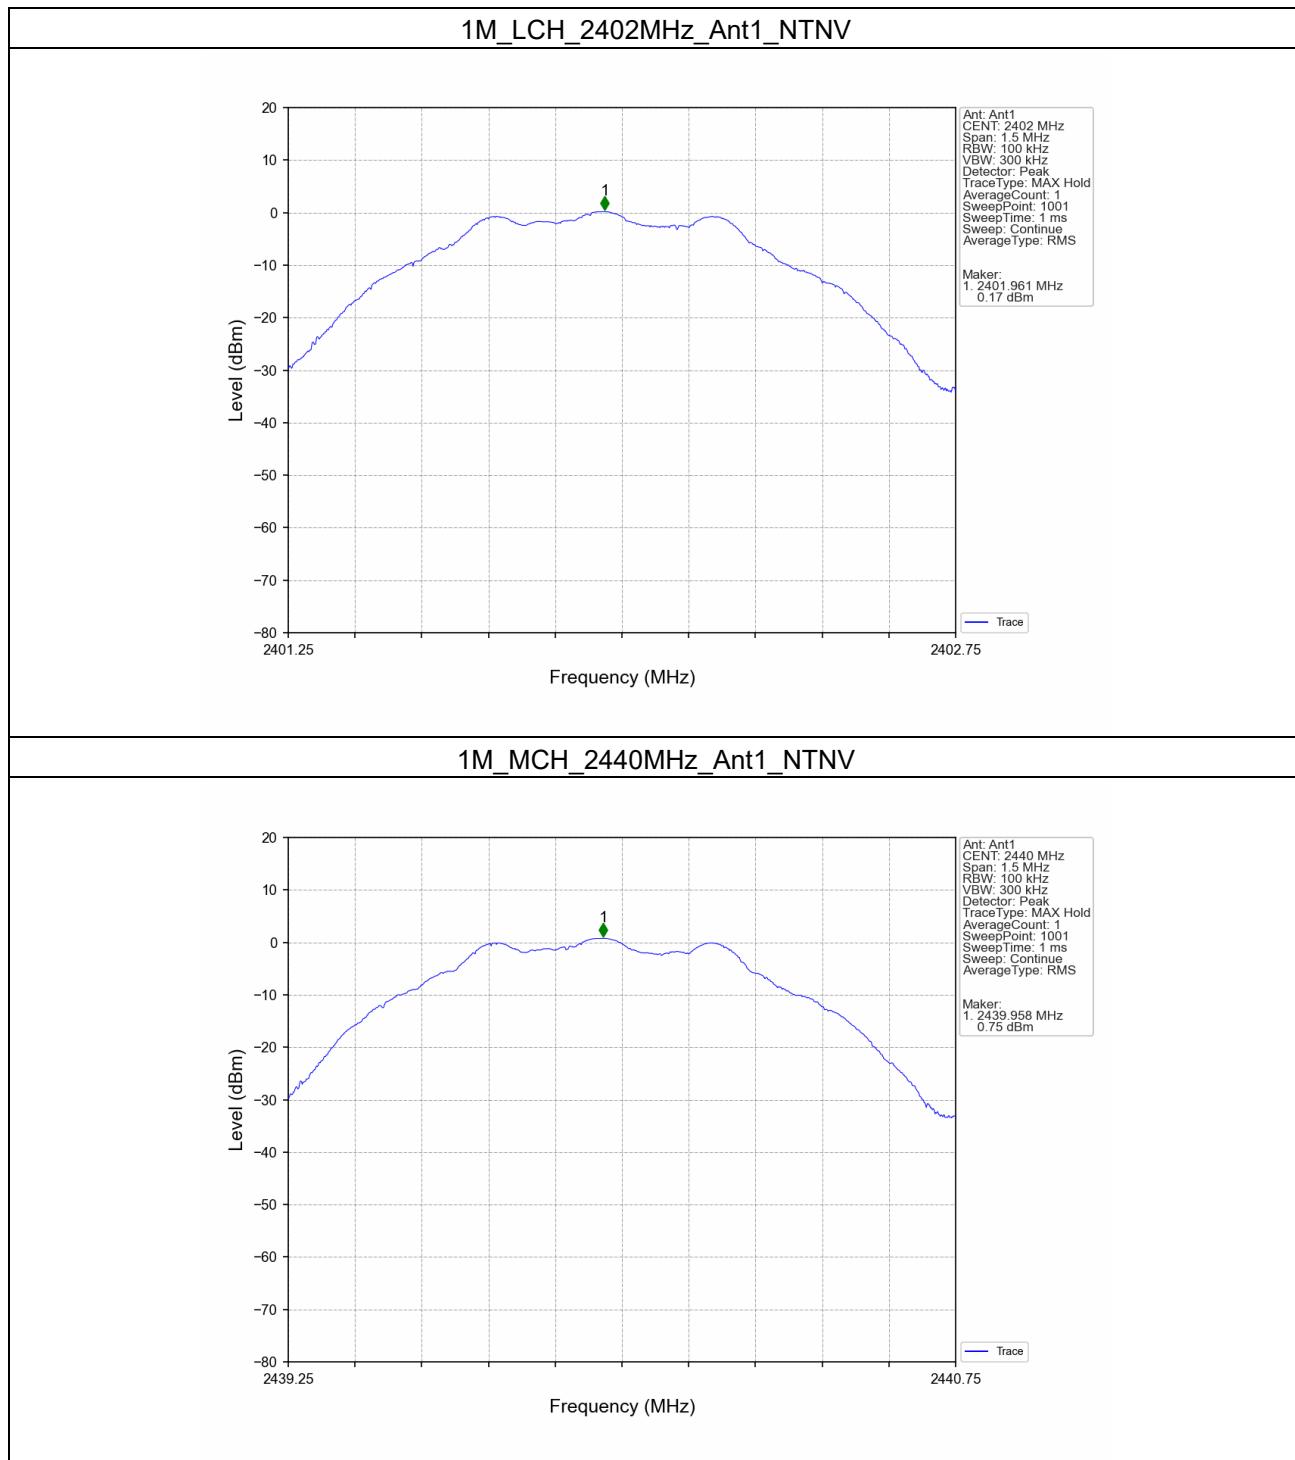


1M_HCH_2480MHz_Ant1_NTNV

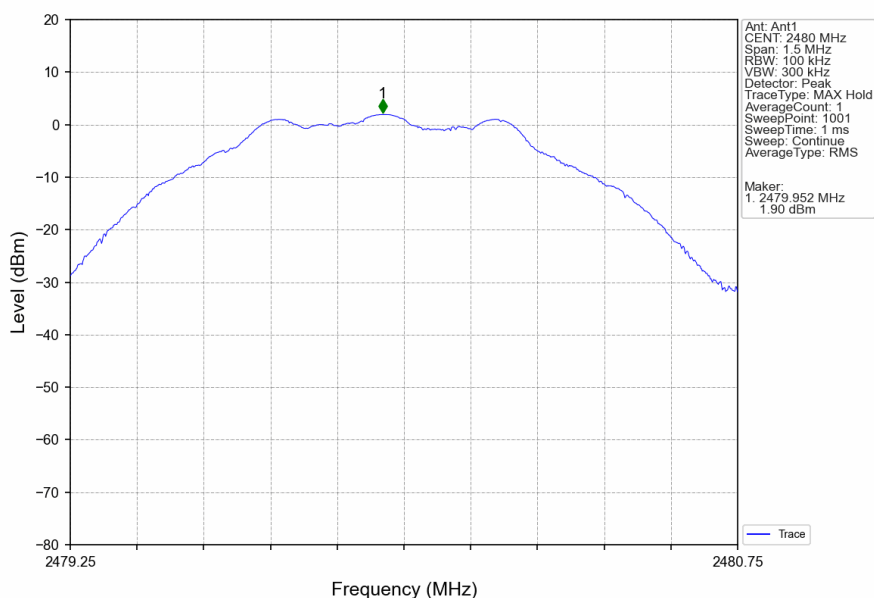


2M_LCH_2402MHz_Ant1_NTNV

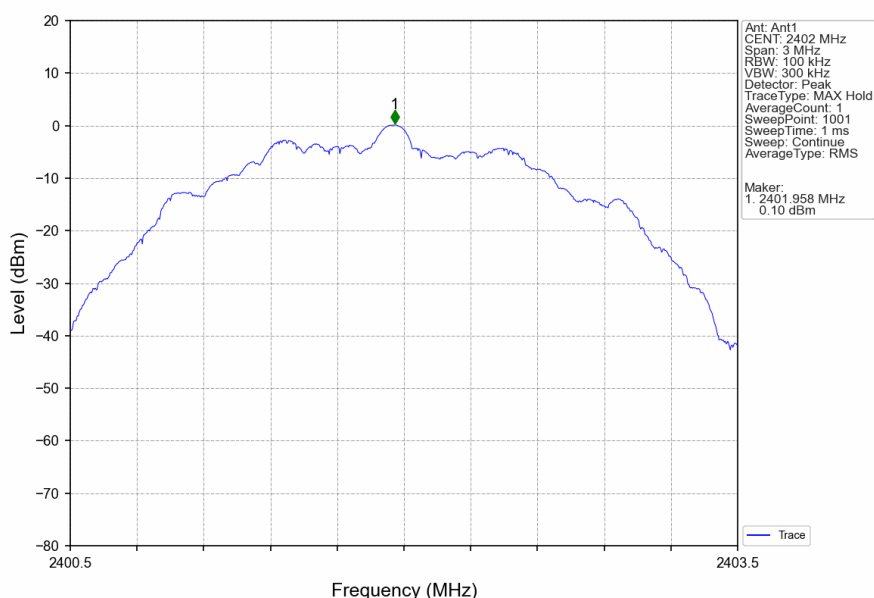

2M_MCH_2440MHz_Ant1_NTNV

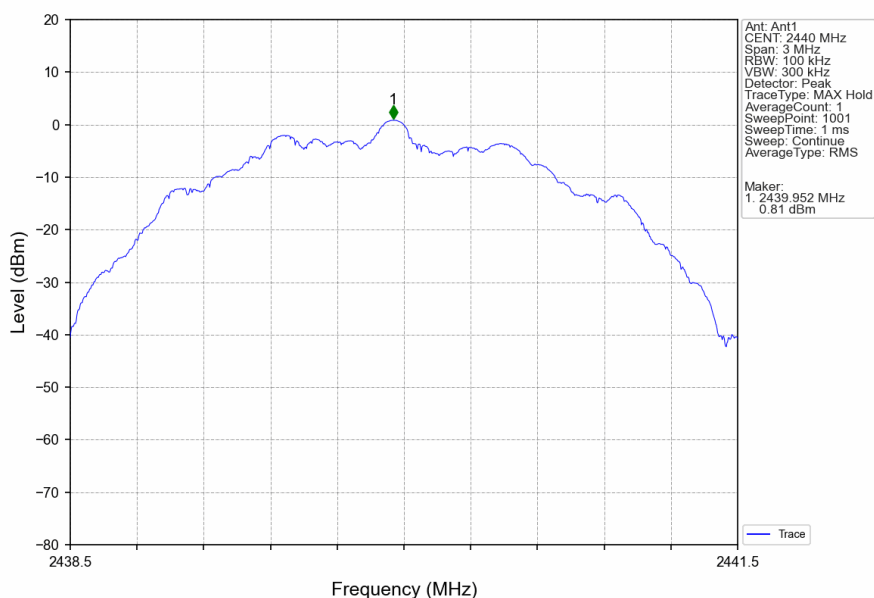

2M_HCH_2480MHz_Ant1_NTNV

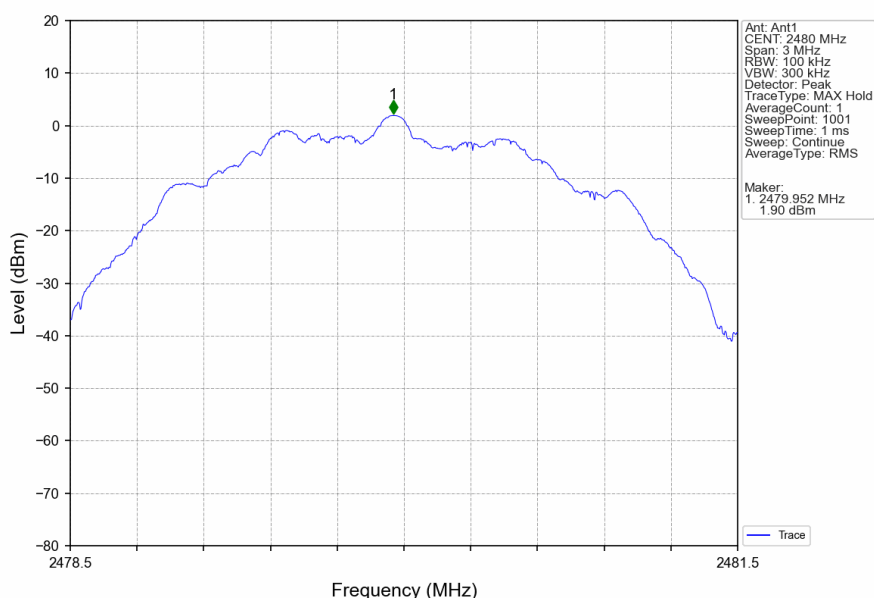

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	0.14
		2440	1	0.76
		2480	1	1.88
2M	SISO	2402	1	0.10
		2440	1	0.80
		2480	1	1.89

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	1.88	-18.12	Pass
		2440	1	1.88	-18.12	Pass
		2480	1	1.88	-18.12	Pass
2M	SISO	2402	1	1.89	-18.11	Pass
		2440	1	1.89	-18.11	Pass
		2480	1	1.89	-18.11	Pass

5.2 Test Graph


5.2.1 Ref

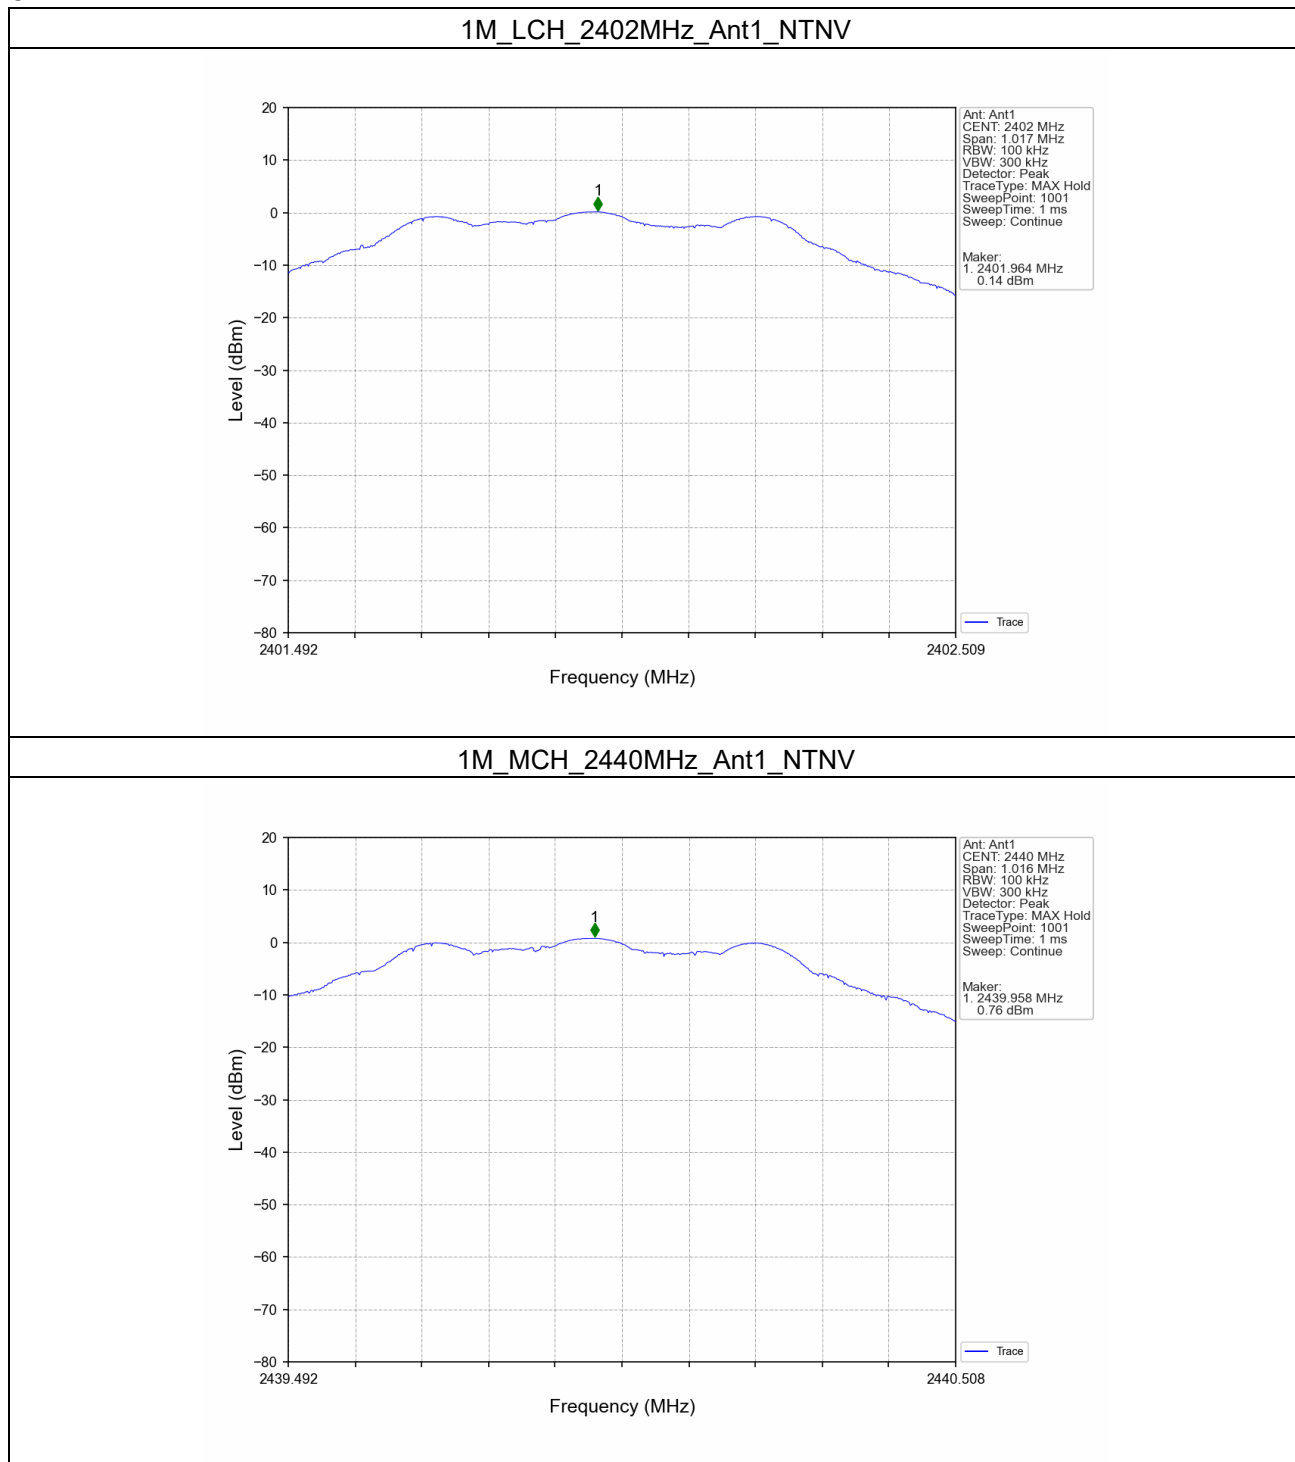


1M_HCH_2480MHz_Ant1_NTNV

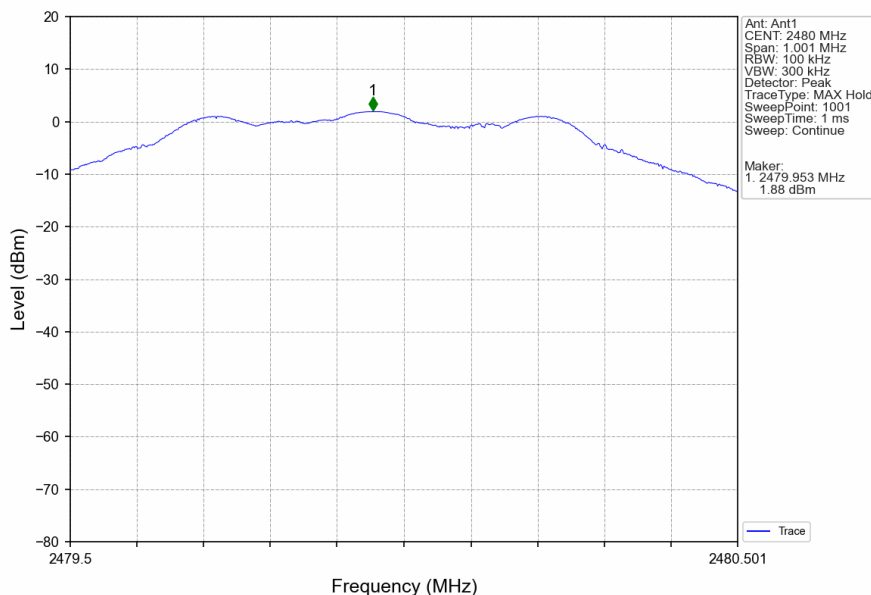


2M_LCH_2402MHz_Ant1_NTNV

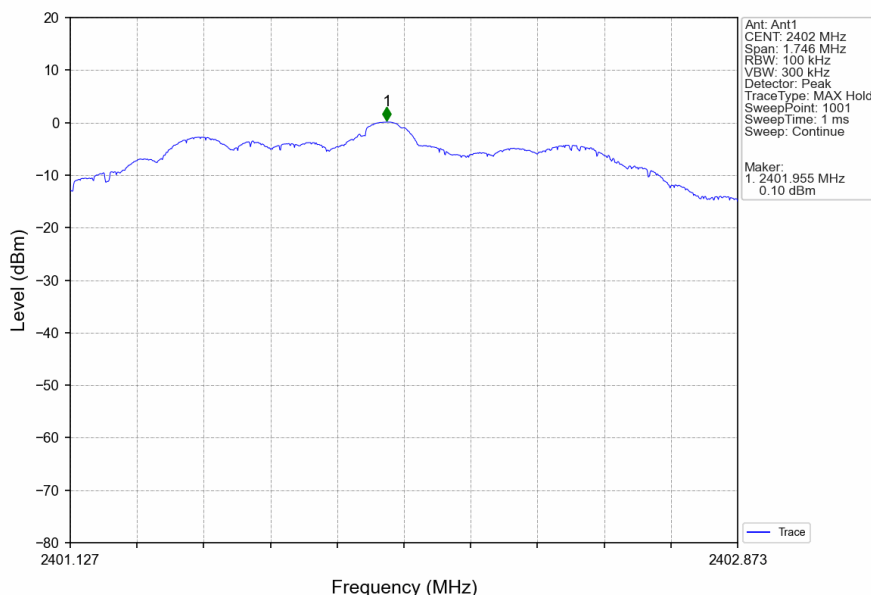


2M_MCH_2440MHz_Ant1_NTNV

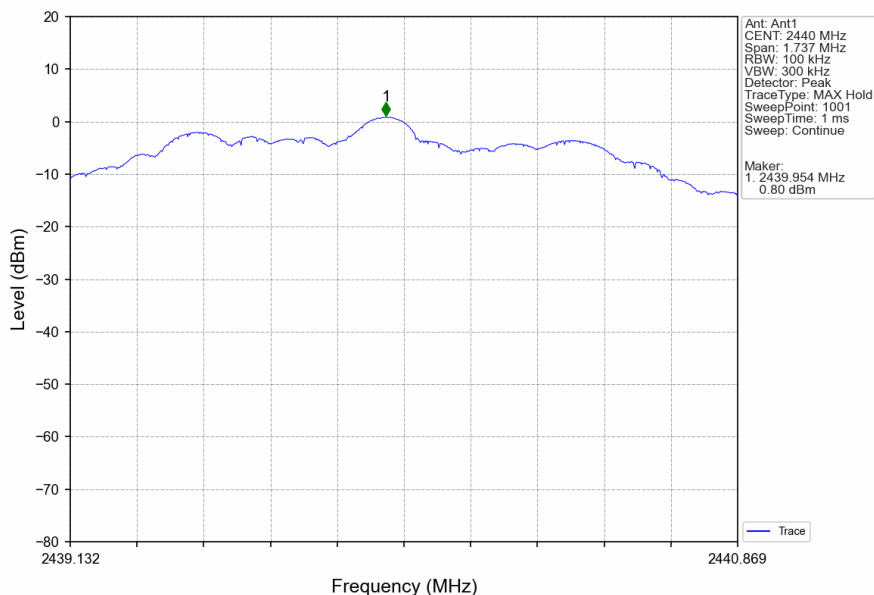

2M_HCH_2480MHz_Ant1_NTNV

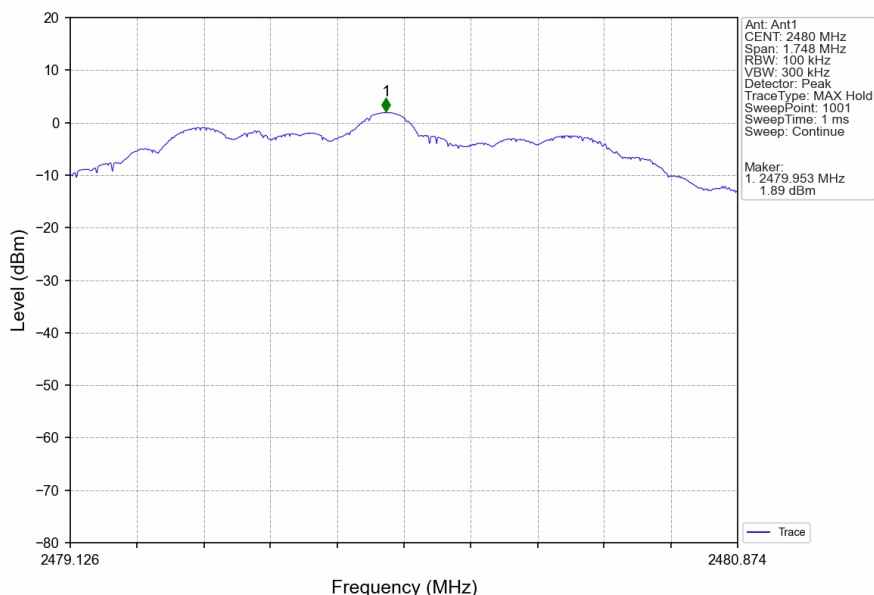


5.2.2 CSE

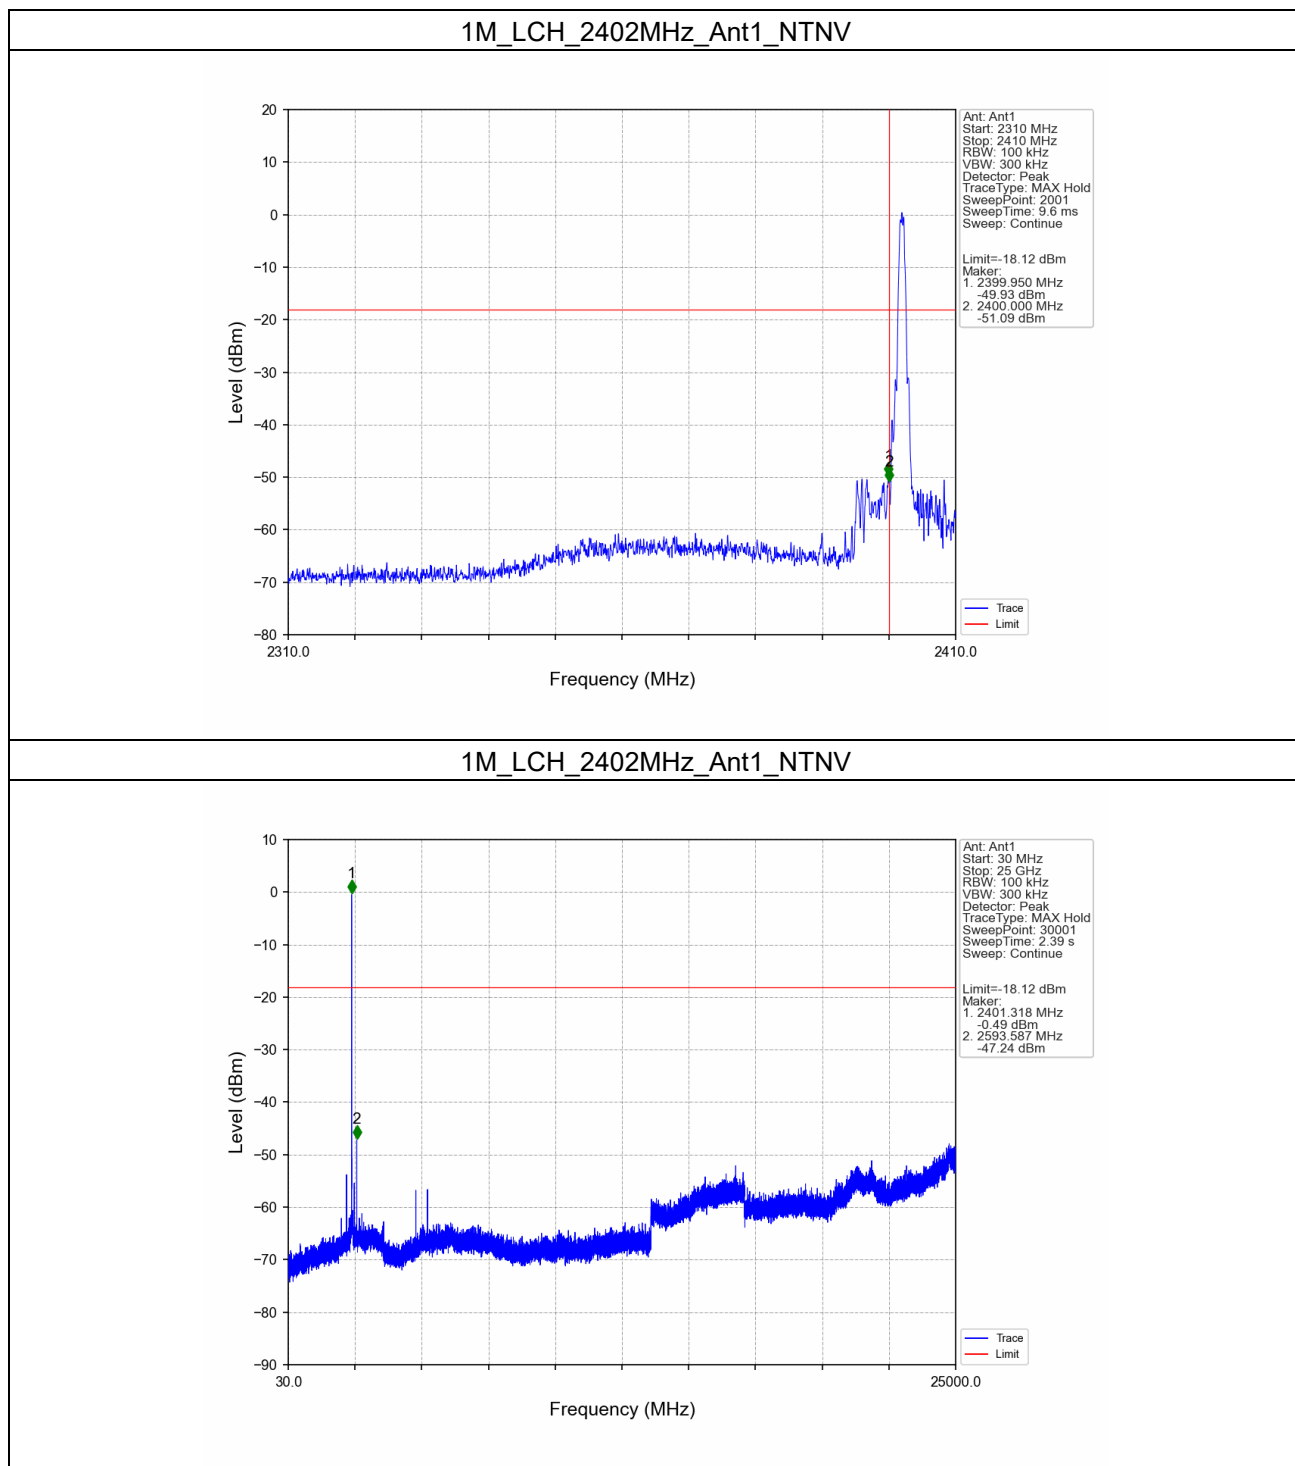


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


1M_MCH_2440MHz_Ant1_NTNV

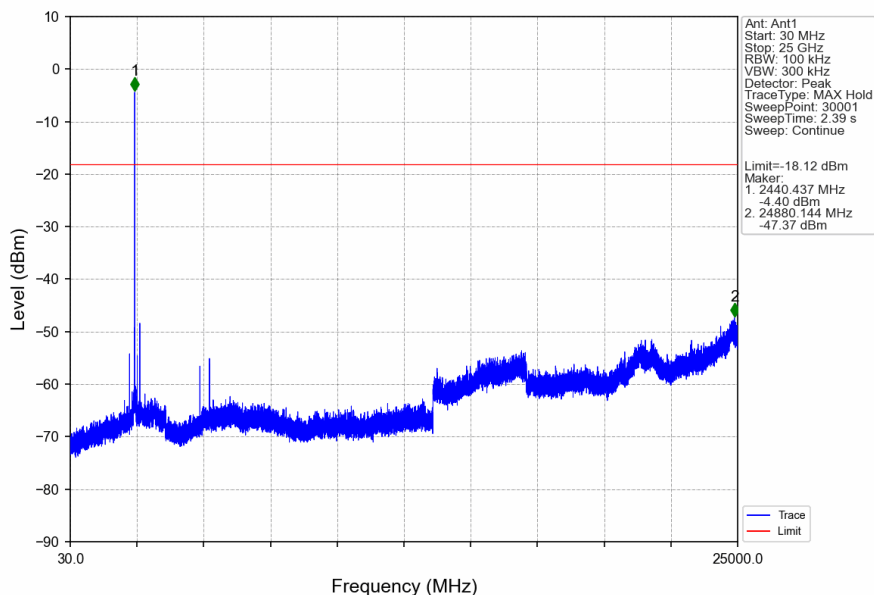


1M_HCH_2480MHz_Ant1_NTNV

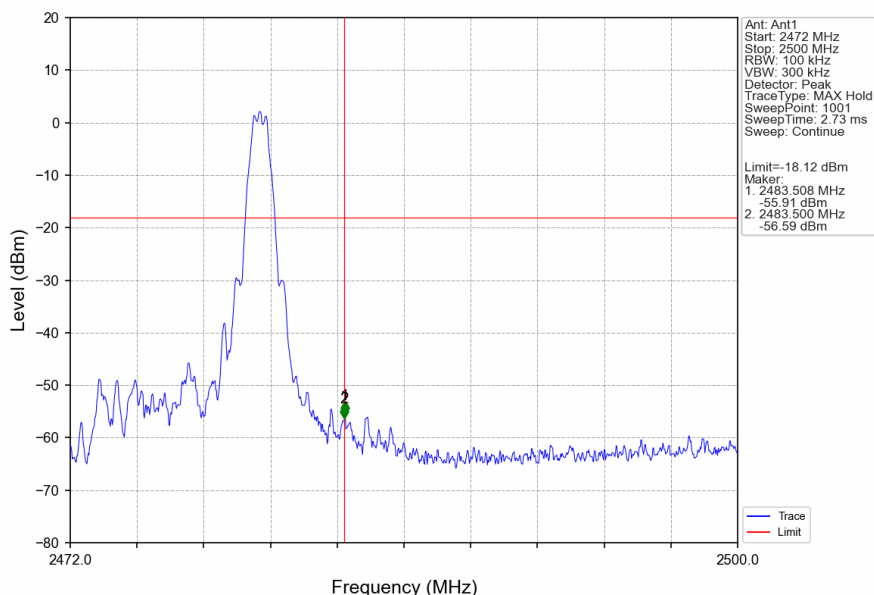


1M_HCH_2480MHz_Ant1_NTNV

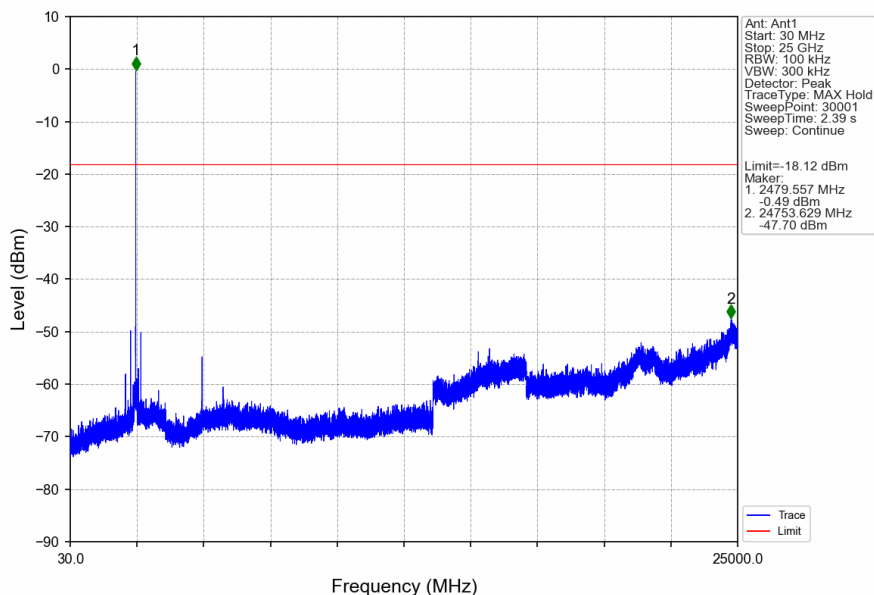


2M_LCH_2402MHz_Ant1_NTNV

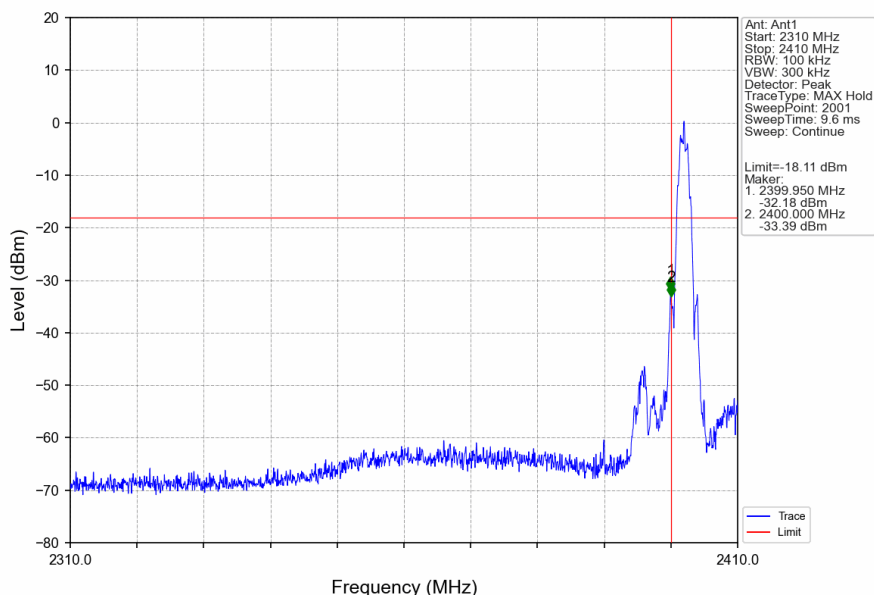


2M_LCH_2402MHz_Ant1_NTNV

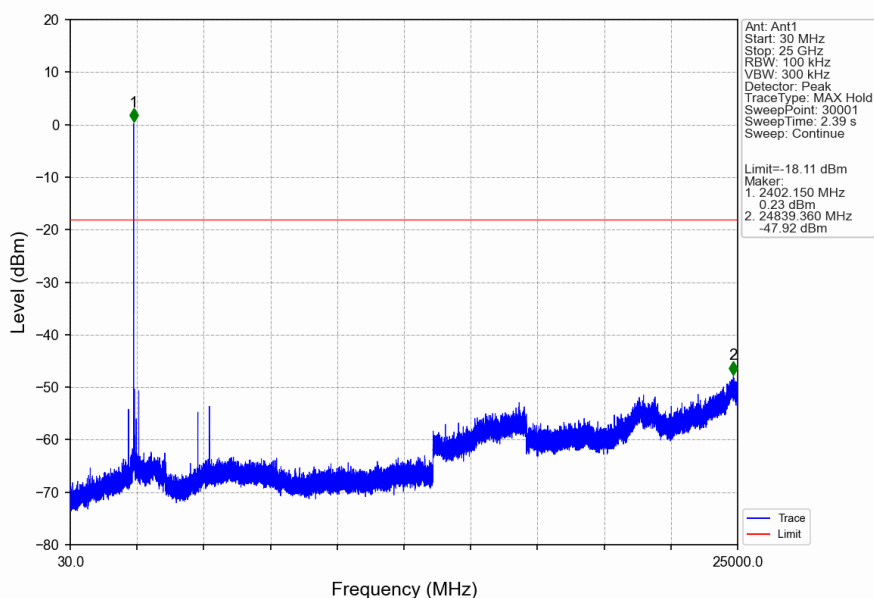


2M_MCH_2440MHz_Ant1_NTNV

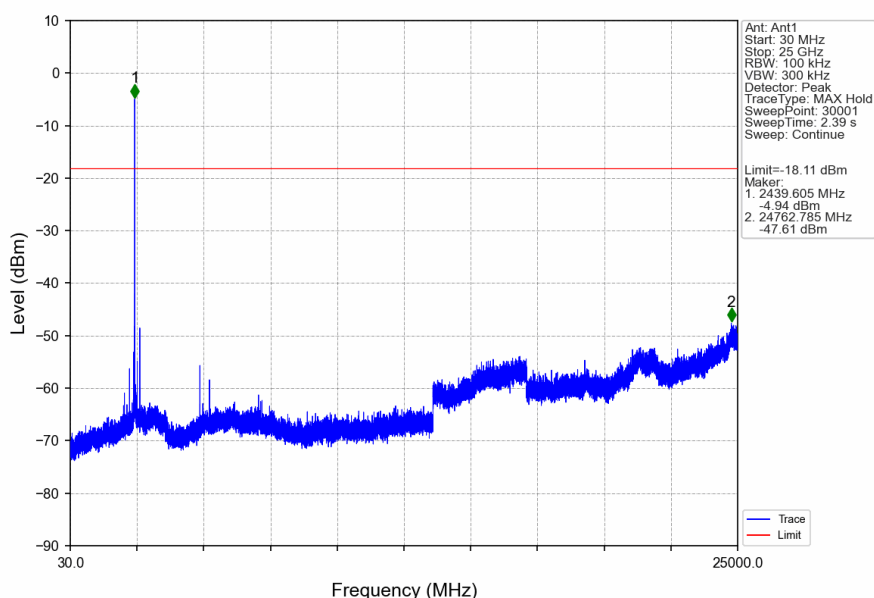

2M_HCH_2480MHz_Ant1_NTNV

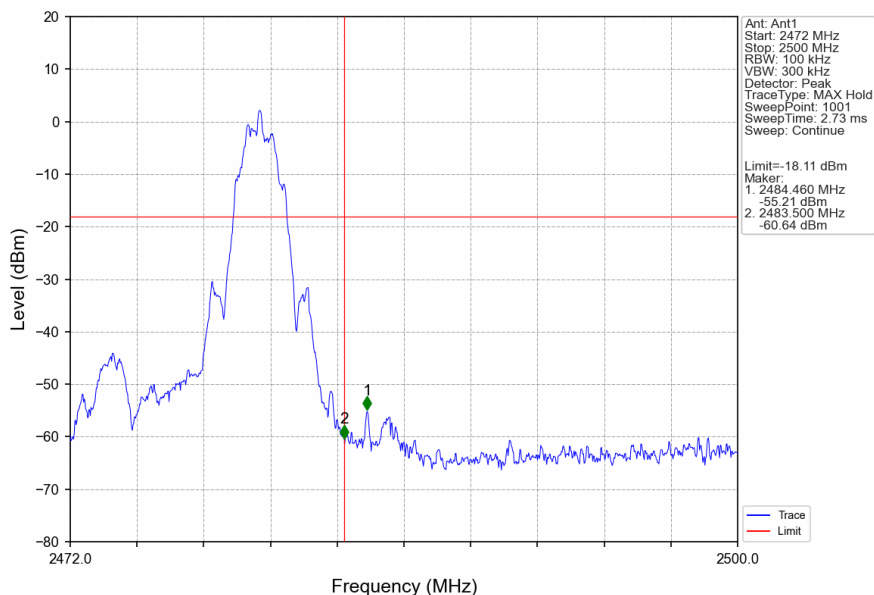

2M_HCH_2480MHz_Ant1_NTNV

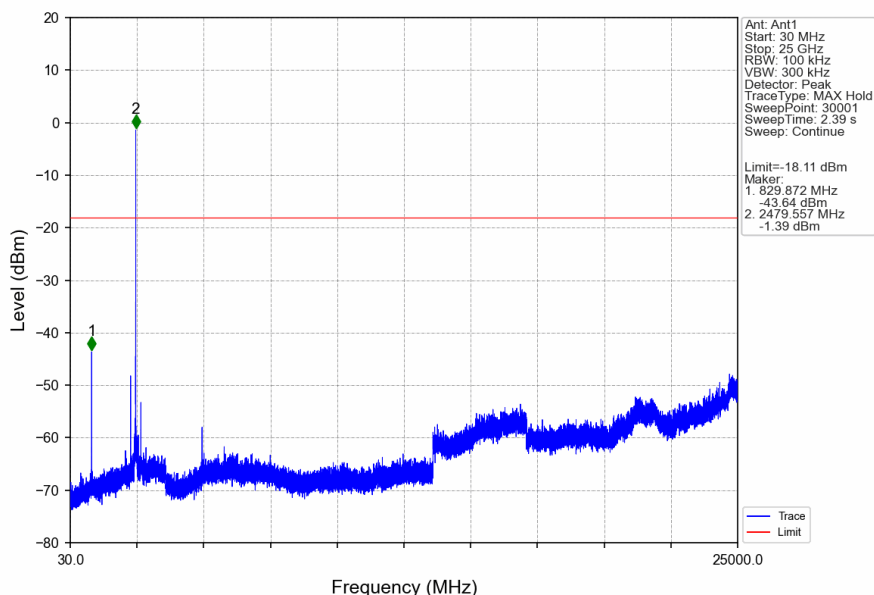

- End of the Report -

