


|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5270 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

130 dBuV/m

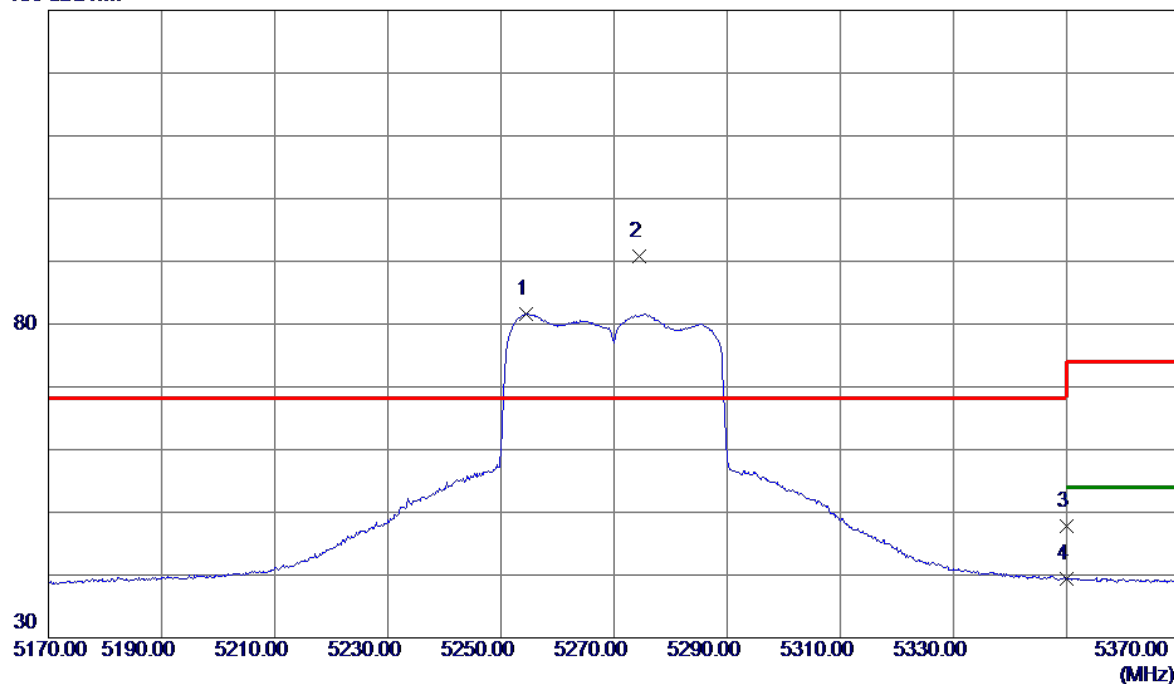


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5254.5000    | 69.88                      | 11.76                   | 81.64                     | 999.00          | -917.36      | AVG      | No Limit |
| 2 * | 5274.4000    | 78.93                      | 11.80                   | 90.73                     | 68.20           | 22.53        | Peak     | No Limit |
| 3   | 5350.0000    | 35.90                      | 11.96                   | 47.86                     | 74.00           | -26.14       | Peak     |          |
| 4   | 5350.0000    | 27.36                      | 11.96                   | 39.32                     | 54.00           | -14.68       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5310 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

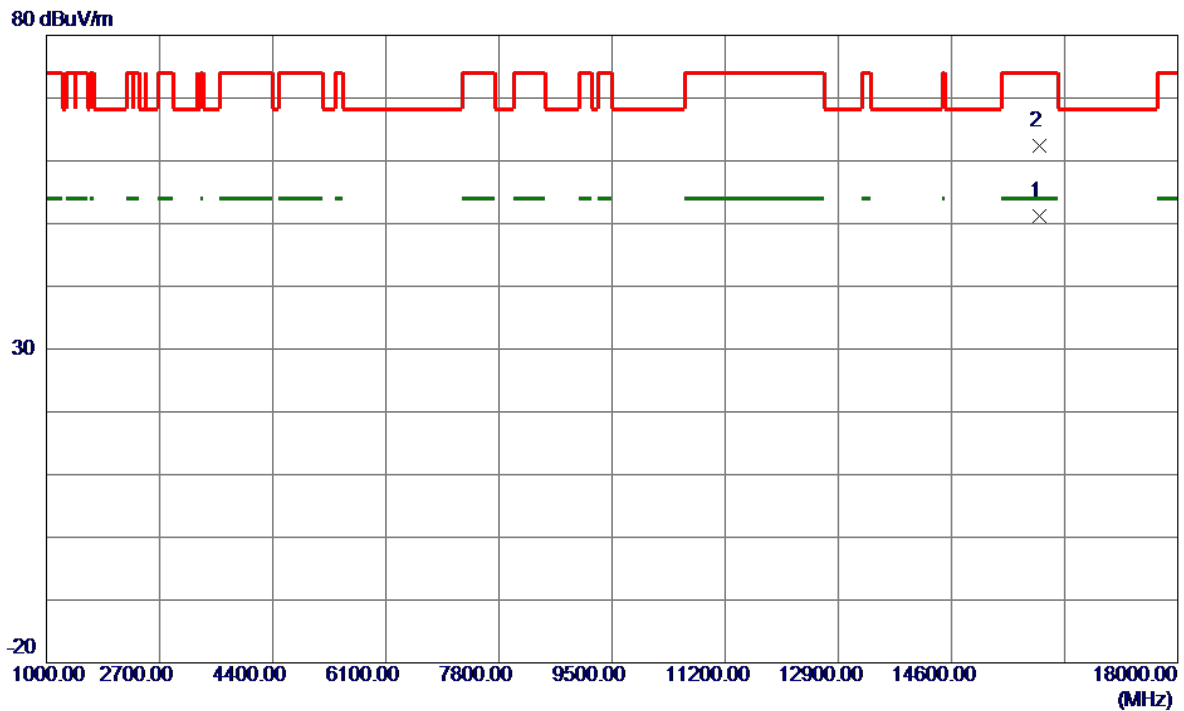


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 15920.7000   | 43.38                      | 7.85                    | 51.23                     | 54.00           | -2.77        | AVG      |         |
| 2   | 15923.7750   | 54.58                      | 7.85                    | 62.43                     | 74.00           | -11.57       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode 5310 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

130 dBuV/m

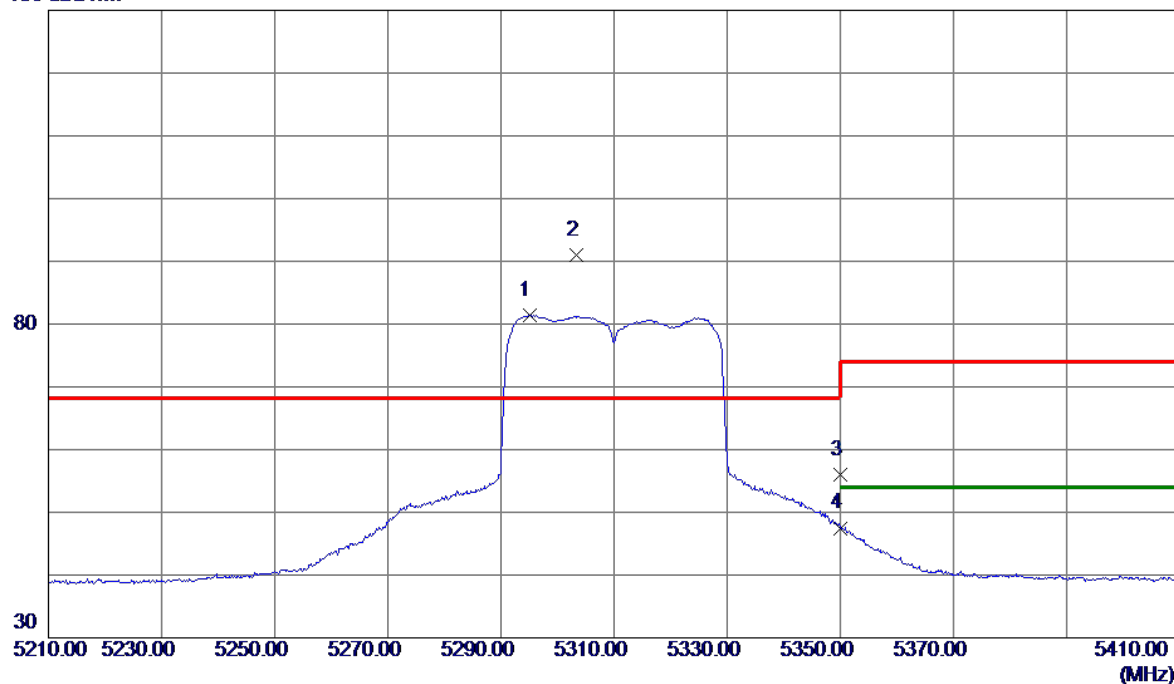


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5295.0000    | 69.60                      | 11.84                   | 81.44                     | 999.00          | -917.56      | AVG      | No Limit |
| 2 * | 5303.3000    | 79.07                      | 11.86                   | 90.93                     | 68.20           | 22.73        | Peak     | No Limit |
| 3   | 5350.0000    | 43.99                      | 11.96                   | 55.95                     | 74.00           | -18.05       | Peak     |          |
| 4   | 5350.0000    | 35.54                      | 11.96                   | 47.50                     | 54.00           | -6.50        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2A_TX AX(HE80) Mode 5290 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

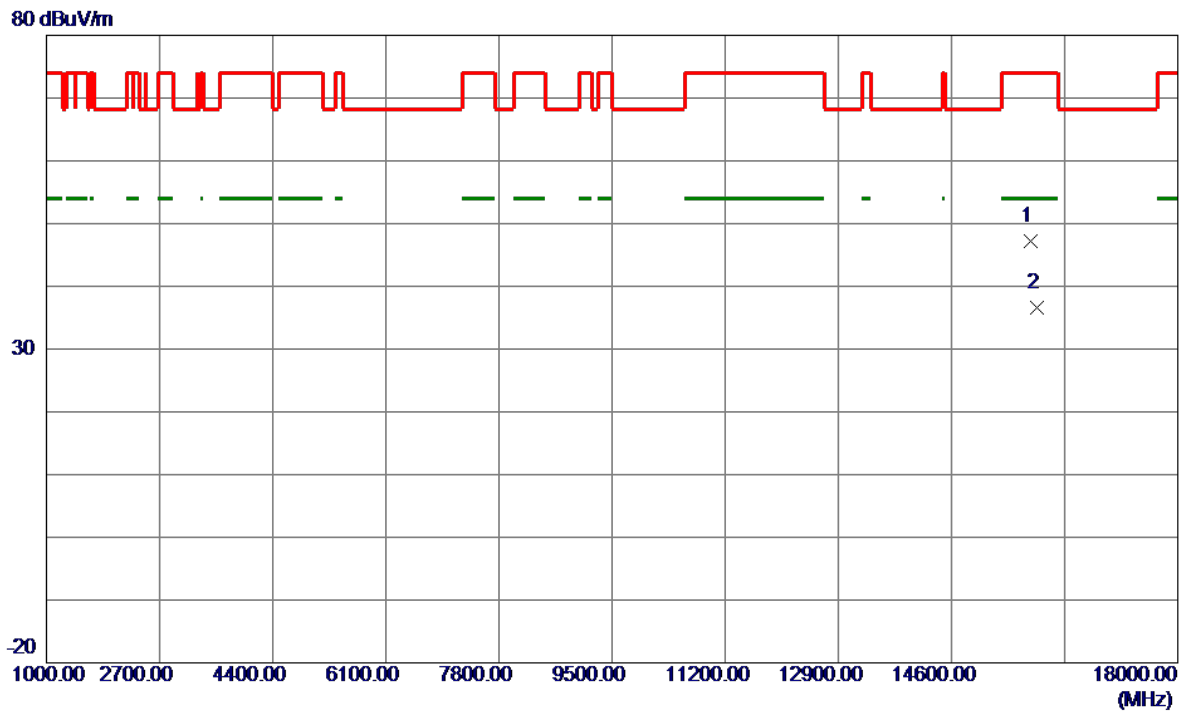


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 15789.3000   | 39.37                      | 7.74                    | 47.11                     | 74.00           | -26.89       | Peak     |         |
| 2 * | 15889.3000   | 28.70                      | 7.82                    | 36.52                     | 54.00           | -17.48       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2A_TX AX(HE80) Mode 5290 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

130 dBuV/m

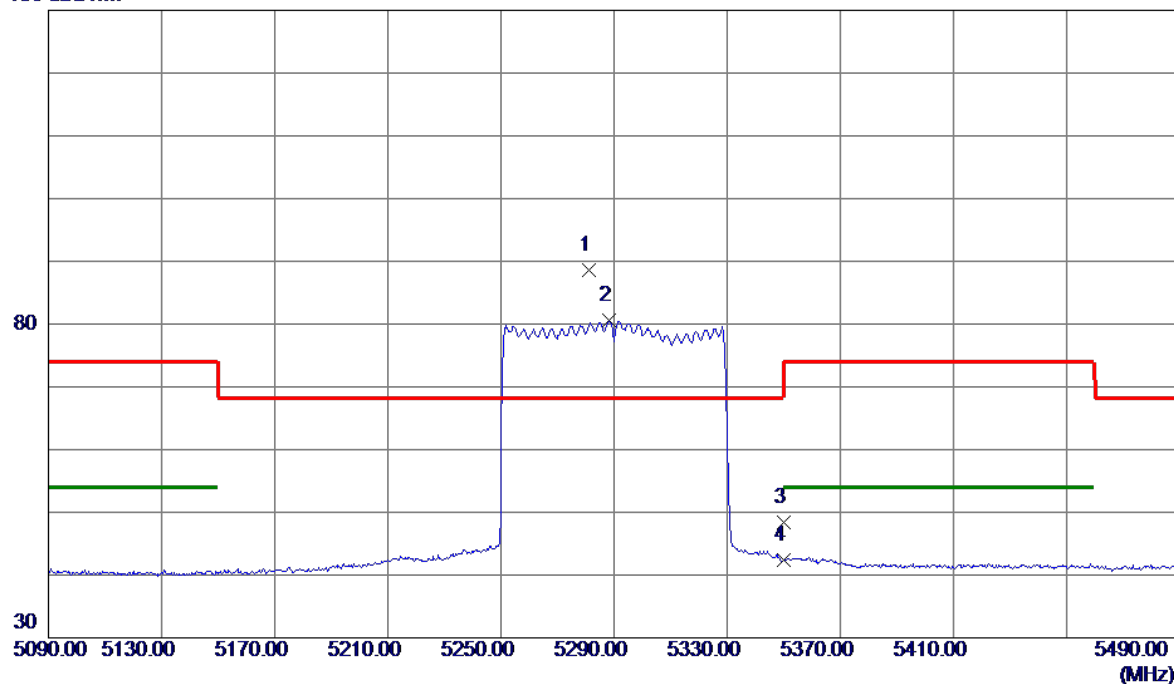


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5281.0000    | 76.76                      | 11.81                   | 88.57                     | 68.20           | 20.37        | Peak     | No Limit |
| 2   | 5288.2000    | 68.80                      | 11.83                   | 80.63                     | 999.00          | -918.37      | AVG      | No Limit |
| 3   | 5350.0000    | 36.42                      | 11.96                   | 48.38                     | 74.00           | -25.62       | Peak     |          |
| 4   | 5350.0000    | 30.40                      | 11.96                   | 42.36                     | 54.00           | -11.64       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

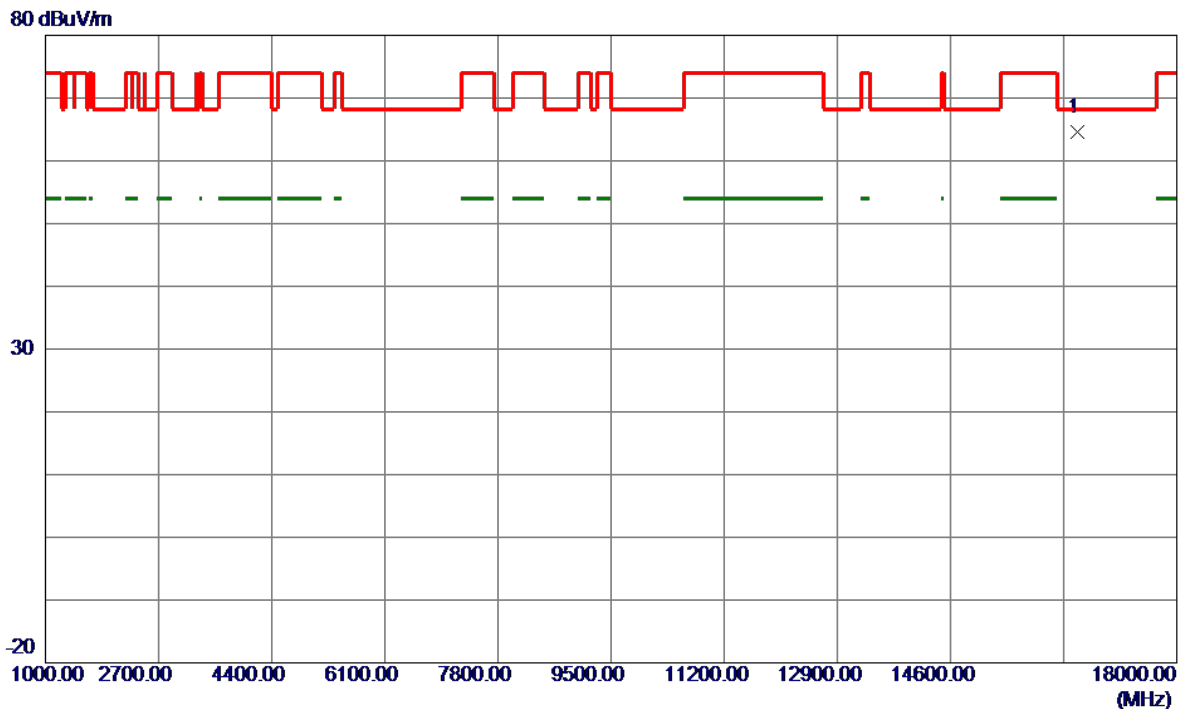


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16502.8500 | 56.20         | 8.46           | 64.66       | 68.20  | -3.54  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

130 dBuV/m

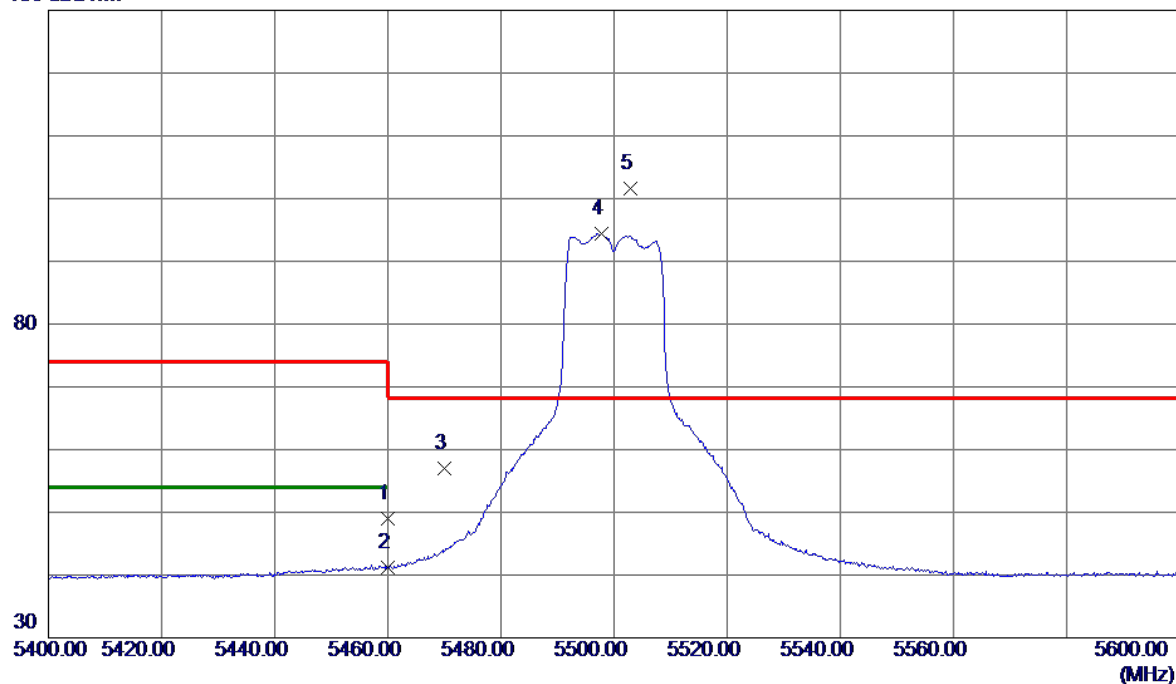


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 36.86                      | 12.19                   | 49.05                     | 74.00           | -24.95       | Peak     |          |
| 2   | 5460.0000    | 29.01                      | 12.19                   | 41.20                     | 54.00           | -12.80       | AVG      |          |
| 3   | 5470.0000    | 44.77                      | 12.21                   | 56.98                     | 68.20           | -11.22       | Peak     |          |
| 4   | 5497.7000    | 82.13                      | 12.27                   | 94.40                     | 999.00          | -904.60      | AVG      | No Limit |
| 5 * | 5502.8000    | 89.38                      | 12.28                   | 101.66                    | 68.20           | 33.46        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

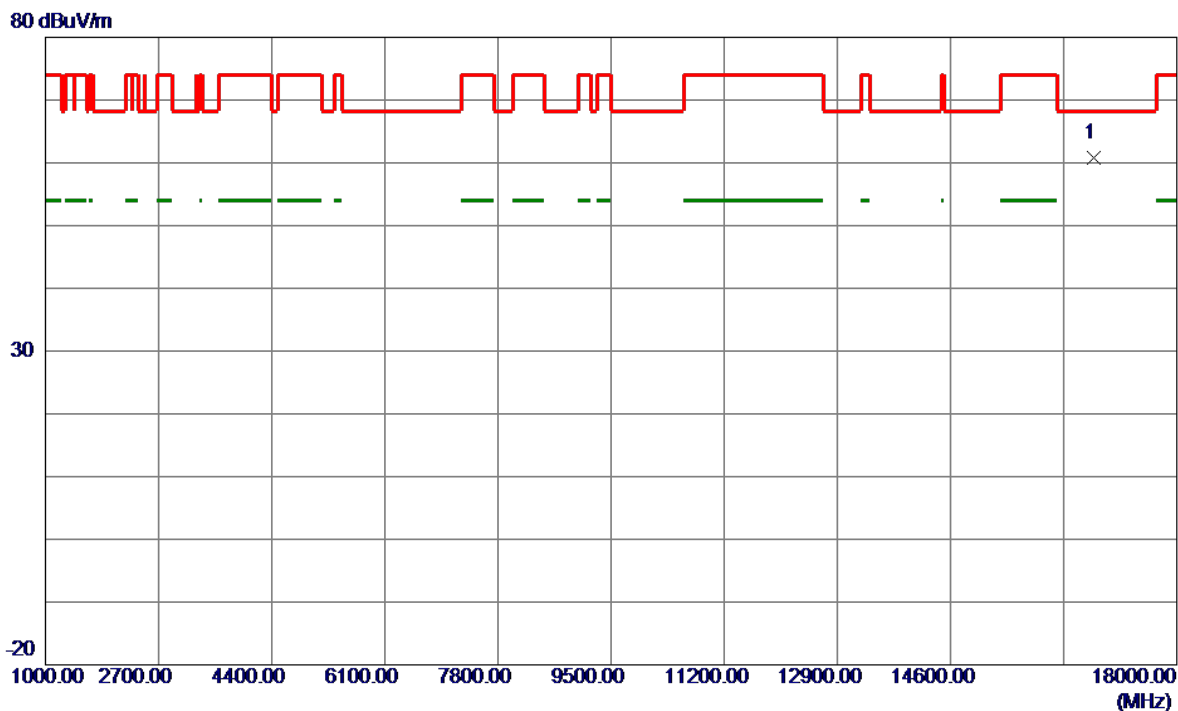


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16750.9500 | 51.89         | 8.93           | 60.82       | 68.20  | -7.38  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |          |
|-----------|----------------------------|--------------|----------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------|--------------|----------|

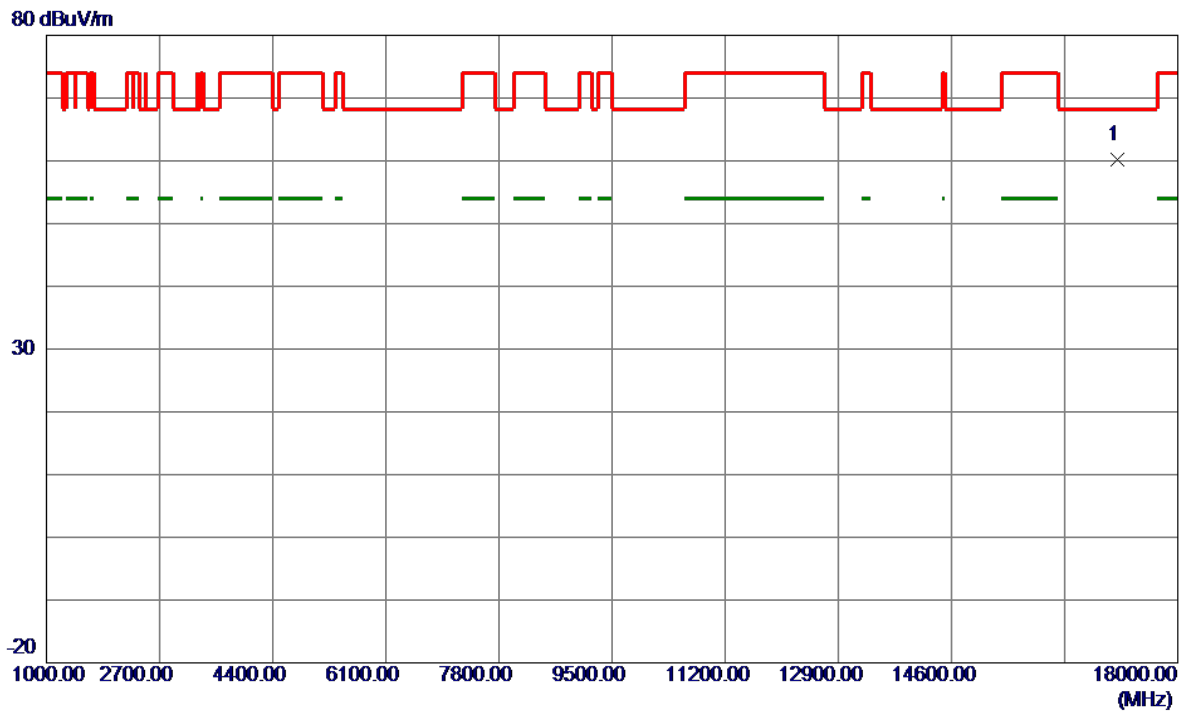


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17097.9000 | 50.59         | 9.61           | 60.20       | 68.20  | -8.00  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                            |              |            |
|-----------|----------------------------|--------------|------------|
| Test Mode | UNII-2C_TX A Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------|--------------|------------|

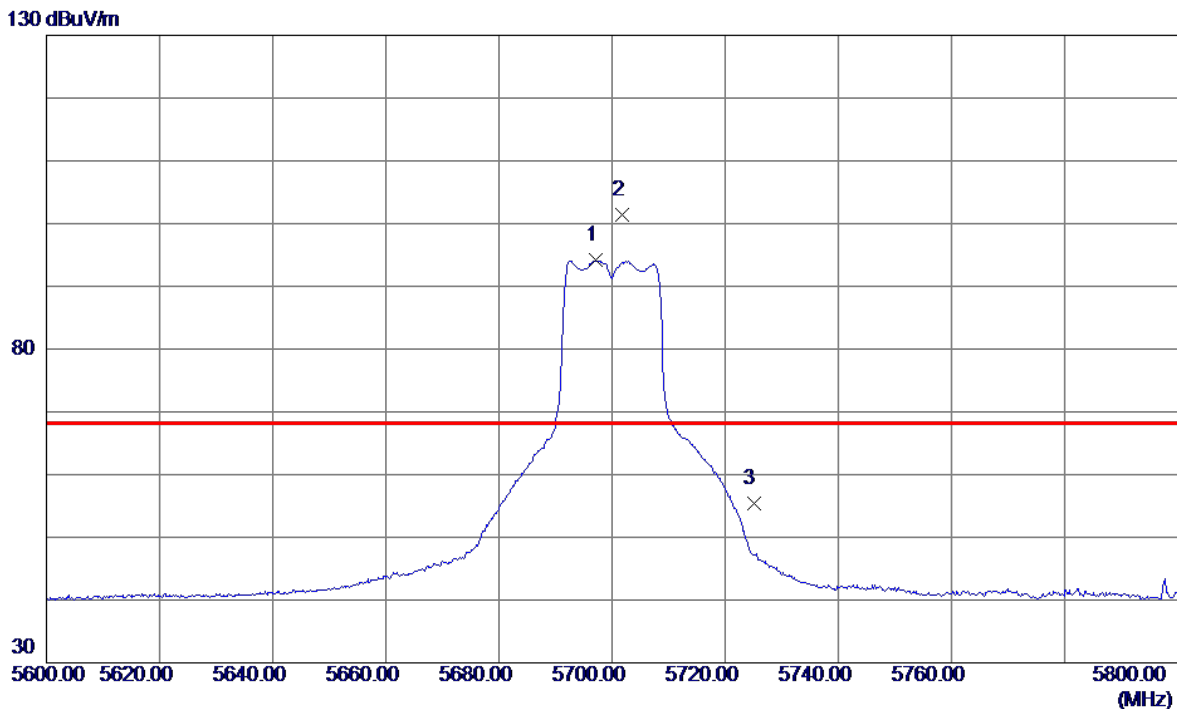


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5697.2000    | 81.25                      | 12.91                   | 94.16                     | 999.00          | -904.84      | AVG      | No Limit |
| 2 * | 5701.8000    | 88.50                      | 12.92                   | 101.42                    | 68.20           | 33.22        | Peak     | No Limit |
| 3   | 5725.0000    | 42.33                      | 13.00                   | 55.33                     | 68.20           | -12.87       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5500 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

80 dBuV/m

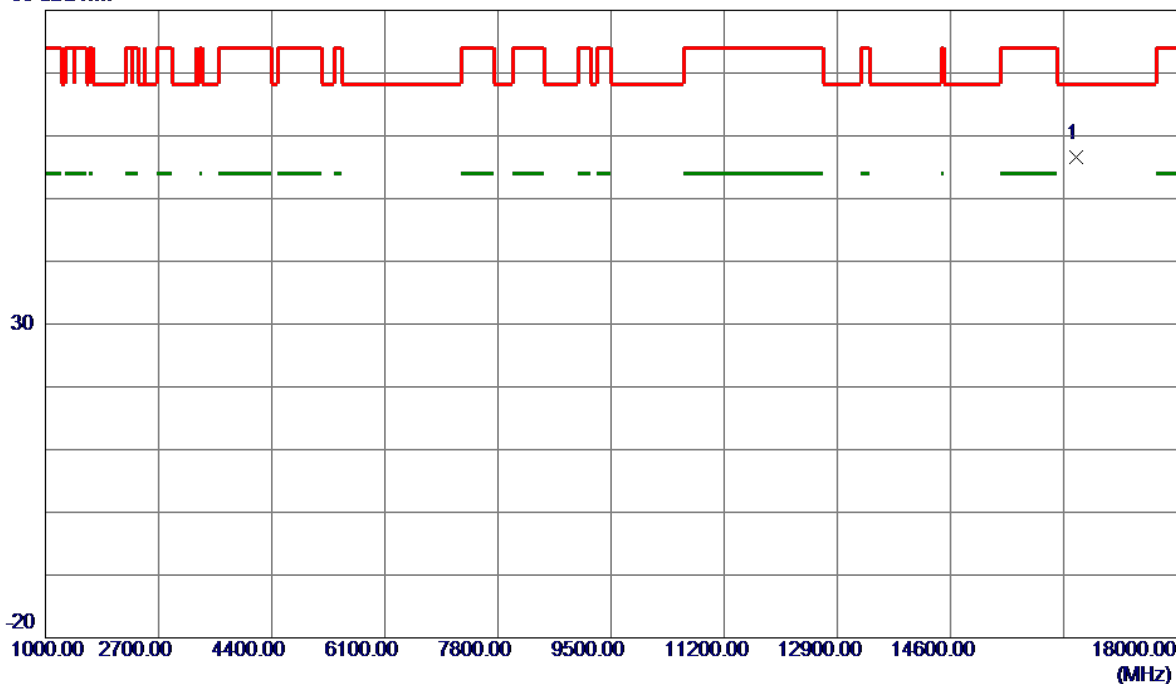


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16492.1000 | 48.05         | 8.45           | 56.50       | 68.20  | -11.70 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

130 dBuV/m

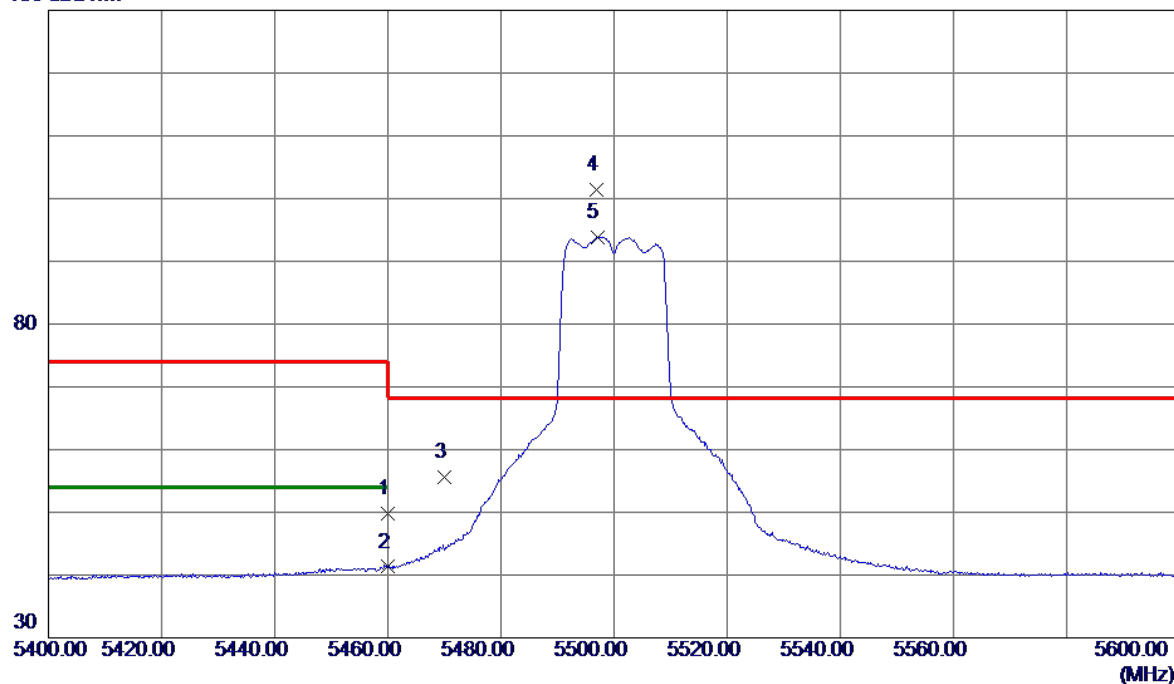


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 37.54                      | 12.19                   | 49.73                     | 74.00           | -24.27       | Peak     |          |
| 2   | 5460.0000    | 29.11                      | 12.19                   | 41.30                     | 54.00           | -12.70       | AVG      |          |
| 3   | 5470.0000    | 43.47                      | 12.21                   | 55.68                     | 68.20           | -12.52       | Peak     |          |
| 4 * | 5496.8000    | 89.09                      | 12.27                   | 101.36                    | 68.20           | 33.16        | Peak     | No Limit |
| 5   | 5497.0000    | 81.61                      | 12.27                   | 93.88                     | 999.00          | -905.12      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5580 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

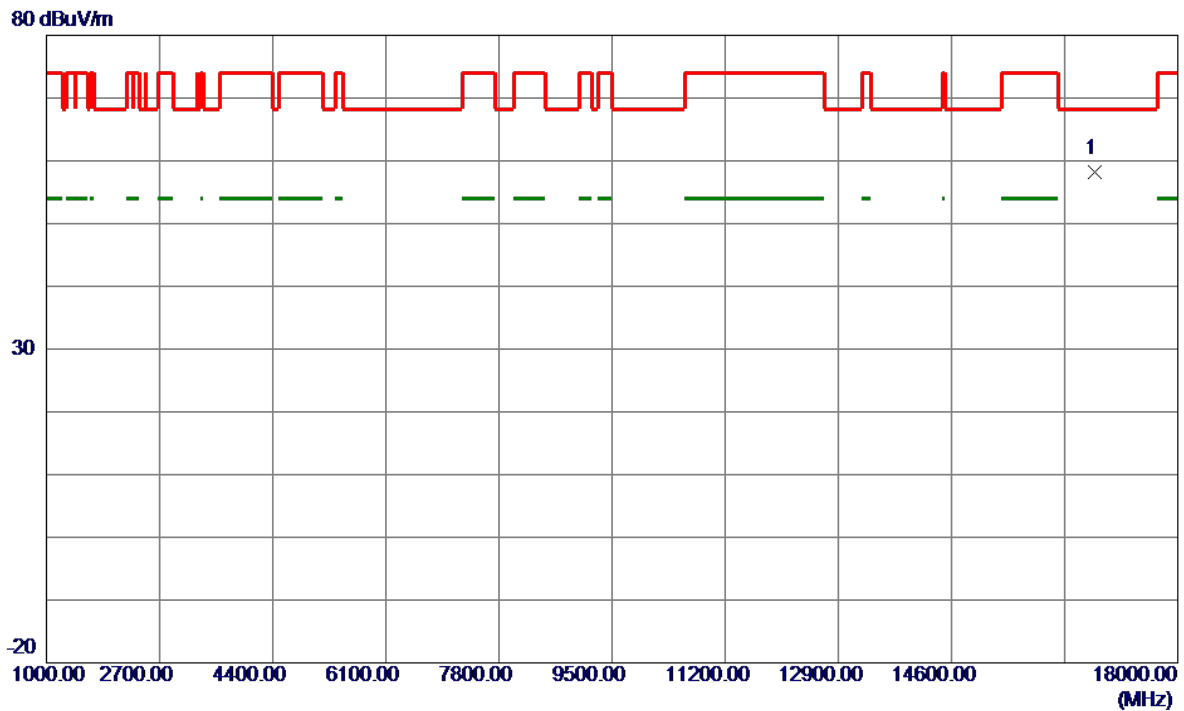


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16746.7000 | 49.17         | 8.93           | 58.10       | 68.20  | -10.10 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5700 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

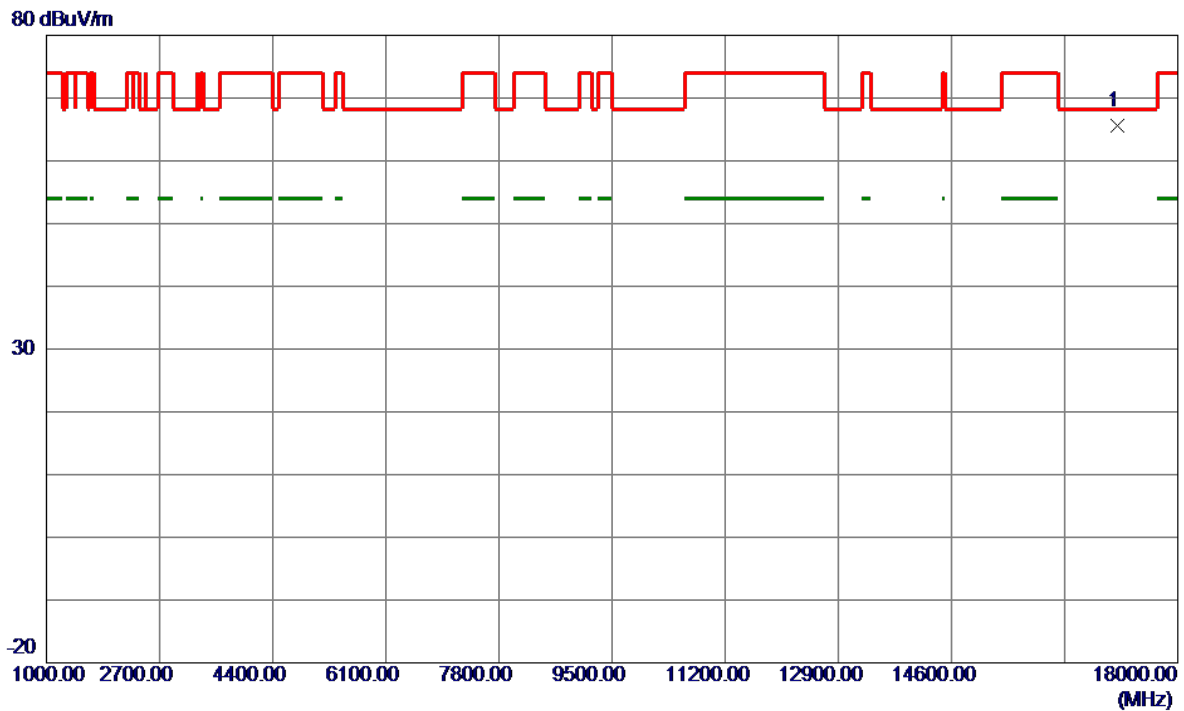


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17091.9000   | 56.09                      | 9.60                    | 65.69                     | 68.20           | -2.51        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

130 dBuV/m

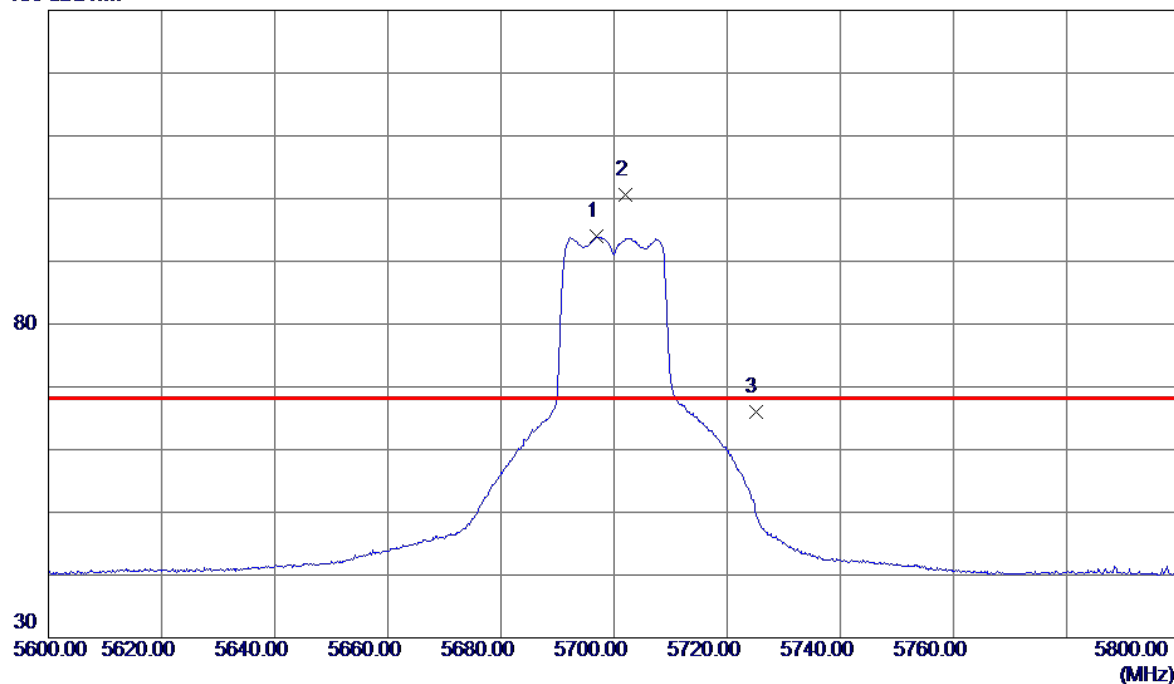


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5696.9000    | 80.99                      | 12.91                   | 93.90                     | 999.00          | -905.10      | AVG      | No Limit |
| 2 * | 5702.1000    | 87.70                      | 12.92                   | 100.62                    | 68.20           | 32.42        | Peak     | No Limit |
| 3   | 5725.0000    | 53.09                      | 13.00                   | 66.09                     | 68.20           | -2.11        | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5510 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

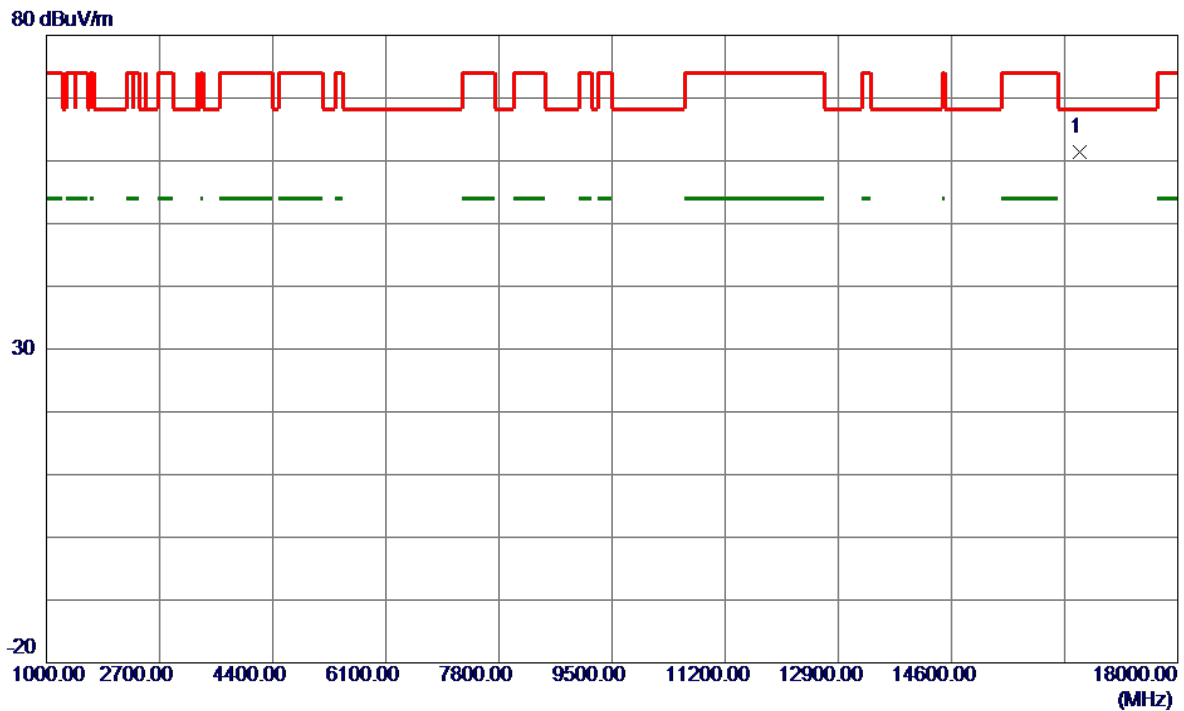


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 16525.5000   | 52.99                      | 8.50                    | 61.49                     | 68.20           | -6.71        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

130 dBuV/m

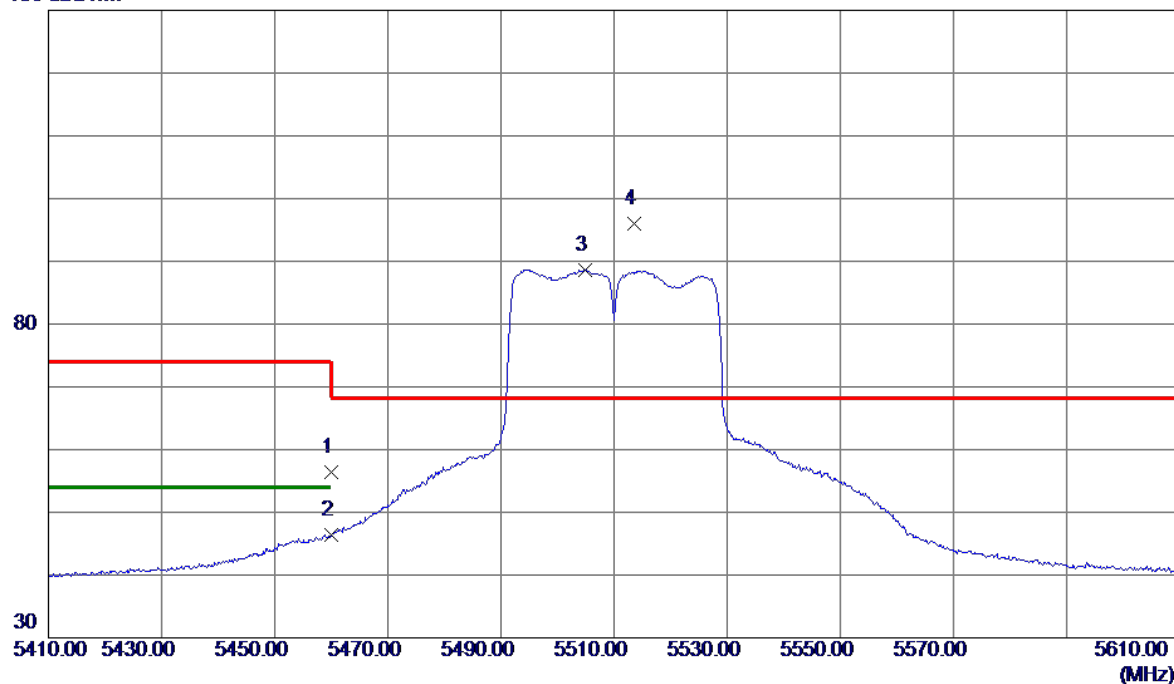


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 44.25                      | 12.19                   | 56.44                     | 74.00           | -17.56       | Peak     |          |
| 2   | 5460.0000    | 34.22                      | 12.19                   | 46.41                     | 54.00           | -7.59        | AVG      |          |
| 3   | 5504.9000    | 76.35                      | 12.29                   | 88.64                     | 999.00          | -910.36      | AVG      | No Limit |
| 4 * | 5513.5000    | 83.77                      | 12.32                   | 96.09                     | 68.20           | 27.89        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5670 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

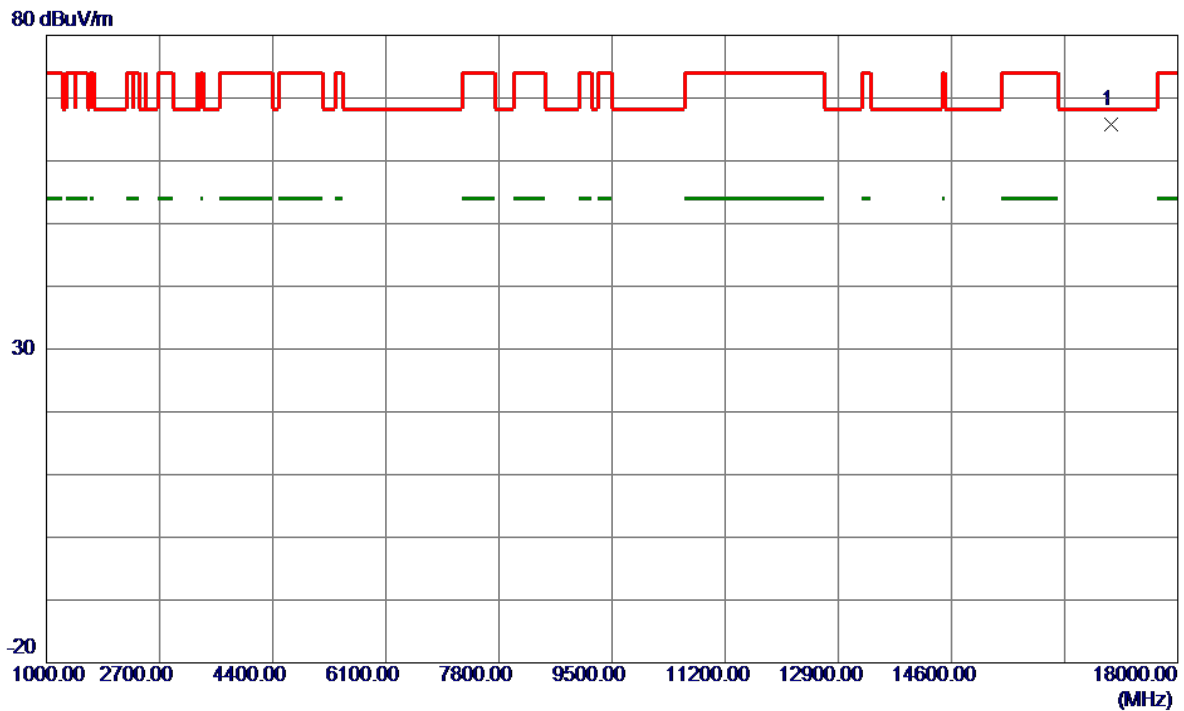


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17003.0250 | 56.43         | 9.42           | 65.85       | 68.20  | -2.35  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX N(HT40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

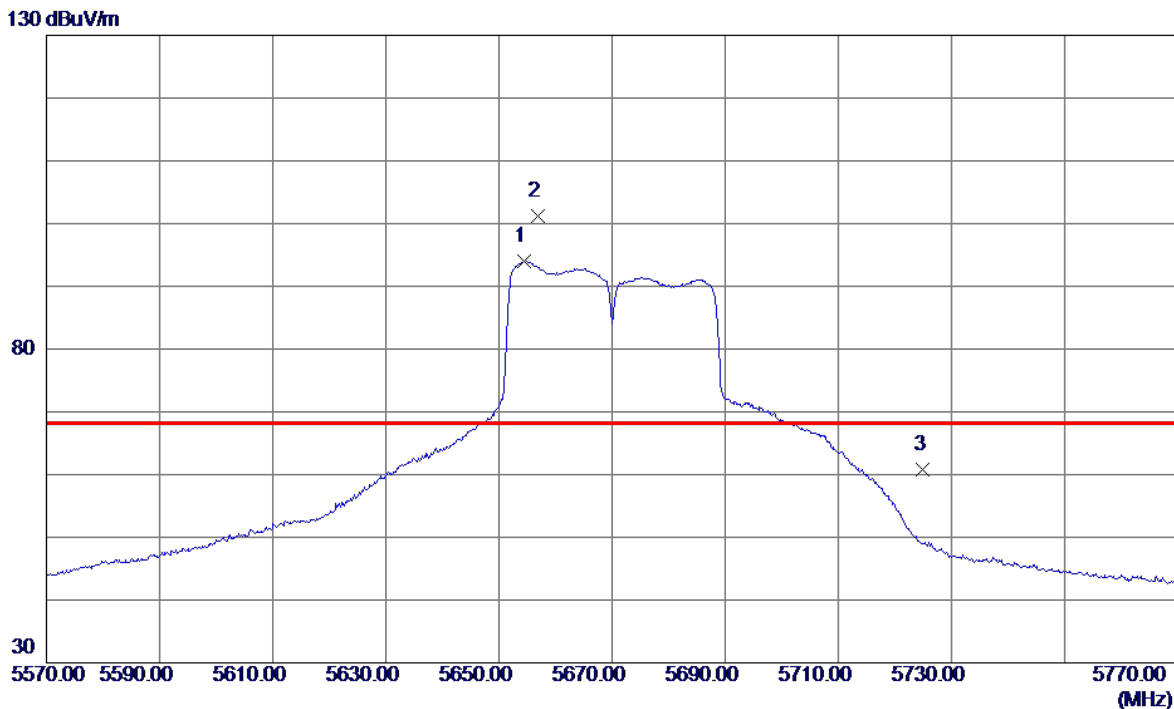


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5654.5000    | 81.16                      | 12.77                   | 93.93                     | 999.00          | -905.07      | AVG      | No Limit |
| 2 * | 5656.8000    | 88.37                      | 12.78                   | 101.15                    | 68.20           | 32.95        | Peak     | No Limit |
| 3   | 5725.0000    | 47.71                      | 13.00                   | 60.71                     | 68.20           | -7.49        | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

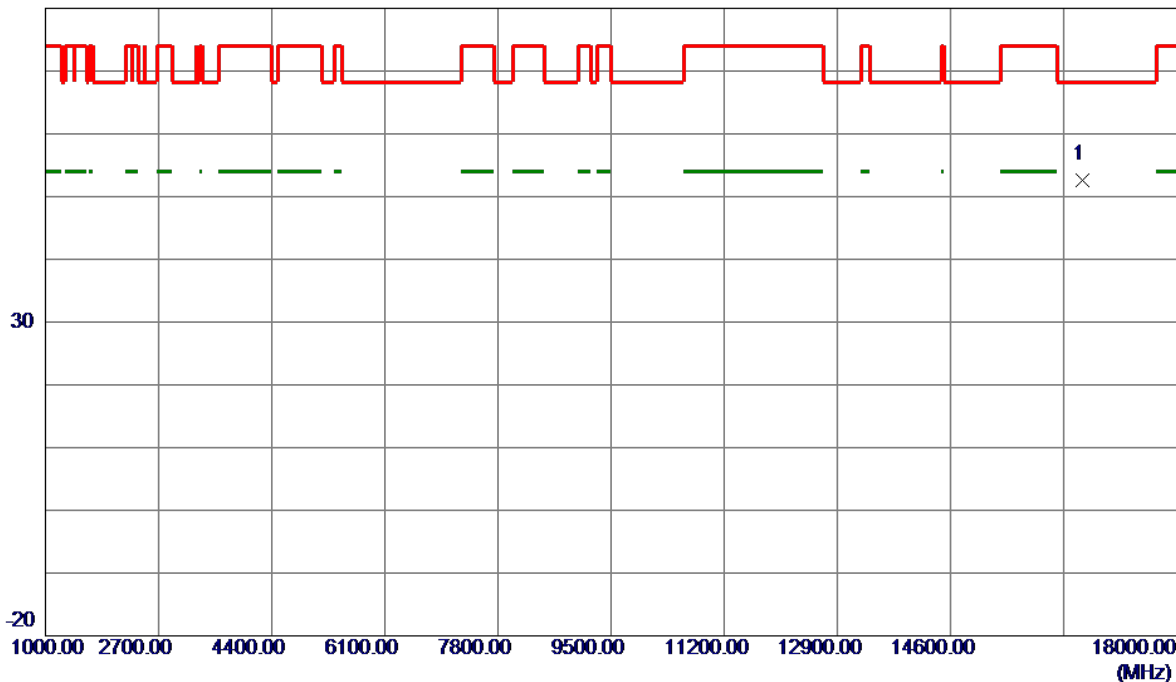


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16578.7000 | 44.09         | 8.61           | 52.70       | 68.20  | -15.50 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

130 dBuV/m

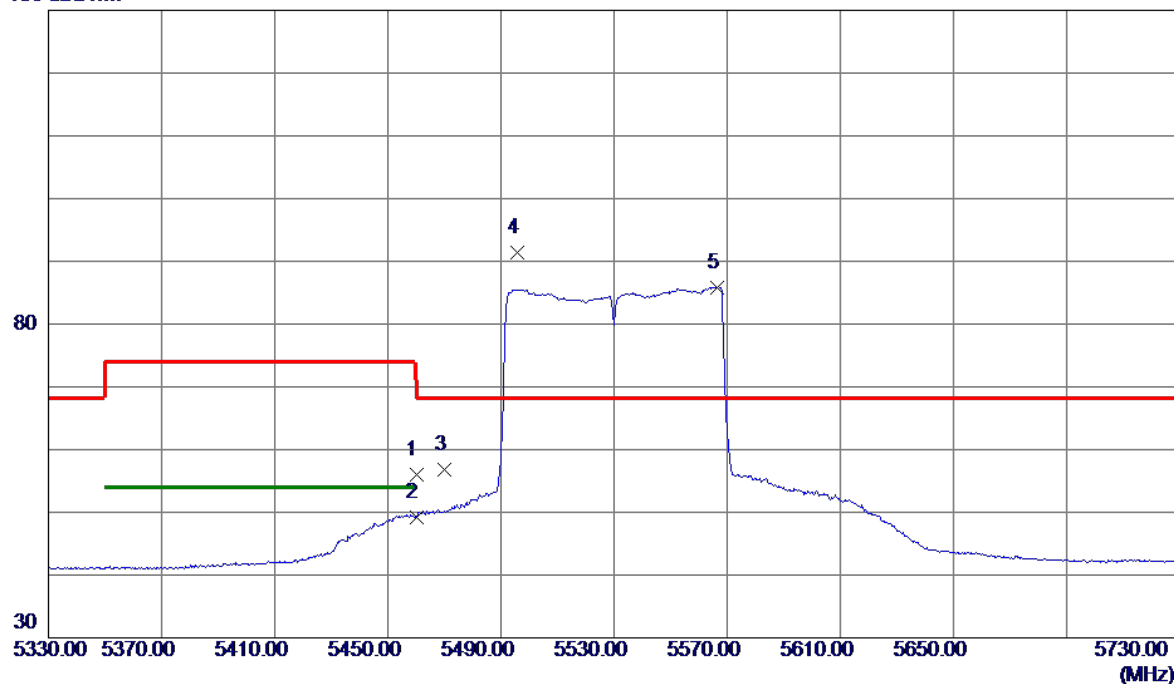


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 43.81                      | 12.19                   | 56.00                     | 74.00           | -18.00       | Peak     |          |
| 2   | 5460.0000    | 37.06                      | 12.19                   | 49.25                     | 54.00           | -4.75        | AVG      |          |
| 3   | 5470.0000    | 44.56                      | 12.21                   | 56.77                     | 68.20           | -11.43       | Peak     |          |
| 4 * | 5495.6000    | 79.05                      | 12.27                   | 91.32                     | 68.20           | 23.12        | Peak     | No Limit |
| 5   | 5566.6000    | 73.35                      | 12.49                   | 85.84                     | 999.00          | -913.16      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |          |
|-----------|------------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Vertical |
|-----------|------------------------------------|--------------|----------|

80 dBuV/m

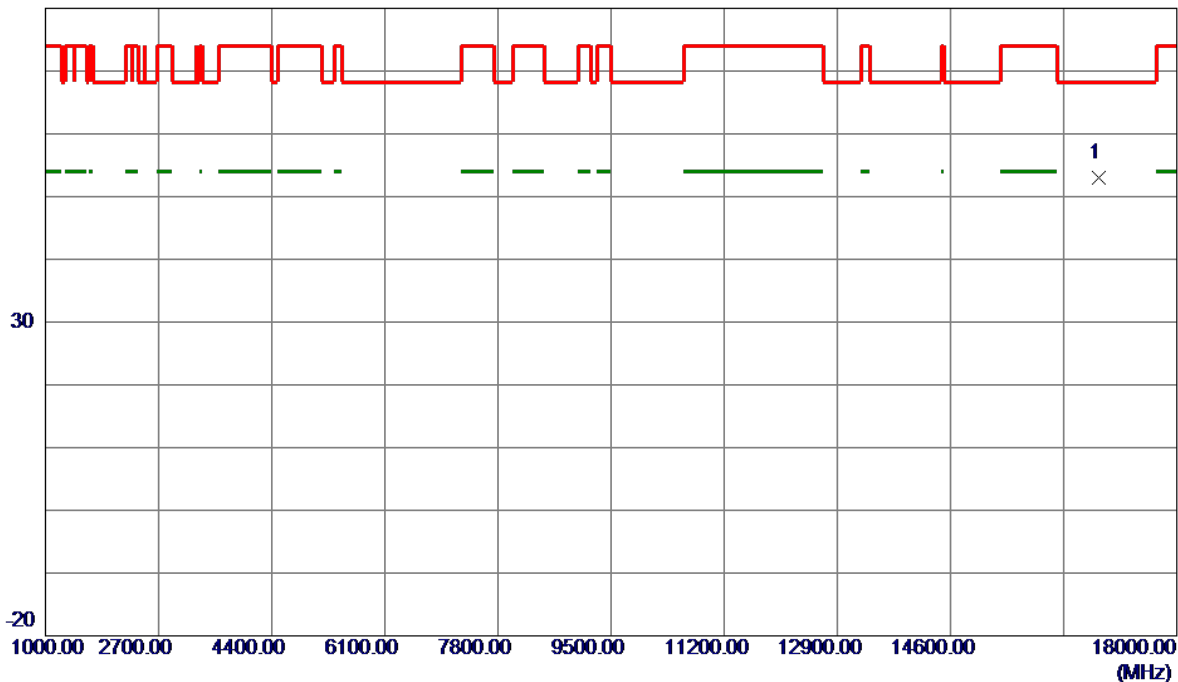


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16832.3000 | 43.93         | 9.09           | 53.02       | 68.20  | -15.18 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                    |              |            |
|-----------|------------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|------------------------------------|--------------|------------|

130 dBuV/m

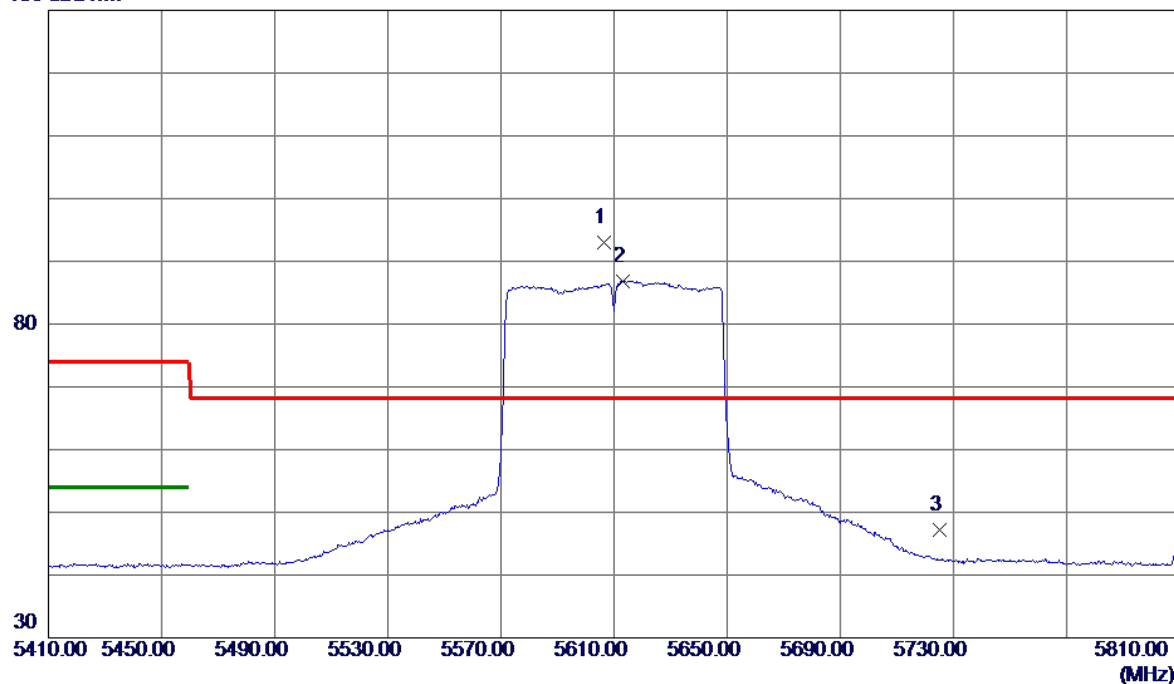


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5606.4000    | 80.29                      | 12.62                   | 92.91                     | 68.20           | 24.71        | Peak     | No Limit |
| 2   | 5613.2000    | 74.25                      | 12.64                   | 86.89                     | 999.00          | -912.11      | AVG      | No Limit |
| 3   | 5725.0000    | 34.26                      | 13.00                   | 47.26                     | 68.20           | -20.94       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

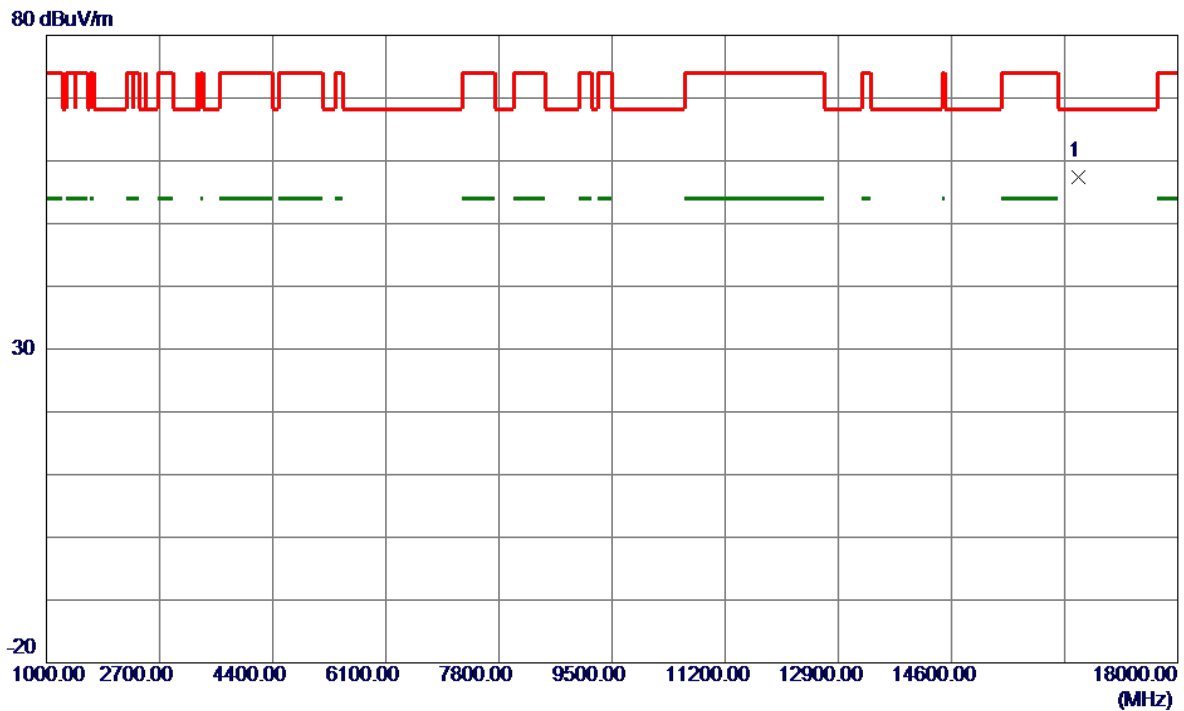


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16500.8500 | 49.04         | 8.46           | 57.50       | 68.20  | -10.70 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5500 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

130 dBuV/m

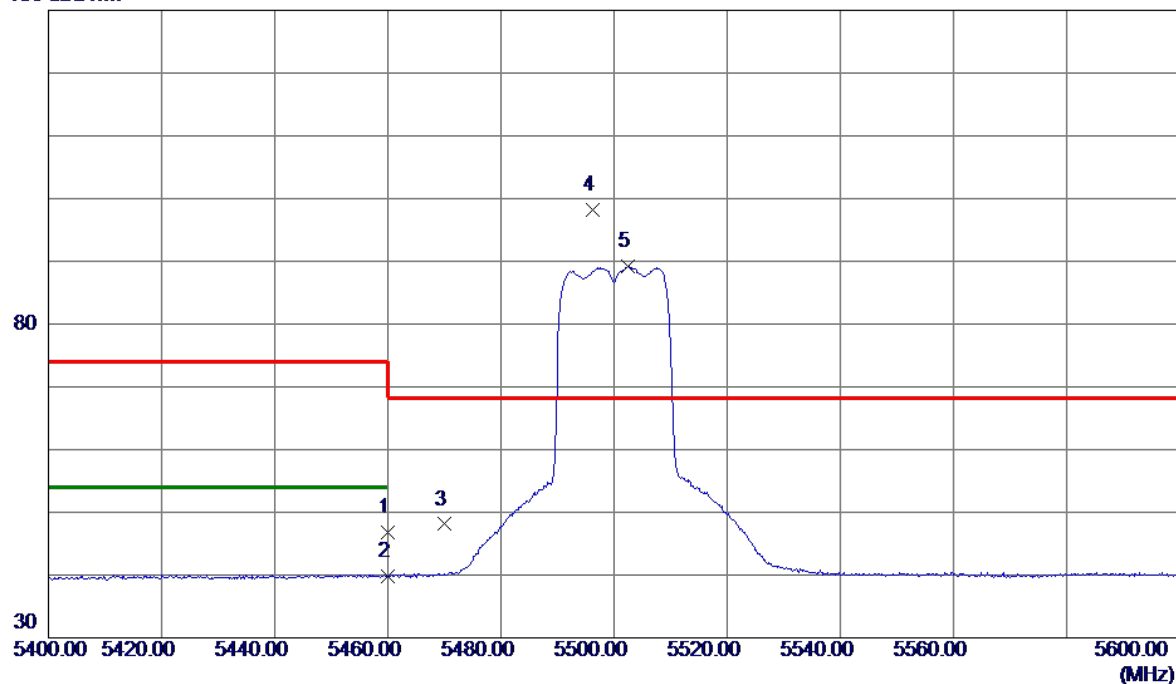


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 34.62                      | 12.19                   | 46.81                     | 74.00           | -27.19       | Peak     |          |
| 2   | 5460.0000    | 27.65                      | 12.19                   | 39.84                     | 54.00           | -14.16       | AVG      |          |
| 3   | 5470.0000    | 35.89                      | 12.21                   | 48.10                     | 68.20           | -20.10       | Peak     |          |
| 4 * | 5496.2000    | 85.93                      | 12.27                   | 98.20                     | 68.20           | 30.00        | Peak     | No Limit |
| 5   | 5502.5000    | 76.86                      | 12.28                   | 89.14                     | 999.00          | -909.86      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5580 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

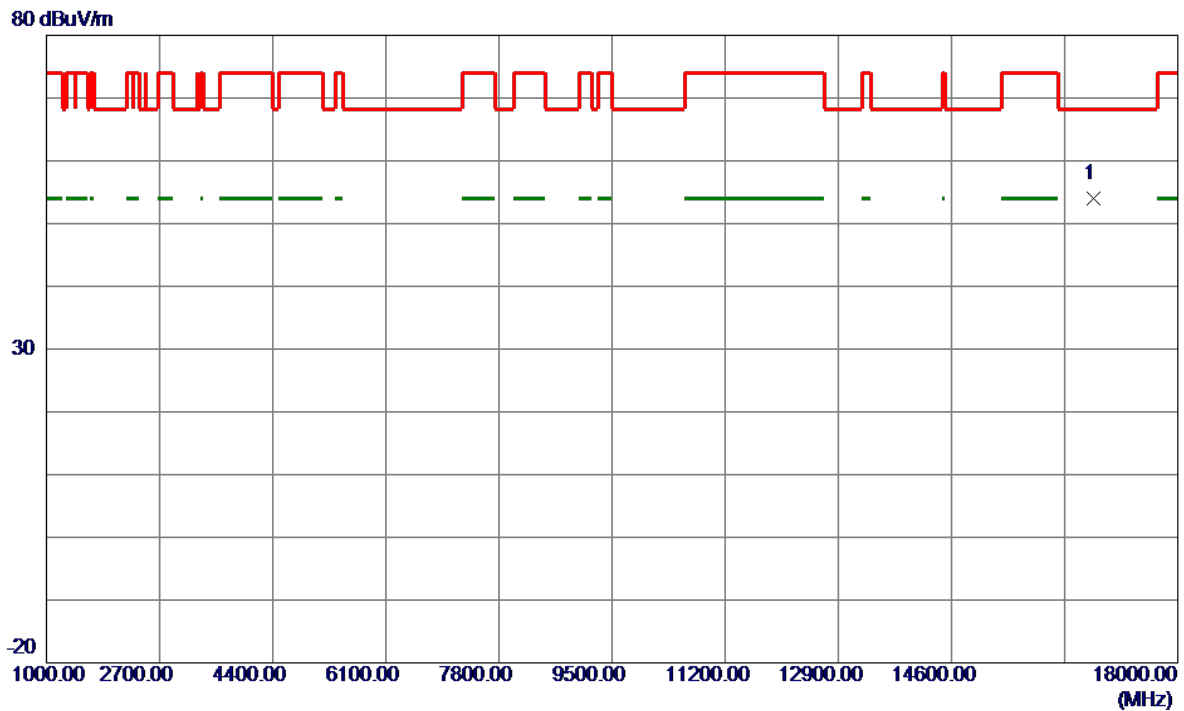


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16743.2500 | 45.12         | 8.92           | 54.04       | 68.20  | -14.16 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

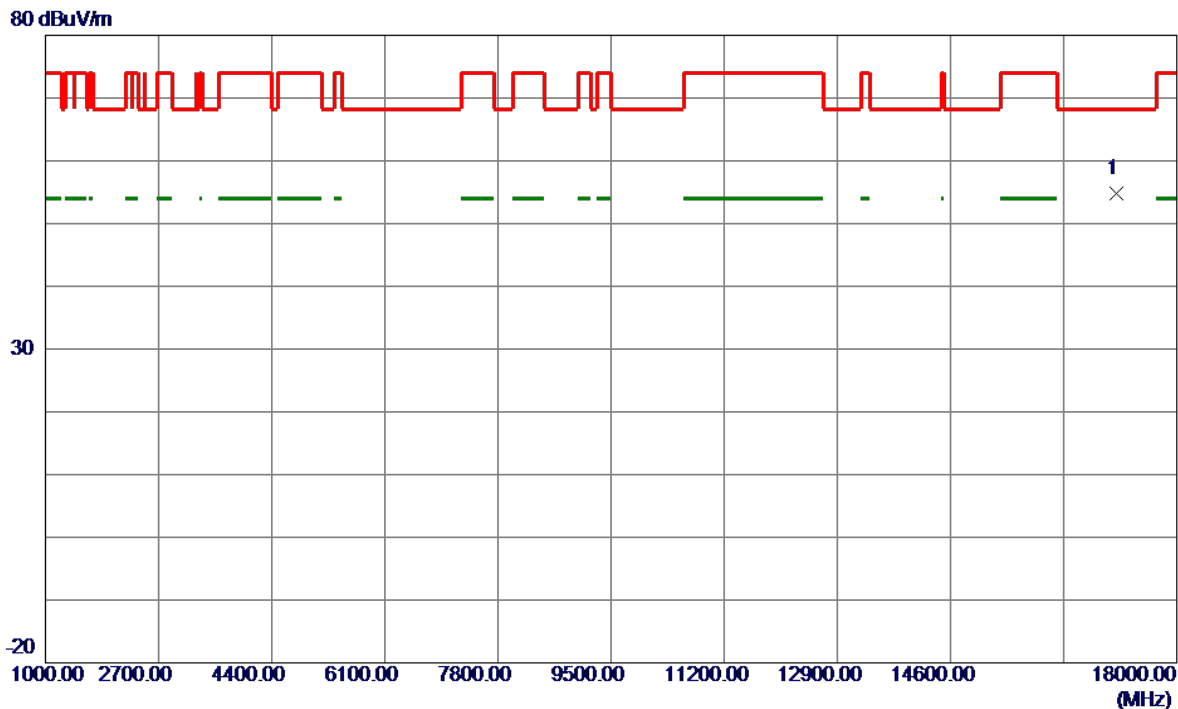


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17095.1000 | 45.27         | 9.60           | 54.87       | 68.20  | -13.33 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE20) Mode 5700 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

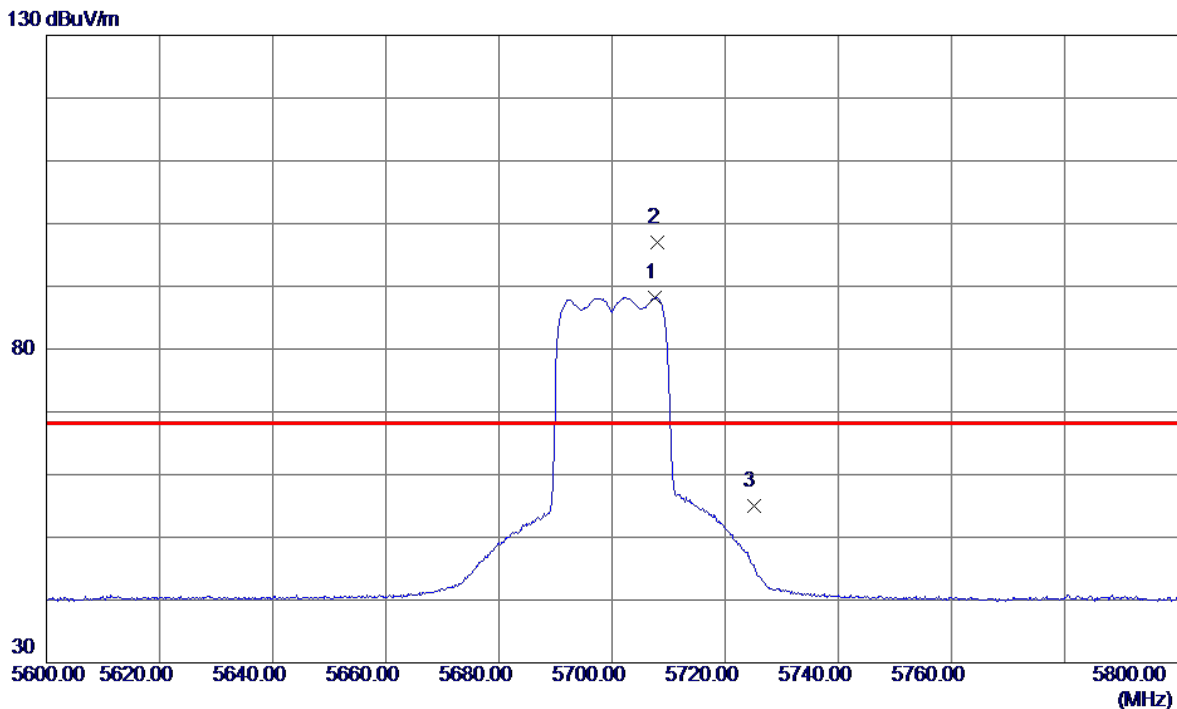


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5707.6000    | 75.21                      | 12.94                   | 88.15                     | 999.00          | -910.85      | AVG      | No Limit |
| 2 * | 5708.0000    | 84.07                      | 12.94                   | 97.01                     | 68.20           | 28.81        | Peak     | No Limit |
| 3   | 5725.0000    | 42.02                      | 13.00                   | 55.02                     | 68.20           | -13.18       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

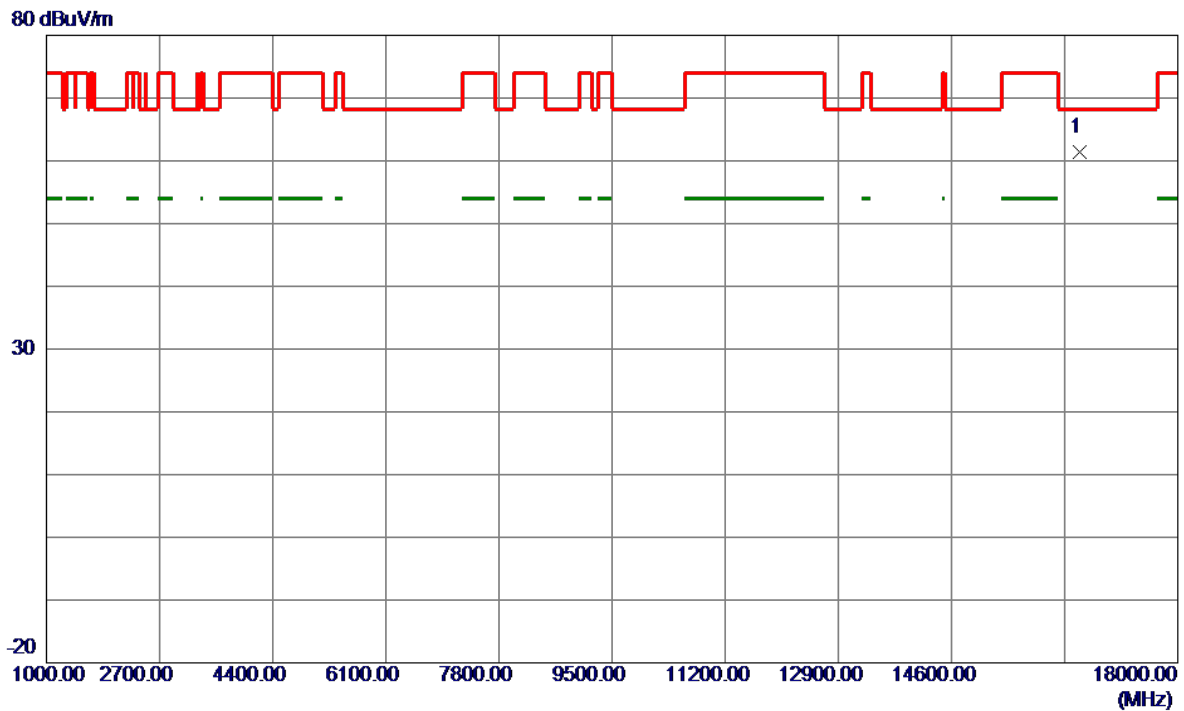


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16535.8500 | 52.81         | 8.52           | 61.33       | 68.20  | -6.87  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5510 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

130 dBuV/m

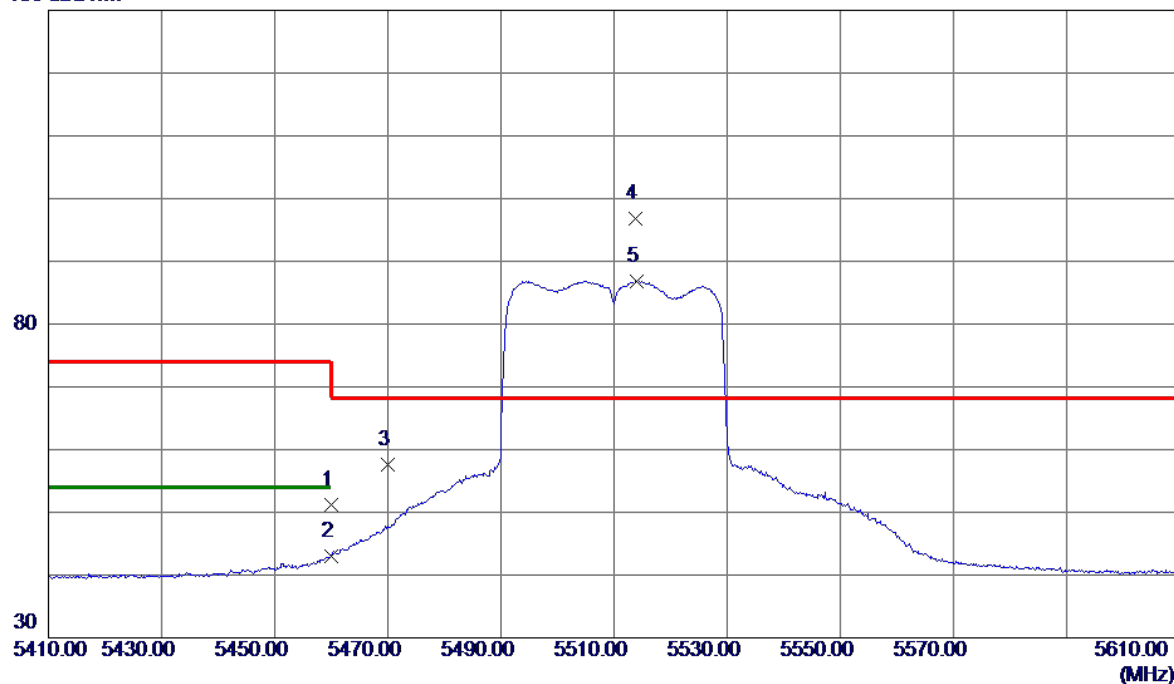


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 38.96                      | 12.19                   | 51.15                     | 74.00           | -22.85       | Peak     |          |
| 2   | 5460.0000    | 30.79                      | 12.19                   | 42.98                     | 54.00           | -11.02       | AVG      |          |
| 3   | 5470.0000    | 45.31                      | 12.21                   | 57.52                     | 68.20           | -10.68       | Peak     |          |
| 4 * | 5513.7000    | 84.47                      | 12.32                   | 96.79                     | 68.20           | 28.59        | Peak     | No Limit |
| 5   | 5514.0000    | 74.53                      | 12.32                   | 86.85                     | 999.00          | -912.15      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5550 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

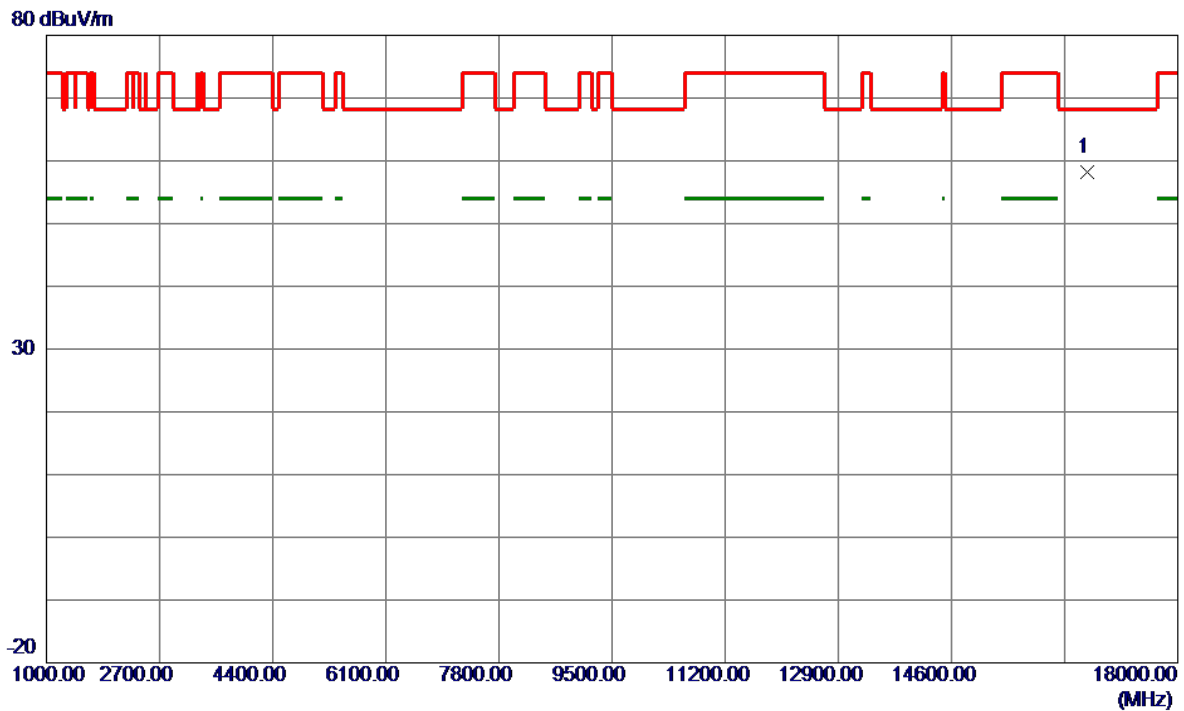


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16632.2250 | 49.40         | 8.71           | 58.11       | 68.20  | -10.09 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

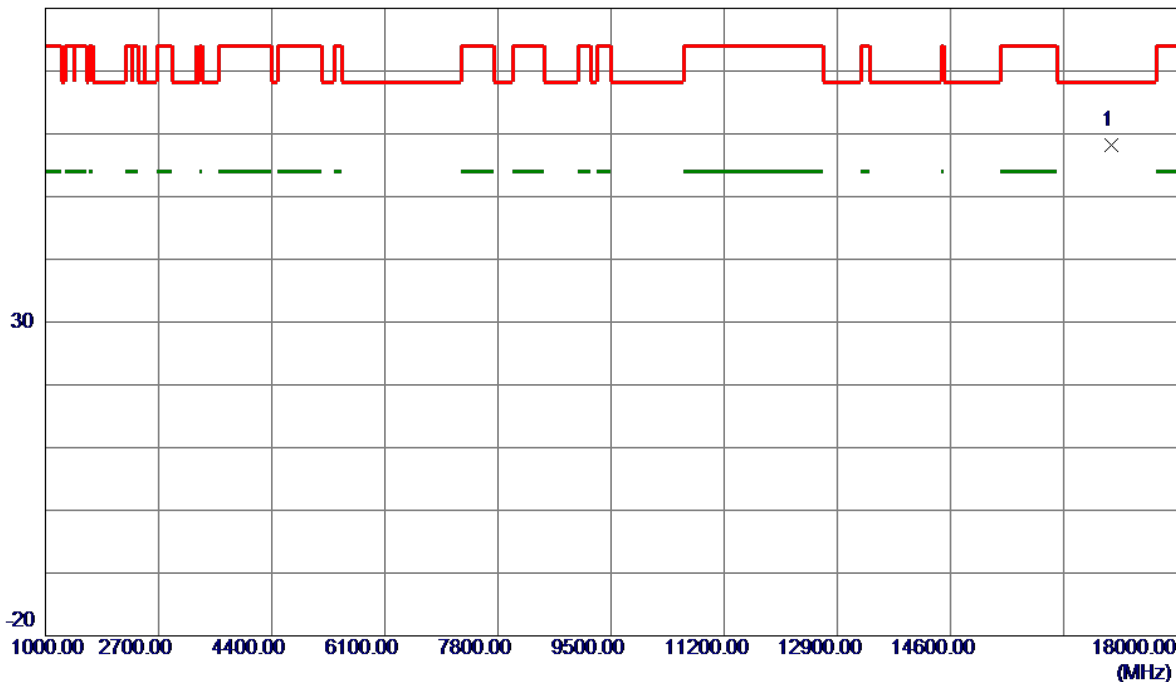


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17019.6750   | 48.76                      | 9.45                    | 58.21                     | 68.20           | -9.99        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE40) Mode 5670 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

130 dBuV/m

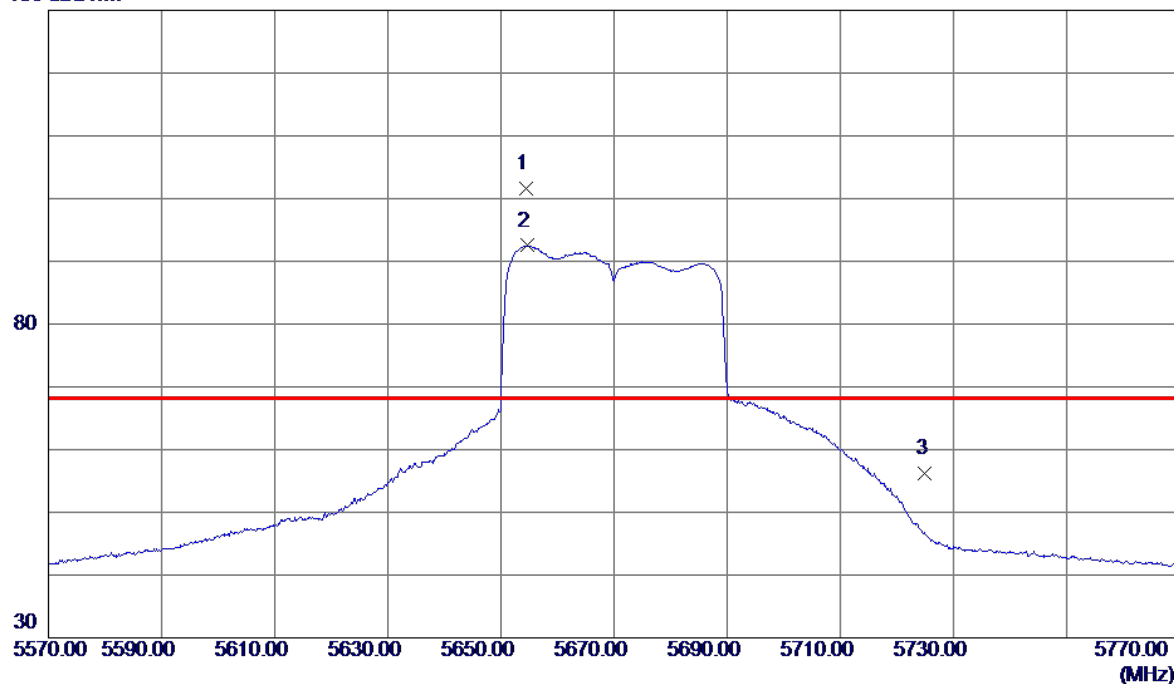


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5654.5000    | 88.85                      | 12.77                   | 101.62                    | 68.20           | 33.42        | Peak     | No Limit |
| 2   | 5654.7000    | 79.73                      | 12.77                   | 92.50                     | 999.00          | -906.50      | AVG      | No Limit |
| 3   | 5725.0000    | 43.19                      | 13.00                   | 56.19                     | 68.20           | -12.01       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

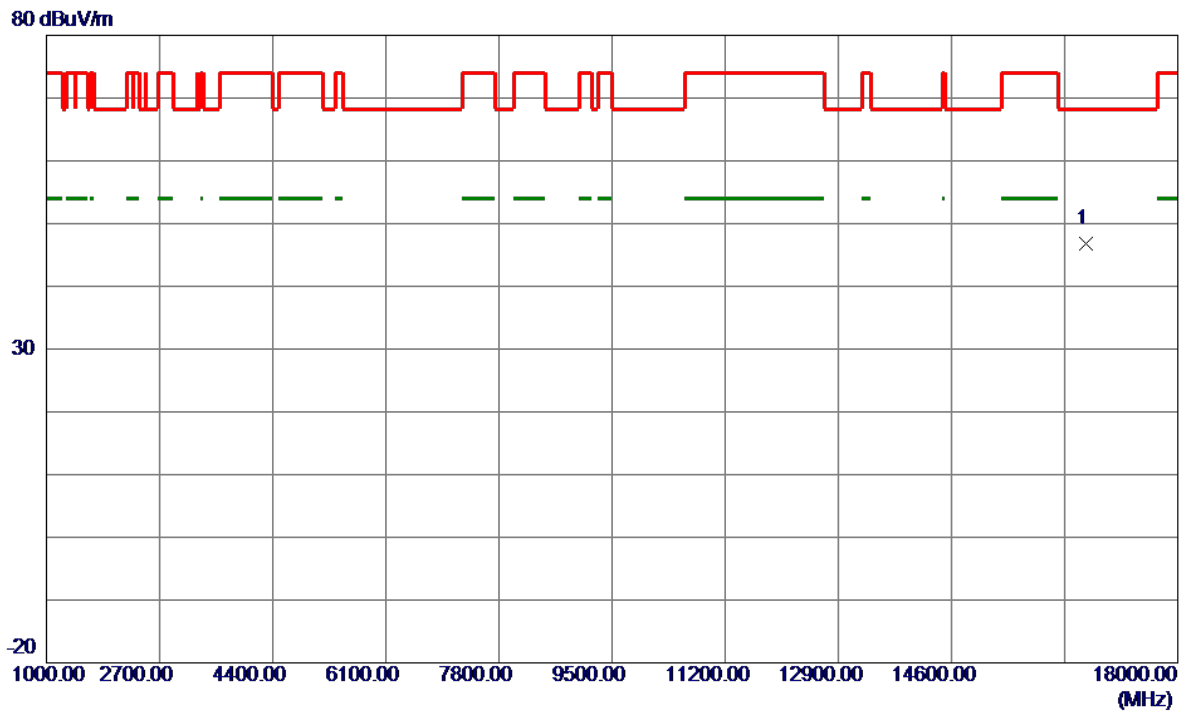


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16613.3000 | 38.22         | 8.67           | 46.89       | 68.20  | -21.31 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5530 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

130 dBuV/m

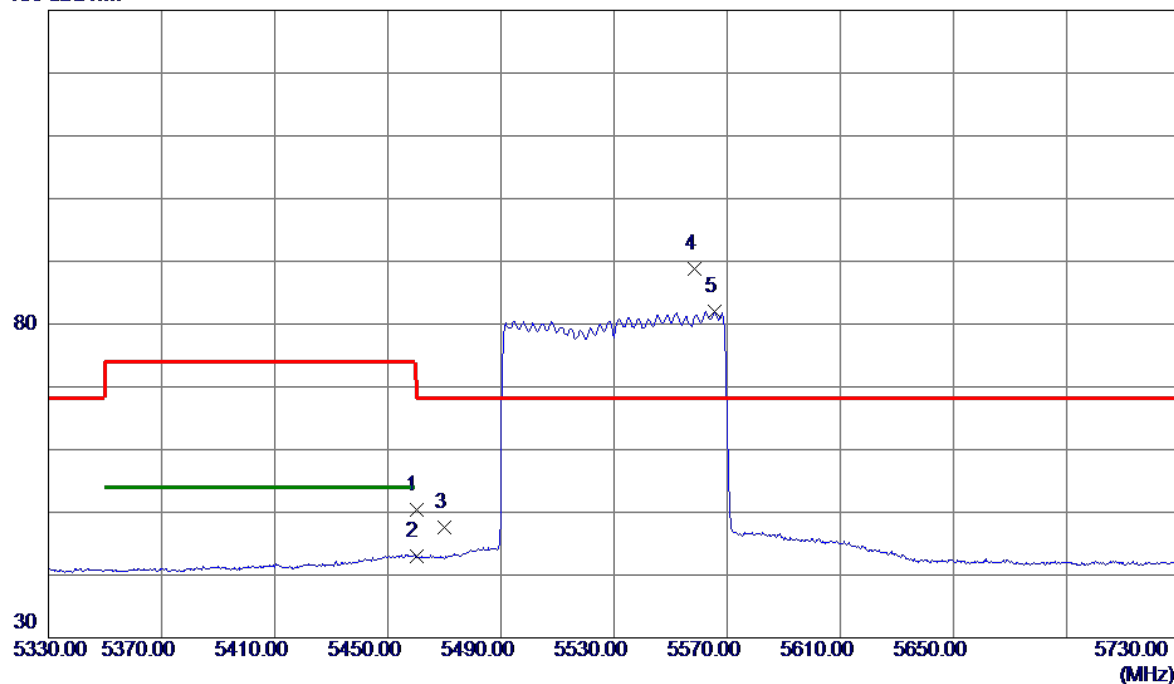


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5460.0000    | 38.15                      | 12.19                   | 50.34                     | 74.00           | -23.66       | Peak     |          |
| 2   | 5460.0000    | 30.78                      | 12.19                   | 42.97                     | 54.00           | -11.03       | AVG      |          |
| 3   | 5470.0000    | 35.47                      | 12.21                   | 47.68                     | 68.20           | -20.52       | Peak     |          |
| 4 * | 5558.4000    | 76.43                      | 12.46                   | 88.89                     | 68.20           | 20.69        | Peak     | No Limit |
| 5   | 5565.4000    | 69.55                      | 12.48                   | 82.03                     | 999.00          | -916.97      | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

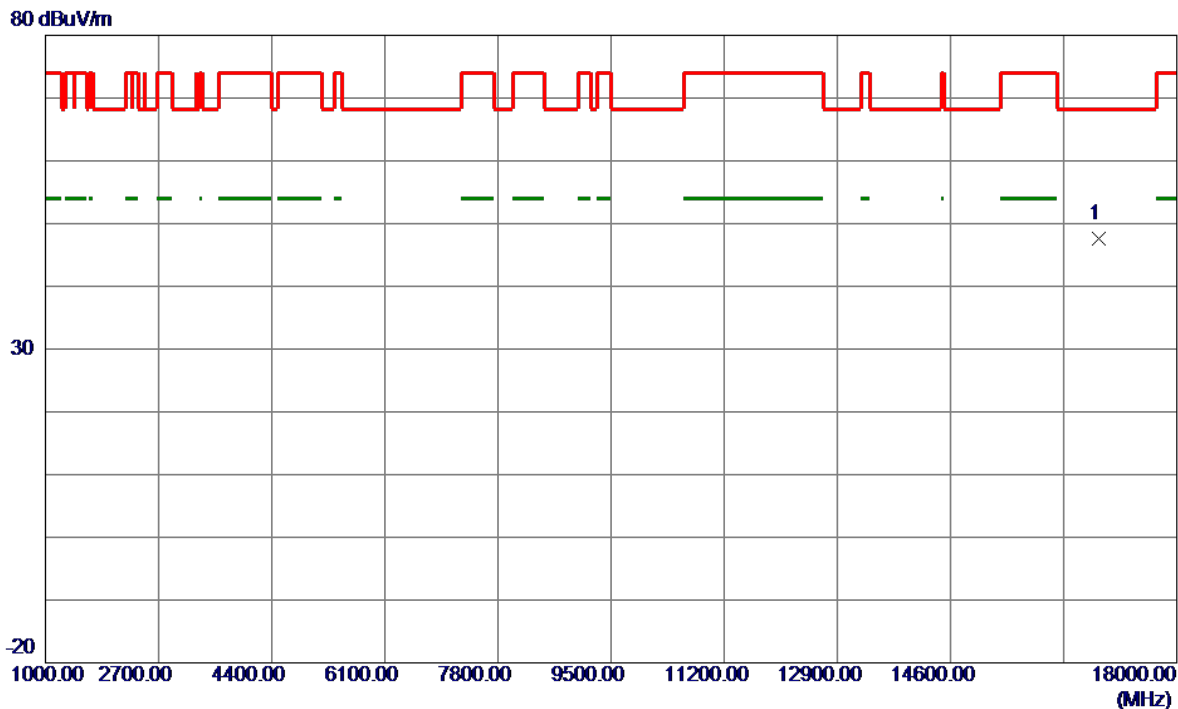


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 16821.7000 | 38.52         | 9.07           | 47.59       | 68.20  | -20.61 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-2C_TX AX(HE80) Mode 5610 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

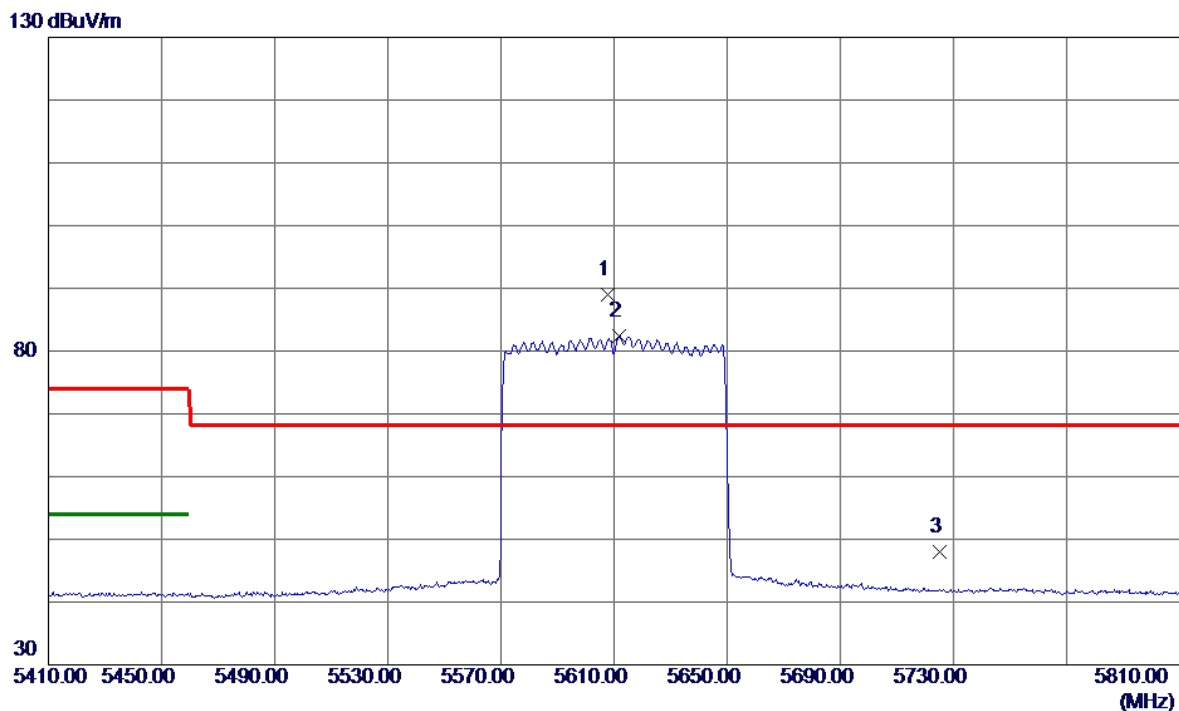


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5607.8000    | 76.42                      | 12.62                   | 89.04                     | 68.20           | 20.84        | Peak     | No Limit |
| 2   | 5611.6000    | 69.72                      | 12.63                   | 82.35                     | 999.00          | -916.65      | AVG      | No Limit |
| 3   | 5725.0000    | 34.98                      | 13.00                   | 47.98                     | 68.20           | -20.22       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

80 dBuV/m

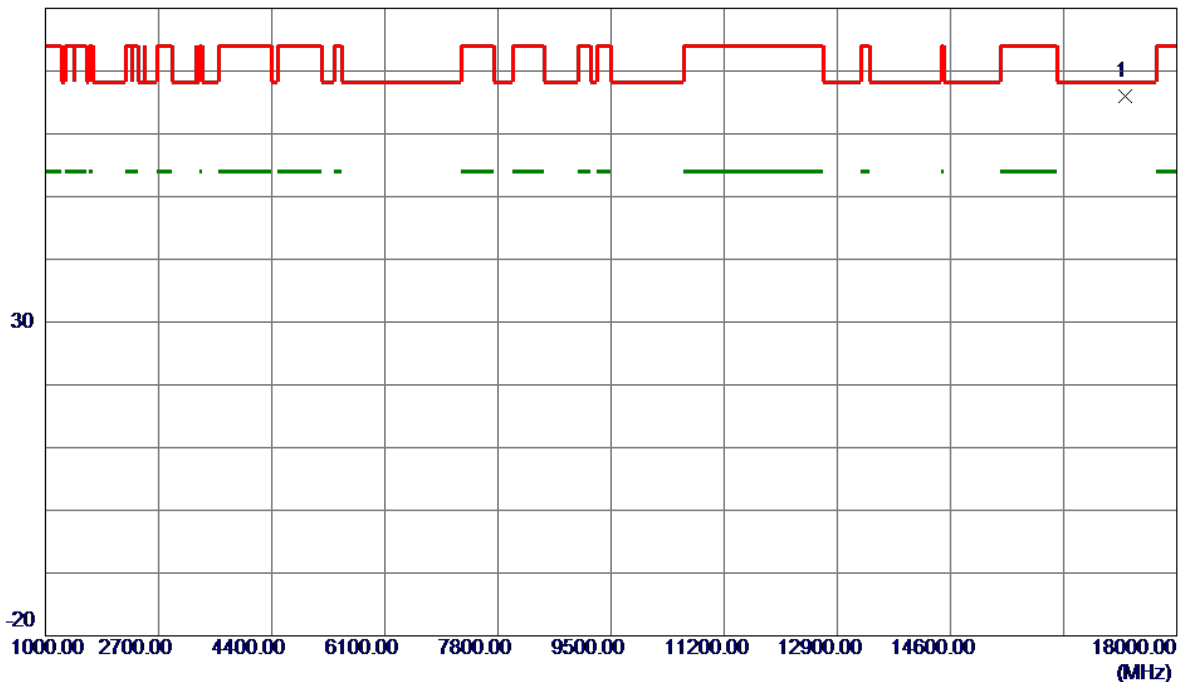


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17229.7500 | 56.19         | 9.88           | 66.07       | 68.20  | -2.13  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

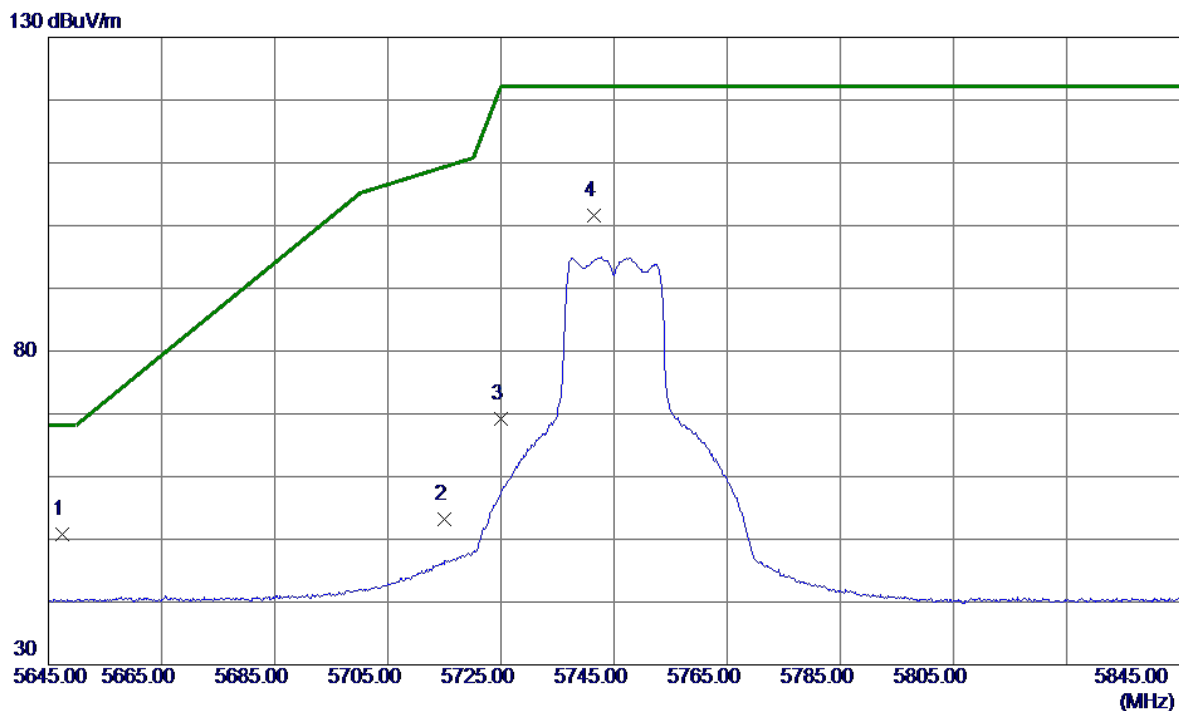


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5647.4000    | 38.12                      | 12.75                   | 50.87                     | 68.20           | -17.33       | Peak     |          |
| 2   | 5715.0000    | 40.24                      | 12.97                   | 53.21                     | 109.40          | -56.19       | Peak     |          |
| 3   | 5725.0000    | 56.20                      | 13.00                   | 69.20                     | 122.20          | -53.00       | Peak     |          |
| 4   | 5741.5000    | 88.50                      | 13.05                   | 101.55                    | 122.20          | -20.65       | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5785 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

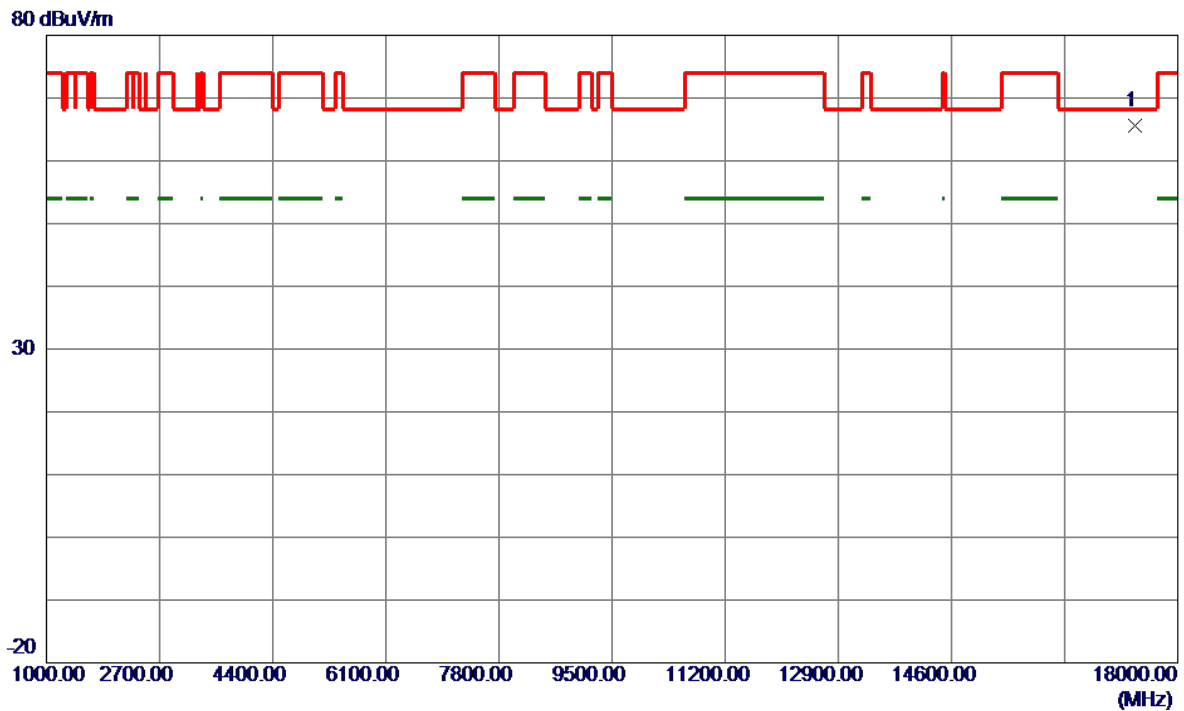


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17353.8500 | 55.46         | 10.14          | 65.60       | 68.20  | -2.60  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

80 dBuV/m

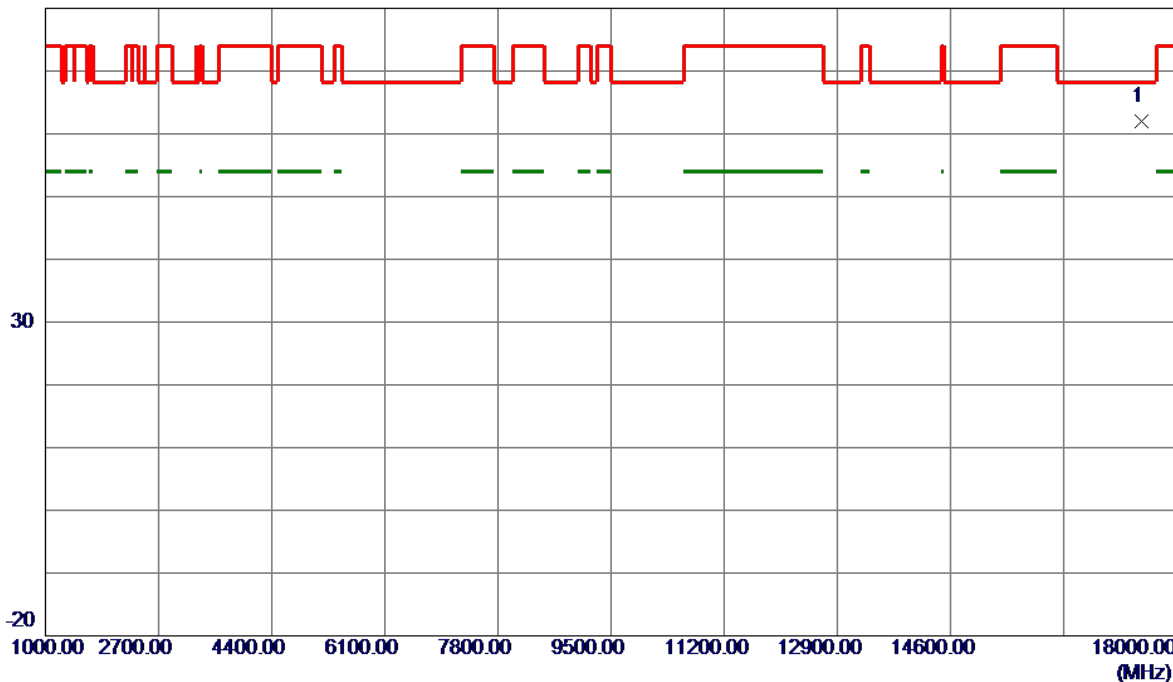


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17467.8500   | 51.62                      | 10.37                   | 61.99                     | 68.20           | -6.21        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |            |
|-----------|---------------------------|--------------|------------|
| Test Mode | UNII-3_TX A Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------|--------------|------------|

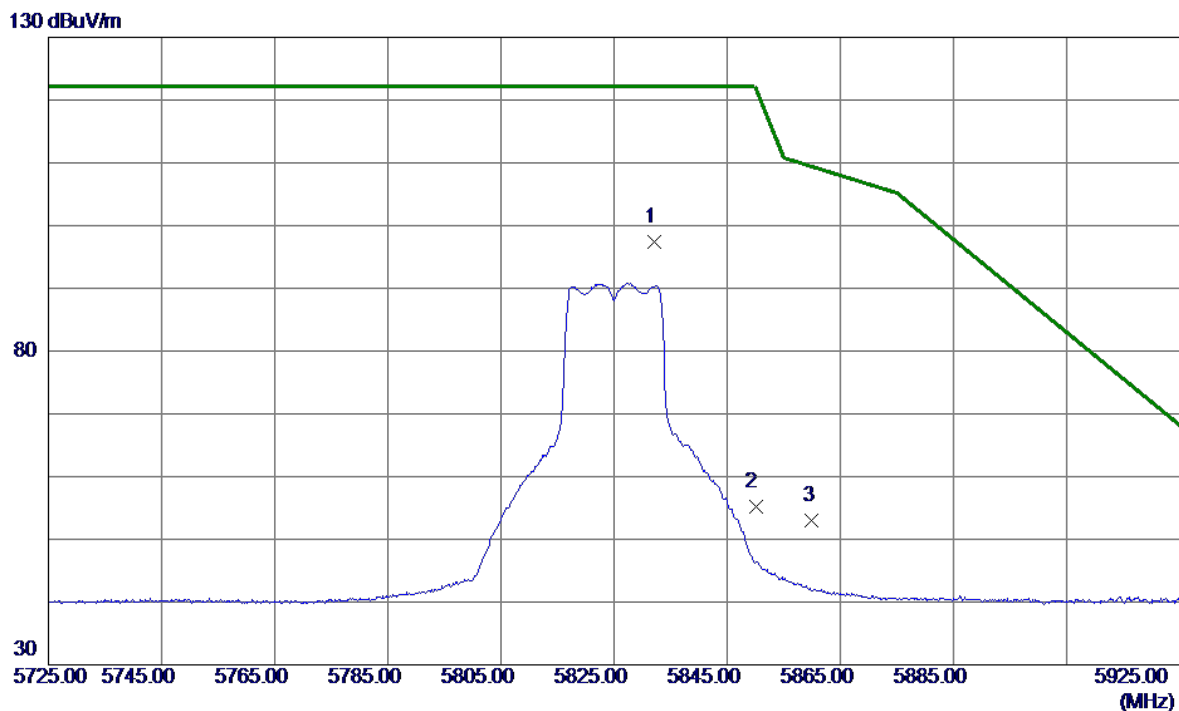


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5832.1000    | 84.07                      | 13.34                   | 97.41                     | 122.20          | -24.79       | Peak     | No Limit |
| 2   | 5850.0000    | 41.71                      | 13.40                   | 55.11                     | 122.20          | -67.09       | Peak     |          |
| 3   | 5860.0000    | 39.48                      | 13.43                   | 52.91                     | 109.40          | -56.49       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5745 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

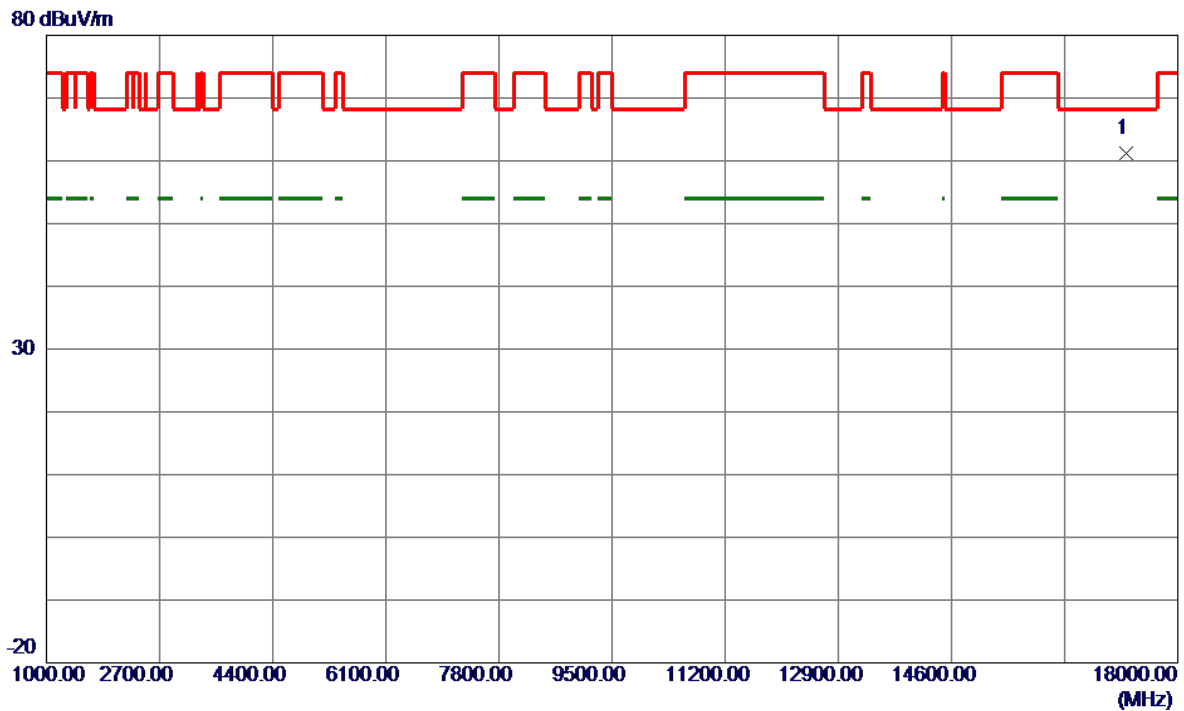


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17230.6000 | 51.41         | 9.88           | 61.29       | 68.20  | -6.91  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

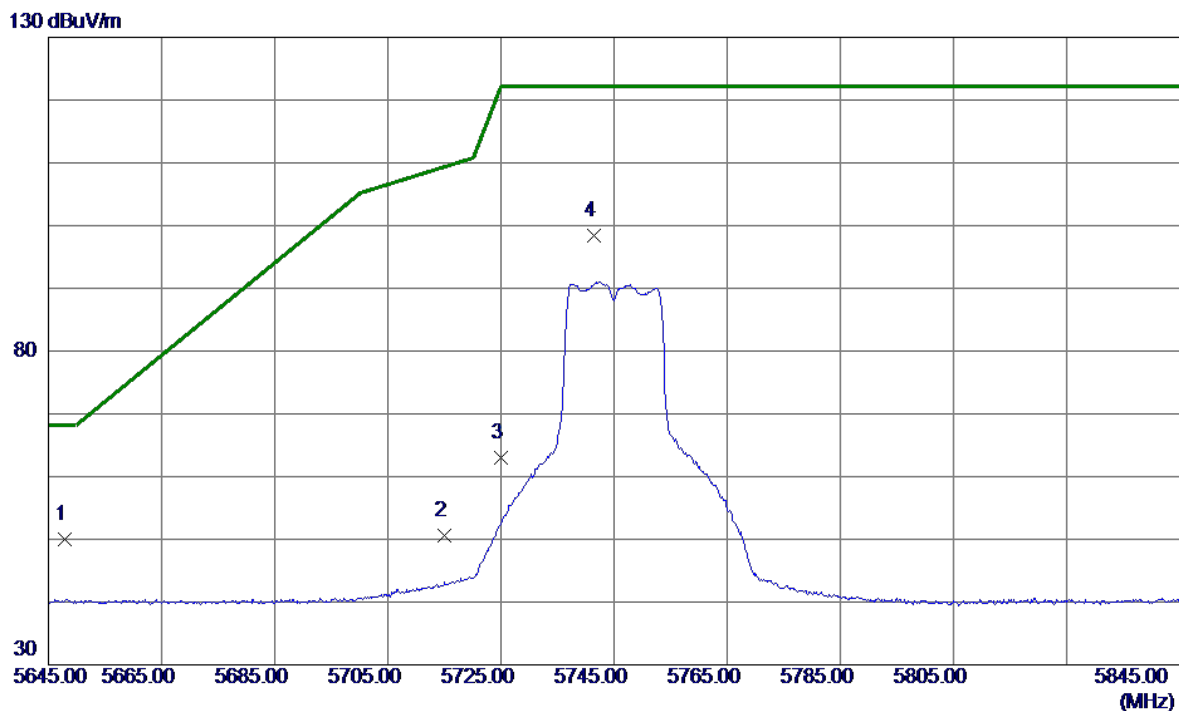


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5647.9000    | 37.34                      | 12.75                   | 50.09                     | 68.20           | -18.11       | Peak     |          |
| 2   | 5715.0000    | 37.69                      | 12.97                   | 50.66                     | 109.40          | -58.74       | Peak     |          |
| 3   | 5725.0000    | 50.06                      | 13.00                   | 63.06                     | 122.20          | -59.14       | Peak     |          |
| 4   | 5741.5000    | 85.30                      | 13.05                   | 98.35                     | 122.20          | -23.85       | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5785 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

80 dBuV/m

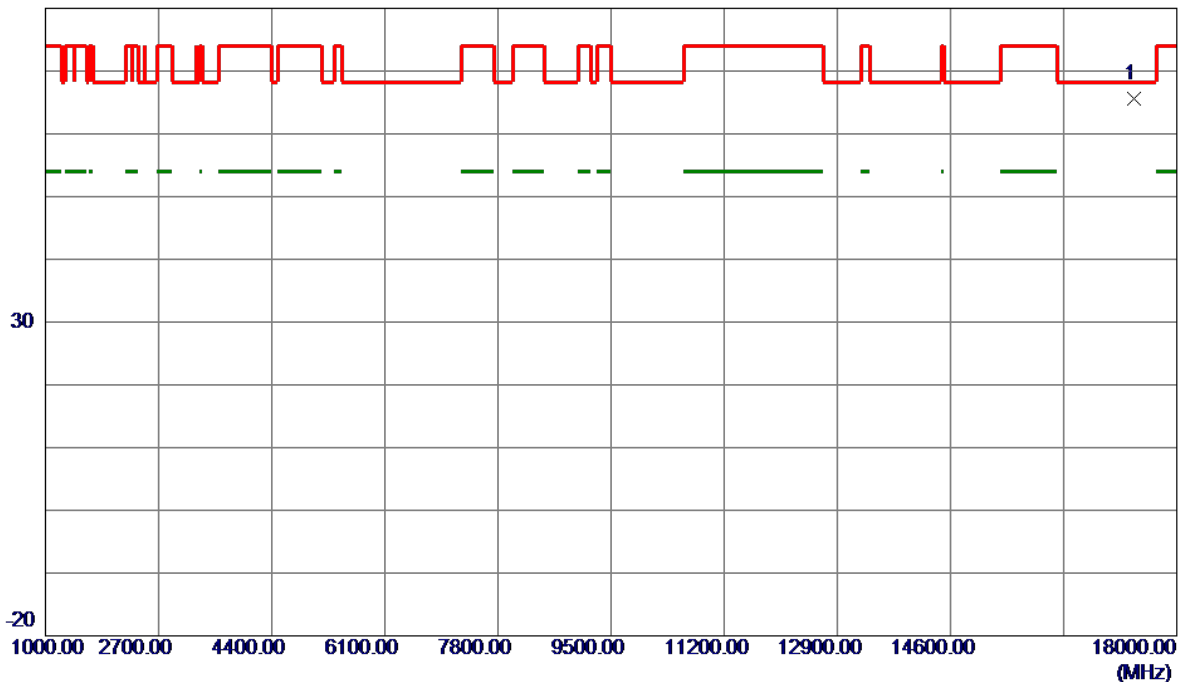


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17352.2500 | 55.53         | 10.13          | 65.66       | 68.20  | -2.54  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT20) Mode 5825 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

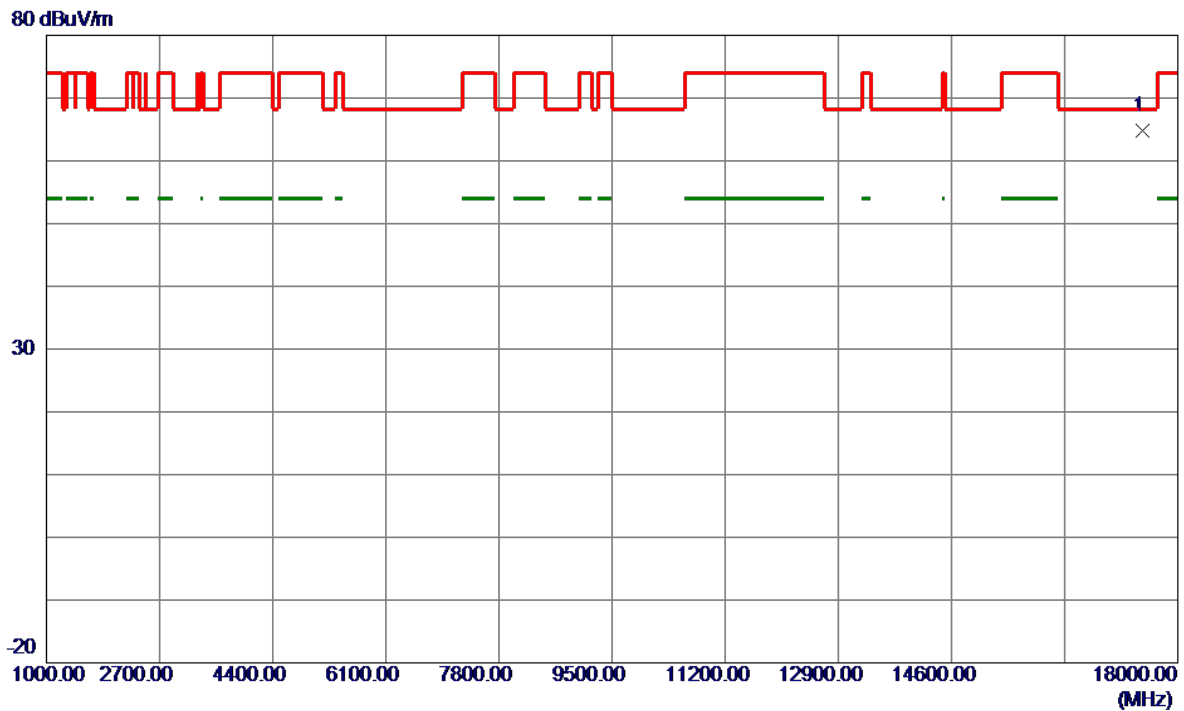


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17477.0000 | 54.32         | 10.39          | 64.71       | 68.20  | -3.49  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

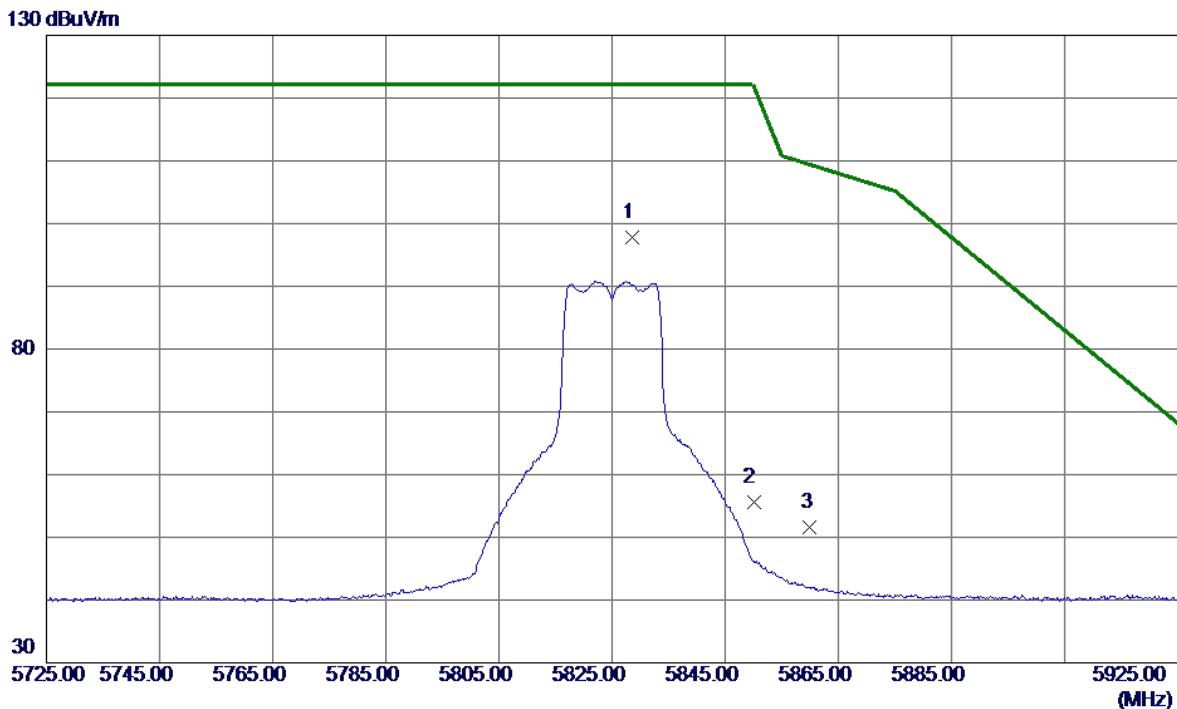


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5828.6000    | 84.41                      | 13.33                   | 97.74                     | 122.20          | -24.46       | Peak     | No Limit |
| 2   | 5850.0000    | 42.17                      | 13.40                   | 55.57                     | 122.20          | -66.63       | Peak     |          |
| 3   | 5860.0000    | 38.25                      | 13.43                   | 51.68                     | 109.40          | -57.72       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT40) Mode 5755 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

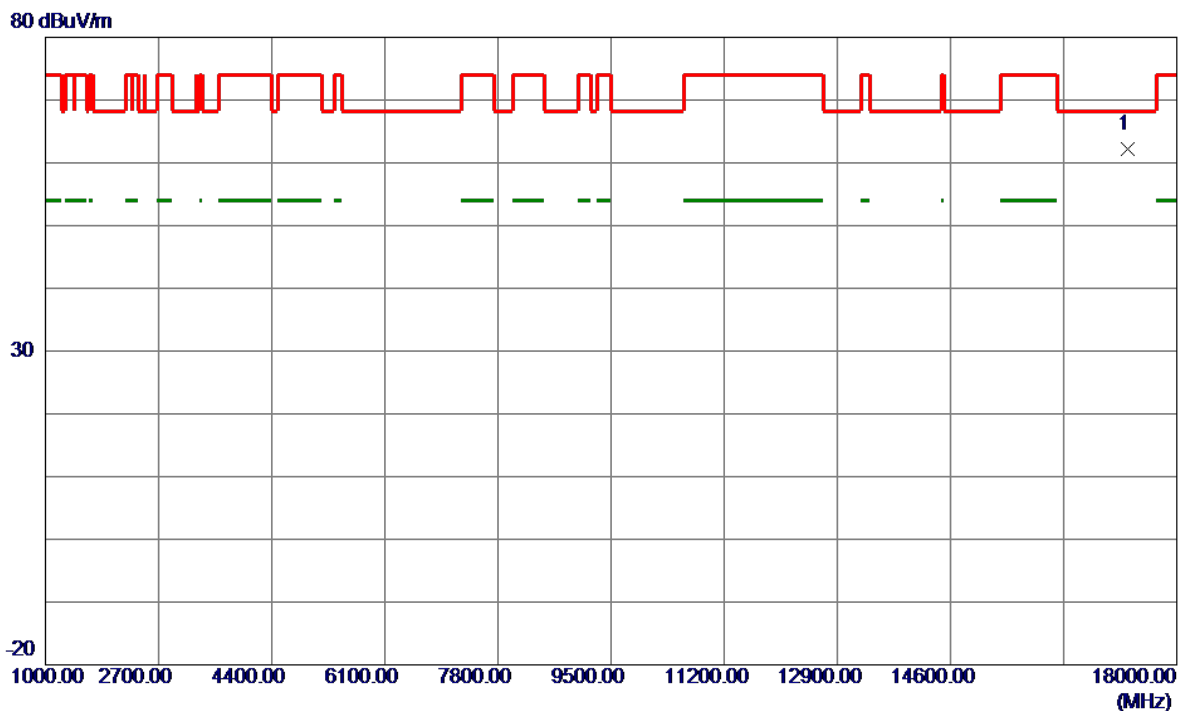


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17269.0500 | 52.31         | 9.96           | 62.27       | 68.20  | -5.93  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

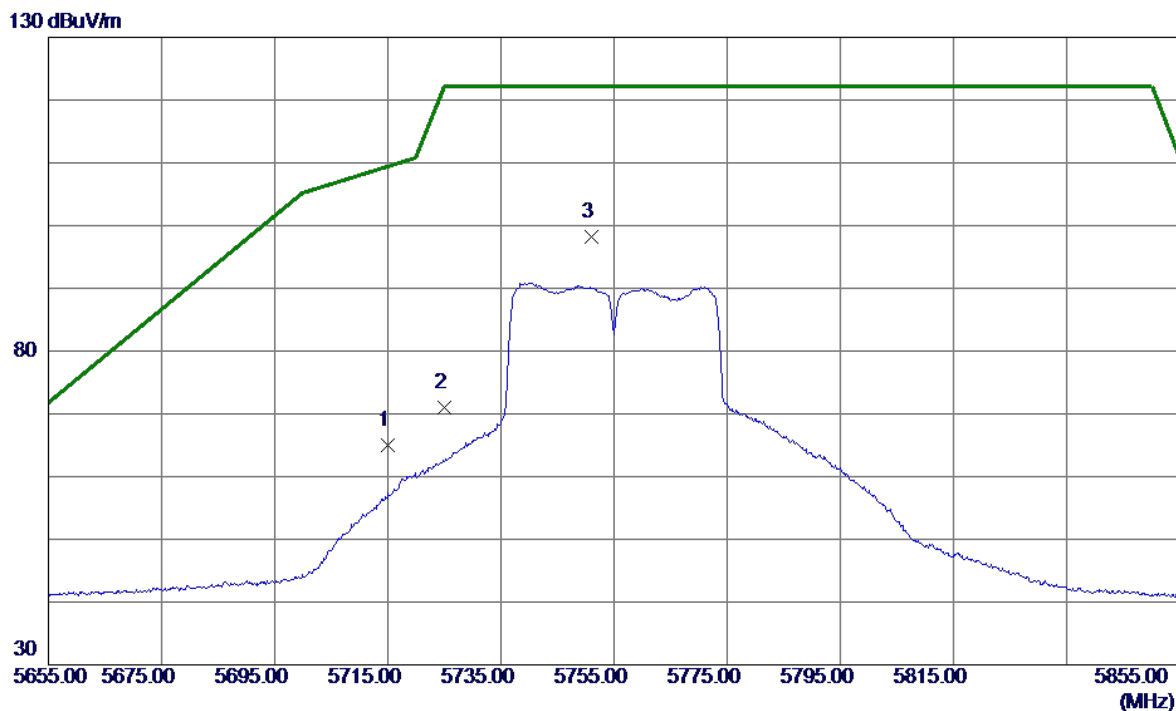


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 52.06                      | 12.97                   | 65.03                     | 109.40          | -44.37       | Peak     |          |
| 2   | 5725.0000    | 57.95                      | 13.00                   | 70.95                     | 122.20          | -51.25       | Peak     |          |
| 3 * | 5751.1000    | 85.05                      | 13.08                   | 98.13                     | 122.20          | -24.07       | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |          |
|-----------|---------------------------------|--------------|----------|
| Test Mode | UNII-3_TX N(HT40) Mode 5795 MHz | Polarization | Vertical |
|-----------|---------------------------------|--------------|----------|

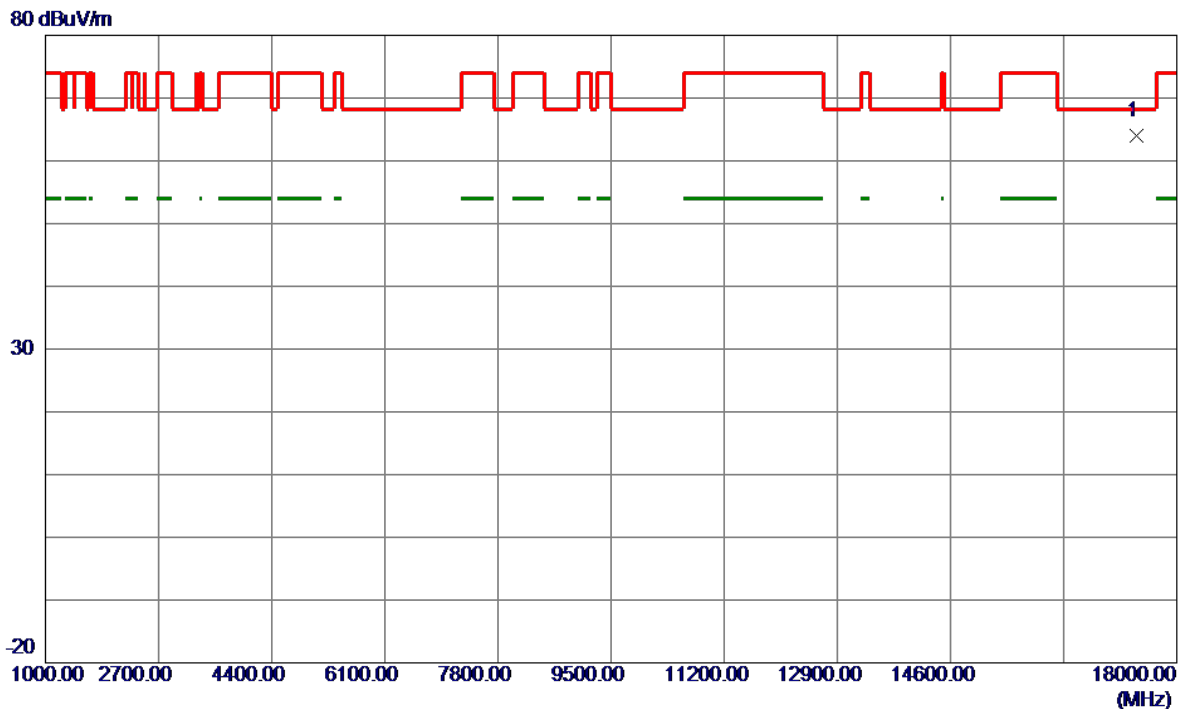


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17395.8750 | 53.77         | 10.22          | 63.99       | 68.20  | -4.21  | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                 |              |            |
|-----------|---------------------------------|--------------|------------|
| Test Mode | UNII-3_TX N(HT40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|---------------------------------|--------------|------------|

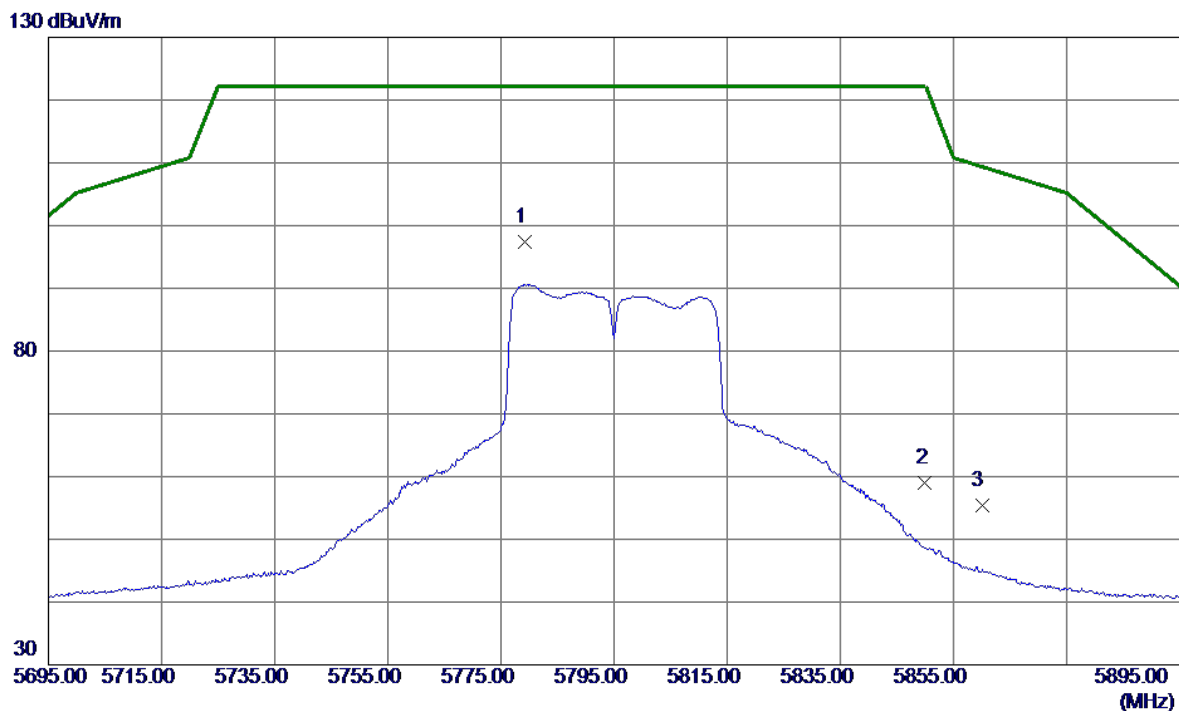


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5779.3000    | 84.32                      | 13.17                   | 97.49                     | 122.20          | -24.71       | Peak     | No Limit |
| 2   | 5850.0000    | 45.54                      | 13.40                   | 58.94                     | 122.20          | -63.26       | Peak     |          |
| 3   | 5860.0000    | 42.02                      | 13.43                   | 55.45                     | 109.40          | -53.95       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |          |
|-----------|-----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Vertical |
|-----------|-----------------------------------|--------------|----------|

80 dBuV/m

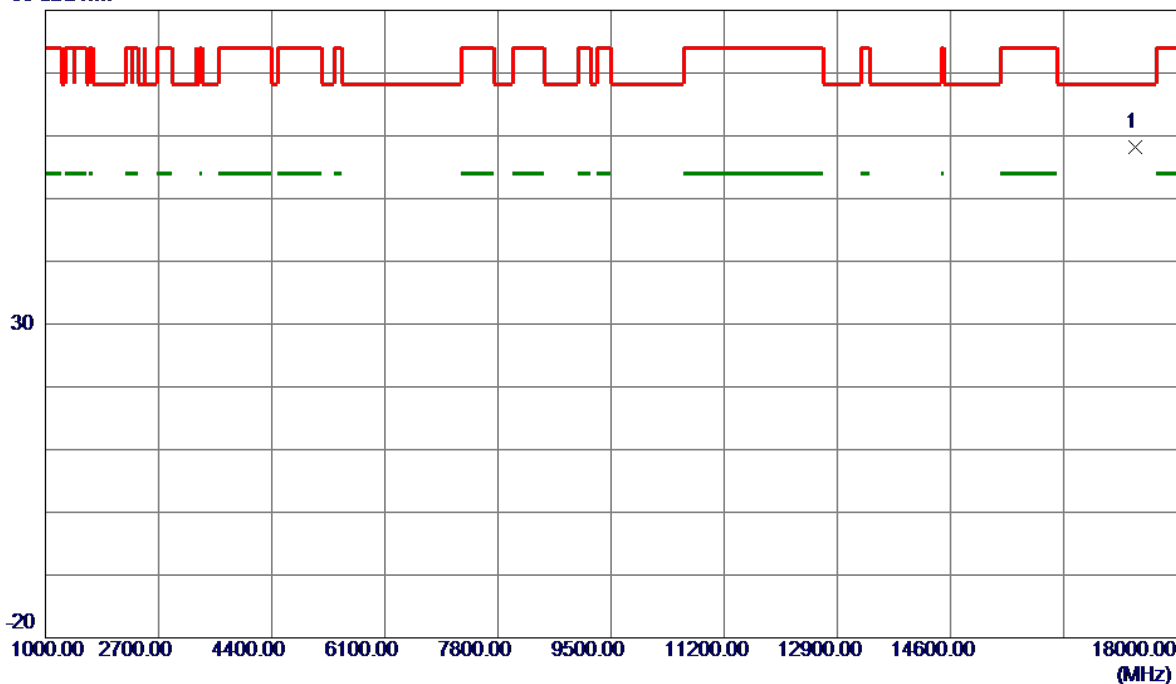


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17377.4000   | 47.96                      | 10.18                   | 58.14                     | 68.20           | -10.06       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                   |              |            |
|-----------|-----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AC(VHT80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|-----------------------------------|--------------|------------|

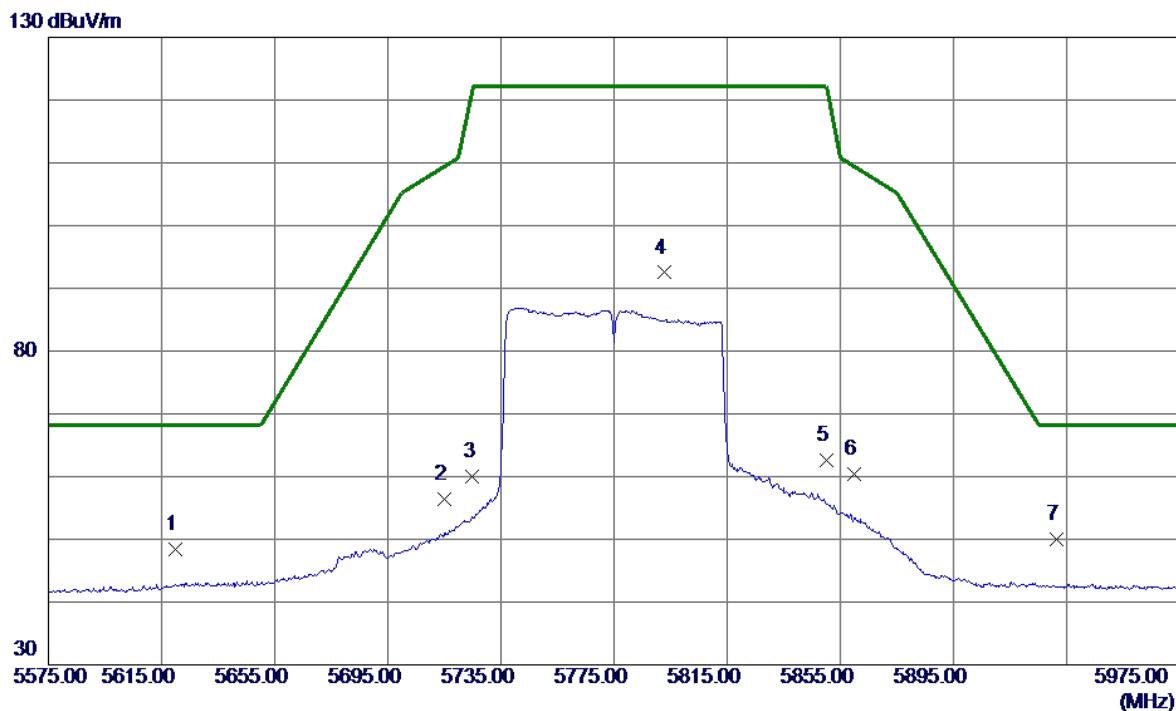


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5619.8000    | 35.80                      | 12.66                   | 48.46                     | 68.20           | -19.74       | Peak     |          |
| 2   | 5715.0000    | 43.44                      | 12.97                   | 56.41                     | 109.40          | -52.99       | Peak     |          |
| 3   | 5725.0000    | 47.08                      | 13.00                   | 60.08                     | 122.20          | -62.12       | Peak     |          |
| 4   | 5792.6000    | 79.29                      | 13.21                   | 92.50                     | 122.20          | -29.70       | Peak     | No Limit |
| 5   | 5850.0000    | 49.11                      | 13.40                   | 62.51                     | 122.20          | -59.69       | Peak     |          |
| 6   | 5860.0000    | 46.93                      | 13.43                   | 60.36                     | 109.40          | -49.04       | Peak     |          |
| 7 * | 5931.6000    | 36.36                      | 13.66                   | 50.02                     | 68.20           | -18.18       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

80 dBuV/m

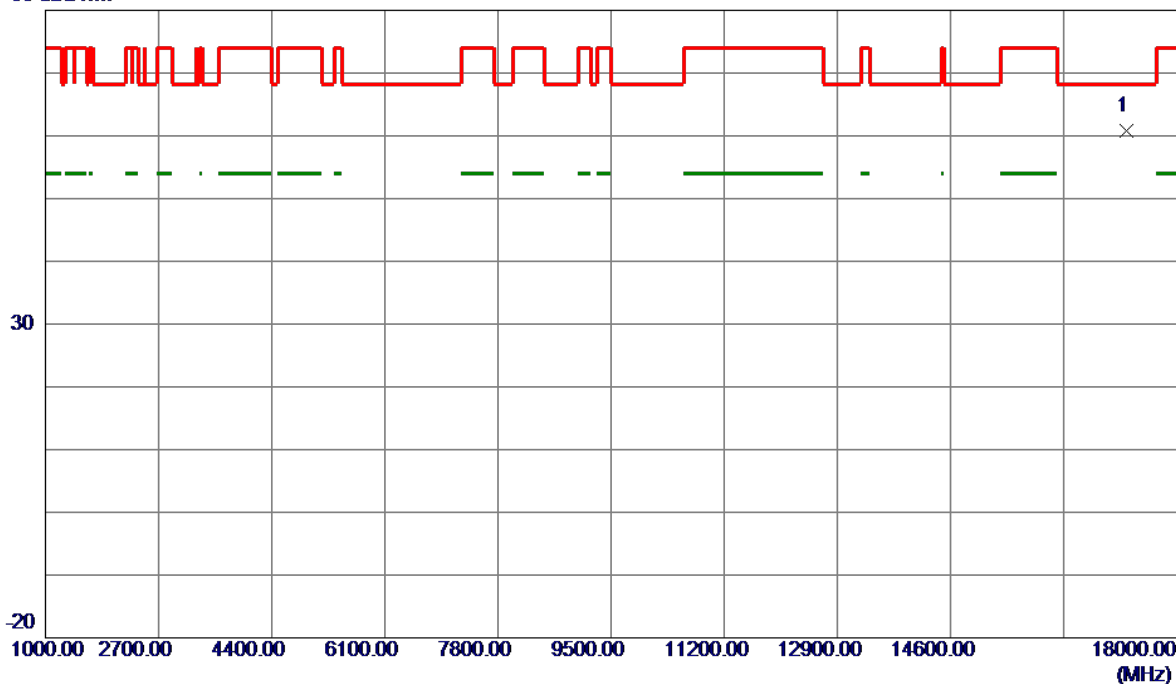


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17241.7000   | 50.97                      | 9.91                    | 60.88                     | 68.20           | -7.32        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5745 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

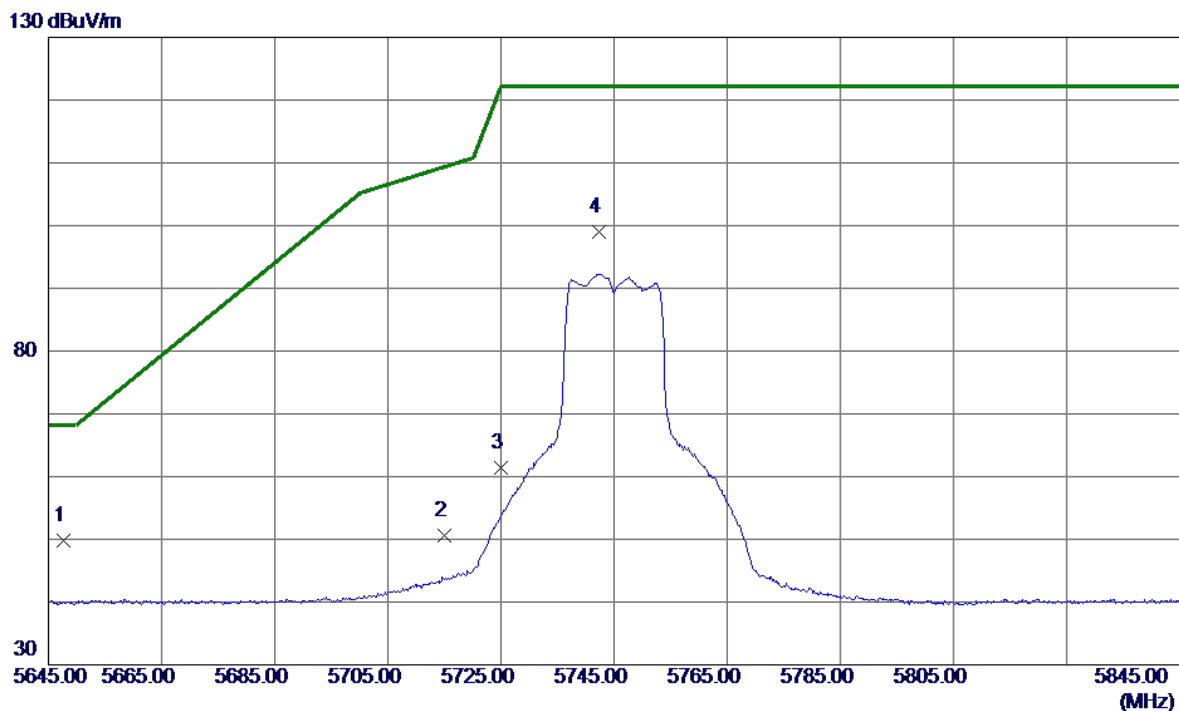


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5647.6000    | 36.97                      | 12.75                   | 49.72                     | 68.20           | -18.48       | Peak     |          |
| 2   | 5715.0000    | 37.55                      | 12.97                   | 50.52                     | 109.40          | -58.88       | Peak     |          |
| 3   | 5725.0000    | 48.49                      | 13.00                   | 61.49                     | 122.20          | -60.71       | Peak     |          |
| 4   | 5742.3000    | 85.94                      | 13.05                   | 98.99                     | 122.20          | -23.21       | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5785 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

80 dBuV/m

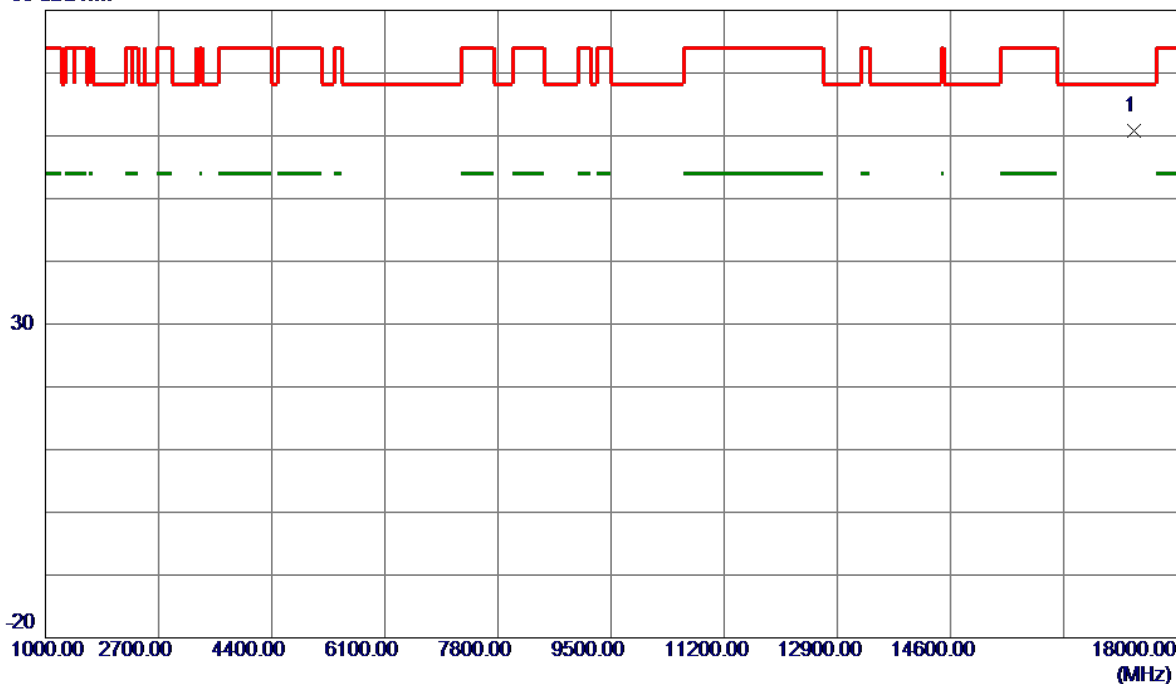


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17358.4000   | 50.60                      | 10.14                   | 60.74                     | 68.20           | -7.46        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

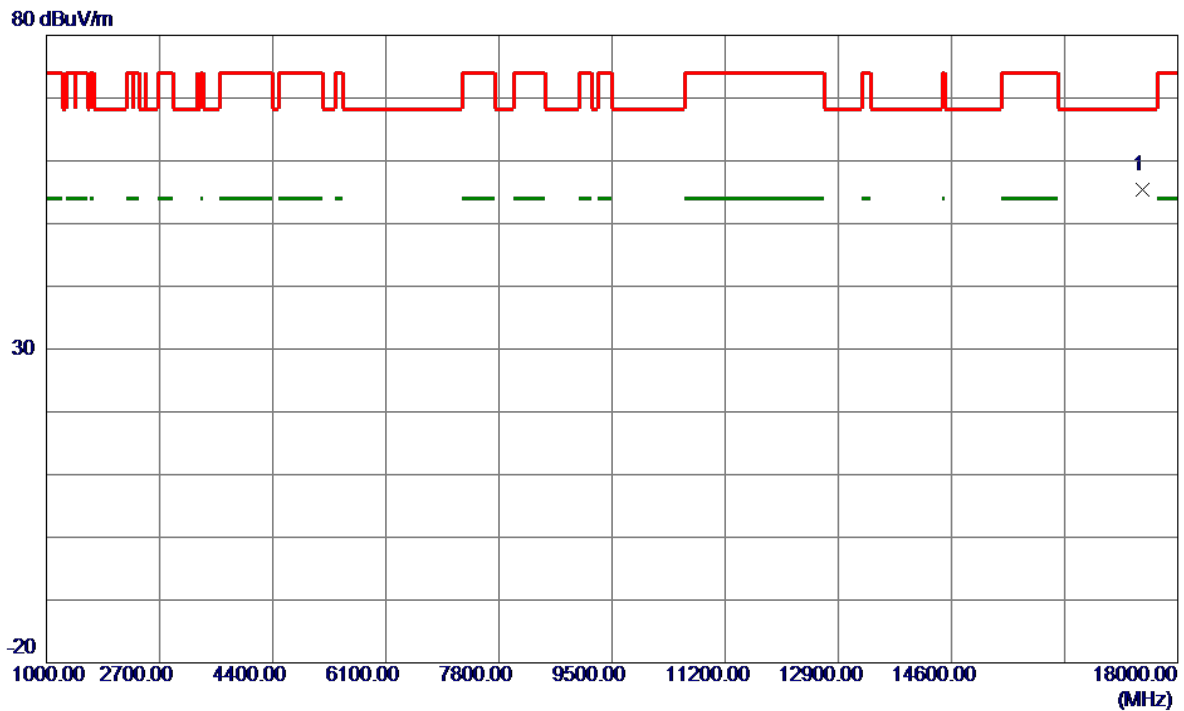


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17470.5500 | 44.95         | 10.37          | 55.32       | 68.20  | -12.88 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE20) Mode 5825 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

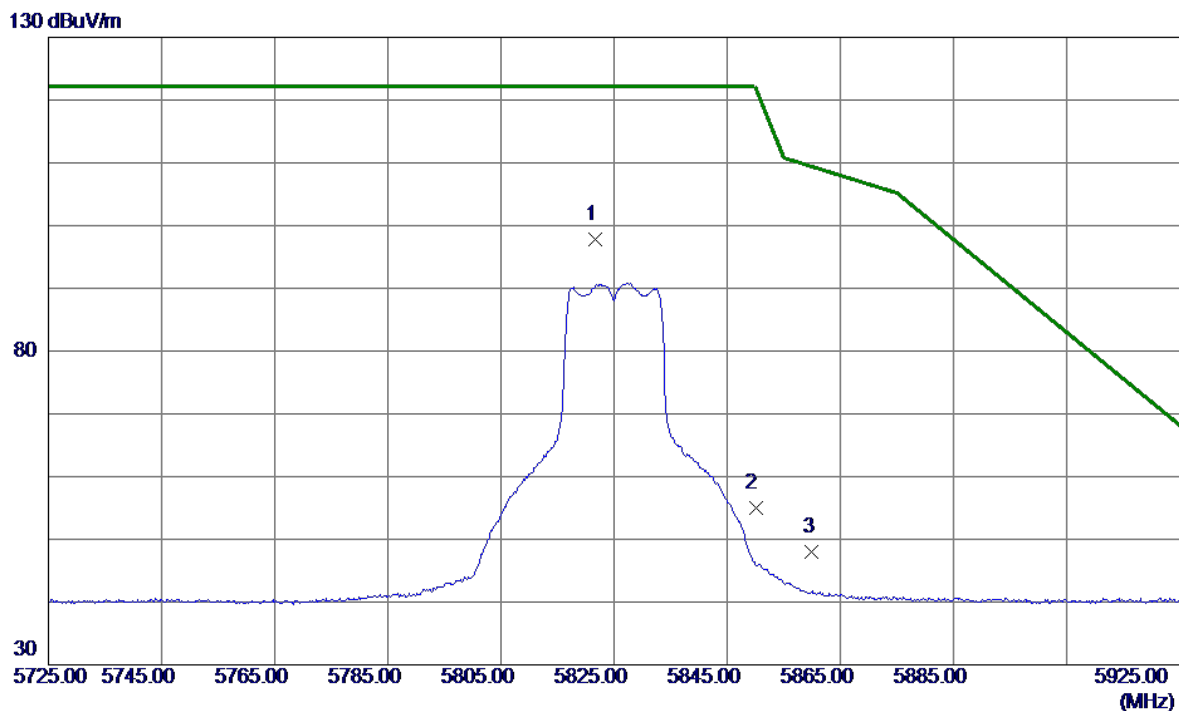


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5821.6000    | 84.51                      | 13.31                   | 97.82                     | 122.20          | -24.38       | Peak     | No Limit |
| 2   | 5850.0000    | 41.58                      | 13.40                   | 54.98                     | 122.20          | -67.22       | Peak     |          |
| 3   | 5860.0000    | 34.56                      | 13.43                   | 47.99                     | 109.40          | -61.41       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

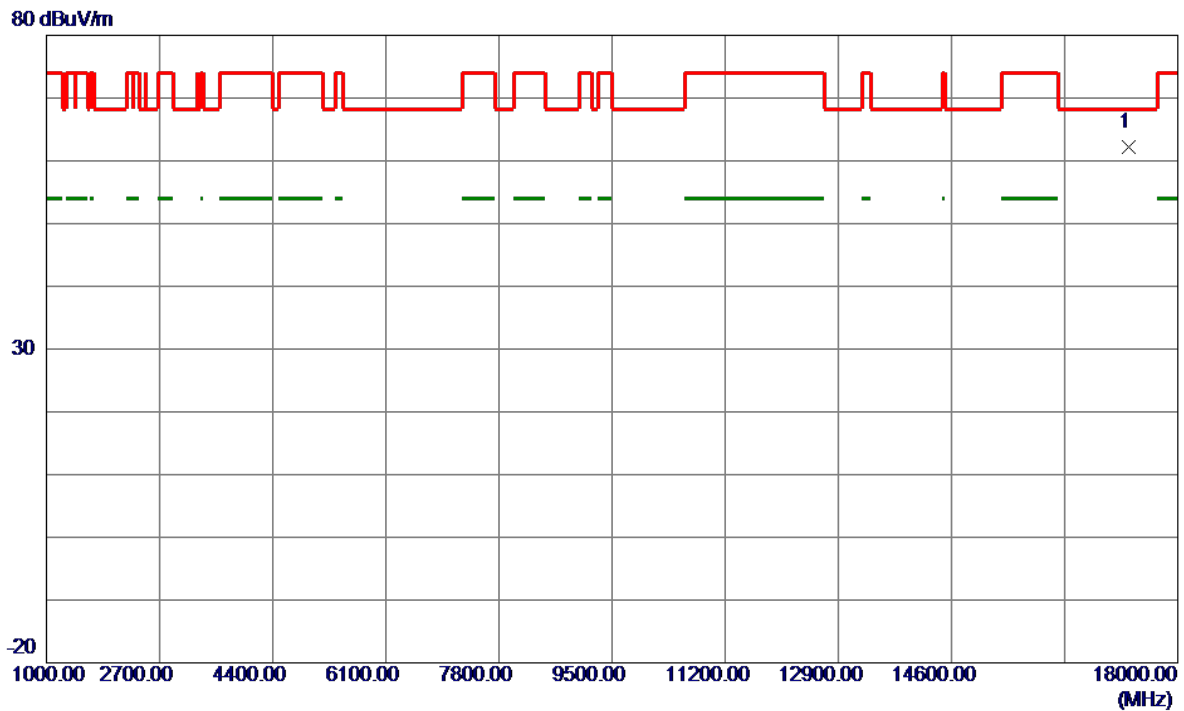


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17264.7750   | 52.22                      | 9.95                    | 62.17                     | 68.20           | -6.03        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5755 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

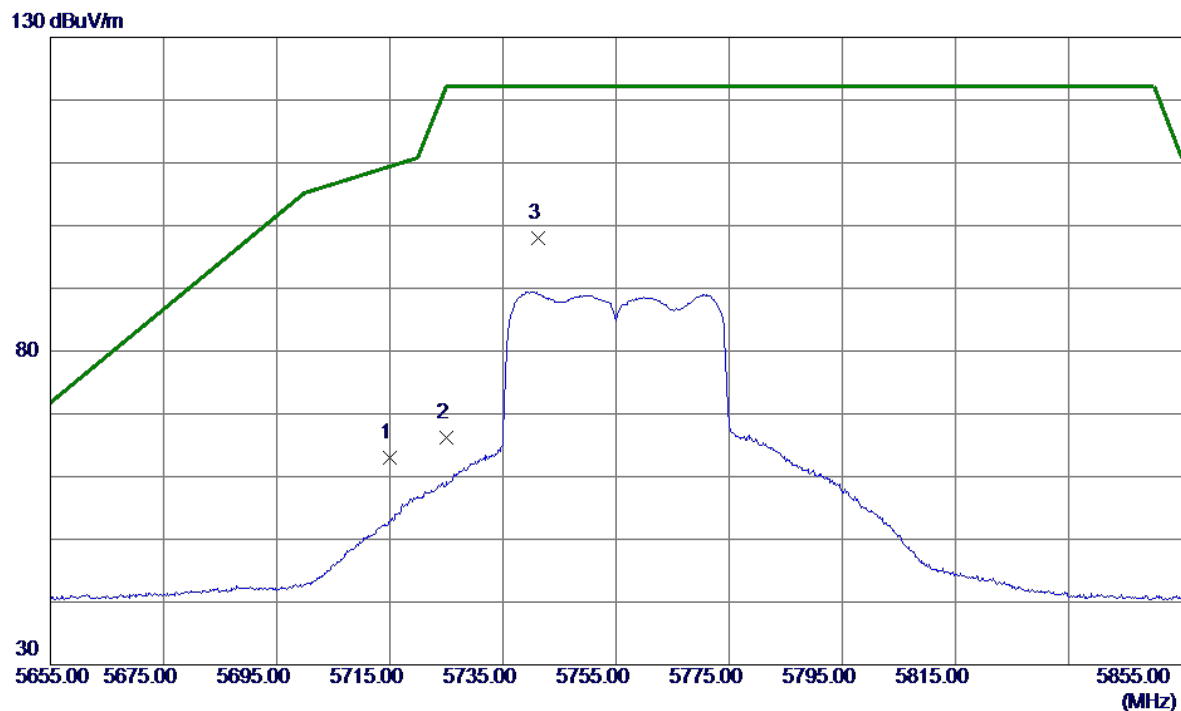


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5715.0000    | 50.11                      | 12.97                   | 63.08                     | 109.40          | -46.32       | Peak     |          |
| 2   | 5725.0000    | 53.18                      | 13.00                   | 66.18                     | 122.20          | -56.02       | Peak     |          |
| 3 * | 5741.2000    | 85.01                      | 13.05                   | 98.06                     | 122.20          | -24.14       | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

80 dBuV/m

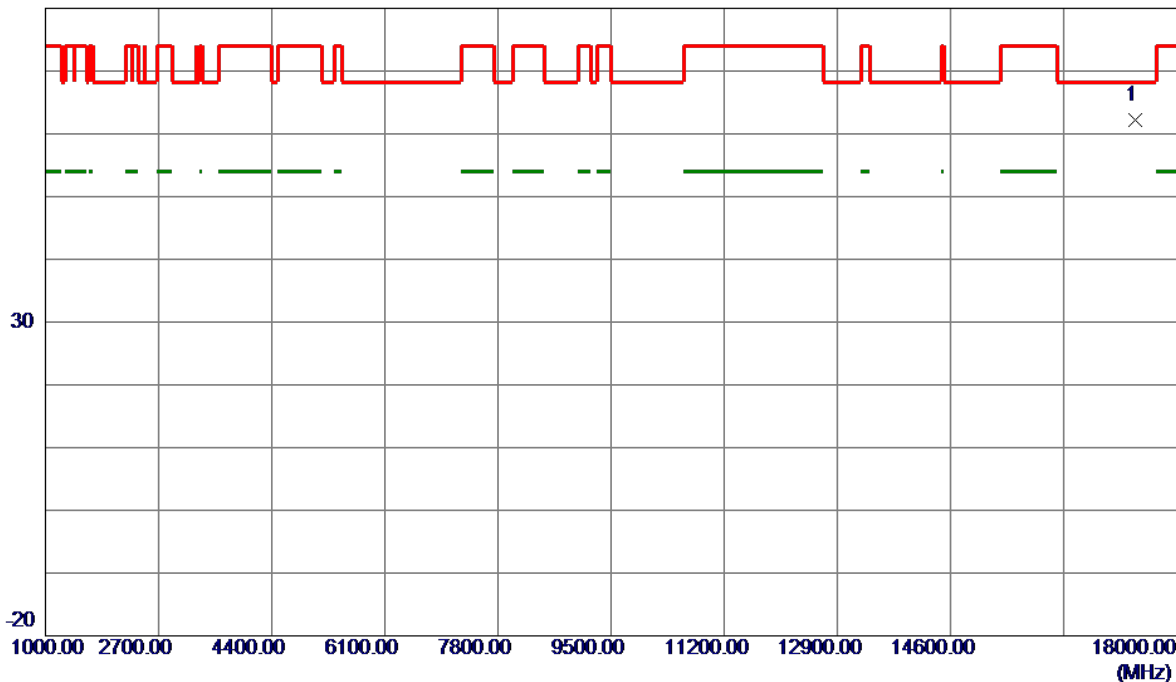


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 17379.1500   | 52.03                      | 10.19                   | 62.22                     | 68.20           | -5.98        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE40) Mode 5795 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

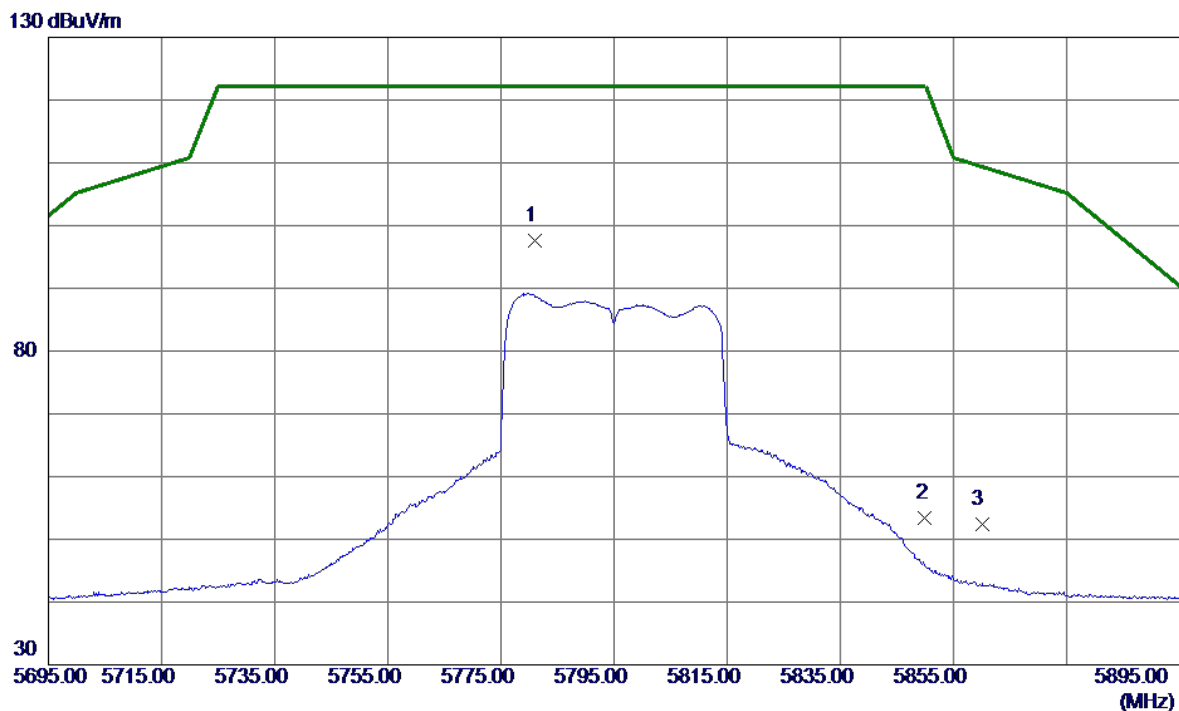


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 5781.1000    | 84.41                      | 13.18                   | 97.59                     | 122.20          | -24.61       | Peak     | No Limit |
| 2   | 5850.0000    | 40.09                      | 13.40                   | 53.49                     | 122.20          | -68.71       | Peak     |          |
| 3   | 5860.0000    | 39.01                      | 13.43                   | 52.44                     | 109.40          | -56.96       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |          |
|-----------|----------------------------------|--------------|----------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Vertical |
|-----------|----------------------------------|--------------|----------|

80 dBuV/m

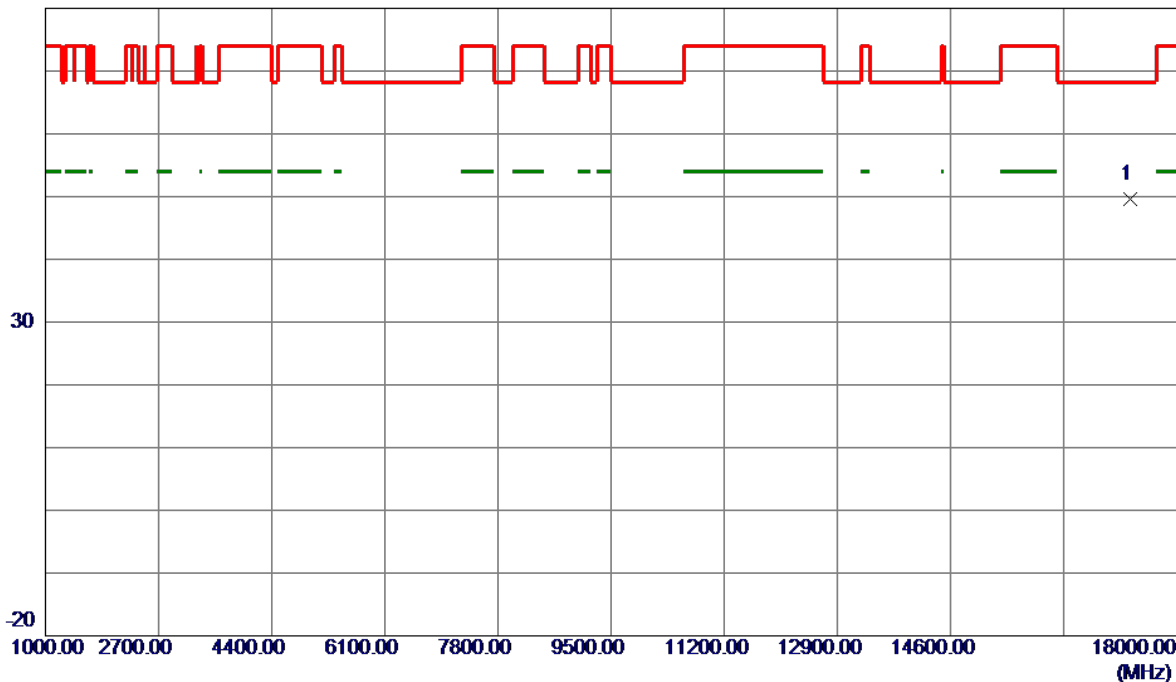


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 17299.5000 | 39.57         | 10.02          | 49.59       | 68.20  | -18.61 | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                  |              |            |
|-----------|----------------------------------|--------------|------------|
| Test Mode | UNII-3_TX AX(HE80) Mode 5775 MHz | Polarization | Horizontal |
|-----------|----------------------------------|--------------|------------|

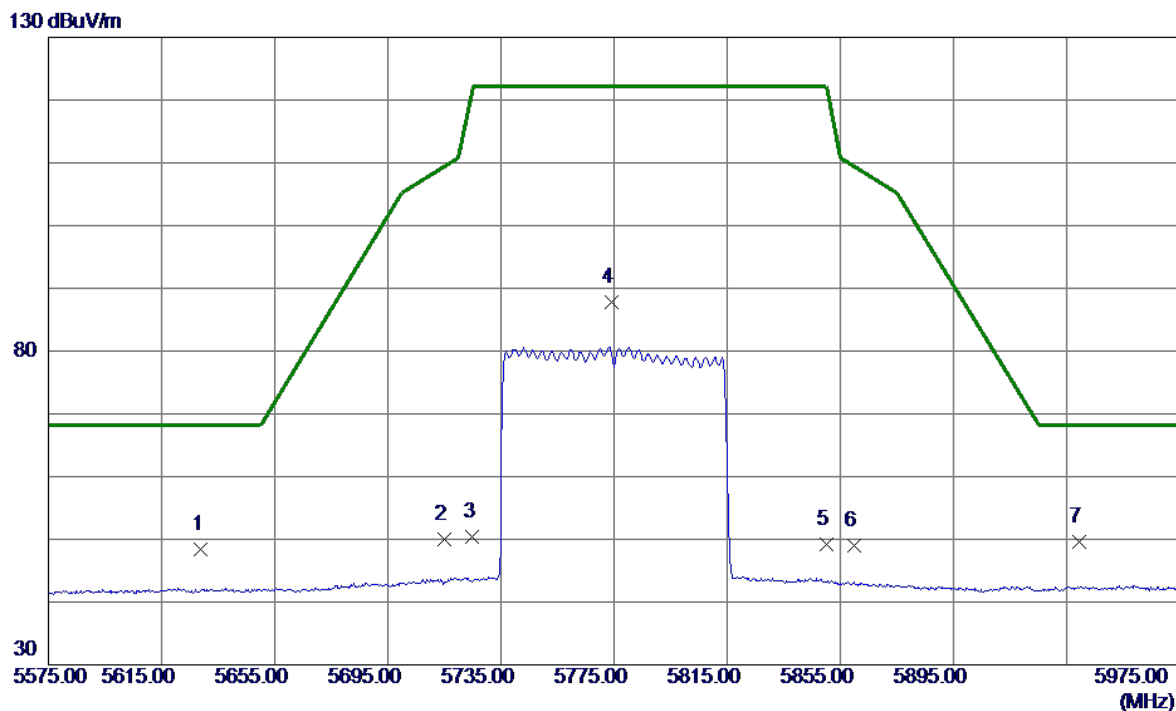


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 5629.0000    | 35.62                      | 12.69                   | 48.31                     | 68.20           | -19.89       | Peak     |          |
| 2   | 5715.0000    | 37.00                      | 12.97                   | 49.97                     | 109.40          | -59.43       | Peak     |          |
| 3   | 5725.0000    | 37.39                      | 13.00                   | 50.39                     | 122.20          | -71.81       | Peak     |          |
| 4   | 5774.2000    | 74.66                      | 13.16                   | 87.82                     | 122.20          | -34.38       | Peak     | No Limit |
| 5   | 5850.0000    | 35.73                      | 13.40                   | 49.13                     | 122.20          | -73.07       | Peak     |          |
| 6   | 5860.0000    | 35.63                      | 13.43                   | 49.06                     | 109.40          | -60.34       | Peak     |          |
| 7 * | 5939.6000    | 35.88                      | 13.69                   | 49.57                     | 68.20           | -18.63       | Peak     |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                                      |              |          |
|-----------|--------------------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode Channel 149 (UNII-3) | Polarization | Vertical |
|-----------|--------------------------------------|--------------|----------|

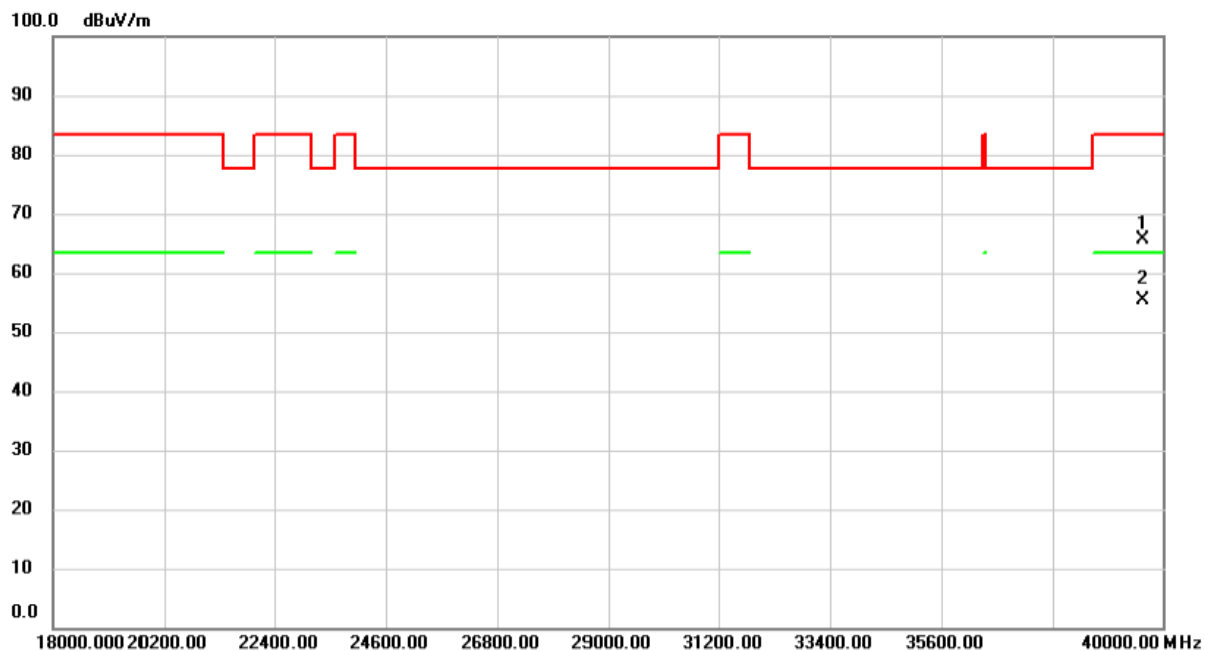


| No. | Mk. | Freq.     | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|-----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz       | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 39604.000 | 53.73         | 11.96          | 65.69       | 83.50  | -17.81 | peak     |         |
| 2   | *   | 39604.000 | 43.48         | 11.96          | 55.44       | 63.50  | -8.06  | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                                      |              |            |
|-----------|--------------------------------------|--------------|------------|
| Test Mode | TX N(HT20) Mode Channel 149 (UNII-3) | Polarization | Horizontal |
|-----------|--------------------------------------|--------------|------------|

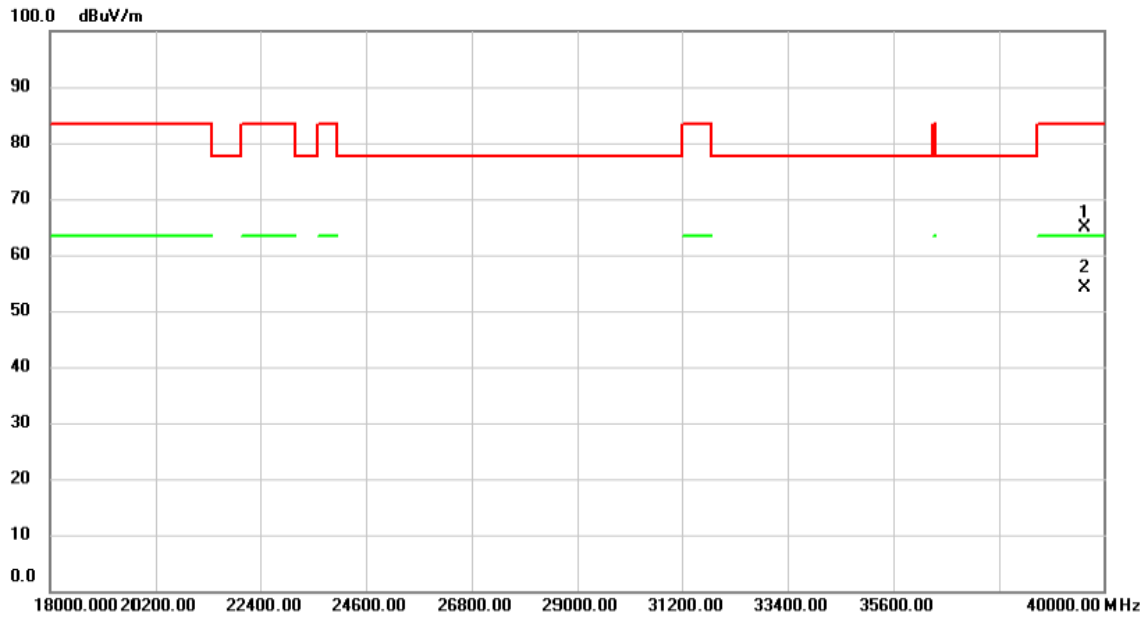

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 39593.000    | 52.81                    | 11.96                   | 64.77                      | 83.50           | -18.73       | peak     |         |
| 2   | *   | 39593.000    | 42.15                    | 11.96                   | 54.11                      | 63.50           | -9.39        | AVG      |         |

## REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX E - BANDWIDTH**

|           |                  |
|-----------|------------------|
| Test Mode | UNII-1_TX A Mode |
|-----------|------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 20.250                | 17.000                        |
| 40      | 5200            | 20.100                | 16.900                        |
| 48      | 5240            | 20.189                | 16.900                        |

CH36




Date: 9.MAY.2024 09:29:38

CH40  
26 dB Bandwidth




Date: 9.MAY.2024 09:30:45

CH48




Date: 9.MAY.2024 09:31:30


99 % Occupied Bandwidth



Date: 9.MAY.2024 09:29:14



Date: 9.MAY.2024 09:30:21




Date: 9.MAY.2024 09:31:06

|           |                        |
|-----------|------------------------|
| Test Mode | UNII-1_TX N(HT20) Mode |
|-----------|------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 21.150                | 17.900                        |
| 40      | 5200            | 23.050                | 17.900                        |
| 48      | 5240            | 25.350                | 17.900                        |

CH36




Date: 9.MAY.2024 10:18:25

CH40  
26 dB Bandwidth




Date: 9.MAY.2024 10:19:09

CH48

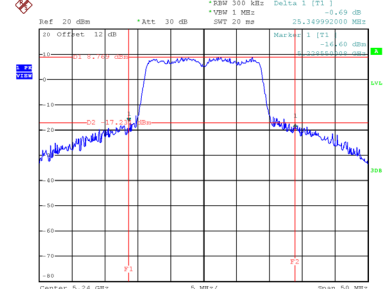


Date: 9.MAY.2024 10:19:54


99 % Occupied Bandwidth



Date: 9.MAY.2024 10:18:01



Date: 9.MAY.2024 10:18:45




Date: 9.MAY.2024 10:19:33



|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-1_TX AC(VHT80) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 82.200                | 76.400                        |

## CH42 26 dB Bandwidth

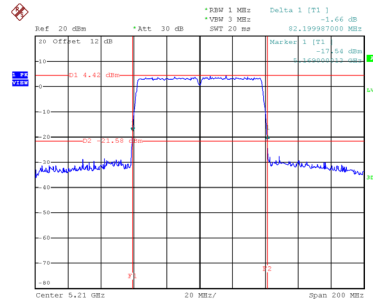

Date: 9.MAY.2024 11:42:36

## 99 % Occupied Bandwidth

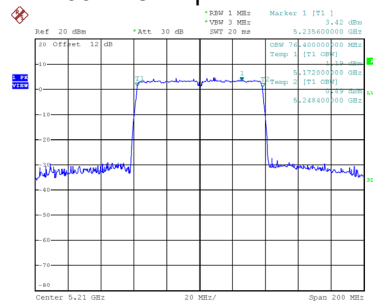


Date: 9.MAY.2024 11:42:07

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE20) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 36      | 5180            | 20.650                | 18.900                        |
| 40      | 5200            | 20.800                | 18.900                        |
| 48      | 5240            | 20.550                | 18.900                        |

CH36




Date: 9.MAY.2024 10:39:30

CH40  
26 dB Bandwidth




Date: 9.MAY.2024 10:40:13

CH48

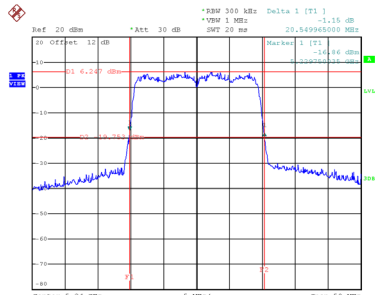


Date: 9.MAY.2024 10:40:59


99 % Occupied Bandwidth



Date: 9.MAY.2024 10:39:07



Date: 9.MAY.2024 10:39:48

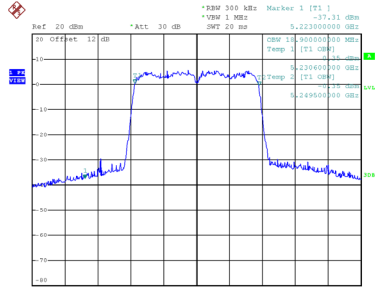


Date: 9.MAY.2024 10:40:35

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 38      | 5190            | 40.400                | 38.000                        |
| 46      | 5230            | 40.900                | 37.800                        |


CH38



|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-1_TX AX(HE80) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 42      | 5210            | 82.000                | 78.000                        |

## CH42 26 dB Bandwidth

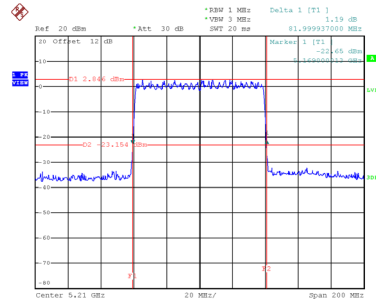

Date: 9.MAY.2024 11:50:42

## 99 % Occupied Bandwidth

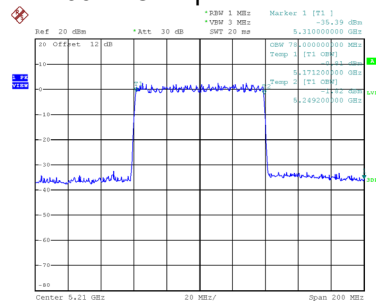


Date: 9.MAY.2024 11:50:12

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2A_TX A Mode |
|-----------|-------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 20.150                | 17.000                        |
| 60      | 5300            | 20.200                | 17.000                        |
| 64      | 5320            | 20.190                | 17.000                        |

CH52




Date: 9.MAY.2024 09:32:24

CH60  
26 dB Bandwidth




Date: 9.MAY.2024 09:33:52

CH64

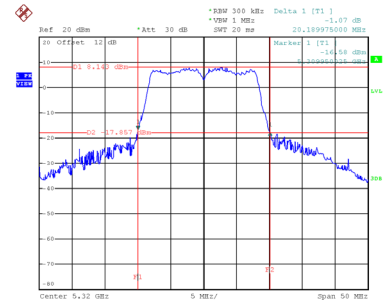


Date: 9.MAY.2024 09:35:12


99 % Occupied Bandwidth



Date: 9.MAY.2024 09:32:00



Date: 9.MAY.2024 09:33:29

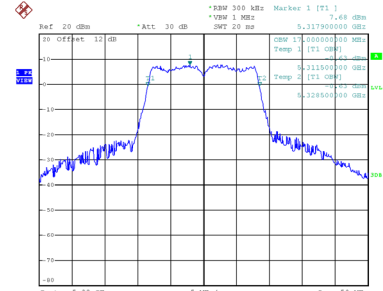


Date: 9.MAY.2024 09:34:45

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-2A_TX N(HT20) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 21.299                | 17.900                        |
| 60      | 5300            | 22.650                | 17.900                        |
| 64      | 5320            | 22.590                | 17.900                        |

CH52




Date: 9.MAY.2024 10:20:52

CH60  
26 dB Bandwidth




Date: 9.MAY.2024 10:29:10

CH64

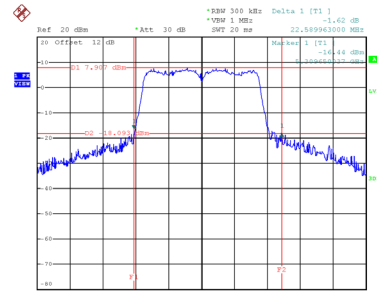


Date: 9.MAY.2024 10:29:55


99 % Occupied Bandwidth



Date: 9.MAY.2024 10:20:25



Date: 9.MAY.2024 10:28:47




Date: 9.MAY.2024 10:29:30

|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-2A_TX N(HT40) Mode |
|-----------|-------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 75.300                | 37.400                        |
| 62      | 5310            | 75.199                | 37.200                        |

CH54




Date: 13.MAY.2024 15:14:42

CH62  
26 dB Bandwidth

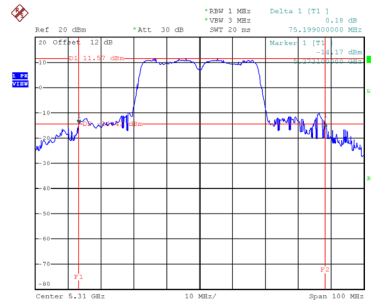


Date: 9.MAY.2024 11:14:45

99 % Occupied Bandwidth



Date: 9.MAY.2024 10:58:15

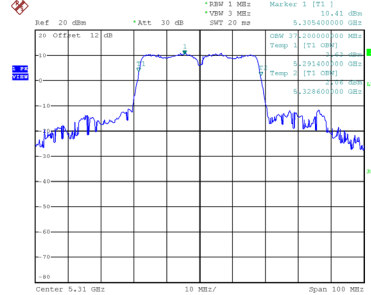


Date: 9.MAY.2024 11:05:46

|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2A_TX AC(VHT80) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 58      | 5290            | 82.600                | 76.800                        |

## CH58 26 dB Bandwidth

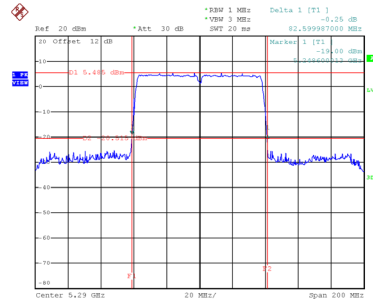

Date: 9.MAY.2024 11:43:31

## 99 % Occupied Bandwidth

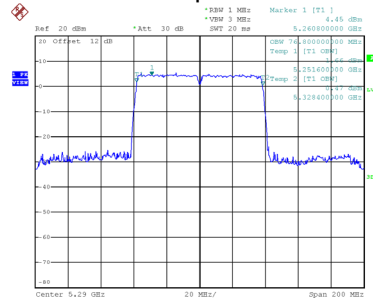


Date: 9.MAY.2024 11:43:02

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE20) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 52      | 5260            | 20.700                | 18.800                        |
| 60      | 5300            | 20.850                | 18.900                        |
| 64      | 5320            | 20.750                | 18.800                        |

CH52




Date: 9.MAY.2024 10:41:50

CH60  
26 dB Bandwidth




Date: 9.MAY.2024 10:42:37

CH64

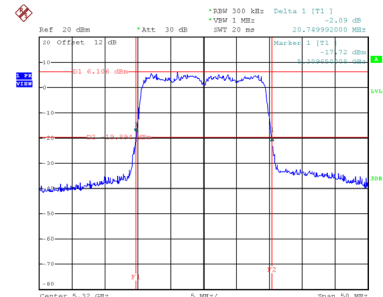


Date: 9.MAY.2024 10:43:27


99 % Occupied Bandwidth



Date: 9.MAY.2024 10:41:27



Date: 9.MAY.2024 10:42:14




Date: 9.MAY.2024 10:43:03

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE40) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 54      | 5270            | 40.500                | 38.000                        |
| 62      | 5310            | 40.700                | 38.000                        |

CH54




Date: 9.MAY.2024 11:23:28

CH62  
26 dB Bandwidth

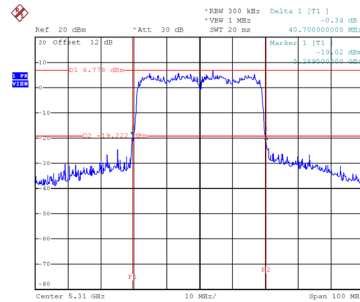


Date: 9.MAY.2024 11:24:20

99 % Occupied Bandwidth



Date: 9.MAY.2024 11:22:57

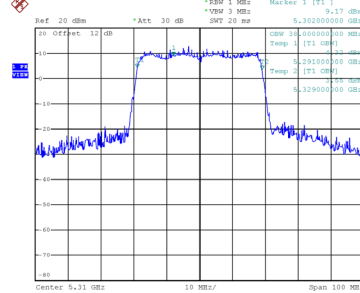


Date: 9.MAY.2024 11:23:49

|           |                          |
|-----------|--------------------------|
| Test Mode | UNII-2A_TX AX(HE80) Mode |
|-----------|--------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 58      | 5290            | 81.800                | 78.000                        |

## CH58 26 dB Bandwidth

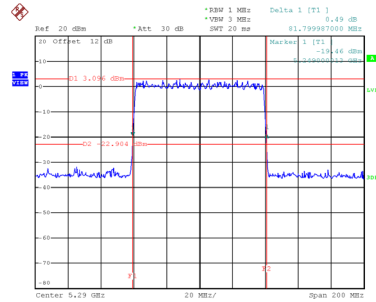

Date: 9.MAY.2024 11:51:36

## 99 % Occupied Bandwidth

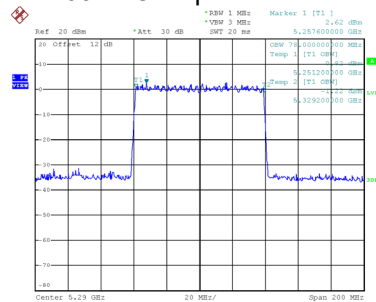


Date: 9.MAY.2024 11:51:07

|           |                   |
|-----------|-------------------|
| Test Mode | UNII-2C_TX A Mode |
|-----------|-------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 100     | 5500            | 20.290                | 17.000                        |
| 116     | 5580            | 20.150                | 17.000                        |
| 140     | 5700            | 20.200                | 17.000                        |

CH100




Date: 9.MAY.2024 09:36:04

CH116  
26 dB Bandwidth




Date: 9.MAY.2024 09:36:53

CH140

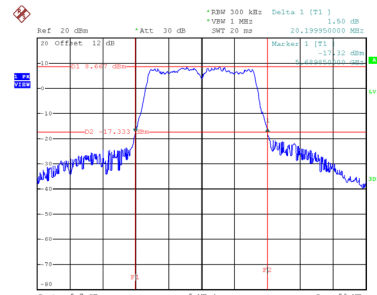


Date: 9.MAY.2024 09:37:55


99 % Occupied Bandwidth



Date: 9.MAY.2024 09:35:39



Date: 9.MAY.2024 09:36:29




Date: 9.MAY.2024 09:37:32




|           |                         |
|-----------|-------------------------|
| Test Mode | UNII-2C_TX N(HT40) Mode |
|-----------|-------------------------|

| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 102     | 5510            | 47.300                | 37.000                        |
| 110     | 5550            | 40.500                | 37.000                        |
| 134     | 5670            | 82.100                | 38.000                        |


CH102






CH110  
26 dB Bandwidth



CH134

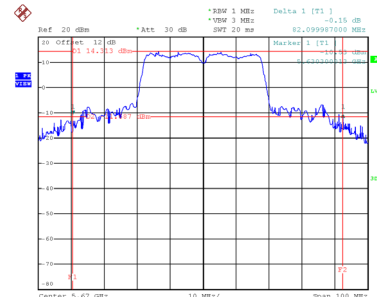


99 % Occupied Bandwidth



|           |                           |
|-----------|---------------------------|
| Test Mode | UNII-2C_TX AC(VHT80) Mode |
|-----------|---------------------------|


| Channel | Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 106     | 5530            | 82.800                | 76.800                        |
| 122     | 5610            | 82.408                | 76.800                        |

CH106




Date: 9.MAY.2024 11:44:32

CH122  
26 dB Bandwidth

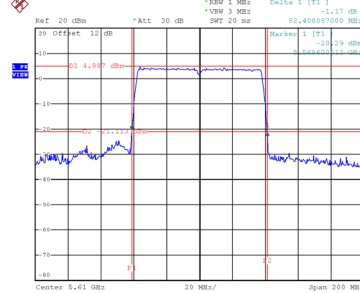


Date: 9.MAY.2024 11:47:36

99 % Occupied Bandwidth



Date: 9.MAY.2024 11:44:03

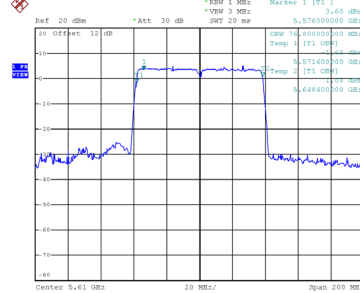

Date: 9.MAY.2024 11:47:06