


**Appendix C. Test Result and Data (Above 1GHz)****Test Result and Data (Bandedge)****ANT 1**

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

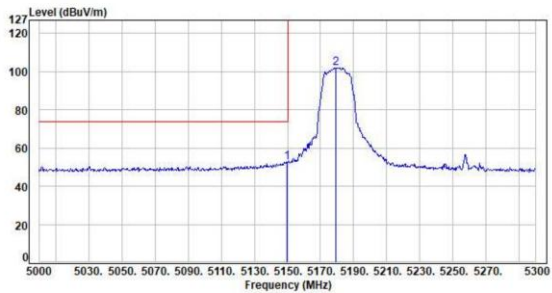

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5149.70         | -0.07       | 52.81          | 52.74          | 74.00          | -21.26      | Peak     | 113         | 80            | P   |
| 2   | 5179.10         | -0.07       | 102.19         | 102.12         | 200.00         | -97.88      | Peak     | 113         | 80            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

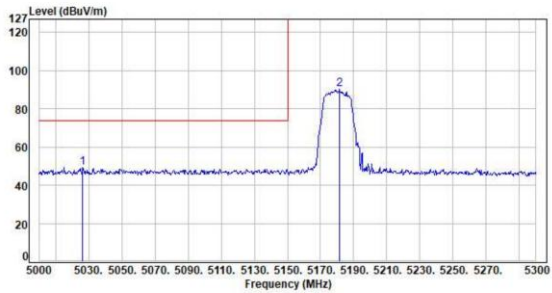

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5026.40         | 0.09        | 49.14          | 49.23          | 74.00          | -24.77      | Peak     | 100         | 129           | P   |
| 2   | 5181.20         | -0.07       | 90.23          | 90.16          | 200.00         | -109.84     | Peak     | 100         | 129           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

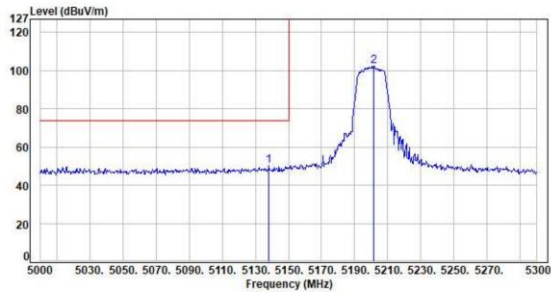

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5130.30         | -0.05       | 50.24          | 50.19          | 74.00          | -23.81      | Peak     | 100         | 79            | P   |
| 2   | 5201.68         | -0.08       | 102.55         | 102.47         | 200.00         | -97.53      | Peak     | 100         | 79            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

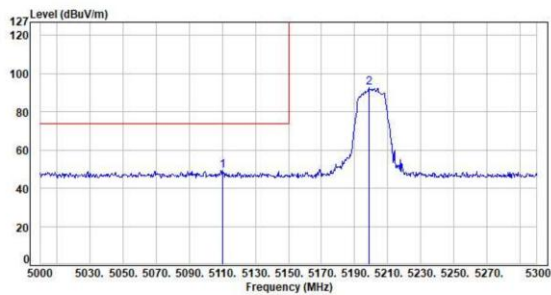

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5110.40         | 0.01        | 49.22          | 49.23          | 74.00          | -24.77      | Peak     | 105         | 127           | P   |
| 2   | 5198.60         | -0.08       | 92.59          | 92.51          | 200.00         | -107.49     | Peak     | 105         | 127           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Peak

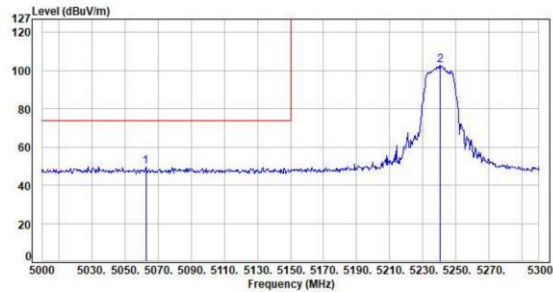

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5062.70         | 0.04        | 49.81          | 49.85          | 74.00          | -24.15      | Peak     | 100         | 78            | P   |
| 2   | 5240.38         | -0.24       | 102.92         | 102.68         | 200.00         | -97.32      | Peak     | 100         | 78            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Peak

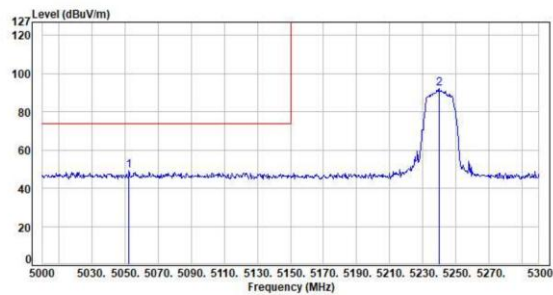

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5052.50         | 0.04        | 49.12          | 49.16          | 74.00          | -24.84      | Peak     | 100         | 128           | P   |
| 2   | 5239.70         | -0.24       | 92.35          | 92.11          | 200.00         | -107.89     | Peak     | 100         | 128           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH36 NSS1 MCS0  
Pol : Vertical Detector : Peak

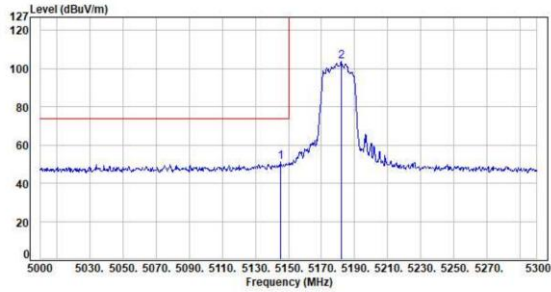

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5145.20         | -0.07       | 51.04          | 50.97          | 74.00          | -23.03      | Peak     | 114         | 79            | P   |
| 2   | 5181.08         | -0.08       | 104.08         | 104.00         | 200.00         | -96.00      | Peak     | 114         | 79            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH36 NSS1 MCS0  
Pol : Horizontal Detector : Peak

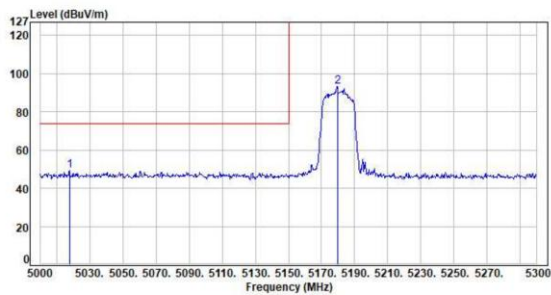

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5017.70         | 0.10        | 49.07          | 49.17          | 74.00          | -24.83      | Peak     | 107         | 129           | P   |
| 2   | 5179.70         | -0.07       | 93.13          | 93.06          | 200.00         | -106.94     | Peak     | 107         | 129           | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax20 CH40 NSS1 MCS0

Pol : Vertical

Detector : Peak

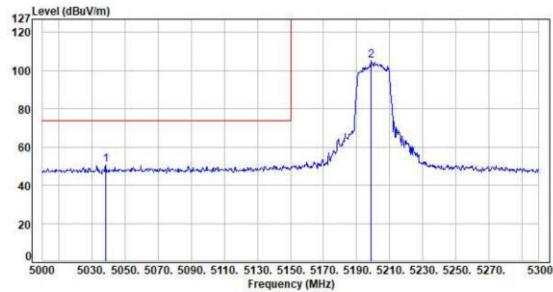

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5038.40         | 0.06        | 50.83          | 50.89          | 74.00          | -23.11      | Peak     | 122         | 78            | P   |
| 2   | 5198.60         | -0.08       | 105.16         | 105.08         | 200.00         | -94.92      | Peak     | 122         | 78            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH40 NSS1 MCS0

Pol : Horizontal

Detector : Peak

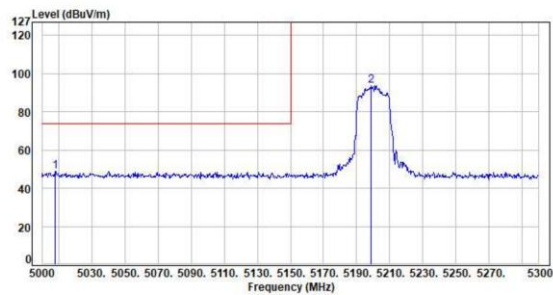

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5007.80         | 0.12        | 48.46          | 48.58          | 74.00          | -25.42      | Peak     | 100         | 127           | P   |
| 2   | 5198.60         | -0.08       | 93.81          | 93.73          | 200.00         | -106.27     | Peak     | 100         | 127           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH48 NSS1 MCS0  
Pol : Vertical Detector : Peak

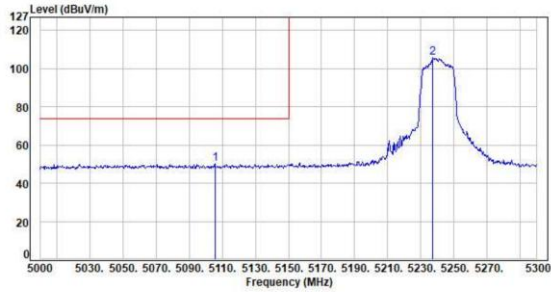

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5105.60         | 0.03        | 49.97          | 50.00          | 74.00          | -24.00      | Peak     | 100         | 77            | P   |
| 2   | 5237.38         | -0.23       | 105.75         | 105.52         | 200.00         | -94.48      | Peak     | 100         | 77            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH48 NSS1 MCS0  
Pol : Horizontal Detector : Peak

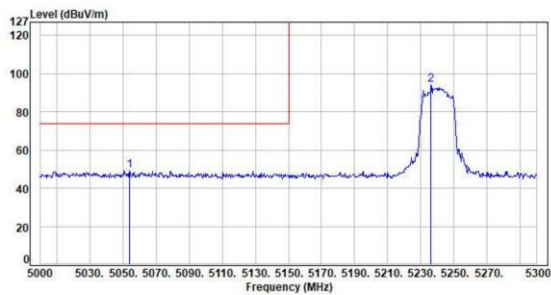


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5054.30         | 0.04        | 49.32          | 49.36          | 74.00          | -24.64      | Peak     | 104         | 127           | P   |
| 2   | 5236.10         | -0.22       | 94.28          | 94.06          | 200.00         | -105.94     | Peak     | 104         | 127           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH38 NSS1 MCS0  
Pol : Vertical Detector : Peak

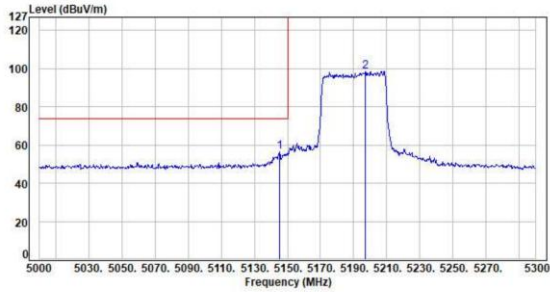

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5145.20         | -0.07       | 56.62          | 56.55          | 74.00          | -17.45      | Peak     | 100         | 80            | P   |
| 2   | 5197.10         | -0.08       | 98.70          | 98.62          | 200.00         | -101.38     | Peak     | 100         | 80            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH38 NSS1 MCS0  
Pol : Vertical Detector : Average

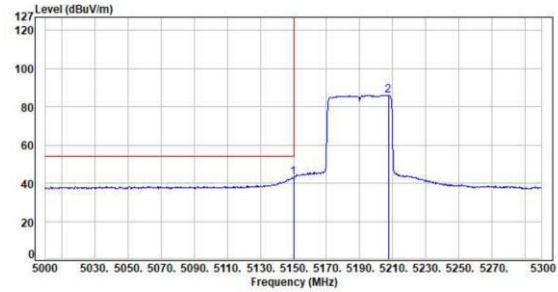

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | -0.07       | 42.97          | 42.90          | 54.00          | -11.10      | Average  | 100         | 80            | P   |
| 2   | 5197.30         | -0.11       | 86.20          | 86.09          | 200.00         | -113.91     | Average  | 100         | 80            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH38 NSS1 MCS0  
Pol : Horizontal Detector : Peak

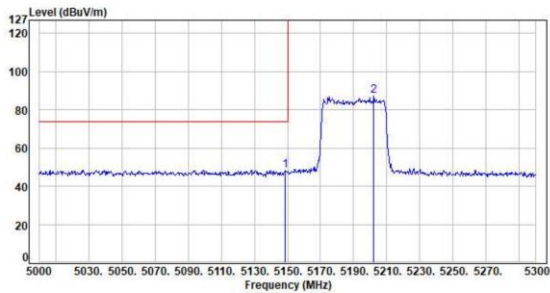

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5148.80         | -0.07       | 48.55          | 48.48          | 74.00          | -25.52      | Peak     | 100         | 128           | P   |
| 2   | 5202.20         | -0.08       | 87.31          | 87.23          | 200.00         | -112.77     | Peak     | 100         | 128           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH38 NSS1 MCS0  
Pol : Horizontal Detector : Average

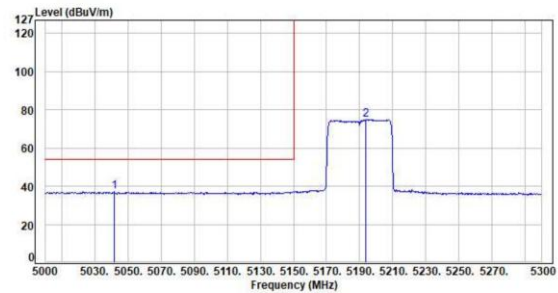


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5041.70         | 0.06        | 37.18          | 37.24          | 54.00          | -16.76      | Average  | 100         | 128           | P   |
| 2   | 5193.80         | -0.08       | 75.09          | 75.01          | 200.00         | -124.99     | Average  | 100         | 128           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH46 NSS1 MCS0  
Pol : Vertical Detector : Peak

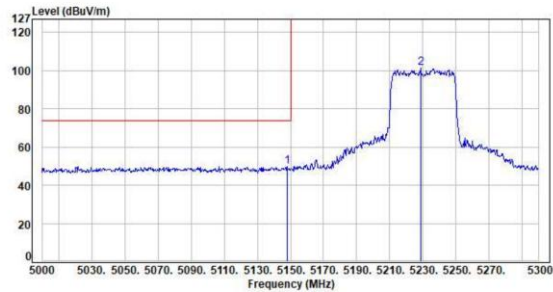

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5147.90         | -0.07       | 49.89          | 49.82          | 74.00          | -24.18      | Peak     | 100         | 78            | P   |
| 2   | 5228.60         | -0.19       | 101.38         | 101.19         | 200.00         | -98.81      | Peak     | 100         | 78            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH46 NSS1 MCS0  
Pol : Horizontal Detector : Peak

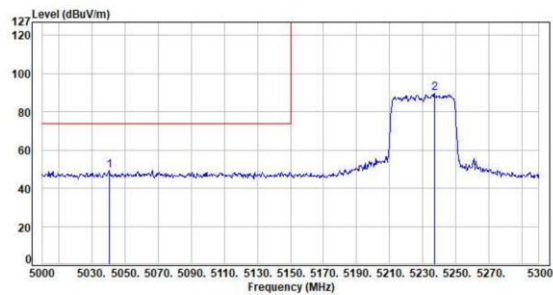


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5040.50         | 0.06        | 49.21          | 49.27          | 74.00          | -24.73      | Peak     | 106         | 129           | P   |
| 2   | 5237.00         | -0.23       | 89.81          | 89.58          | 200.00         | -110.42     | Peak     | 106         | 129           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Vertical Detector : Peak

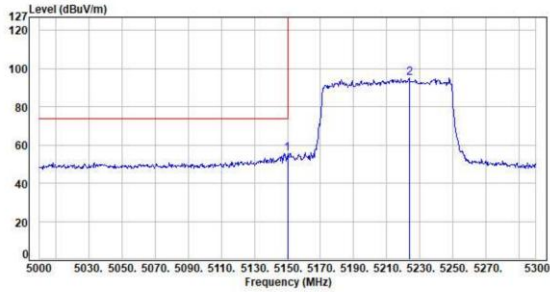

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | -0.07       | 55.68          | 55.61          | 74.00          | -18.39      | Peak     | 100         | 78            | P   |
| 2   | 5223.58         | -0.17       | 95.19          | 95.02          | 200.00         | -104.98     | Peak     | 100         | 78            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Vertical Detector : Average

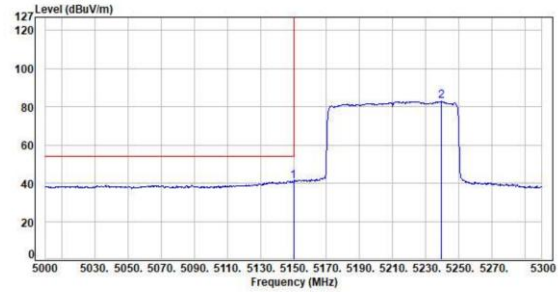

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5150.00         | -0.07       | 41.12          | 41.05          | 54.00          | -12.95      | Average  | 100         | 78            | P   |
| 2   | 5223.58         | -0.24       | 83.14          | 82.90          | 200.00         | -117.10     | Average  | 100         | 78            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Horizontal Detector : Peak

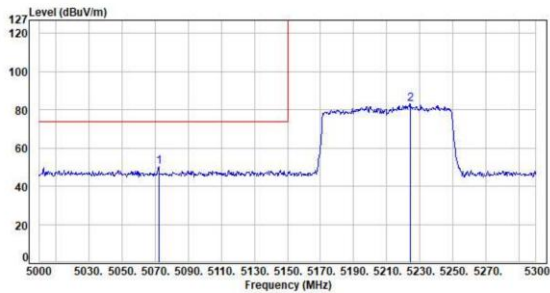

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5072.30         | 0.03        | 50.04          | 50.07          | 74.00          | -23.93      | Peak     | 112         | 130           | P   |
| 2   | 5224.40         | -0.18       | 83.17          | 82.99          | 200.00         | -117.01     | Peak     | 112         | 130           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Horizontal Detector : Average

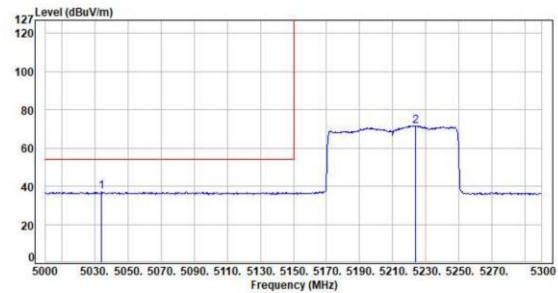

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5034.20         | 0.06        | 37.02          | 37.08          | 54.00          | -16.92      | Average  | 112         | 130           | P   |
| 2   | 5223.50         | -0.17       | 71.68          | 71.51          | 200.00         | -128.49     | Average  | 112         | 130           | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Peak

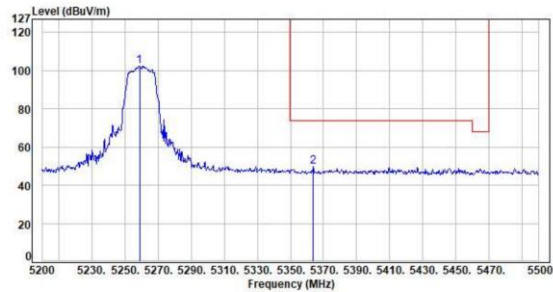

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5258.80         | -0.36       | 102.73         | 102.43         | 200.00         | -97.57      | Peak     | 100         | 103           | P   |
| 2   | 5363.88         | -0.36       | 49.97          | 49.61          | 74.00          | -24.39      | Peak     | 100         | 103           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Peak

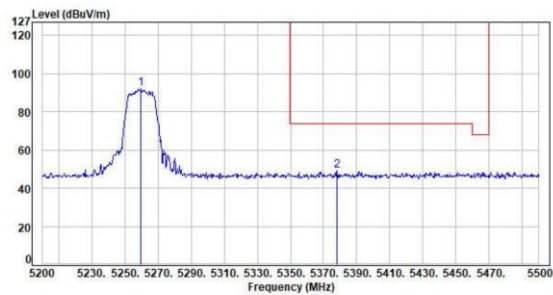

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5259.70         | -0.30       | 92.29          | 91.99          | 200.00         | -108.01     | Peak     | 100         | 127           | P   |
| 2   | 5377.90         | -0.33       | 49.41          | 49.08          | 74.00          | -24.92      | Peak     | 100         | 127           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11a CH60 6Mbps  
Pol : Vertical Detector : Peak

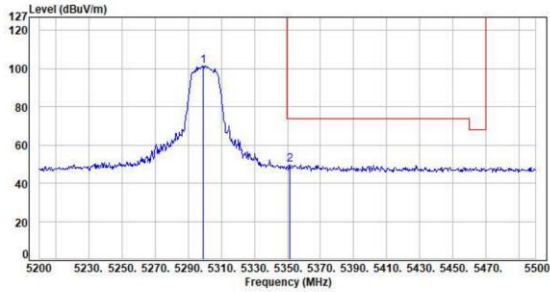

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5299.00         | -0.38       | 101.78         | 101.40         | 200.00         | -98.60      | Peak     | 100         | 80            | P   |
| 2   | 5351.20         | -0.39       | 49.98          | 49.59          | 74.00          | -24.41      | Peak     | 100         | 80            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps  
Pol : Horizontal Detector : Peak

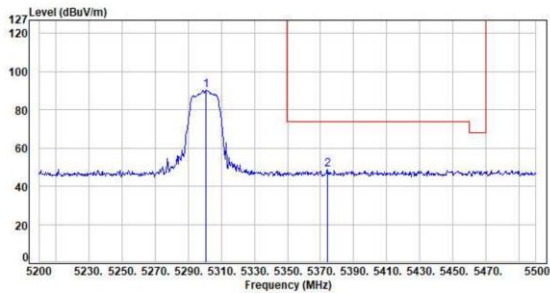

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5300.80         | -0.38       | 90.67          | 90.29          | 200.00         | -109.71     | Peak     | 100         | 128           | P   |
| 2   | 5374.00         | -0.34       | 48.93          | 48.59          | 74.00          | -25.41      | Peak     | 100         | 128           | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Peak

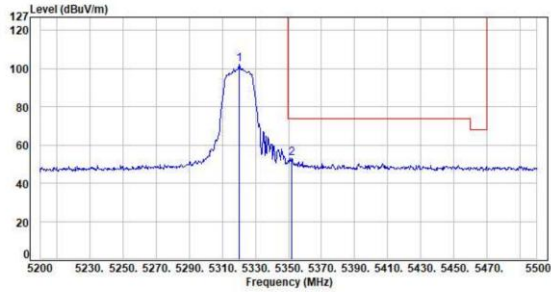

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5320.30         | -0.39       | 102.64         | 102.25         | 200.00         | -97.75      | Peak     | 118         | 70            | P   |
| 2   | 5352.10         | -0.39       | 53.47          | 53.08          | 74.00          | -20.92      | Peak     | 118         | 70            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Peak

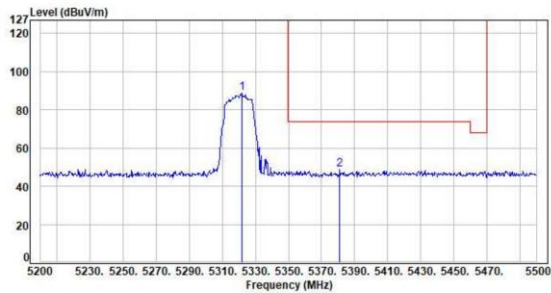

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5321.00         | -0.39       | 89.39          | 89.00          | 200.00         | -111.00     | Peak     | 100         | 127           | P   |
| 2   | 5300.90         | -0.33       | 49.09          | 48.76          | 74.00          | -25.24      | Peak     | 100         | 127           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH52 NSS1 MCS0  
Pol : Vertical Detector : Peak

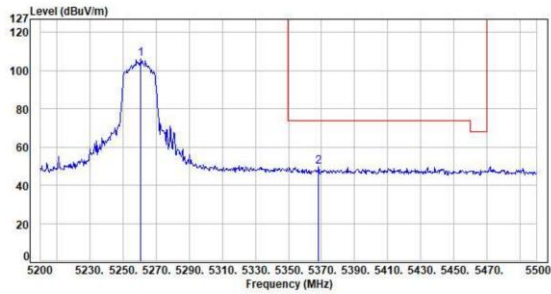

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5260.90         | -0.30       | 106.39         | 106.09         | 200.00         | -93.91      | Peak     | 100         | 103           | P   |
| 2   | 5368.38         | -0.34       | 50.15          | 49.81          | 74.00          | -24.19      | Peak     | 100         | 103           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH52 NSS1 MCS0  
Pol : Horizontal Detector : Peak

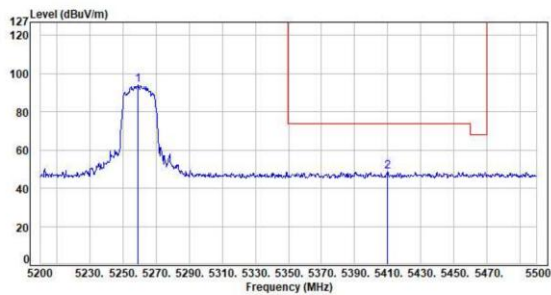


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5259.10         | -0.30       | 94.28          | 93.98          | 200.00         | -106.02     | Peak     | 115         | 130           | P   |
| 2   | 5410.00         | -0.27       | 49.24          | 48.97          | 74.00          | -25.03      | Peak     | 115         | 130           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH60 NSS1 MCS0  
Pol : Vertical Detector : Peak

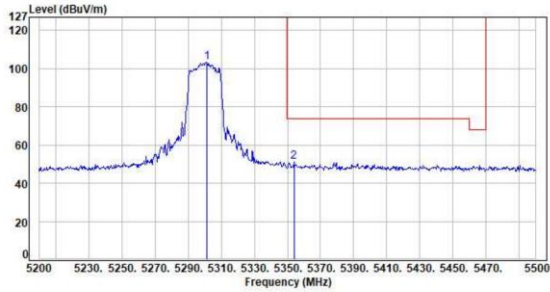

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5301.40         | -0.38       | 103.82         | 103.44         | 200.00         | -96.56      | Peak     | 100         | 71            | P   |
| 2   | 5353.98         | -0.38       | 51.70          | 51.32          | 74.00          | -22.68      | Peak     | 100         | 71            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH60 NSS1 MCS0  
Pol : Horizontal Detector : Peak

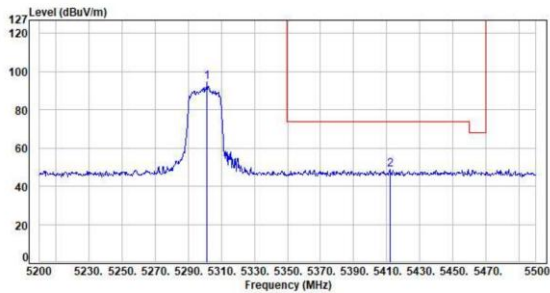


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5301.40         | -0.38       | 95.05          | 94.67          | 200.00         | -105.33     | Peak     | 100         | 129           | P   |
| 2   | 5411.80         | -0.27       | 48.81          | 48.54          | 74.00          | -25.46      | Peak     | 100         | 129           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH64 NSS1 MCS0  
Pol : Vertical Detector : Peak

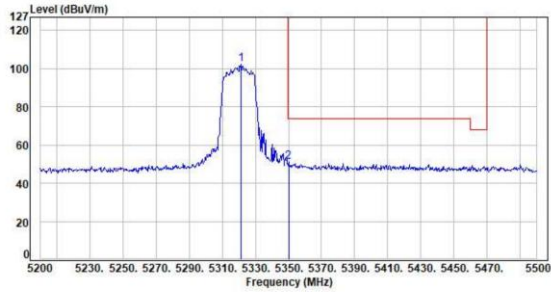

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5321.20         | -0.39       | 102.75         | 102.36         | 200.00         | -97.64      | Peak     | 120         | 71            | P   |
| 2   | 5350.00         | -0.39       | 51.35          | 50.96          | 74.00          | -23.04      | Peak     | 120         | 71            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH64 NSS1 MCS0  
Pol : Horizontal Detector : Peak

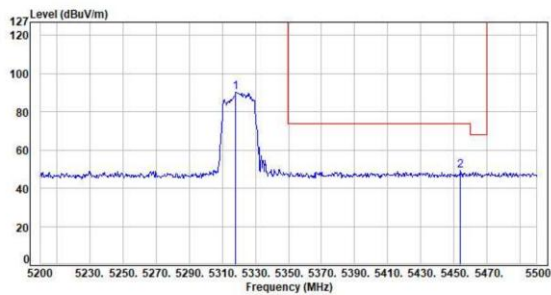


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5318.20         | -0.38       | 90.55          | 90.17          | 200.00         | -109.83     | Peak     | 100         | 128           | P   |
| 2   | 5453.00         | -0.18       | 49.52          | 49.34          | 74.00          | -24.66      | Peak     | 100         | 128           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH54 NSS1 MCS0  
Pol : Vertical Detector : Peak

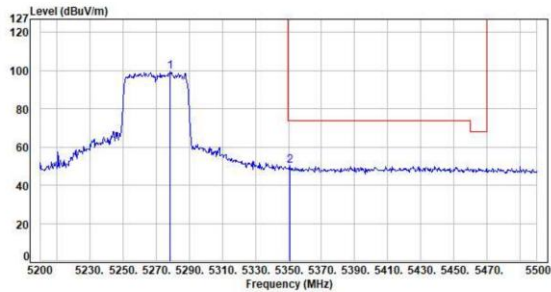

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5278.60         | -0.34       | 99.75          | 99.41          | 200.00         | -100.59     | Peak     | 120         | 71            | P   |
| 2   | 5350.98         | -0.39       | 50.51          | 50.12          | 74.00          | -23.88      | Peak     | 120         | 71            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH54 NSS1 MCS0  
Pol : Horizontal Detector : Peak

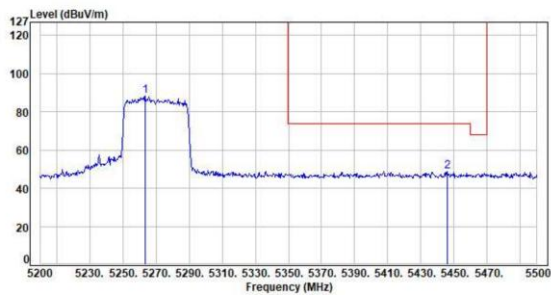


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5263.60         | -0.31       | 88.85          | 88.54          | 200.00         | -111.46     | Peak     | 106         | 127           | P   |
| 2   | 5445.70         | -0.21       | 49.13          | 48.92          | 74.00          | -25.08      | Peak     | 106         | 127           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH62 NSS1 MCS0  
Pol : Vertical Detector : Peak

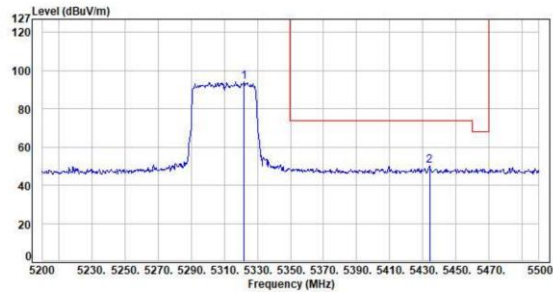

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5322.10         | -0.39       | 94.62          | 94.23          | 200.00         | -105.77     | Peak     | 123         | 70            | P   |
| 2   | 5434.00         | -0.23       | 50.28          | 50.05          | 74.00          | -23.95      | Peak     | 123         | 70            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH62 NSS1 MCS0  
Pol : Horizontal Detector : Peak

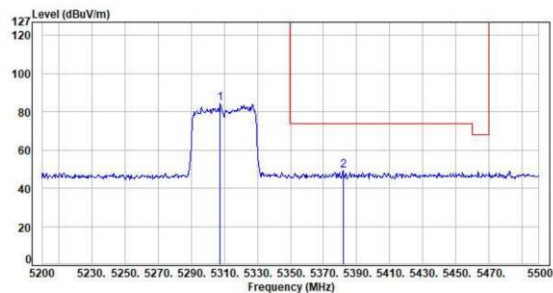


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5307.40         | -0.39       | 84.85          | 84.46          | 200.00         | -115.54     | Peak     | 100         | 128           | P   |
| 2   | 5381.00         | -0.34       | 49.49          | 49.15          | 74.00          | -24.85      | Peak     | 100         | 128           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH58 NSS1 MCS0  
Pol : Vertical Detector : Peak

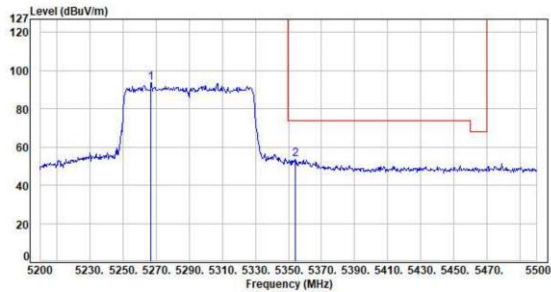

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5266.90            | -0.31          | 94.05             | 93.74             | 200.00            | -106.26        | Peak     | 124            | 71               | P   |
| 2   | 5354.20            | -0.37          | 53.74             | 53.37             | 74.00             | -20.63         | Peak     | 124            | 71               | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH58 NSS1 MCS0  
Pol : Horizontal Detector : Peak

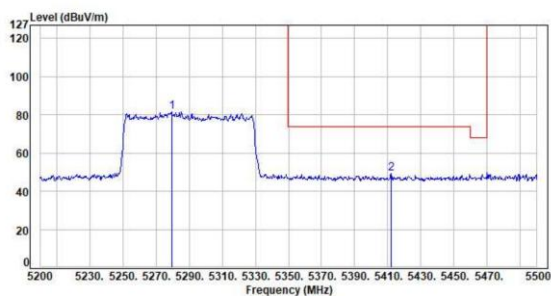

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 5279.50            | -0.34          | 81.82             | 81.48             | 200.00            | -118.52        | Peak     | 112            | 130              | P   |
| 2   | 5411.80            | -0.27          | 49.74             | 49.47             | 74.00             | -24.53         | Peak     | 112            | 130              | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Peak

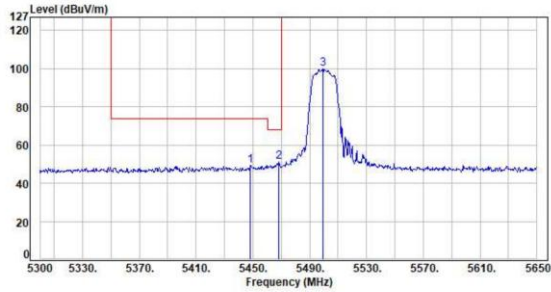

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5448.05         | -0.20       | 49.52          | 49.32          | 74.00          | -24.68      | Peak     | 100         | 64            | P   |
| 2   | 5468.35         | -0.15       | 51.23          | 51.08          | 68.20          | -17.12      | Peak     | 100         | 64            | P   |
| 3   | 5499.50         | -0.10       | 100.28         | 100.18         | 200.00         | -99.82      | Peak     | 100         | 64            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Peak

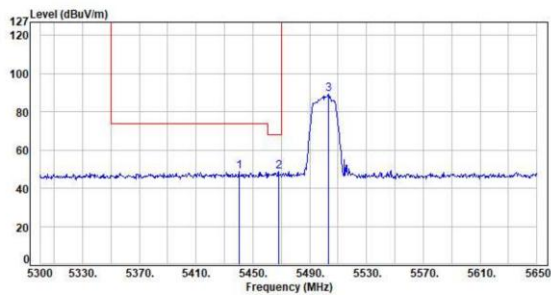

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5440.00         | -0.21       | 48.81          | 48.60          | 74.00          | -25.40      | Peak     | 100         | 156           | P   |
| 2   | 5468.00         | -0.15       | 48.81          | 48.66          | 68.20          | -19.54      | Peak     | 100         | 156           | P   |
| 3   | 5503.00         | -0.09       | 89.66          | 89.57          | 200.00         | -110.43     | Peak     | 100         | 156           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps

Pol : Vertical

Detector : Peak

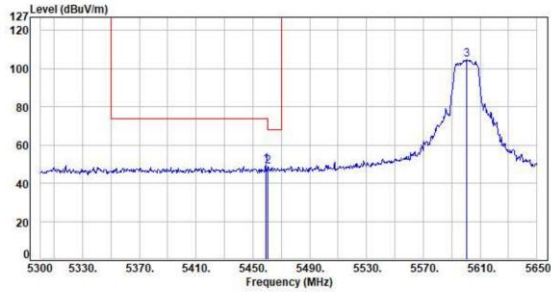

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5458.90         | -0.18       | 49.85          | 49.67          | 74.00          | -24.33      | Peak     | 113         | 64            | P   |
| 2   | 5460.65         | -0.18       | 48.72          | 48.54          | 68.20          | -19.66      | Peak     | 113         | 64            | P   |
| 3   | 5600.30         | 0.28        | 104.34         | 104.62         | 200.00         | -95.38      | Peak     | 113         | 64            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH120 6Mbps

Pol : Horizontal

Detector : Peak

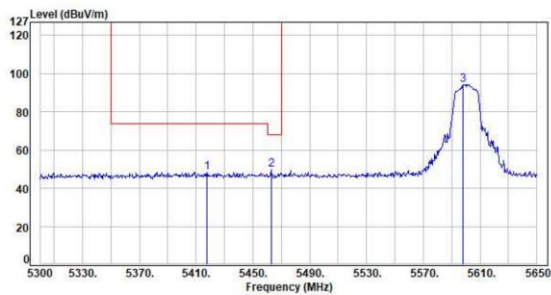

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5417.60         | -0.25       | 48.77          | 48.52          | 74.00          | -25.48      | Peak     | 100         | 148           | P   |
| 2   | 5462.75         | -0.17       | 50.08          | 49.91          | 68.20          | -18.29      | Peak     | 100         | 148           | P   |
| 3   | 5597.85         | 0.27        | 94.07          | 94.34          | 200.00         | -105.66     | Peak     | 100         | 148           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

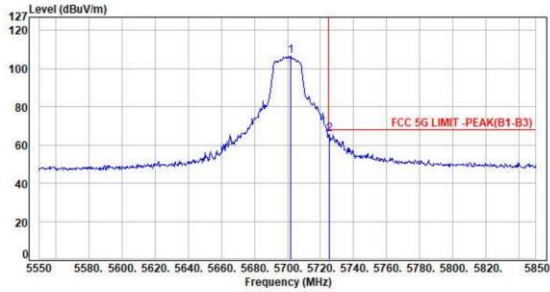


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5701.00         | 0.88        | 105.66         | 106.54         | 200.00         | -93.46      | Peak     | 102         | 64            | P   |
| 2   | 5725.20         | 0.96        | 64.48          | 65.44          | 68.20          | -2.76       | Peak     | 102         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Average

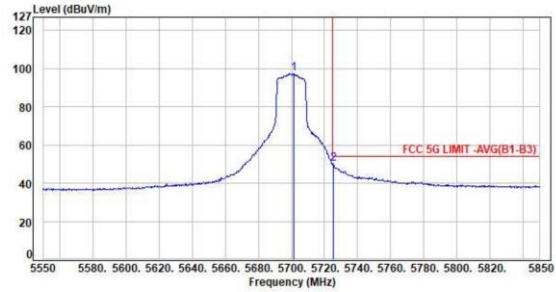


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5701.20         | 0.86        | 96.49          | 97.35          | 200.00         | -102.65     | Average  | 102         | 64            | P   |
| 2   | 5725.20         | 0.96        | 49.04          | 50.00          | 54.00          | -4.00       | Average  | 102         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

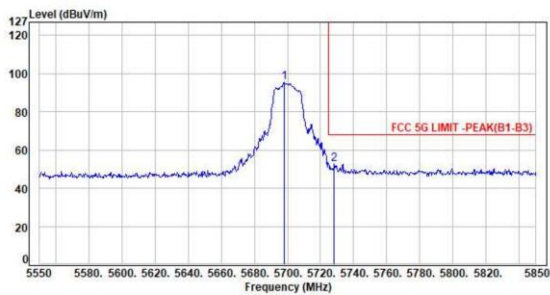


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5697.90         | 0.85        | 94.72          | 95.57          | 200.00         | -104.43     | Peak     | 101         | 130           | P   |
| 2   | 5728.20         | 0.97        | 51.00          | 52.77          | 68.20          | -15.43      | Peak     | 101         | 130           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Average

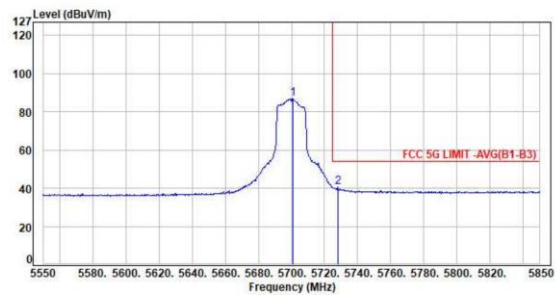


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.90         | 0.86        | 86.12          | 86.98          | 200.00         | -113.02     | Average  | 101         | 130           | P   |
| 2   | 5727.90         | 0.97        | 39.45          | 40.42          | 54.00          | -13.58      | Average  | 101         | 130           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH100 NSS1 MCS0  
Pol : Vertical Detector : Peak

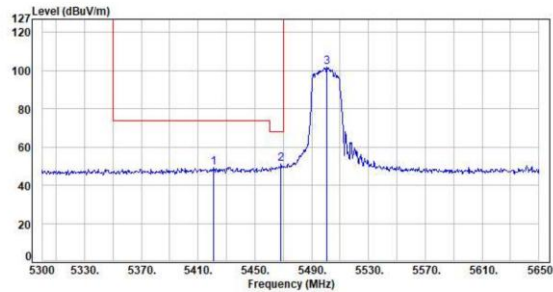

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5421.10         | -0.26       | 49.62          | 49.36          | 74.00          | -24.64      | Peak     | 112         | 64            | P   |
| 2   | 5460.35         | -0.15       | 51.43          | 51.28          | 68.20          | -16.92      | Peak     | 112         | 64            | P   |
| 3   | 5500.90         | -0.10       | 101.84         | 101.74         | 200.00         | -98.26      | Peak     | 112         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH100 NSS1 MCS0  
Pol : Horizontal Detector : Peak

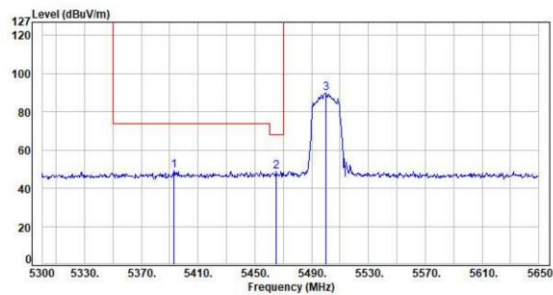


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5392.75         | -0.30       | 49.35          | 49.05          | 74.00          | -24.95      | Peak     | 100         | 151           | P   |
| 2   | 5464.85         | -0.17       | 49.14          | 48.97          | 68.20          | -19.23      | Peak     | 100         | 151           | P   |
| 3   | 5499.85         | -0.10       | 90.09          | 89.99          | 200.00         | -110.01     | Peak     | 100         | 151           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH120 NSS1 MCS0  
Pol : Vertical Detector : Peak

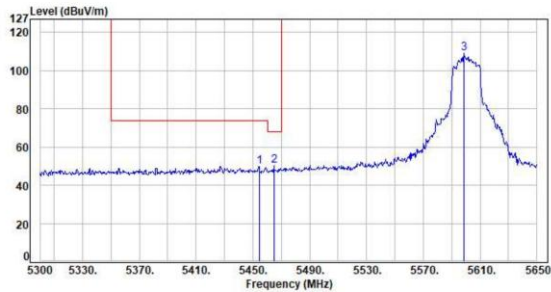

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5454.35         | -0.18       | 50.14          | 49.96          | 74.00          | -24.04      | Peak     | 100         | 65            | P   |
| 2   | 5464.85         | -0.17       | 50.39          | 50.22          | 68.20          | -17.98      | Peak     | 100         | 65            | P   |
| 3   | 5598.90         | 0.28        | 100.68         | 100.96         | 200.00         | -91.04      | Peak     | 100         | 65            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH120 NSS1 MCS0  
Pol : Horizontal Detector : Peak

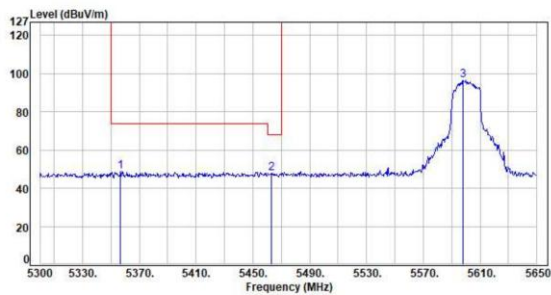


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5356.70         | -0.38       | 48.96          | 48.58          | 74.00          | -25.42      | Peak     | 111         | 149           | P   |
| 2   | 5462.75         | -0.17       | 48.17          | 48.00          | 68.20          | -20.20      | Peak     | 111         | 149           | P   |
| 3   | 5597.85         | 0.27        | 96.45          | 96.72          | 200.00         | -103.28     | Peak     | 111         | 149           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH140 NSS1 MCS0  
Pol : Vertical Detector : Peak

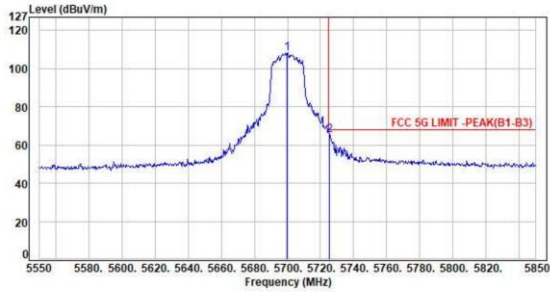

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5699.70         | 0.86        | 107.38         | 108.24         | 200.00         | -91.75      | Peak     | 103         | 64            | P   |
| 2   | 5725.20         | 0.96        | 64.36          | 65.32          | 68.20          | -2.88       | Peak     | 103         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH140 NSS1 MCS0  
Pol : Vertical Detector : Average

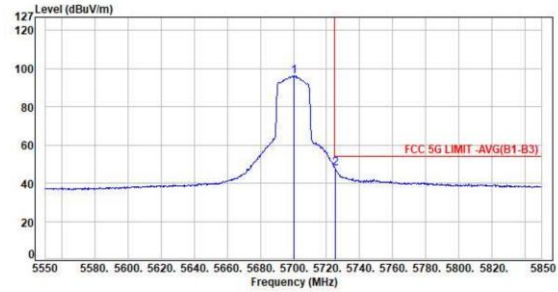

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.30         | 0.86        | 95.25          | 96.11          | 200.00         | -103.89     | Average  | 103         | 64            | P   |
| 2   | 5725.20         | 0.96        | 47.02          | 47.98          | 54.00          | -6.02       | Average  | 103         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH140 NSS1 MCS0  
Pol : Horizontal Detector : Peak

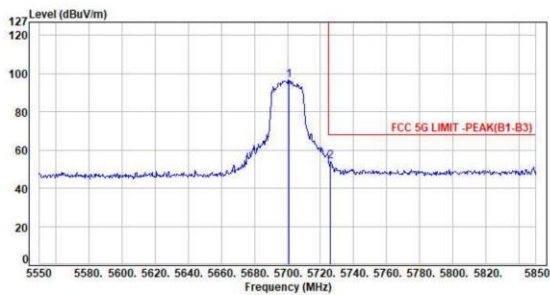

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5700.90         | 0.86        | 95.83          | 96.69          | 200.00         | -103.31     | Peak     | 100         | 153           | P   |
| 2   | 5726.10         | 0.96        | 52.95          | 53.91          | 68.20          | -14.29      | Peak     | 100         | 153           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH140 NSS1 MCS0  
Pol : Horizontal Detector : Average

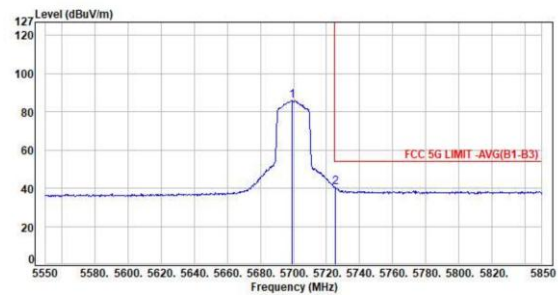


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5699.10         | 0.85        | 85.22          | 86.07          | 200.00         | -113.93     | Average  | 100         | 153           | P   |
| 2   | 5725.20         | 0.96        | 39.56          | 40.52          | 54.00          | -13.48      | Average  | 100         | 153           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH102 NSS1 MCS0  
Pol : Vertical Detector : Peak

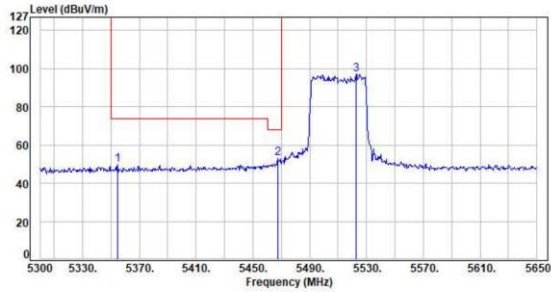

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5354.95         | -0.37       | 49.92          | 49.55          | 74.00          | -24.45      | Peak     | 100         | 64            | P   |
| 2   | 5467.30         | -0.16       | 53.23          | 53.07          | 68.20          | -15.13      | Peak     | 100         | 64            | P   |
| 3   | 5522.60         | -0.02       | 97.28          | 97.26          | 200.00         | -102.74     | Peak     | 100         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH102 NSS1 MCS0  
Pol : Horizontal Detector : Peak

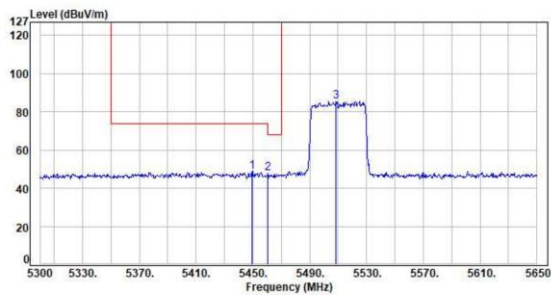


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5449.10         | -0.20       | 48.90          | 48.70          | 74.00          | -25.30      | Peak     | 130         | 155           | P   |
| 2   | 5460.65         | -0.18       | 47.95          | 47.77          | 68.20          | -20.43      | Peak     | 130         | 155           | P   |
| 3   | 5508.60         | -0.07       | 85.68          | 85.61          | 200.00         | -114.39     | Peak     | 130         | 155           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH118 NSS1 MCS0  
Pol : Vertical Detector : Peak

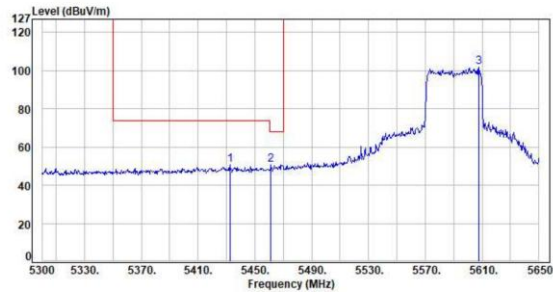

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5432.30         | -0.24       | 50.80          | 50.56          | 74.00          | -23.44      | Peak     | 109         | 64            | P   |
| 2   | 5461.35         | -0.18       | 50.71          | 50.53          | 68.20          | -17.67      | Peak     | 109         | 64            | P   |
| 3   | 5608.00         | 0.33        | 101.63         | 101.96         | 200.00         | -98.04      | Peak     | 109         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH118 NSS1 MCS0  
Pol : Horizontal Detector : Peak

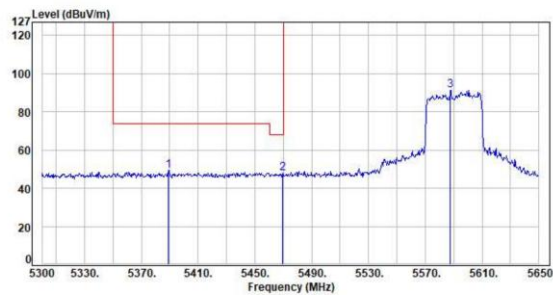


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5389.25         | -0.31       | 49.43          | 49.12          | 74.00          | -24.88      | Peak     | 109         | 149           | P   |
| 2   | 5469.40         | -0.16       | 47.81          | 47.65          | 68.20          | -20.55      | Peak     | 109         | 149           | P   |
| 3   | 5587.70         | 0.23        | 90.94          | 91.17          | 200.00         | -108.83     | Peak     | 109         | 149           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH134 NSS1 MCS0  
Pol : Vertical Detector : Peak

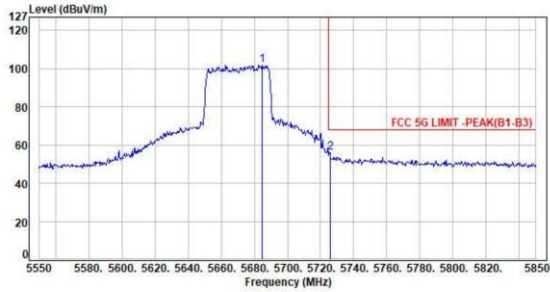

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5684.70         | 0.77        | 101.30         | 102.07         | 200.00         | -97.93      | Peak     | 100         | 63            | P   |
| 2   | 5725.80         | 0.96        | 55.14          | 56.10          | 68.20          | -12.10      | Peak     | 100         | 63            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH134 NSS1 MCS0  
Pol : Vertical Detector : Average

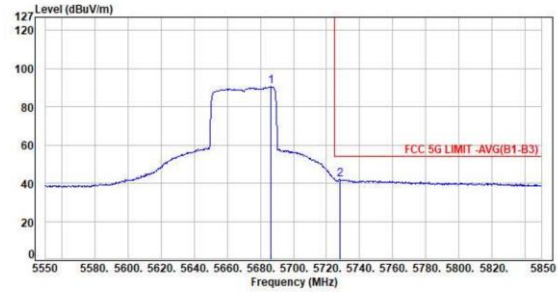

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5686.50         | 0.79        | 89.77          | 90.56          | 200.00         | -109.44     | Average  | 100         | 63            | P   |
| 2   | 5727.90         | 0.97        | 41.02          | 41.99          | 54.00          | -12.01      | Average  | 100         | 63            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH134 NSS1 MCS0  
Pol : Horizontal Detector : Peak

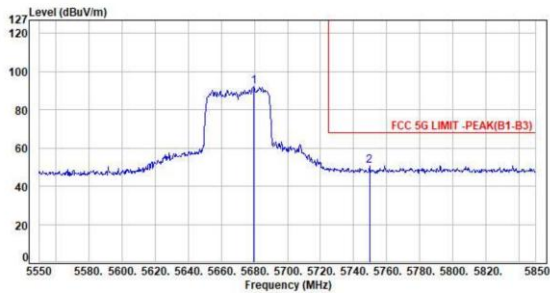

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5679.90         | 0.75        | 91.44          | 92.19          | 200.00         | -107.81     | Peak     | 102         | 153           | P   |
| 2   | 5749.50         | 1.05        | 49.83          | 50.88          | 68.20          | -17.32      | Peak     | 102         | 153           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH134 NSS1 MCS0  
Pol : Horizontal Detector : Average

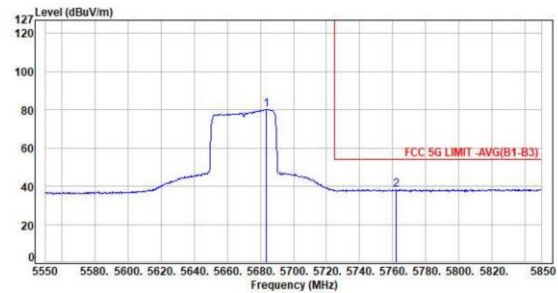


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5683.80         | 0.76        | 79.51          | 80.27          | 200.00         | -119.73     | Average  | 102         | 153           | P   |
| 2   | 5761.80         | 1.05        | 37.29          | 38.34          | 54.00          | -15.66      | Average  | 102         | 153           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH106 NSS1 MCS0  
Pol : Vertical Detector : Peak

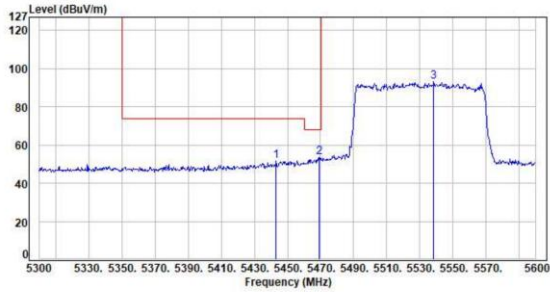

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5443.10         | -0.20       | 52.03          | 51.83          | 74.00          | -22.17      | Peak     | 100         | 65            | P   |
| 2   | 5469.20         | -0.16       | 53.04          | 53.08          | 68.20          | -14.52      | Peak     | 100         | 65            | P   |
| 3   | 5538.20         | 0.04        | 93.10          | 93.14          | 200.00         | -106.86     | Peak     | 100         | 65            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH106 NSS1 MCS0  
Pol : Horizontal Detector : Peak

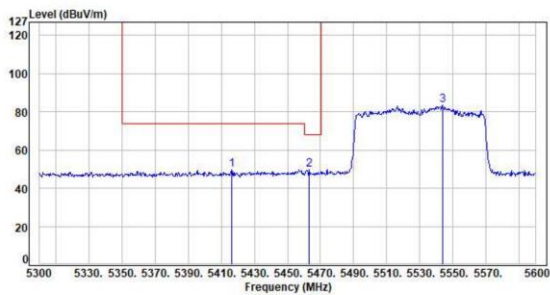


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5416.10         | -0.26       | 50.20          | 49.94          | 74.00          | -24.06      | Peak     | 101         | 152           | P   |
| 2   | 5462.90         | -0.17       | 49.70          | 49.53          | 68.20          | -18.67      | Peak     | 101         | 152           | P   |
| 3   | 5543.60         | 0.07        | 83.25          | 83.32          | 200.00         | -116.68     | Peak     | 101         | 152           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH122 NSS1 MCS0  
Pol : Vertical Detector : Peak

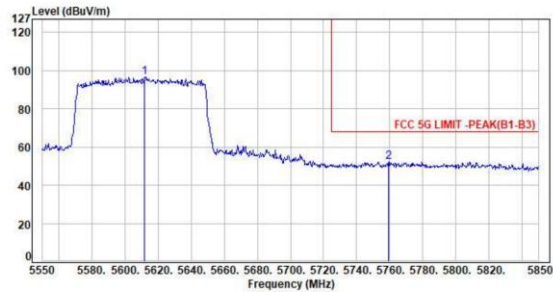

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5612.10         | 0.35        | 96.35          | 96.70          | 200.00         | -103.30     | Peak     | 100         | 64            | P   |
| 2   | 5759.10         | 1.05        | 51.26          | 52.31          | 68.20          | -15.89      | Peak     | 100         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH122 NSS1 MCS0  
Pol : Horizontal Detector : Peak

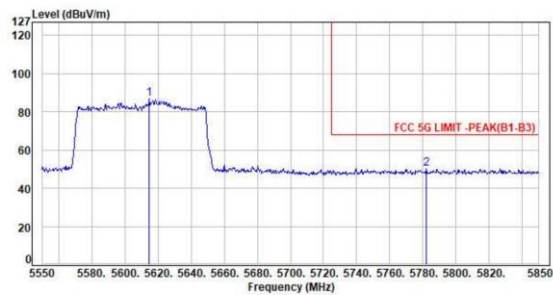

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5614.00         | 0.37        | 86.61          | 86.98          | 200.00         | -113.02     | Peak     | 100         | 153           | P   |
| 2   | 5782.20         | 1.04        | 49.09          | 50.13          | 68.20          | -18.07      | Peak     | 100         | 153           | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

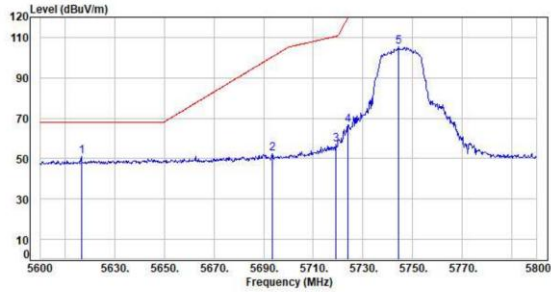

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5639.40         | 0.38        | 50.81          | 51.19          | 68.20          | -17.01      | Peak     | 100         | 64            | P   |
| 2   | 5677.40         | 0.83        | 51.50          | 52.41          | 100.46         | -48.05      | Peak     | 100         | 64            | P   |
| 3   | 5709.00         | 0.94        | 56.12          | 57.06          | 110.58         | -53.52      | Peak     | 100         | 64            | P   |
| 4   | 5723.40         | 0.96        | 65.73          | 66.69          | 119.92         | -53.23      | Peak     | 100         | 64            | P   |
| 5   | 5748.40         | 1.03        | 104.36         | 105.39         | 200.00         | -94.61      | Peak     | 100         | 64            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

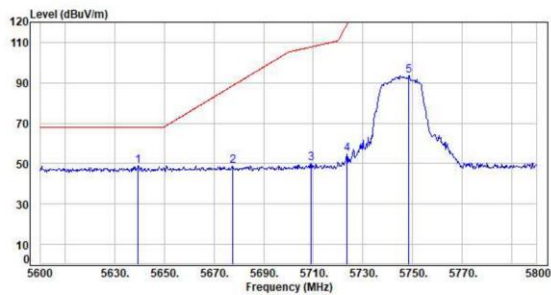

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5639.40         | 0.52        | 48.29          | 48.81          | 68.20          | -19.39      | Peak     | 100         | 154           | P   |
| 2   | 5677.40         | 0.73        | 48.10          | 48.83          | 88.48          | -39.65      | Peak     | 100         | 154           | P   |
| 3   | 5709.00         | 0.90        | 49.49          | 50.39          | 107.72         | -57.33      | Peak     | 100         | 154           | P   |
| 4   | 5723.40         | 0.95        | 53.78          | 54.73          | 118.55         | -63.82      | Peak     | 100         | 154           | P   |
| 5   | 5748.40         | 1.04        | 92.62          | 93.66          | 200.00         | -106.34     | Peak     | 100         | 154           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

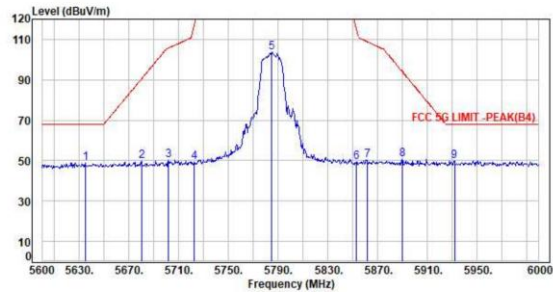

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5634.00         | 0.48        | 48.43          | 48.91          | 68.20          | -19.29      | Peak     | 100         | 119           | P   |
| 2   | 5680.00         | 0.75        | 48.87          | 49.62          | 90.40          | -40.78      | Peak     | 100         | 119           | P   |
| 3   | 5701.60         | 0.87        | 49.49          | 50.36          | 105.65         | -55.29      | Peak     | 100         | 119           | P   |
| 4   | 5722.80         | 0.95        | 48.47          | 49.42          | 117.18         | -67.76      | Peak     | 100         | 119           | P   |
| 5   | 5784.80         | 1.05        | 102.55         | 103.60         | 200.00         | -96.40      | Peak     | 100         | 119           | P   |
| 6   | 5853.20         | 1.03        | 48.09          | 49.12          | 114.90         | -65.78      | Peak     | 100         | 119           | P   |
| 7   | 5861.60         | 1.01        | 49.01          | 50.02          | 100.95         | -50.93      | Peak     | 100         | 119           | P   |
| 8   | 5890.40         | 0.95        | 49.65          | 50.60          | 93.80          | -43.20      | Peak     | 100         | 119           | P   |
| 9   | 5932.00         | 0.92        | 48.89          | 49.81          | 68.20          | -18.39      | Peak     | 100         | 119           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

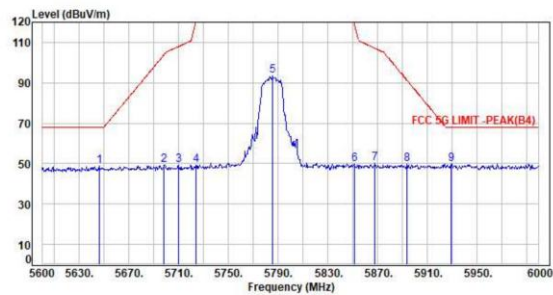

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5646.40         | 0.55        | 48.49          | 49.04          | 68.20          | -19.16      | Peak     | 100         | 148           | P   |
| 2   | 5698.40         | 0.85        | 48.23          | 49.08          | 104.02         | -54.94      | Peak     | 100         | 148           | P   |
| 3   | 5709.60         | 0.90        | 48.15          | 49.05          | 107.89         | -58.84      | Peak     | 100         | 148           | P   |
| 4   | 5724.00         | 0.96        | 48.47          | 49.43          | 119.92         | -70.49      | Peak     | 100         | 148           | P   |
| 5   | 5785.60         | 1.05        | 92.36          | 93.41          | 200.00         | -106.59     | Peak     | 100         | 148           | P   |
| 6   | 5851.20         | 1.04        | 48.64          | 49.68          | 119.46         | -69.78      | Peak     | 100         | 148           | P   |
| 7   | 5868.00         | 1.00        | 48.97          | 49.97          | 107.16         | -57.19      | Peak     | 100         | 148           | P   |
| 8   | 5894.00         | 0.93        | 48.65          | 49.58          | 91.14          | -41.56      | Peak     | 100         | 148           | P   |
| 9   | 5929.20         | 0.93        | 48.80          | 49.73          | 68.20          | -18.47      | Peak     | 100         | 148           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

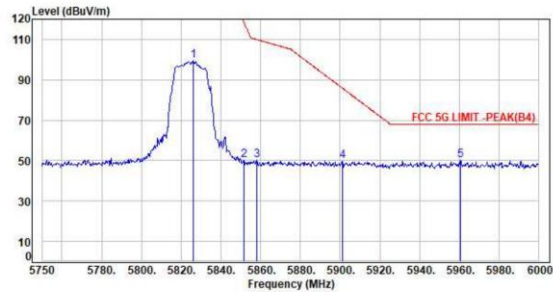

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 1.04        | 98.49          | 99.53          | 200.00         | -100.47     | Peak     | 100         | 61            | P   |
| 2   | 5851.75         | 1.04        | 48.96          | 50.00          | 118.21         | -68.21      | Peak     | 100         | 61            | P   |
| 3   | 5858.25         | 1.01        | 49.27          | 50.28          | 109.89         | -59.61      | Peak     | 100         | 61            | P   |
| 4   | 5901.00         | 0.93        | 48.62          | 49.55          | 85.96          | -36.41      | Peak     | 100         | 61            | P   |
| 5   | 5960.50         | 0.92        | 49.24          | 50.16          | 68.20          | -18.04      | Peak     | 100         | 61            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

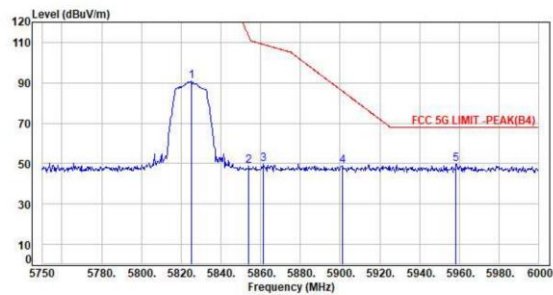

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5825.00         | 1.04        | 89.92          | 90.96          | 200.00         | -109.04     | Peak     | 112         | 154           | P   |
| 2   | 5854.00         | 1.03        | 47.59          | 48.62          | 113.00         | -64.46      | Peak     | 112         | 154           | P   |
| 3   | 5861.50         | 1.01        | 48.50          | 49.51          | 108.98         | -59.47      | Peak     | 112         | 154           | P   |
| 4   | 5901.00         | 0.93        | 47.81          | 48.74          | 85.96          | -37.22      | Peak     | 112         | 154           | P   |
| 5   | 5958.25         | 0.91        | 48.76          | 49.67          | 68.20          | -18.53      | Peak     | 112         | 154           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH149 NSS1 MCS0  
Pol : Vertical Detector : Peak

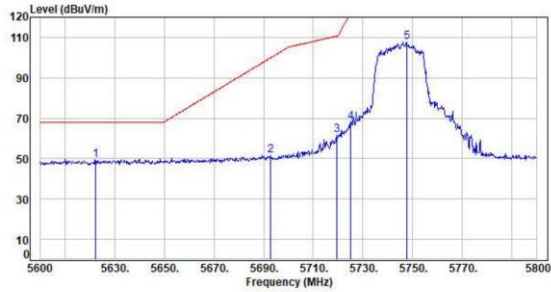

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5622.40         | 0.41        | 49.00          | 49.41          | 68.20          | -18.79      | Peak     | 100         | 64            | P   |
| 2   | 5692.00         | 0.83        | 50.62          | 51.45          | 99.87          | -48.42      | Peak     | 100         | 64            | P   |
| 3   | 5719.40         | 0.94        | 60.45          | 61.39          | 110.63         | -49.24      | Peak     | 100         | 64            | P   |
| 4   | 5725.00         | 0.96        | 67.17          | 68.13          | 122.20         | -54.07      | Peak     | 100         | 64            | P   |
| 5   | 5747.60         | 1.04        | 106.76         | 107.80         | 200.00         | -92.20      | Peak     | 100         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH149 NSS1 MCS0  
Pol : Horizontal Detector : Peak

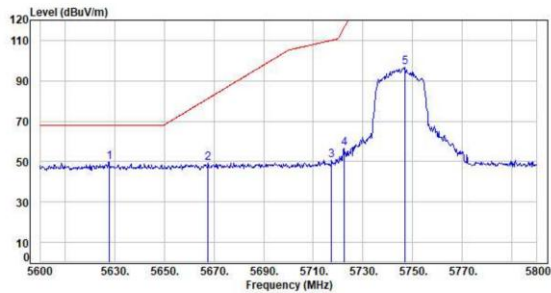

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5627.00         | 0.45        | 49.30          | 49.75          | 68.20          | -18.45      | Peak     | 100         | 154           | P   |
| 2   | 5667.60         | 0.68        | 48.49          | 49.17          | 81.22          | -32.05      | Peak     | 100         | 154           | P   |
| 3   | 5717.40         | 0.93        | 49.60          | 50.53          | 110.07         | -59.54      | Peak     | 100         | 154           | P   |
| 4   | 5722.40         | 0.95        | 55.56          | 56.51          | 116.27         | -59.76      | Peak     | 100         | 154           | P   |
| 5   | 5747.00         | 1.04        | 95.62          | 96.66          | 200.00         | -103.34     | Peak     | 100         | 154           | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11aX20 CH157 NSS1 MCS0

Pol : Vertical

Detector : Peak

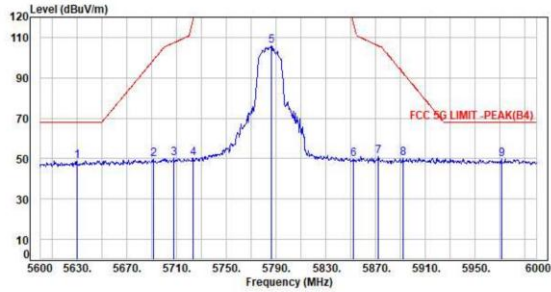

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5629.00         | 0.46        | 48.49          | 48.95          | 68.20          | -19.25      | Peak     | 100         | 118           | P   |
| 2   | 5691.20         | 0.82        | 48.77          | 49.59          | 98.69          | -49.10      | Peak     | 100         | 118           | P   |
| 3   | 5708.00         | 0.89        | 49.16          | 50.05          | 107.44         | -57.39      | Peak     | 100         | 118           | P   |
| 4   | 5723.60         | 0.95        | 49.13          | 50.08          | 119.01         | -68.93      | Peak     | 100         | 118           | P   |
| 5   | 5786.00         | 1.05        | 104.74         | 105.79         | 200.00         | -94.21      | Peak     | 100         | 118           | P   |
| 6   | 5852.00         | 1.04        | 48.58          | 49.62          | 117.64         | -68.02      | Peak     | 100         | 118           | P   |
| 7   | 5872.40         | 0.99        | 49.96          | 50.95          | 105.93         | -54.98      | Peak     | 100         | 118           | P   |
| 8   | 5892.00         | 0.95        | 49.37          | 50.32          | 92.62          | -42.30      | Peak     | 100         | 118           | P   |
| 9   | 5971.60         | 0.91        | 48.92          | 49.83          | 68.20          | -18.37      | Peak     | 100         | 118           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH157 NSS1 MCS0

Pol : Horizontal

Detector : Peak

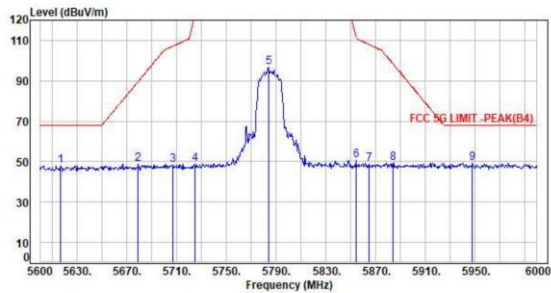

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5616.00         | 0.38        | 47.69          | 48.07          | 68.20          | -20.13      | Peak     | 116         | 155           | P   |
| 2   | 5678.00         | 0.74        | 48.17          | 48.91          | 89.51          | -40.60      | Peak     | 116         | 155           | P   |
| 3   | 5706.00         | 0.89        | 47.56          | 48.45          | 107.10         | -58.65      | Peak     | 116         | 155           | P   |
| 4   | 5724.00         | 0.96        | 48.05          | 49.01          | 121.74         | -72.73      | Peak     | 116         | 155           | P   |
| 5   | 5784.40         | 1.05        | 95.69          | 96.74          | 200.00         | -103.26     | Peak     | 116         | 155           | P   |
| 6   | 5854.40         | 1.03        | 49.73          | 50.76          | 112.17         | -61.41      | Peak     | 116         | 155           | P   |
| 7   | 5864.00         | 1.01        | 47.89          | 48.90          | 108.06         | -59.16      | Peak     | 116         | 155           | P   |
| 8   | 5884.00         | 0.96        | 48.40          | 49.36          | 98.54          | -49.18      | Peak     | 116         | 155           | P   |
| 9   | 5948.00         | 0.92        | 48.42          | 49.34          | 68.20          | -18.86      | Peak     | 116         | 155           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11aX20 CH165 NSS1 MCS0

Pol : Vertical

Detector : Peak

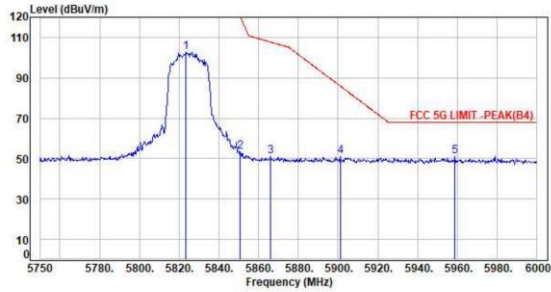

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5823.50         | 1.04        | 101.61         | 102.65         | 200.00         | -97.35      | Peak     | 116         | 120           | P   |
| 2   | 5850.75         | 1.04        | 52.52          | 53.56          | 120.49         | -66.93      | Peak     | 116         | 120           | P   |
| 3   | 5866.00         | 1.01        | 49.90          | 50.91          | 107.72         | -56.81      | Peak     | 116         | 120           | P   |
| 4   | 5901.00         | 0.93        | 50.04          | 50.97          | 85.96          | -34.99      | Peak     | 116         | 120           | P   |
| 5   | 5958.75         | 0.91        | 50.01          | 50.92          | 68.20          | -17.28      | Peak     | 116         | 120           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH165 NSS1 MCS0

Pol : Horizontal

Detector : Peak

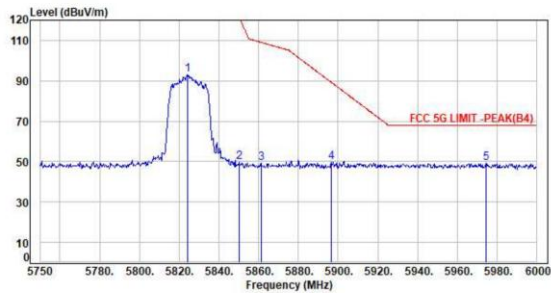

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5824.25         | 1.04        | 92.07          | 93.11          | 200.00         | -106.89     | Peak     | 113         | 153           | P   |
| 2   | 5850.00         | 1.04        | 48.81          | 49.85          | 122.20         | -72.35      | Peak     | 113         | 153           | P   |
| 3   | 5861.25         | 1.01        | 48.42          | 49.43          | 109.05         | -59.62      | Peak     | 113         | 153           | P   |
| 4   | 5896.75         | 0.94        | 48.73          | 49.67          | 89.10          | -39.43      | Peak     | 113         | 153           | P   |
| 5   | 5974.25         | 0.91        | 48.49          | 49.40          | 68.20          | -18.80      | Peak     | 113         | 153           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax40 CH151 NSS1 MCS0

Pol : Vertical

Detector : Peak

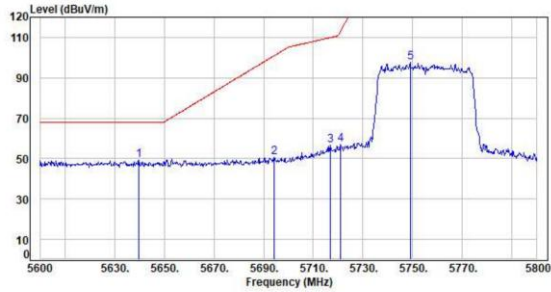

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5639.00         | 0.52        | 48.69          | 49.21          | 68.20          | -18.99      | Peak     | 104         | 64            | P   |
| 2   | 5694.40         | 0.83        | 49.85          | 50.68          | 101.06         | -50.38      | Peak     | 104         | 64            | P   |
| 3   | 5716.80         | 0.93        | 55.85          | 56.78          | 109.90         | -53.12      | Peak     | 104         | 64            | P   |
| 4   | 5720.80         | 0.94        | 55.87          | 56.81          | 112.62         | -55.81      | Peak     | 104         | 64            | P   |
| 5   | 5749.00         | 1.05        | 96.43          | 97.48          | 200.00         | -102.52     | Peak     | 104         | 64            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH151 NSS1 MCS0

Pol : Horizontal

Detector : Peak

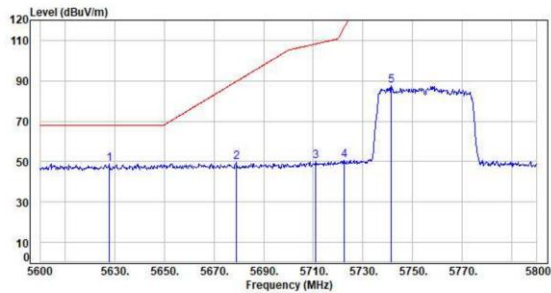

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5627.00         | 0.45        | 48.29          | 48.74          | 68.20          | -19.46      | Peak     | 102         | 151           | P   |
| 2   | 5679.20         | 0.75        | 48.78          | 49.53          | 89.81          | -40.28      | Peak     | 102         | 151           | P   |
| 3   | 5711.00         | 0.90        | 49.28          | 50.18          | 100.28         | -50.10      | Peak     | 102         | 151           | P   |
| 4   | 5722.40         | 0.95        | 49.77          | 50.72          | 116.27         | -65.55      | Peak     | 102         | 151           | P   |
| 5   | 5741.20         | 1.02        | 86.43          | 87.45          | 200.00         | -112.55     | Peak     | 102         | 151           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH159 NSS1 MCS0  
Pol : Vertical Detector : Peak

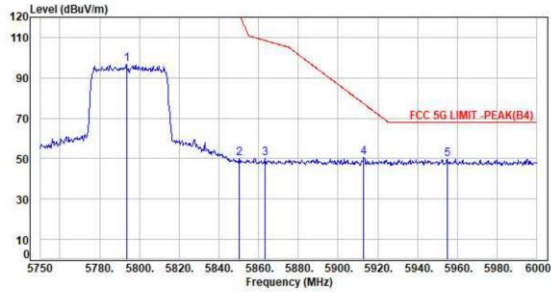

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5793.50         | 1.05        | 95.80          | 96.85          | 200.00         | -103.15     | Peak     | 115         | 120           | P   |
| 2   | 5850.25         | 1.04        | 49.16          | 50.20          | 121.63         | -71.43      | Peak     | 115         | 120           | P   |
| 3   | 5863.00         | 1.01        | 49.16          | 50.17          | 108.56         | -58.39      | Peak     | 115         | 120           | P   |
| 4   | 5913.00         | 0.93        | 49.60          | 50.53          | 77.08          | -26.55      | Peak     | 115         | 120           | P   |
| 5   | 5954.75         | 0.92        | 48.89          | 49.81          | 68.20          | -18.39      | Peak     | 115         | 120           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH159 NSS1 MCS0  
Pol : Horizontal Detector : Peak

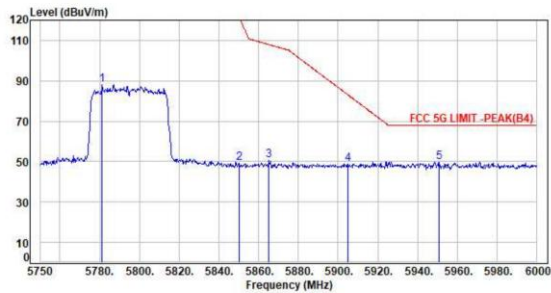

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5781.25         | 1.05        | 86.97          | 88.02          | 200.00         | -111.98     | Peak     | 120         | 154           | P   |
| 2   | 5850.00         | 1.04        | 48.16          | 49.20          | 122.20         | -73.00      | Peak     | 120         | 154           | P   |
| 3   | 5865.25         | 1.01        | 49.63          | 50.64          | 107.93         | -57.29      | Peak     | 120         | 154           | P   |
| 4   | 5905.00         | 0.93        | 47.89          | 48.82          | 83.00          | -34.18      | Peak     | 120         | 154           | P   |
| 5   | 5950.75         | 0.92        | 48.83          | 49.75          | 68.20          | -18.45      | Peak     | 120         | 154           | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11ax80 CH155 NSS1 MCS0

Pol : Vertical

Detector : Peak

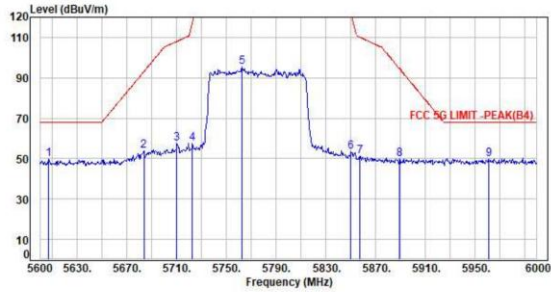

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5686.80         | 0.32        | 49.22          | 49.54          | 68.20          | -18.66      | Peak     | 100         | 63            | P   |
| 2   | 5683.60         | 0.76        | 52.90          | 53.66          | 93.06          | -39.40      | Peak     | 100         | 63            | P   |
| 3   | 5710.00         | 0.90        | 56.37          | 57.27          | 108.00         | -50.73      | Peak     | 100         | 63            | P   |
| 4   | 5722.80         | 0.95        | 56.40          | 57.35          | 117.18         | -59.83      | Peak     | 100         | 63            | P   |
| 5   | 5762.80         | 1.05        | 94.38          | 95.43          | 200.00         | -104.57     | Peak     | 100         | 63            | P   |
| 6   | 5850.40         | 1.04        | 52.30          | 53.34          | 121.29         | -67.95      | Peak     | 100         | 63            | P   |
| 7   | 5857.20         | 1.02        | 50.12          | 51.14          | 110.18         | -59.04      | Peak     | 100         | 63            | P   |
| 8   | 5889.20         | 0.95        | 48.78          | 49.73          | 94.69          | -44.96      | Peak     | 100         | 63            | P   |
| 9   | 5961.20         | 0.92        | 48.79          | 49.71          | 68.20          | -18.49      | Peak     | 100         | 63            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH155 NSS1 MCS0

Pol : Horizontal

Detector : Peak

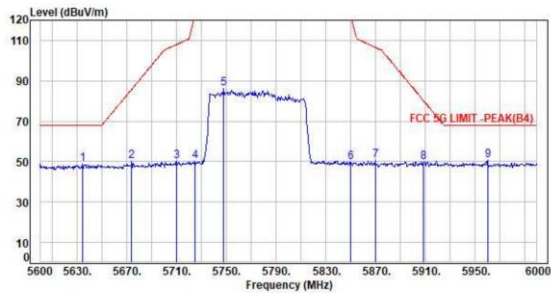

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5634.40         | 0.48        | 48.34          | 48.82          | 68.20          | -19.38      | Peak     | 103         | 148           | P   |
| 2   | 5673.60         | 0.71        | 49.40          | 50.11          | 85.66          | -35.55      | Peak     | 103         | 148           | P   |
| 3   | 5709.60         | 0.90        | 49.19          | 50.09          | 107.89         | -57.80      | Peak     | 103         | 148           | P   |
| 4   | 5724.80         | 0.96        | 49.24          | 50.20          | 121.74         | -71.54      | Peak     | 103         | 148           | P   |
| 5   | 5748.00         | 1.04        | 84.99          | 86.03          | 200.00         | -113.97     | Peak     | 103         | 148           | P   |
| 6   | 5850.40         | 1.04        | 48.88          | 49.92          | 121.29         | -71.37      | Peak     | 103         | 148           | P   |
| 7   | 5870.00         | 0.99        | 49.58          | 50.57          | 106.60         | -56.03      | Peak     | 103         | 148           | P   |
| 8   | 5908.80         | 0.92        | 48.92          | 49.84          | 80.19          | -30.35      | Peak     | 103         | 148           | P   |
| 9   | 5960.40         | 0.92        | 49.82          | 50.74          | 68.20          | -17.46      | Peak     | 103         | 148           | P   |

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




## Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps

Pol : Vertical

Detector : Peak

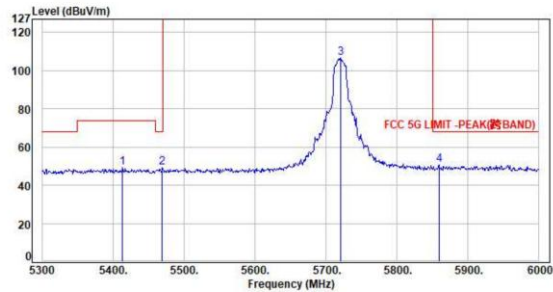

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5413.48         | -0.26       | 49.32          | 49.06          | 74.00          | -24.94      | Peak     | 100         | 62            | P   |
| 2   | 5469.40         | -0.16       | 49.18          | 49.02          | 68.20          | -19.18      | Peak     | 100         | 62            | P   |
| 3   | 5720.70         | 0.94        | 105.69         | 106.63         | 200.00         | -93.37      | Peak     | 100         | 62            | P   |
| 4   | 5859.30         | 1.01        | 49.49          | 50.50          | 68.20          | -17.70      | Peak     | 100         | 62            | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps

Pol : Horizontal

Detector : Peak

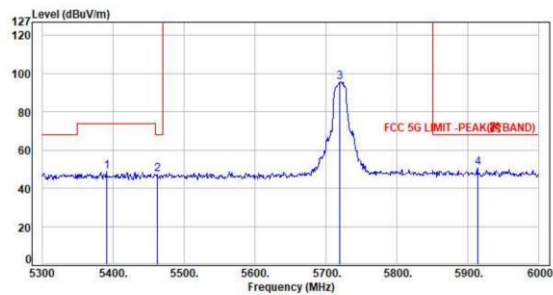

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5391.00         | -0.31       | 48.99          | 48.68          | 74.00          | -25.32      | Peak     | 100         | 151           | P   |
| 2   | 5462.40         | -0.18       | 47.44          | 47.26          | 68.20          | -20.94      | Peak     | 100         | 151           | P   |
| 3   | 5719.30         | 0.94        | 94.82          | 95.76          | 200.00         | -104.24     | Peak     | 100         | 151           | P   |
| 4   | 5913.90         | 0.93        | 49.70          | 50.63          | 68.20          | -17.57      | Peak     | 100         | 151           | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH144 NSS1 MCS0  
Pol : Vertical Detector : Peak

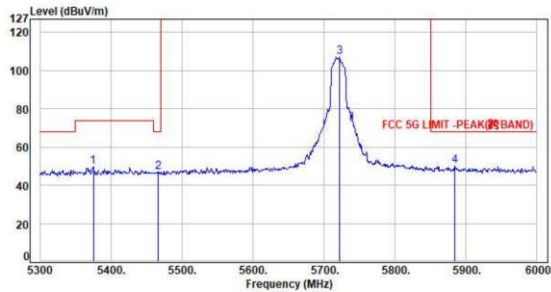

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5374.90         | -0.34       | 49.86          | 49.52          | 74.00          | -24.48      | Peak     | 100         | 63            | P   |
| 2   | 5466.60         | -0.16       | 47.20          | 47.04          | 68.20          | -21.16      | Peak     | 100         | 63            | P   |
| 3   | 5722.10         | 0.95        | 106.46         | 107.41         | 200.00         | -92.59      | Peak     | 100         | 63            | P   |
| 4   | 5884.50         | 0.96        | 49.13          | 50.09          | 68.20          | -18.11      | Peak     | 100         | 63            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH144 NSS1 MCS0  
Pol : Horizontal Detector : Peak

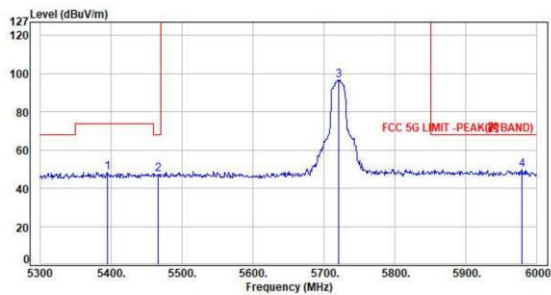


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5394.50         | -0.31       | 48.77          | 48.46          | 74.00          | -25.54      | Peak     | 100         | 151           | P   |
| 2   | 5466.60         | -0.16       | 47.68          | 47.52          | 68.20          | -20.68      | Peak     | 100         | 151           | P   |
| 3   | 5720.70         | 0.94        | 95.81          | 96.75          | 200.00         | -103.25     | Peak     | 100         | 151           | P   |
| 4   | 5979.00         | 0.92        | 48.73          | 49.65          | 68.20          | -18.55      | Peak     | 100         | 151           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH142 NSS1 MCS0  
Pol : Vertical Detector : Peak

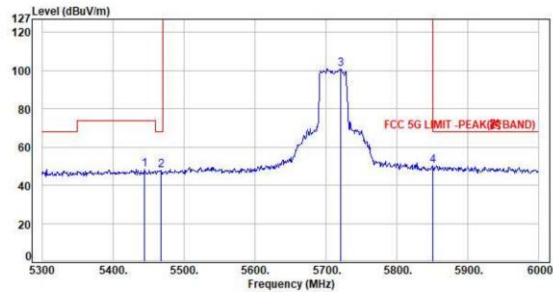

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5444.90         | -0.21       | 48.33          | 48.12          | 74.00          | -25.88      | Peak     | 100         | 64            | P   |
| 2   | 5467.30         | -0.16       | 47.76          | 47.60          | 68.20          | -20.60      | Peak     | 100         | 64            | P   |
| 3   | 5720.70         | 0.94        | 100.11         | 101.05         | 200.00         | -98.95      | Peak     | 100         | 64            | P   |
| 4   | 5850.90         | 1.04        | 49.26          | 50.30          | 68.20          | -17.90      | Peak     | 100         | 64            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH142 NSS1 MCS0  
Pol : Horizontal Detector : Peak

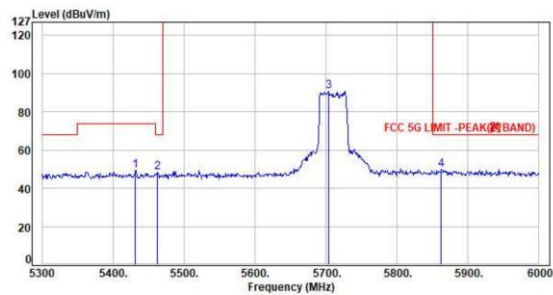


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5431.60         | -0.24       | 49.67          | 49.43          | 74.00          | -24.57      | Peak     | 100         | 152           | P   |
| 2   | 5463.10         | -0.17       | 48.66          | 48.49          | 68.20          | -19.71      | Peak     | 100         | 152           | P   |
| 3   | 5703.90         | 0.89        | 89.81          | 90.70          | 200.00         | -109.30     | Peak     | 100         | 152           | P   |
| 4   | 5862.80         | 1.00        | 48.97          | 49.97          | 68.20          | -18.23      | Peak     | 100         | 152           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH138 NSS1 MCS0  
Pol : Vertical Detector : Peak

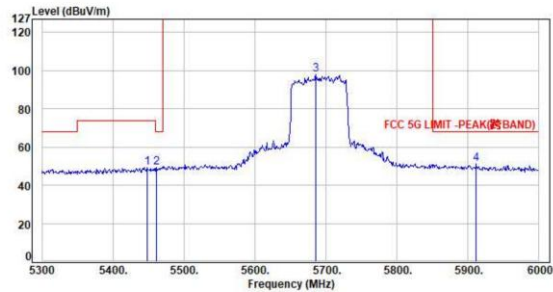

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5448.48         | -0.28       | 49.46          | 49.26          | 74.00          | -24.74      | Peak     | 100         | 63            | P   |
| 2   | 5461.00         | -0.18       | 49.51          | 49.33          | 68.20          | -18.87      | Peak     | 100         | 63            | P   |
| 3   | 5685.78         | 0.78        | 97.12          | 97.90          | 200.00         | -102.10     | Peak     | 100         | 63            | P   |
| 4   | 5911.80         | 0.93        | 50.27          | 51.20          | 68.20          | -17.00      | Peak     | 100         | 63            | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH138 NSS1 MCS0  
Pol : Horizontal Detector : Peak

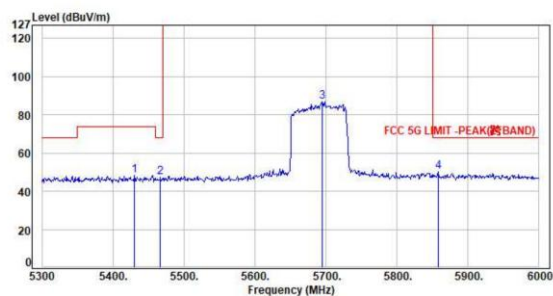

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5430.20         | -0.23       | 48.39          | 48.16          | 74.00          | -25.84      | Peak     | 120         | 152           | P   |
| 2   | 5466.60         | -0.16       | 47.43          | 47.27          | 68.20          | -20.93      | Peak     | 120         | 152           | P   |
| 3   | 5694.80         | 0.83        | 86.33          | 87.16          | 200.00         | -112.84     | Peak     | 120         | 152           | P   |
| 4   | 5857.90         | 1.01        | 49.06          | 50.07          | 68.20          | -18.13      | Peak     | 120         | 152           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor