





Test Mode : 1TX 11ax40 CH134 NSS1 MCS0  
Pol : Vertical Detector : Peak

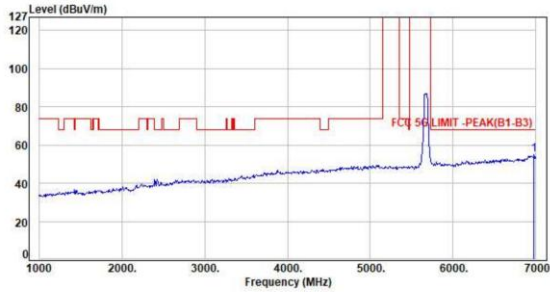

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6976.00         | 3.68        | 51.17          | 54.85          | 68.20          | -13.35      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH134 NSS1 MCS0  
Pol : Vertical Detector : Average

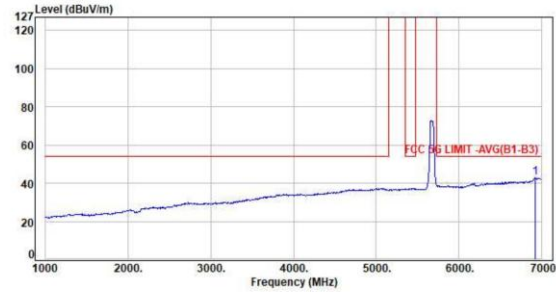

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 39.00          | 42.76          | 54.00          | -11.24      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH134 NSS1 MCS0  
Pol : Horizontal Detector : Peak

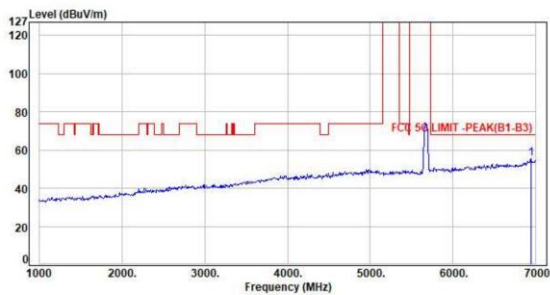

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6940.00         | 3.75        | 51.76          | 55.51          | 68.20          | -12.69      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH134 NSS1 MCS0  
Pol : Horizontal Detector : Average

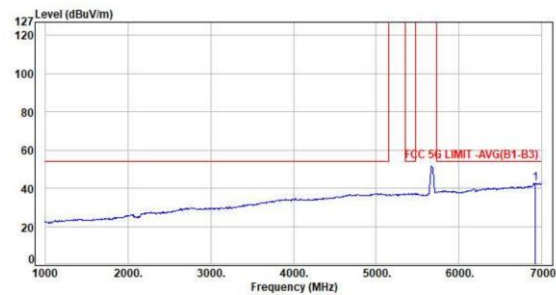


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 38.83          | 42.59          | 54.00          | -11.41      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH106 NSS1 MCS0  
Pol : Vertical Detector : Peak

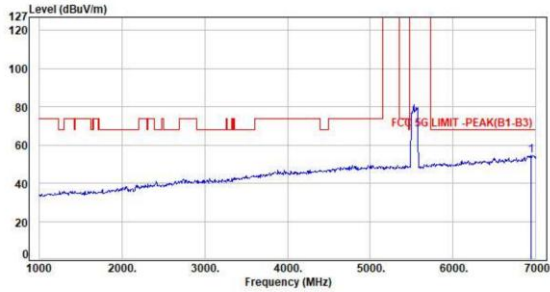

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 50.69          | 54.43          | 68.20          | -13.77      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH106 NSS1 MCS0  
Pol : Vertical Detector : Average

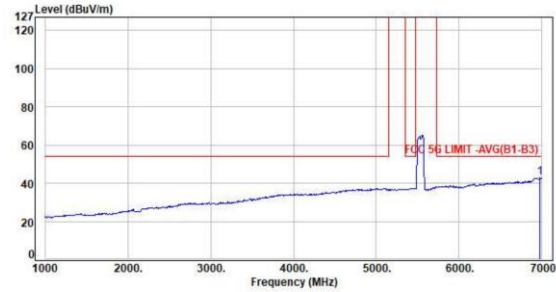

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6976.00         | 3.68        | 39.11          | 42.79          | 54.00          | -11.21      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH106 NSS1 MCS0  
Pol : Horizontal Detector : Peak

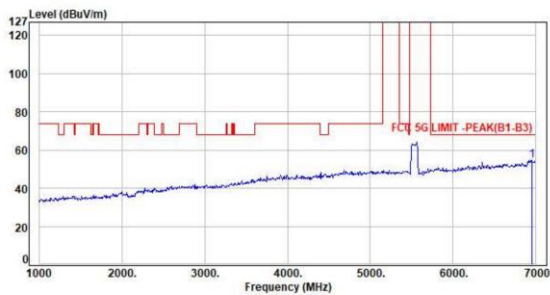

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6958.00         | 3.72        | 51.04          | 54.76          | 68.20          | -13.44      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH106 NSS1 MCS0  
Pol : Horizontal Detector : Average

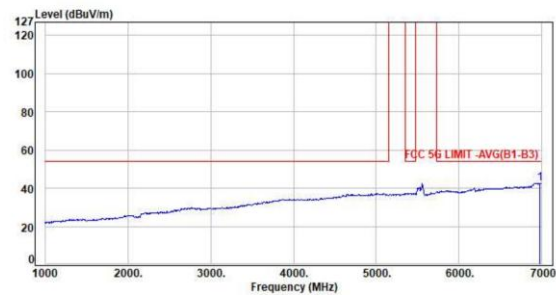


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6976.00         | 3.68        | 39.04          | 42.72          | 54.00          | -11.28      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH122 NSS1 MCS0  
Pol : Vertical Detector : Peak

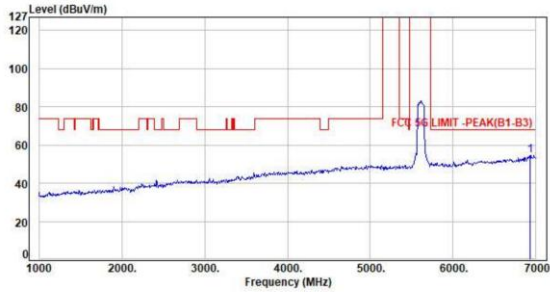

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5928.00         | 3.75        | 50.93          | 54.68          | 68.20          | -13.52      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH122 NSS1 MCS0  
Pol : Vertical Detector : Average

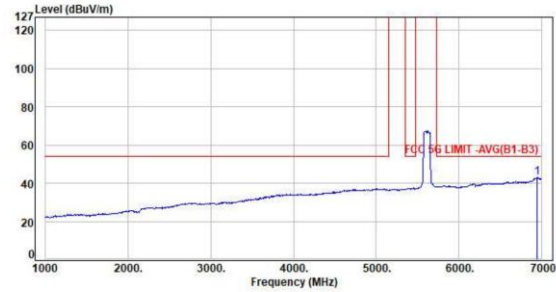

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5946.00         | 3.74        | 39.10          | 42.84          | 54.00          | -11.16      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH122 NSS1 MCS0  
Pol : Horizontal Detector : Peak

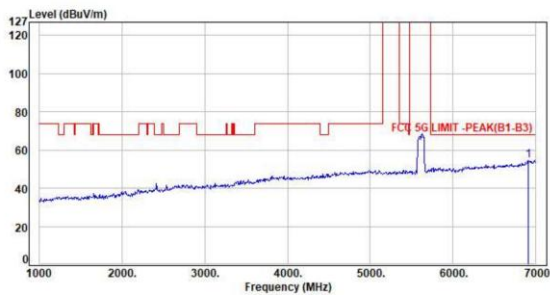

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5904.00         | 3.76        | 50.96          | 54.72          | 68.20          | -13.48      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH122 NSS1 MCS0  
Pol : Horizontal Detector : Average

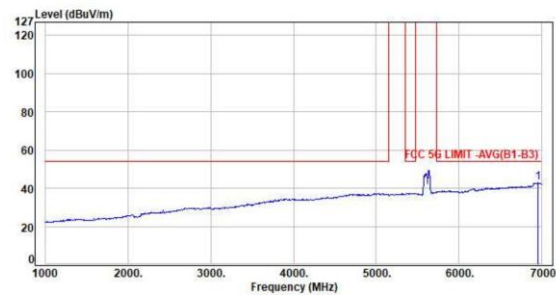

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 5958.00         | 3.72        | 39.06          | 42.78          | 54.00          | -11.22      | Average  | 100         | 0             | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

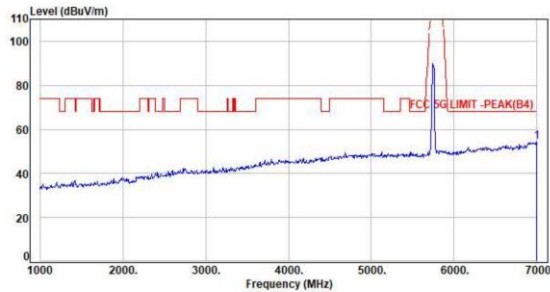

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6994.00         | 3.65        | 50.69          | 54.34          | 68.20          | -13.86      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Average

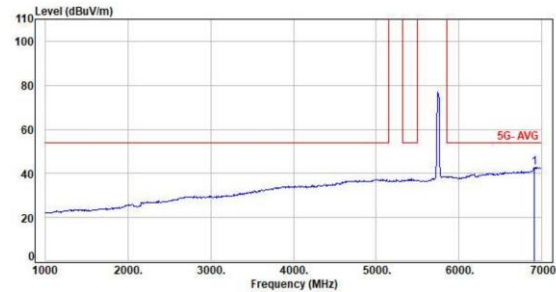

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6984.00         | 3.76        | 38.94          | 42.70          | 54.00          | -11.30      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

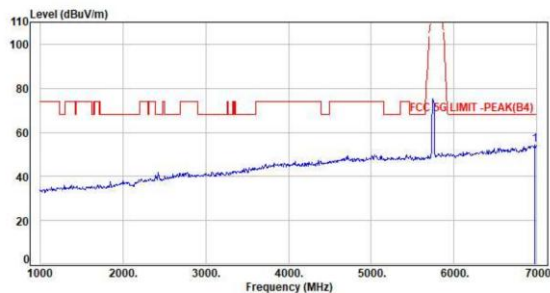

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6976.00         | 3.68        | 50.88          | 54.56          | 68.20          | -13.64      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Average

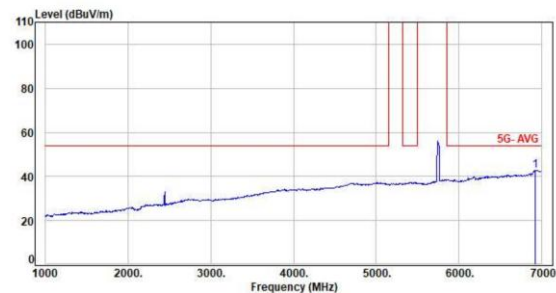

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6916.00         | 3.75        | 39.09          | 42.84          | 54.00          | -11.16      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

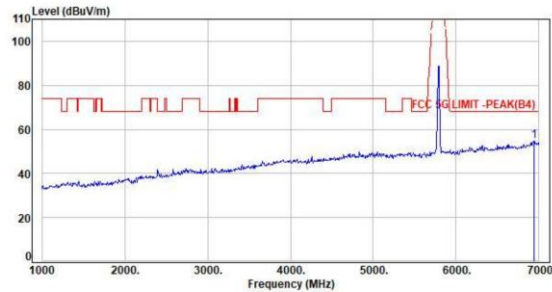

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 51.21          | 54.95          | 68.20          | -13.25      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Average

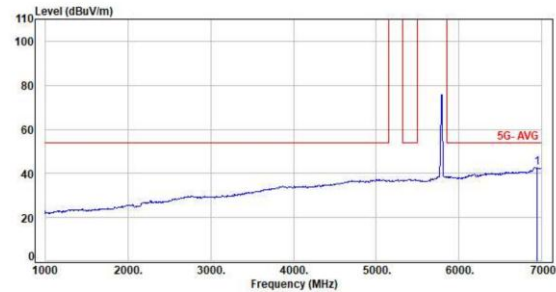

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 38.80          | 42.54          | 54.00          | -11.46      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

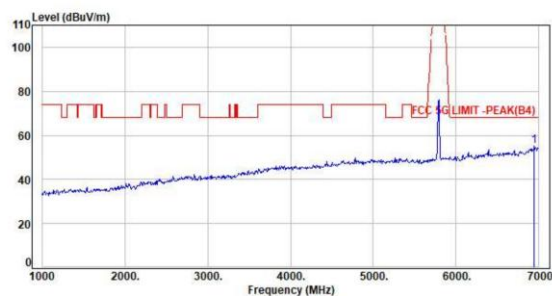

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 51.32          | 55.06          | 68.20          | -13.14      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Average

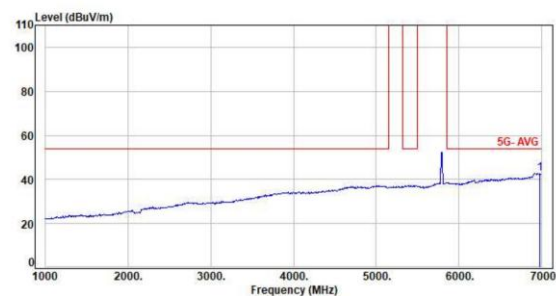

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6976.00         | 3.68        | 38.91          | 42.59          | 54.00          | -11.41      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

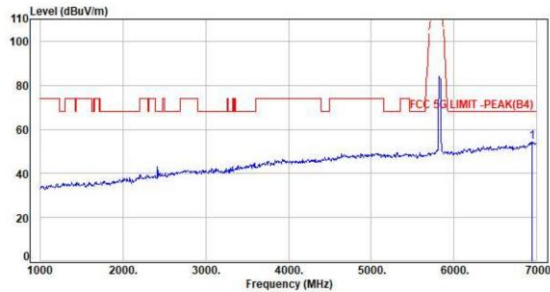

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6940.00         | 3.75        | 50.61          | 54.36          | 68.20          | -13.84      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Average

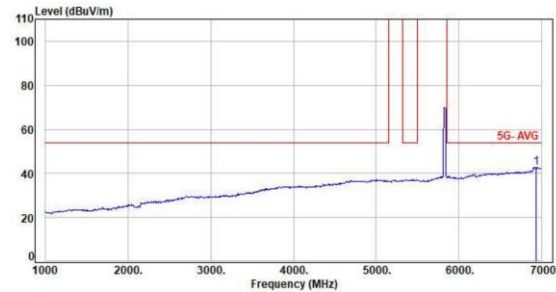

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6928.00         | 3.75        | 38.96          | 42.71          | 54.00          | -11.29      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

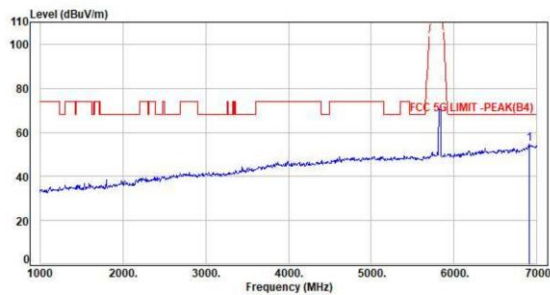

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6904.00         | 3.76        | 51.07          | 54.83          | 68.20          | -13.37      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Average

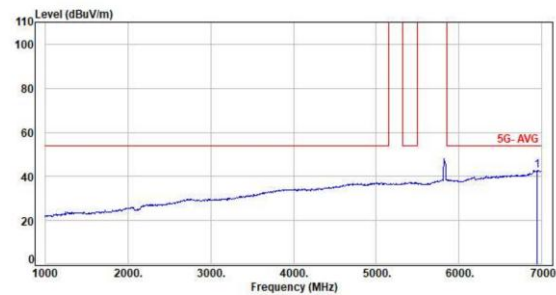

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 38.85          | 42.59          | 54.00          | -11.41      | Average  | 100         | 0             | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH149 NSS1 MCS0  
Pol : Vertical Detector : Peak

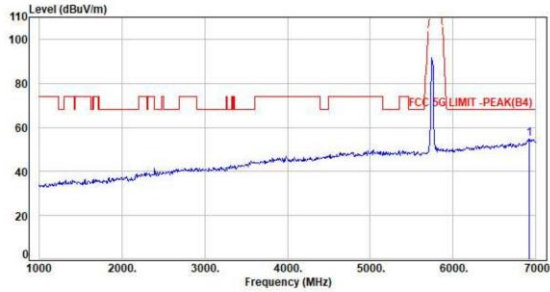

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 50.92          | 54.68          | 68.20          | -13.52      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH149 NSS1 MCS0  
Pol : Vertical Detector : Average

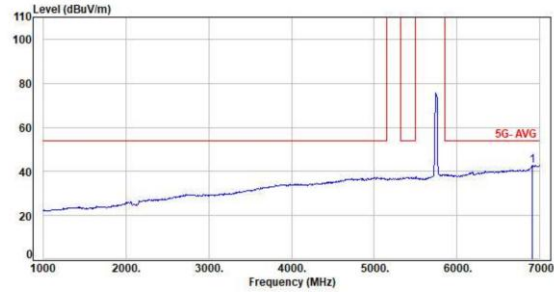

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6984.00         | 3.76        | 39.09          | 42.85          | 54.00          | -11.15      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH149 NSS1 MCS0  
Pol : Horizontal Detector : Peak

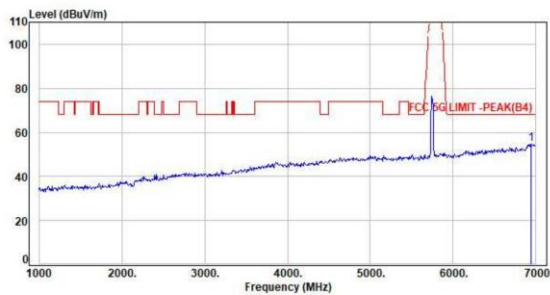

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6940.00         | 3.75        | 51.11          | 54.86          | 68.20          | -13.34      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH149 NSS1 MCS0  
Pol : Horizontal Detector : Average

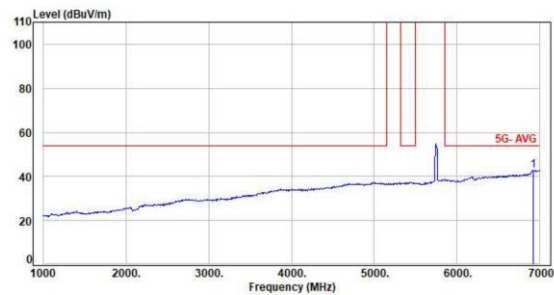


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 39.07          | 42.83          | 54.00          | -11.17      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH157 NSS1 MCS0  
Pol : Vertical Detector : Peak

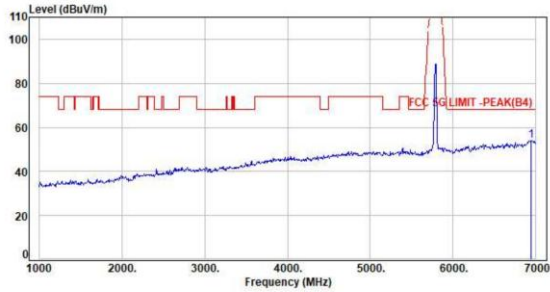

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6964.00         | 3.74        | 50.23          | 53.97          | 68.20          | -14.23      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH157 NSS1 MCS0  
Pol : Vertical Detector : Average

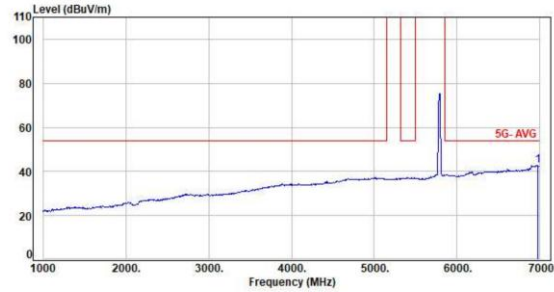

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6976.00         | 3.68        | 39.08          | 42.76          | 54.00          | -11.24      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH157 NSS1 MCS0  
Pol : Horizontal Detector : Peak

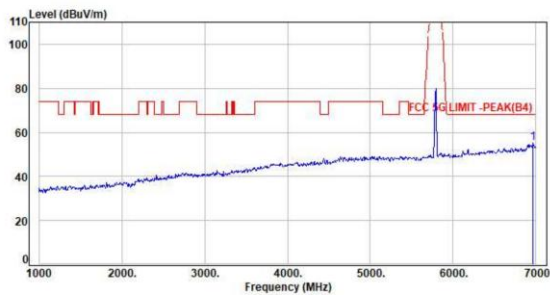

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6964.00         | 3.71        | 51.38          | 55.09          | 68.20          | -13.11      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH157 NSS1 MCS0  
Pol : Horizontal Detector : Average

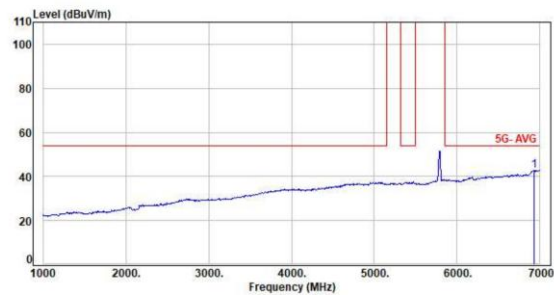


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6928.00         | 3.75        | 38.91          | 42.66          | 54.00          | -11.34      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH165 NSS1 MCS0  
Pol : Vertical Detector : Peak

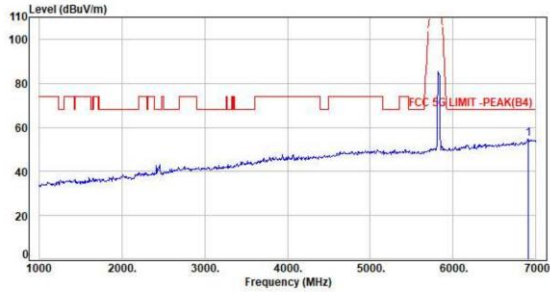

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6904.00         | 3.76        | 50.89          | 54.65          | 68.20          | -13.55      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH165 NSS1 MCS0  
Pol : Vertical Detector : Average

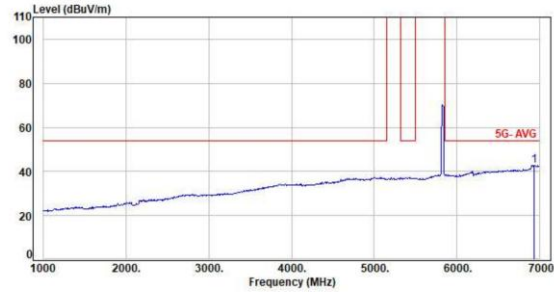

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6928.00         | 3.75        | 39.01          | 42.76          | 54.00          | -11.24      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH165 NSS1 MCS0  
Pol : Horizontal Detector : Peak

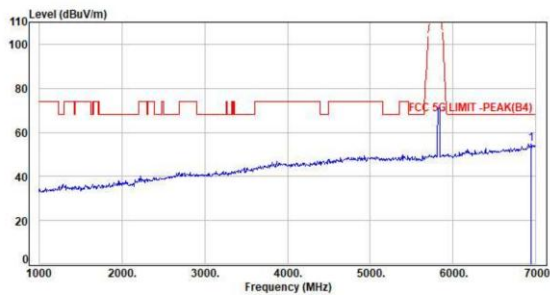

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 50.98          | 54.72          | 68.20          | -13.48      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH165 NSS1 MCS0  
Pol : Horizontal Detector : Average

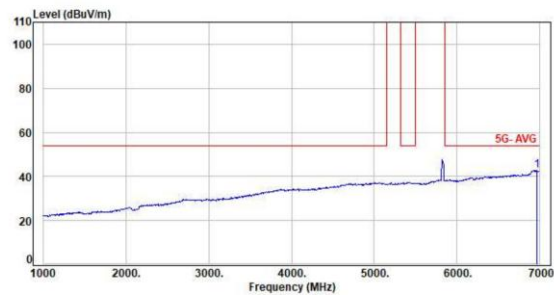


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6964.00         | 3.71        | 38.88          | 42.59          | 54.00          | -11.41      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH151 NSS1 MCS0  
Pol : Vertical Detector : Peak

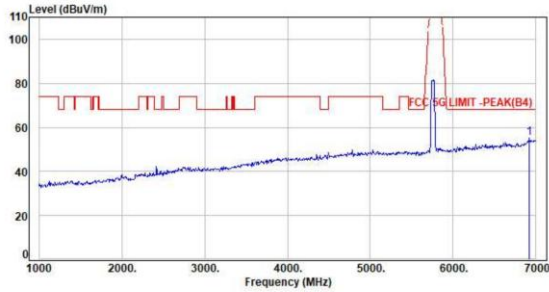

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 51.29          | 55.05          | 68.20          | -13.15      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH151 NSS1 MCS0  
Pol : Vertical Detector : Average

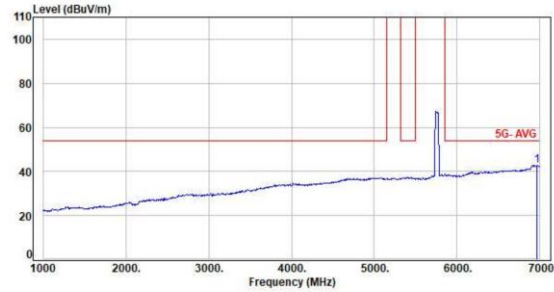

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6964.00         | 3.71        | 39.06          | 42.77          | 54.00          | -11.23      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH151 NSS1 MCS0  
Pol : Horizontal Detector : Peak

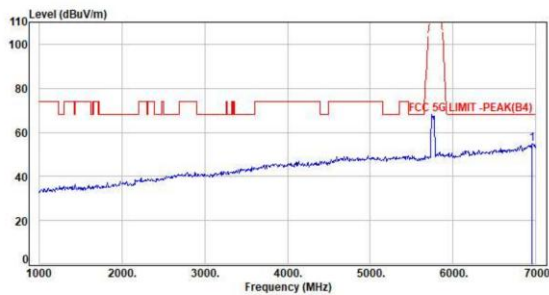

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6958.00         | 3.72        | 51.18          | 54.90          | 68.20          | -13.30      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH151 NSS1 MCS0  
Pol : Horizontal Detector : Average

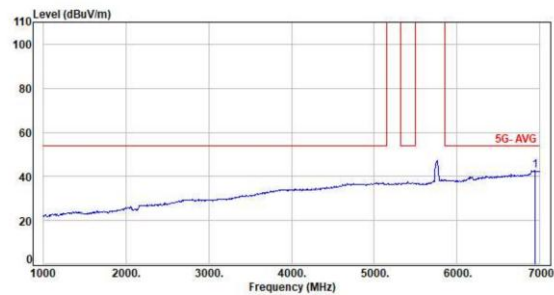


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6940.00         | 3.75        | 38.97          | 42.72          | 54.00          | -11.28      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH159 NSS1 MCS0  
Pol : Vertical Detector : Peak

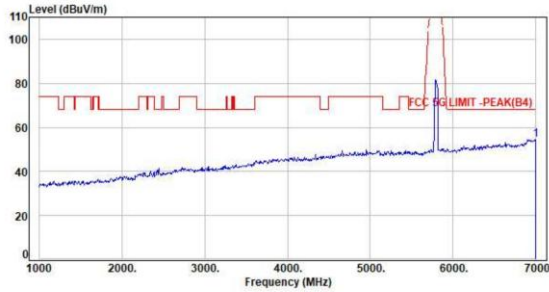

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6994.00         | 3.65        | 50.71          | 54.36          | 68.20          | -13.84      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH159 NSS1 MCS0  
Pol : Vertical Detector : Average

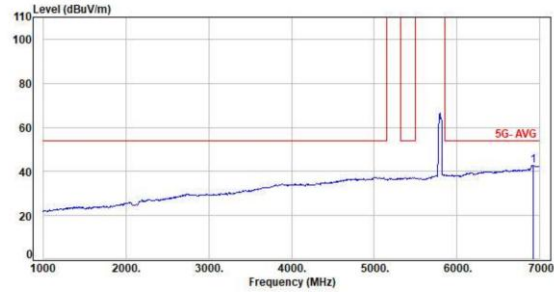

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 38.99          | 42.75          | 54.00          | -11.25      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH159 NSS1 MCS0  
Pol : Horizontal Detector : Peak

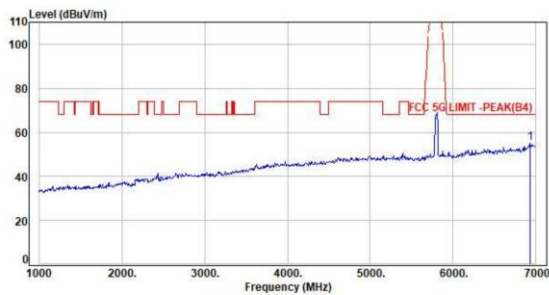

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6928.00         | 3.75        | 51.61          | 55.36          | 68.20          | -12.84      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH159 NSS1 MCS0  
Pol : Horizontal Detector : Average

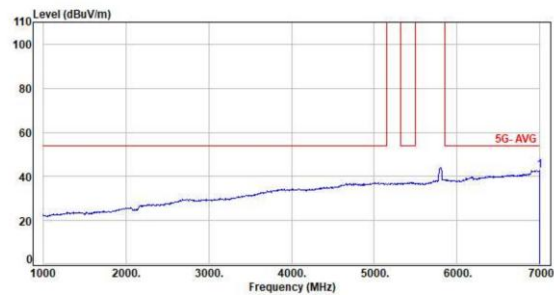


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6994.00         | 3.65        | 38.98          | 42.63          | 54.00          | -11.37      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH155 NSS1 MCS0  
Pol : Vertical Detector : Peak

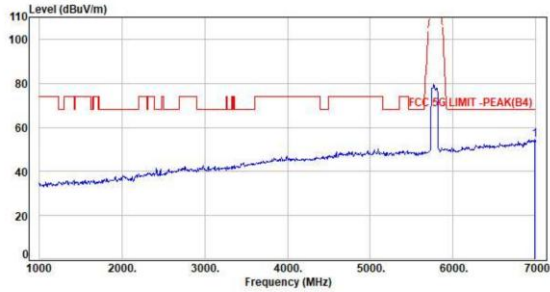

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6982.00         | 3.68        | 50.80          | 54.48          | 68.20          | -13.72      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH155 NSS1 MCS0  
Pol : Vertical Detector : Average

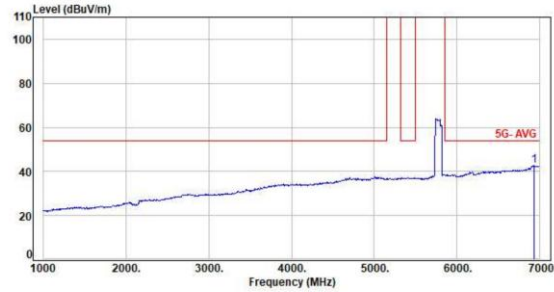

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6982.00         | 3.75        | 38.78          | 42.53          | 54.00          | -11.47      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH155 NSS1 MCS0  
Pol : Horizontal Detector : Peak

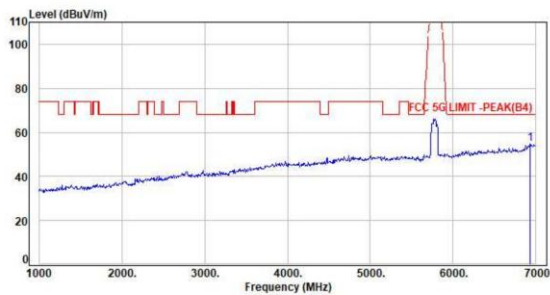

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6982.00         | 3.75        | 50.86          | 54.61          | 68.20          | -13.59      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH155 NSS1 MCS0  
Pol : Horizontal Detector : Average

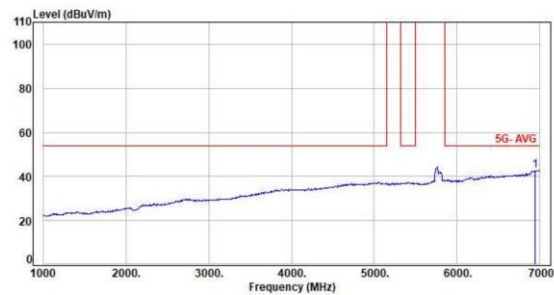

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6940.00         | 3.75        | 38.87          | 42.62          | 54.00          | -11.38      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




## Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps

Pol : Vertical

Detector : Peak

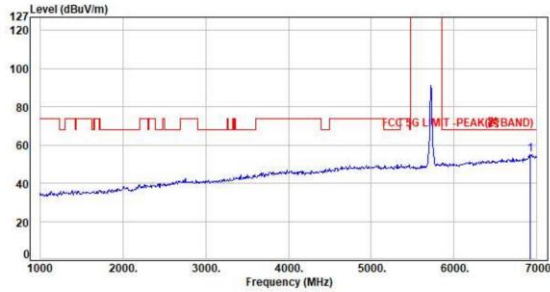

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6916.00         | 3.75        | 51.34          | 55.09          | 68.20          | -13.11      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps

Pol : Vertical

Detector : Average

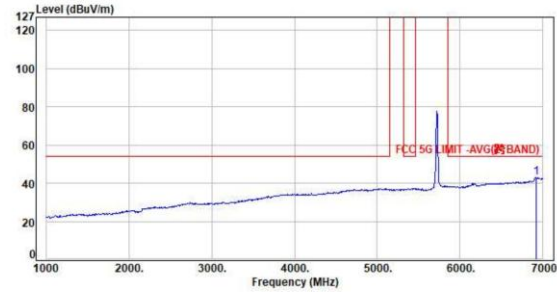

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6916.00         | 3.75        | 39.45          | 43.20          | 54.00          | -10.80      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps

Pol : Horizontal

Detector : Peak

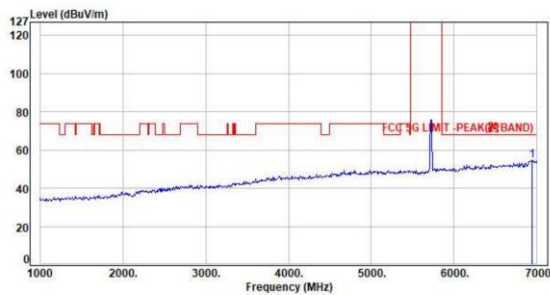

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 50.86          | 54.60          | 68.20          | -13.60      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps

Pol : Horizontal

Detector : Average

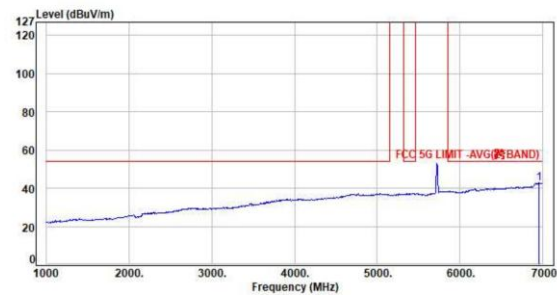

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6952.00         | 3.75        | 38.88          | 42.63          | 54.00          | -11.37      | Average  | 100         | 0             | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH144 NSS1 MCS0  
Pol : Vertical Detector : Peak

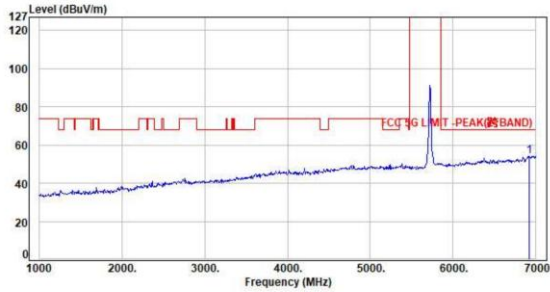

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 50.27          | 54.03          | 68.20          | -14.17      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH144 NSS1 MCS0  
Pol : Vertical Detector : Average

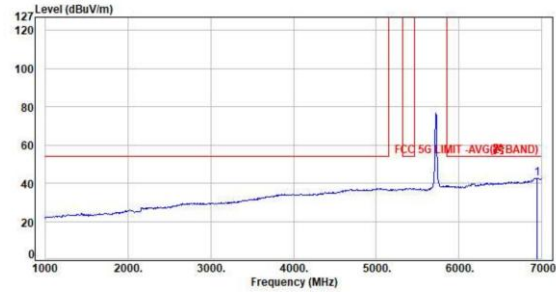

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6940.00         | 3.75        | 38.85          | 42.60          | 54.00          | -11.40      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH144 NSS1 MCS0  
Pol : Horizontal Detector : Peak

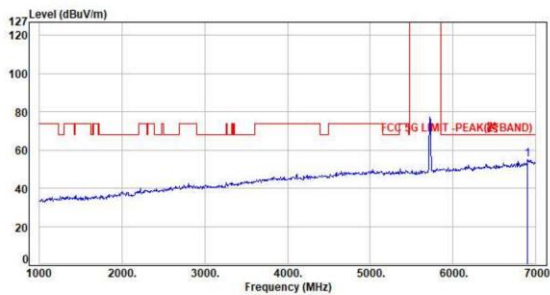

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6898.00         | 3.75        | 51.10          | 54.85          | 68.20          | -13.35      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH144 NSS1 MCS0  
Pol : Horizontal Detector : Average

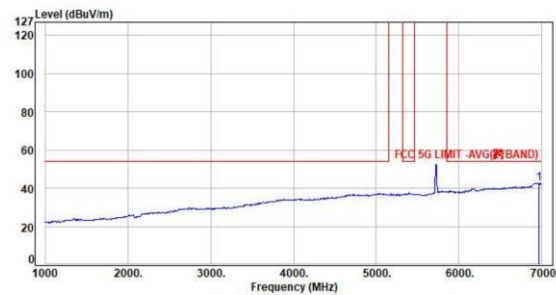


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6964.00         | 3.71        | 39.02          | 42.73          | 54.00          | -11.27      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH142 NSS1 MCS0  
Pol : Vertical Detector : Peak

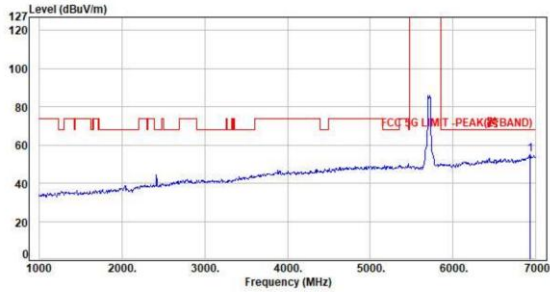

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6928.00         | 3.75        | 51.36          | 55.11          | 68.20          | -13.09      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH142 NSS1 MCS0  
Pol : Vertical Detector : Average

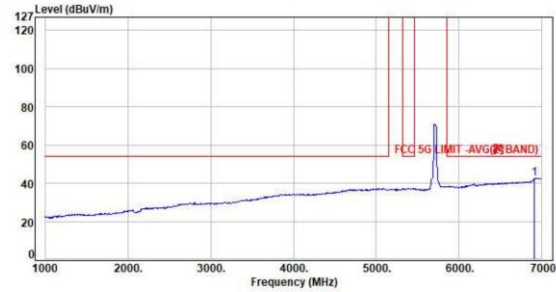

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6984.00         | 3.76        | 38.91          | 42.67          | 54.00          | -11.33      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH142 NSS1 MCS0  
Pol : Horizontal Detector : Peak

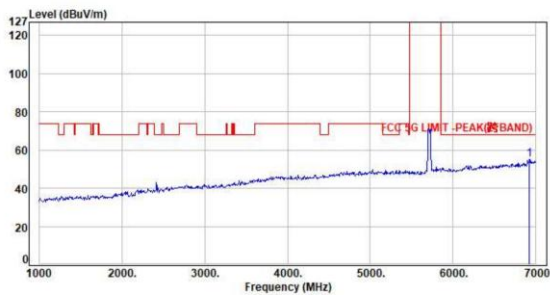

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6922.00         | 3.76        | 51.19          | 54.95          | 68.20          | -13.25      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH142 NSS1 MCS0  
Pol : Horizontal Detector : Average

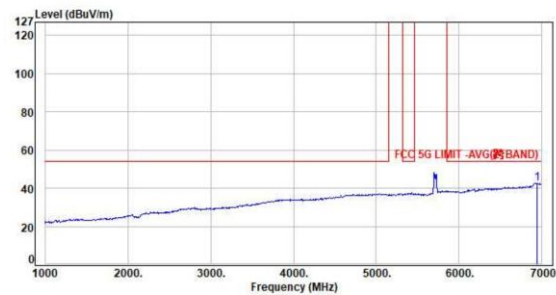


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6946.00         | 3.74        | 38.95          | 42.69          | 54.00          | -11.31      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH138 NSS1 MCS0  
Pol : Vertical Detector : Peak

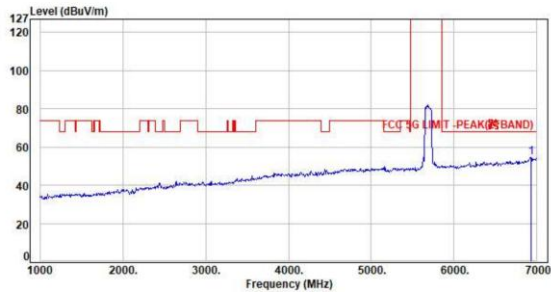

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6928.00         | 3.75        | 50.74          | 54.49          | 68.20          | -13.71      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH138 NSS1 MCS0  
Pol : Vertical Detector : Average

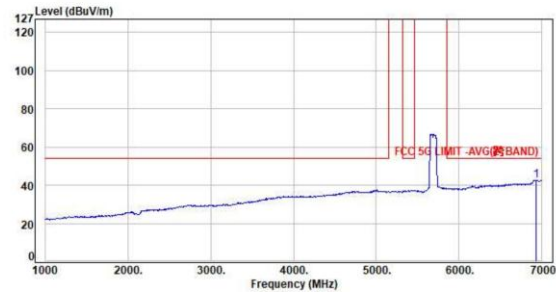

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6928.00         | 3.75        | 38.93          | 42.68          | 54.00          | -11.32      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH138 NSS1 MCS0  
Pol : Horizontal Detector : Peak

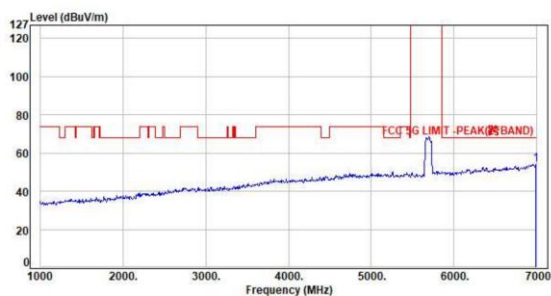

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6982.00         | 3.68        | 50.28          | 53.96          | 68.20          | -14.24      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH138 NSS1 MCS0  
Pol : Horizontal Detector : Average

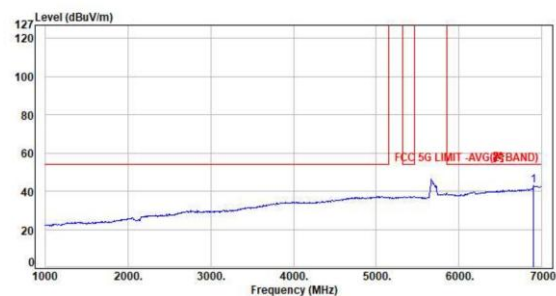

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 6898.00         | 3.75        | 39.14          | 42.89          | 54.00          | -11.11      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




## Test Result and Data (7GHz ~ 18GHz)

## ANT 1

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Peak

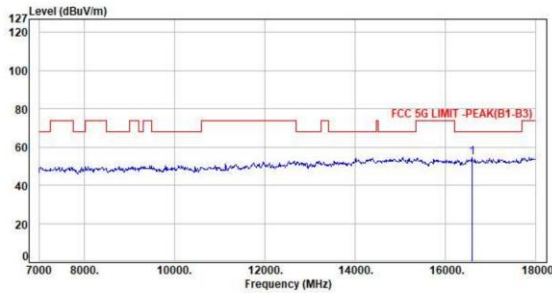


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 16581.00           | 5.19           | 49.49             | 54.68             | 68.20             | -13.52         | Peak     | 100            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Vertical

Detector : Average

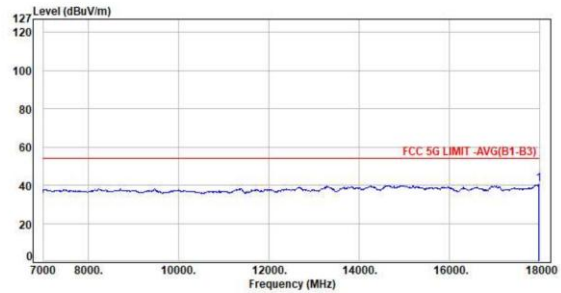


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 17967.00           | 6.06           | 34.39             | 40.45             | 54.00             | -13.55         | Average  | 100            | 360              | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Peak

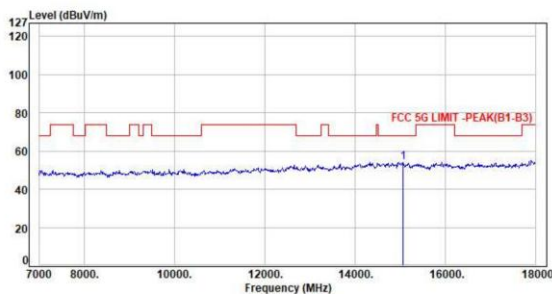


| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 15052.00           | 5.73           | 48.18             | 53.91             | 68.20             | -14.29         | Peak     | 100            | 0                | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH36 6Mbps

Pol : Horizontal

Detector : Average

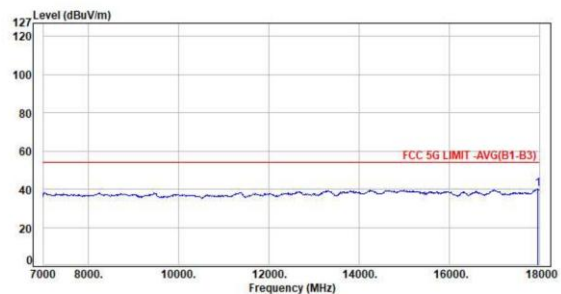

| No. | Frequency<br>(MHz) | Factor<br>(dB) | Reading<br>(dBuV) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector | Height<br>(cm) | Azimuth<br>(deg) | P/F |
|-----|--------------------|----------------|-------------------|-------------------|-------------------|----------------|----------|----------------|------------------|-----|
| 1   | 17956.00           | 6.07           | 33.98             | 40.05             | 54.00             | -13.95         | Average  | 100            | 0                | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Peak

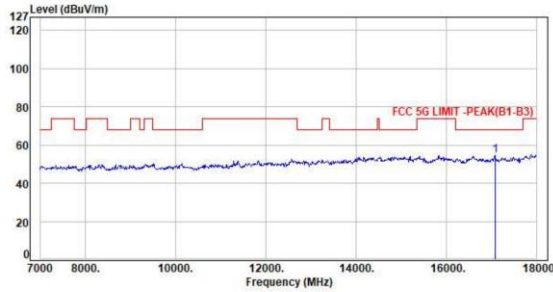

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17076.00        | 4.67        | 49.99          | 54.66          | 68.20          | -13.54      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Vertical

Detector : Average

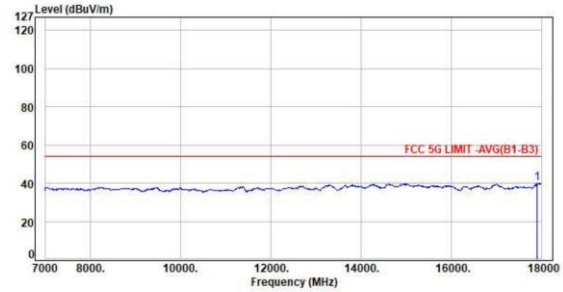

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17981.00        | 5.98        | 33.95          | 39.93          | 54.00          | -14.07      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Peak

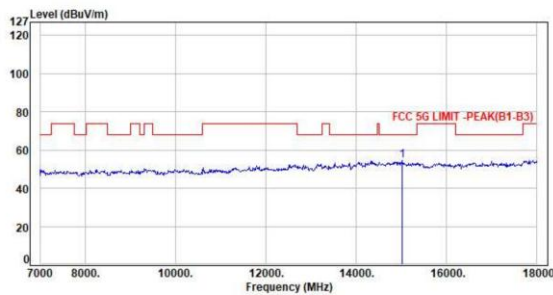

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 15019.00        | 5.78        | 48.90          | 54.68          | 68.20          | -13.52      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH40 6Mbps

Pol : Horizontal

Detector : Average

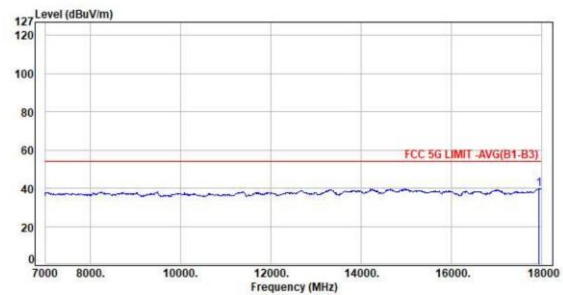

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 33.77          | 39.81          | 54.00          | -14.19      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Peak

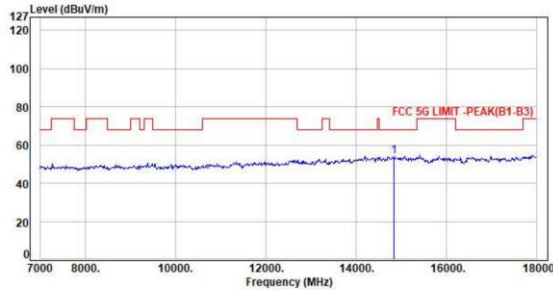

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14843.00        | 5.76        | 48.52          | 54.28          | 68.20          | -13.92      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Vertical

Detector : Average

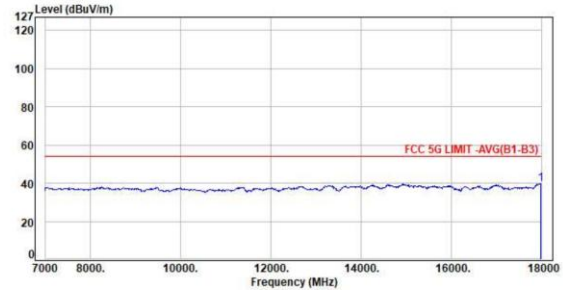

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17967.00        | 6.06        | 33.68          | 39.74          | 54.00          | -14.26      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Peak

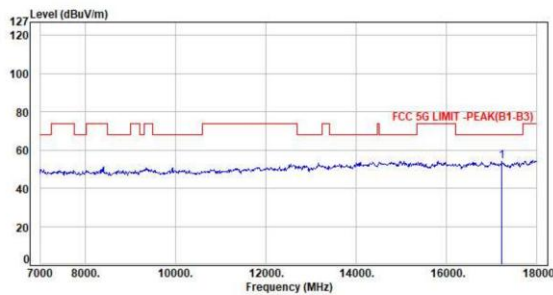

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17230.00        | 4.69        | 49.28          | 53.97          | 68.20          | -14.23      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH48 6Mbps

Pol : Horizontal

Detector : Average

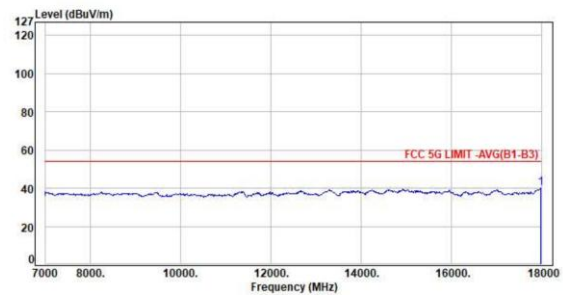

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17967.00        | 6.06        | 33.88          | 39.94          | 54.00          | -14.06      | Average  | 100         | 0             | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH36 NSS1 MCS0  
Pol : Vertical Detector : Peak

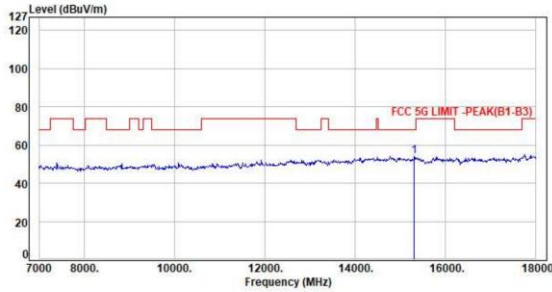

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 15305.00        | 5.56        | 48.75          | 54.31          | 68.20          | -13.89      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH36 NSS1 MCS0  
Pol : Vertical Detector : Average

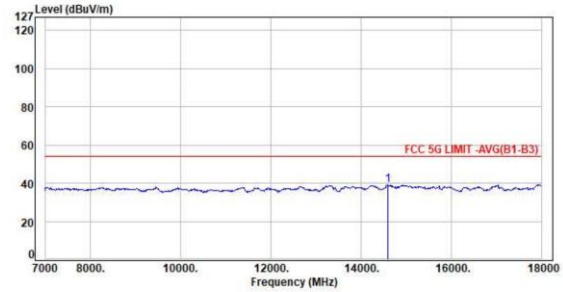

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14590.00        | 5.86        | 33.25          | 39.11          | 54.00          | -14.89      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH36 NSS1 MCS0  
Pol : Horizontal Detector : Peak

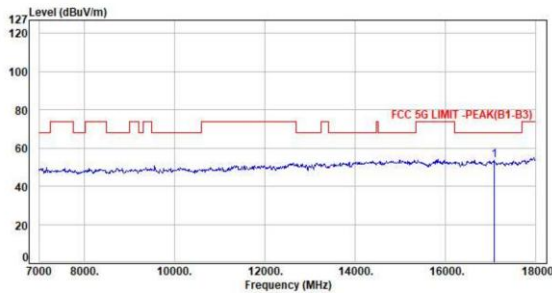

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17087.00        | 4.66        | 48.98          | 53.64          | 68.20          | -14.56      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH36 NSS1 MCS0  
Pol : Horizontal Detector : Average

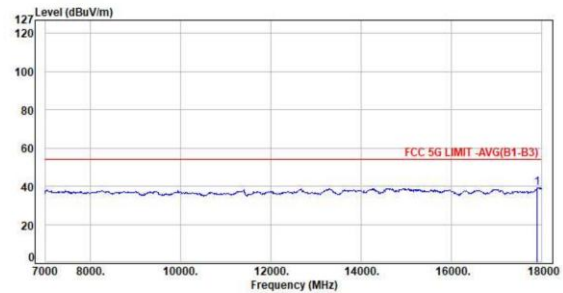


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17901.00        | 5.98        | 33.04          | 39.02          | 54.00          | -14.98      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH40 NSS1 MCS0  
Pol : Vertical Detector : Peak

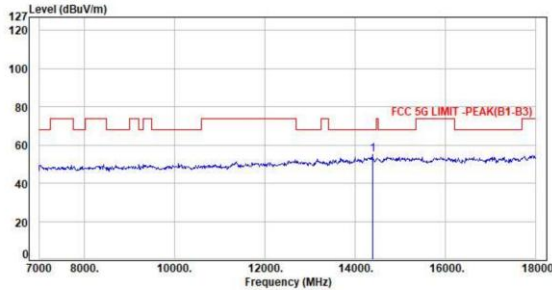

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14381.00        | 5.76        | 49.06          | 54.82          | 68.20          | -13.38      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH40 NSS1 MCS0  
Pol : Vertical Detector : Average

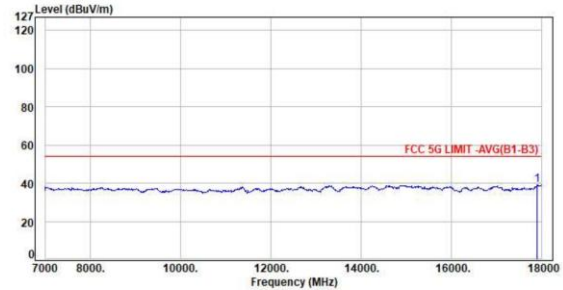

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17981.00        | 5.98        | 33.21          | 39.19          | 54.00          | -14.81      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH40 NSS1 MCS0  
Pol : Horizontal Detector : Peak

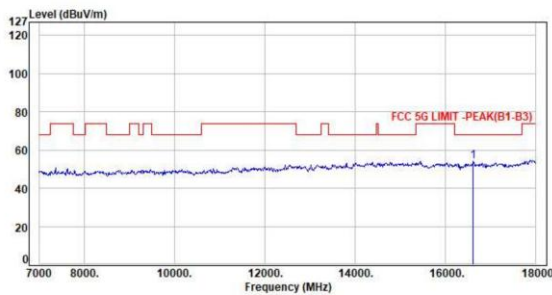

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 16614.00        | 5.06        | 48.82          | 53.88          | 68.20          | -14.32      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH40 NSS1 MCS0  
Pol : Horizontal Detector : Average

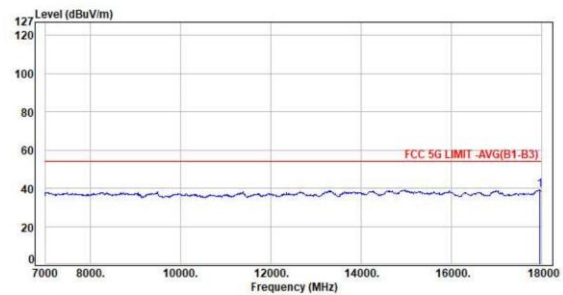


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17956.00        | 6.07        | 33.04          | 39.11          | 54.00          | -14.89      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH48 NSS1 MCS0  
Pol : Vertical Detector : Peak

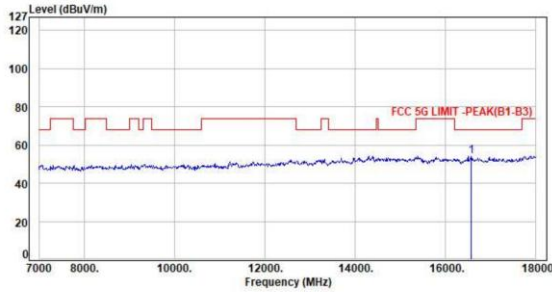

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 16570.00        | 5.24        | 48.99          | 54.23          | 68.20          | -13.97      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH48 NSS1 MCS0  
Pol : Vertical Detector : Average

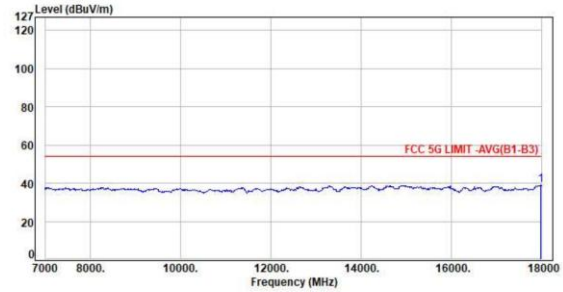

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17967.00        | 6.06        | 32.94          | 39.00          | 54.00          | -15.00      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH48 NSS1 MCS0  
Pol : Horizontal Detector : Peak

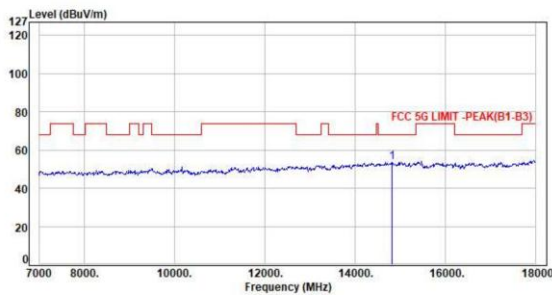

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14810.00        | 5.77        | 47.79          | 53.56          | 68.20          | -14.64      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH48 NSS1 MCS0  
Pol : Horizontal Detector : Average

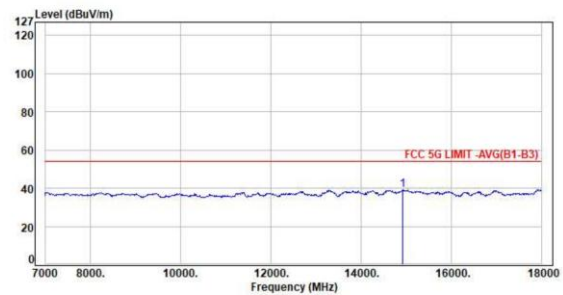


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14920.00        | 5.74        | 33.46          | 39.20          | 54.00          | -14.80      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH38 NSS1 MCS0  
Pol : Vertical Detector : Peak

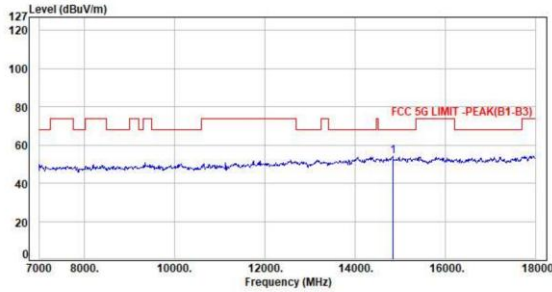

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14832.00        | 5.77        | 48.30          | 54.07          | 68.20          | -14.13      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH38 NSS1 MCS0  
Pol : Vertical Detector : Average

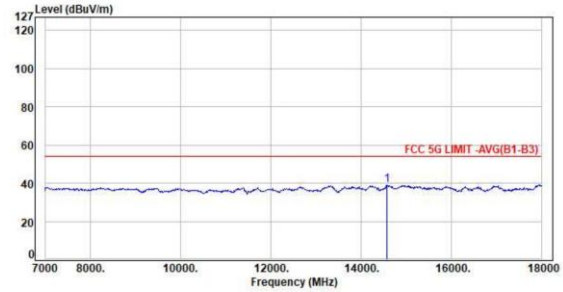

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14568.00        | 5.87        | 33.31          | 39.18          | 54.00          | -14.82      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH38 NSS1 MCS0  
Pol : Horizontal Detector : Peak

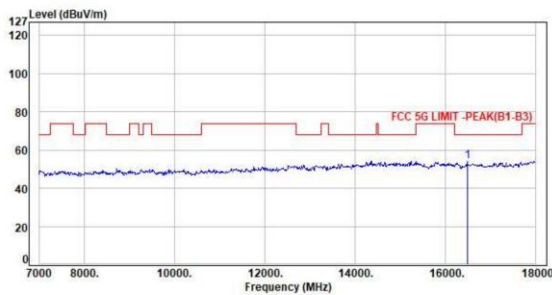

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 16482.00        | 5.40        | 48.89          | 54.29          | 68.20          | -13.91      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH38 NSS1 MCS0  
Pol : Horizontal Detector : Average

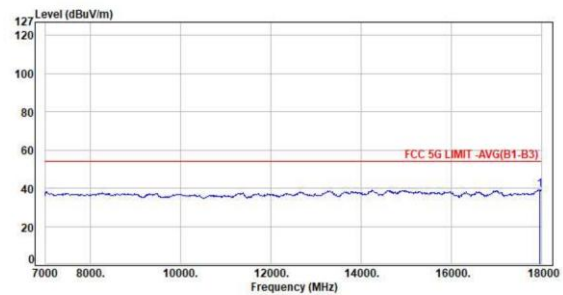


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17956.00        | 6.07        | 33.08          | 39.15          | 54.00          | -14.85      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH46 NSS1 MCS0  
Pol : Vertical Detector : Peak

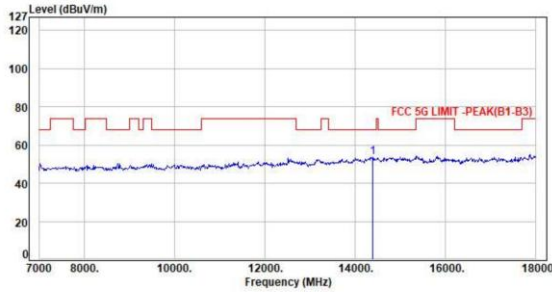

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14381.00        | 5.76        | 48.06          | 53.82          | 68.20          | -14.38      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH46 NSS1 MCS0  
Pol : Vertical Detector : Average

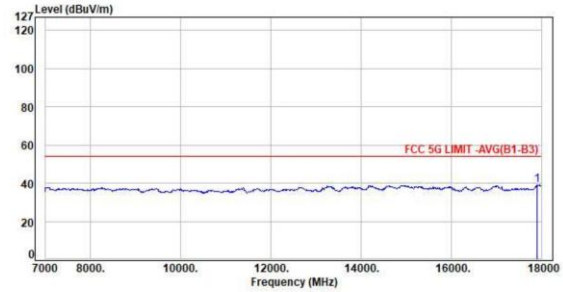

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17981.00        | 5.98        | 32.99          | 38.97          | 54.00          | -15.03      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH46 NSS1 MCS0  
Pol : Horizontal Detector : Peak

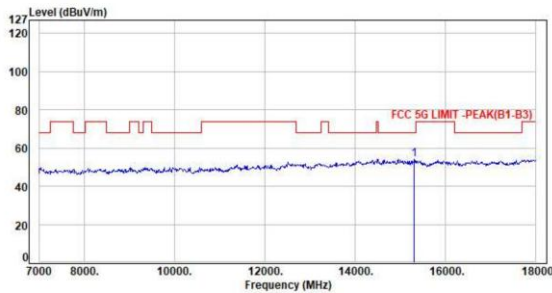

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 15305.00        | 5.56        | 48.54          | 54.10          | 68.20          | -14.10      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH46 NSS1 MCS0  
Pol : Horizontal Detector : Average

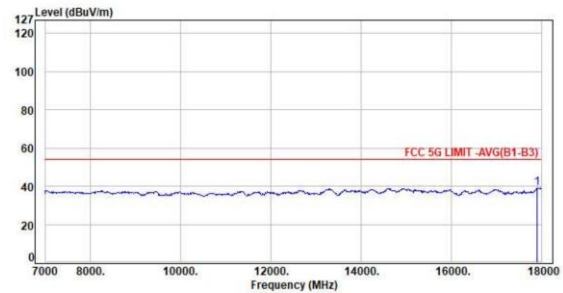


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17890.00        | 5.92        | 32.99          | 38.91          | 54.00          | -15.09      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Vertical Detector : Peak

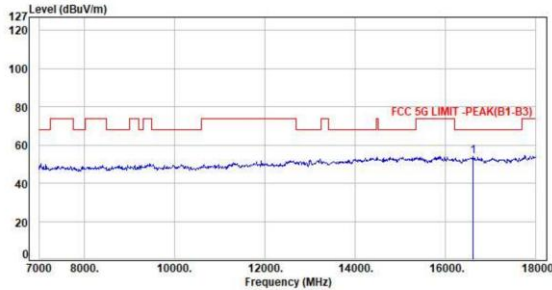

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 16614.00        | 5.06        | 49.11          | 54.17          | 68.20          | -14.03      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Vertical Detector : Average

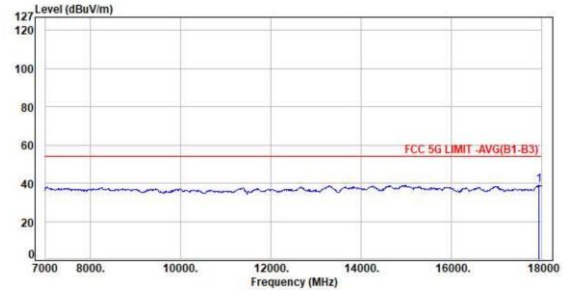

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 32.88          | 38.92          | 54.00          | -15.08      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Horizontal Detector : Peak

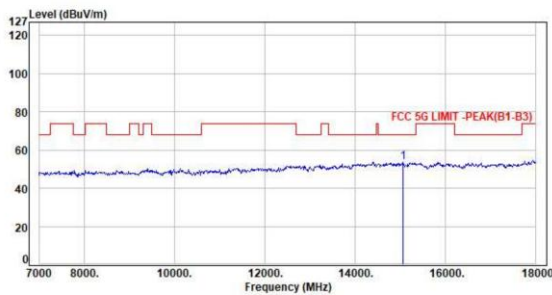

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 15052.00        | 5.73        | 47.98          | 53.71          | 68.20          | -14.49      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH42 NSS1 MCS0  
Pol : Horizontal Detector : Average

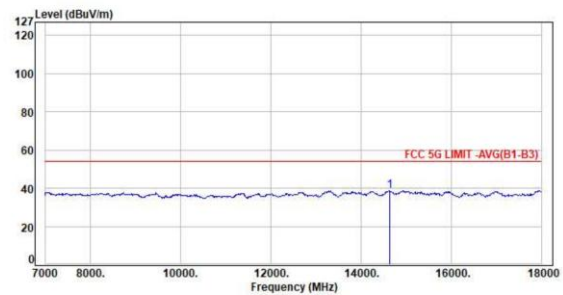

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14634.00        | 5.98        | 32.75          | 38.73          | 54.00          | -15.27      | Average  | 100         | 0             | P   |


Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Peak

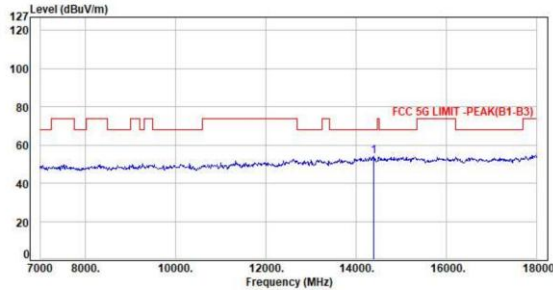

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14392.00        | 5.73        | 48.24          | 53.97          | 68.20          | -14.23      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Vertical

Detector : Average

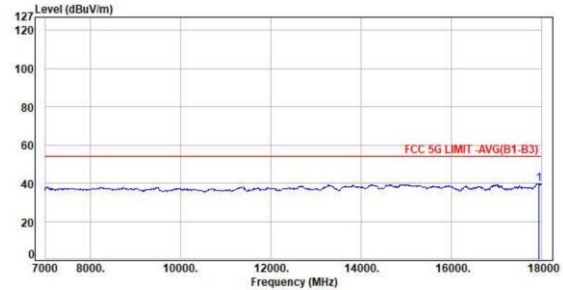

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 33.69          | 39.73          | 54.00          | -14.27      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Peak

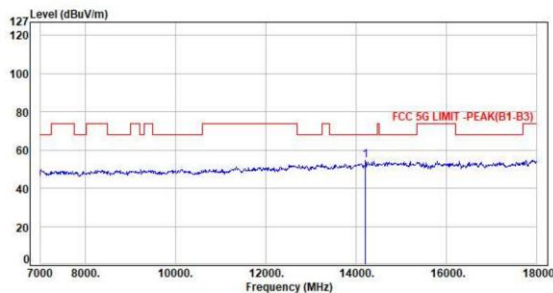

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14205.00        | 5.66        | 48.89          | 54.55          | 68.20          | -13.65      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH52 6Mbps

Pol : Horizontal

Detector : Average

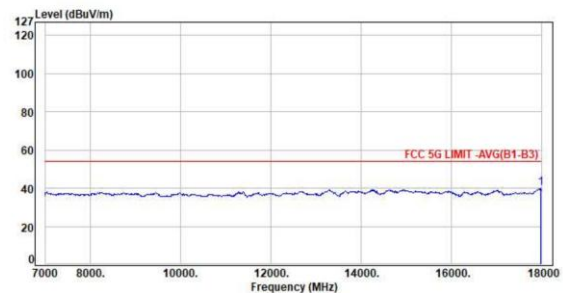

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17967.00        | 6.06        | 33.92          | 39.98          | 54.00          | -14.02      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Peak

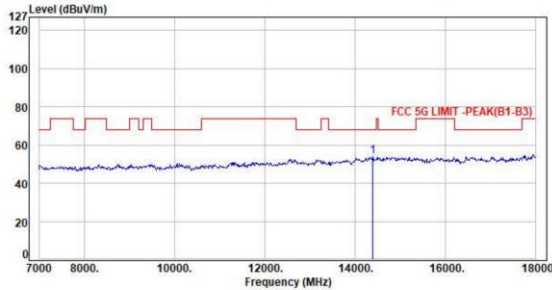

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14392.00        | 5.73        | 48.41          | 54.14          | 68.20          | -14.06      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Average

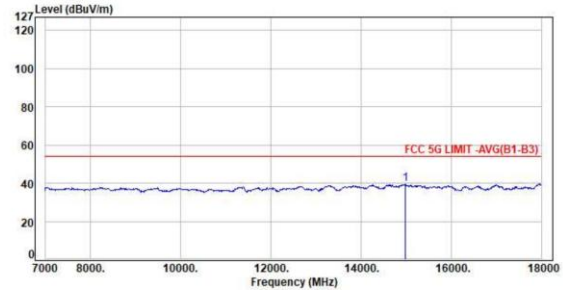

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14986.00        | 5.79        | 33.81          | 39.60          | 54.00          | -14.40      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Peak

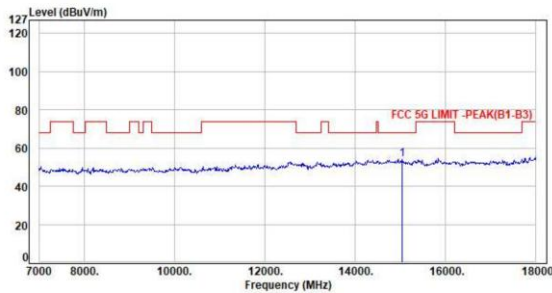

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 15030.00        | 5.77        | 48.28          | 54.05          | 68.20          | -14.15      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Average

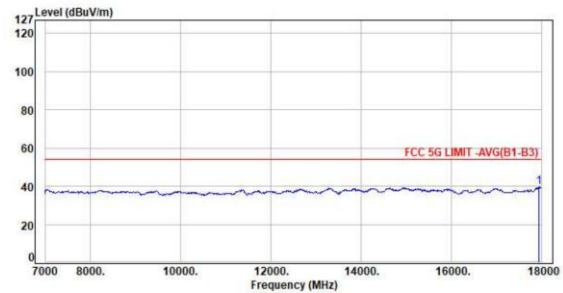

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 33.44          | 39.48          | 54.00          | -14.52      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Peak

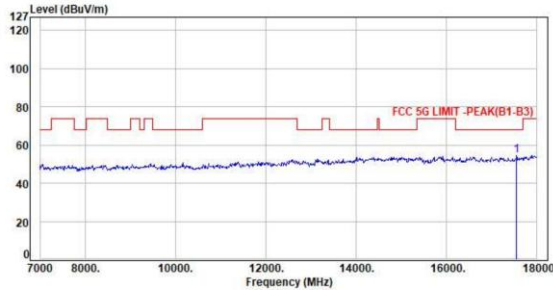

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17549.00        | 5.09        | 49.64          | 54.73          | 68.20          | -13.47      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Average

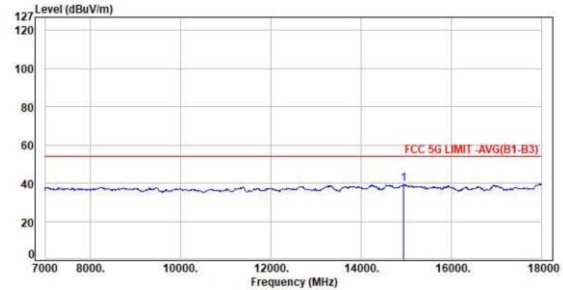

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14942.00        | 5.72        | 33.88          | 39.60          | 54.00          | -14.40      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Peak

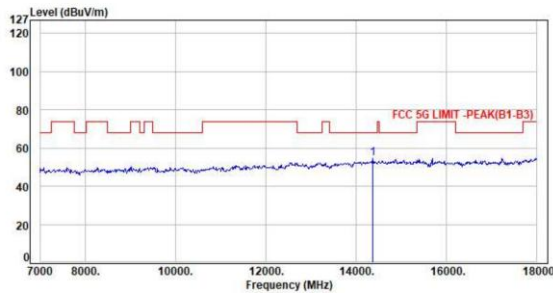

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14370.00        | 5.78        | 48.94          | 54.72          | 68.20          | -13.48      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Average

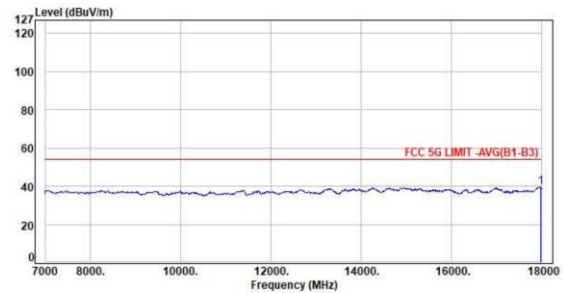

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17967.00        | 6.06        | 33.54          | 39.60          | 54.00          | -14.40      | Average  | 100         | 0             | P   |


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH52 NSS1 MCS0  
Pol : Vertical Detector : Peak

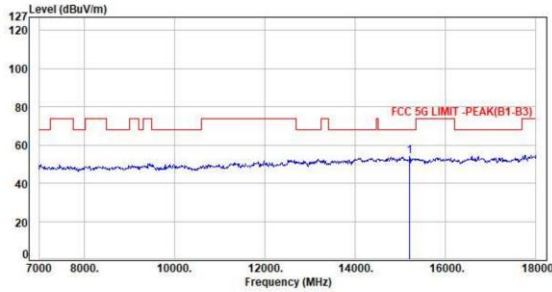

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 15206.00        | 5.62        | 48.58          | 54.20          | 68.20          | -14.00      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH52 NSS1 MCS0  
Pol : Vertical Detector : Average

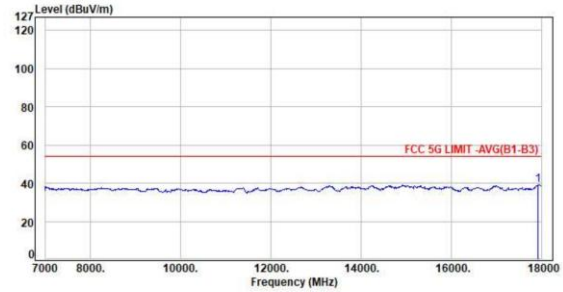

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17923.00        | 6.03        | 33.14          | 39.17          | 54.00          | -14.83      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH52 NSS1 MCS0  
Pol : Horizontal Detector : Peak

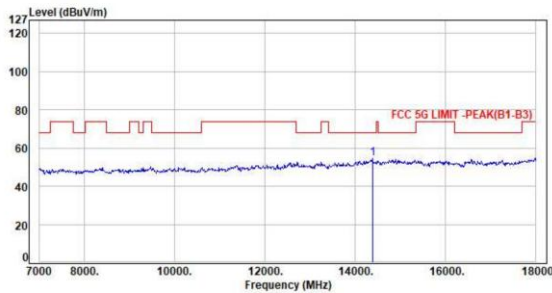

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14381.00        | 5.76        | 48.68          | 54.44          | 68.20          | -13.76      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH52 NSS1 MCS0  
Pol : Horizontal Detector : Average

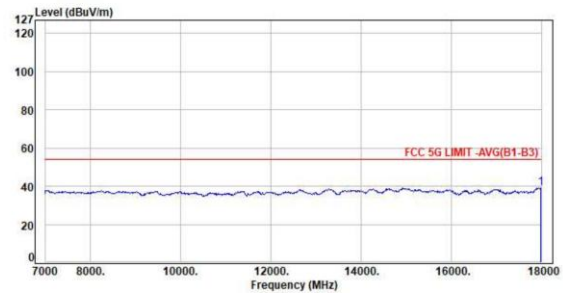


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17967.00        | 6.06        | 33.18          | 39.24          | 54.00          | -14.76      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH60 NSS1 MCS0  
Pol : Vertical Detector : Peak

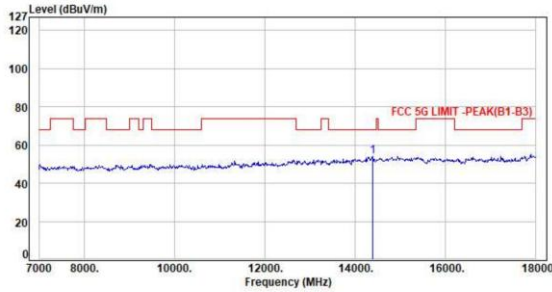

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14381.00        | 5.76        | 48.40          | 54.16          | 68.20          | -14.04      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH60 NSS1 MCS0  
Pol : Vertical Detector : Average

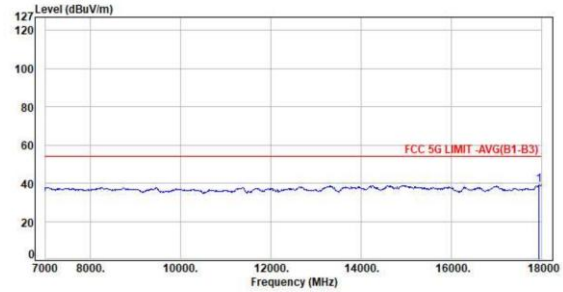

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 32.99          | 39.03          | 54.00          | -14.97      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH60 NSS1 MCS0  
Pol : Horizontal Detector : Peak

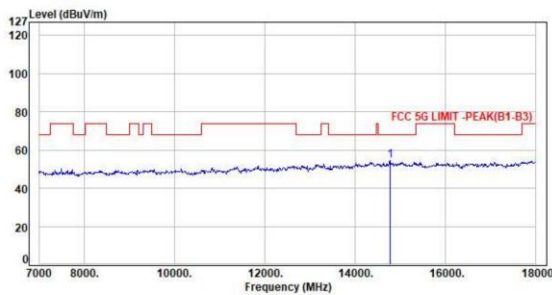

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14766.00        | 5.86        | 48.47          | 54.33          | 68.20          | -13.87      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH60 NSS1 MCS0  
Pol : Horizontal Detector : Average

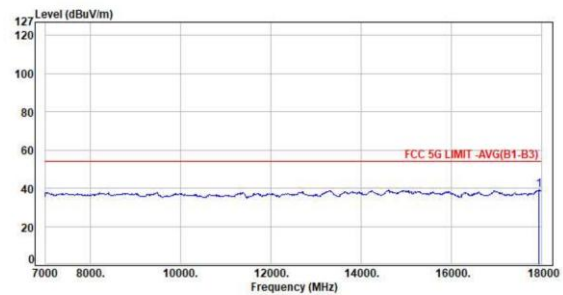


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 32.92          | 38.96          | 54.00          | -15.04      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH64 NSS1 MCS0  
Pol : Vertical Detector : Peak

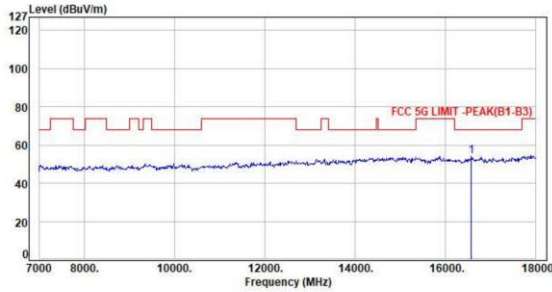

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 16570.00        | 5.24        | 48.85          | 54.09          | 68.20          | -14.11      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH64 NSS1 MCS0  
Pol : Vertical Detector : Average

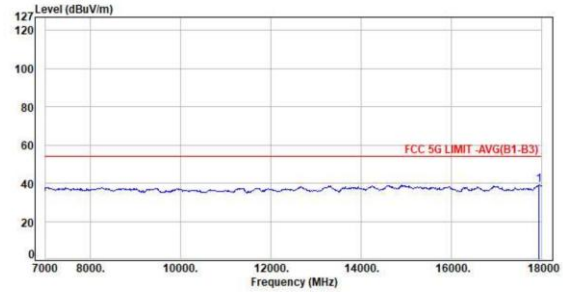

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 33.31          | 39.35          | 54.00          | -14.65      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH64 NSS1 MCS0  
Pol : Horizontal Detector : Peak

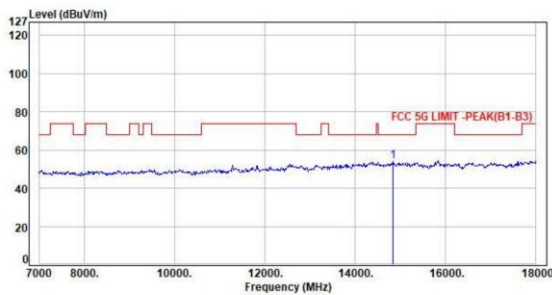

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14843.00        | 5.76        | 48.15          | 53.91          | 68.20          | -14.29      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH64 NSS1 MCS0  
Pol : Horizontal Detector : Average

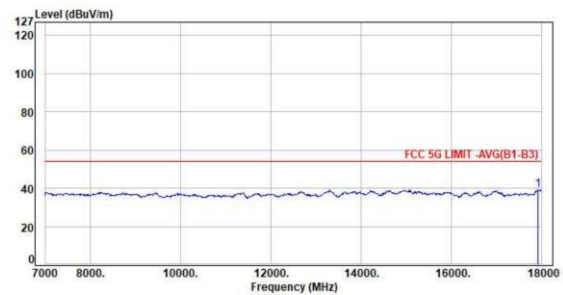


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17923.00        | 6.03        | 33.04          | 39.07          | 54.00          | -14.93      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax40 CH54 NSS1 MCS0  
Pol : Vertical Detector : Peak

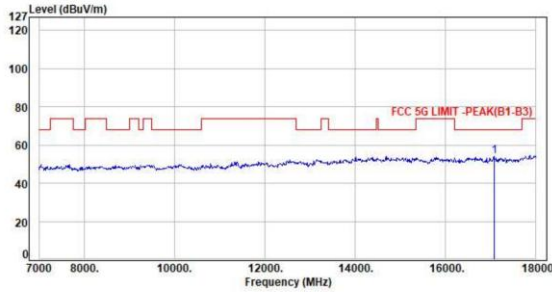

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17076.00        | 4.67        | 49.57          | 54.24          | 68.20          | -13.96      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH54 NSS1 MCS0  
Pol : Vertical Detector : Average

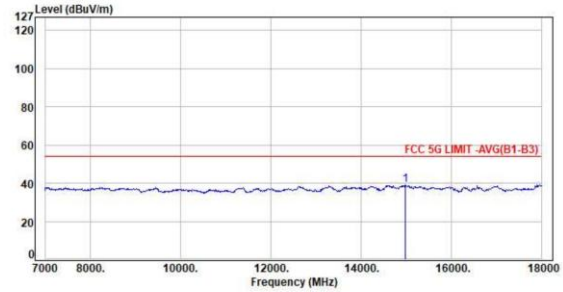

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14975.00        | 5.76        | 33.34          | 39.10          | 54.00          | -14.90      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax40 CH54 NSS1 MCS0  
Pol : Horizontal Detector : Peak

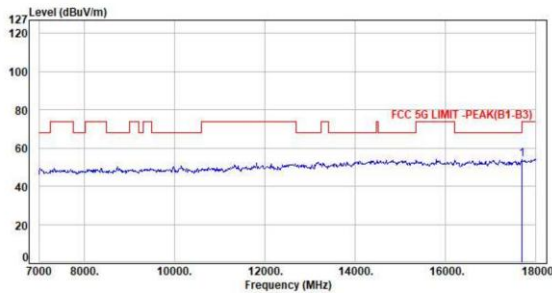

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17681.00        | 5.26        | 48.63          | 53.89          | 68.20          | -14.31      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax40 CH54 NSS1 MCS0  
Pol : Horizontal Detector : Average

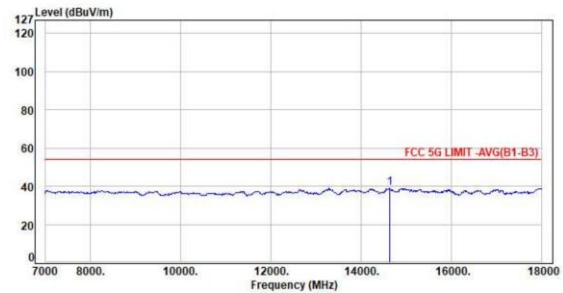


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14623.00        | 5.94        | 32.96          | 38.90          | 54.00          | -15.10      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH62 NSS1 MCS0  
Pol : Vertical Detector : Peak

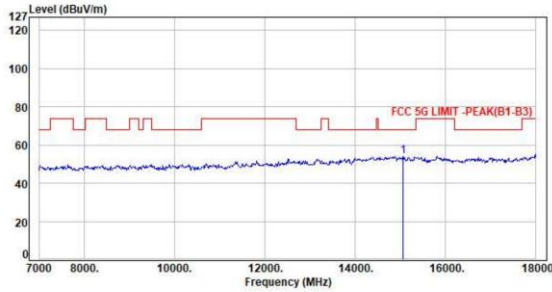

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 15063.00        | 5.74        | 48.44          | 54.18          | 68.20          | -14.02      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH62 NSS1 MCS0  
Pol : Vertical Detector : Average

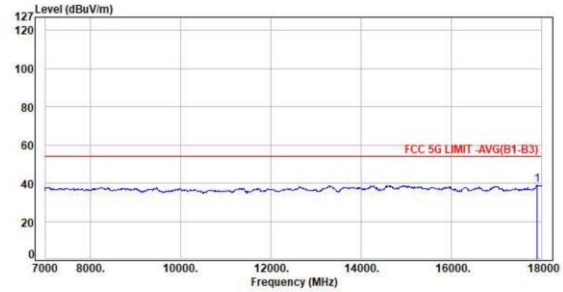

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17981.00        | 5.98        | 32.91          | 38.89          | 54.00          | -15.11      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH62 NSS1 MCS0  
Pol : Horizontal Detector : Peak

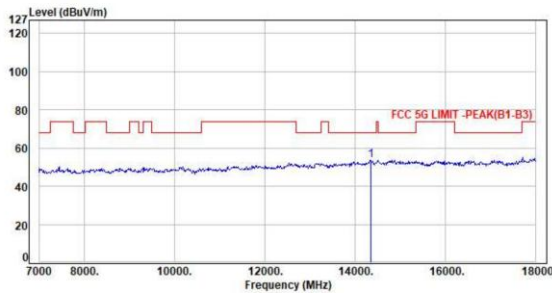

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14337.00        | 5.80        | 47.76          | 53.56          | 68.20          | -14.64      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH62 NSS1 MCS0  
Pol : Horizontal Detector : Average

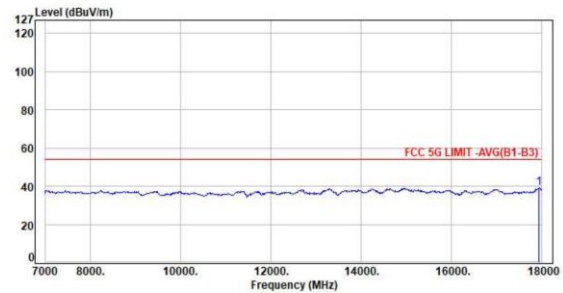


| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 33.02          | 39.06          | 54.00          | -14.94      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH58 NSS1 MCS0  
Pol : Vertical Detector : Peak

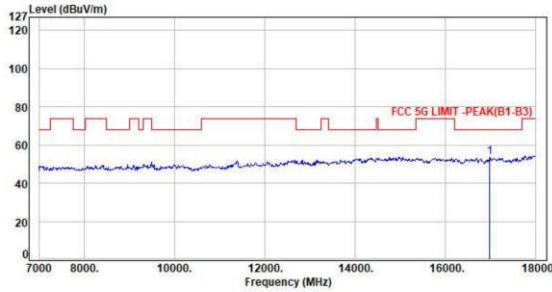

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 16977.00        | 4.86        | 48.94          | 53.80          | 68.20          | -14.40      | Peak     | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH58 NSS1 MCS0  
Pol : Vertical Detector : Average

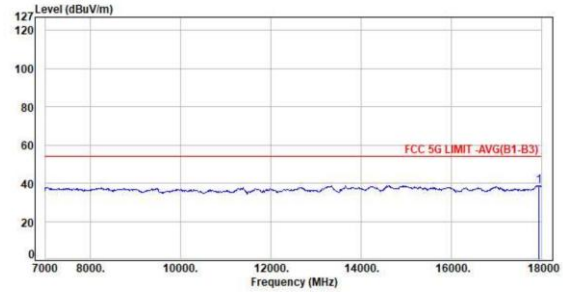

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 32.69          | 38.73          | 54.00          | -15.27      | Average  | 100         | 360           | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH58 NSS1 MCS0  
Pol : Horizontal Detector : Peak

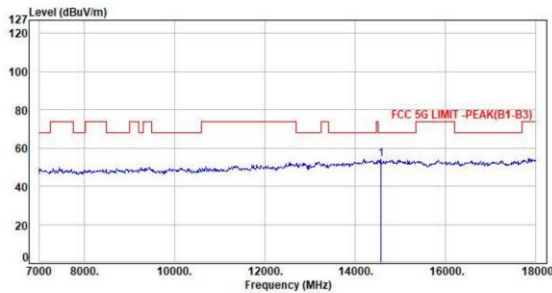

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 14568.00        | 5.87        | 48.29          | 54.16          | 68.20          | -14.04      | Peak     | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH58 NSS1 MCS0  
Pol : Horizontal Detector : Average

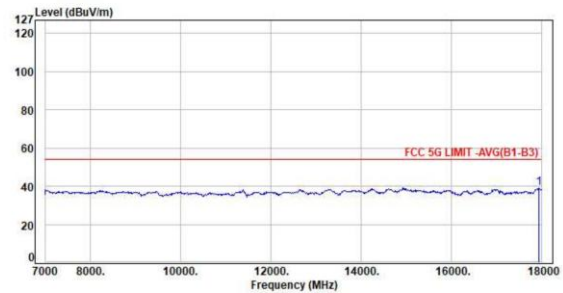

| No. | Frequency (MHz) | Factor (dB) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg) | P/F |
|-----|-----------------|-------------|----------------|----------------|----------------|-------------|----------|-------------|---------------|-----|
| 1   | 17934.00        | 6.04        | 33.09          | 39.13          | 54.00          | -14.87      | Average  | 100         | 0             | P   |

Note: Level=Reading+Factor  
Margin=Level-Limit  
Factor=Antenna Factor + cable loss - Amplifier Factor