




Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Peak

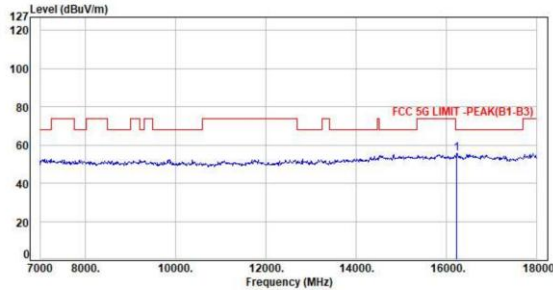

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16229.00	5.55	50.18	55.73	68.20	-12.47	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Vertical

Detector : Average

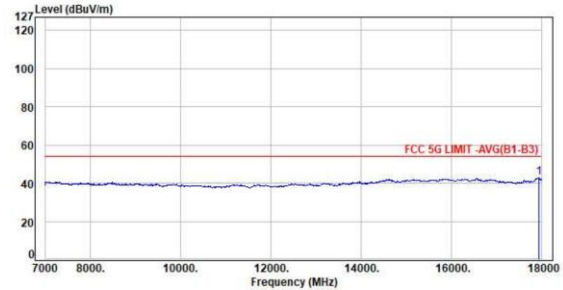

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	6.04	36.79	42.83	54.00	-11.17	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Peak

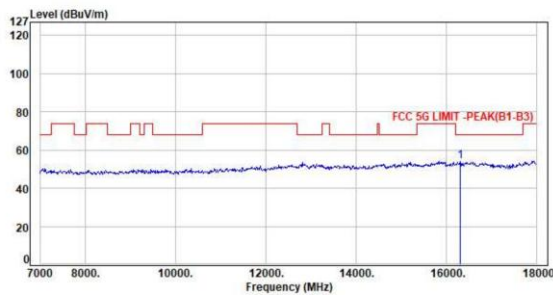

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16306.00	5.32	48.56	53.88	68.20	-14.32	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH60 6Mbps

Pol : Horizontal

Detector : Average

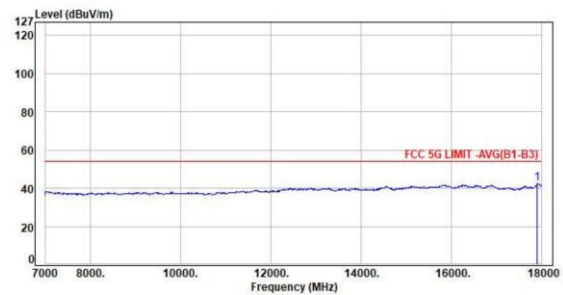

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.36	42.34	54.00	-11.66	Average	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Peak

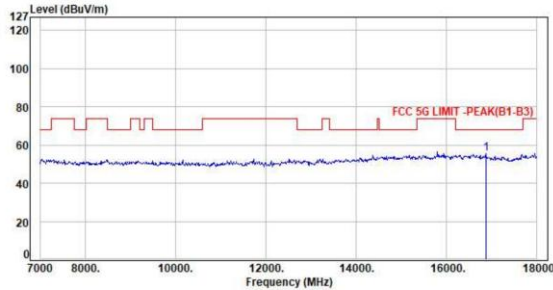

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16867.00	5.23	50.17	55.40	68.20	-12.80	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Vertical

Detector : Average

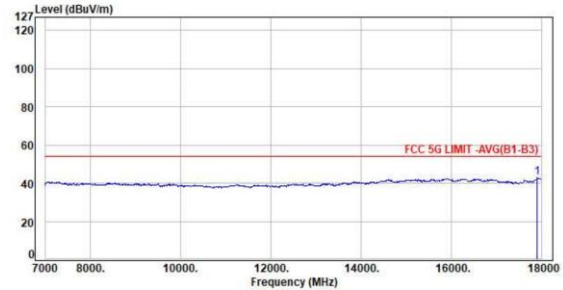

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	5.98	36.82	42.80	54.00	-11.20	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Peak

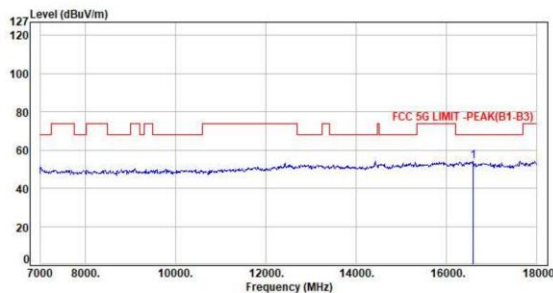

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16581.00	5.19	49.11	54.30	68.20	-13.90	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH64 6Mbps

Pol : Horizontal

Detector : Average

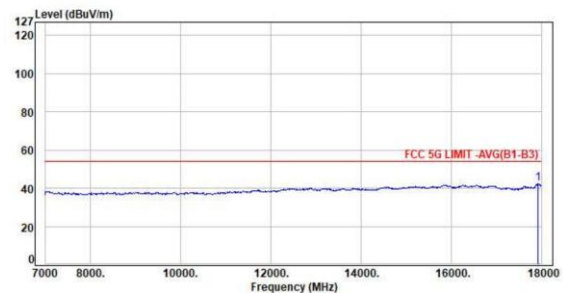

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.24	42.27	54.00	-11.73	Average	100	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Peak

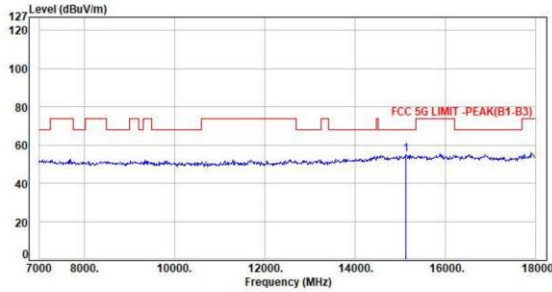

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15129.00	5.72	49.31	55.03	68.20	-13.17	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH52 NSS1 MCS0
Pol : Vertical Detector : Average

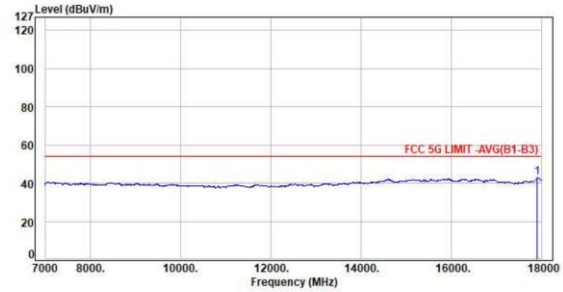

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.77	42.75	54.00	-11.25	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Peak

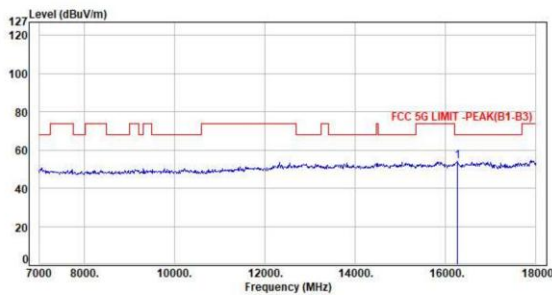

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16262.00	5.50	48.66	54.16	68.20	-14.04	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH52 NSS1 MCS0
Pol : Horizontal Detector : Average

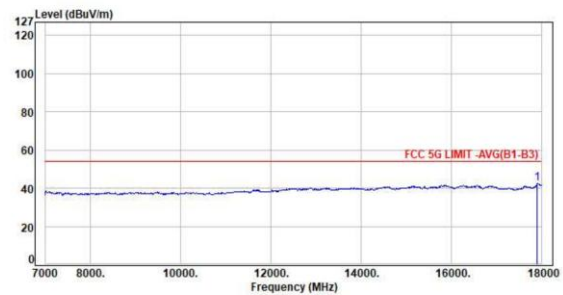


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.48	42.46	54.00	-11.54	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Peak

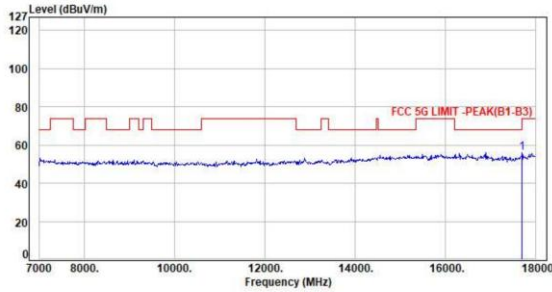

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17692.00	5.31	50.74	56.05	68.20	-12.15	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH60 NSS1 MCS0
Pol : Vertical Detector : Average

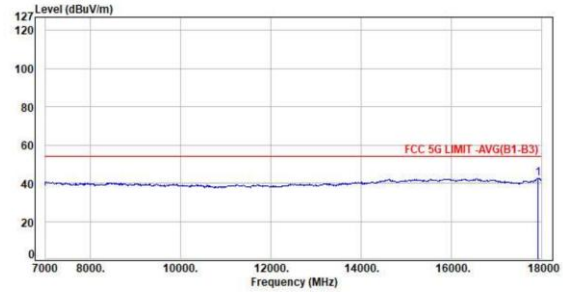

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.62	42.65	54.00	-11.35	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Peak

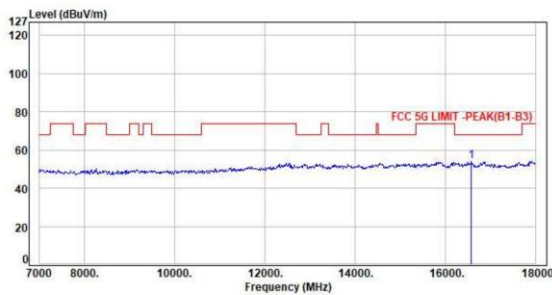

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16570.00	5.24	48.70	53.94	68.20	-14.26	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH60 NSS1 MCS0
Pol : Horizontal Detector : Average

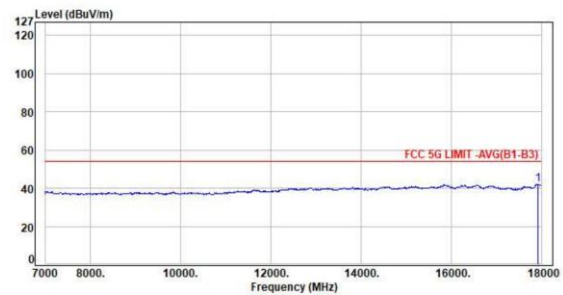


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.22	42.25	54.00	-11.75	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH64 NSS1 MCS0
Pol : Vertical Detector : Peak

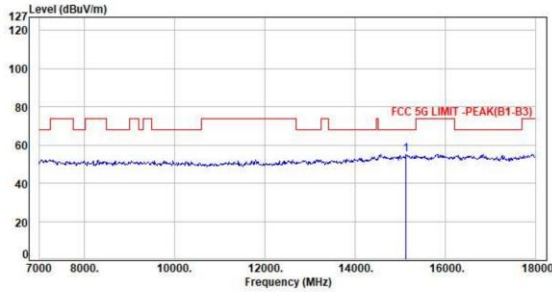

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15129.00	5.72	49.15	54.87	68.20	-13.33	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH64 NSS1 MCS0
Pol : Vertical Detector : Average

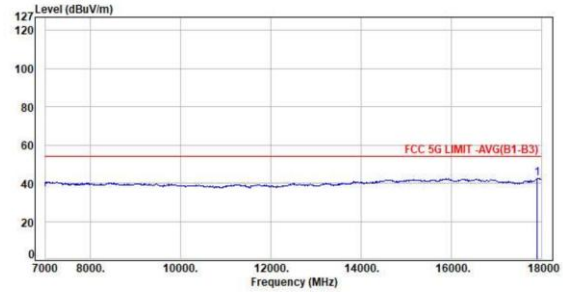

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	5.98	36.67	42.65	54.00	-11.35	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Peak

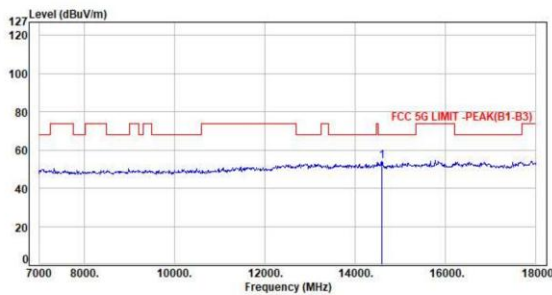

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14590.00	5.86	48.00	53.86	68.20	-14.34	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH64 NSS1 MCS0
Pol : Horizontal Detector : Average

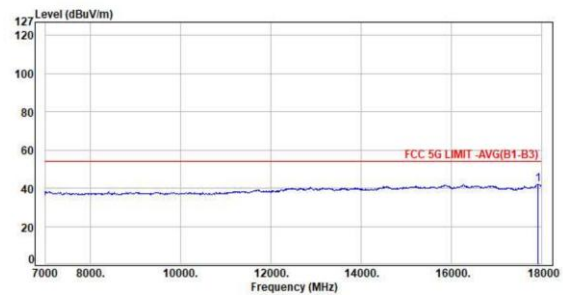


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.14	42.17	54.00	-11.83	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH54 NSS1 MCS0
Pol : Vertical Detector : Peak

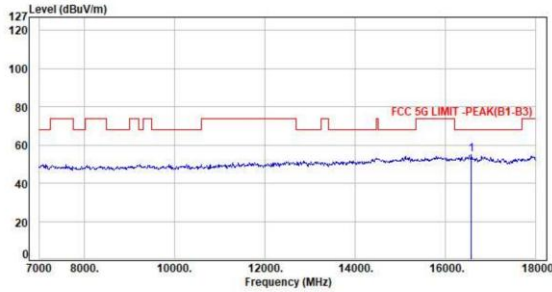

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16570.00	5.24	49.67	54.91	68.20	-13.29	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH54 NSS1 MCS0
Pol : Vertical Detector : Average

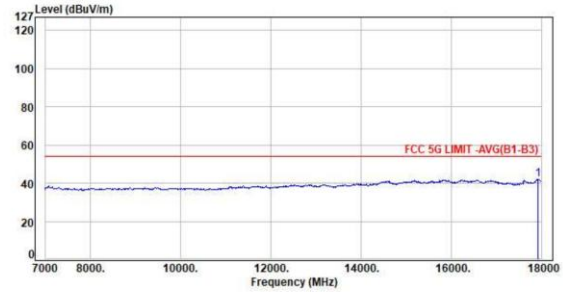

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.04	42.07	54.00	-11.93	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Peak

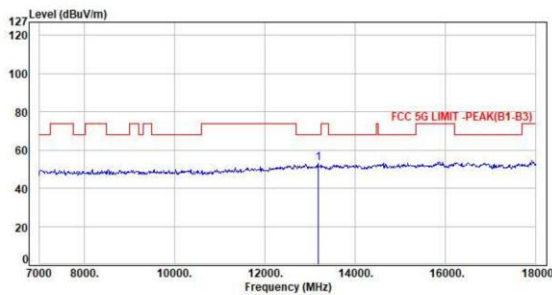

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13182.00	5.13	47.99	53.12	68.20	-15.08	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH54 NSS1 MCS0
Pol : Horizontal Detector : Average

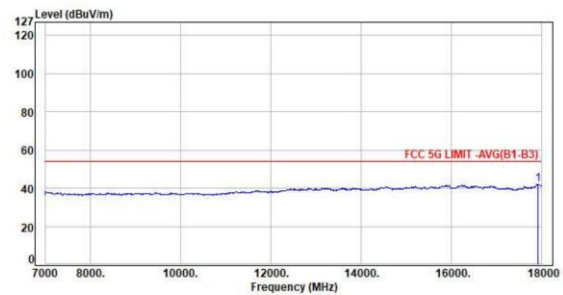


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.04	42.07	54.00	-11.93	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH62 NSS1 MCS0
Pol : Vertical Detector : Peak

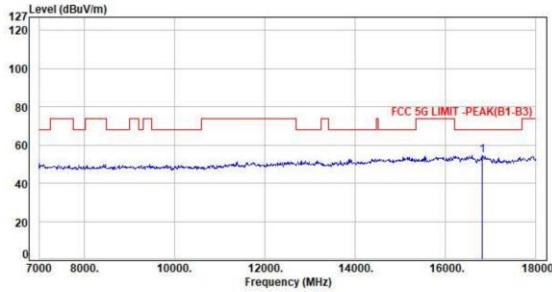

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16823.00	5.24	49.25	54.49	68.20	-13.71	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH62 NSS1 MCS0
Pol : Vertical Detector : Average

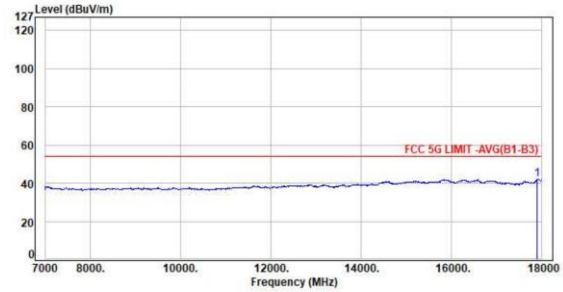

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.24	42.22	54.00	-11.78	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Peak

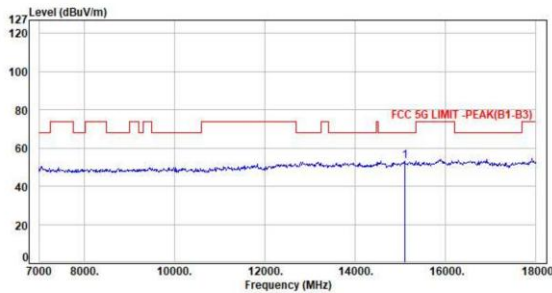

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15096.00	5.77	47.57	53.34	68.20	-14.86	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH62 NSS1 MCS0
Pol : Horizontal Detector : Average

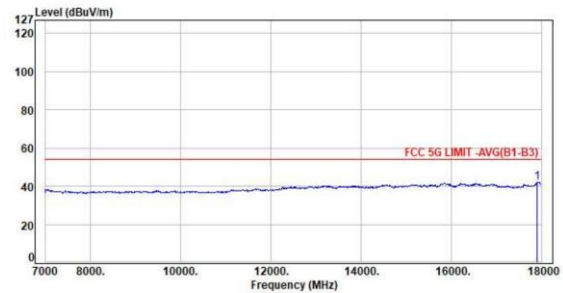


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.04	42.02	54.00	-11.98	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Peak

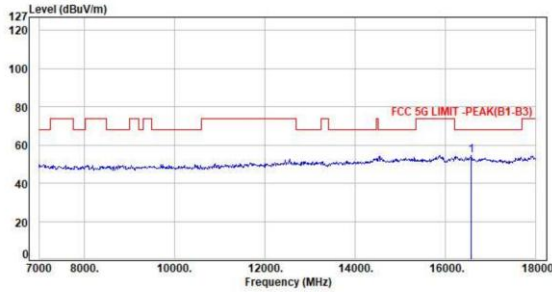

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16570.00	5.24	49.41	54.65	68.20	-13.55	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH58 NSS1 MCS0
Pol : Vertical Detector : Average

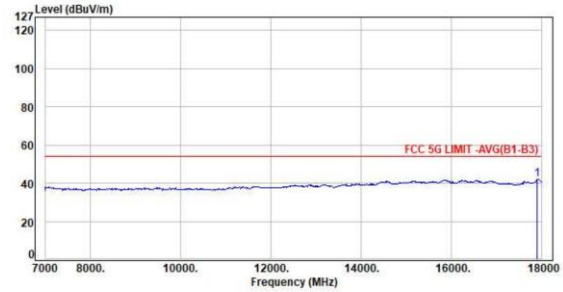

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.10	42.08	54.00	-11.92	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Peak

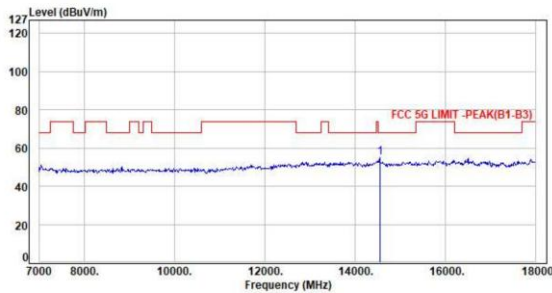

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14546.00	5.87	48.96	54.83	68.20	-13.37	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH58 NSS1 MCS0
Pol : Horizontal Detector : Average

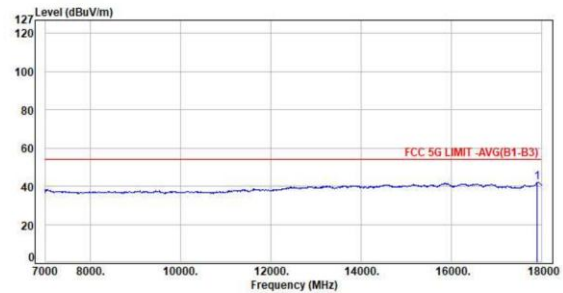

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.19	42.17	54.00	-11.83	Average	100	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Peak

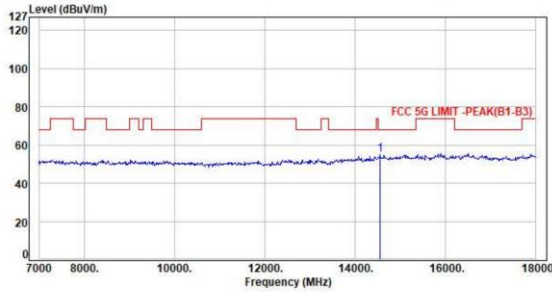

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14557.00	5.88	49.37	55.25	68.20	-12.95	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Vertical

Detector : Average

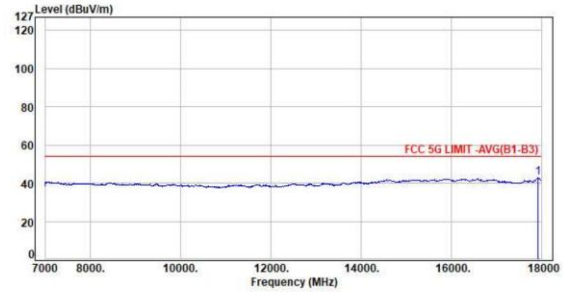

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.85	42.88	54.00	-11.12	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Peak

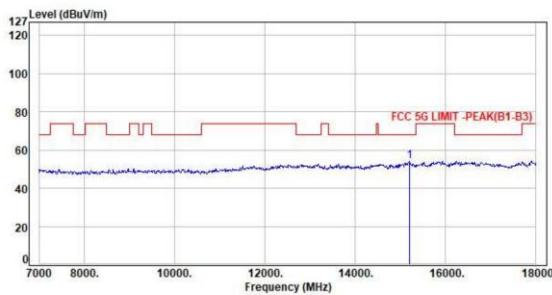

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15195.00	5.62	48.32	53.94	68.20	-14.26	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH100 6Mbps

Pol : Horizontal

Detector : Average

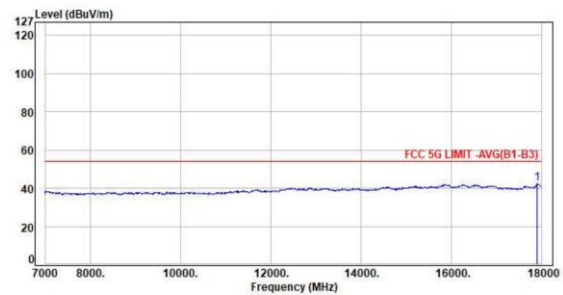

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.40	42.38	54.00	-11.62	Average	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH120 6Mbps

Pol : Vertical

Detector : Peak

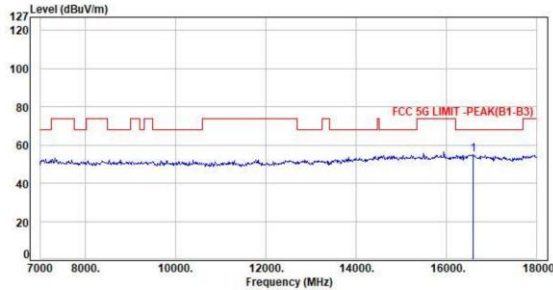

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16581.00	5.19	49.74	54.93	68.20	-13.27	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH120 6Mbps

Pol : Vertical

Detector : Average

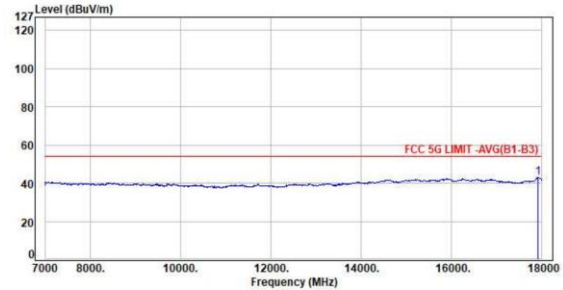

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.81	42.84	54.00	-11.16	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH120 6Mbps

Pol : Horizontal

Detector : Peak

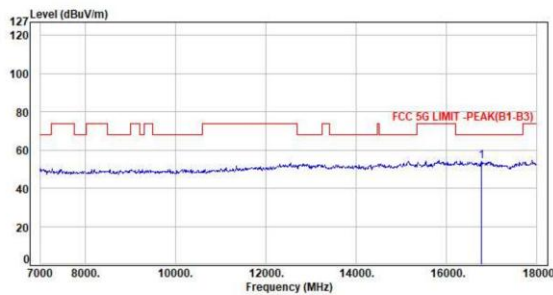

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16768.00	5.09	48.94	54.03	68.20	-14.17	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH120 6Mbps

Pol : Horizontal

Detector : Average

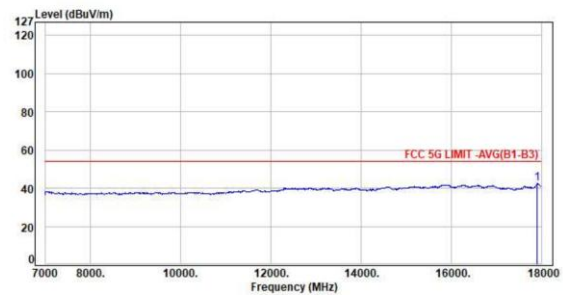

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.32	42.30	54.00	-11.70	Average	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Peak

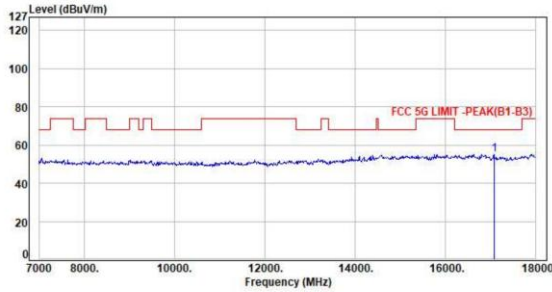

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17076.00	4.67	50.49	55.16	68.20	-13.04	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Vertical

Detector : Average

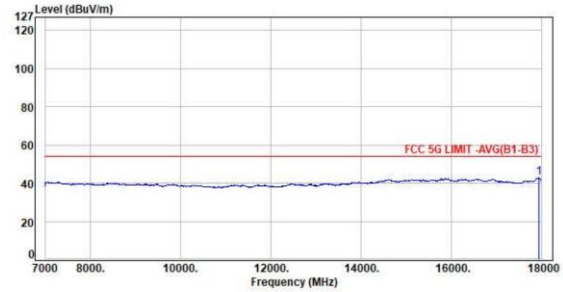

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	6.04	36.77	42.81	54.00	-11.19	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Peak

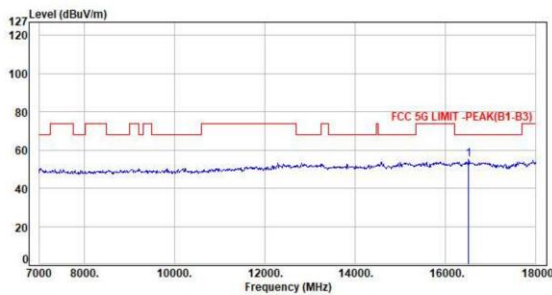

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16515.00	5.42	49.59	55.01	68.20	-13.19	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH140 6Mbps

Pol : Horizontal

Detector : Average

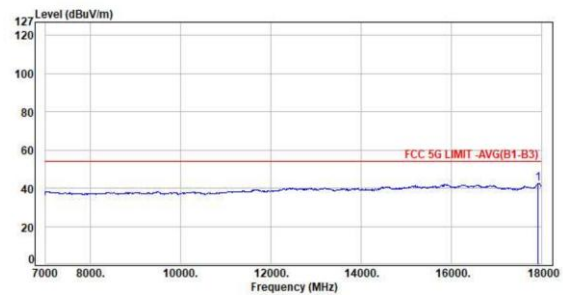

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.56	42.59	54.00	-11.41	Average	100	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Peak

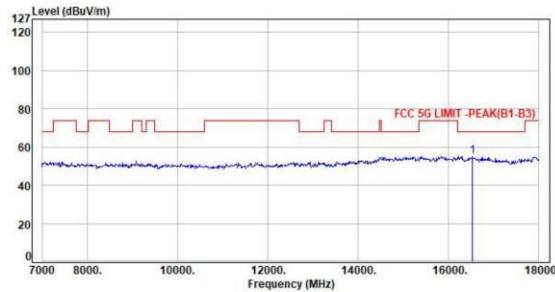

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16537.00	5.37	49.54	54.91	68.20	-13.29	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH100 NSS1 MCS0
Pol : Vertical Detector : Average

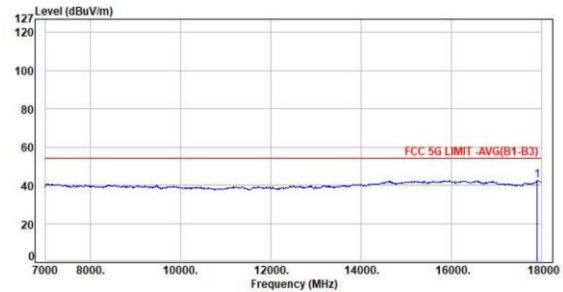

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17890.00	5.92	36.72	42.64	54.00	-11.36	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Peak

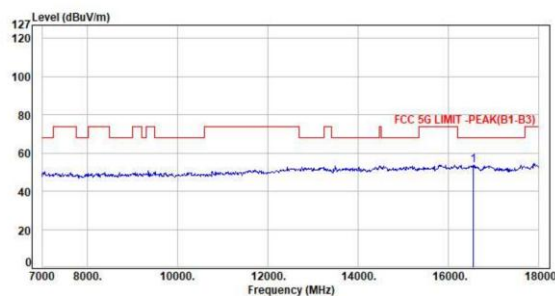

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16548.00	5.33	48.25	53.58	68.20	-14.62	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH100 NSS1 MCS0
Pol : Horizontal Detector : Average

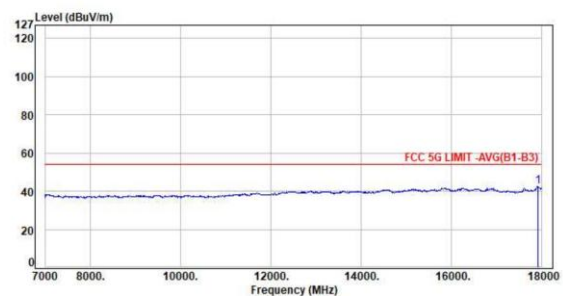


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.44	42.47	54.00	-11.53	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH120 NSS1 MCS0
Pol : Vertical Detector : Peak

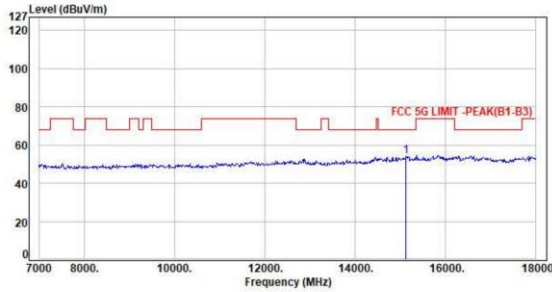

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15129.00	5.72	48.55	54.27	68.20	-13.93	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH120 NSS1 MCS0
Pol : Vertical Detector : Average

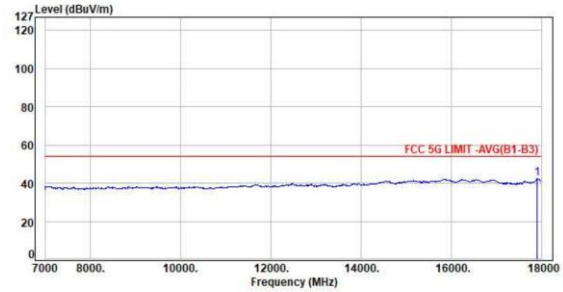

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17890.00	5.92	36.38	42.30	54.00	-11.70	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH120 NSS1 MCS0
Pol : Horizontal Detector : Peak

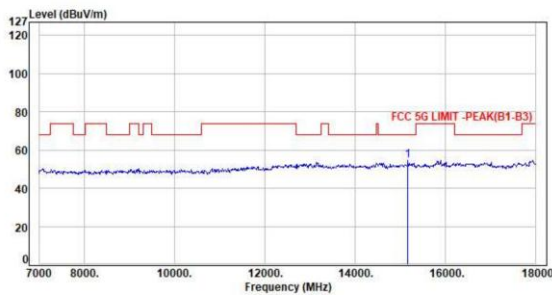

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15162.00	5.68	49.12	54.80	68.20	-13.40	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH120 NSS1 MCS0
Pol : Horizontal Detector : Average

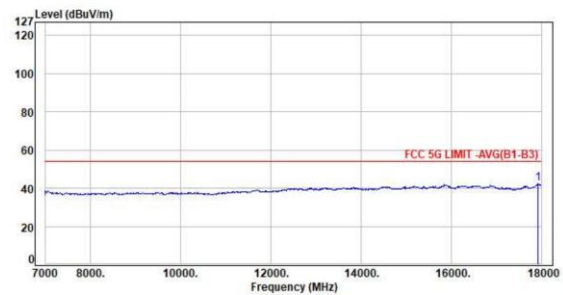


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.27	42.30	54.00	-11.70	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Peak

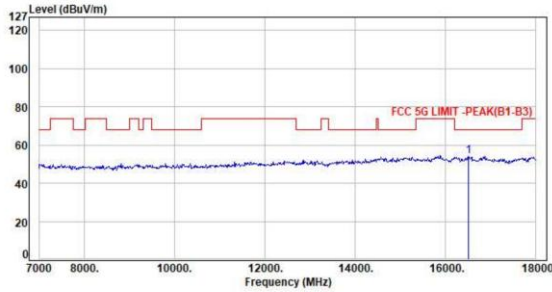

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16504.00	5.45	48.70	54.15	68.20	-14.05	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH140 NSS1 MCS0
Pol : Vertical Detector : Average

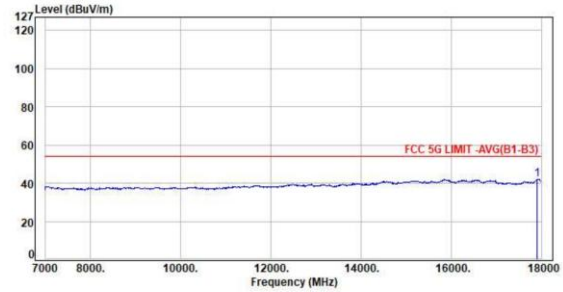

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	5.98	36.23	42.21	54.00	-11.79	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Peak

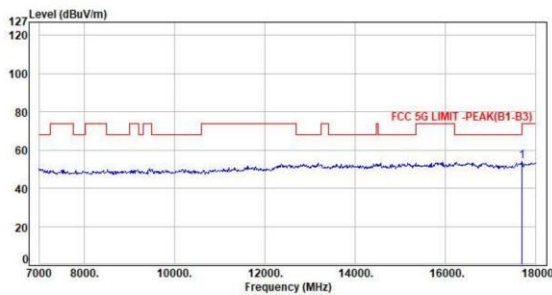

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17692.00	5.31	48.66	53.97	68.20	-14.23	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH140 NSS1 MCS0
Pol : Horizontal Detector : Average

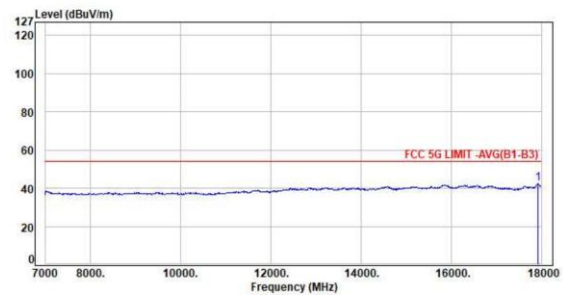


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.25	42.28	54.00	-11.72	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH102 NSS1 MCS0
Pol : Vertical Detector : Peak

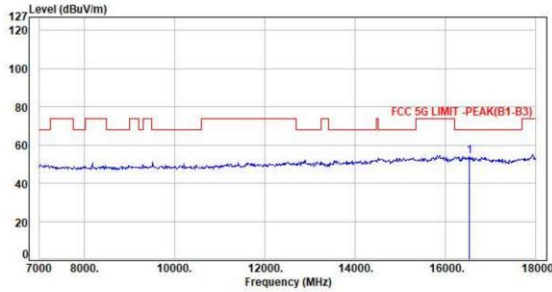

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16537.00	5.37	48.94	54.31	68.20	-13.89	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH102 NSS1 MCS0
Pol : Vertical Detector : Average

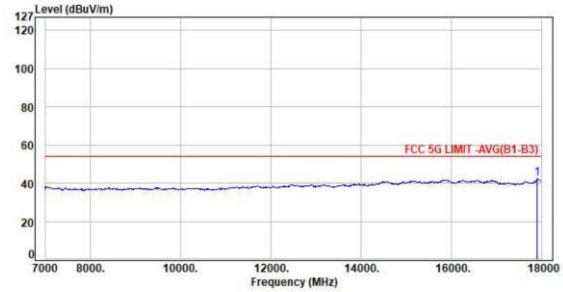

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	5.98	36.36	42.34	54.00	-11.66	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Peak

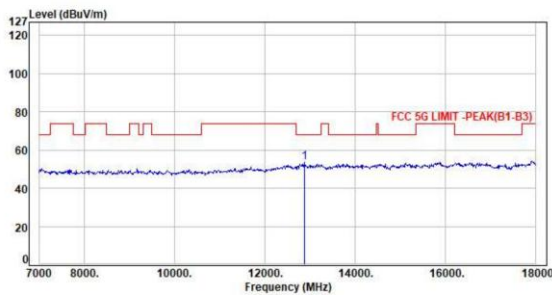

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	12885.00	5.15	48.36	53.51	68.20	-14.69	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH102 NSS1 MCS0
Pol : Horizontal Detector : Average

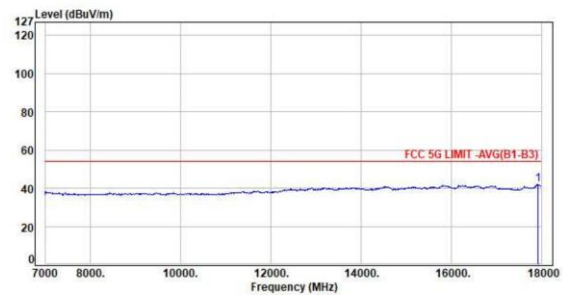


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.21	42.24	54.00	-11.76	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH118 NSS1 MCS0
Pol : Vertical Detector : Peak

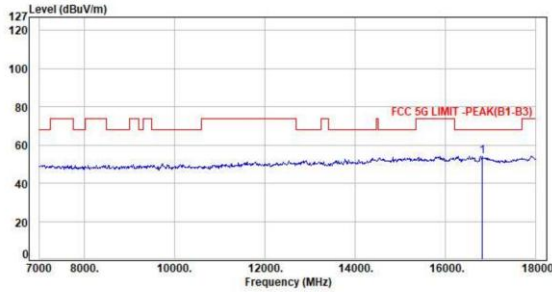

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16823.00	5.24	48.90	54.14	68.20	-14.06	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH118 NSS1 MCS0
Pol : Vertical Detector : Average

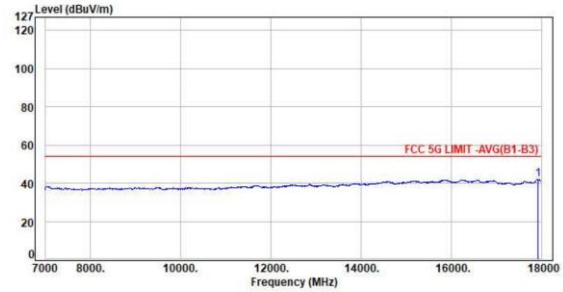

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.18	42.21	54.00	-11.79	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH118 NSS1 MCS0
Pol : Horizontal Detector : Peak

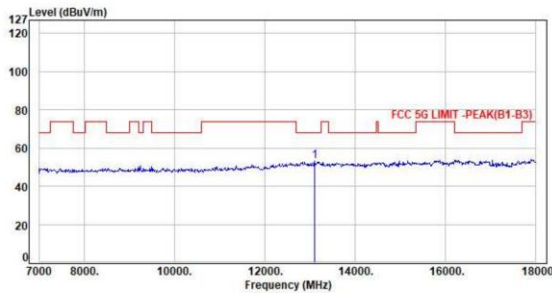

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	13094.00	5.06	47.85	52.91	68.20	-15.29	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH118 NSS1 MCS0
Pol : Horizontal Detector : Average

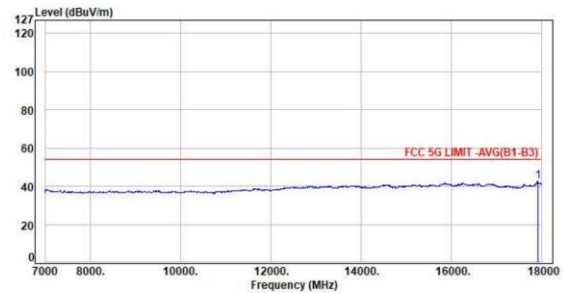


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.26	42.29	54.00	-11.71	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH134 NSS1 MCS0
Pol : Vertical Detector : Peak

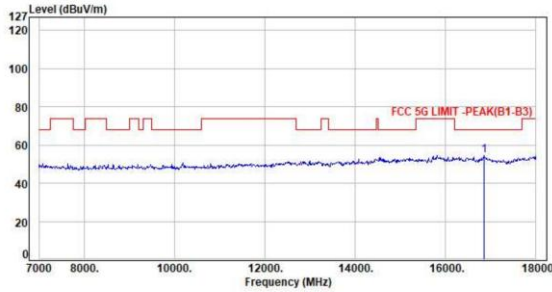

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16856.00	5.26	49.27	54.53	68.20	-13.67	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH134 NSS1 MCS0
Pol : Vertical Detector : Average

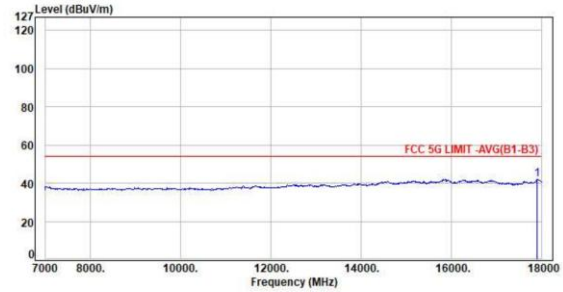

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	5.98	36.15	42.13	54.00	-11.87	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Peak

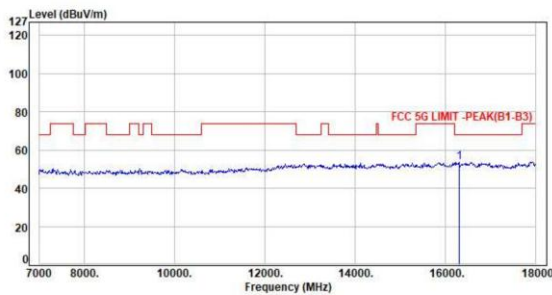

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16295.00	5.35	48.31	53.66	68.20	-14.54	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH134 NSS1 MCS0
Pol : Horizontal Detector : Average

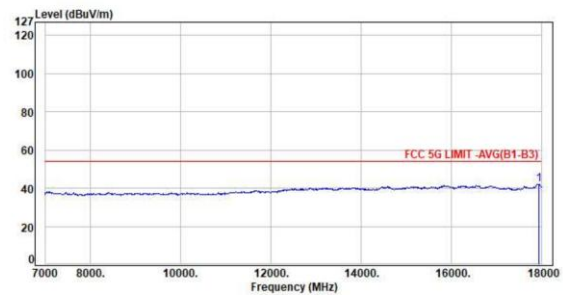


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	6.04	36.20	42.24	54.00	-11.76	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Peak

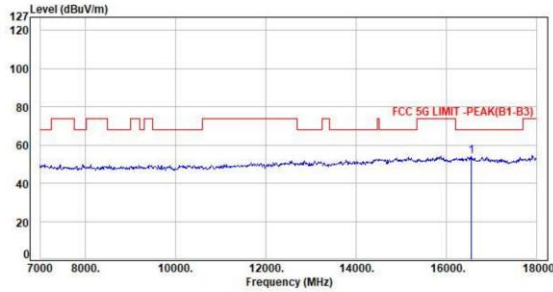

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16548.00	5.33	48.69	54.02	68.20	-14.18	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Vertical Detector : Average

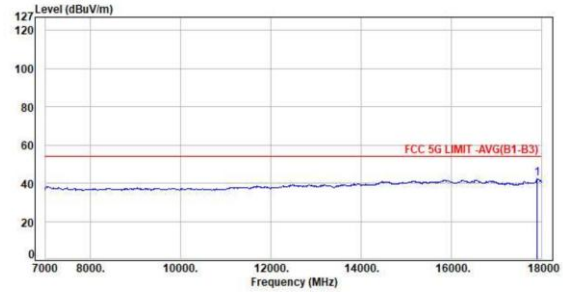

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.31	42.29	54.00	-11.71	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Peak

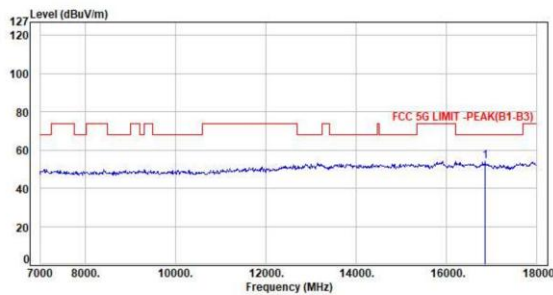

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16856.00	5.26	48.84	54.10	68.20	-14.10	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH106 NSS1 MCS0
Pol : Horizontal Detector : Average

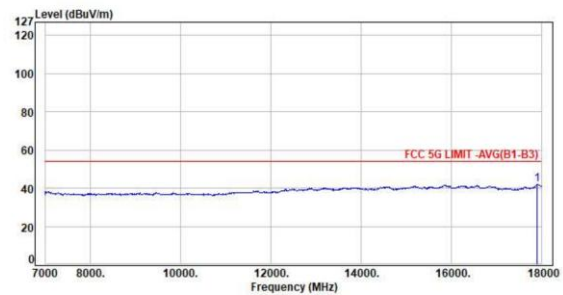


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	35.94	41.92	54.00	-12.08	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Vertical Detector : Peak

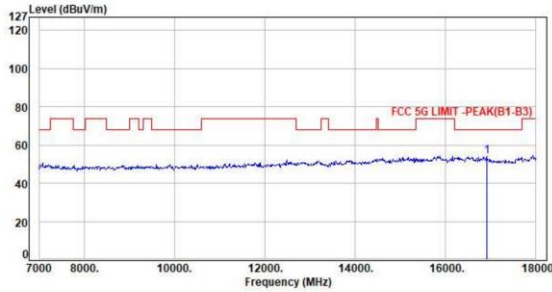

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16911.00	5.10	49.05	54.15	68.20	-14.05	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Vertical Detector : Average

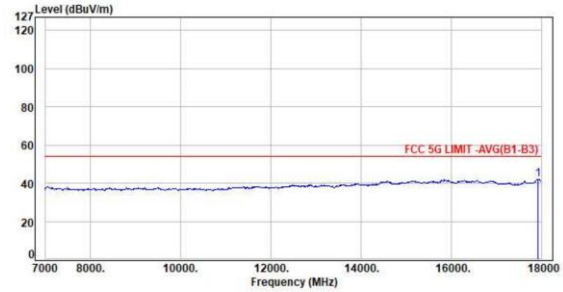

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.07	42.10	54.00	-11.90	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Horizontal Detector : Peak

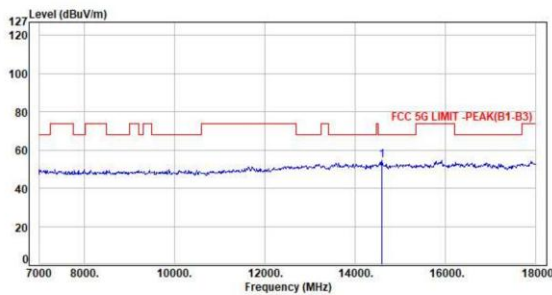

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14590.00	5.86	48.50	54.36	68.20	-13.84	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH122 NSS1 MCS0
Pol : Horizontal Detector : Average

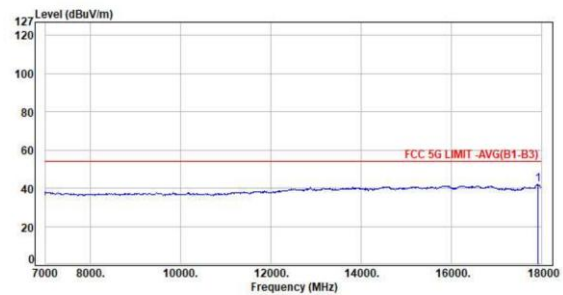

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	35.98	42.01	54.00	-11.99	Average	100	0	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Peak

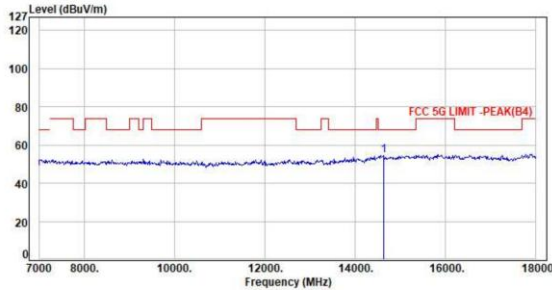

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14623.00	5.94	48.72	54.66	68.20	-13.54	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Vertical

Detector : Average

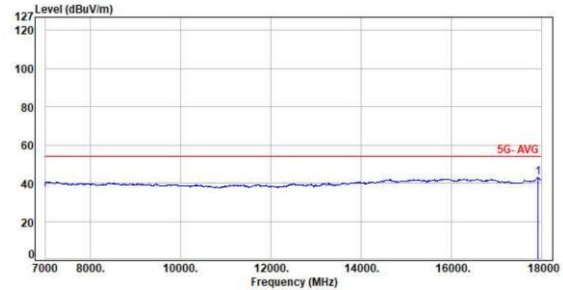

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	37.06	43.09	54.00	-10.91	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Peak

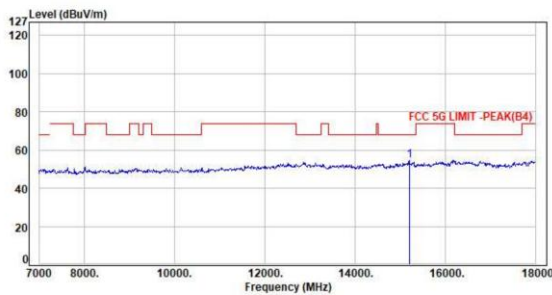

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15195.00	5.62	48.72	54.34	68.20	-13.86	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH149 6Mbps

Pol : Horizontal

Detector : Average

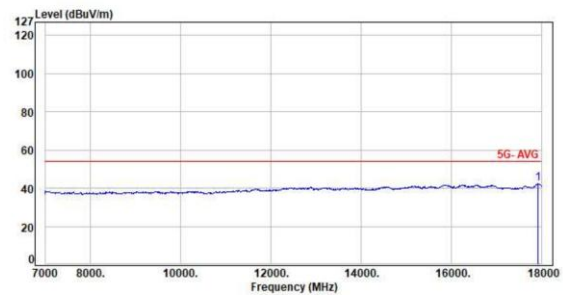

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.46	42.49	54.00	-11.51	Average	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Peak

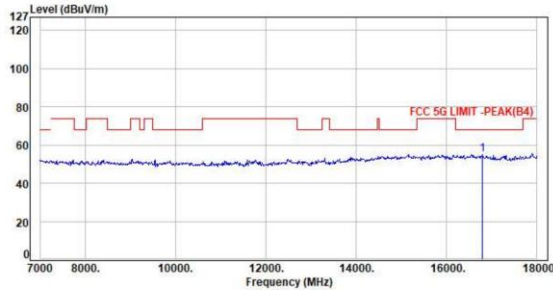

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16881.00	5.20	49.78	54.98	68.20	-13.22	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Vertical

Detector : Average

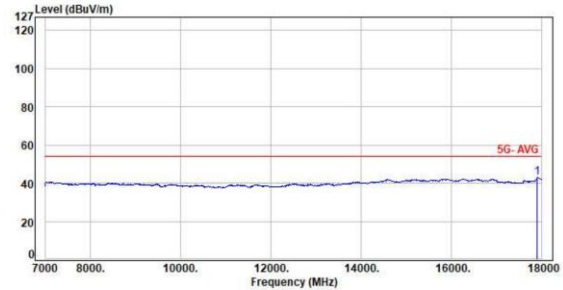

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	5.98	36.99	42.97	54.00	-11.03	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Peak

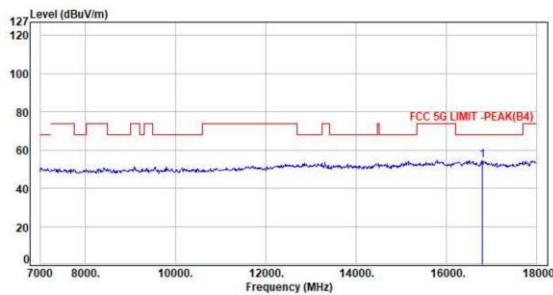

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16790.00	5.17	49.30	54.47	68.20	-13.73	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH157 6Mbps

Pol : Horizontal

Detector : Average

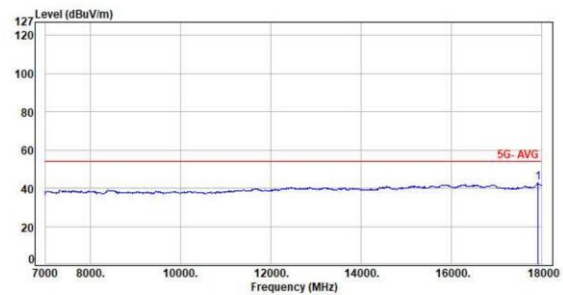

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.79	42.82	54.00	-11.18	Average	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit


Factor=Antenna Factor + cable loss - Amplifier Factor



Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Peak

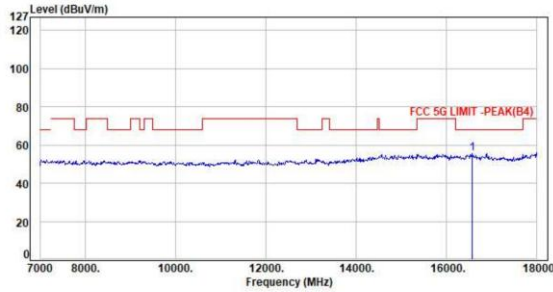

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16570.00	5.24	50.35	55.59	68.20	-12.61	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Vertical

Detector : Average

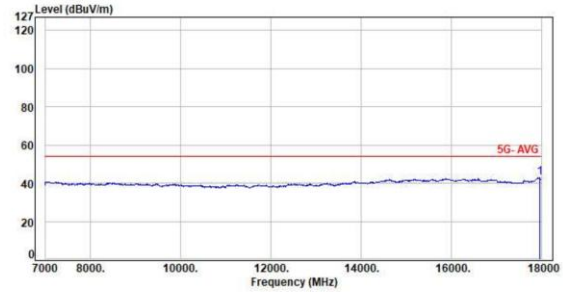

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17956.00	6.07	36.82	42.89	54.00	-11.11	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Peak

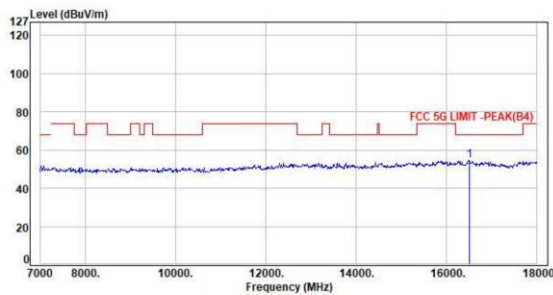

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16504.00	5.45	49.07	54.52	68.20	-13.68	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH165 6Mbps

Pol : Horizontal

Detector : Average

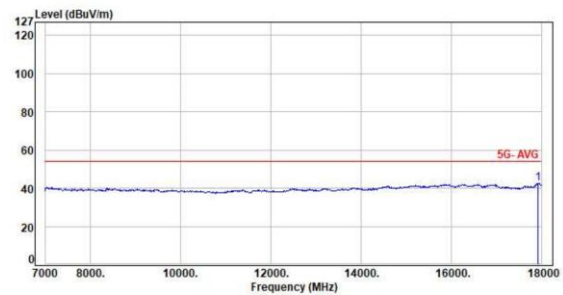

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.66	42.69	54.00	-11.31	Average	100	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax20 CH149 NSS1 MCS0
Pol : Vertical Detector : Peak

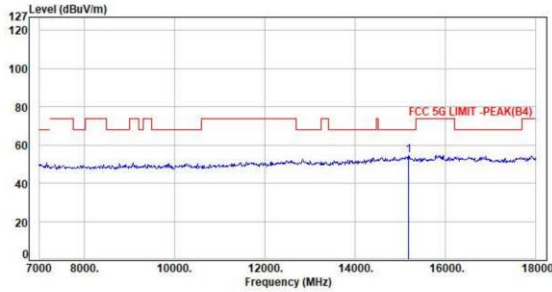

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15173.00	5.65	48.71	54.36	68.20	-13.84	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH149 NSS1 MCS0
Pol : Vertical Detector : Average

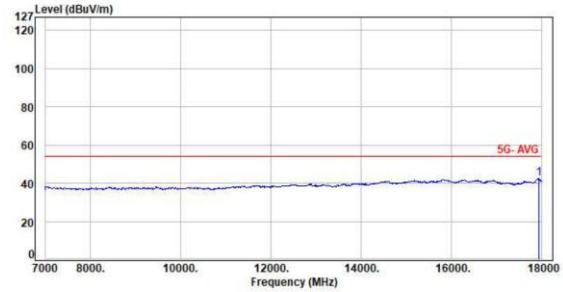

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	6.04	36.34	42.38	54.00	-11.62	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Peak

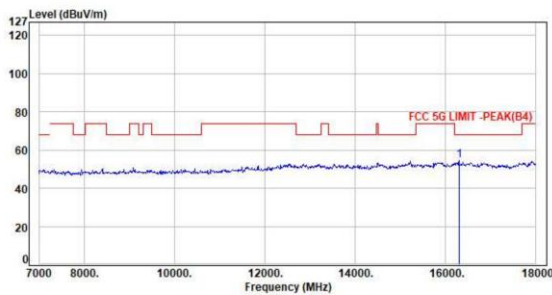

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16295.00	5.35	49.02	54.37	68.20	-13.83	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH149 NSS1 MCS0
Pol : Horizontal Detector : Average

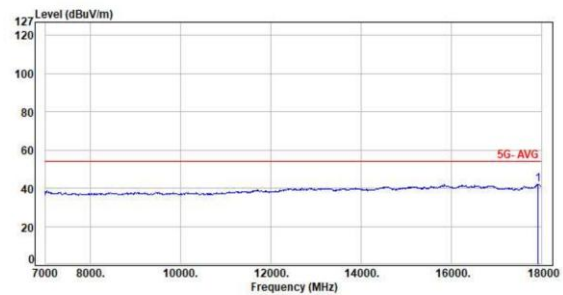


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.15	42.18	54.00	-11.82	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH157 NSS1 MCS0
Pol : Vertical Detector : Peak

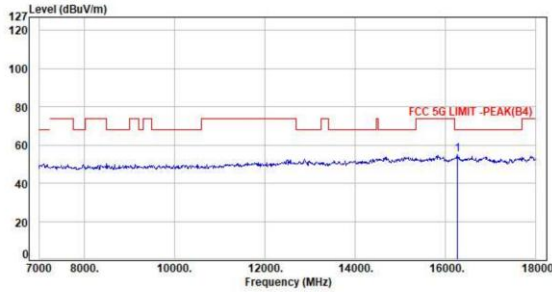

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16262.00	5.50	49.38	54.88	68.20	-13.32	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH157 NSS1 MCS0
Pol : Vertical Detector : Average

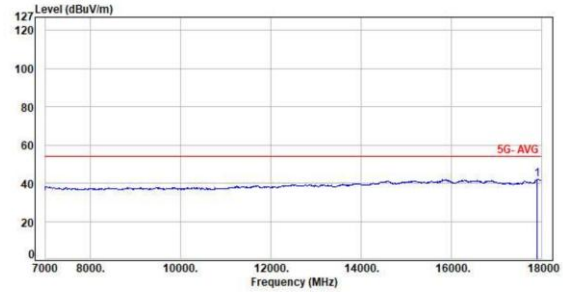

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17981.00	5.98	36.17	42.15	54.00	-11.85	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH157 NSS1 MCS0
Pol : Horizontal Detector : Peak

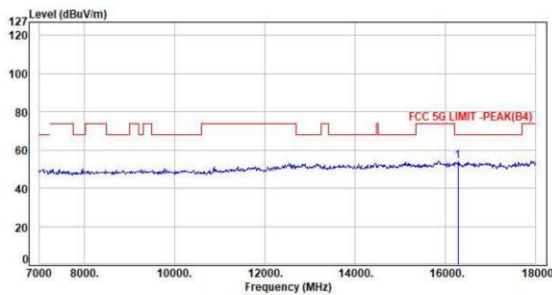

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16273.00	5.45	48.50	53.95	68.20	-14.25	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH157 NSS1 MCS0
Pol : Horizontal Detector : Average

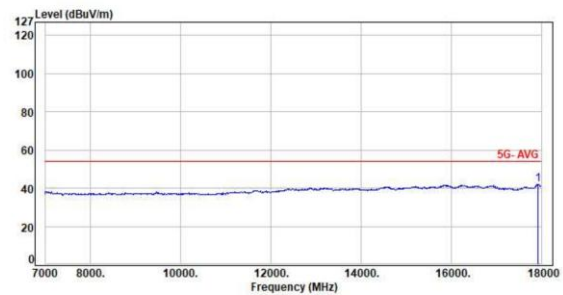


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.02	42.05	54.00	-11.95	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH165 NSS1 MCS0
Pol : Vertical Detector : Peak

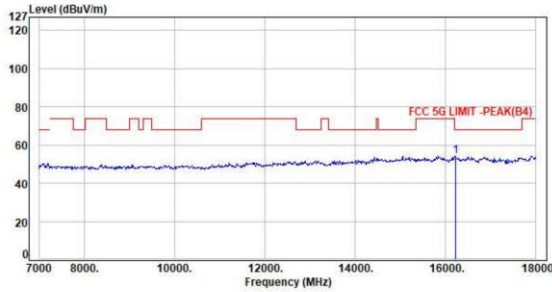

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16218.00	5.55	48.68	54.23	68.20	-13.97	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH165 NSS1 MCS0
Pol : Vertical Detector : Average

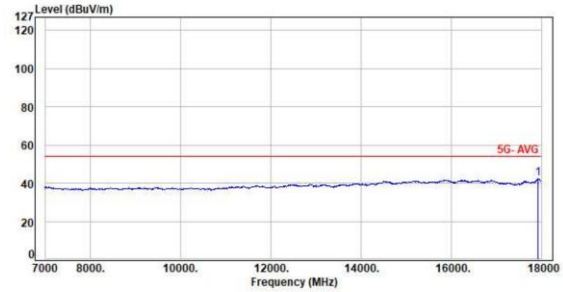

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.33	42.36	54.00	-11.64	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Peak

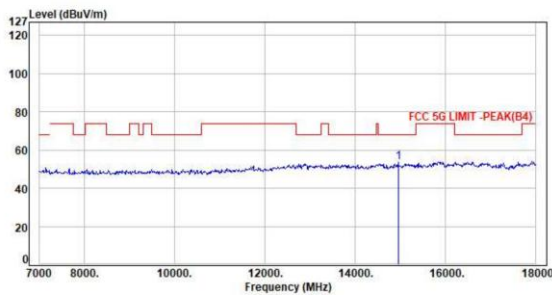

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14953.00	5.74	47.97	53.71	68.20	-14.49	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH165 NSS1 MCS0
Pol : Horizontal Detector : Average

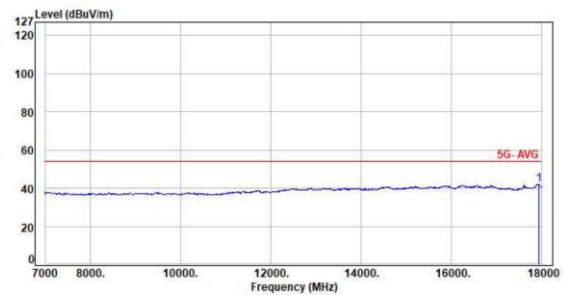


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	6.04	36.05	42.09	54.00	-11.91	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH151 NSS1 MCS0
Pol : Vertical Detector : Peak

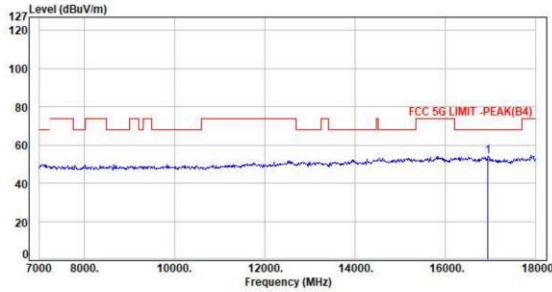

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16944.00	4.94	49.25	54.19	68.20	-14.01	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH151 NSS1 MCS0
Pol : Vertical Detector : Average

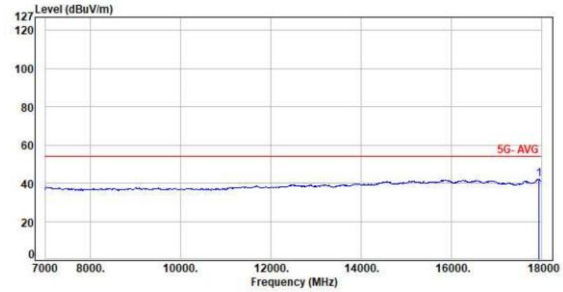

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17934.00	6.04	36.16	42.20	54.00	-11.80	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH151 NSS1 MCS0
Pol : Horizontal Detector : Peak

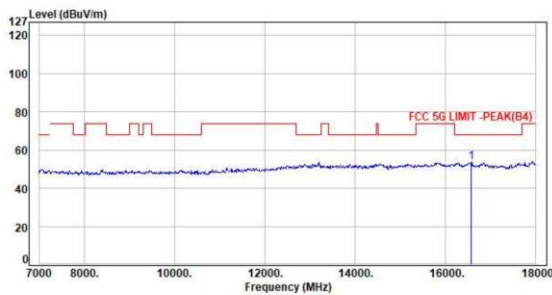

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16570.00	5.24	48.48	53.72	68.20	-14.48	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH151 NSS1 MCS0
Pol : Horizontal Detector : Average

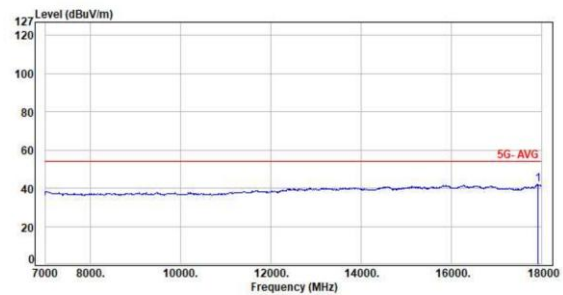


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	35.91	41.94	54.00	-12.06	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH159 NSS1 MCS0
Pol : Vertical Detector : Peak

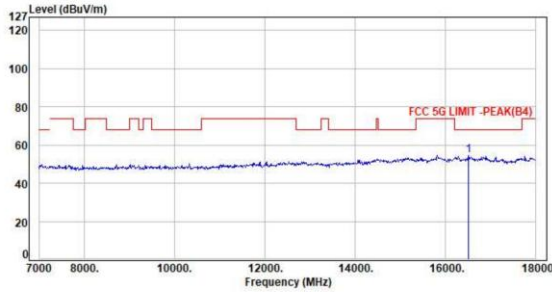

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16515.00	5.42	49.38	54.80	68.20	-13.40	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH159 NSS1 MCS0
Pol : Vertical Detector : Average

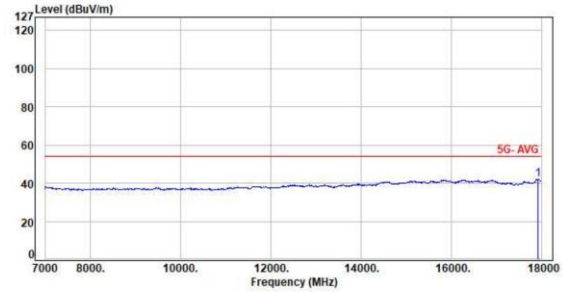

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.10	42.13	54.00	-11.87	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH159 NSS1 MCS0
Pol : Horizontal Detector : Peak

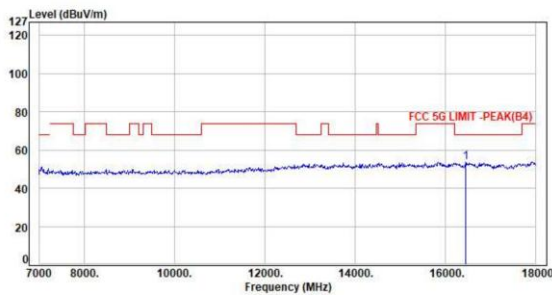

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16449.00	5.28	48.27	53.55	68.20	-14.65	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH159 NSS1 MCS0
Pol : Horizontal Detector : Average

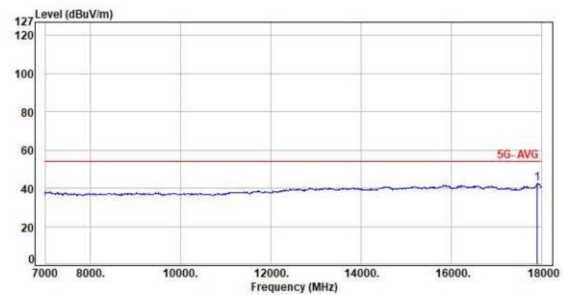


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.59	42.57	54.00	-11.43	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH155 NSS1 MCS0
Pol : Vertical Detector : Peak

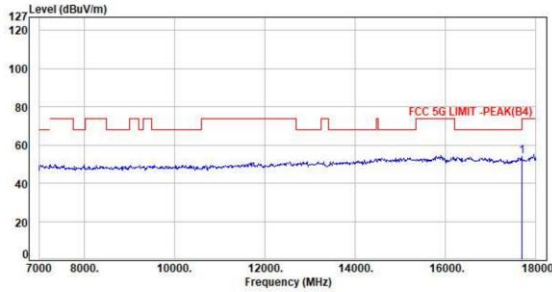

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17681.00	5.26	49.03	54.29	68.20	-13.91	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH155 NSS1 MCS0
Pol : Vertical Detector : Average

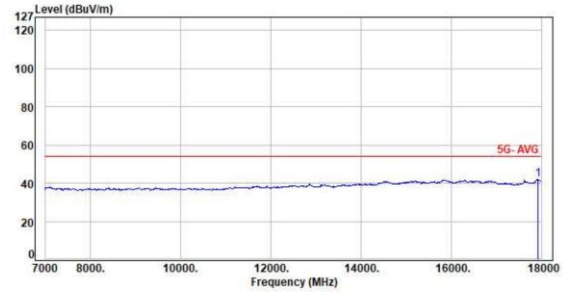

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.01	42.04	54.00	-11.96	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH155 NSS1 MCS0
Pol : Horizontal Detector : Peak

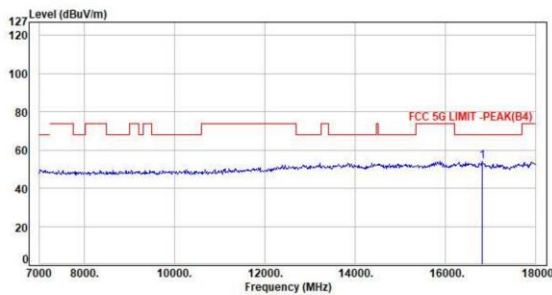

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16823.00	5.24	48.74	53.98	68.20	-14.22	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH155 NSS1 MCS0
Pol : Horizontal Detector : Average

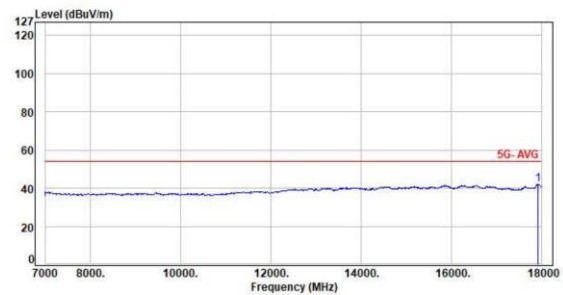

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.04	42.07	54.00	-11.93	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Straddle Channel

Test Mode : 1TX 11a CH144 6Mbps

Pol : Vertical

Detector : Peak

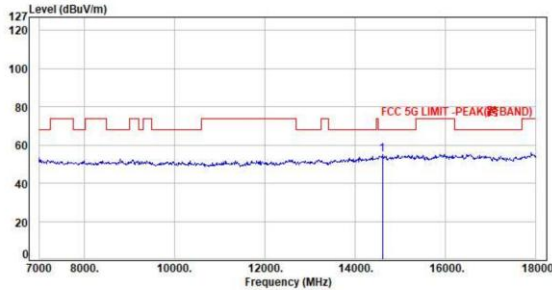

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14601.00	5.85	48.98	54.83	68.20	-13.37	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps

Pol : Vertical

Detector : Average

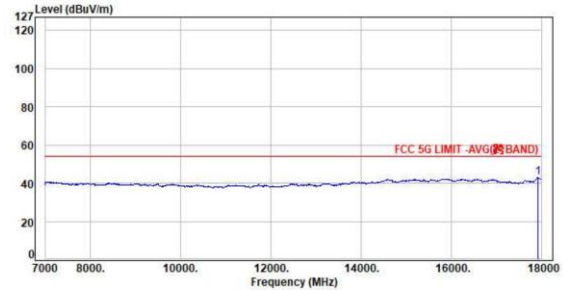

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	37.14	43.17	54.00	-10.83	Average	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps

Pol : Horizontal

Detector : Peak

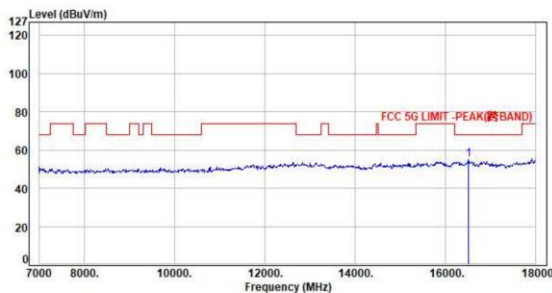

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16515.00	5.42	49.39	54.81	68.20	-13.39	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH144 6Mbps

Pol : Horizontal

Detector : Average

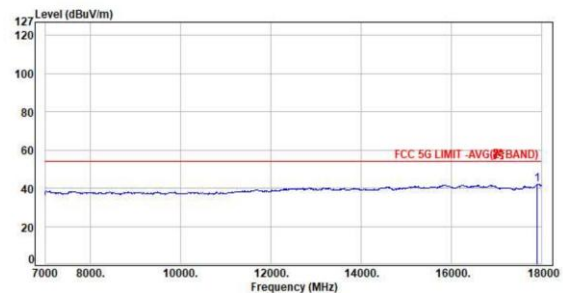

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.12	42.10	54.00	-11.90	Average	100	360	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX20 CH144 NSS1 MCS0
Pol : Vertical Detector : Peak

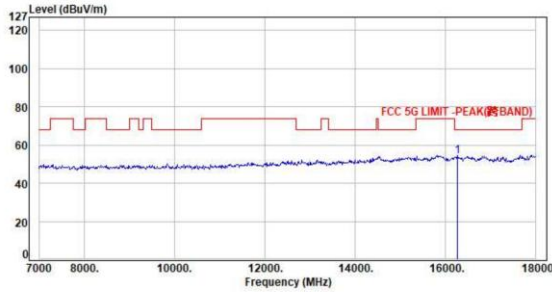

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16262.00	5.50	48.76	54.26	68.20	-13.94	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH144 NSS1 MCS0
Pol : Vertical Detector : Average

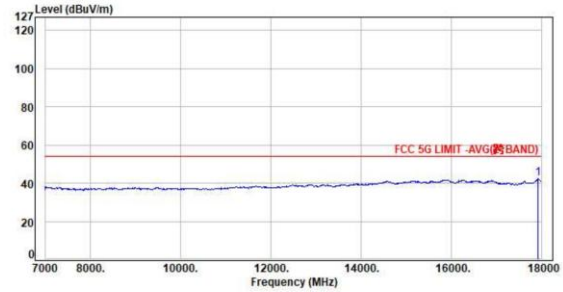

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.42	42.45	54.00	-11.55	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX20 CH144 NSS1 MCS0
Pol : Horizontal Detector : Peak

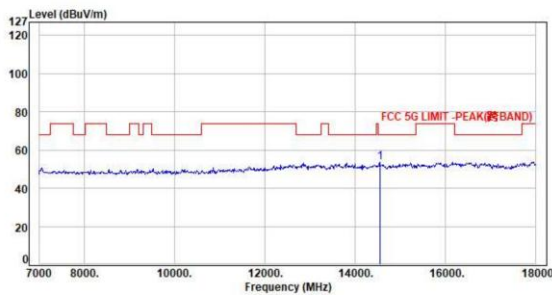

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	14546.00	5.87	47.72	53.59	68.20	-14.61	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX20 CH144 NSS1 MCS0
Pol : Horizontal Detector : Average

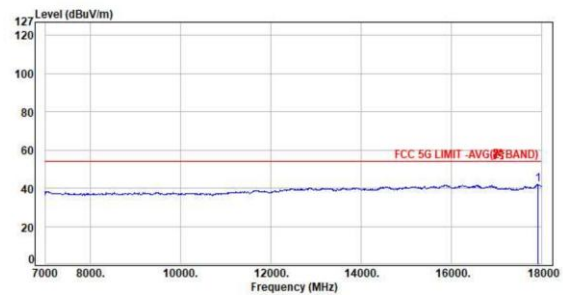


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17923.00	6.03	36.13	42.16	54.00	-11.84	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11aX40 CH142 NSS1 MCS0
Pol : Vertical Detector : Peak

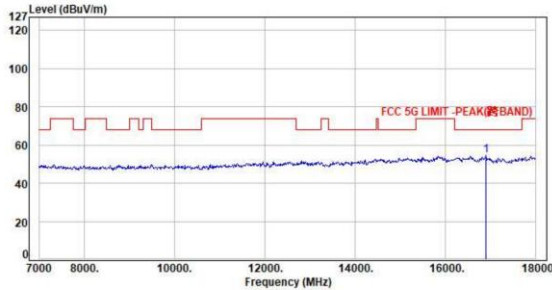

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16900.00	5.15	49.38	54.53	68.20	-13.67	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH142 NSS1 MCS0
Pol : Vertical Detector : Average

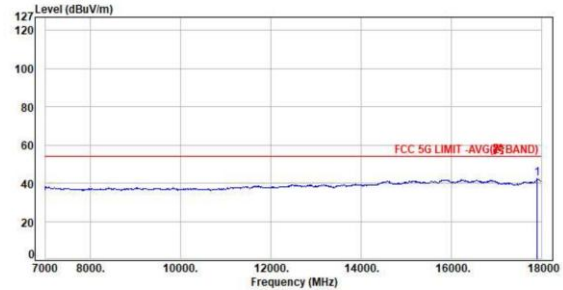

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.28	42.26	54.00	-11.74	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11aX40 CH142 NSS1 MCS0
Pol : Horizontal Detector : Peak

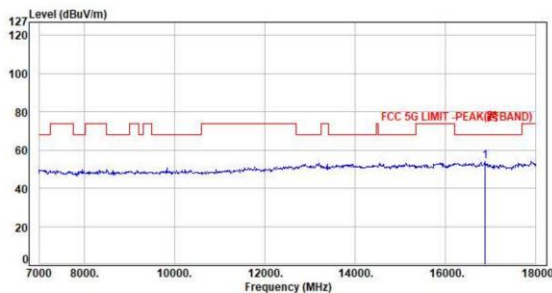

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16867.00	5.23	48.66	53.89	68.20	-14.31	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11aX40 CH142 NSS1 MCS0
Pol : Horizontal Detector : Average

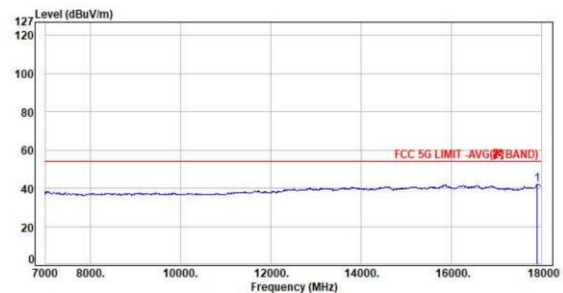


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.22	42.20	54.00	-11.80	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Vertical Detector : Peak

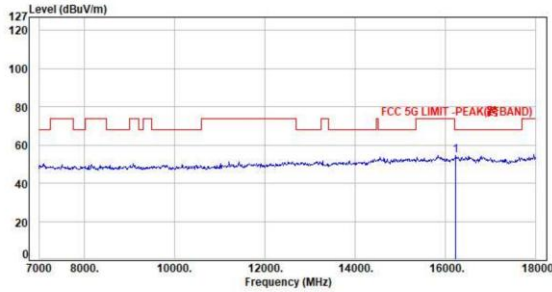

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	16229.00	5.55	48.79	54.34	68.20	-13.86	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Vertical Detector : Average

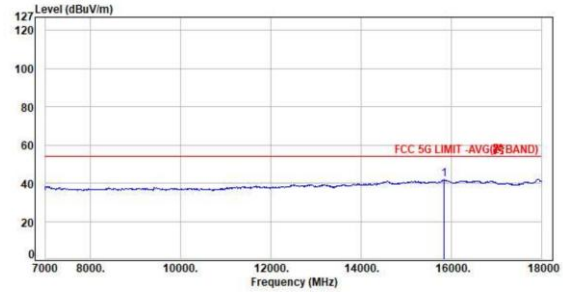

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	15833.00	5.78	36.33	42.11	54.00	-11.89	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Horizontal Detector : Peak

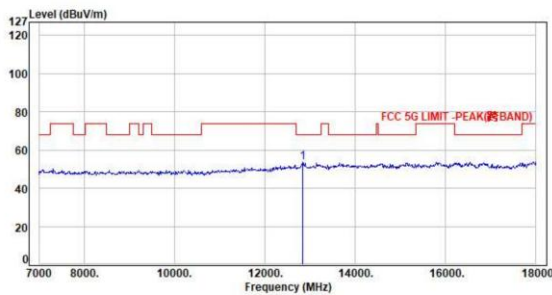

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	12830.00	5.17	48.20	53.37	68.20	-14.83	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax80 CH138 NSS1 MCS0
Pol : Horizontal Detector : Average

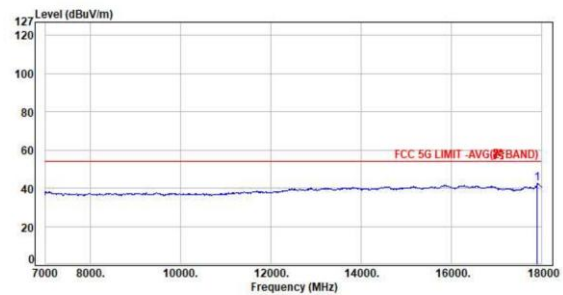

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	17901.00	5.98	36.32	42.30	54.00	-11.70	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Result and Data (18GHz ~ 40GHz)

ANT 1

Test Mode : 1TX 11ax20 CH120 NSS1 MCS0

Pol : Vertical

Detector : Peak

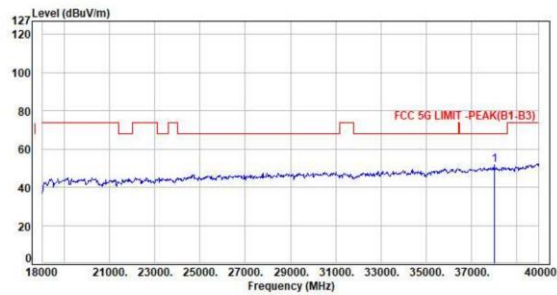

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	38020.00	7.58	43.98	51.56	68.20	-16.64	Peak	100	0	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11ax20 CH120 NSS1 MCS0

Pol : Horizontal

Detector : Peak

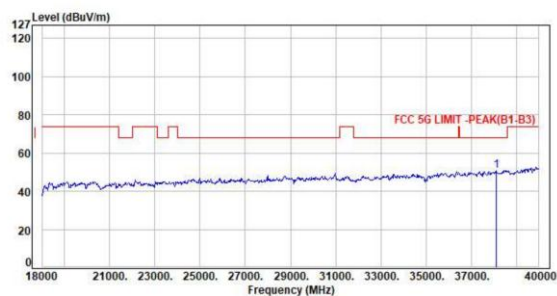

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	38108.00	7.65	42.91	50.56	68.20	-17.64	Peak	100	360	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




ANT 2

Test Mode : 1TX 11a CH120 6Mbps

Pol : Vertical

Detector : Peak

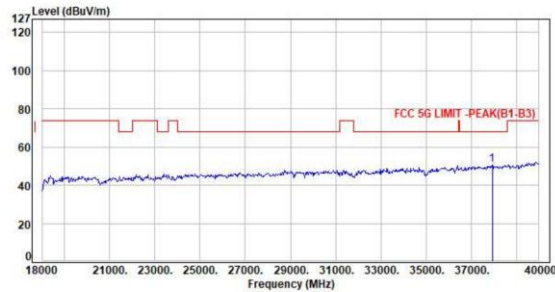

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	37932.00	7.50	43.01	50.51	68.20	-17.69	Peak	100	360	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 1TX 11a CH120 6Mbps

Pol : Horizontal

Detector : Peak

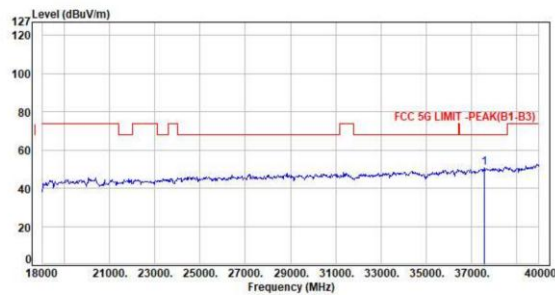

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	37602.00	7.58	43.19	50.77	68.20	-17.43	Peak	100	0	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor