



Exhibit: Test Setup Photos

Report File #: 7169009440R -000

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	



Figure 1 – 99% Bandwidth measurement

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	



Figure 2 – Radiated Emissions Setup
9kHz to 30MHz

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	

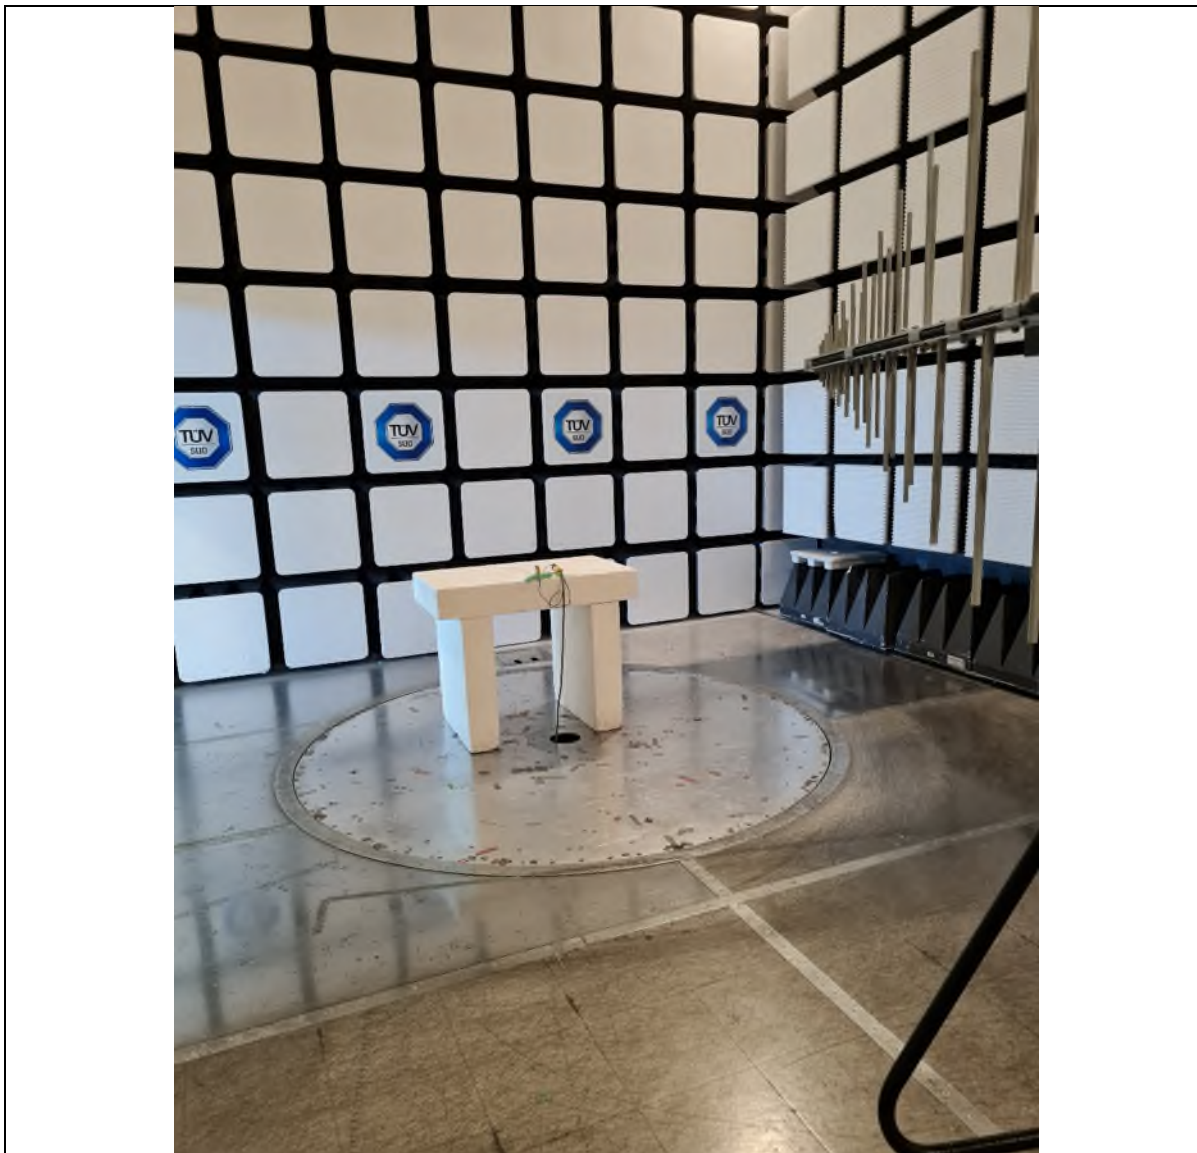


Figure 3 – Radiated Emissions Setup
30MHz to 1GHz

Note: As per ANSI C63.10-2013 Clause 6.3.1, below 1GHz, the height of the EUT was set to 80cm. Above 1GHz, the height was raised to 1.5m.

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	

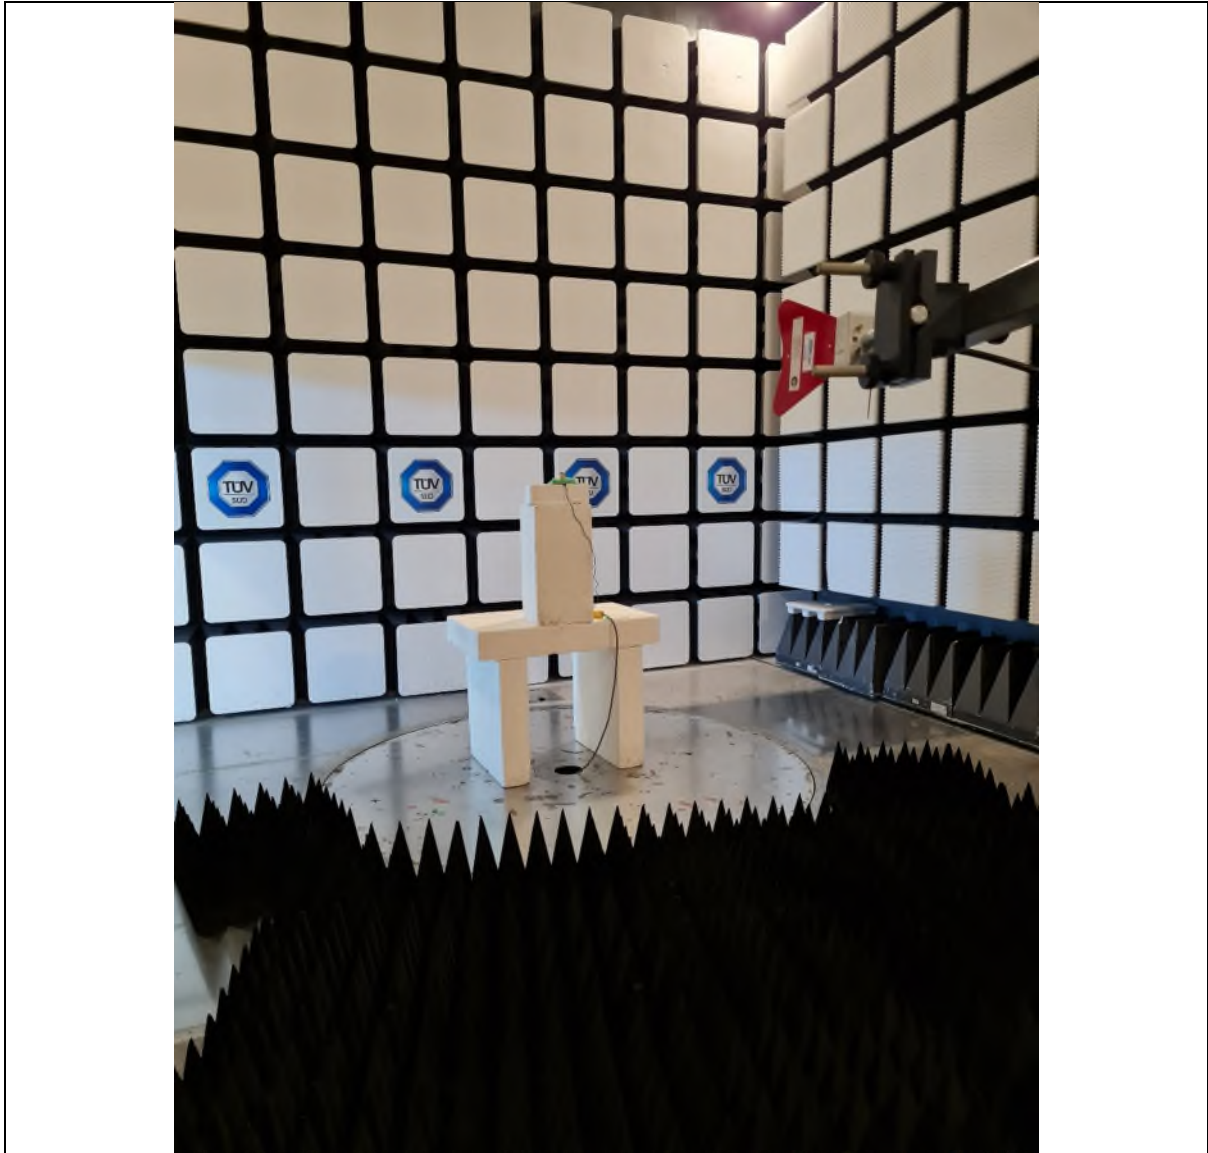


Figure 4 – Radiated Emissions Setup
1GHz to 6GHz Spurious Scans

Note: As per ANSI C63.10-2013 Clause 6.3.1, above 1GHz, the height of the EUT was set to 1.5m.

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	



Figure 5 – Radiated Emissions Setup
6GHz to 12GHz Spurious Scans & Band-Edge Measurements

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	



Figure 6 – Radiated Emissions Setup
18GHz to 26GHz Spurious Scans

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	



Figure 7 – Power Line Conducted Emissions Setup

Client	Utility Associates, Inc.	
Product	Smart Holster Sensor (Model: HS01)	
Standard(s)	RSS 210 Issue 10:2019 FCC Part 15 Subpart 15.209	

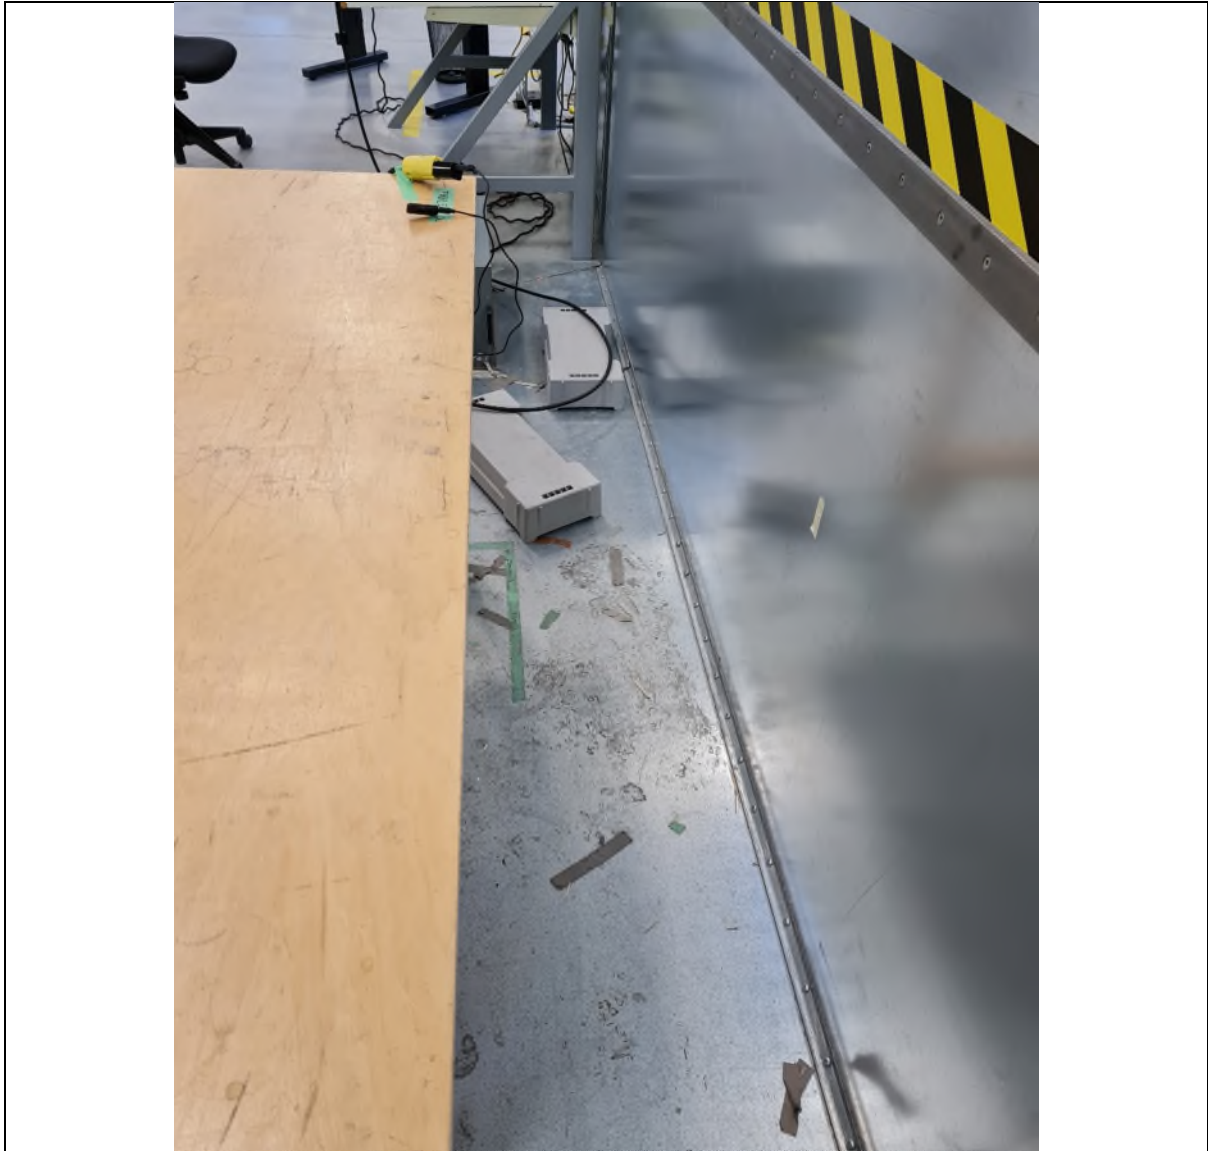


Figure 8 – Power Line Conducted Emissions Setup