



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.407

TEST REPORT

For

Mason America, Inc.

506 2nd Ave, Suite 1400, Seattle, Washington, United States 98104

FCC ID: 2AJZP-G430

Report Type: Original Report	Product Type: Mason G430
Test Engineer: <u>Max Min</u>	<i>Max Min</i>
Report Number: <u>RKSA180629003-00D</u>	
Report Date: <u>2018-10-21</u>	
Reviewed By: <u>Oscar Ye RF Leader</u>	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	13
SUPPORT EQUIPMENT LIST AND DETAILS	14
EXTERNAL I/O CABLE.....	14
BLOCK DIAGRAM OF TEST SETUP	14
SUMMARY OF TEST RESULTS	16
TEST EQUIPMENT LIST	17
FCC §15.407(f), §1.1310 & §2.1093 – RF EXPOSURE	18
FCC §15.203 – ANTENNA REQUIREMENT	19
APPLICABLE STANDARD	19
ANTENNA CONNECTOR CONSTRUCTION	19
FCC §15.407 (b) (6) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS	20
APPLICABLE STANDARD	20
EUT SETUP	20
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	21
CORRECTED FACTOR & MARGIN CALCULATION	21
TEST RESULTS SUMMARY	21
TEST DATA	21
FCC §15.205 & §15.209 & §15.407(B) (1), (6), (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER SETUP.....	26
TEST PROCEDURE	26
CORRECTED AMPLITUDE & MARGIN CALCULATION	26
TEST DATA	27
FCC §15.407(b) (1), (4) – BAND EDGE	68
APPLICABLE STANDARD	68
TEST PROCEDURE	68
TEST DATA	68
FCC §15.407(a) & §15.407(e) – EMISSION BANDWIDTH.....	82
APPLICABLE STANDARD	82
TEST PROCEDURE	82
TEST DATA	82
FCC §15.407(a) (1), (3)– CONDUCTED TRANSMITTER OUTPUT POWER	112

APPLICABLE STANDARD	112
TEST PROCEDURE	112
TEST DATA	112
FCC §15.407(a) (1), (3) - POWER SPECTRAL DENSITY	114
APPLICABLE STANDARD	114
TEST PROCEDURE	114
TEST DATA	114

FINAL

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Mason America, Inc.
Tested Model:	Mason G430
Product Type:	Mason G430
Dimension:	244 mm(L) * 174 mm(W) * 8.2 mm(H)
Power Supply:	DC 3.8V from Li-ion battery and DC 5.0V charging by adapter

Adapter Information:

Input: AC 100-240V, 50/60Hz, 0.5A

Output: DC 5.0V, 2A

**All measurement and test data in this report was gathered from production sample serial number: 20180629003. (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-06-29)*

Objective

This type approval report is prepared on behalf of *Mason America, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 15.247 DTS and Part 22H24E27 PCB submittals with FCC ID: 2AJZP-G430.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan).

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

In **5150~5250 MHz** band, test channel list is as below:

For 802.11a, 802.11ac20 and 802.11n-HT20 mode, EUT was tested with channel 36, 40 and 48.

For 802.11ac40 and 802.11n-HT40 mode, EUT was tested with channel 38 and 46.

For 802.11ac80 mode, EUT was tested with channel 42.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

In **5725~5850 MHz** band, test channel list is as below:

For 802.11a, 802.11ac20 and 802.11n-HT20 mode, EUT was tested with channel 149, 157 and 165.

For 802.11ac40 and 802.11n-HT40 mode, EUT was tested with channel 151 and 159.

For 802.11ac80 mode, EUT was tested with channel 155.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	163	5815
155	5775	165	5825
157	5785	/	/

EUT Exercise Software


RF test tool: QRCT 3

The worst case was performed under:

Mode	Data rate	Power level	
		5150-5250 Band	5725-5850 Band
802.11a	6 Mbps	8	8
802.11ac20	MCS0	8	8
802.11n-HT20	MCS0	8	8
802.11ac40	MCS0	7	7
802.11n-HT40	MCS0	7	7
802.11ac80	MCS0	9	9


5150MHz-5250MHz Band:

802.11a mode Duty Cycle

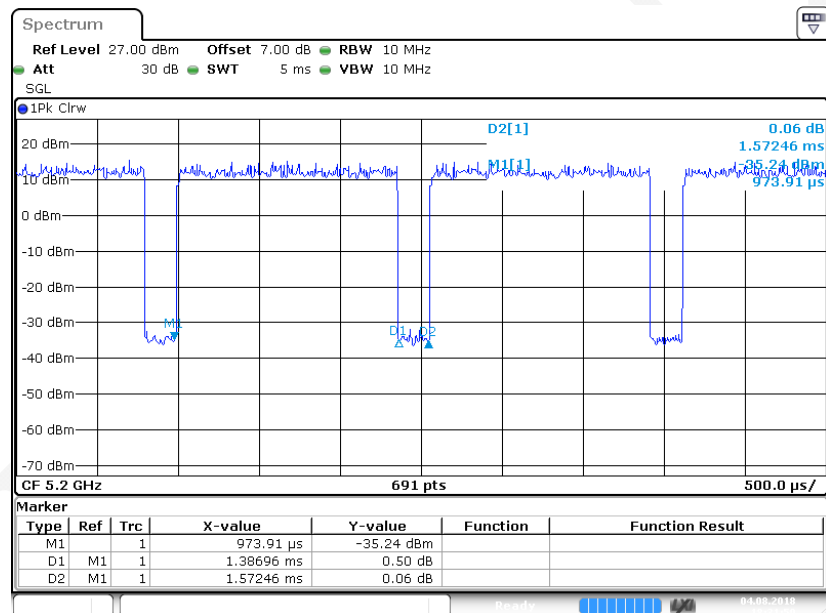


Date: 4 AUG 2018 18:31:59

802.11ac20 mode Duty Cycle

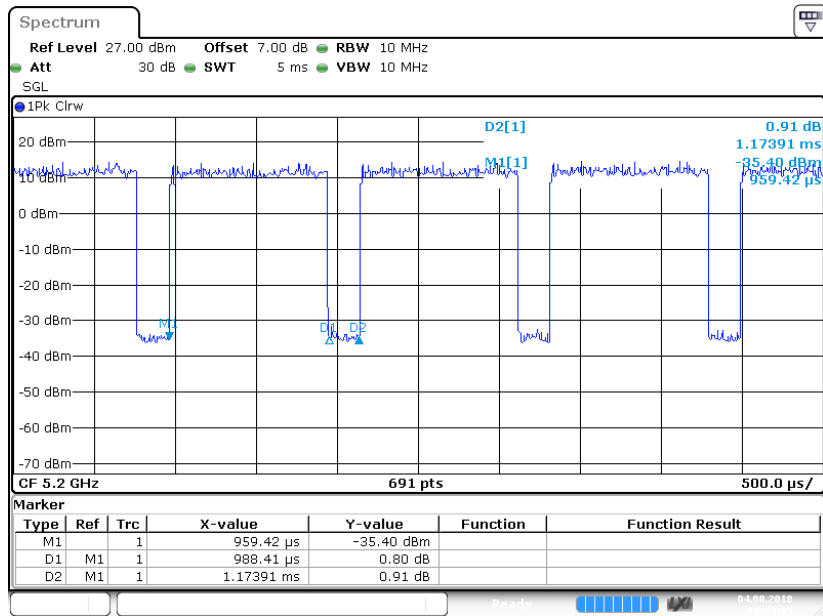


Date: 4 AUG 2018 18:34:15

802.11n-HT20 mode Duty Cycle

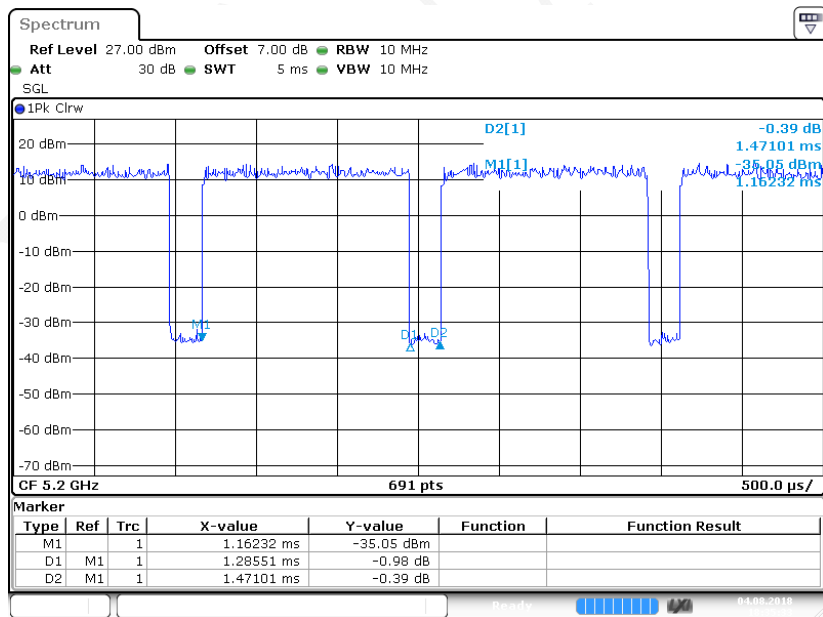


Date: 4 AUG 2018 18:35:33

802.11ac40 mode Duty Cycle

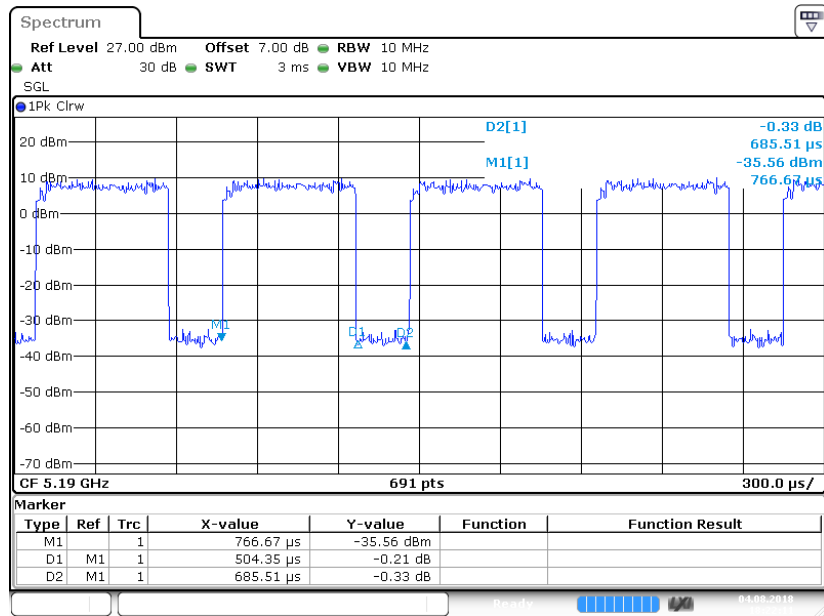


Date: 4 AUG 2018 18:22:11

802.11n-HT40 mode Duty Cycle

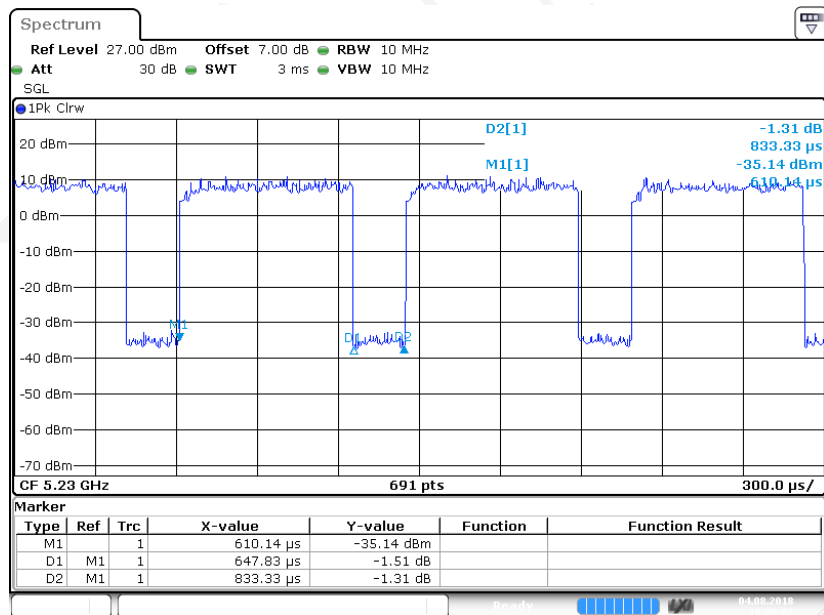

Date: 4 AUG 2018 18:26:02


802.11ac80 mode Duty Cycle

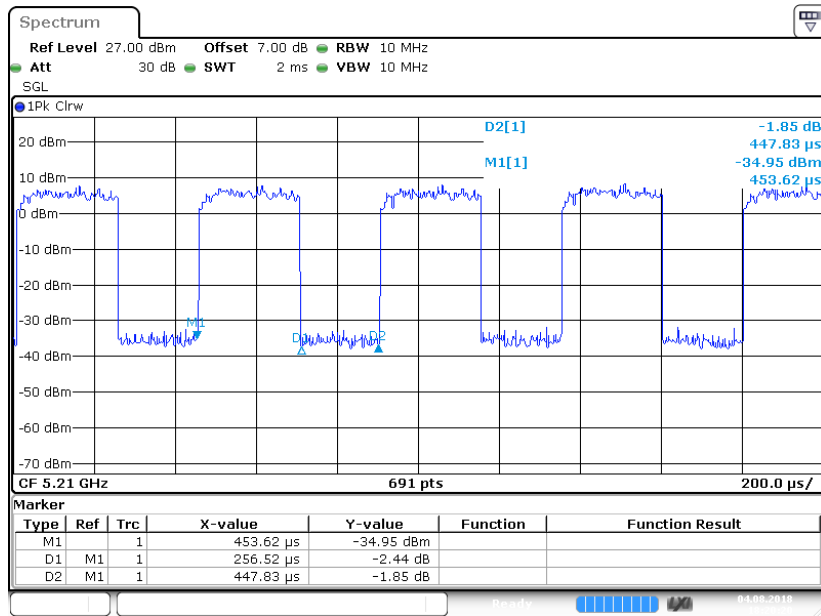

Date: 4 AUG 2018 18:20:21


5725MHz-5850MHz Band:

802.11a mode Duty Cycle

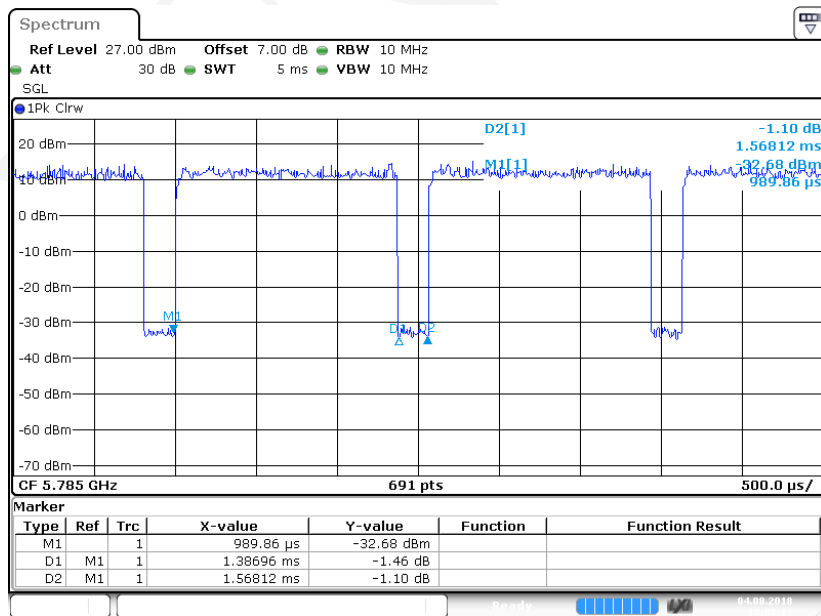


Date: 4 AUG 2018 18:09:12

802.11ac20 mode Duty Cycle

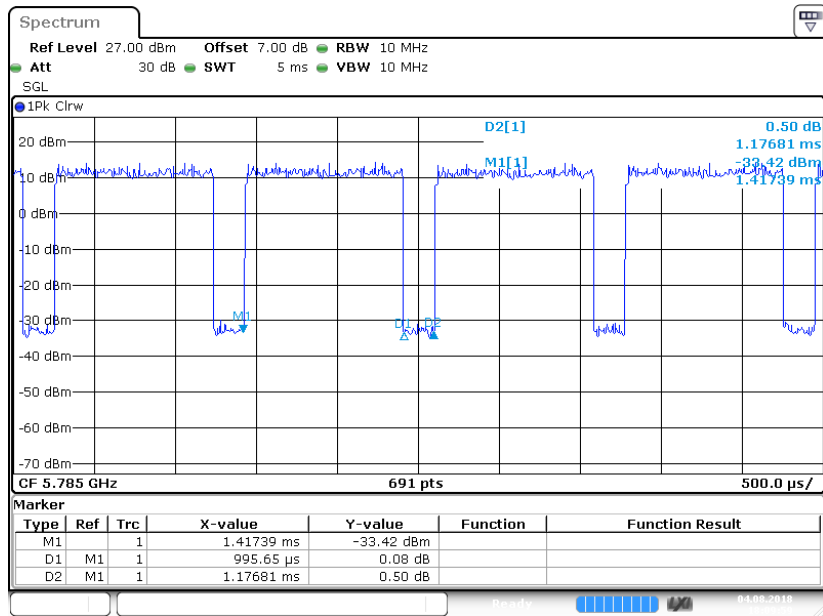


Date: 4 AUG 2018 18:09:59

802.11n-HT20 mode Duty Cycle

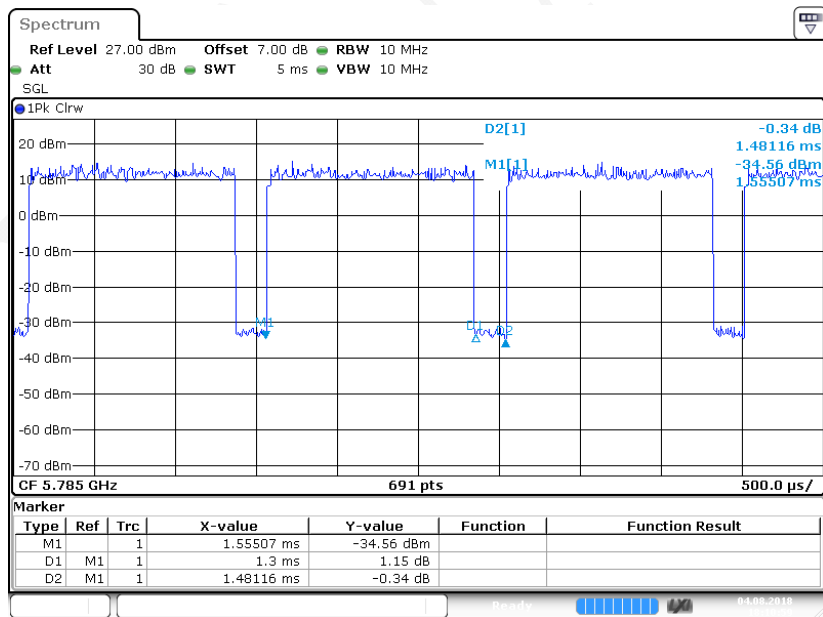


Date: 4 AUG 2018 18:10:59


802.11ac40 mode Duty Cycle

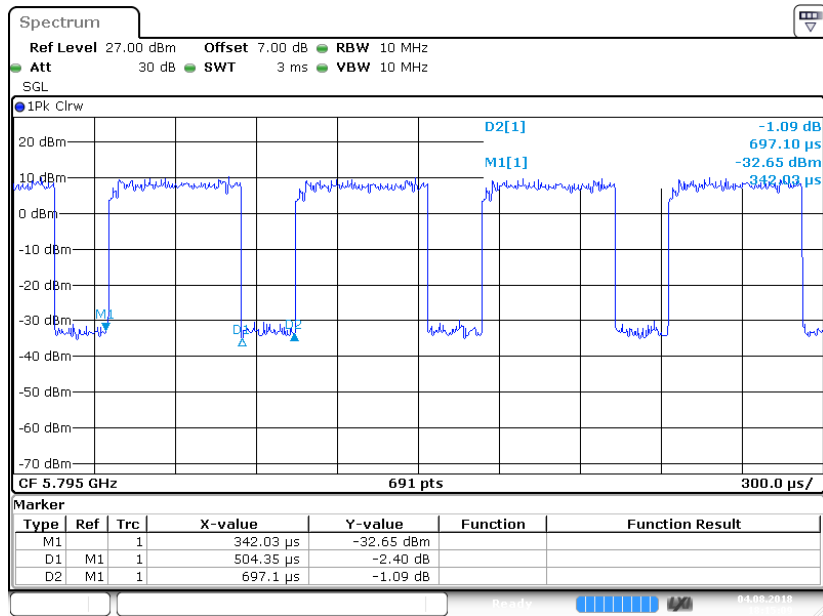

802.11n-HT40 mode Duty Cycle

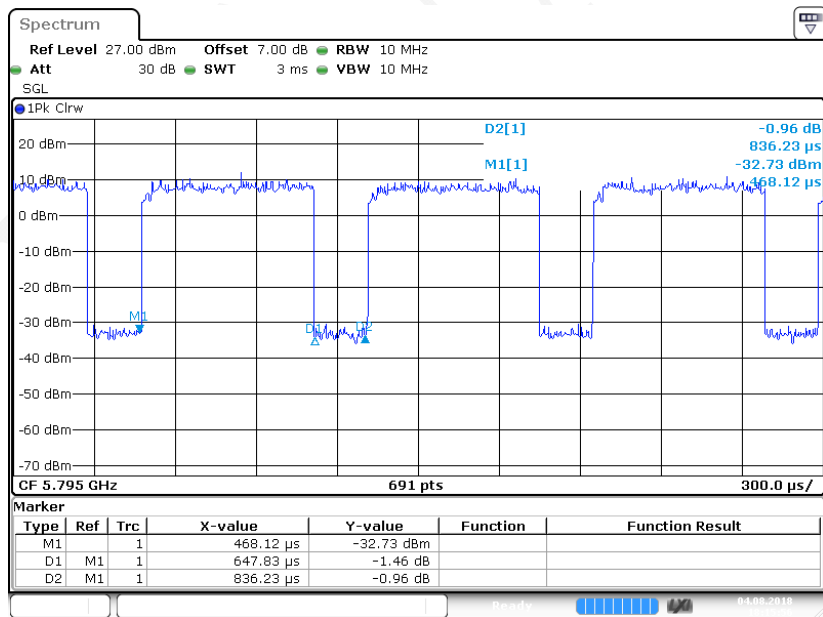

802.11ac80 mode Duty Cycle

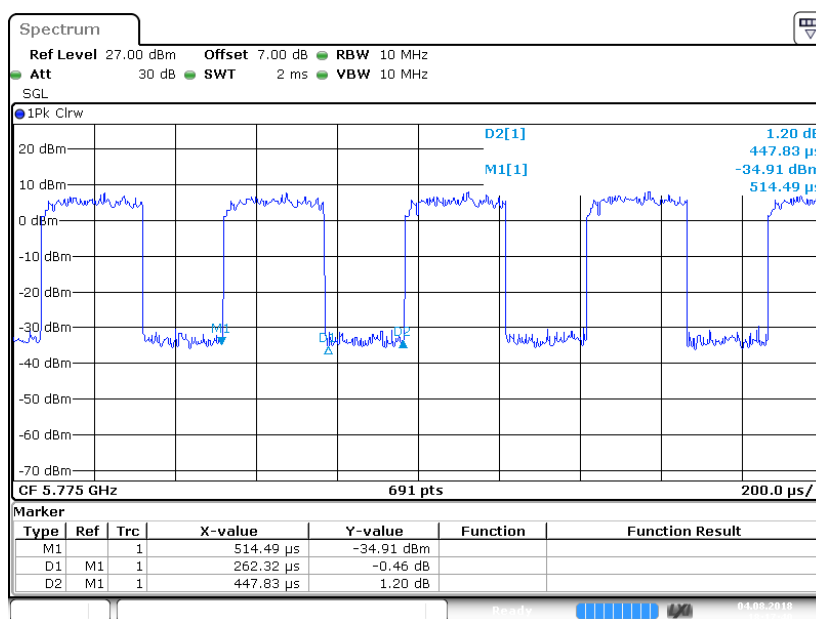

Date: 4 AUG 2018 18:17:40

Mode	Frequency Range (MHz)	Duty Cycle (%)	T (us)	1/T (kHz)	10log(1/x)
802.11a	5150-5250	88.23	1387	0.72	0.54
802.11ac20		84.16	988	1.01	0.75
802.11n-HT20		87.42	1286	0.78	0.58
802.11ac40		73.47	504	1.98	1.34
802.11n-HT40		77.79	648	1.54	1.09
802.11ac80		57.37	257	3.89	2.41
802.11a	5725-5850	88.46	1387	0.72	0.53
802.11ac20		84.62	996	1.00	0.73
802.11n-HT20		87.78	1300	0.77	0.57
802.11ac40		72.31	504	1.98	1.41
802.11n-HT40		77.51	648	1.54	1.11
802.11ac80		58.48	262	3.82	2.33

Note: "x" means duty cycle.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	0.8	EUT	Adapter

Block Diagram of Test Setup


For Conducted Emissions:

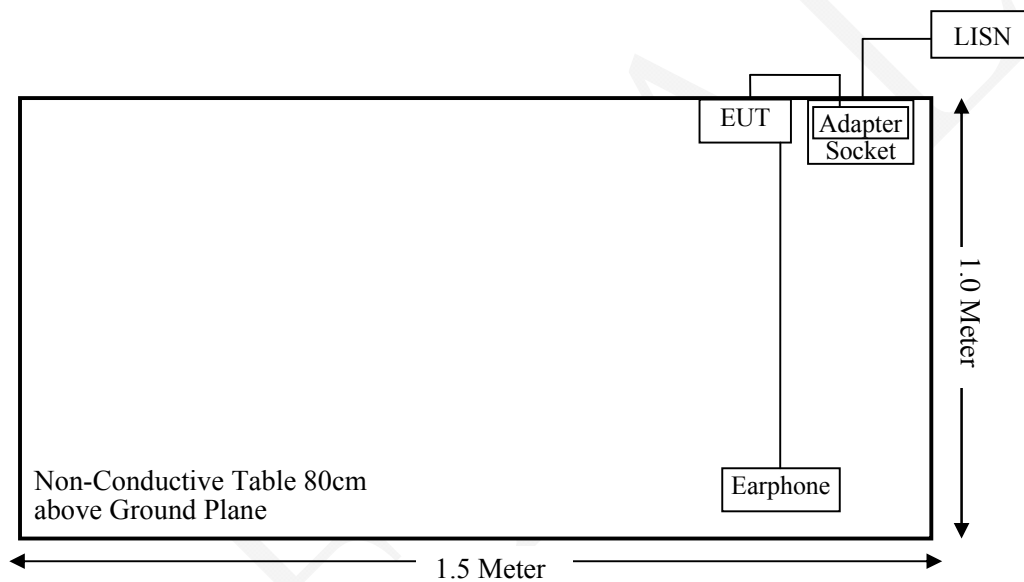

For Radiated Emissions (Below 1GHz):

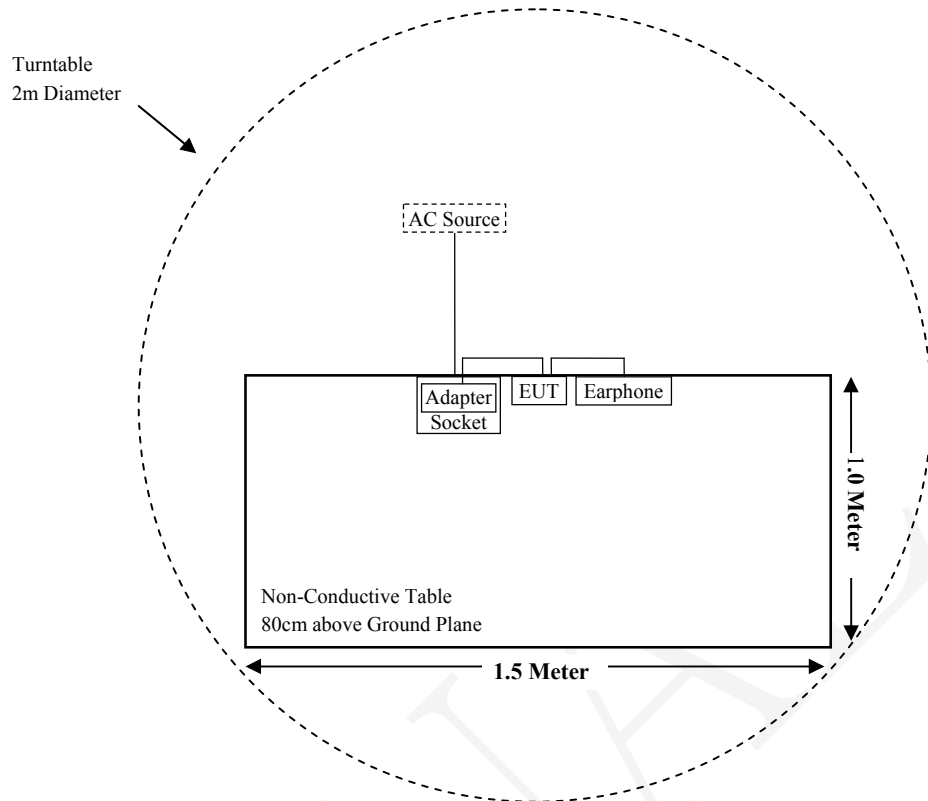

For Radiated Emissions (Above 1GHz):

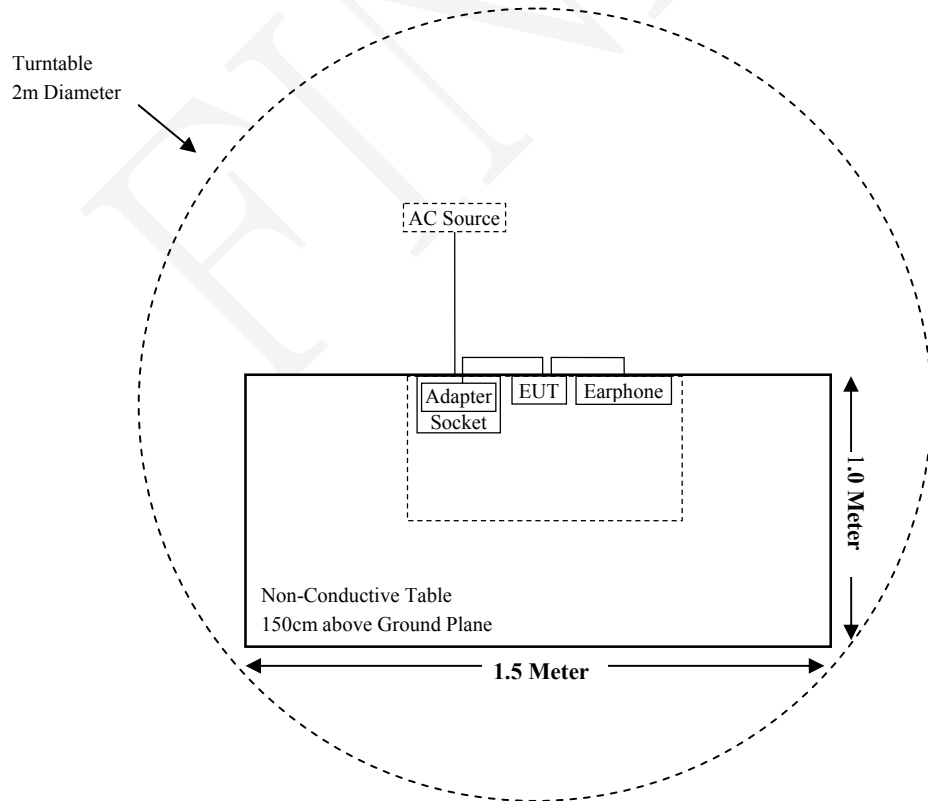

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407(f), §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 & §15.407(b) (6)	AC Power Line Conducted Emissions	Compliance
§15.205 & §15.209 & §15.407 (b) (1), (6), (7)	Undesirable Emission & Restricted Bands	Compliance
§15.407 (b) (1), (4)	Band Edge	Compliance
§15.407 (a) (1), (5) & §15.407 (e)	Emission Bandwidth	Compliance
§15.407(a) (1), (3)	Conducted Transmitter Output Power	Compliance
§15.407 (a) (1), (3)	Power Spectral Density	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-26	2018-08-25
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Mini-Circuits	Amplifier	ZVA-183W-S+	220701818	2018-05-20	2019-05-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band Reject Filter	BRC50703	G094	2018-08-05	2019-08-04
MICRO-TRONICS	Band Reject Filter	BRC50705	G085	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2018-07-23	2019-07-22
Agilent	Power Meter	N1912A	MY5000492	2017-11-18	2018-11-17
Agilent	Power Sensor	N1921A	MY54210024	2017-11-18	2018-11-17
Mason	RF Cable	MasonC01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-11-12	2018-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.407(f), §1.1310 & §2.1093 – RF EXPOSURE

Applicable Standard

According to §1.1310 and §2.1093, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

Mode	Frequency Range (MHz)	Max Tune-up Conducted Power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BT3.0	2402-2480	7.6	5.75	5.0	1.8	3	Yes
Wi-Fi	2412-2462	9.8	9.55	5.0	3.0	3	Yes
5G Wi-Fi	5150-5250	7.8	6.03	5.0	2.8	3	Yes
	5725-5850	7.8	6.03	5.0	2.9	3	Yes

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407, if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PIFA antenna for 5G Wi-Fi and the antenna gain is 0dBi, which uses a unique coupling to the intentional radiator; fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – AC POWER LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6)

EUT Setup

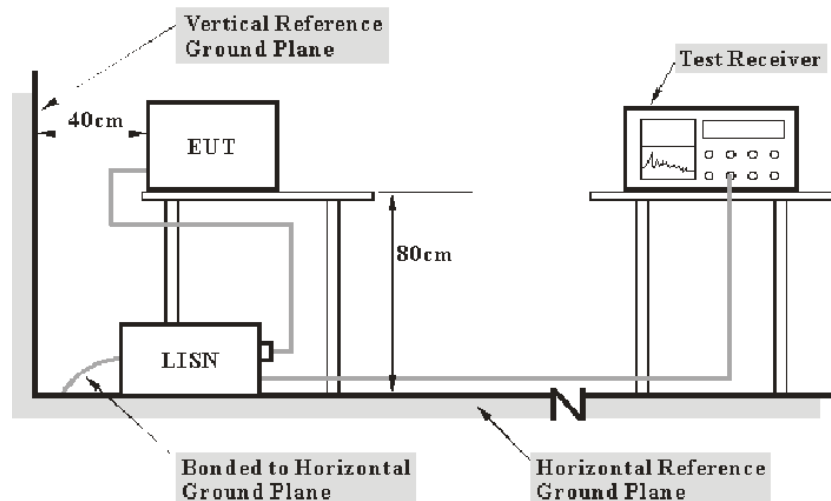

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa


The testing was performed by Max Min on 2018-08-10.

Test Mode: Transmitting in low channel of 802.11n-HT40 (5150-5250) mode. (Worst case)

AC 120V/60 Hz, Line



Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.185	38.38	QP	9.000	L1	16.02	64.26	25.88	Compliance
0.185	30.47	AV	9.000	L1	16.02	54.26	23.79	Compliance
0.400	38.70	QP	9.000	L1	16.06	57.85	19.15	Compliance
0.400	31.47	AV	9.000	L1	16.06	47.85	16.38	Compliance
0.640	49.74	QP	9.000	L1	15.99	56.00	6.26	Compliance
0.640	40.60	AV	9.000	L1	15.99	46.00	5.40	Compliance
1.700	42.19	QP	9.000	L1	15.86	56.00	13.81	Compliance
1.700	30.10	AV	9.000	L1	15.86	46.00	15.90	Compliance
3.300	41.46	QP	9.000	L1	15.85	56.00	14.54	Compliance
3.300	29.93	AV	9.000	L1	15.85	46.00	16.07	Compliance
14.900	35.64	QP	9.000	L1	16.21	60.00	24.36	Compliance
14.950	25.09	AV	9.000	L1	16.21	50.00	24.91	Compliance

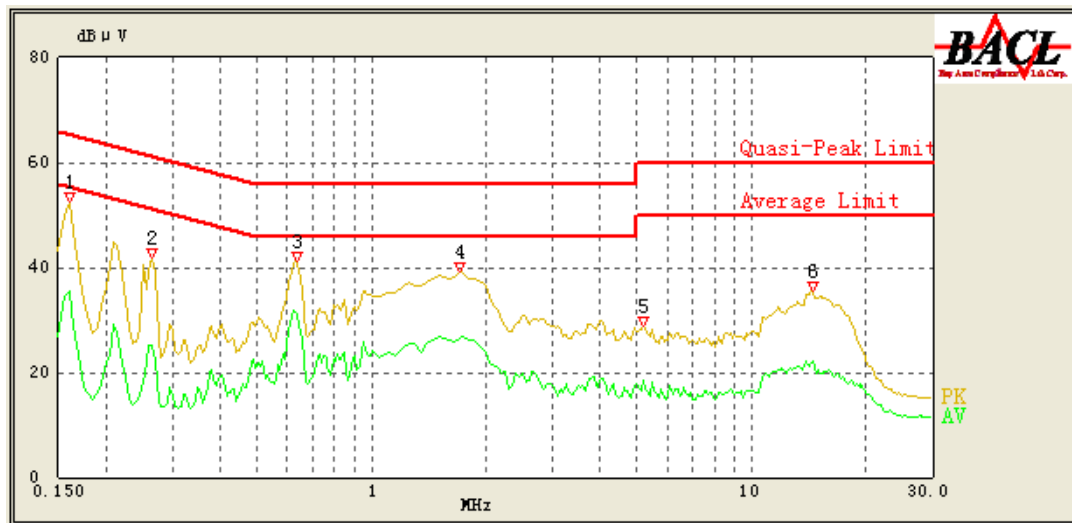AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.160	52.43	QP	9.000	N	16.06	65.46	13.03	Compliance
0.160	35.44	AV	9.000	N	16.06	55.46	20.02	Compliance
0.265	41.69	QP	9.000	N	16.06	61.27	19.58	Compliance
0.265	25.19	AV	9.000	N	16.06	51.27	26.08	Compliance
0.635	41.08	QP	9.000	N	16.03	56.00	14.92	Compliance
0.635	31.18	AV	9.000	N	16.03	46.00	14.82	Compliance
1.700	39.13	QP	9.000	N	15.92	56.00	16.87	Compliance
1.700	26.37	AV	9.000	N	15.92	46.00	19.63	Compliance
5.200	28.75	QP	9.000	N	15.88	60.00	31.25	Compliance
5.200	18.42	AV	9.000	N	15.88	50.00	31.58	Compliance
14.500	35.50	QP	9.000	N	16.01	60.00	24.50	Compliance
14.500	22.22	AV	9.000	N	16.01	50.00	27.78	Compliance

Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) - Corrected Amplitude (dBμV)

FCC §15.205 & §15.209 & §15.407(B) (1), (6), (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (6), (7); §15.209; §15.205;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27dBm/MHz


For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz.


According to 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} + 95.2$, for $d = 3$ meters.

EUT Setup


Below 1 GHz:

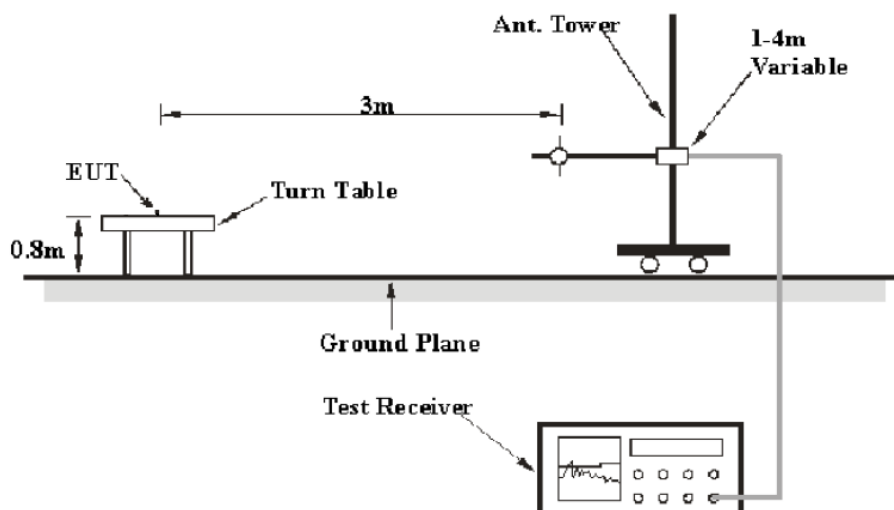

1 GHz-18GHz:

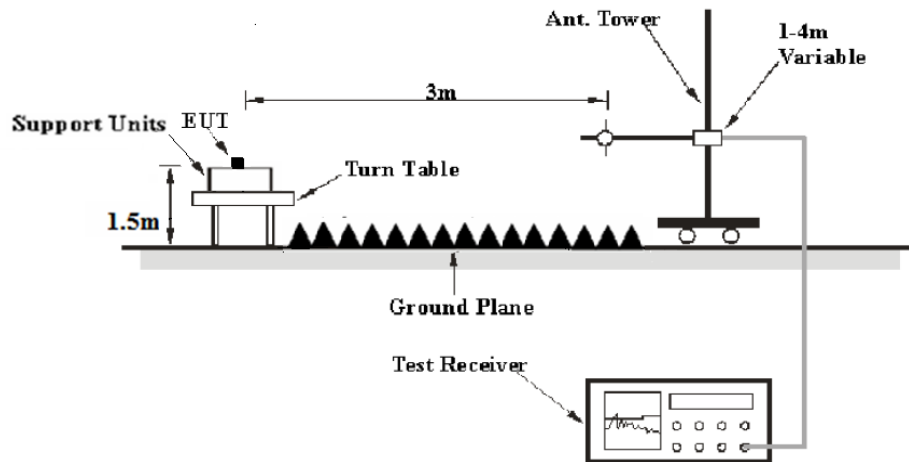

18 GHz-40GHz:

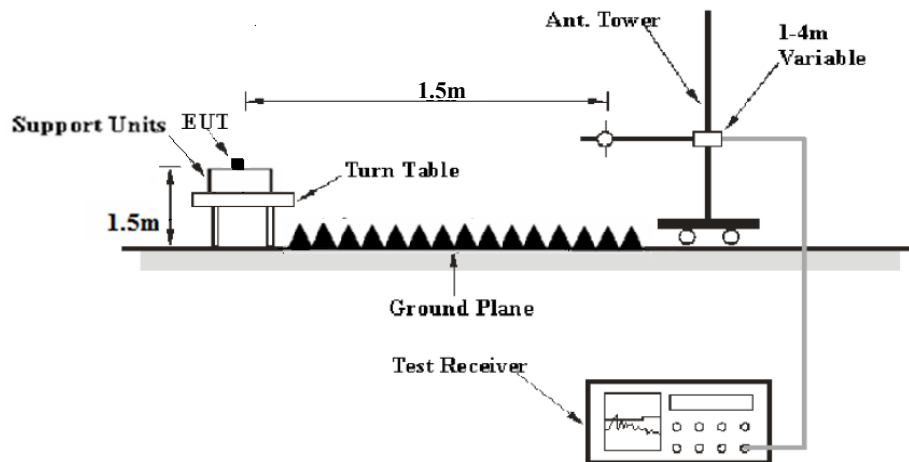

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

The Radiated measurements was performed, The EIRP converted to field strength as follows:

According to C63.4, 18-40GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB

Extrapolation result = Corrected Amplitude (dBμV/m) - distance extrapolation factor (6dB)

or Limit line = Specific limits(dBμV) + distance extrapolation factor (6dB)

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Data

Environmental Conditions

Temperature:	24.2 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa


The testing was performed by Max Min on 2018-08-15.

EUT operation mode: Transmitting

Spurious Emission Test

30MHz-1GHz:

Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11ac80 modes of operation in the X, Y and Z axes of orientation, the worst case **low channel of 802.11n-HT40 mode(5150MHz-5250MHz) in X-axis of orientation** was recorded.

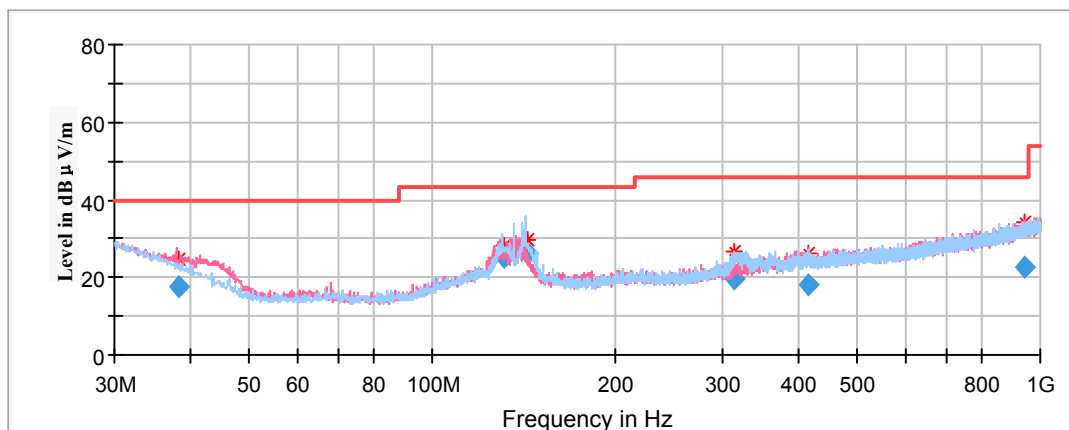

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
38.255050	17.59	101.0	V	299.0	-9.5	40.00	22.41
131.306650	25.26	199.0	H	344.0	-11.6	43.50	18.24
143.111450	26.12	199.0	H	344.0	-12.1	43.50	17.38
312.932500	19.58	101.0	H	217.0	-10.2	46.00	26.42
414.345750	18.17	199.0	V	115.0	-7.9	46.00	27.83
943.531100	22.63	199.0	V	341.0	1.1	46.00	23.37

1GHz-18GHz(5150MHz-5250MHz):**802.11a Mode:**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.150-5.350GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Low Channel: 5180MHz


Full Spectrum

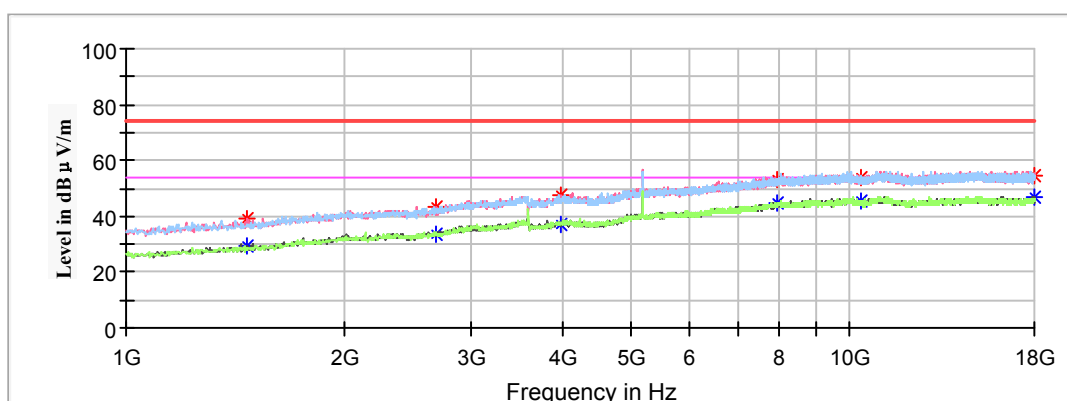

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1472.600000	---	29.23	100.0	V	107.0	-1.4	54.00	24.77
1472.600000	38.83	---	100.0	V	107.0	-1.4	74.00	35.17
2686.400000	---	33.37	100.0	V	244.0	4.2	54.00	20.63
2686.400000	43.33	---	100.0	V	244.0	4.2	74.00	30.67
3998.800000	---	37.17	250.0	H	225.0	9.2	54.00	16.83
3998.800000	47.75	---	250.0	H	225.0	9.2	74.00	26.25
7936.000000	53.15	---	150.0	V	240.0	17.0	74.00	20.85
7936.000000	---	44.98	150.0	V	240.0	17.0	54.00	9.02
10360.000000	---	45.18	250.0	V	287.0	17.9	54.00	8.82
10360.000000	53.78	---	250.0	V	287.0	17.9	74.00	20.22
17952.400000	54.33	---	100.0	V	301.0	19.1	74.00	19.67
17952.400000	---	47.08	100.0	V	301.0	19.1	54.00	6.92

Middle Channel: 5200MHz


Full Spectrum

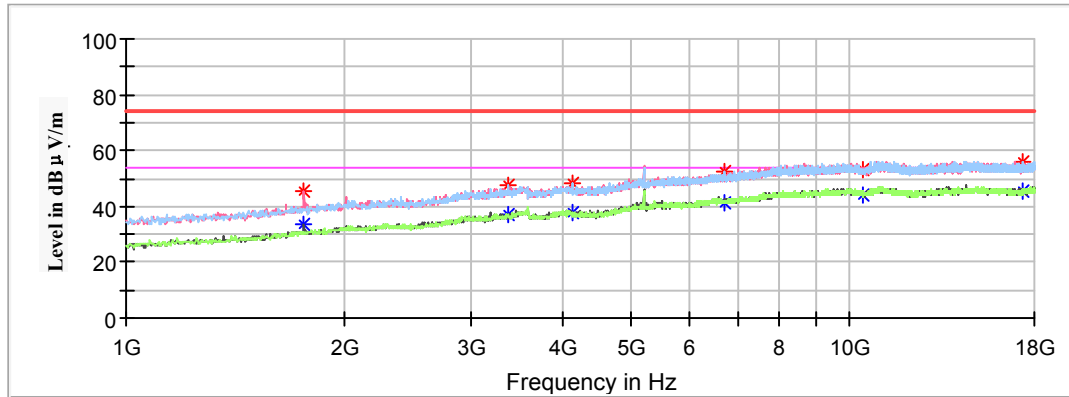

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1761.600000	---	33.49	250.0	V	135.0	0.6	54.00	20.51
1761.600000	45.71	---	250.0	V	135.0	0.6	74.00	28.29
3369.800000	---	36.78	100.0	H	359.0	6.9	54.00	17.22
3369.800000	47.48	---	100.0	H	359.0	6.9	74.00	26.52
4131.400000	---	37.90	100.0	H	310.0	9.2	54.00	16.10
4131.400000	48.46	---	100.0	H	310.0	9.2	74.00	25.54
6705.200000	---	41.61	250.0	H	248.0	14.6	54.00	12.39
6705.200000	52.42	---	250.0	H	248.0	14.6	74.00	21.58
10400.000000	---	44.36	100.0	V	14.0	17.8	54.00	9.64
10400.000000	53.43	---	100.0	V	14.0	17.8	74.00	20.57
17330.200000	---	45.16	200.0	H	138.0	18.3	54.00	8.84
17330.200000	55.66	---	200.0	H	138.0	18.3	74.00	18.34

High Channel: 5240MHz

Full Spectrum

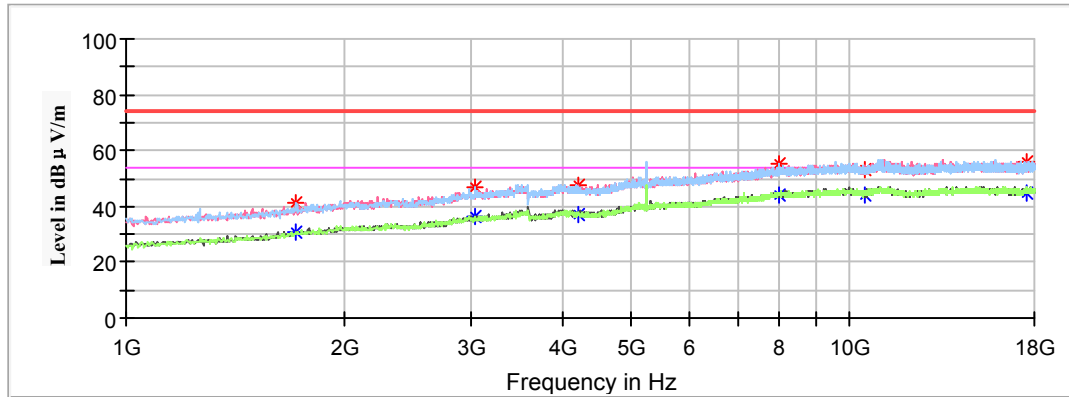

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1717.400000	---	30.78	200.0	H	120.0	0.3	54.00	23.22
1717.400000	41.31	---	200.0	H	120.0	0.3	74.00	32.69
3029.800000	---	36.23	150.0	H	162.0	6.1	54.00	17.77
3029.800000	47.10	---	150.0	H	162.0	6.1	74.00	26.90
4206.200000	---	36.75	250.0	V	215.0	9.2	54.00	17.25
4206.200000	47.46	---	250.0	V	215.0	9.2	74.00	26.54
7980.200000	---	43.91	250.0	H	198.0	17.1	54.00	10.09
7980.200000	54.98	---	250.0	H	198.0	17.1	74.00	19.02
10480.000000	---	43.95	150.0	V	242.0	17.7	54.00	10.05
10480.000000	53.41	---	150.0	V	242.0	17.7	74.00	20.59
17554.600000	---	44.83	200.0	V	127.0	18.5	54.00	9.17
17554.600000	55.84	---	200.0	V	127.0	18.5	74.00	18.16

802.11ac20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.150-5.350GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5180MHz


Full Spectrum

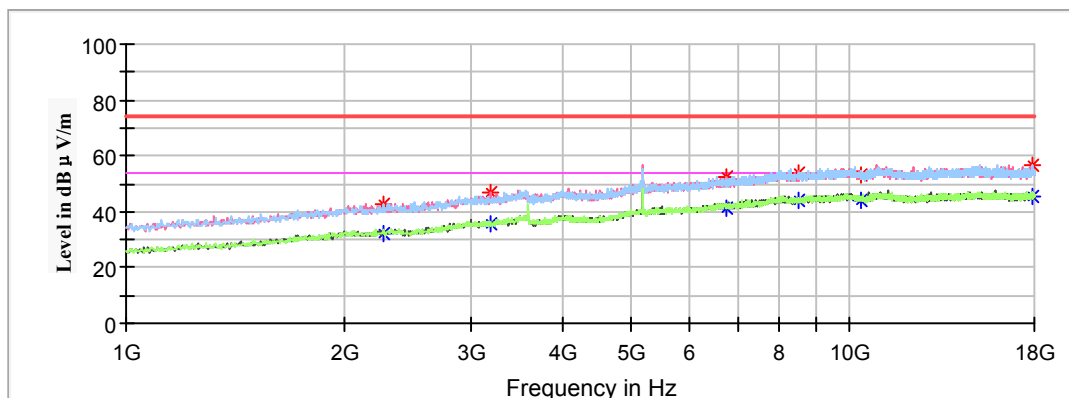

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
2264.800000	---	32.24	150.0	H	136.0	2.6	54.00	21.76
2264.800000	42.73	---	150.0	H	136.0	2.6	74.00	31.27
3193.000000	---	35.99	100.0	V	265.0	6.5	54.00	18.01
3193.000000	46.67	---	100.0	V	265.0	6.5	74.00	27.33
6735.800000	---	41.59	250.0	V	187.0	14.6	54.00	12.41
6735.800000	52.63	---	250.0	V	187.0	14.6	74.00	21.37
8497.000000	---	43.79	100.0	H	270.0	17.2	54.00	10.21
8497.000000	54.17	---	100.0	H	270.0	17.2	74.00	19.83
10360.000000	---	43.95	200.0	V	211.0	17.9	54.00	10.05
10360.000000	53.42	---	200.0	V	211.0	17.9	74.00	20.58
17935.400000	---	45.51	100.0	H	296.0	19.1	54.00	8.49
17935.400000	56.58	---	100.0	H	296.0	19.1	74.00	17.42

Middle Channel: 5200MHz


Full Spectrum

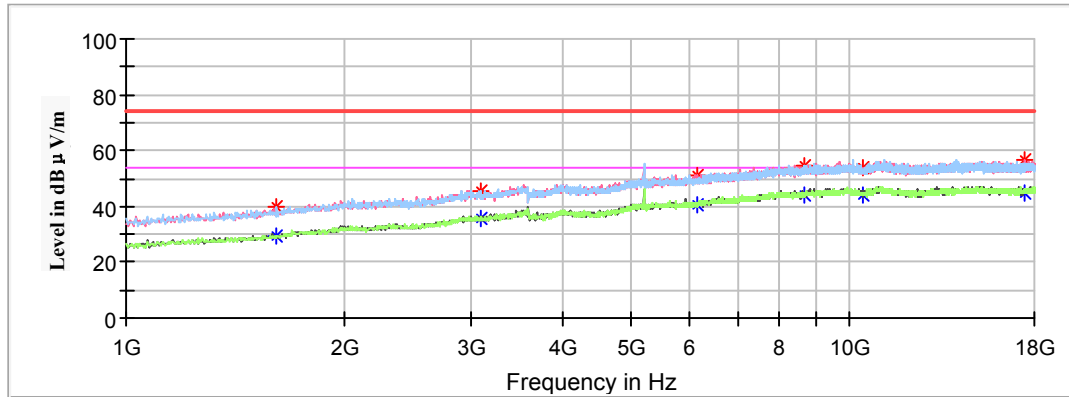

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1615.400000	---	29.28	100.0	H	200.0	-0.4	54.00	24.72
1615.400000	39.57	---	100.0	H	200.0	-0.4	74.00	34.43
3097.800000	---	35.36	150.0	H	285.0	6.3	54.00	18.64
3097.800000	45.45	---	150.0	H	285.0	6.3	74.00	28.55
6157.800000	---	40.72	250.0	V	229.0	13.4	54.00	13.28
6157.800000	50.84	---	250.0	V	229.0	13.4	74.00	23.16
8663.600000	---	44.28	150.0	H	97.0	17.3	54.00	9.72
8663.600000	54.78	---	150.0	H	97.0	17.3	74.00	19.22
10400.000000	---	44.17	200.0	V	36.0	17.8	54.00	9.83
10400.000000	53.76	---	200.0	V	36.0	17.8	74.00	20.24
17503.600000	---	44.93	150.0	V	79.0	18.5	54.00	9.07
17503.600000	56.48	---	150.0	V	79.0	18.5	74.00	17.52

High Channel: 5240MHz

Full Spectrum

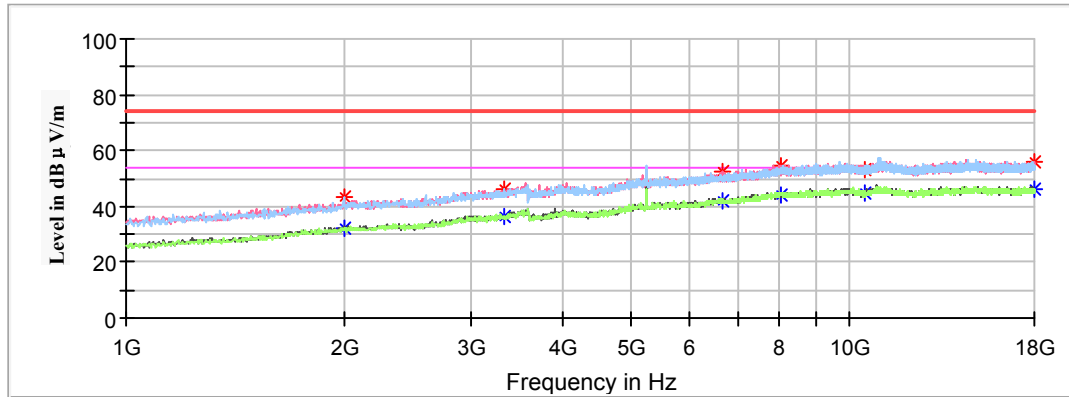

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1999.600000	---	32.28	100.0	H	325.0	2.0	54.00	21.72
1999.600000	43.52	---	100.0	H	325.0	2.0	74.00	30.48
3329.000000	---	36.05	150.0	H	119.0	6.8	54.00	17.95
3329.000000	46.35	---	150.0	H	119.0	6.8	74.00	27.65
6678.000000	---	42.21	200.0	V	209.0	14.5	54.00	11.79
6678.000000	52.45	---	200.0	V	209.0	14.5	74.00	21.55
8038.000000	---	44.14	100.0	V	216.0	17.1	54.00	9.86
8038.000000	54.87	---	100.0	V	216.0	17.1	74.00	19.13
10480.000000	---	44.46	200.0	V	8.0	17.7	54.00	9.54
10480.000000	53.19	---	200.0	V	8.0	17.7	74.00	20.81
17949.000000	55.63	---	100.0	V	208.0	19.1	74.00	18.37
17952.400000	---	46.42	100.0	V	208.0	19.1	54.00	7.58

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.150-5.350GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5180MHz


Full Spectrum

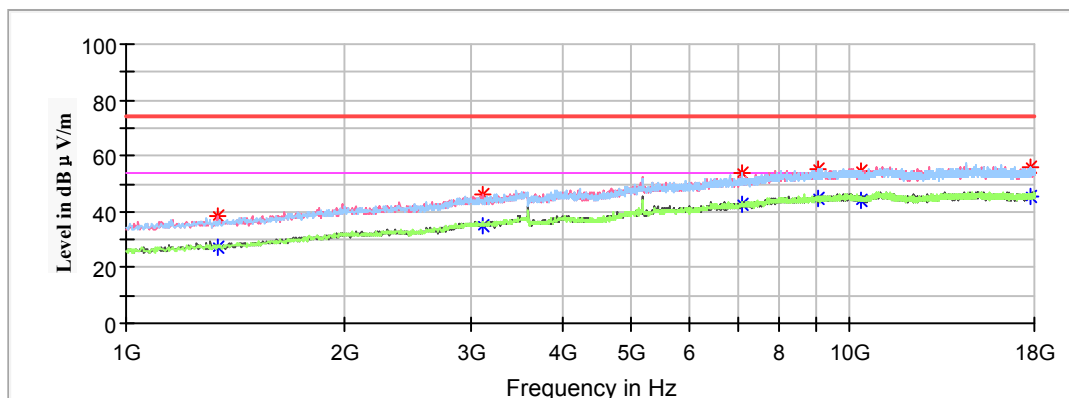

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1336.600000	38.65	---	100.0	V	98.0	-2.2	74.00	35.35
1336.600000	---	27.03	100.0	V	98.0	-2.2	54.00	26.97
3118.200000	46.28	---	150.0	V	346.0	6.3	74.00	27.72
3118.200000	---	34.85	150.0	V	346.0	6.3	54.00	19.15
7096.200000	53.50	---	200.0	H	119.0	15.1	74.00	20.50
7096.200000	---	42.38	200.0	H	119.0	15.1	54.00	11.62
9058.000000	---	44.77	100.0	H	67.0	17.6	54.00	9.23
9058.000000	55.16	---	100.0	H	67.0	17.6	74.00	18.84
10360.000000	---	44.33	200.0	V	302.0	17.9	54.00	9.67
10360.000000	54.61	---	200.0	V	302.0	17.9	74.00	19.39
17799.400000	---	45.52	100.0	H	193.0	18.9	54.00	8.48
17799.400000	55.66	---	100.0	H	193.0	18.9	74.00	18.34

Middle Channel: 5200MHz


Full Spectrum

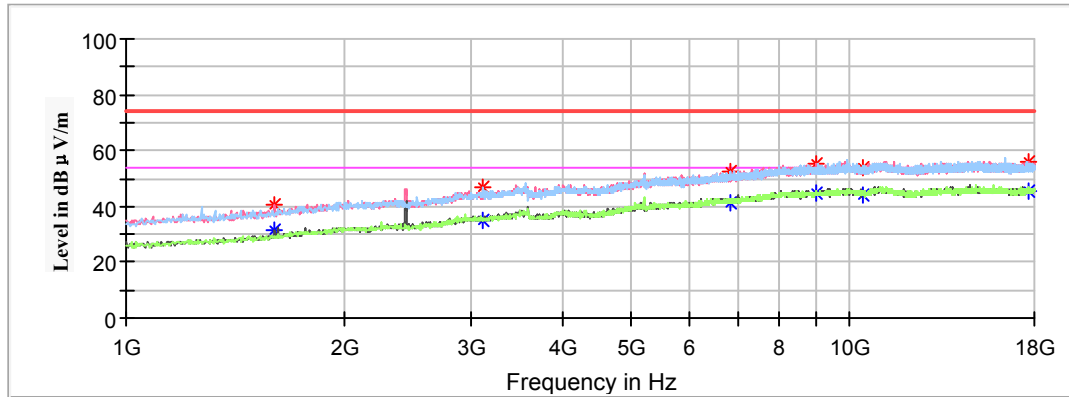

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1605.200000	---	31.77	100.0	V	104.0	-0.5	54.00	22.23
1605.200000	40.78	---	100.0	V	104.0	-0.5	74.00	33.22
3118.200000	---	34.94	150.0	H	261.0	6.3	54.00	19.06
3118.200000	46.73	---	150.0	H	261.0	6.3	74.00	27.27
6831.000000	---	41.48	250.0	H	50.0	14.7	54.00	12.52
6831.000000	52.20	---	250.0	H	50.0	14.7	74.00	21.80
9010.400000	---	44.58	100.0	V	46.0	17.5	54.00	9.42
9010.400000	55.08	---	100.0	V	46.0	17.5	74.00	18.92
10400.000000	---	43.93	200.0	V	238.0	17.8	54.00	10.07
10400.000000	53.57	---	200.0	V	238.0	17.8	74.00	20.43
17643.000000	---	45.63	100.0	V	77.0	18.7	54.00	8.37
17643.000000	56.13	---	100.0	V	77.0	18.7	74.00	17.87

High Channel: 5240MHz

Full Spectrum

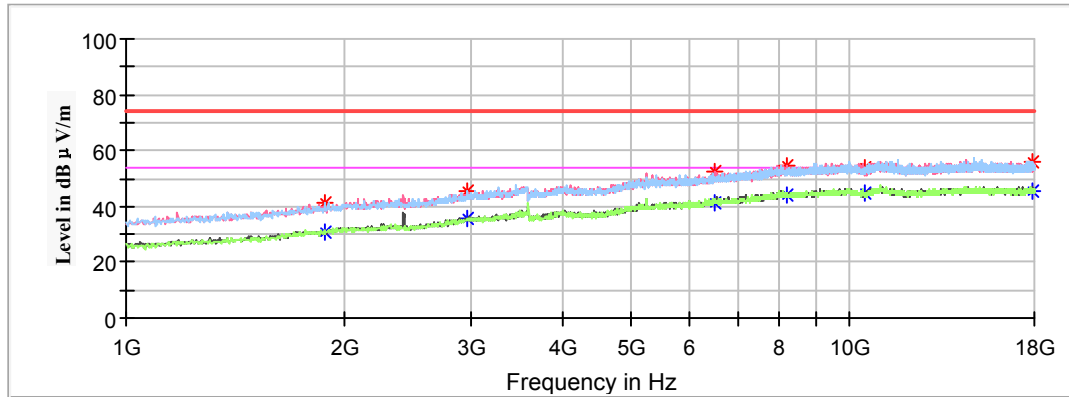

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1880.600000	---	30.92	100.0	H	143.0	1.3	54.00	23.08
1880.600000	41.22	---	100.0	H	143.0	1.3	74.00	32.78
2965.200000	---	35.82	100.0	H	149.0	5.8	54.00	18.18
2965.200000	45.43	---	100.0	H	149.0	5.8	74.00	28.57
6528.400000	---	41.23	200.0	V	255.0	14.4	54.00	12.77
6528.400000	52.72	---	200.0	V	255.0	14.4	74.00	21.28
8177.400000	---	44.12	100.0	V	264.0	17.2	54.00	9.88
8177.400000	54.49	---	100.0	V	264.0	17.2	74.00	19.51
10480.000000	---	44.56	200.0	V	222.0	17.7	54.00	9.44
10480.000000	53.62	---	200.0	V	222.0	17.7	74.00	20.38
17843.600000	---	45.23	100.0	H	94.0	19.0	54.00	8.77
17843.600000	56.14	---	100.0	H	94.0	19.0	74.00	17.86

802.11ac40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.150-5.350GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5190MHz


Full Spectrum

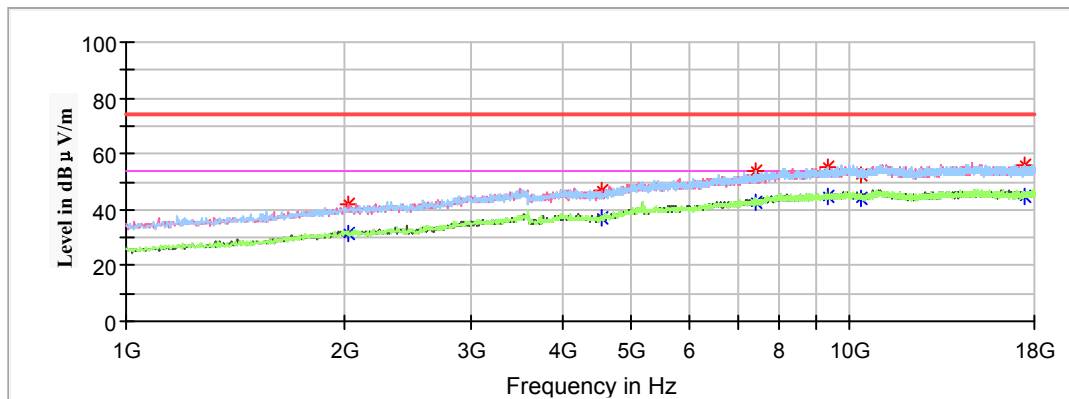

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
2030.200000	---	31.53	100.0	V	129.0	2.1	54.00	22.47
2030.200000	42.00	---	100.0	V	129.0	2.1	74.00	32.00
4542.800000	---	37.25	100.0	V	67.0	9.4	54.00	16.75
4542.800000	46.67	---	100.0	V	67.0	9.4	74.00	27.33
7409.000000	---	42.94	200.0	H	217.0	15.5	54.00	11.06
7409.000000	53.58	---	200.0	H	217.0	15.5	74.00	20.42
9299.400000	---	44.44	100.0	H	182.0	17.7	54.00	9.56
9299.400000	55.16	---	100.0	H	182.0	17.7	74.00	18.84
10380.000000	---	44.26	250.0	V	116.0	17.8	54.00	9.74
10380.000000	52.76	---	250.0	V	116.0	17.8	74.00	21.24
17435.600000	---	44.87	150.0	H	91.0	18.4	54.00	9.13
17435.600000	55.80	---	150.0	H	91.0	18.4	74.00	18.20

High Channel: 5230MHz

Full Spectrum

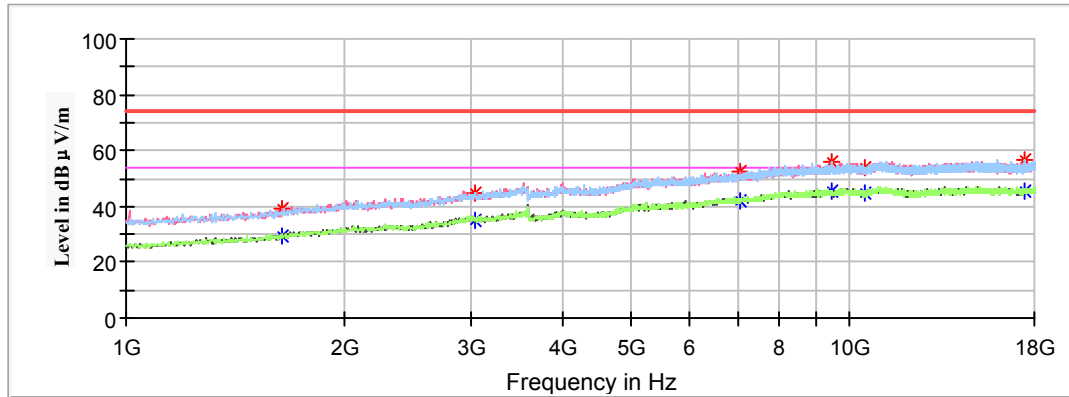

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1646.000000	---	29.04	200.0	V	51.0	-0.2	54.00	24.96
1646.000000	39.36	---	200.0	V	51.0	-0.2	74.00	34.64
3040.000000	---	35.03	100.0	H	169.0	6.1	54.00	18.97
3040.000000	44.96	---	100.0	H	169.0	6.1	74.00	29.04
7055.400000	---	41.79	150.0	V	228.0	15.0	54.00	12.21
7055.400000	52.43	---	150.0	V	228.0	15.0	74.00	21.57
9438.800000	---	45.21	200.0	H	172.0	17.8	54.00	8.79
9438.800000	55.97	---	200.0	H	172.0	17.8	74.00	18.03
10460.000000	---	44.85	100.0	V	279.0	17.7	54.00	9.15
10460.000000	53.83	---	100.0	V	279.0	17.7	74.00	20.17
17469.600000	---	45.43	200.0	H	282.0	18.4	54.00	8.57
17469.600000	56.51	---	200.0	H	282.0	18.4	74.00	17.49

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.150-5.350GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5190MHz


Full Spectrum

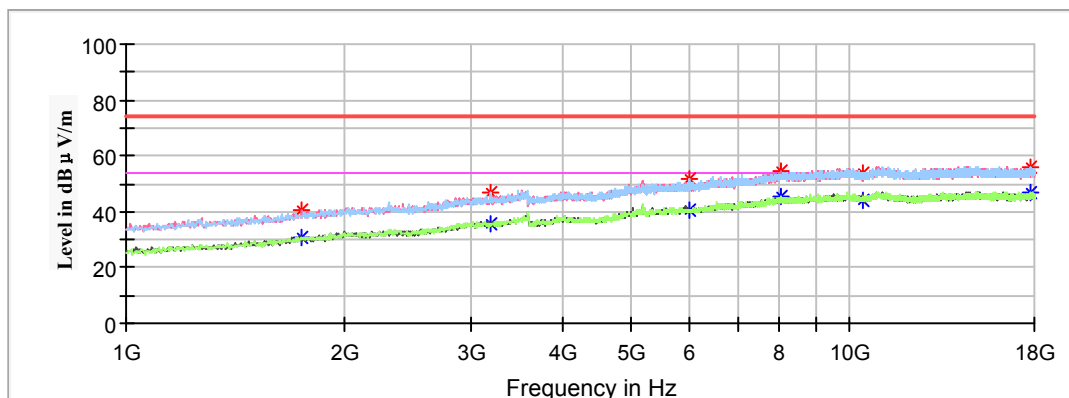

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1751.400000	---	30.43	100.0	V	284.0	0.5	54.00	23.57
1751.400000	40.22	---	100.0	V	284.0	0.5	74.00	33.78
3189.600000	---	35.46	150.0	V	152.0	6.5	54.00	18.54
3189.600000	46.76	---	150.0	H	152.0	6.5	74.00	27.24
5994.600000	---	40.32	250.0	H	47.0	12.9	54.00	13.68
5994.600000	51.65	---	250.0	H	47.0	12.9	74.00	22.35
8014.200000	---	45.44	150.0	V	264.0	17.1	54.00	8.56
8014.200000	54.80	---	150.0	V	264.0	17.1	74.00	19.20
10380.000000	---	44.08	250.0	V	234.0	17.8	54.00	9.92
10380.000000	53.72	---	250.0	V	234.0	17.8	74.00	20.28
17779.000000	---	46.53	100.0	H	125.0	18.9	54.00	7.47
17779.000000	55.63	---	100.0	H	125.0	18.9	74.00	18.37

High Channel: 5230MHz

Full Spectrum

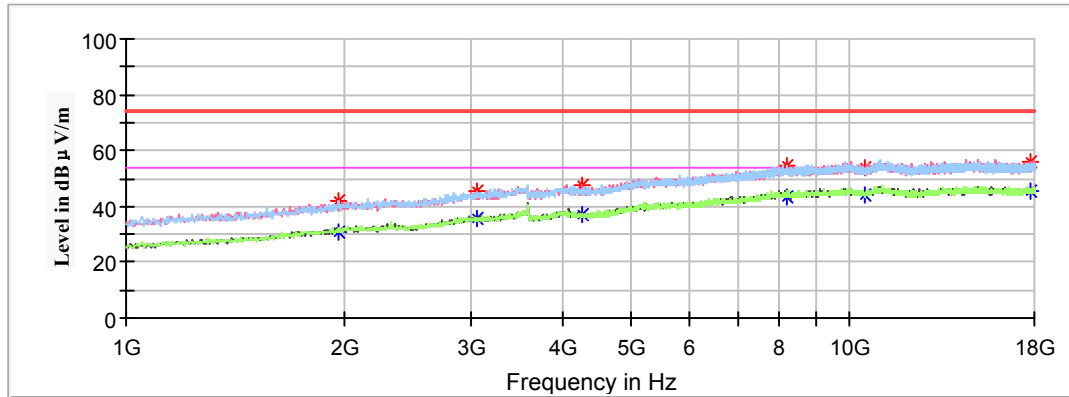

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1965.600000	---	30.79	100.0	H	304.0	1.8	54.00	23.21
1965.600000	41.67	---	100.0	H	304.0	1.8	74.00	32.33
3046.800000	---	35.51	150.0	V	309.0	6.1	54.00	18.49
3046.800000	45.64	---	150.0	V	309.0	6.1	74.00	28.36
4267.400000	---	37.02	200.0	V	188.0	9.2	54.00	16.98
4267.400000	47.65	---	200.0	V	188.0	9.2	74.00	26.35
8187.600000	---	43.56	100.0	H	123.0	17.2	54.00	10.44
8187.600000	54.36	---	100.0	H	123.0	17.2	74.00	19.64
10460.000000	---	44.36	250.0	V	225.0	17.7	54.00	9.64
10460.000000	53.57	---	250.0	V	225.0	17.7	74.00	20.43
17802.800000	---	45.72	100.0	V	268.0	18.9	54.00	8.28
17802.800000	55.90	---	100.0	V	268.0	18.9	74.00	18.10

802.11ac80 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.150-5.350GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 5210MHz


Full Spectrum

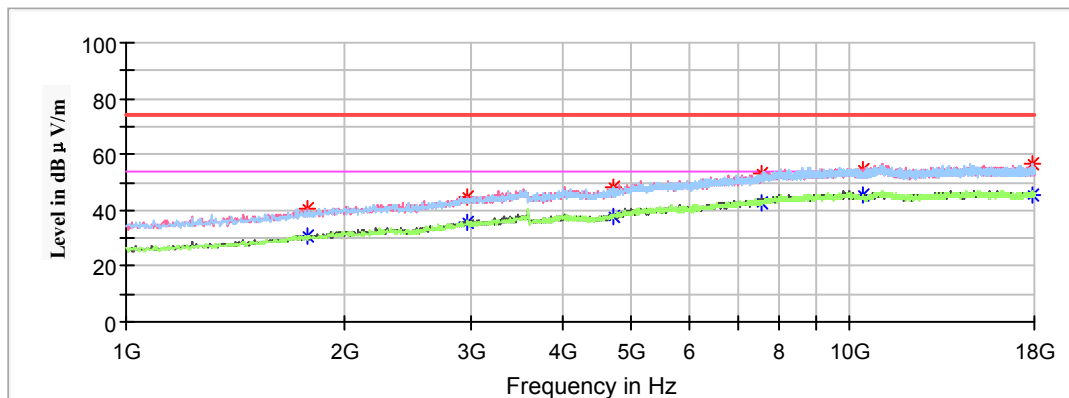


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1782.000000	---	30.46	100.0	V	231.0	0.7	54.00	23.54
1782.000000	40.79	---	100.0	V	231.0	0.7	74.00	33.21
2958.400000	---	35.86	100.0	V	273.0	5.8	54.00	18.14
2958.400000	44.72	---	100.0	V	273.0	5.8	74.00	29.28
4706.000000	---	37.82	250.0	V	243.0	10.2	54.00	16.18
4706.000000	48.32	---	250.0	V	243.0	10.2	74.00	25.68
7541.600000	---	42.83	150.0	V	291.0	15.8	54.00	11.17
7541.600000	53.38	---	150.0	V	291.0	15.8	74.00	20.62
10420.000000	---	45.67	200.0	V	121.0	17.8	54.00	8.33
10420.000000	54.59	---	200.0	V	121.0	17.8	74.00	19.41
17918.400000	---	45.77	100.0	H	89.0	19.1	54.00	8.23
17918.400000	56.35	---	100.0	H	89.0	19.1	74.00	17.65

18GHz-40GHz(5150MHz-5250MHz):**Note:**

1. Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11ac80 modes of operation in the X, Y and Z axes of orientation, the worst case **low channel of 802.11n-HT40 mode(5150MHz-5250MHz) in X-axis of orientation** was recorded.
2. The test distance is 1.5m, the limit for Peak is 74dBuV/m@3m= 80dBuV/m @1.5m, the limit for Average is 54dBuV/m@3m= 60dBuV/m @1.5m

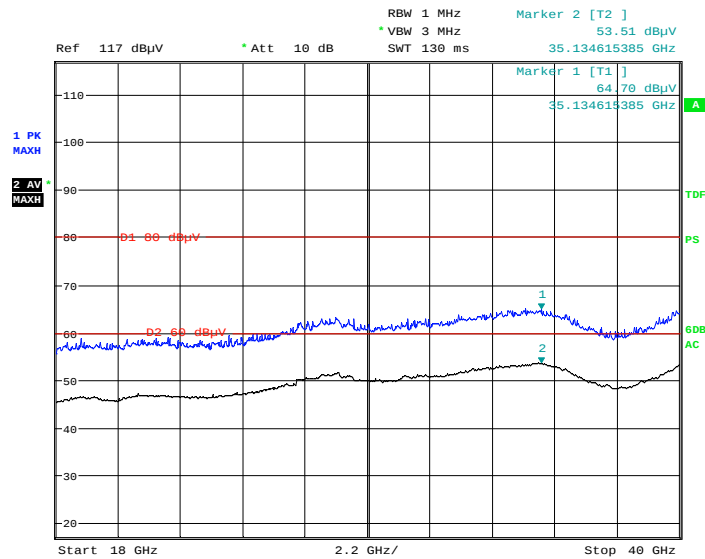Horizontal

Date: 15.AUG.2018 12:03:10

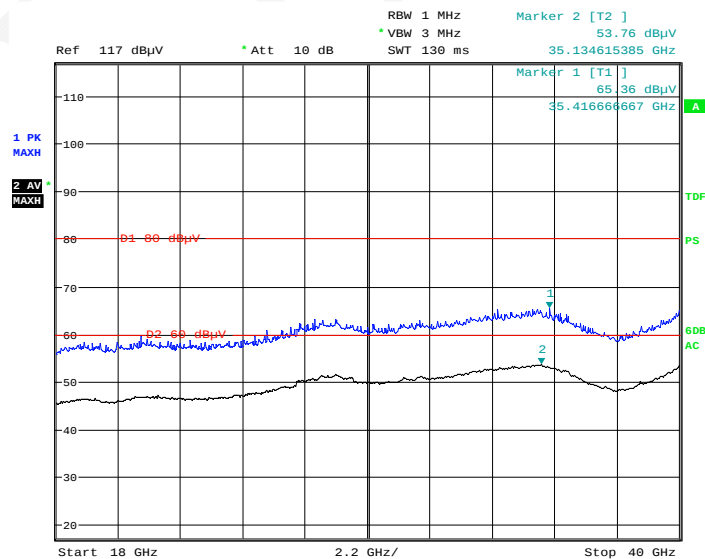Vertical

Date: 15.AUG.2018 11:31:32

Fundamental Test & Restricted Bands Emissions Test (5150MHz-5250MHz):

Note:

2. The test was performed with a 10dB attenuator.

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)**802.11a Mode:** (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5180.000000	96.25	---	200.0	V	57.0	11.9	/	/
5180.000000	---	88.95	200.0	V	57.0	11.9	/	/
5180.000000	94.38	---	150.0	H	202.0	11.9	/	/
5180.000000	---	86.97	150.0	H	202.0	11.9	/	/
5150.000000	---	45.89	150.0	V	182.0	11.9	54.00	8.11
5150.000000	55.25	---	150.0	V	182.0	11.9	74.00	18.75
Middle Channel: 5200MHz								
5200.000000	95.89	---	200.0	V	41.0	11.9	/	/
5200.000000	---	88.63	200.0	V	41.0	11.9	/	/
5200.000000	94.09	---	250.0	H	74.0	11.9	/	/
5200.000000	---	86.78	250.0	H	74.0	11.9	/	/
High Channel: 5240MHz								
5240.000000	96.11	---	150.0	V	169.0	12.0	/	/
5240.000000	---	88.73	150.0	V	169.0	12.0	/	/
5240.000000	94.13	---	150.0	H	248.0	12.0	/	/
5240.000000	---	86.81	150.0	H	248.0	12.0	/	/
5350.000000	50.31	---	100.0	V	30.0	12.2	74.00	23.69
5350.000000	---	40.86	100.0	V	30.0	12.2	54.00	13.14

802.11ac20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5180.000000	96.15	---	150.0	V	72.0	11.9	/	/
5180.000000	---	88.65	150.0	V	72.0	11.9	/	/
5180.000000	94.43	---	150.0	H	73.0	11.9	/	/
5180.000000	---	86.92	150.0	H	73.0	11.9	/	/
5150.000000	---	46.11	100.0	V	332.0	11.9	54.00	7.89
5150.000000	55.26	---	100.0	V	332.0	11.9	74.00	18.74
Middle Channel: 5200MHz								
5200.000000	95.97	---	200.0	V	289.0	11.9	/	/
5200.000000	---	88.53	200.0	V	289.0	11.9	/	/
5200.000000	94.04	---	250.0	H	153.0	11.9	/	/
5200.000000	---	86.72	250.0	H	153.0	11.9	/	/
High Channel: 5240MHz								
5240.000000	96.05	---	150.0	V	43.0	12.0	/	/
5240.000000	---	88.59	150.0	V	43.0	12.0	/	/
5240.000000	94.30	---	150.0	H	327.0	12.0	/	/
5240.000000	---	86.60	150.0	H	327.0	12.0	/	/
5350.000000	50.21	---	100.0	V	148.0	12.2	74.00	23.79
5350.000000	---	40.56	100.0	V	148.0	12.2	54.00	13.44

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5180MHz								
5180.000000	95.77	---	150.0	V	298.0	11.9	/	/
5180.000000	---	87.27	150.0	V	298.0	11.9	/	/
5180.000000	94.05	---	200.0	H	347.0	11.9	/	/
5180.000000	---	85.49	200.0	H	347.0	11.9	/	/
5150.000000	---	46.07	150.0	V	349.0	11.9	54.00	7.93
5150.000000	55.54	---	150.0	V	349.0	11.9	74.00	18.46
Middle Channel: 5200MHz								
5200.000000	96.11	---	200.0	V	198.0	11.9	/	/
5200.000000	---	87.63	200.0	V	198.0	11.9	/	/
5200.000000	94.26	---	250.0	H	158.0	11.9	/	/
5200.000000	---	85.92	250.0	H	158.0	11.9	/	/
High Channel: 5240MHz								
5240.000000	96.23	---	150.0	V	230.0	12.0	/	/
5240.000000	---	87.76	150.0	V	230.0	12.0	/	/
5240.000000	94.29	---	100.0	H	38.0	12.0	/	/
5240.000000	---	85.88	100.0	H	38.0	12.0	/	/
5350.000000	50.11	---	150.0	V	174.0	12.2	74.00	23.89
5350.000000	---	40.24	150.0	V	174	12.2	54.00	13.76

802.11ac40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5190.000000	---	84.67	150.0	V	138.0	12.0	/	/
5190.000000	92.67	---	150.0	V	138.0	12.0	/	/
5190.000000	---	82.81	200.0	H	190.0	12.0	/	/
5190.000000	90.67	---	200.0	H	190.0	12.0	/	/
5150.000000	---	45.91	150.0	V	94.0	11.9	54.00	8.09
5150.000000	55.14	---	150.0	V	94.0	11.9	74.00	18.86
High Channel: 5230MHz								
5230.000000	92.87	---	150.0	V	316.0	12.0	/	/
5230.000000	---	84.88	150.0	V	316.0	12.0	/	/
5230.000000	90.95	---	250.0	H	82.0	12.0	/	/
5230.000000	---	83.05	250.0	H	82.0	12.0	/	/
5350.000000	---	40.34	150.0	V	285.0	12.2	54.00	13.66
5350.000000	50.17	---	150.0	V	285	12.2	74.00	23.83

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5190MHz								
5190.000000	92.56	---	150.0	V	223.0	12.0	/	/
5190.000000	---	83.59	150.0	V	223.0	12.0	/	/
5190.000000	90.86	---	100.0	H	25.0	12.0	/	/
5190.000000	---	81.80	100.0	H	25.0	12.0	/	/
5150.000000	---	45.76	150.0	V	90.0	11.9	54.00	8.24
5150.000000	54.89	---	150.0	V	90.0	11.9	74.00	19.11
High Channel: 5230MHz								
5230.000000	92.38	---	150.0	V	81.0	12.0	/	/
5230.000000	---	83.41	150.0	V	81.0	12.0	/	/
5230.000000	90.46	---	250.0	H	239.0	12.0	/	/
5230.000000	---	81.42	250.0	H	239.0	12.0	/	/
5350.000000	50.15	---	100.0	V	228.0	12.2	74.00	23.85
5350.000000	---	40.31	100.0	V	228	12.2	54.00	13.69

802.11ac80 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Channel 5210MHz								
5150.000000	---	45.53	250.0	V	140.0	11.9	54.00	8.47
5150.000000	55.01	---	250.0	V	140.0	11.9	74.00	18.99
5210.000000	---	81.37	100.0	V	138.0	12.0	/	/
5210.000000	89.89	---	100.0	V	138.0	12.0	/	/
5210.000000	---	79.59	150.0	H	354.0	12.0	/	/
5210.000000	87.91	---	150.0	H	354.0	12.0	/	/
5350.000000	---	44.51	100.0	V	57.0	12.2	54.00	9.49
5350.000000	54.13	---	100.0	V	57.0	12.2	74.00	19.87

1GHz-18GHz(5725MHz-5850MHz):**802.11a Mode:**


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.725-5.875GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

Low Channel: 5745MHz


Full Spectrum

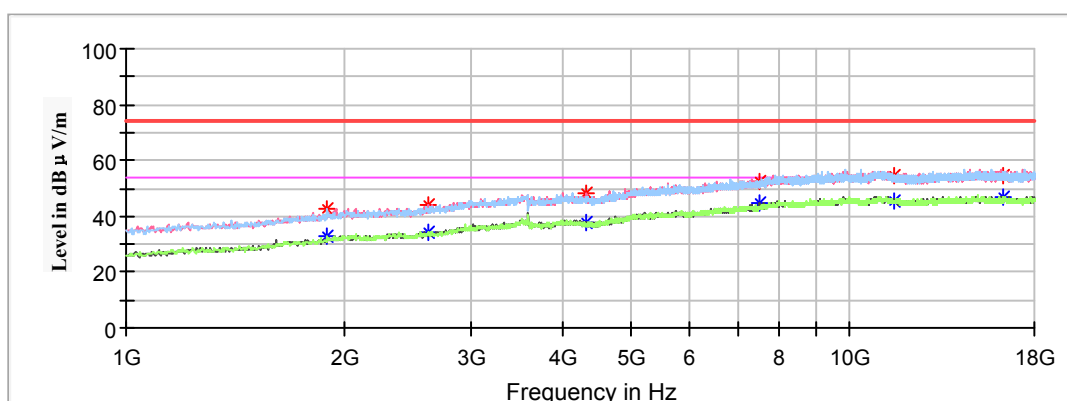

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1897.600000	42.90	---	100.0	H	55.0	1.4	74.00	31.10
1897.600000	---	32.73	100.0	H	55.0	1.4	54.00	21.27
2618.400000	43.77	---	100.0	V	150.0	3.8	74.00	30.23
2618.400000	---	34.18	100.0	V	150.0	3.8	54.00	19.82
4335.400000	48.45	---	200.0	V	77.0	9.2	74.00	25.55
4335.400000	---	37.98	200.0	V	77.0	9.2	54.00	16.02
7517.800000	52.34	---	150.0	V	162.0	15.7	74.00	21.66
7517.800000	---	44.47	150.0	V	162.0	15.7	54.00	9.53
11490.000000	54.67	---	250.0	V	72.0	18.3	74.00	19.33
11490.000000	---	45.54	250.0	V	72.0	18.3	54.00	8.46
16344.200000	---	46.92	100.0	H	80.0	18.2	54.00	7.08
16347.600000	54.65	---	100.0	H	80.0	18.2	74.00	19.35

Middle Channel: 5785MHz


Full Spectrum

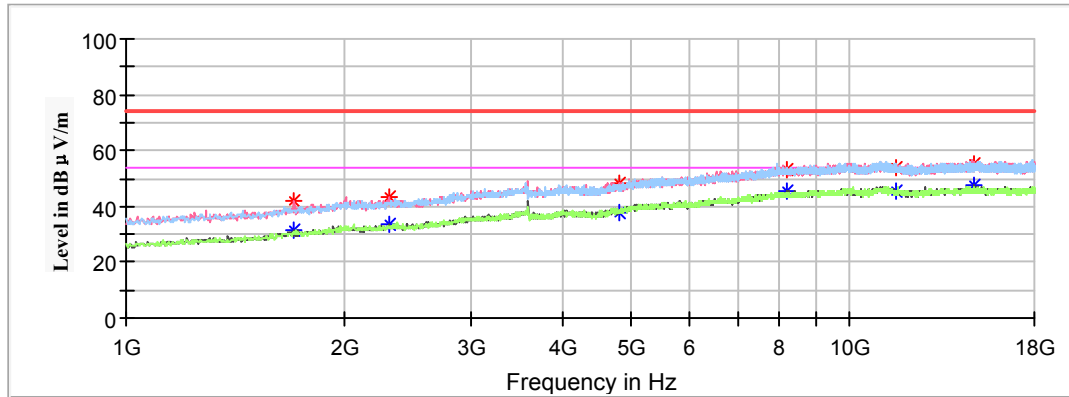

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1707.200000	41.95	---	150.0	V	51.0	0.2	74.00	32.05
1707.200000	---	31.19	150.0	V	51.0	0.2	54.00	22.81
2305.600000	43.49	---	100.0	V	347.0	2.7	74.00	30.51
2305.600000	---	33.29	100.0	V	347.0	2.7	54.00	20.71
4804.600000	---	37.69	250.0	V	286.0	10.7	54.00	16.31
4804.600000	47.97	---	250.0	V	286.0	10.7	74.00	26.03
8191.000000	53.13	---	100.0	V	291.0	17.2	74.00	20.87
8191.000000	---	45.54	100.0	V	291.0	17.2	54.00	8.46
11570.000000	---	45.36	200.0	V	252.0	18.2	54.00	8.64
11570.000000	53.67	---	200.0	V	252.0	18.2	74.00	20.33
14878.800000	55.00	---	100.0	V	315.0	18.9	74.00	19.00
14878.800000	---	47.27	100.0	V	315.0	18.9	54.00	6.73

High Channel: 5825MHz

Full Spectrum

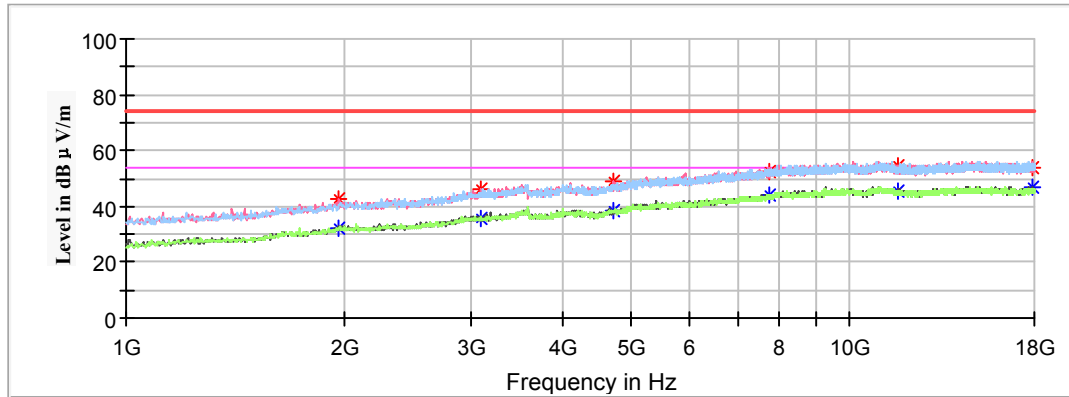

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1969.000000	---	32.19	100.0	V	195.0	1.8	54.00	21.81
1969.000000	42.41	---	100.0	V	195.0	1.8	74.00	31.59
3087.600000	46.22	---	100.0	V	212.0	6.2	74.00	27.78
3087.600000	---	35.63	100.0	V	212.0	6.2	54.00	18.37
4712.800000	48.73	---	250.0	V	36.0	10.3	74.00	25.27
4712.800000	---	38.33	250.0	V	36.0	10.3	54.00	15.67
7721.800000	52.76	---	100.0	V	268.0	16.3	74.00	21.24
7721.800000	---	44.18	100.0	V	268.0	16.3	54.00	9.82
11650.000000	54.56	---	250.0	V	357.0	18.1	74.00	19.44
11650.000000	---	45.79	250.0	V	357.0	18.1	54.00	8.21
17921.800000	53.76	---	100.0	V	131.0	19.1	74.00	20.24
17921.800000	---	46.87	100.0	V	131.0	19.1	54.00	7.13

802.11ac20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.725-5.875GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5745MHz


Full Spectrum

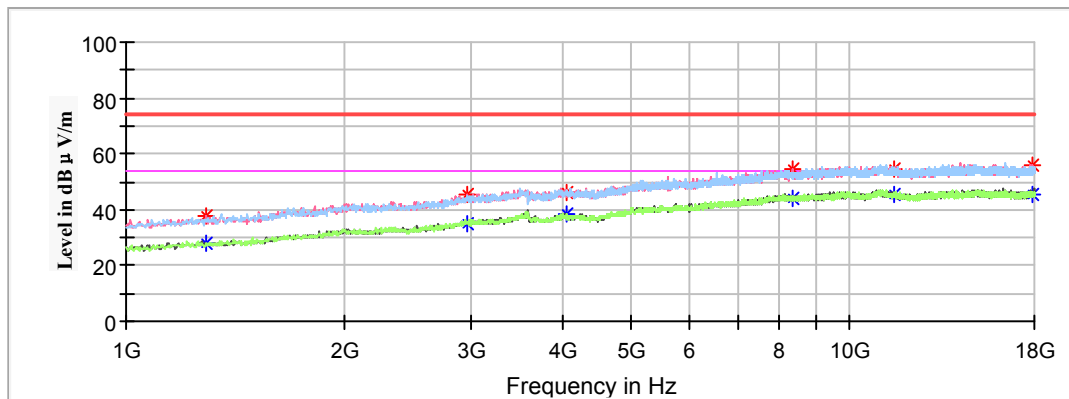

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1289.000000	37.53	---	100.0	V	91.0	-2.5	74.00	36.47
1289.000000	---	28.04	100.0	V	91.0	-2.5	54.00	25.96
2955.000000	---	35.16	100.0	V	169.0	5.8	54.00	18.84
2955.000000	45.32	---	100.0	V	169.0	5.8	74.00	28.68
4070.200000	46.33	---	250.0	V	102.0	9.2	74.00	27.67
4070.200000	---	38.41	250.0	V	102.0	9.2	54.00	15.59
8340.600000	---	44.29	100.0	V	86.0	17.2	54.00	9.71
8340.600000	54.50	---	100.0	V	86.0	17.2	74.00	19.50
11490.000000	54.86	---	200.0	V	30.0	18.3	74.00	19.14
11490.000000	---	45.47	200.0	V	30.0	18.3	54.00	8.53
17894.600000	---	45.62	150.0	V	282.0	19.0	54.00	8.38
17894.600000	55.73	---	150.0	V	282.0	19.0	74.00	18.27

Middle Channel: 5785MHz


Full Spectrum

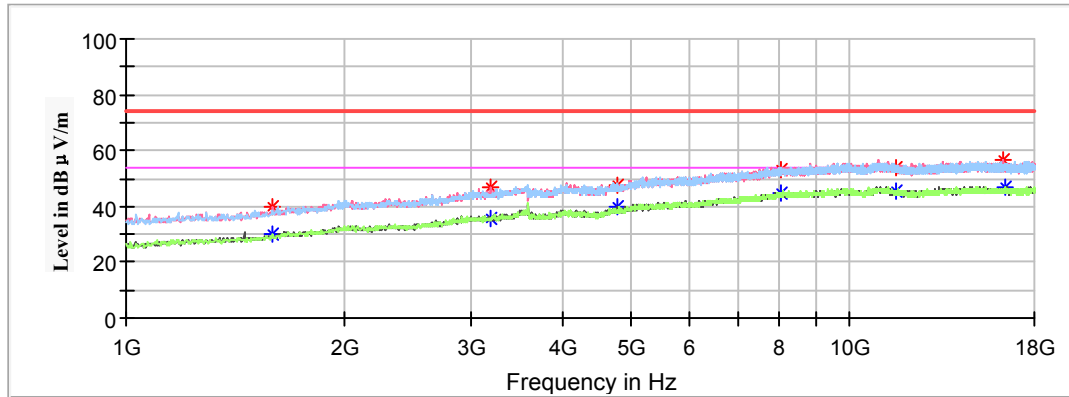

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.000000	40.12	---	200.0	H	110.0	-0.6	74.00	33.88
1595.000000	---	30.18	200.0	H	110.0	-0.6	54.00	23.82
3196.400000	---	35.71	100.0	V	14.0	6.5	54.00	18.29
3196.400000	47.11	---	100.0	V	14.0	6.5	74.00	26.89
4774.000000	47.41	---	150.0	H	17.0	10.6	74.00	26.59
4774.000000	---	39.78	150.0	H	17.0	10.6	54.00	14.22
8031.200000	52.93	---	250.0	V	212.0	17.1	74.00	21.07
8031.200000	---	44.88	250.0	V	212.0	17.1	54.00	9.12
11570.000000	53.75	---	100.0	V	319.0	18.2	74.00	20.25
11570.000000	---	45.24	100.0	V	319.0	18.2	54.00	8.76
16334.000000	56.72	---	250.0	H	6.0	18.2	74.00	17.28
16371.400000	---	47.10	250.0	H	6.0	18.1	54.00	6.90

High Channel: 5825MHz

Full Spectrum

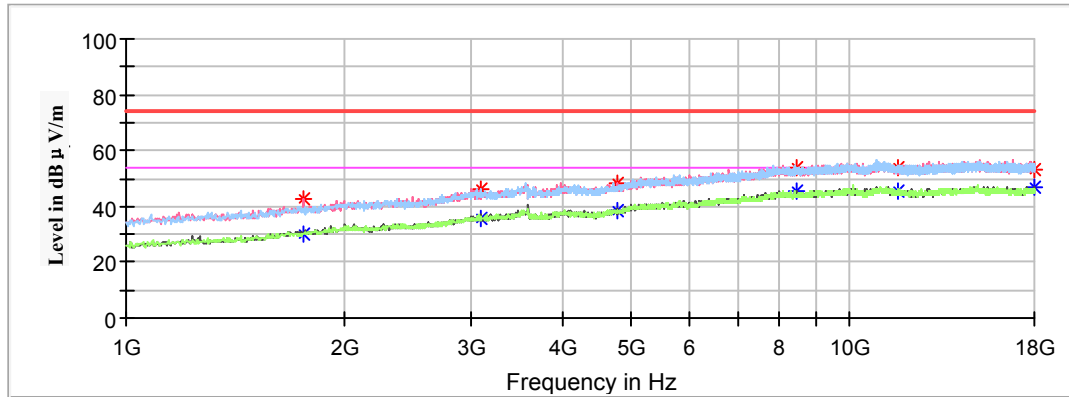

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1758.200000	42.43	---	100.0	V	28.0	0.5	74.00	31.57
1758.200000	---	30.38	100.0	V	28.0	0.5	54.00	23.62
3097.800000	46.35	---	100.0	H	36.0	6.3	74.00	27.65
3097.800000	---	35.72	100.0	H	36.0	6.3	54.00	18.28
4763.800000	48.46	---	200.0	H	234.0	10.5	74.00	25.54
4763.800000	---	38.32	200.0	H	234.0	10.5	54.00	15.68
8435.800000	53.96	---	100.0	V	20.0	17.2	74.00	20.04
8435.800000	---	45.70	100.0	V	20.0	17.2	54.00	8.30
11650.000000	54.01	---	250.0	V	178.0	18.1	74.00	19.99
11650.000000	---	45.70	250.0	V	178.0	18.1	54.00	8.30
17979.600000	53.48	---	150.0	V	9.0	19.2	74.00	20.52
17979.600000	---	46.71	150.0	V	9.0	19.2	54.00	7.29

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.725-5.875GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5745MHz


Full Spectrum

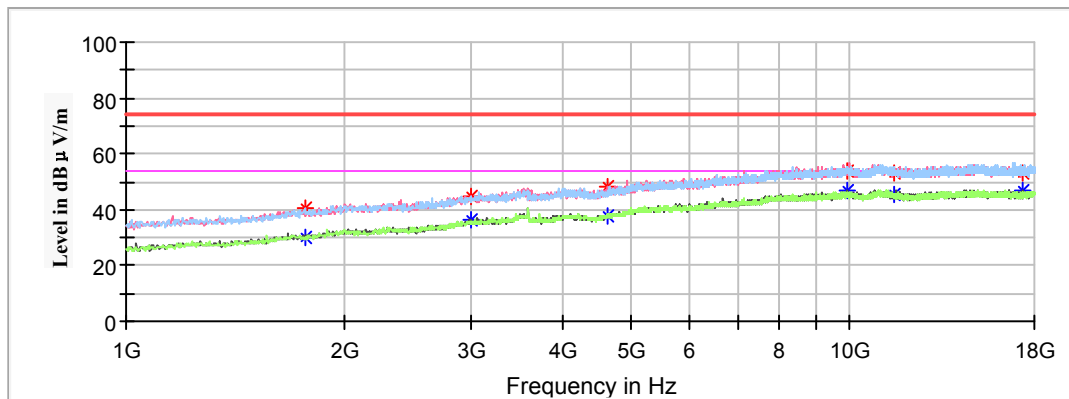

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1765.000000	---	29.89	100.0	H	310.0	0.6	54.00	24.11
1765.000000	40.70	---	100.0	H	310.0	0.6	74.00	33.30
2999.200000	44.95	---	150.0	V	300.0	6.0	74.00	29.05
2999.200000	---	36.11	150.0	V	300.0	6.0	54.00	17.89
4617.600000	---	37.49	200.0	V	323.0	9.8	54.00	16.51
4617.600000	48.37	---	200.0	V	323.0	9.8	74.00	25.63
9938.600000	53.92	---	100.0	V	176.0	18.2	74.00	20.08
9938.600000	---	46.59	100.0	V	176.0	18.2	54.00	7.41
11490.000000	53.28	---	200.0	V	159.0	18.4	74.00	20.72
11490.000000	---	45.42	200.0	V	159.0	18.4	54.00	8.58
17323.400000	53.15	---	100.0	V	137.0	18.3	74.00	20.85
17323.400000	---	46.85	100.0	V	137.0	18.3	54.00	7.15

Middle Channel: 5785MHz


Full Spectrum

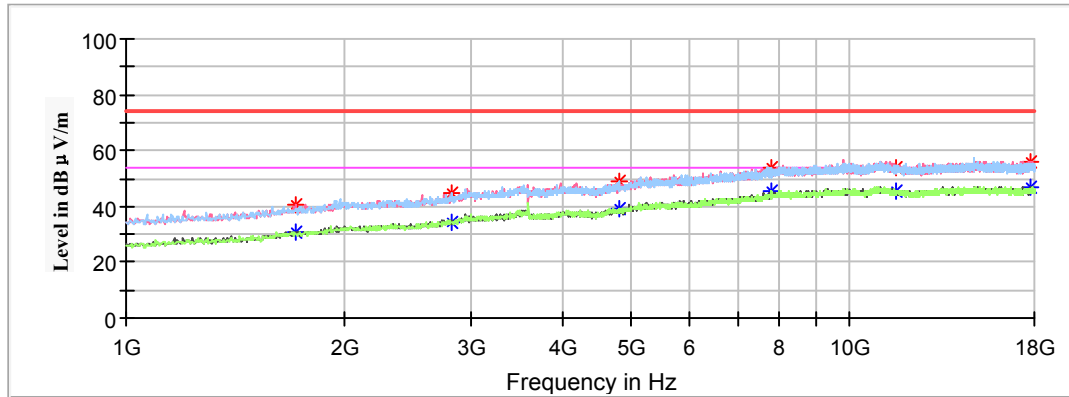

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1714.000000	---	30.67	100.0	V	321.0	0.2	54.00	23.33
1714.000000	40.29	---	100.0	V	321.0	0.2	74.00	33.71
2815.600000	44.77	---	150.0	H	57.0	5.0	74.00	29.23
2815.600000	---	34.22	150.0	H	57.0	5.0	54.00	19.78
4801.200000	---	39.02	200.0	V	289.0	10.7	54.00	14.98
4801.200000	48.95	---	200.0	V	289.0	10.7	74.00	25.05
7783.000000	---	45.29	100.0	H	67.0	16.5	54.00	8.71
7783.000000	53.85	---	100.0	H	67.0	16.5	74.00	20.15
11570.000000	53.92	---	200.0	V	354.0	18.2	74.00	20.08
11570.000000	---	45.18	200.0	V	354.0	18.2	54.00	8.82
17785.800000	55.99	---	100.0	V	347.0	18.9	74.00	18.01
17785.800000	---	46.72	100.0	V	347.0	18.9	54.00	7.28

High Channel: 5825MHz

Full Spectrum

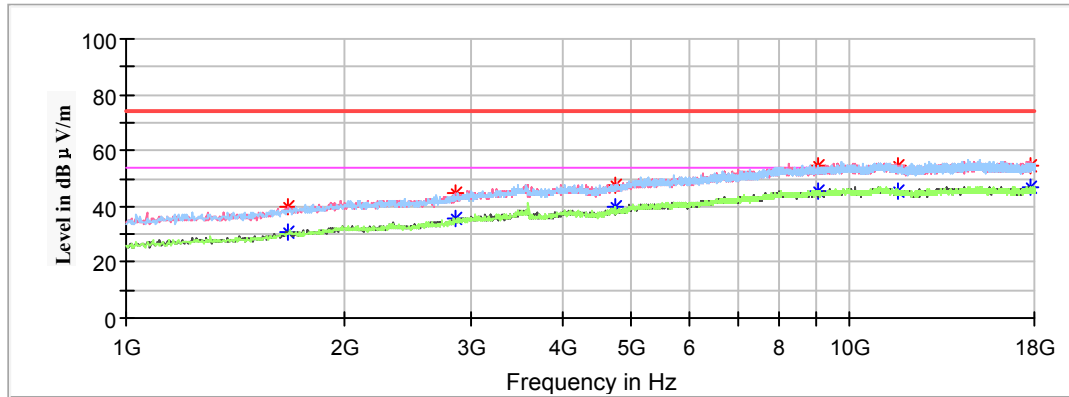

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1676.600000	39.95	---	100.0	V	263.0	0.0	74.00	34.05
1676.600000	---	30.78	100.0	V	263.0	0.0	54.00	23.22
2846.200000	44.61	---	100.0	V	27.0	5.2	74.00	29.39
2846.200000	---	36.01	100.0	V	27.0	5.2	54.00	17.99
4743.400000	---	39.83	250.0	H	244.0	10.4	54.00	14.17
4746.800000	47.46	---	250.0	H	244.0	10.4	74.00	26.54
9037.600000	54.80	---	100.0	H	114.0	17.5	74.00	19.20
9037.600000	---	45.55	100.0	H	114.0	17.5	54.00	8.45
11650.000000	54.68	---	250.0	V	31.0	18.1	74.00	19.32
11650.000000	---	45.80	250.0	V	31.0	18.1	54.00	8.20
17765.400000	54.46	---	100.0	V	12.0	18.9	74.00	19.54
17765.400000	---	46.99	100.0	V	12.0	18.9	54.00	7.01

802.11ac40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.725-5.875GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5755MHz


Full Spectrum

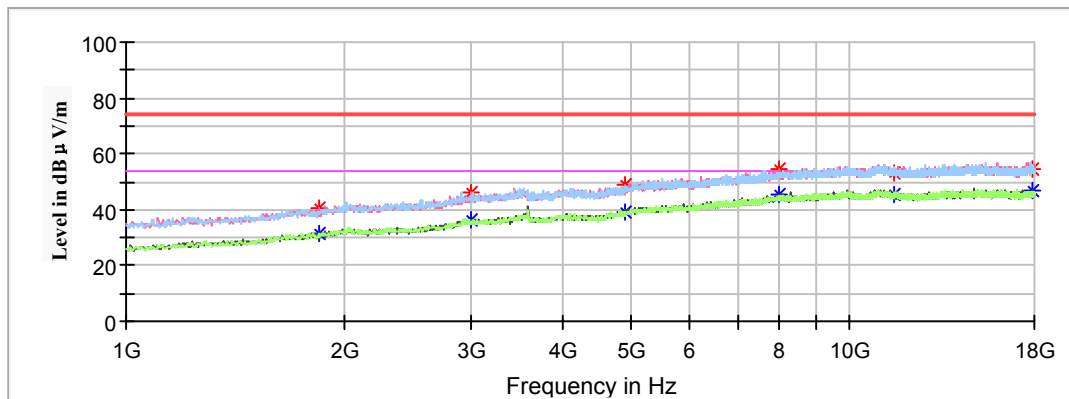

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1850.000000	40.44	---	100.0	V	68.0	1.1	74.00	33.56
1850.000000	---	31.26	100.0	V	68.0	1.1	54.00	22.74
2995.800000	---	36.23	100.0	V	246.0	6.0	54.00	17.77
2999.200000	46.49	---	100.0	V	246.0	6.0	74.00	27.51
4906.600000	49.27	---	200.0	H	148.0	11.2	74.00	24.73
4906.600000	---	39.29	200.0	H	148.0	11.2	54.00	14.71
8010.800000	54.87	---	150.0	V	160.0	17.1	74.00	19.13
8010.800000	---	45.40	150.0	V	160.0	17.1	54.00	8.60
11510.000000	53.49	---	250.0	V	209.0	18.3	74.00	20.51
11510.000000	---	45.51	250.0	V	209.0	18.3	54.00	8.49
17918.400000	54.20	---	150.0	V	39.0	19.1	74.00	19.80
17918.400000	---	47.07	150.0	V	39.0	19.1	54.00	6.93

High Channel: 5795MHz

Full Spectrum

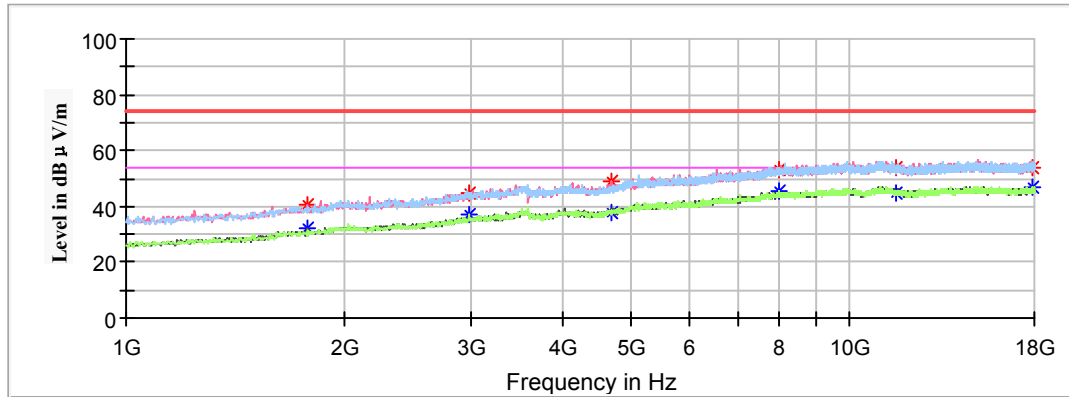

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1775.200000	40.48	---	150.0	V	125.0	0.6	74.00	33.52
1775.200000	---	31.97	150.0	V	125.0	0.6	54.00	22.03
2975.400000	---	36.80	100.0	H	242.0	5.9	54.00	17.20
2978.800000	45.03	---	100.0	H	242.0	5.9	74.00	28.97
4682.200000	---	37.77	250.0	V	245.0	10.1	54.00	16.23
4682.200000	49.28	---	250.0	V	245.0	10.1	74.00	24.72
7993.800000	53.42	---	150.0	H	274.0	17.1	74.00	20.58
7993.800000	---	45.24	150.0	H	274.0	17.1	54.00	8.76
11590.000000	---	44.83	200.0	V	200.0	18.2	54.00	9.17
11590.000000	54.16	---	200.0	V	200.0	18.2	74.00	19.84
17840.200000	53.84	---	100.0	H	182.0	19.0	74.00	20.16
17840.200000	---	46.96	100.0	H	182.0	19.0	54.00	7.04

802.11n-HT40 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.725-5.875GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Low Channel: 5755MHz


Full Spectrum

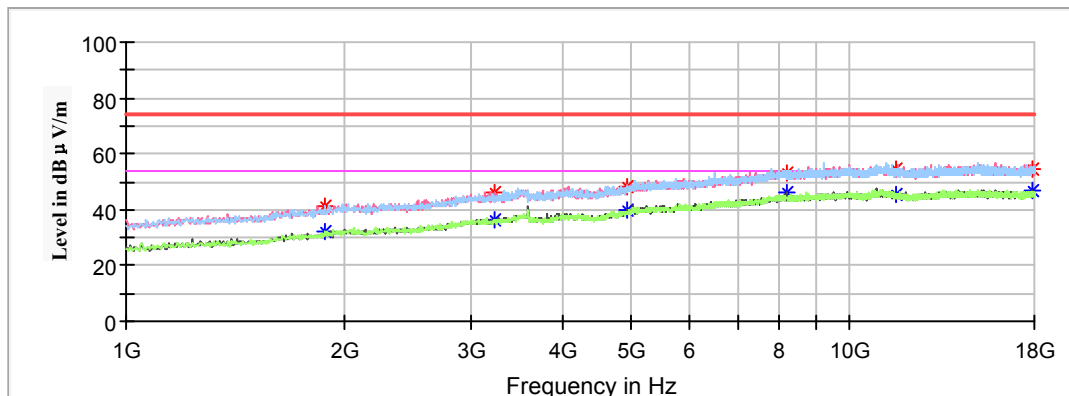

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1880.600000	41.39	---	100.0	H	270.0	1.3	74.00	32.61
1880.600000	---	31.91	100.0	H	270.0	1.3	54.00	22.09
3230.400000	---	36.33	100.0	V	304.0	6.6	54.00	17.67
3230.400000	46.11	---	100.0	V	304.0	6.6	74.00	27.89
4913.400000	47.94	---	200.0	V	354.0	11.3	74.00	26.06
4913.400000	---	40.08	200.0	V	354.0	11.3	54.00	13.92
8197.800000	53.39	---	100.0	V	168.0	17.2	74.00	20.61
8197.800000	---	45.83	100.0	V	168.0	17.2	54.00	8.17
11510.000000	54.50	---	200.0	V	140.0	18.3	74.00	19.50
11510.000000	---	45.16	200.0	V	140.0	18.3	54.00	8.84
17847.000000	54.39	---	100.0	V	195.0	19.0	74.00	19.61
17847.000000	---	46.65	100.0	V	195.0	19.0	54.00	7.35

High Channel: 5795MHz

Full Spectrum

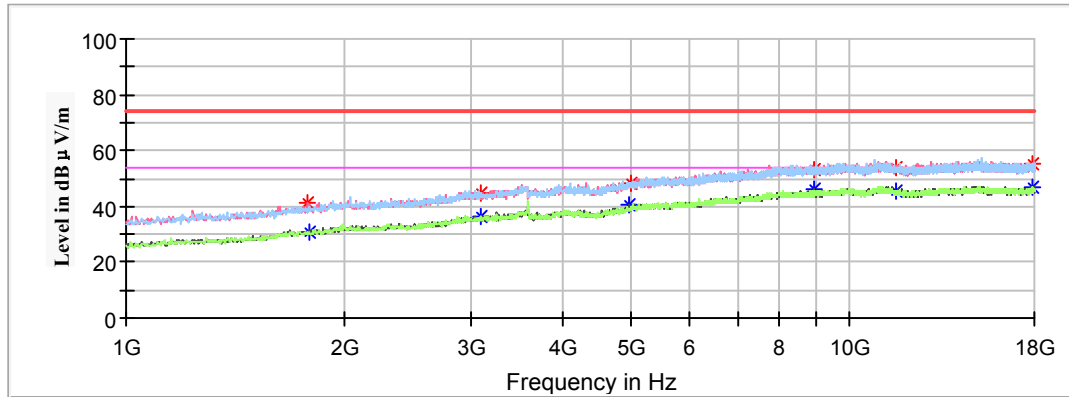

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1785.400000	41.04	---	200.0	V	202.0	0.7	74.00	32.96
1788.800000	---	30.99	200.0	V	202.0	0.7	54.00	23.01
3084.200000	44.90	---	150.0	H	195.0	6.2	74.00	29.10
3084.200000	---	36.45	150.0	H	195.0	6.2	54.00	17.55
4967.800000	---	40.30	150.0	V	188.0	11.5	54.00	13.70
4971.200000	48.45	---	150.0	V	188.0	11.5	74.00	25.55
8942.400000	53.00	---	250.0	V	109.0	17.5	74.00	21.00
8942.400000	---	45.84	250.0	V	109.0	17.5	54.00	8.16
11590.000000	54.05	---	100.0	V	161.0	18.2	74.00	19.95
11590.000000	---	45.61	100.0	V	161.0	18.2	54.00	8.39
17840.200000	54.93	---	200.0	V	244.0	19.0	74.00	19.07
17840.200000	---	46.88	200.0	V	244.0	19.0	54.00	7.12

802.11ac80 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **X-axis of orientation** was recorded)

Note:

1. This test was performed with the 5.725-5.875GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V /m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Channel 5775MHz


Full Spectrum

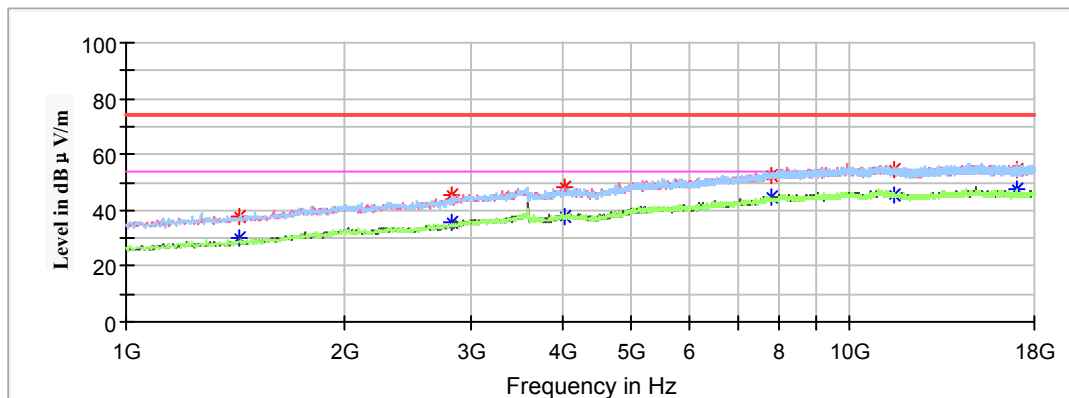


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1431.800000	37.91	---	200.0	V	308.0	-1.6	74.00	36.09
1431.800000	---	29.94	200.0	V	308.0	-1.6	54.00	24.06
2825.800000	---	35.83	150.0	H	153.0	5.0	54.00	18.17
2825.800000	45.39	---	150.0	H	153.0	5.0	74.00	28.61
4039.600000	---	37.55	100.0	V	53.0	9.2	54.00	16.45
4039.600000	48.04	---	100.0	V	53.0	9.2	74.00	25.96
7786.400000	---	44.65	250.0	V	51.0	16.5	54.00	9.35
7789.800000	52.79	---	250.0	V	51.0	16.5	74.00	21.21
11550.000000	54.34	---	150.0	V	54.0	18.3	74.00	19.66
11550.000000	---	45.47	150.0	V	54.0	18.3	54.00	8.53
16973.200000	54.25	---	200.0	H	278.0	18.1	74.00	19.75
16973.200000	---	47.23	200.0	H	278.0	18.1	54.00	6.77

18GHz-40GHz(5725MHz-5850MHz):**Note:**

1. Pre-scan with 802.11a, 802.11ac20, 802.11n-HT20, 802.11ac40, 802.11n-HT40 and 802.11ac80 modes of operation in the X, Y and Z axes of orientation, the worst case **high channel of 802.11a mode(5725MHz-5850MHz) in X-axis of orientation** was recorded.
2. The test distance is 1.5m, the limit for Peak is 74dBuV/m@3m= 80dBuV/m @1.5m, the limit for Average is 54dBuV/m@3m= 60dBuV/m @1.5m

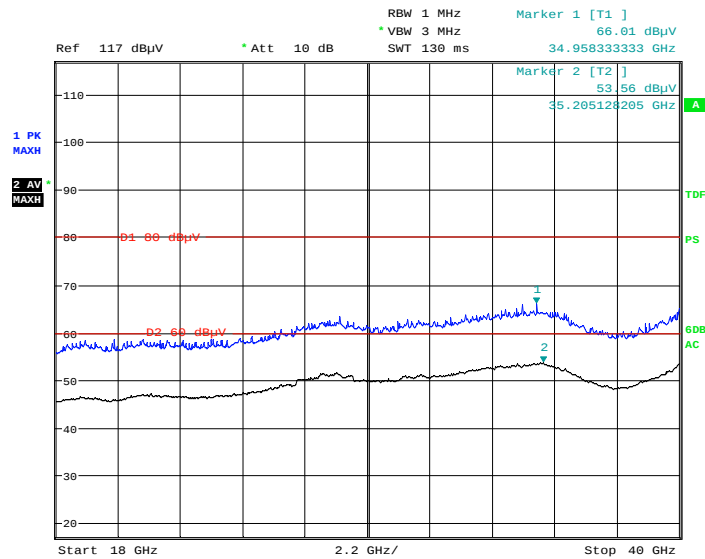Horizontal

Date: 15.AUG.2018 12:26:13

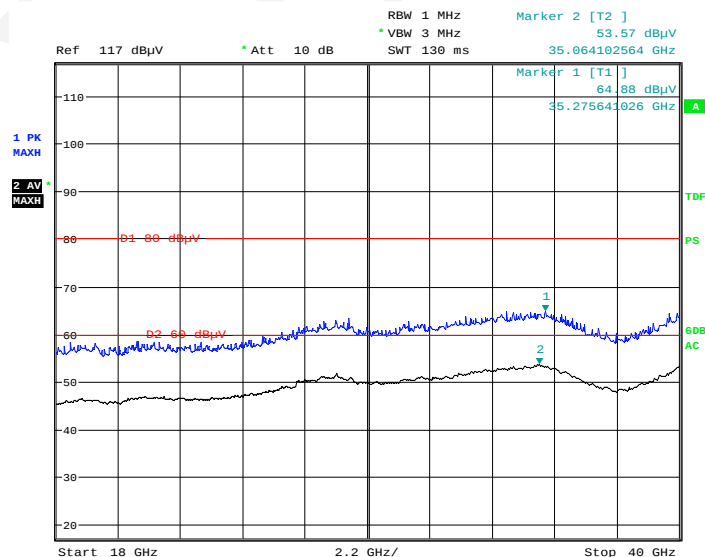Vertical

Date: 15.AUG.2018 12:47:54

Fundamental Test & Restricted Bands Emissions Test (5725MHz-5850MHz):

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dBμV /m) = Corrected Factor (dB/m) + Reading (dBμV)

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV /m)

802.11a Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5745.000000	---	89.25	100.0	V	77.0	12.7	/	/
5745.000000	96.53	---	100.0	V	77.0	12.7	/	/
5745.000000	---	87.44	150.0	H	188.0	12.7	/	/
5745.000000	94.74	---	150.0	H	188.0	12.7	/	/
5650.000000	54.61	---	100.0	V	42.0	12.7	68.20	13.59
5700.000000	54.93	---	250.0	V	44.0	12.7	105.20	50.27
5720.000000	54.82	---	150.0	V	251.0	12.7	110.80	55.98
5725.000000	55.14	---	250.0	V	244.0	12.7	122.20	67.06
Middle Channel: 5785MHz								
5785.000000	96.05	---	100.0	V	7.0	12.7	/	/
5785.000000	---	88.72	100.0	V	7.0	12.7	/	/
5785.000000	94.27	---	250.0	H	189.0	12.7	/	/
5785.000000	---	86.87	250.0	H	189.0	12.7	/	/
High Channel: 5825MHz								
5825.000000	92.89	---	100.0	V	94.0	12.8	/	/
5825.000000	---	88.53	100.0	V	94.0	12.8	/	/
5825.000000	91.15	---	150.0	H	137.0	12.8	/	/
5825.000000	---	86.65	150.0	H	137.0	12.8	/	/
5850.000000	51.89	---	250.0	V	164.0	12.8	122.20	70.31
5855.000000	52.21	---	150.0	V	315.0	12.8	110.80	58.59
5875.000000	52.18	---	100.0	V	316.0	12.8	105.20	53.02
5925.000000	51.99	---	250.0	V	220.0	12.8	68.20	16.21

802.11ac20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5745.000000	---	88.46	200.0	V	96.0	12.7	/	/
5745.000000	95.95	---	200.0	V	96.0	12.7	/	/
5745.000000	---	86.56	150.0	H	305.0	12.7	/	/
5745.000000	94.16	---	150.0	H	305.0	12.7	/	/
5650.000000	56.61	---	250.0	V	156.0	12.7	68.20	11.59
5700.000000	56.72	---	200.0	V	71.0	12.7	105.20	48.48
5720.000000	57.32	---	250.0	V	291.0	12.7	110.80	53.48
5725.000000	57.02	---	200.0	V	20.0	12.7	122.20	65.18
Middle Channel: 5785MHz								
5785.000000	96.11	---	250.0	V	25.0	12.7	/	/
5785.000000	---	88.73	250.0	V	25.0	12.7	/	/
5785.000000	94.26	---	200.0	H	7.0	12.7	/	/
5785.000000	---	86.92	200.0	H	7.0	12.7	/	/
High Channel: 5825MHz								
5825.000000	95.76	---	150.0	V	337.0	12.8	/	/
5825.000000	---	88.29	150.0	V	337.0	12.8	/	/
5825.000000	93.97	---	100.0	H	307.0	12.8	/	/
5825.000000	---	86.50	100.0	H	307.0	12.8	/	/
5850.000000	52.11	---	250.0	V	325.0	12.8	122.20	70.09
5855.000000	51.93	---	200.0	V	270.0	12.8	110.80	58.87
5875.000000	51.71	---	200.0	V	278.0	12.8	105.20	53.49
5925.000000	52.11	---	250.0	V	68.0	12.8	68.20	16.09

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5745MHz								
5745.000000	---	87.38	100.0	V	332.0	12.7	/	/
5745.000000	95.89	---	100.0	V	332.0	12.7	/	/
5745.000000	---	85.40	150.0	H	239.0	12.7	/	/
5745.000000	94.13	---	150.0	H	239.0	12.7	/	/
5650.000000	55.41	---	250.0	V	168.0	12.7	68.20	12.79
5700.000000	55.50	---	200.0	V	6.0	12.7	105.20	49.70
5720.000000	56.01	---	150.0	V	166.0	12.7	110.80	54.79
5725.000000	55.11	---	250.0	V	343.0	12.7	122.20	67.09
Middle Channel: 5785MHz								
5785.000000	96.31	---	200.0	V	4.0	12.7	/	/
5785.000000	---	87.86	200.0	V	4.0	12.7	/	/
5785.000000	94.40	---	250.0	H	171.0	12.7	/	/
5785.000000	---	85.94	250.0	H	171.0	12.7	/	/
High Channel: 5825MHz								
5825.000000	95.51	---	100.0	V	77.0	12.8	/	/
5825.000000	---	97.11	100.0	V	77.0	12.8	/	/
5825.000000	93.71	---	150.0	H	259.0	12.8	/	/
5825.000000	---	95.31	150.0	H	259.0	12.8	/	/
5850.000000	51.28	---	150.0	V	69.0	12.8	122.20	70.92
5855.000000	51.63	---	200.0	V	249.0	12.8	110.80	59.17
5875.000000	51.13	---	250.0	V	335.0	12.8	105.20	54.07
5925.000000	50.38	---	200.0	V	210.0	12.8	68.20	17.82

802.11ac40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5755.000000	---	84.51	200.0	V	145.0	12.7	/	/
5755.000000	92.43	---	200.0	V	145.0	12.7	/	/
5755.000000	---	82.69	150.0	H	281.0	12.7	/	/
5755.000000	90.70	---	150.0	H	281.0	12.7	/	/
5650.000000	53.85	---	250.0	V	167.0	12.7	68.20	14.35
5700.000000	53.89	---	100.0	V	133.0	12.7	105.20	51.31
5720.000000	54.19	---	250.0	V	93.0	12.7	110.80	56.61
5725.000000	54.64	---	150.0	V	119.0	12.7	122.20	67.56
High Channel: 5795MHz								
5795.000000	---	84.61	150.0	V	252.0	12.7	/	/
5795.000000	92.56	---	150.0	V	252.0	12.7	/	/
5795.000000	---	82.80	250.0	H	334.0	12.7	/	/
5795.000000	90.60	---	250.0	H	334.0	12.7	/	/
5850.000000	50.89	---	250.0	V	243.0	12.8	122.20	71.31
5855.000000	50.61	---	200.0	V	94.0	12.8	110.80	60.19
5875.000000	49.93	---	150.0	V	309.0	12.8	105.20	55.27
5925.000000	50.59	---	100.0	V	36.0	12.8	68.20	17.61

802.11n-HT40 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 5755MHz								
5755.000000	92.28	---	100.0	V	249.0	12.7	/	/
5755.000000	---	83.29	100.0	V	249.0	12.7	/	/
5755.000000	90.28	---	150.0	H	62.0	12.7	/	/
5755.000000	---	81.58	150.0	H	62.0	12.7	/	/
5650.000000	53.34	---	200.0	V	24.0	12.6	68.20	14.86
5700.000000	53.31	---	250.0	V	56.0	12.6	105.20	51.89
5720.000000	54.02	---	100.0	V	7.0	12.6	110.80	56.78
5725.000000	54.79	---	250.0	V	285.0	12.6	122.20	67.41
High Channel: 5795MHz								
5795.000000	---	83.57	200.0	V	207.0	12.7	/	/
5795.000000	92.53	---	200.0	V	207.0	12.7	/	/
5795.000000	---	81.79	150.0	H	204.0	12.7	/	/
5795.000000	90.55	---	150.0	H	204.0	12.7	/	/
5850.000000	51.21	---	250.0	V	44.0	12.8	122.20	70.99
5855.000000	51.06	---	150.0	V	61.0	12.8	110.80	59.74
5875.000000	51.86	---	200.0	V	4.0	12.8	105.20	53.34
5925.000000	51.05	---	250.0	V	8.0	12.8	68.20	17.15

802.11ac80 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Channel 5775MHz								
5650.000000	53.99	---	150.0	V	355.0	12.6	68.20	14.21
5700.000000	54.10	---	150.0	V	284.0	12.6	105.20	51.10
5720.000000	54.40	---	250.0	V	255.0	12.6	110.80	56.40
5725.000000	54.98	---	250.0	V	11.0	12.6	122.20	67.22
5775.000000	---	81.05	150.0	V	276.0	12.7	/	/
5775.000000	89.61	---	150.0	V	276.0	12.7	/	/
5775.000000	---	79.24	100.0	H	303.0	12.7	/	/
5775.000000	87.77	---	100.0	H	303.0	12.7	/	/
5850.000000	54.24	---	250.0	V	354.0	12.8	122.20	67.96
5855.000000	54.32	---	200.0	V	94.0	12.8	110.80	56.48
5875.000000	54.27	---	250.0	V	172.0	12.8	105.20	50.93
5925.000000	53.97	---	250.0	V	230.0	12.8	68.20	14.23

FCC §15.407(b) (1), (4) – BAND EDGE

Applicable Standard

FCC §15.407 (b) (1), (4);

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5.725–5.850 GHz band: all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibration or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW to 3MHz of spectrum analyzer. Offset the antenna gain and cable loss.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	60 %
ATM Pressure:	101.2 kPa

The testing was performed by Max Min on 2018-08-04 & 2018-08-05.

5150-5250 MHz Band:

Band (MHz)	Test Mode	Band Edge	Reading Level (dBm/MHz)	E.I.R.P (dBm/MHz)	Limits (dBm/MHz)	Result
5150-5250	802.11a	left	-49.00	-49.00	≤ -27	PASS
		right	-52.61	-52.61	≤ -27	PASS
	802.11ac20	left	-48.31	-48.31	≤ -27	PASS
		right	-51.81	-51.81	≤ -27	PASS
	802.11 n-HT20	left	-48.74	-48.74	≤ -27	PASS
		right	-51.92	-51.92	≤ -27	PASS
	802.11ac40	left	-50.15	-50.15	≤ -27	PASS
		right	-51.43	-51.43	≤ -27	PASS
	802.11 n-HT40	left	-50.43	-50.43	≤ -27	PASS
		right	-52.13	-52.13	≤ -27	PASS
	802.11ac80	left	-47.49	-47.49	≤ -27	PASS
		right	-51.80	-51.80	≤ -27	PASS

Note 1: The antenna gain is 0dBi.


5725-5850 MHz Band:

Band (MHz)	Test Mode	Band Edge	Reading Level (dBm/MHz)	E.I.R.P (dBm/MHz)	Margin (dB)	Result
5725-5850	802.11a	left	-40.94	-40.94	$>10\text{dB}$	PASS
		right	-40.51	-40.51	$>10\text{dB}$	PASS
	802.11ac20	left	-41.79	-41.79	$>10\text{dB}$	PASS
		right	-40.50	-40.50	$>10\text{dB}$	PASS
	802.11 n-HT20	left	-40.77	-40.77	$>10\text{dB}$	PASS
		right	-39.82	-39.82	$>10\text{dB}$	PASS
	802.11ac40	left	-40.10	-40.10	$>10\text{dB}$	PASS
		right	-40.34	-40.34	$>10\text{dB}$	PASS
	802.11 n-HT40	left	-42.08	-42.08	$>10\text{dB}$	PASS
		right	-39.94	-39.94	$>10\text{dB}$	PASS
	802.11ac80	left	-40.23	-40.23	$>10\text{dB}$	PASS
		right	-40.86	-40.86	$>10\text{dB}$	PASS

Note 2: The antenna gain is 0dBi.


5150-5250 MHz Band:

802.11a Band Edge, Left Side

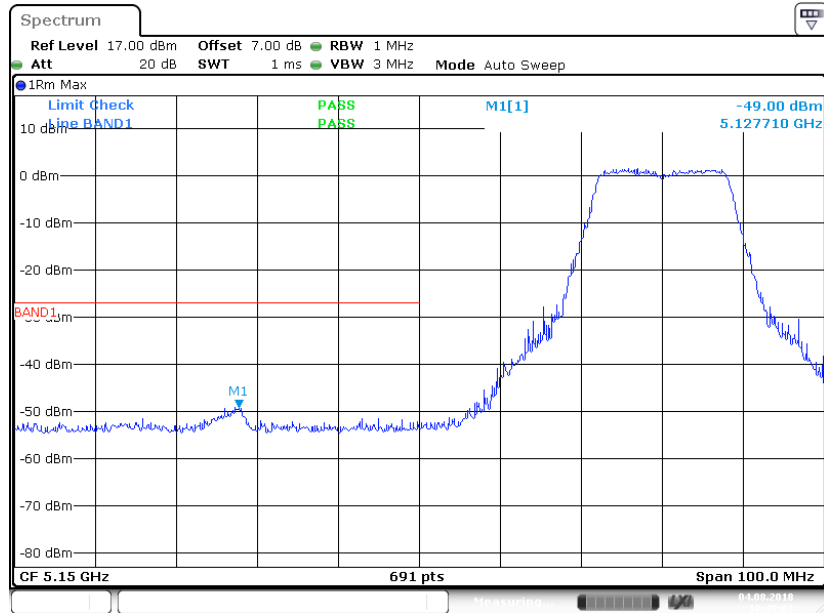


Date: 4 AUG 2018 18:49:03

802.11a Band Edge, Right Side

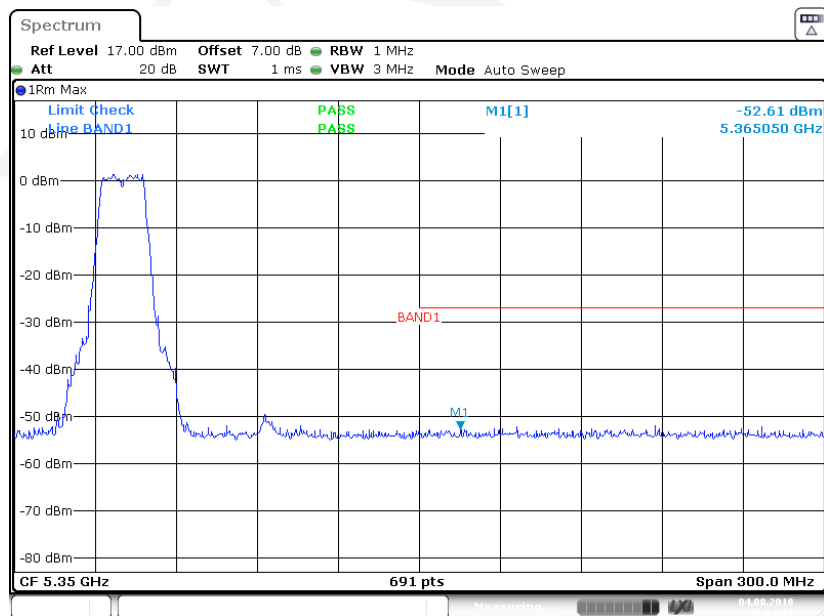


Date: 4 AUG 2018 19:04:17

802.11ac20 Band Edge, Left Side

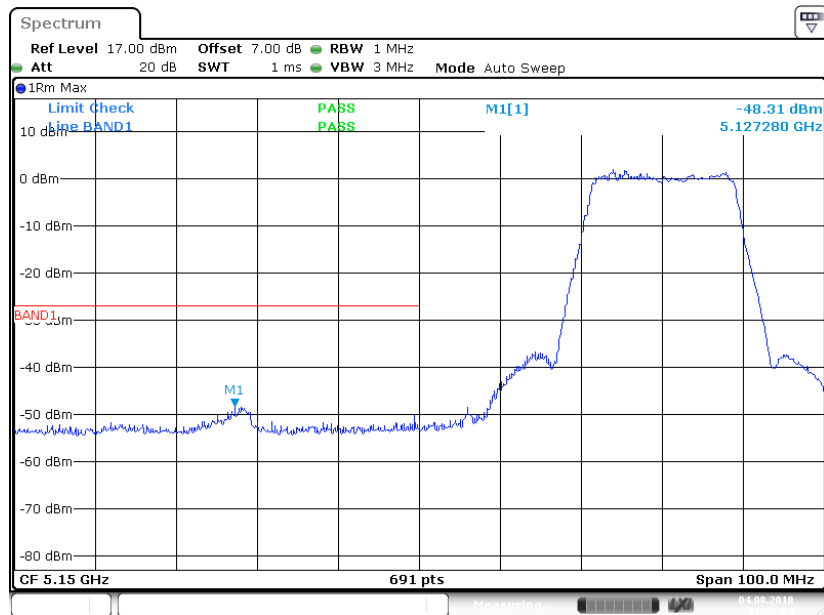


Date: 4 AUG 2018 18:47:04

802.11ac20 Band Edge, Right Side

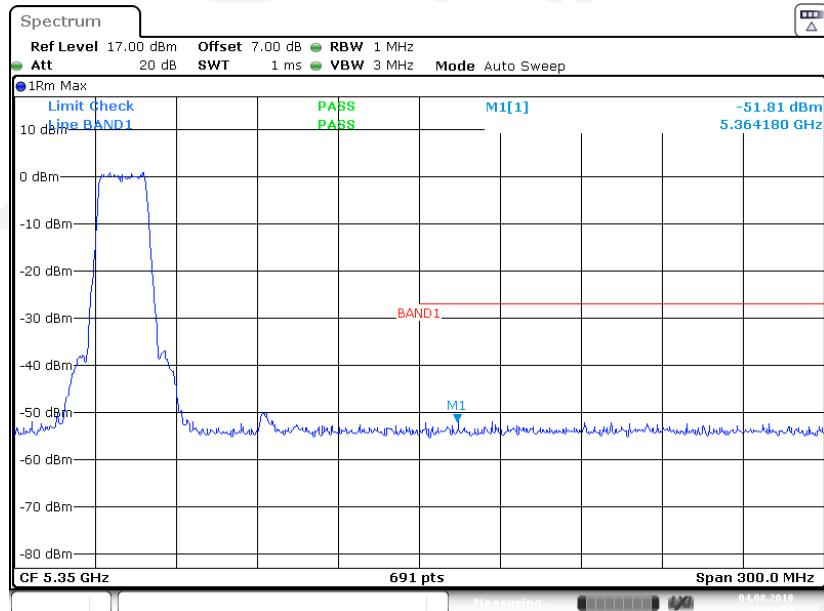


Date: 4 AUG 2018 19:05:04


802.11n-HT20 Band Edge, Left Side

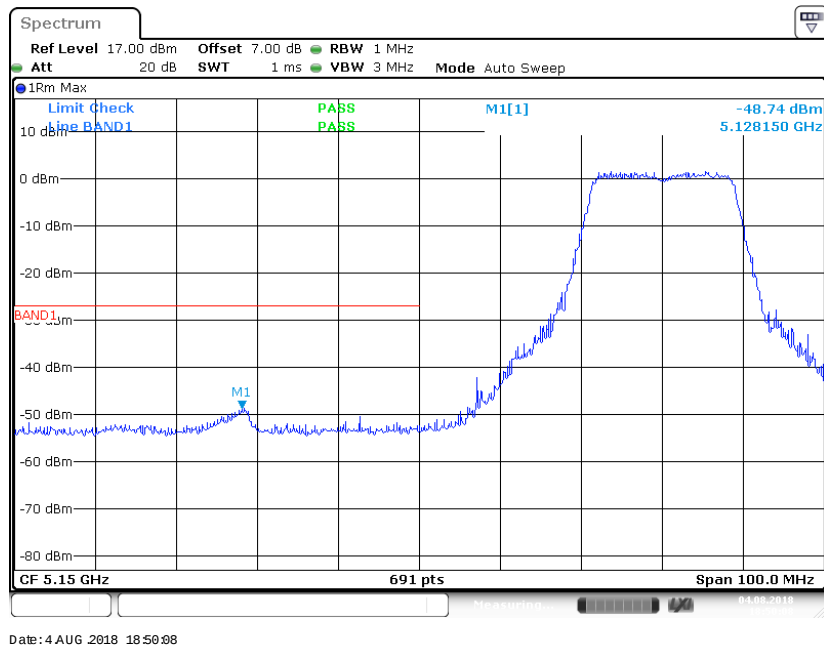


802.11n-HT20 Band Edge, Right Side

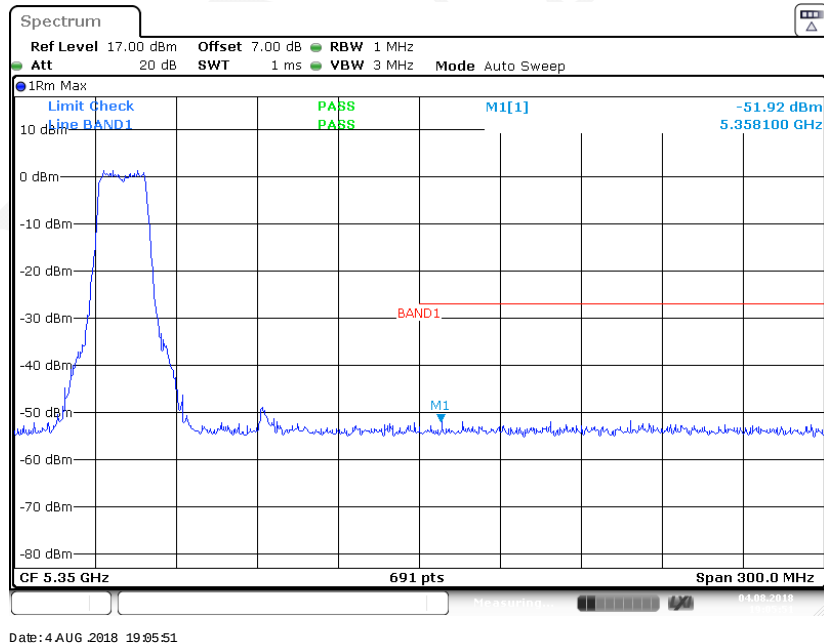


802.11ac40 Band Edge, Left Side

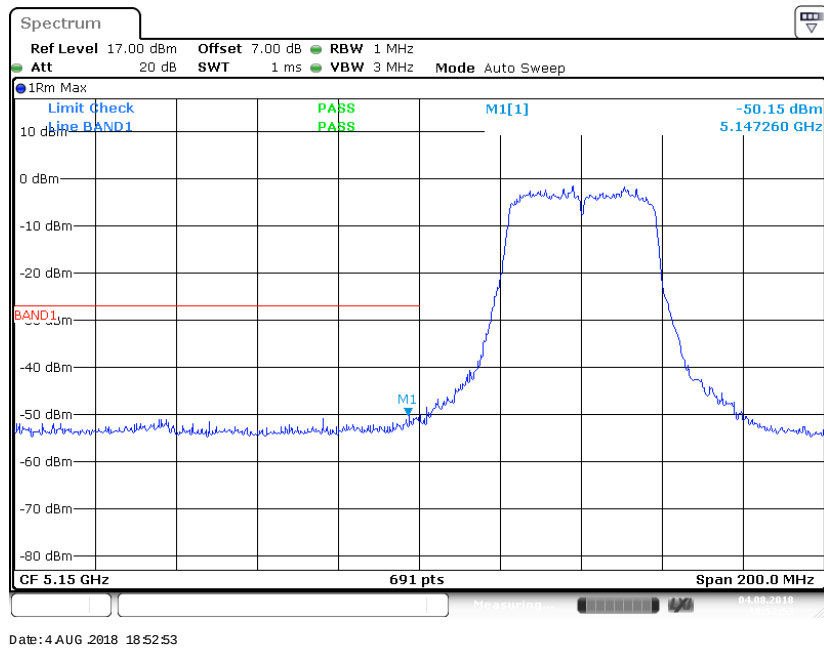


802.11ac40 Band Edge, Right Side

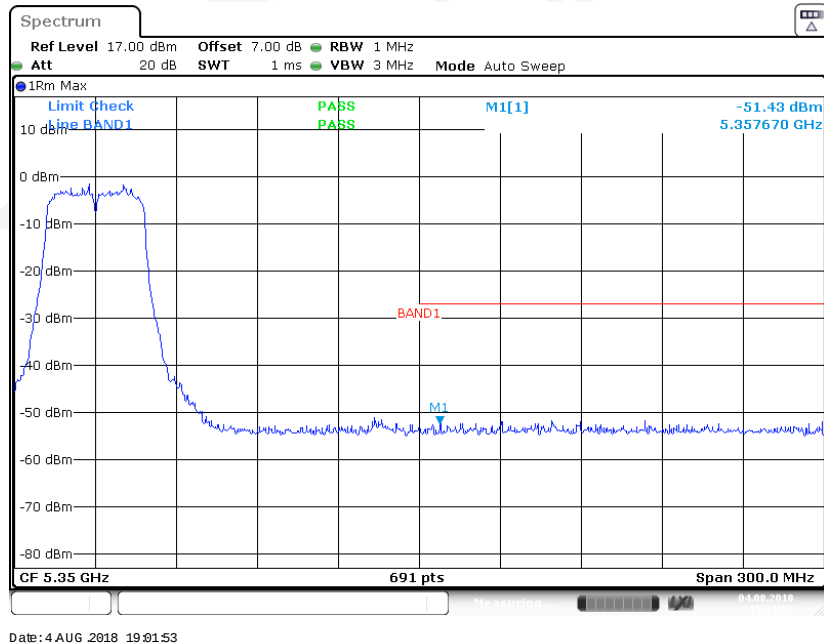


802.11n-HT40 Band Edge, Left Side

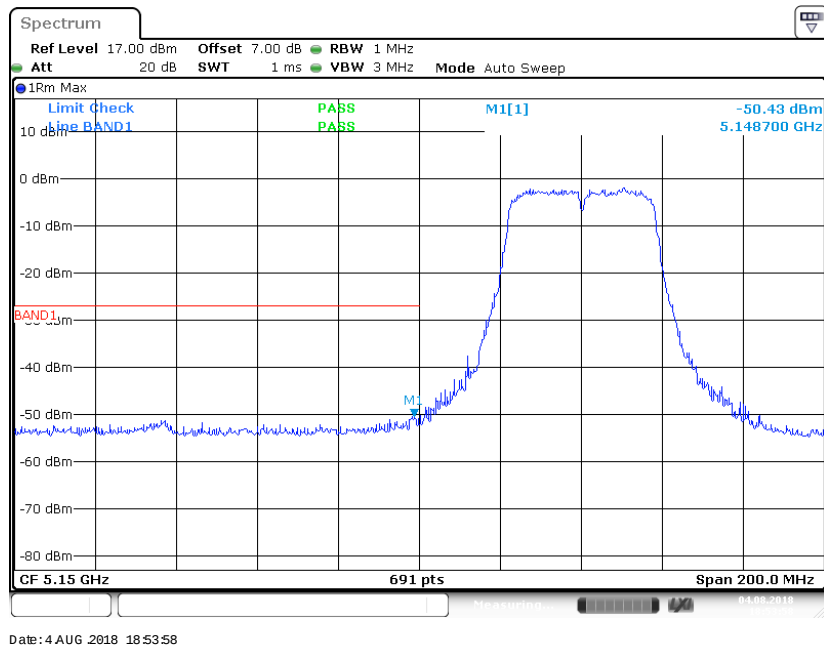


802.11n-HT40 Band Edge, Right Side

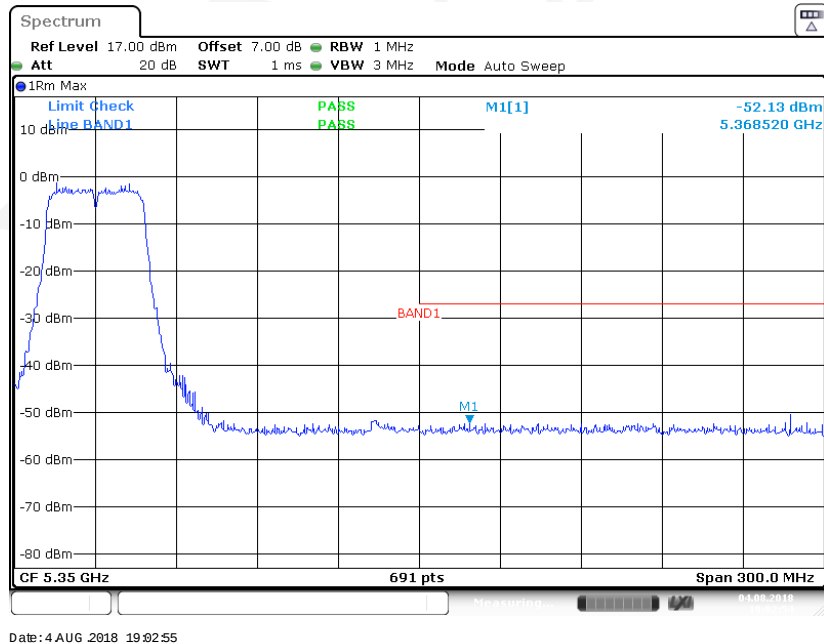

802.11ac80 Band Edge, Left Side

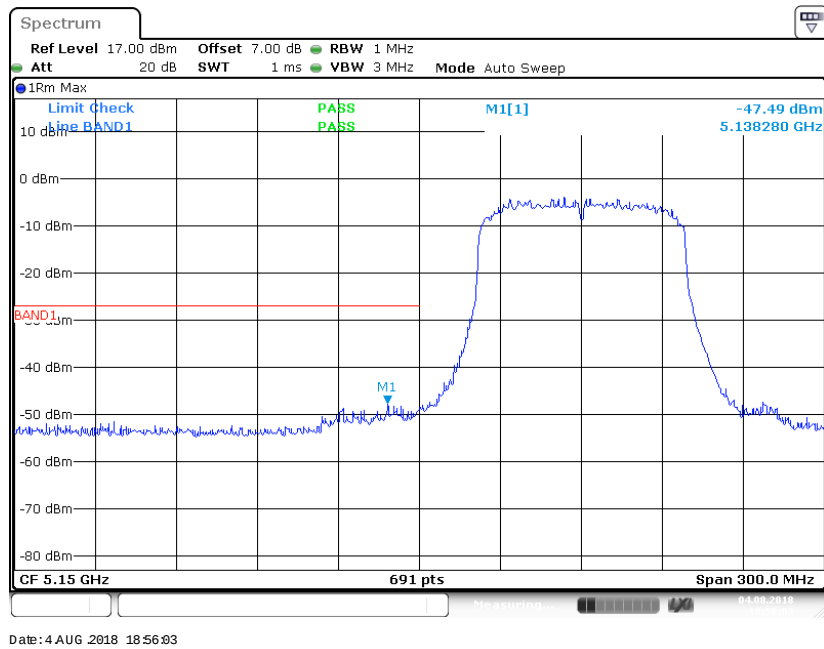


802.11ac80 Band Edge, Right Side

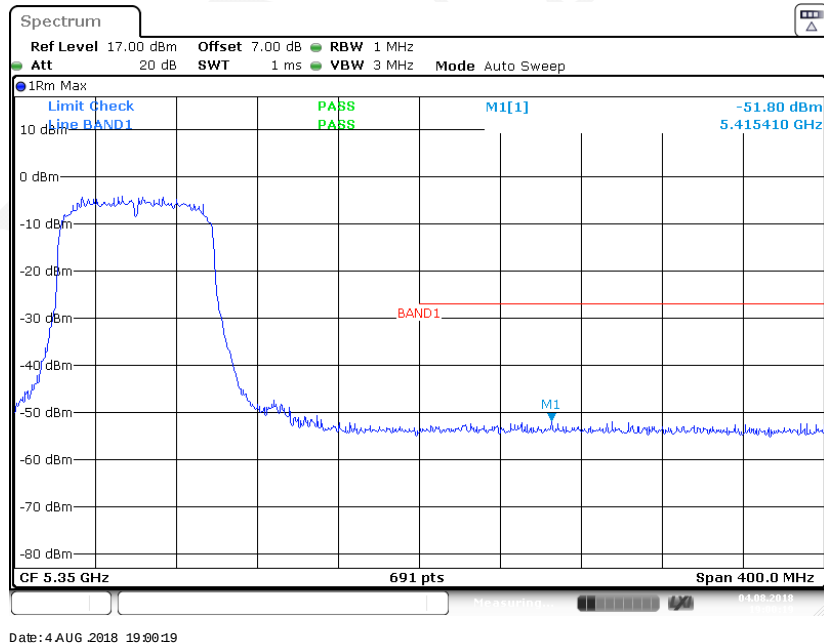


5725-5850 MHz Band:

802.11a Band Edge, Left Side

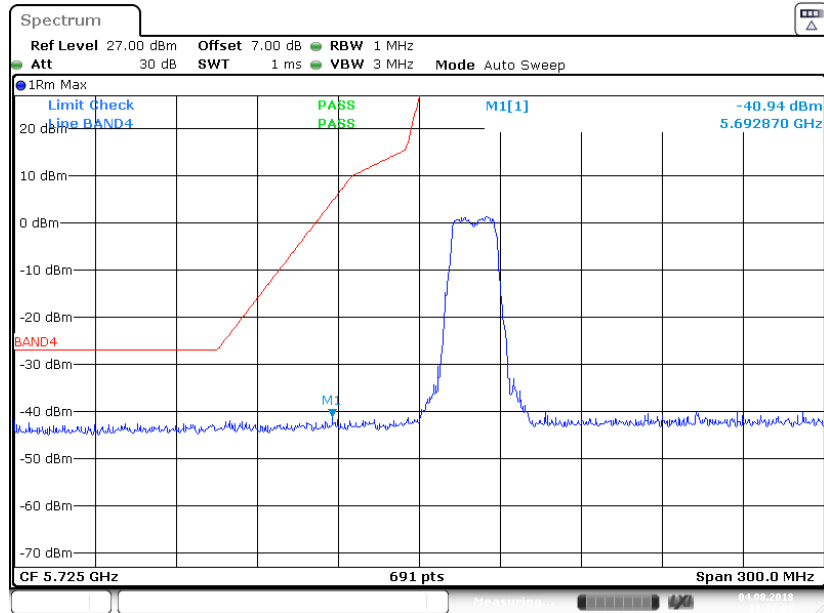


Date: 4 AUG 2018 19:22:03

802.11a Band Edge, Right Side

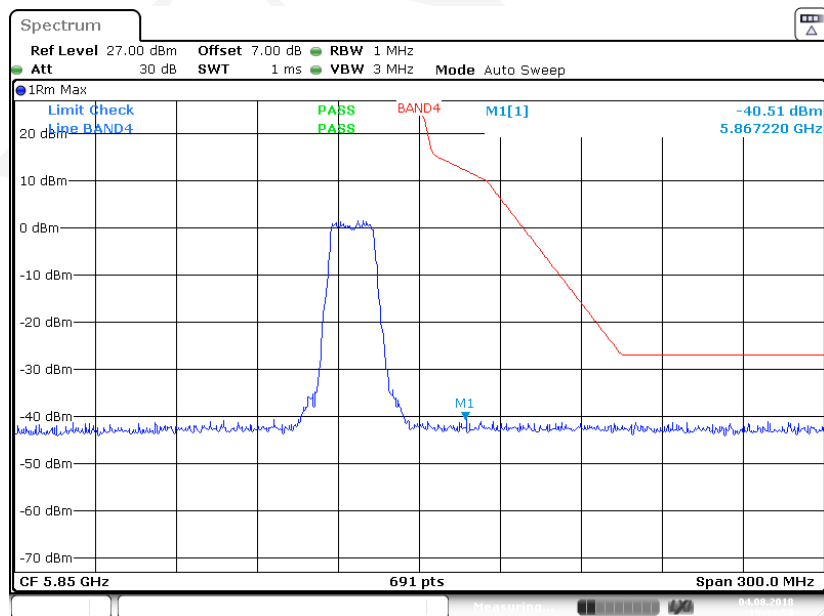


Date: 4 AUG 2018 19:30:50


802.11ac20 Band Edge, Left Side

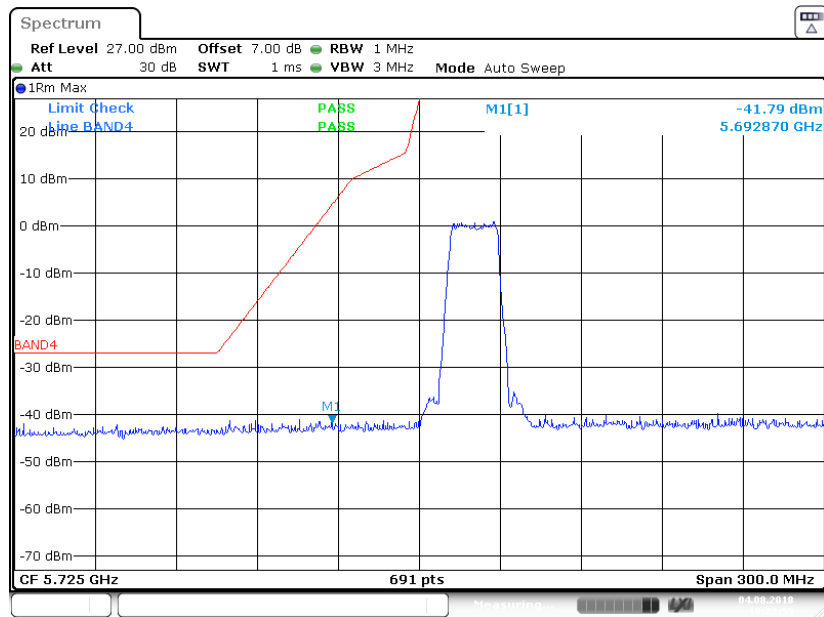


802.11ac20 Band Edge, Right Side

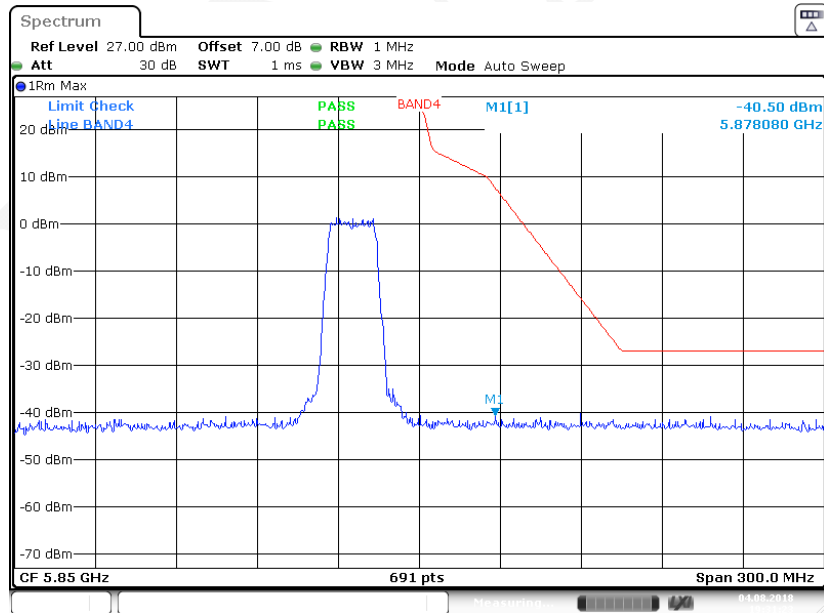


802.11n-HT20 Band Edge, Left Side

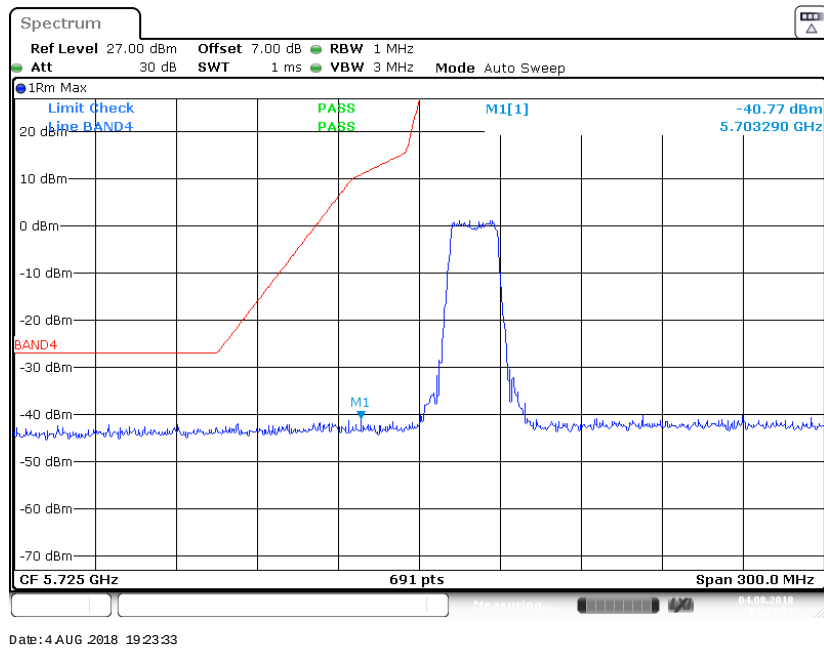


802.11n-HT20 Band Edge, Right Side

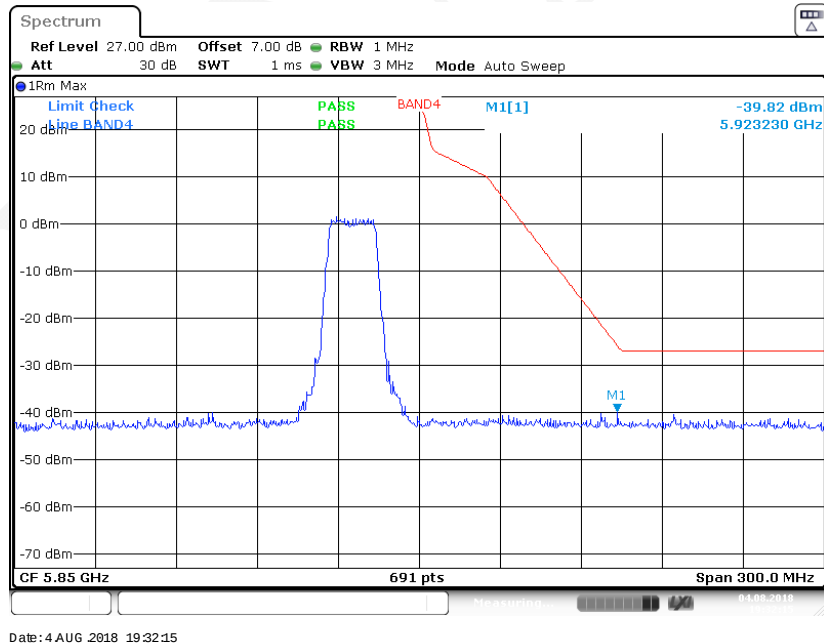


802.11ac40 Band Edge, Left Side

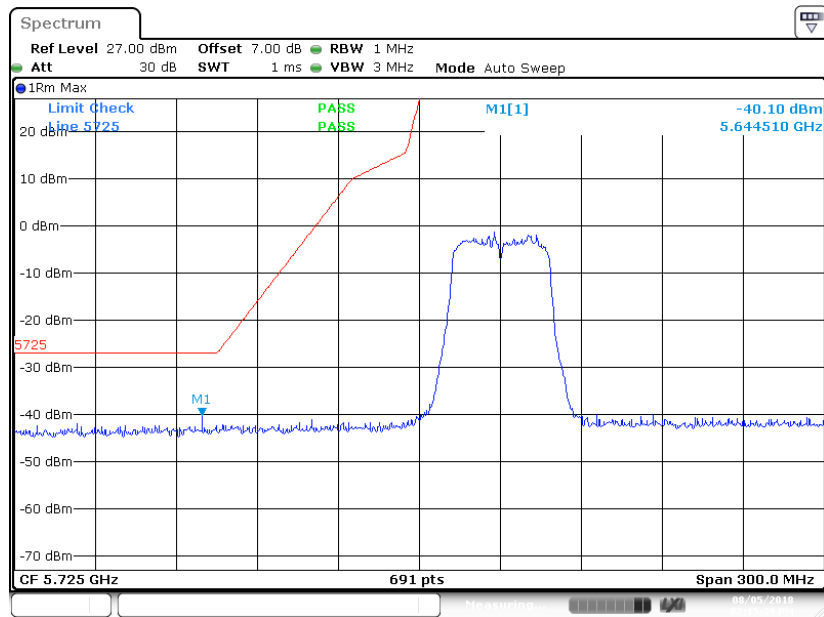

802.11ac40 Band Edge, Right Side

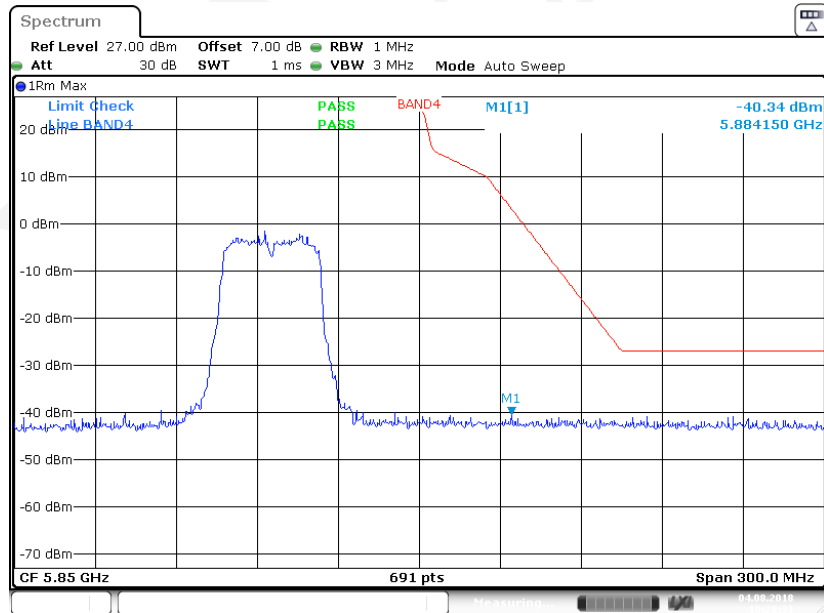


802.11n-HT40 Band Edge, Left Side

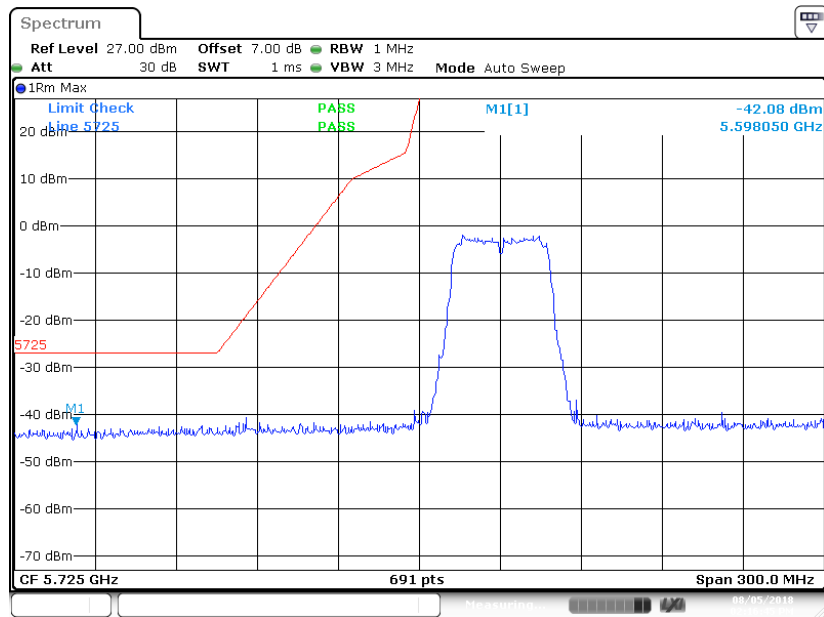


Date: 5 AUG 2018 14:16:45

802.11n-HT40 Band Edge, Right Side

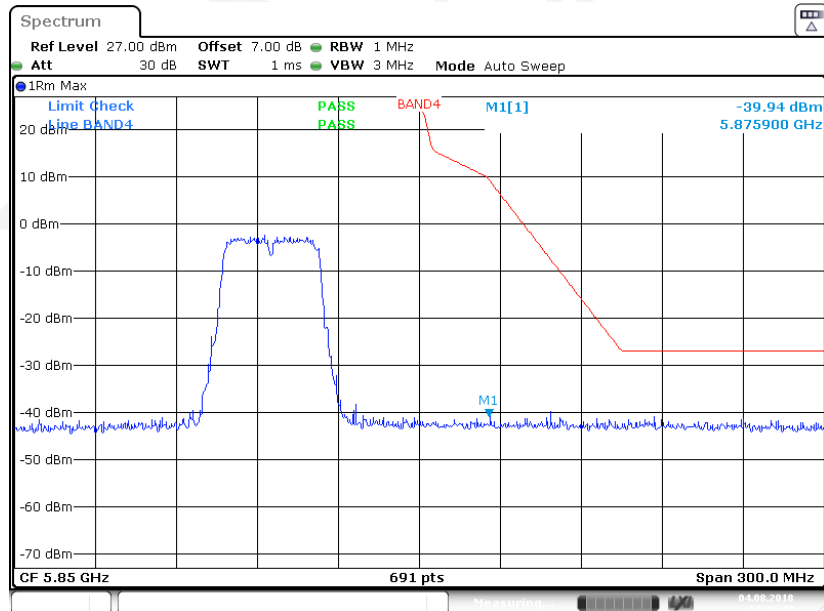


Date: 4 AUG 2018 19:29:40

802.11ac80 Band Edge, Left Side

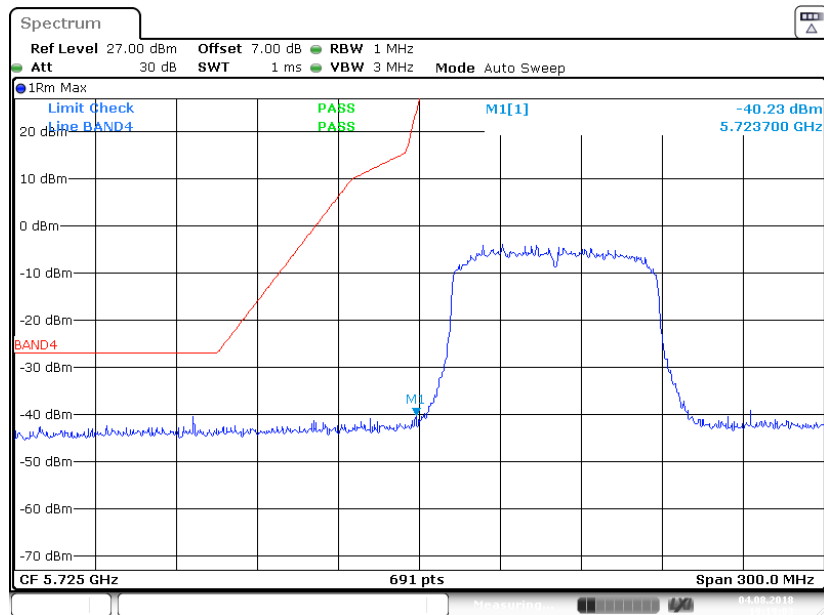

Date: 4 AUG 2018 19:19:03

802.11ac80 Band Edge, Right Side

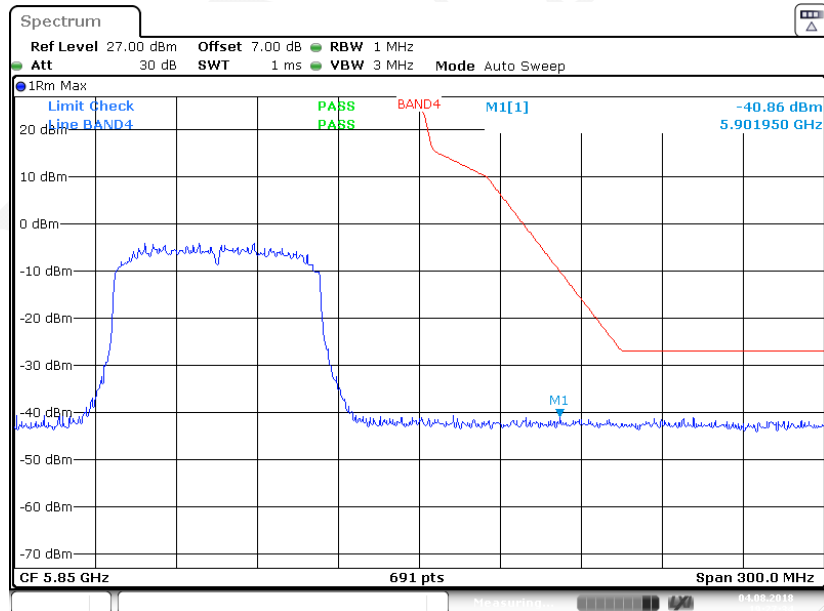

Date: 4 AUG 2018 19:27:34

FCC §15.407(a) & §15.407(e) – EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz is made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	23.5 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Max Min on 2018-08-04 & 2018-08-05.

Test Result: Pass.**5150-5250 MHz:**

Test mode	Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
802.11a	Low	5180	22.49	17.06
	Middle	5200	22.36	17.02
	High	5240	22.53	17.11
802.11ac20	Low	5180	22.19	18.10
	Middle	5200	22.19	18.06
	High	5240	22.27	18.10
802.11n-HT20	Low	5180	22.66	18.15
	Middle	5200	22.62	18.23
	High	5240	22.88	18.10
802.11ac40	Low	5190	42.89	36.38
	High	5230	42.98	36.38
802.11n-HT40	Low	5190	43.68	36.38
	High	5230	44.28	36.38
802.11ac80	/	5210	84.92	74.85

Note:the 99% Occupied Bandwidth doesn't extend U-NII-2A band 5250-5350MHz.

5725-5850MHz:


Test mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a	Low	5745	16.41	17.15	≥ 0.5
	Middle	5785	16.41	17.02	≥ 0.5
	High	5825	16.45	17.15	≥ 0.5
802.11ac20	Low	5745	17.58	18.10	≥ 0.5
	Middle	5785	17.58	18.06	≥ 0.5
	High	5825	17.63	18.06	≥ 0.5
802.11n-HT20	Low	5745	17.63	18.15	≥ 0.5
	Middle	5785	17.63	18.06	≥ 0.5
	High	5825	17.63	18.06	≥ 0.5
802.11ac40	Low	5755	35.34	36.38	≥ 0.5
	High	5795	35.38	36.38	≥ 0.5
802.11n-HT40	Low	5755	35.72	36.47	≥ 0.5
	High	5795	35.77	36.47	≥ 0.5
802.11ac80	/	5775	73.76	74.85	≥ 0.5

Note:the 99% Occupied Bandwidth doesn't extend U-NII-2C band 5470-5725MHz.

5150-5250 MHz Band:


26 Bandwidth

802.11a mode 5180MHz

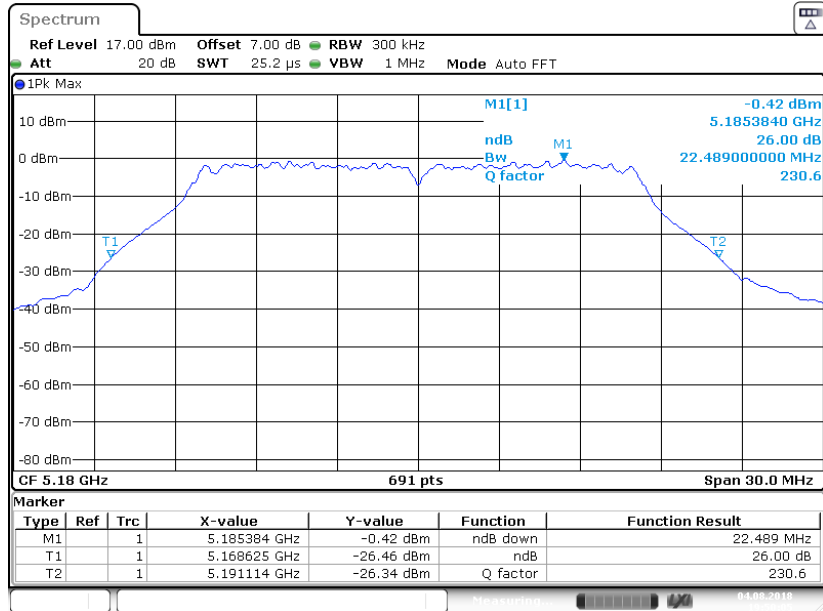


Date: 4 AUG 2018 19:50:35

802.11a mode 5200MHz

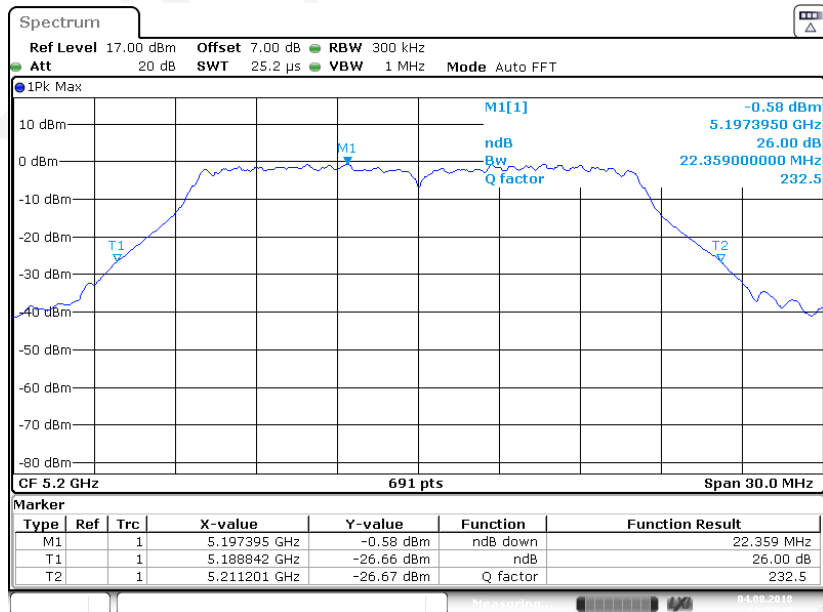


Date: 4 AUG 2018 19:53:40


802.11a mode 5240MHz

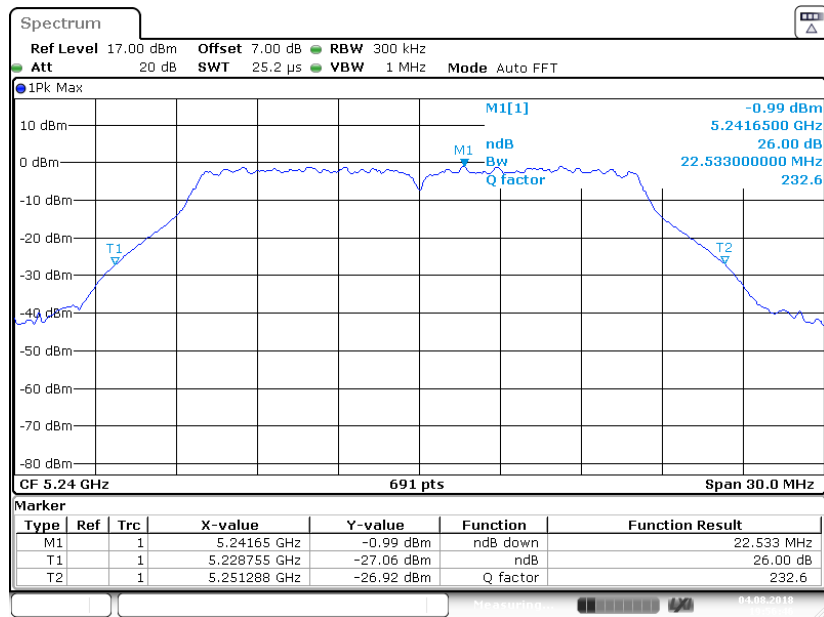


802.11ac20 mode 5180MHz

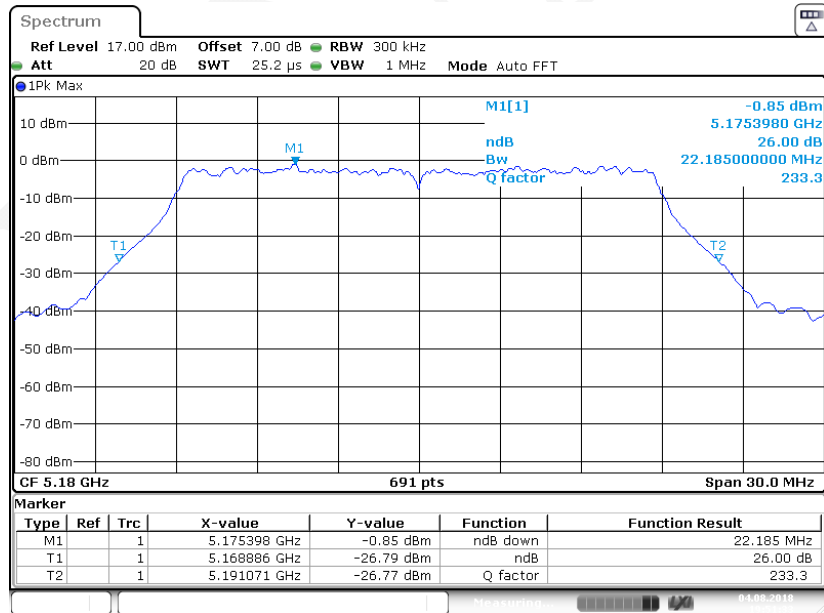


802.11ac20 mode 5200MHz

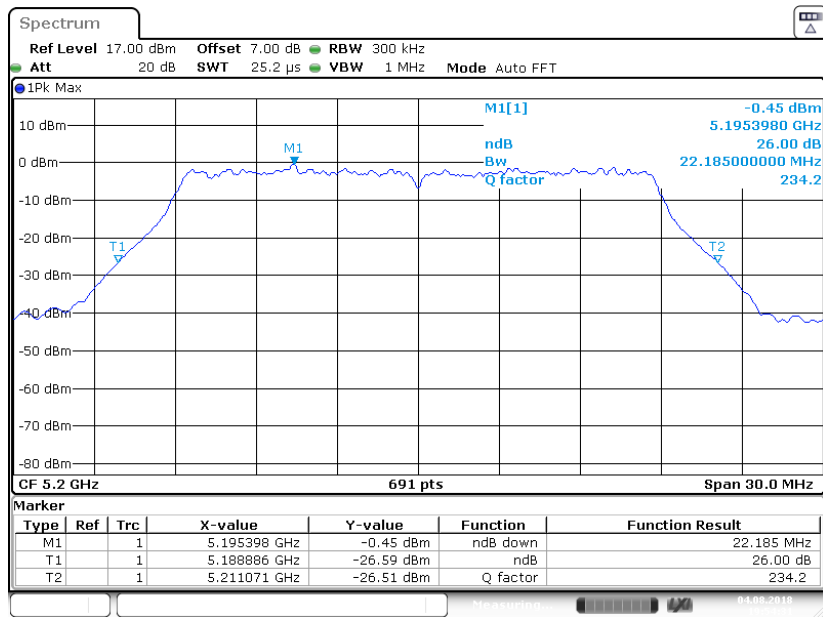


802.11ac20 mode 5240MHz

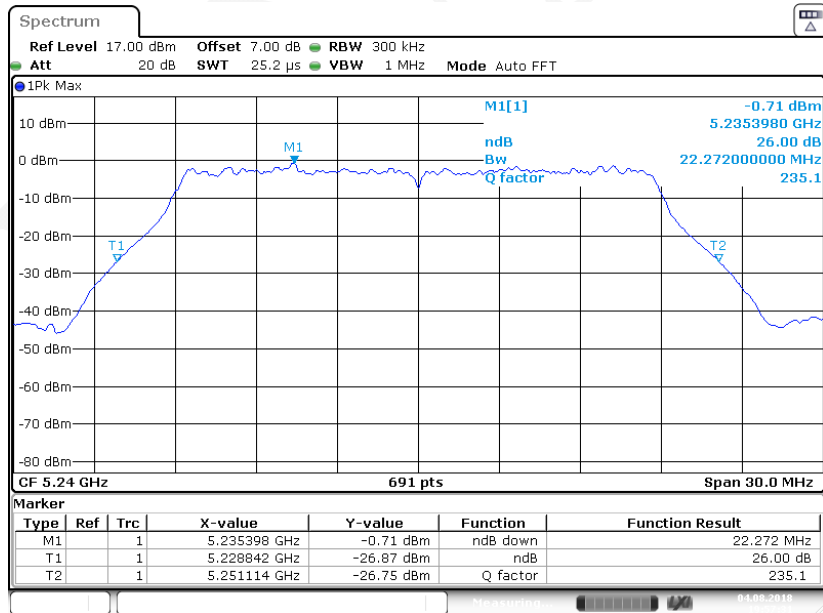


802.11n-HT20 mode 5180MHz

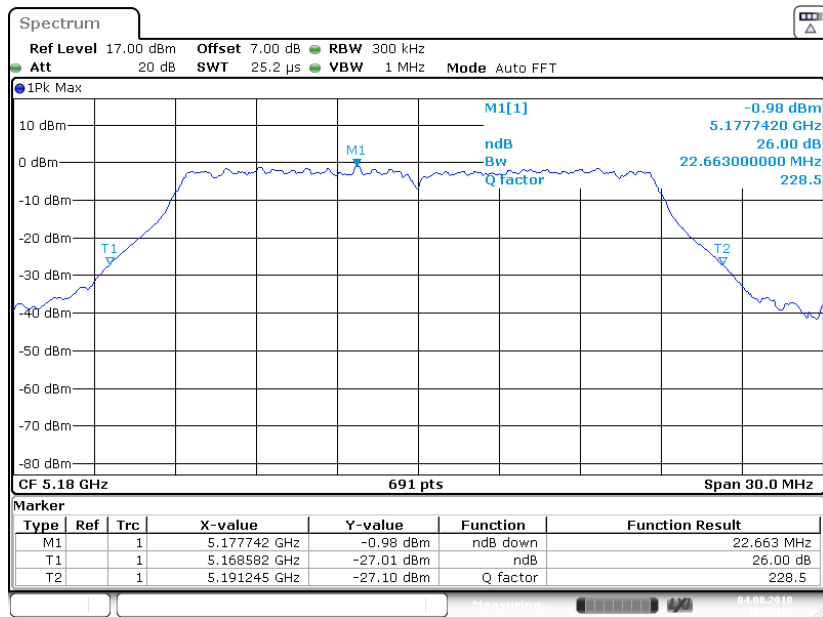

802.11n-HT20 mode 5200MHz

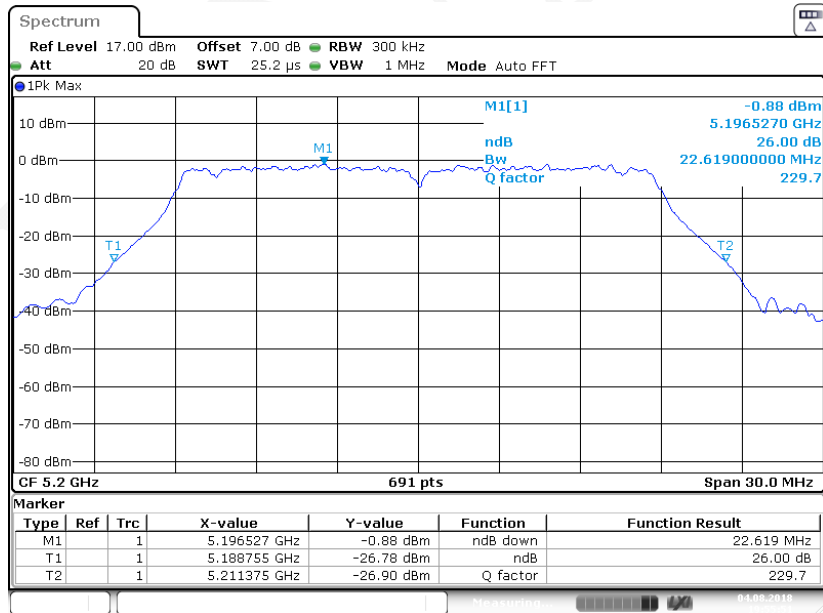


802.11n-HT20 mode 5240MHz

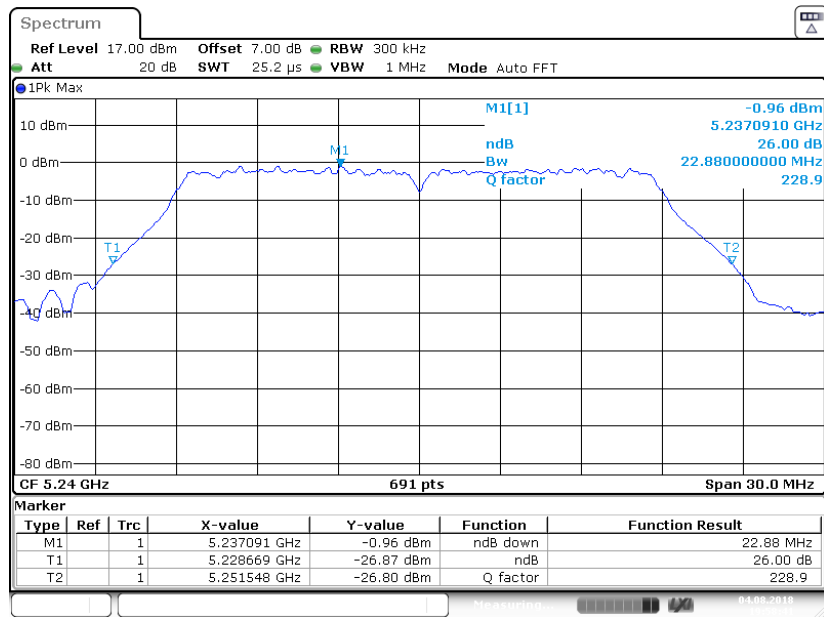


Date: 4 AUG 2018 19:58:40

802.11ac40 mode 5190MHz

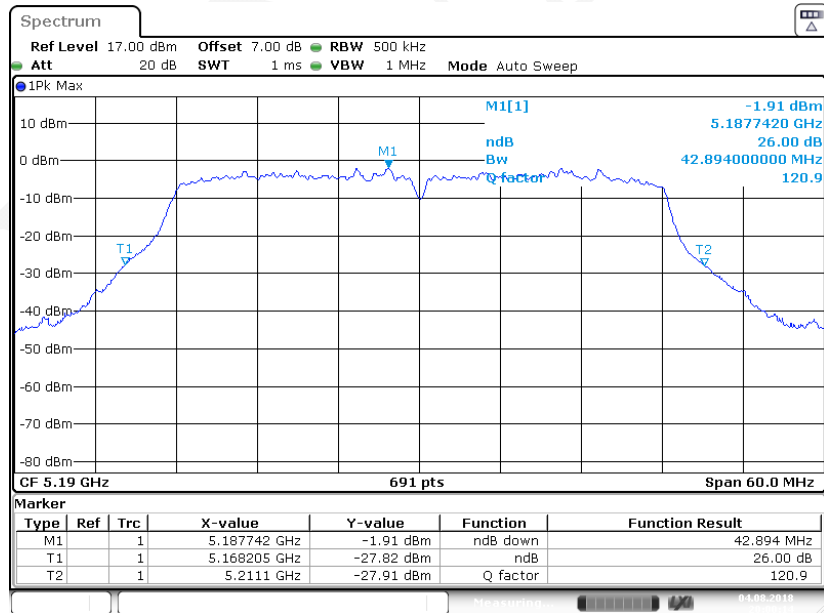


Date: 4 AUG 2018 20:00:14

802.11ac40 mode 5230MHz

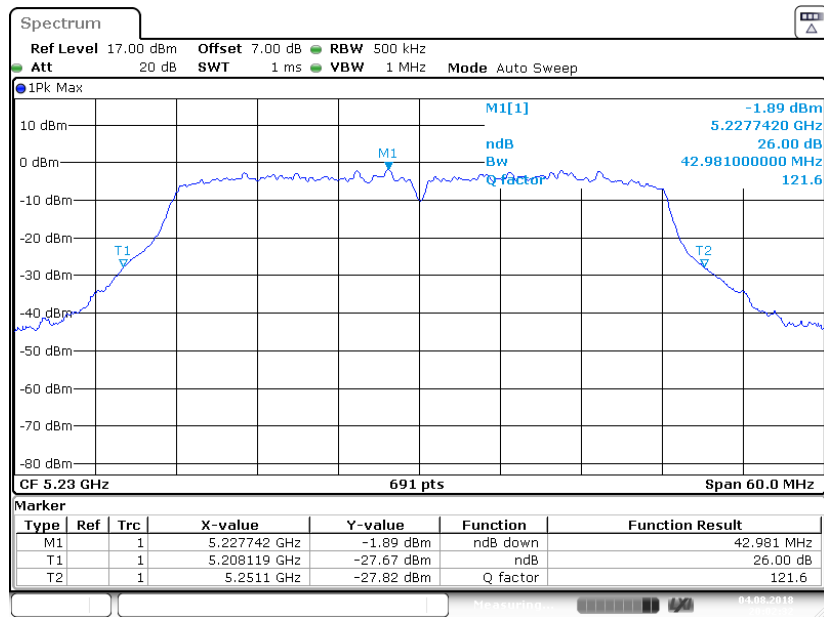


Date: 4 AUG 2018 20:02:32

802.11n-HT40 mode 5190MHz

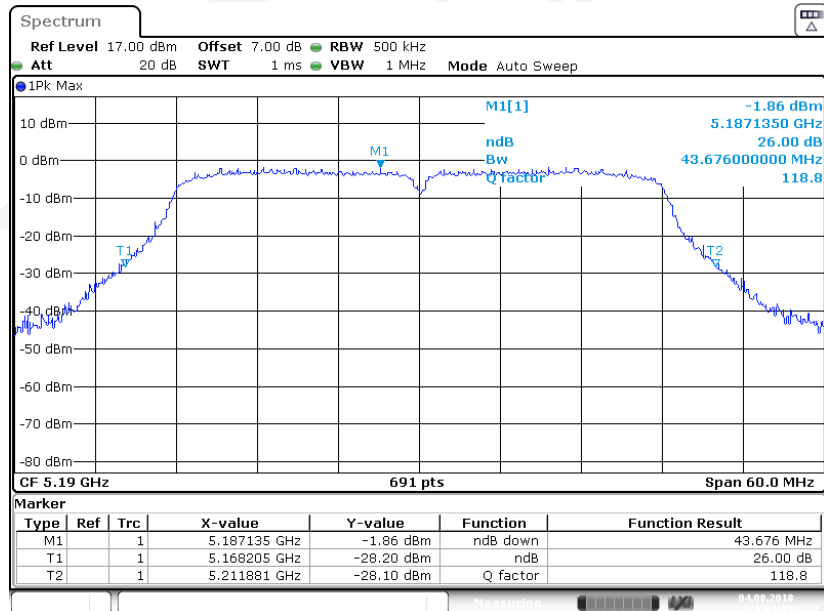


Date: 4 AUG 2018 20:01:23

802.11n-HT40 mode 5230MHz

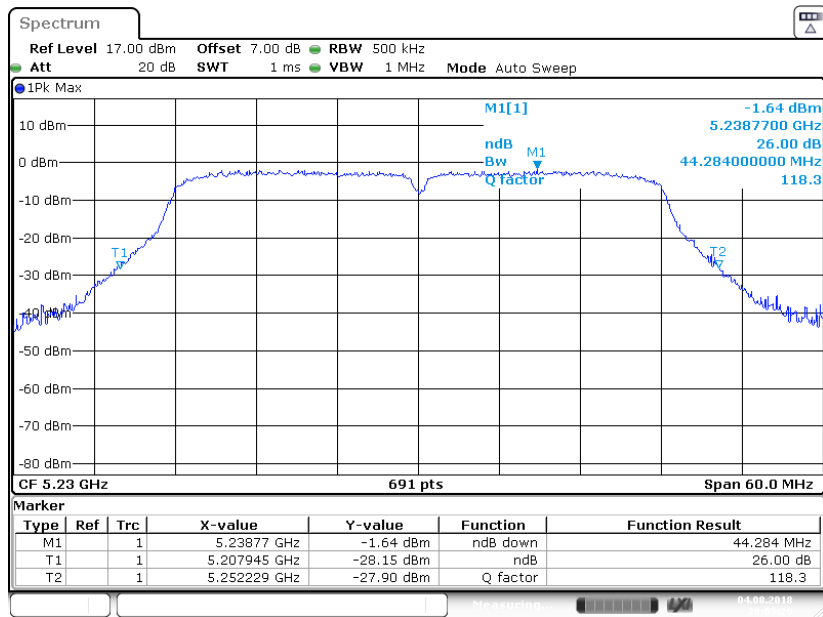


802.11ac80 mode 5210MHz

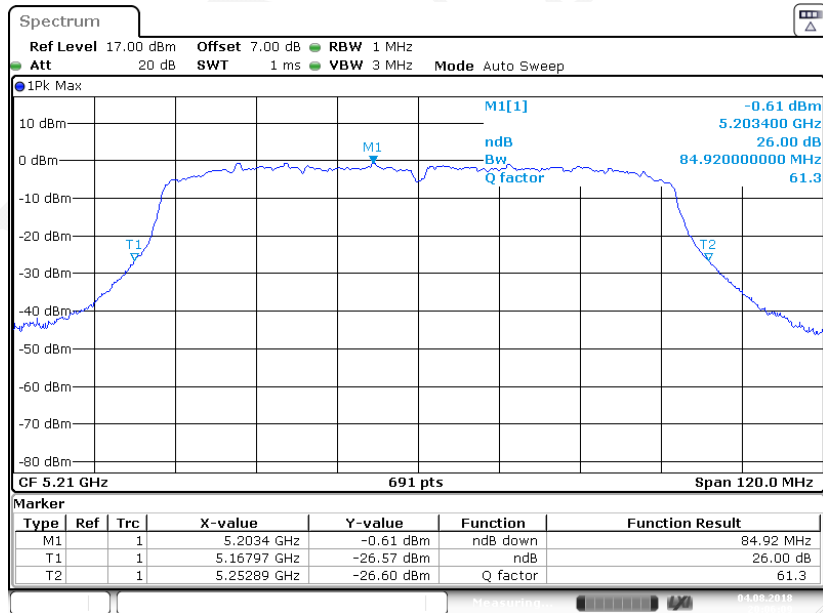


99% Bandwidth

802.11a mode 5180MHz

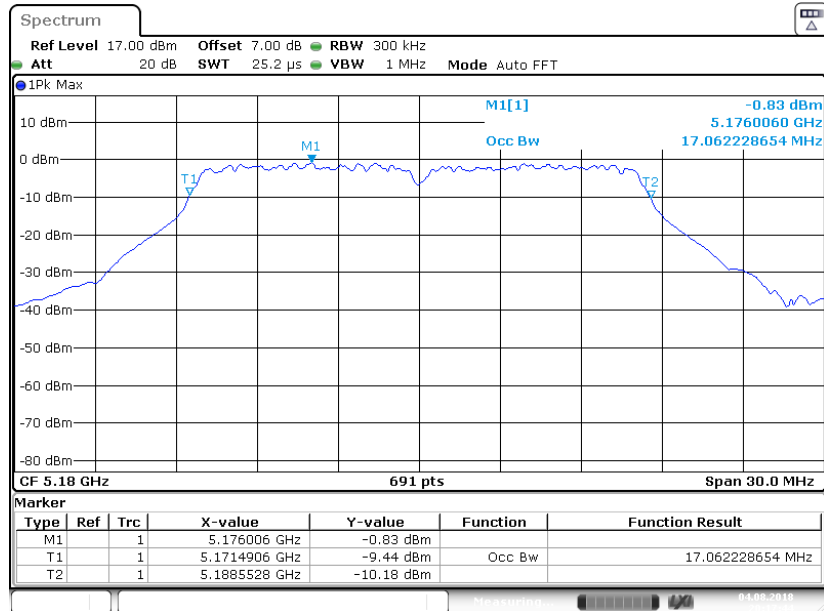


Date: 4 AUG 2018 20:17:45

802.11a mode 5200MHz

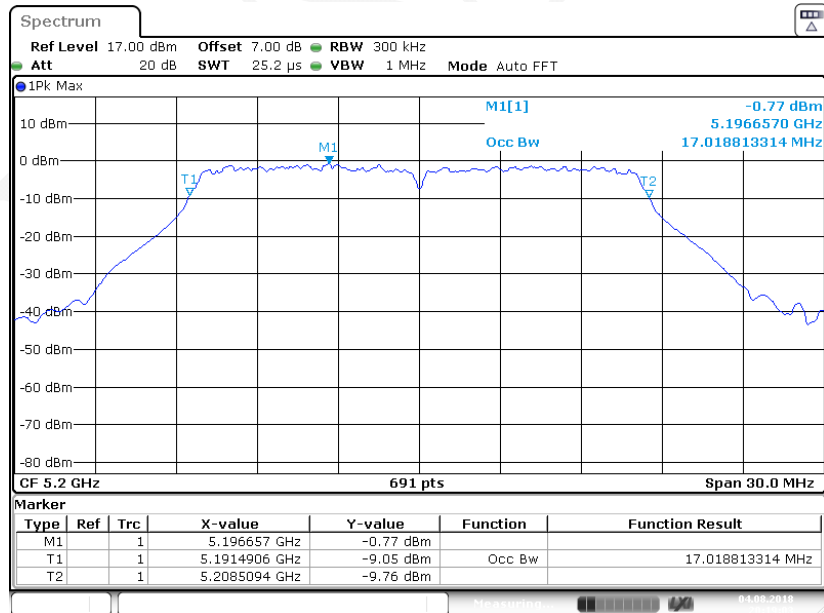


Date: 4 AUG 2018 20:19:03


802.11a mode 5240MHz

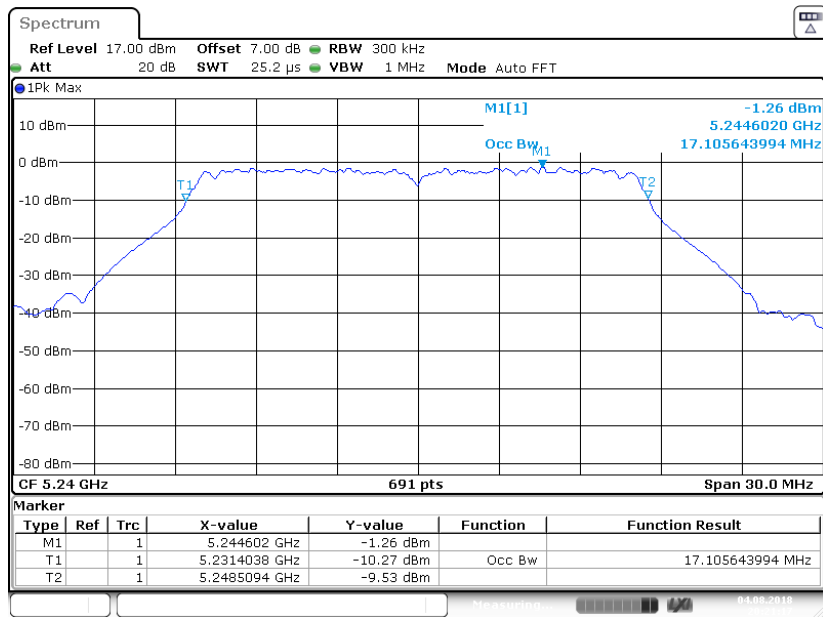


802.11ac20 mode 5180MHz

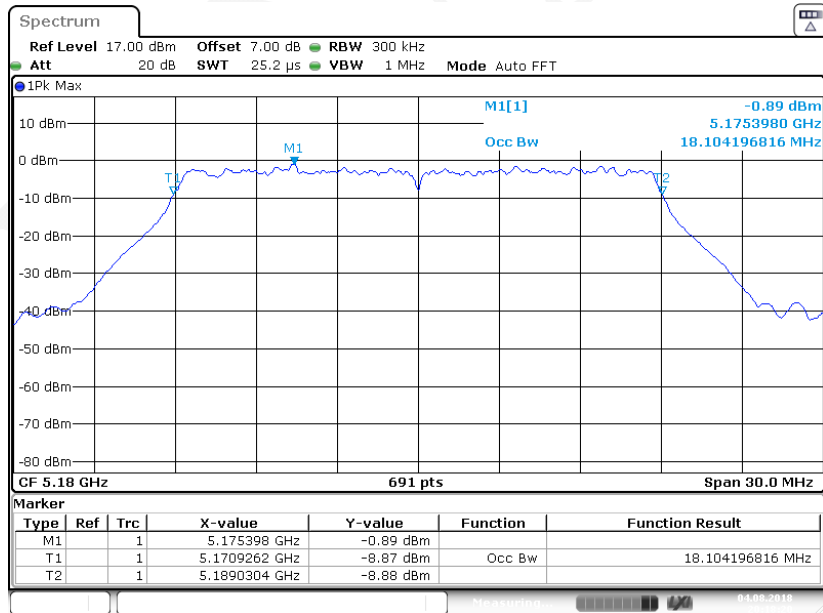


802.11ac20 mode 5200MHz

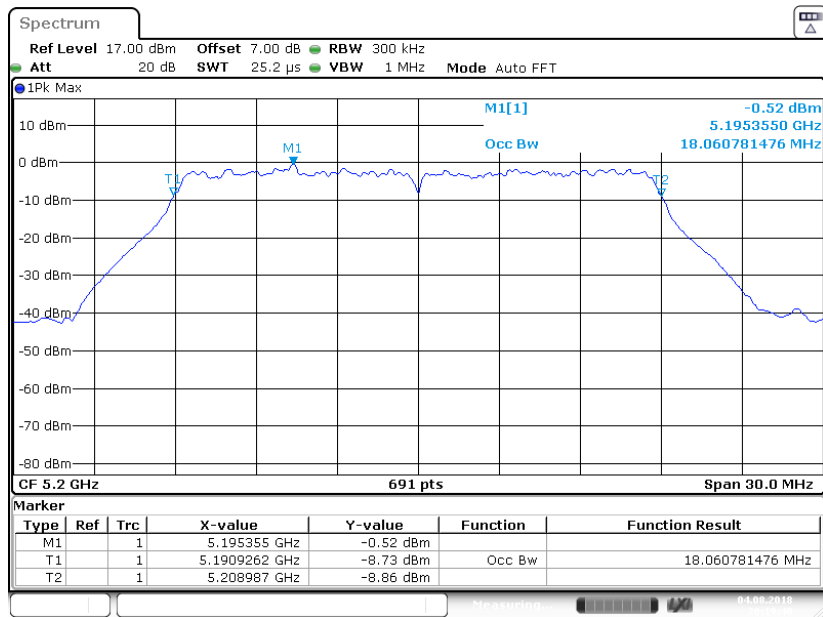


802.11ac20 mode 5240MHz

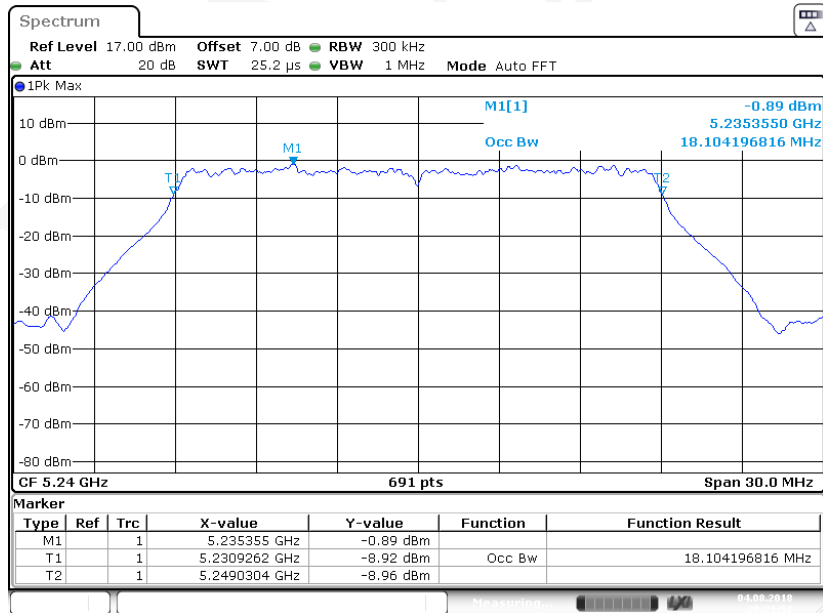


802.11n-HT20 mode 5180MHz

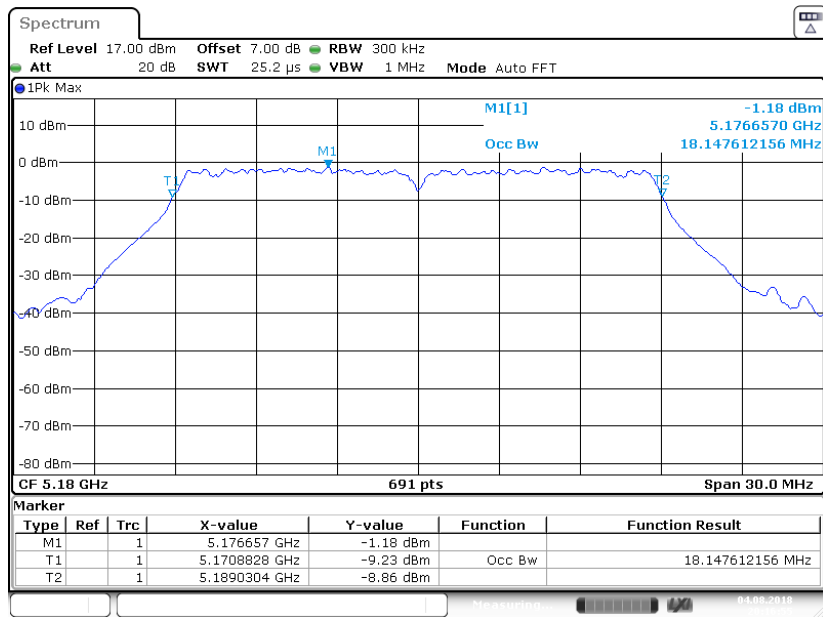

802.11n-HT20 mode 5200MHz

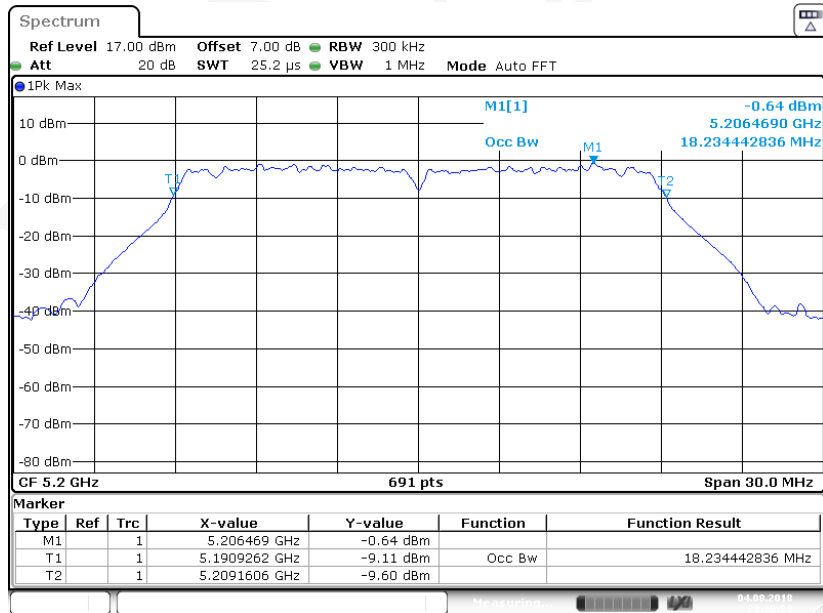


802.11n-HT20 mode 5240MHz

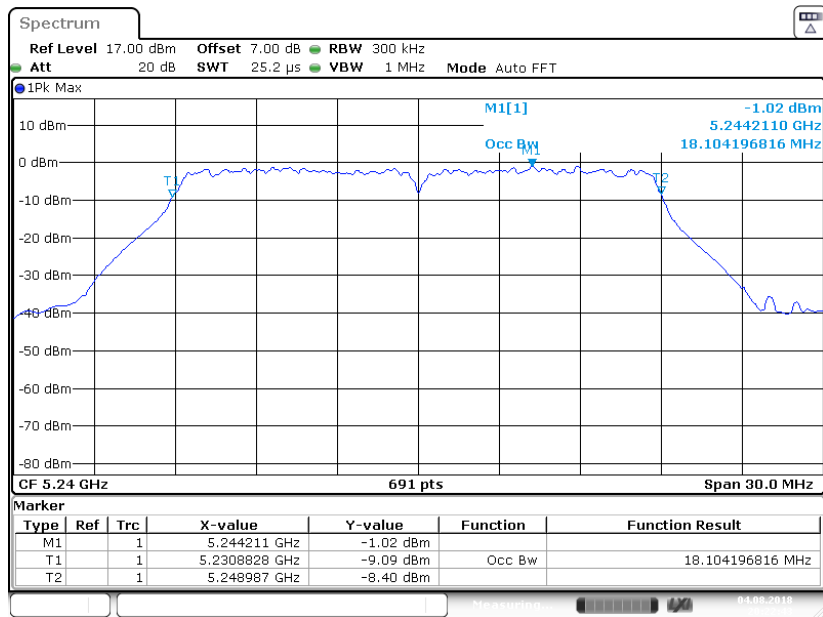


Date: 4 AUG 2018 20:22:43

802.11ac40 mode 5190MHz

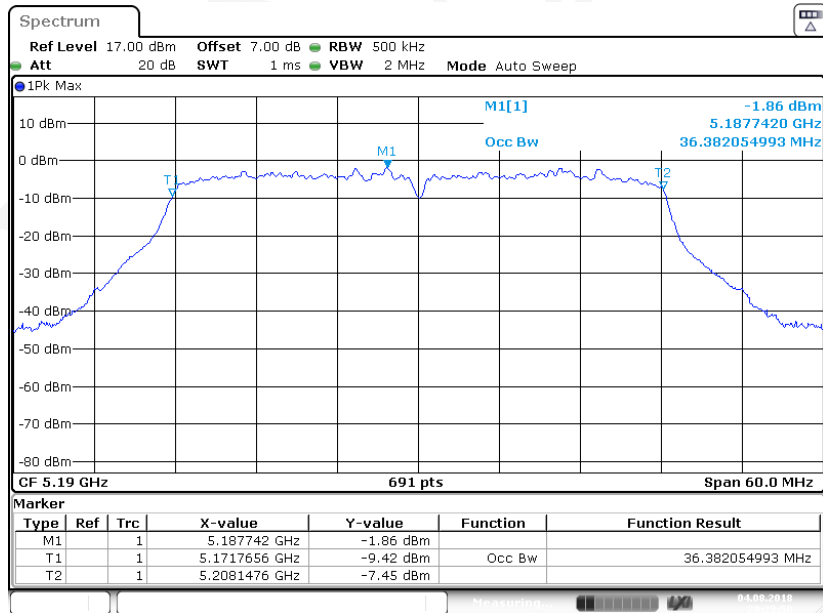


Date: 4 AUG 2018 20:23:49

802.11ac40 mode 5230MHz

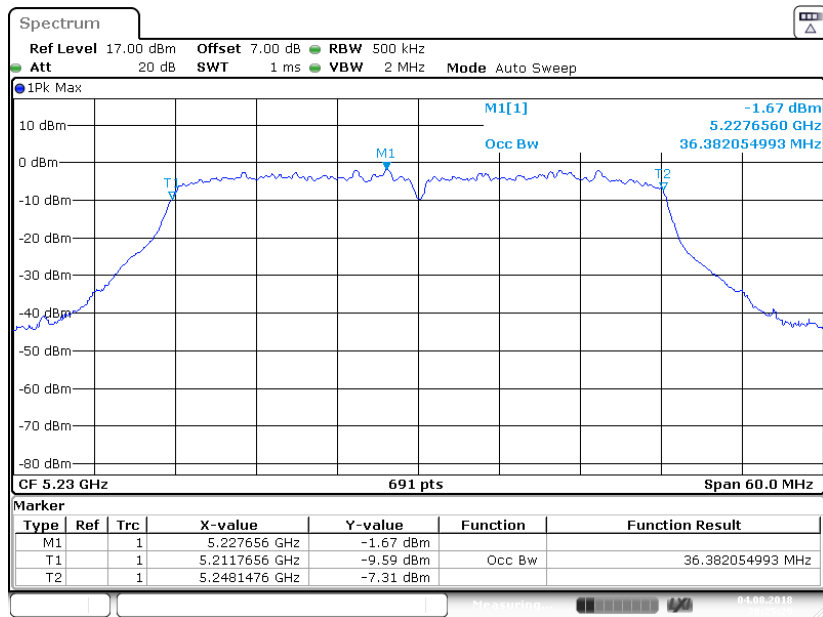


Date: 4 AUG 2018 20:25:29

802.11n-HT40 mode 5190MHz

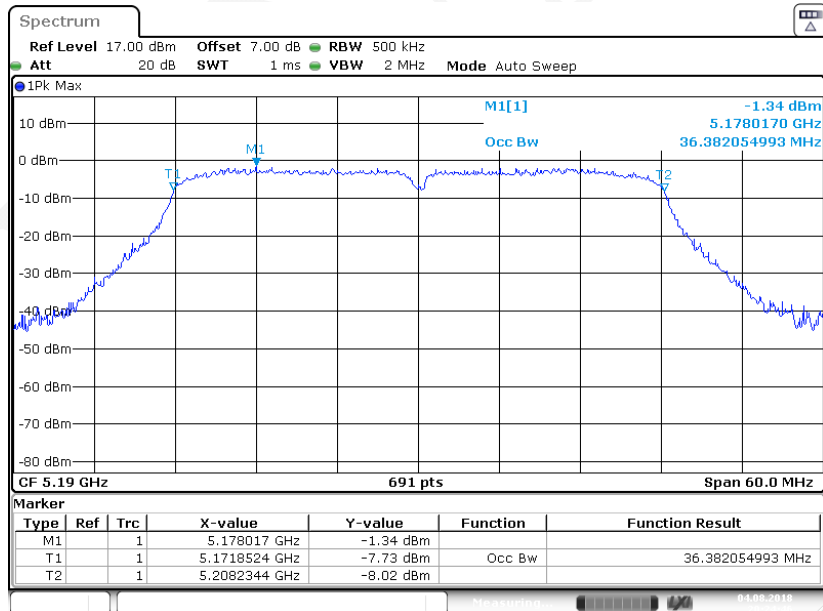


Date: 4 AUG 2018 20:24:46

802.11n-HT40 mode 5230MHz

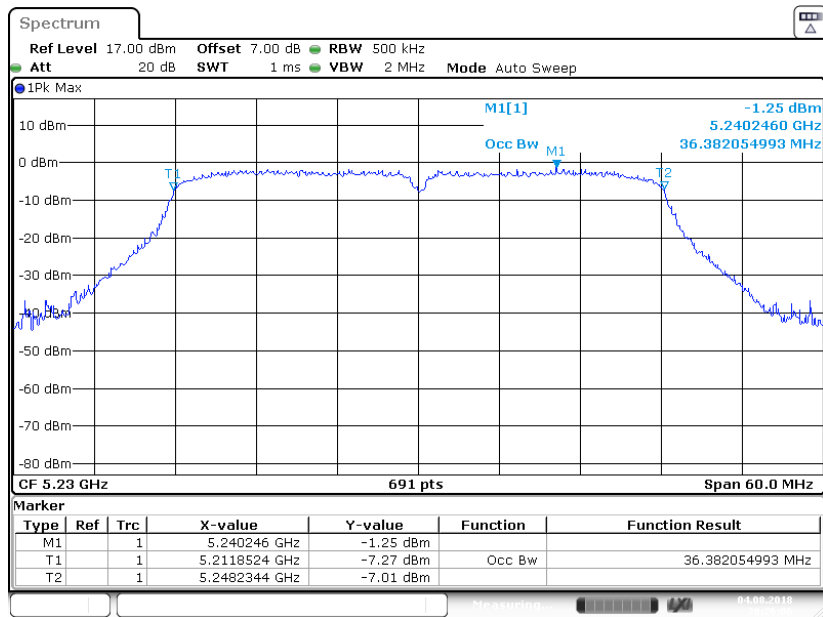


802.11ac80 mode 5210MHz

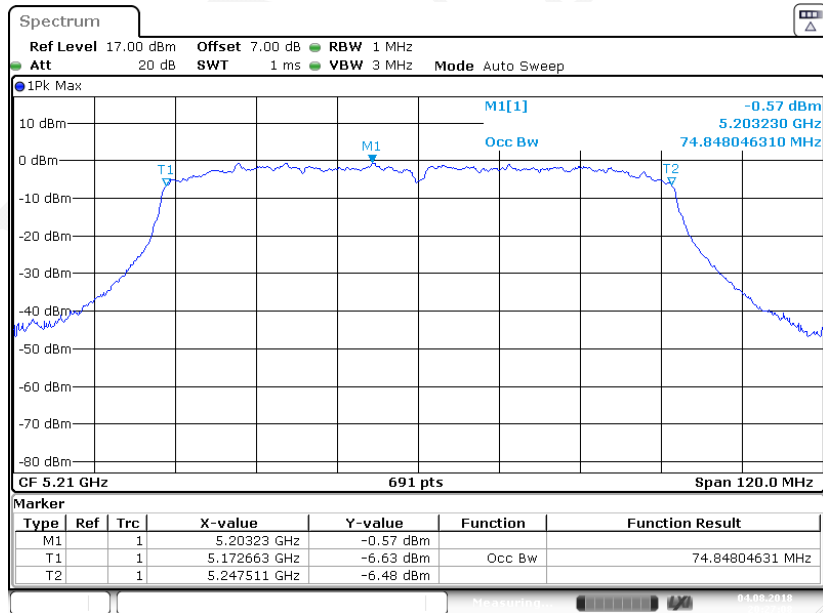


5725-5850 MHz Band:

6 Bandwidth


802.11a mode 5745MHz

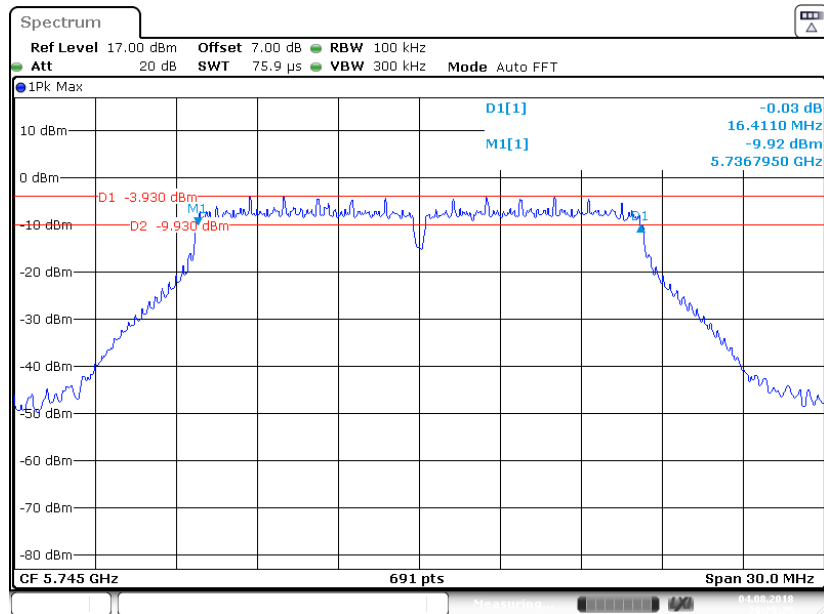


802.11a mode 5785MHz

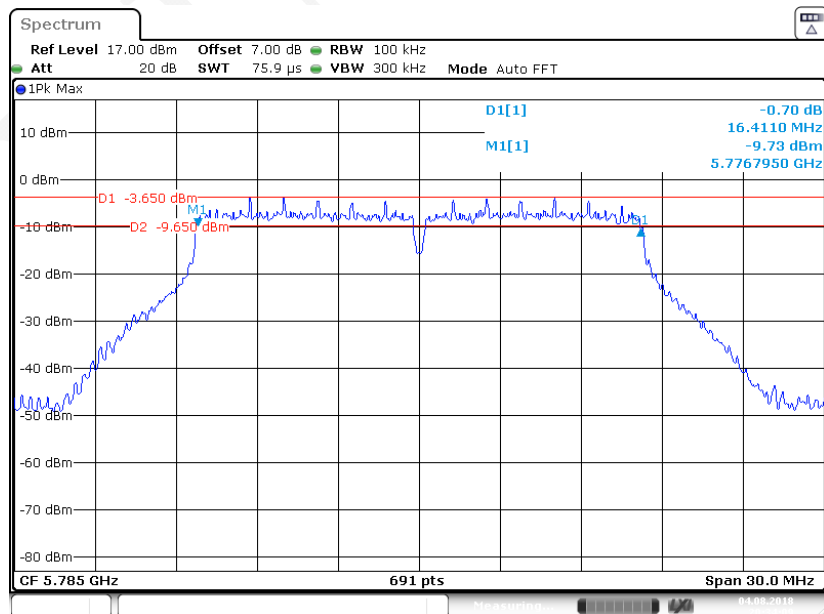


802.11a mode 5825MHz

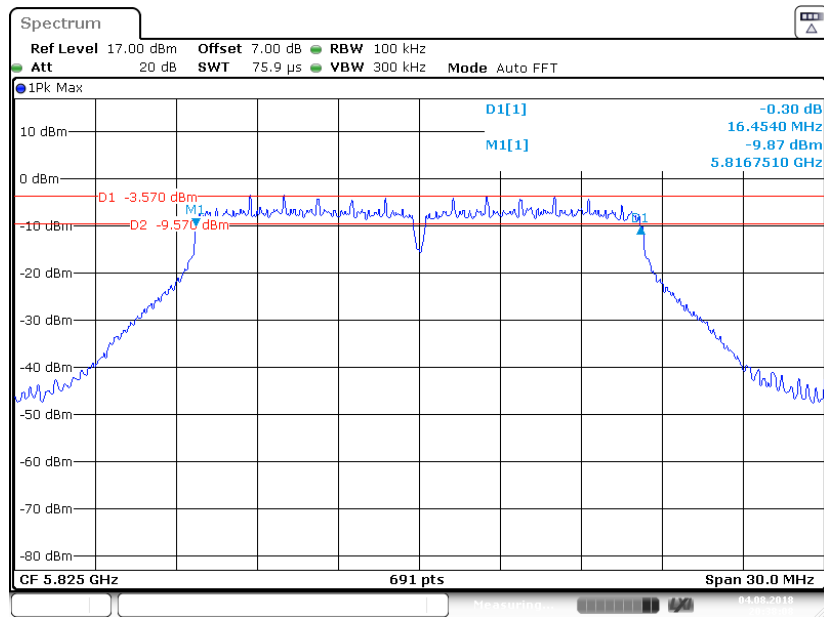


802.11ac20 mode 5745MHz

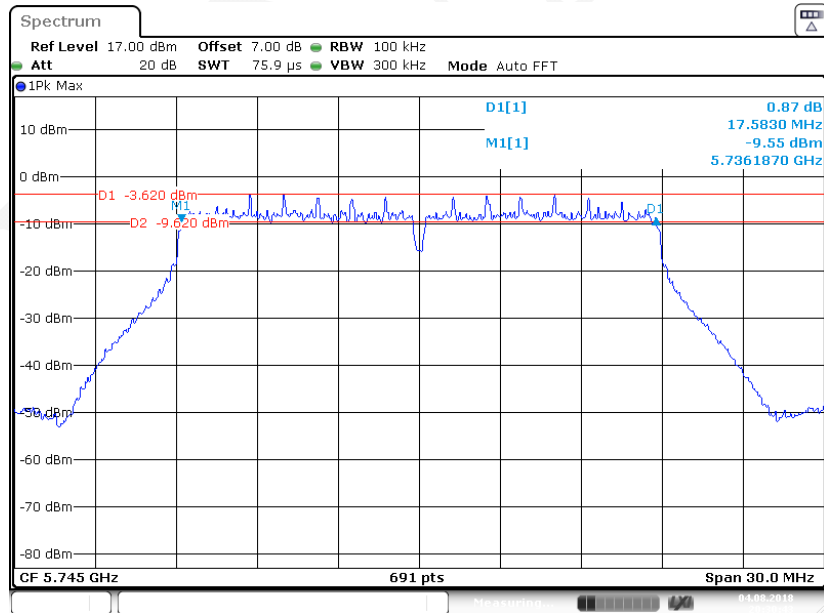


802.11ac20 mode 5785MHz

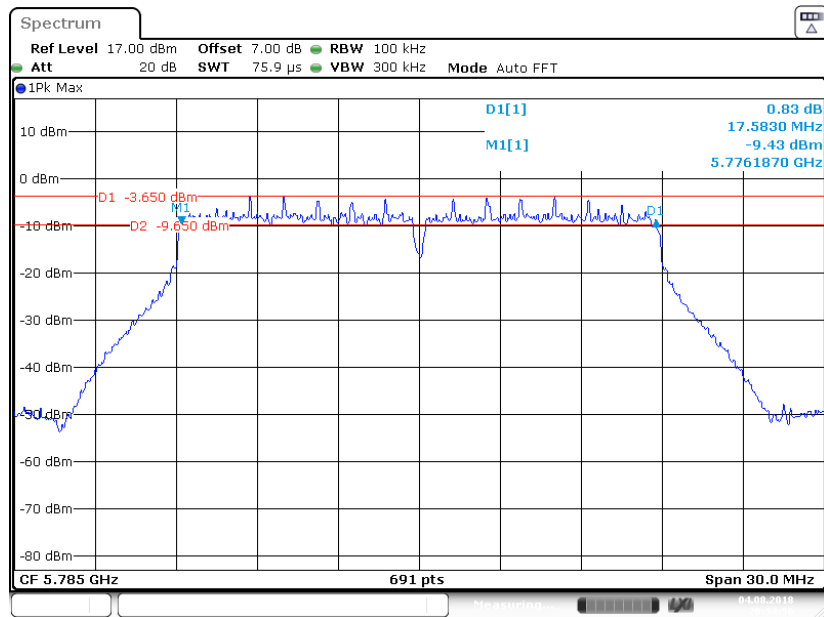


802.11ac20 mode 5825MHz

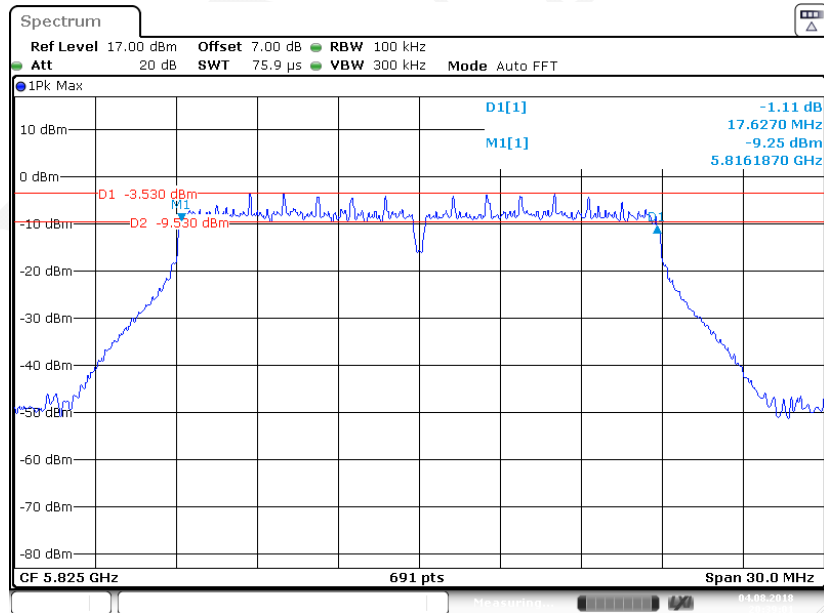


802.11n-HT20 mode 5745MHz

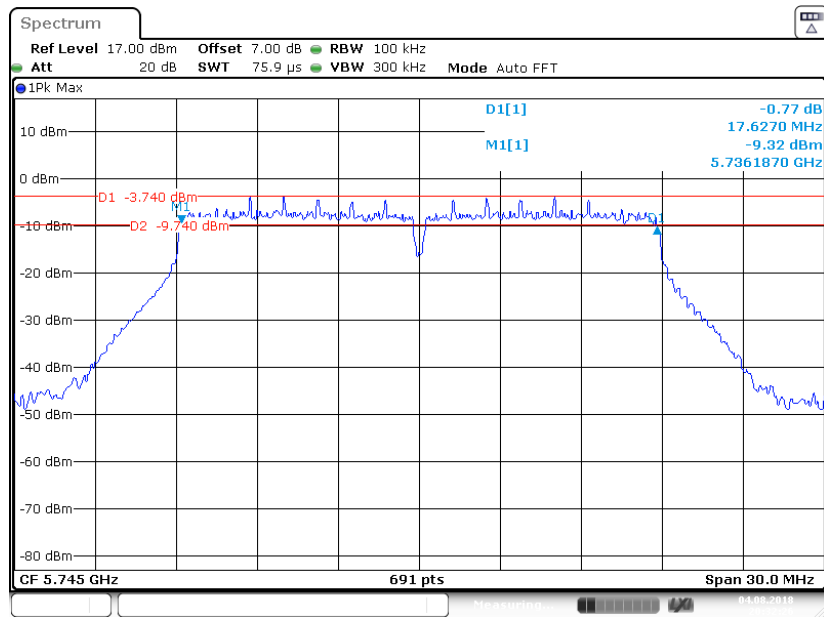

802.11n-HT20 mode 5785MHz

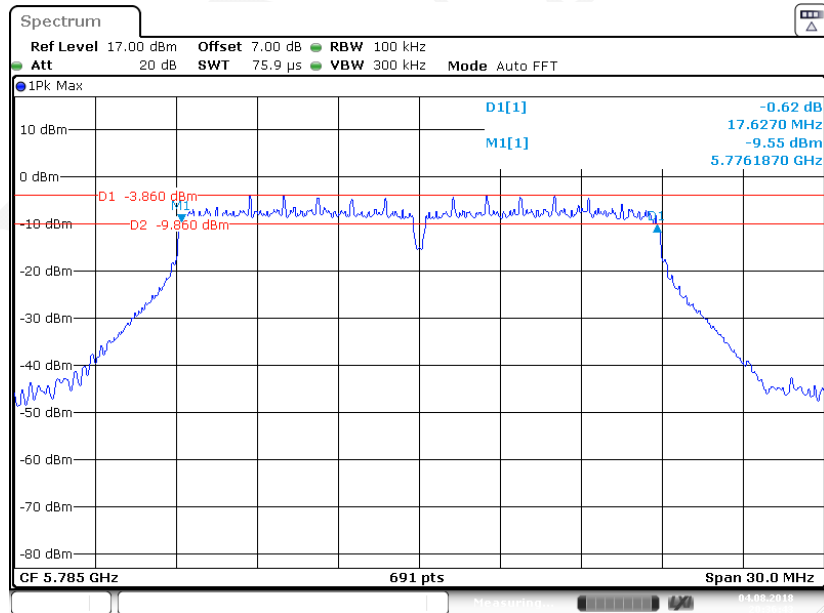


802.11n-HT20 mode 5825MHz

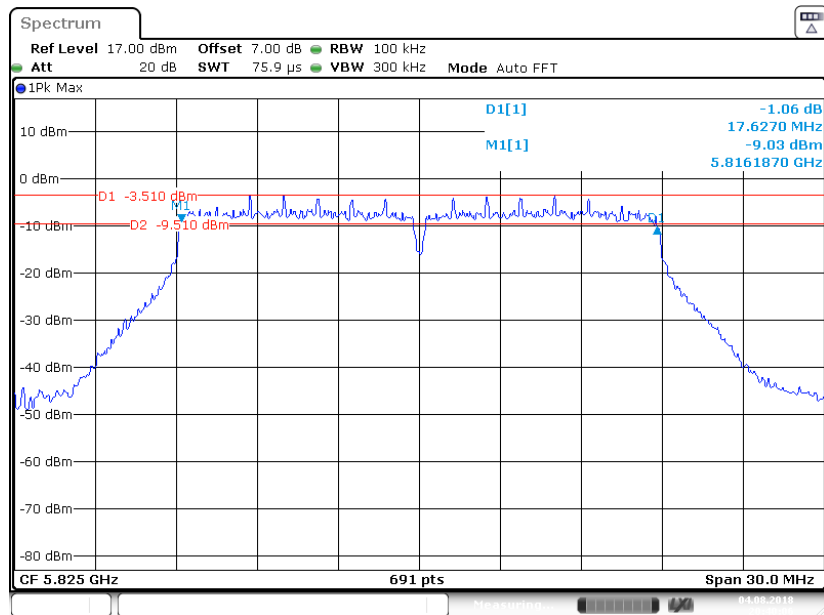


Date: 4 AUG 2018 20:40:06

802.11ac40 mode 5755MHz

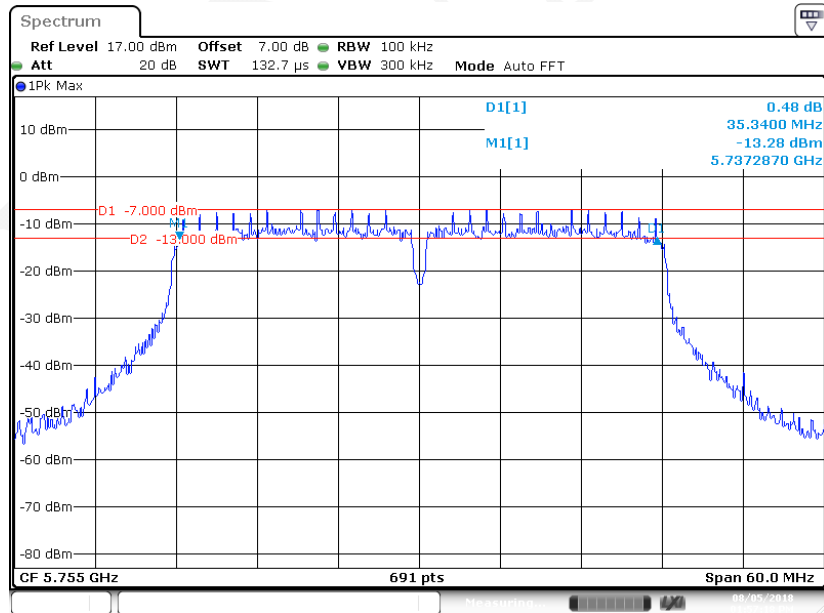


Date: 5 AUG 2018 13:57:18

802.11ac40 mode 5795MHz

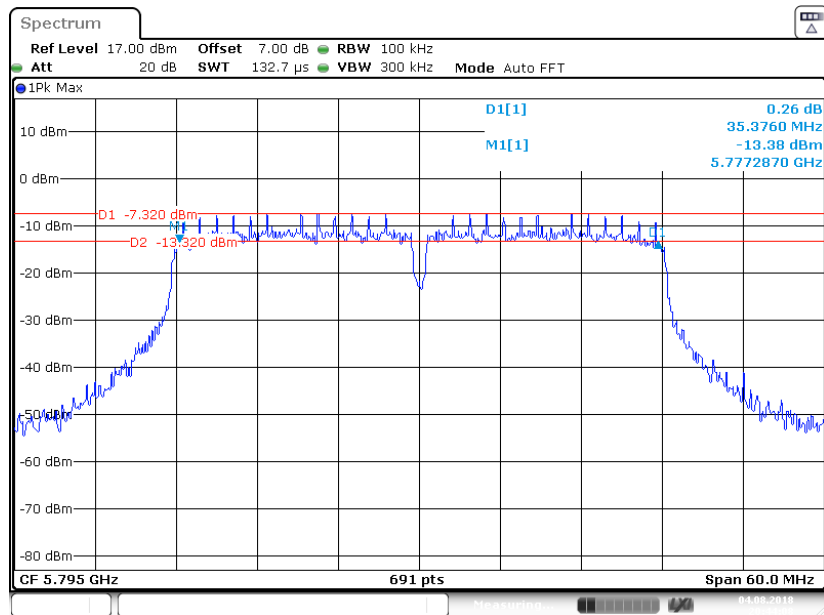


Date: 4 AUG 2018 20:44:09

802.11n-HT40 mode 5755MHz

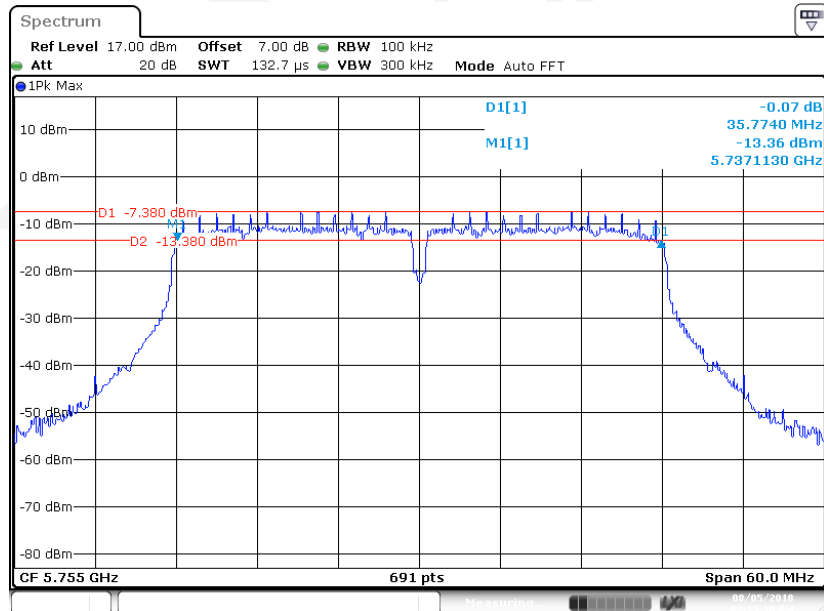


Date: 5 AUG 2018 14:23:18

802.11n-HT40 mode 5795MHz

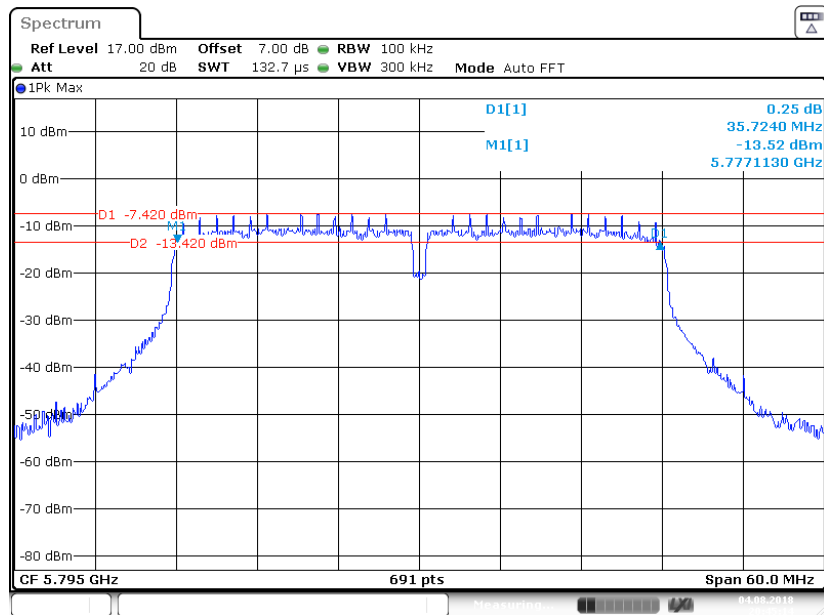

Date: 4 AUG 2018 20:45:14


802.11ac80 mode 5775MHz

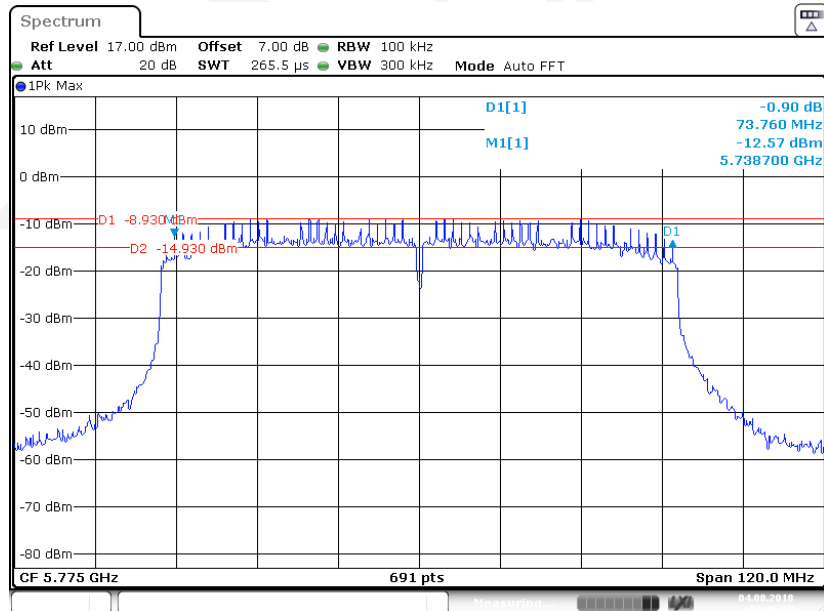

Date: 4 AUG 2018 20:46:35


99% Bandwidth

802.11a mode 5745MHz

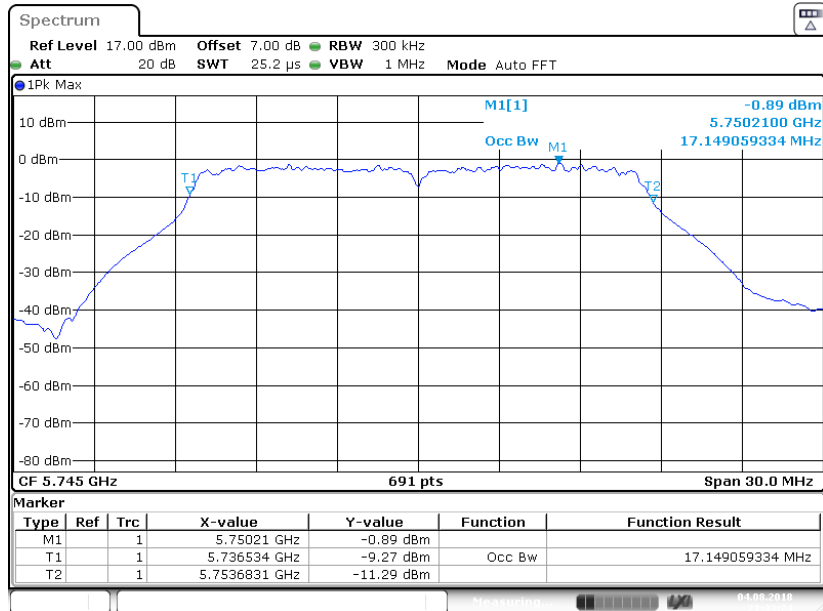


Date: 4 AUG 2018 21:33:24

802.11a mode 5785MHz

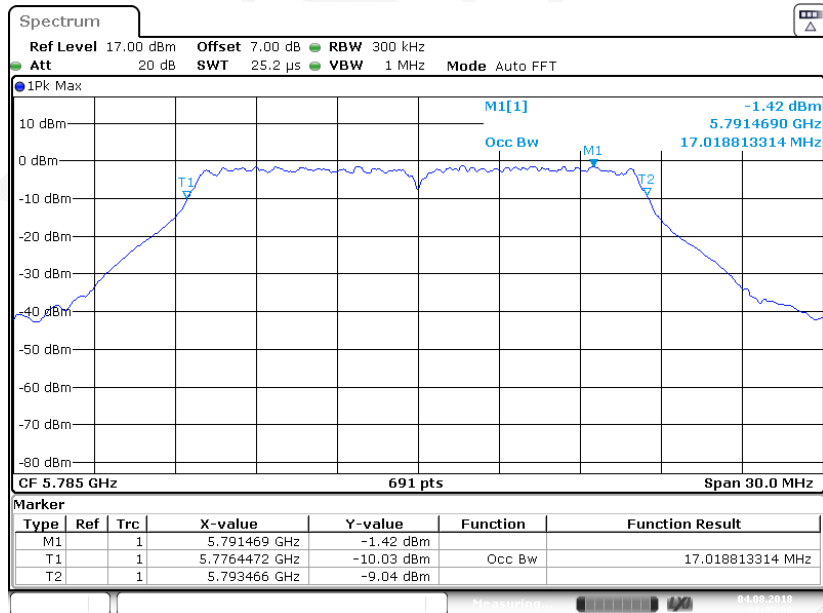


Date: 4 AUG 2018 21:35:36


802.11a mode 5825MHz

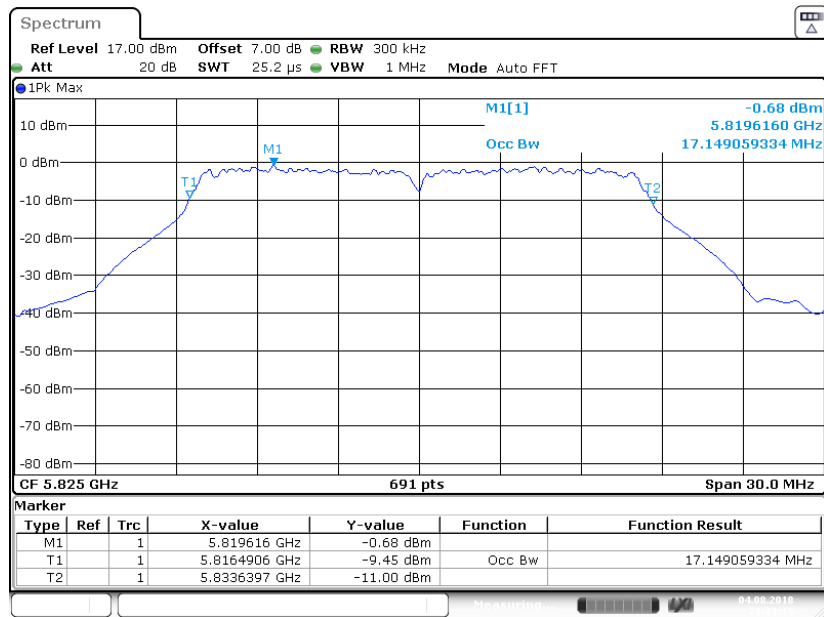

802.11ac20 mode 5745MHz

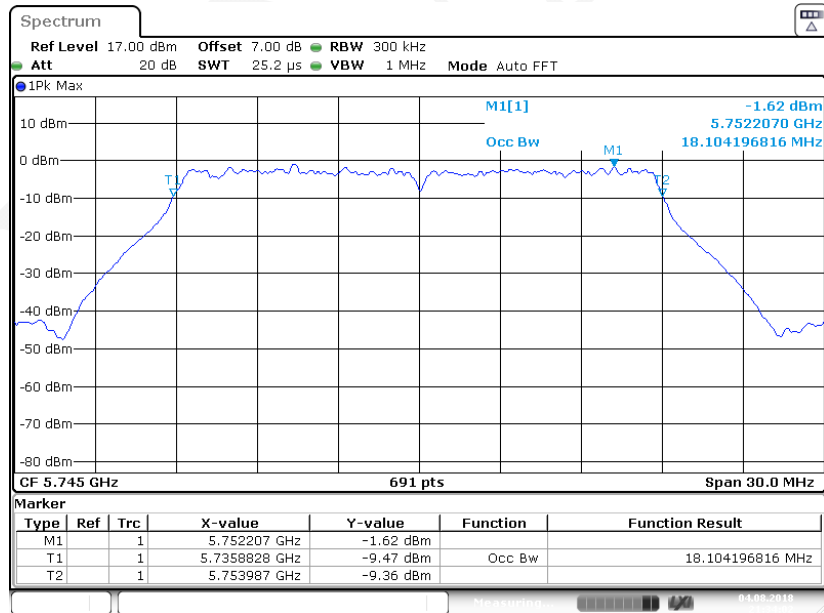


802.11ac20 mode 5785MHz

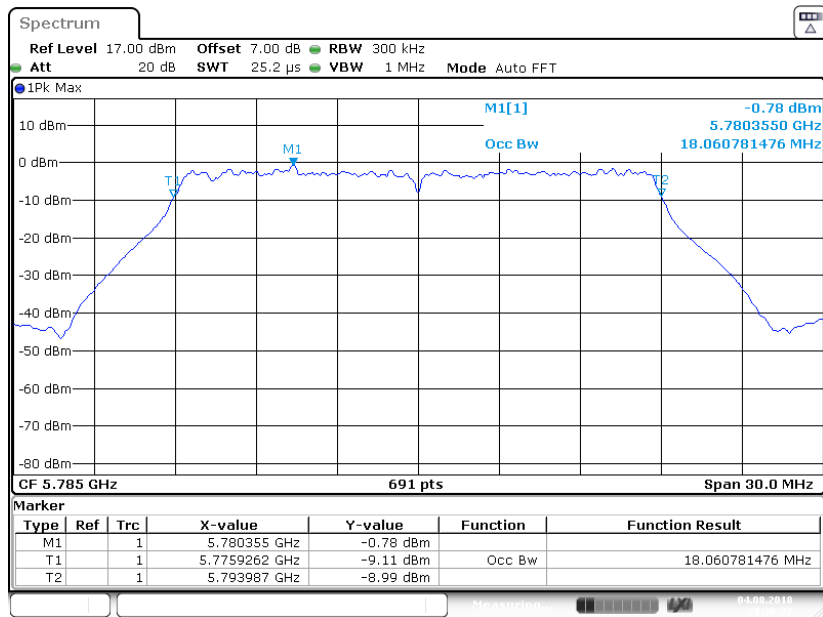


Date: 4 AUG 2018 21:36:27

802.11ac20 mode 5825MHz

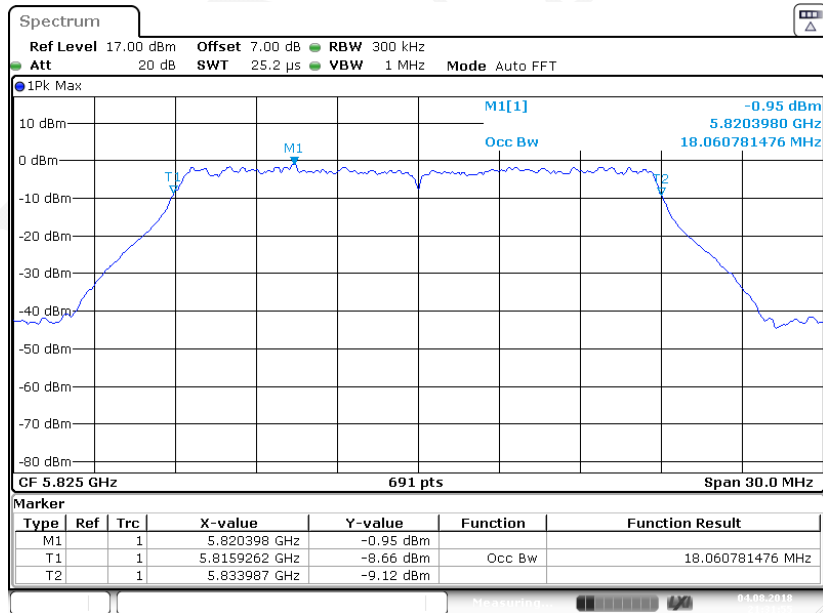


Date: 4 AUG 2018 21:31:55


802.11n-HT20 mode 5745MHz

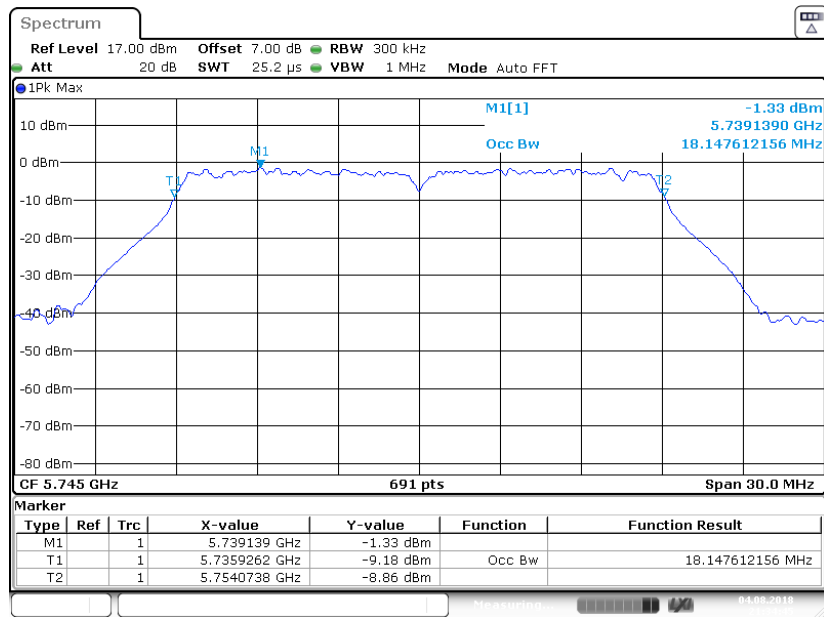


802.11n-HT20 mode 5785MHz

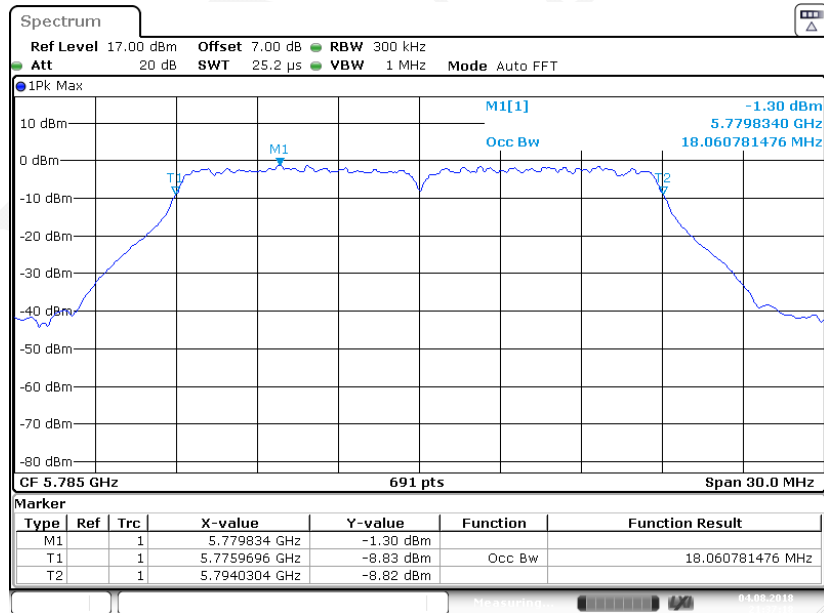


802.11n-HT20 mode 5825MHz

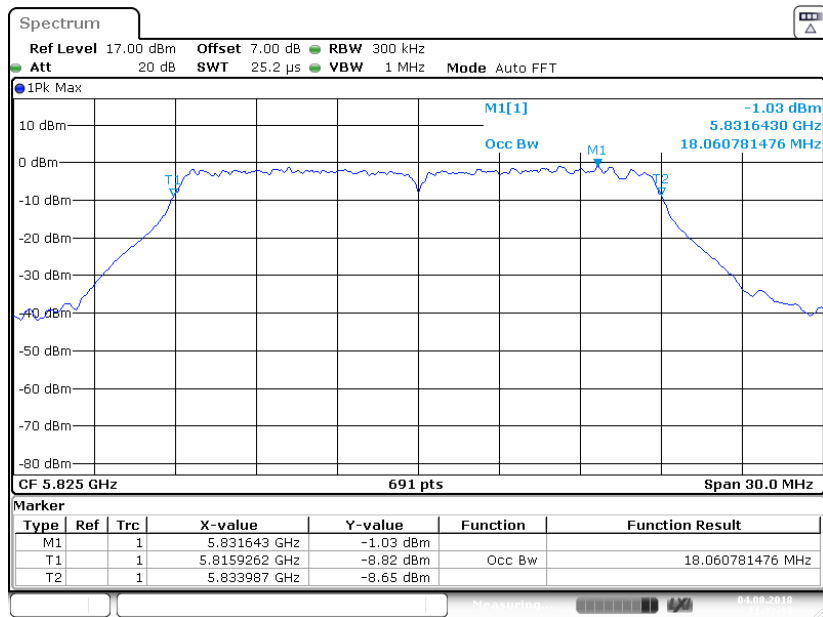

802.11ac40 mode 5755MHz

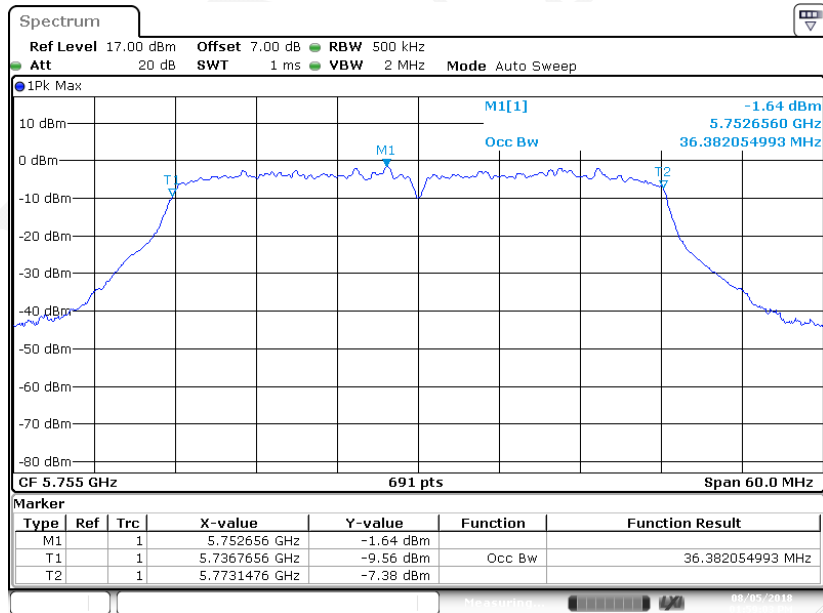


802.11ac40 mode 5795MHz

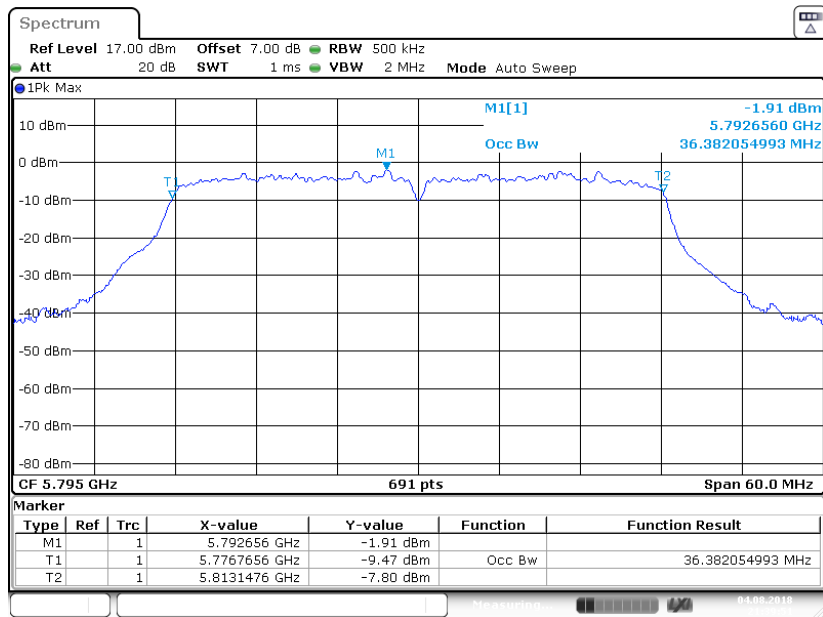


Date: 4 AUG 2018 21:39:51

802.11n-HT40 mode 5755MHz

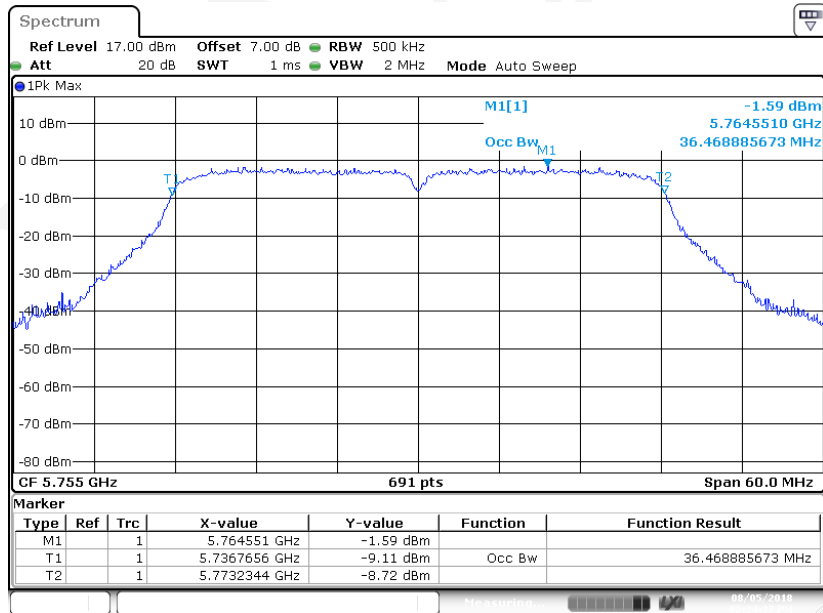


Date: 5 AUG 2018 14:24:36

802.11n-HT40 mode 5795MHz

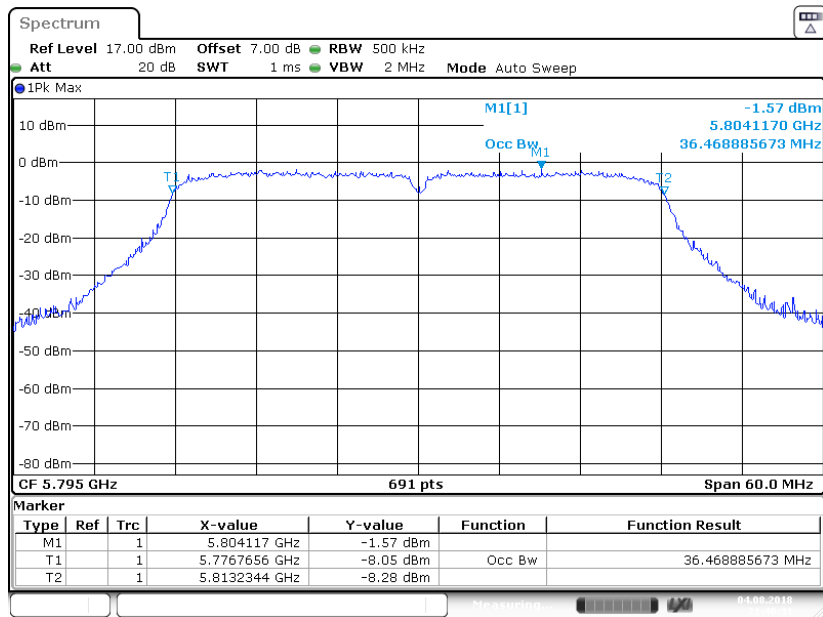

Date: 4 AUG 2018 21:40:31

802.11ac80 mode 5775MHz

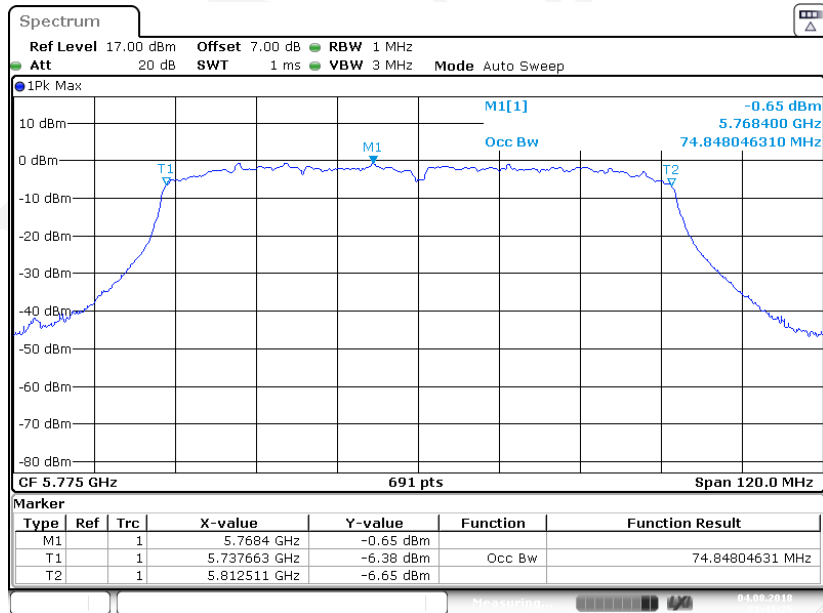

Date: 4 AUG 2018 21:41:25

FCC §15.407(a) (1), (3)– CONDUCTED TRANSMITTER OUTPUT POWER**Applicable Standard**


According to §15.407(a)

(1) (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	23.5 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Max Min on 2018-08-04.

Test Mode: Transmitting

Test mode	Band	Channel	Frequency (MHz)	Average Conducted Output Power (dBm)	Limit (dBm)	Result
802.11a	5150-5250 MHz	Low	5180	7.52	24	PASS
		Middle	5200	7.59	24	PASS
		High	5240	7.52	24	PASS
	5725-5850 MHz	Low	5745	7.54	30	PASS
		Middle	5785	7.48	30	PASS
		High	5825	7.68	30	PASS
802.11ac20	5150-5250 MHz	Low	5180	7.56	24	PASS
		Middle	5200	7.67	24	PASS
		High	5240	7.57	24	PASS
	5725-5850 MHz	Low	5745	7.58	30	PASS
		Middle	5785	7.52	30	PASS
		High	5825	7.57	30	PASS
802.11 n-HT20	5150-5250 MHz	Low	5180	6.78	24	PASS
		Middle	5200	6.82	24	PASS
		High	5240	6.79	24	PASS
	5725-5850 MHz	Low	5745	6.69	30	PASS
		Middle	5785	7.56	30	PASS
		High	5825	7.62	30	PASS
802.11ac40	5150-5250 MHz	Low	5190	7.55	24	PASS
		High	5230	7.61	24	PASS
	5725-5850 MHz	Low	5755	7.47	30	PASS
		High	5795	7.63	30	PASS
802.11 n-HT40	5150-5250 MHz	Low	5190	7.77	24	PASS
		High	5230	7.76	24	PASS
	5725-5850 MHz	Low	5755	7.64	30	PASS
		High	5795	7.54	30	PASS
802.11ac80	5150-5250 MHz	/	5210	7.65	24	PASS
	5725-5850 MHz	/	5775	7.46	30	PASS

Note: The Duty cycle factor was added to the result.

FCC §15.407(a) (1), (3) - POWER SPECTRAL DENSITY**Applicable Standard**

According to §15.407(a)

(1) (iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

The measurements are base on FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01:Guidelines for Compliance Testing of Unlicensed National Information Infrastructure(U-NII)Devices section F: Maximum power spectral density(PPSD)

Test Data**Environmental Conditions**

Temperature:	23.5 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Max Min on 2018-08-04 & 2018-08-05.

Test Mode: Transmitting

5150MHz-5250MHz:


Mode	Channel	Frequency (MHz)	PSD (dBm/MHz)	Dutycycle Factor (dB)	Total (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a	Low	5180	2.15	0.54	2.69	≤11	PASS
	Middle	5200	2.52	0.54	3.06	≤11	PASS
	High	5240	2.52	0.54	3.06	≤11	PASS
802.11ac20	Low	5180	1.69	0.75	2.44	≤11	PASS
	Middle	5200	1.54	0.75	2.29	≤11	PASS
	High	5240	1.73	0.75	2.48	≤11	PASS
802.11n-HT20	Low	5180	2.10	0.58	2.68	≤11	PASS
	Middle	5200	2.22	0.58	2.80	≤11	PASS
	High	5240	2.13	0.58	2.71	≤11	PASS
802.11ac40	Low	5190	-1.12	1.34	0.22	≤11	PASS
	High	5230	-1.21	1.34	0.13	≤11	PASS
802.11n-HT40	Low	5190	-1.64	1.09	-0.55	≤11	PASS
	High	5230	-1.32	1.09	-0.23	≤11	PASS
802.11ac80	/	5210	-3.79	2.41	-1.38	≤11	PASS

5725MHz-5850MHz:

Mode	Channel	Frequency MHz	PSD (dBm/500kHz)	Dutycycle Factor (dB)	Total (dBm/500kHz)	Limit (dBm/500kHz)	Result
802.11a	Low	5745	0.54	0.53	1.07	≤30	PASS
	Middle	5785	0.52	0.53	1.05	≤30	PASS
	High	5825	0.64	0.53	1.17	≤30	PASS
802.11ac20	Low	5745	0.40	0.73	1.13	≤30	PASS
	Middle	5785	0.16	0.73	0.89	≤30	PASS
	High	5825	0.79	0.73	1.52	≤30	PASS
802.11n-HT20	Low	5745	0.53	0.57	1.10	≤30	PASS
	Middle	5785	0.68	0.57	1.25	≤30	PASS
	High	5825	0.52	0.57	1.09	≤30	PASS
802.11ac40	Low	5755	-3.10	1.41	-1.69	≤30	PASS
	High	5795	-3.05	1.41	-1.64	≤30	PASS
802.11n-HT40	Low	5755	-3.16	1.11	-2.05	≤30	PASS
	High	5795	-3.14	1.11	-2.03	≤30	PASS
802.11ac80	/	5775	-5.53	2.33	-3.20	≤30	PASS


5150-5250 MHz Band:

802.11a mode 5180MHz

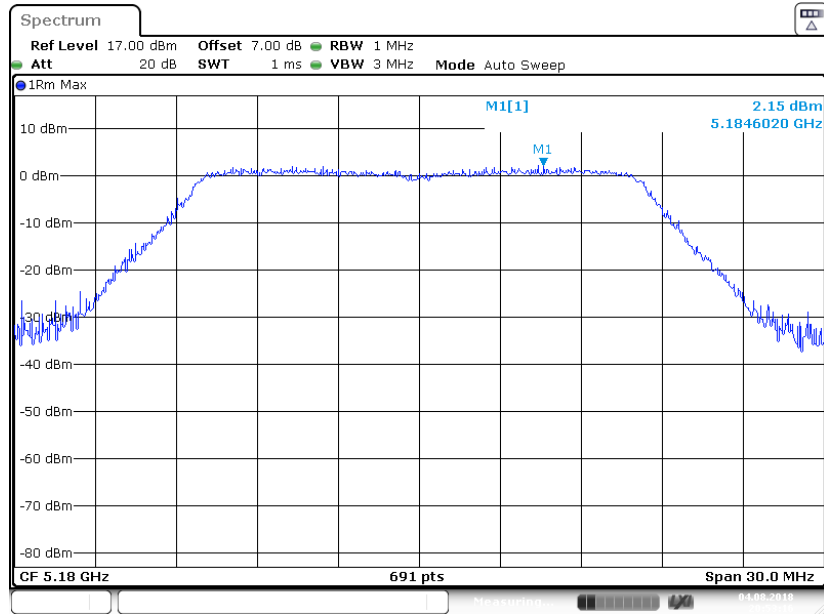


Date: 4 AUG 2018 20:53:17

802.11a mode 5200MHz

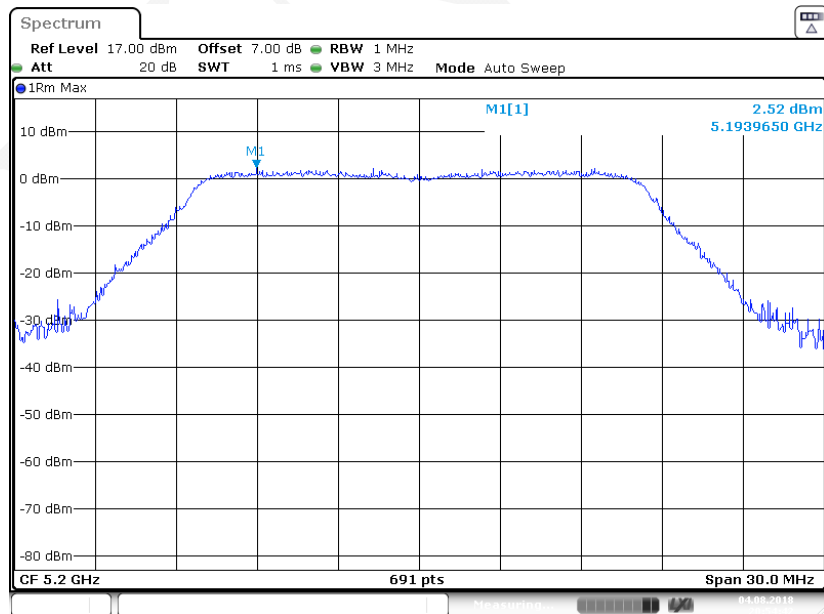


Date: 4 AUG 2018 20:54:42

802.11a mode 5240MHz

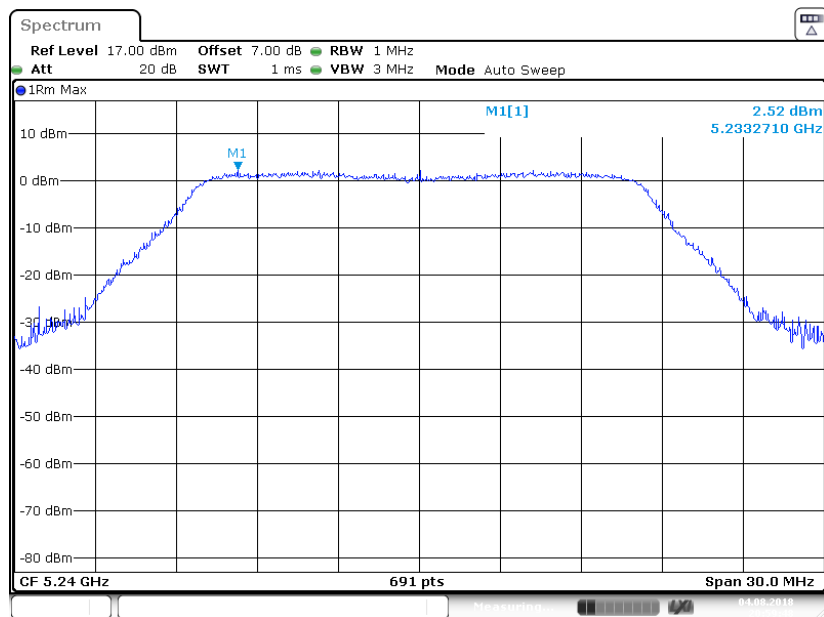


Date: 4 AUG 2018 20:59:49

802.11ac20 mode 5180MHz

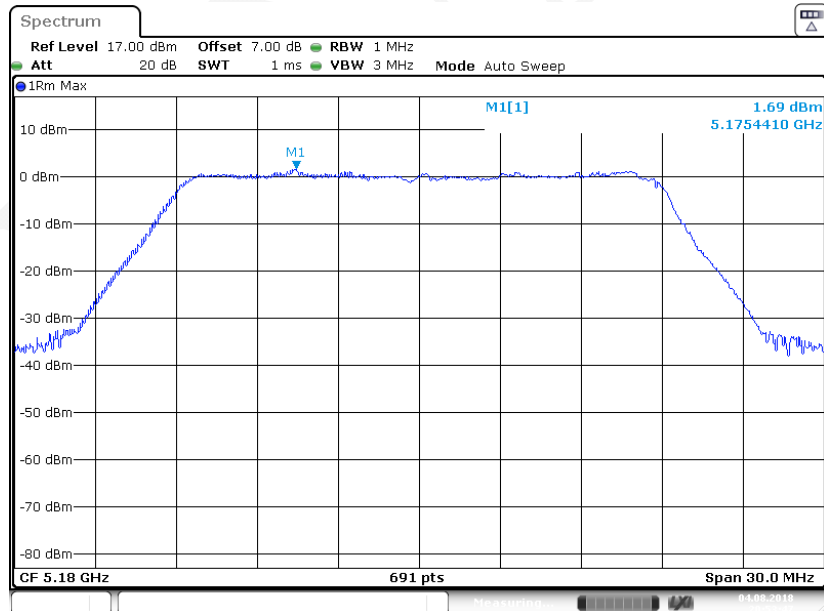


Date: 4 AUG 2018 20:53:48

802.11ac20 mode 5200MHz

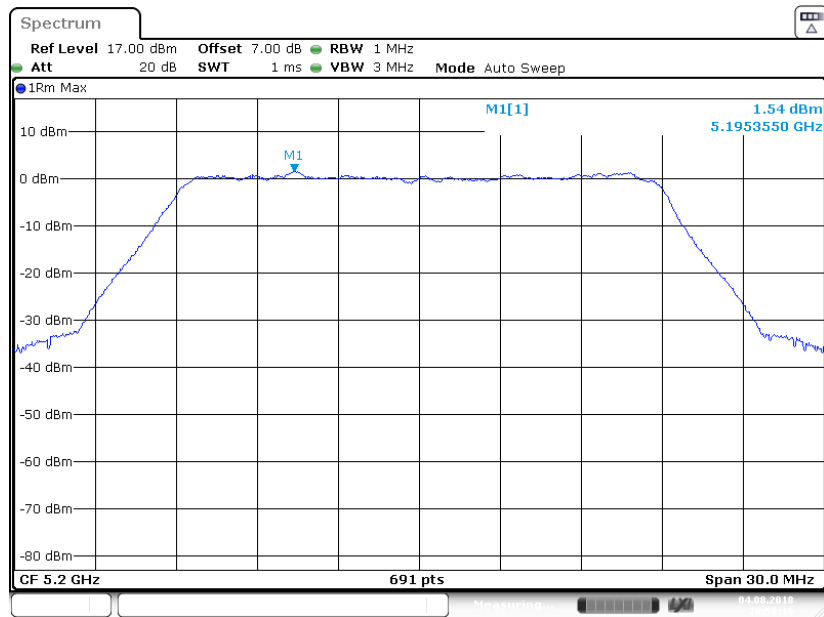


Date: 4 AUG 2018 20:58:16

802.11ac20 mode 5240MHz

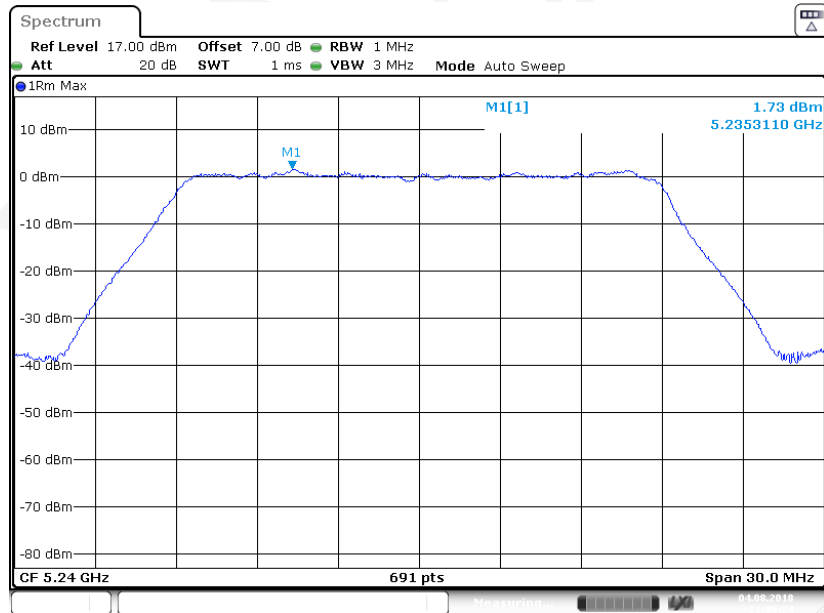


Date: 4 AUG 2018 21:00:24

802.11n-HT20 mode 5180MHz

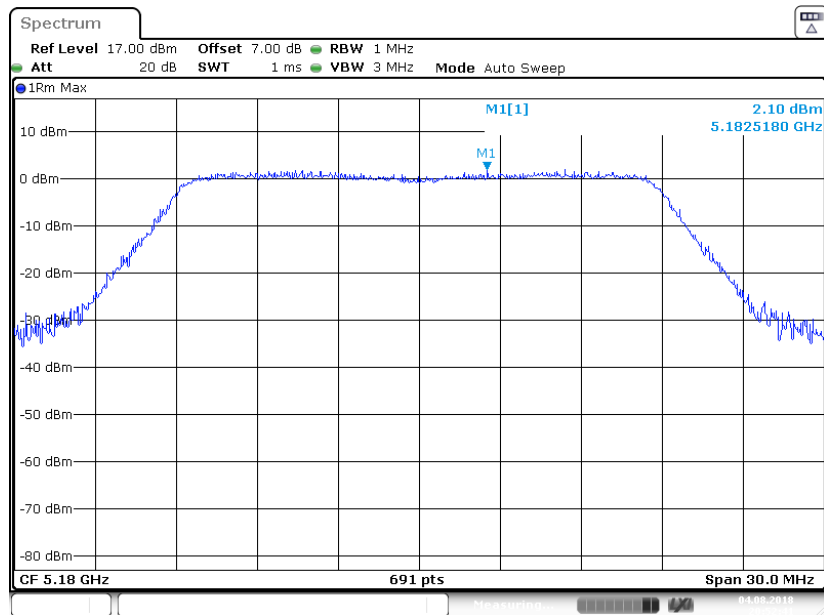


Date: 4 AUG 2018 20:52:41

802.11n-HT20 mode 5200MHz

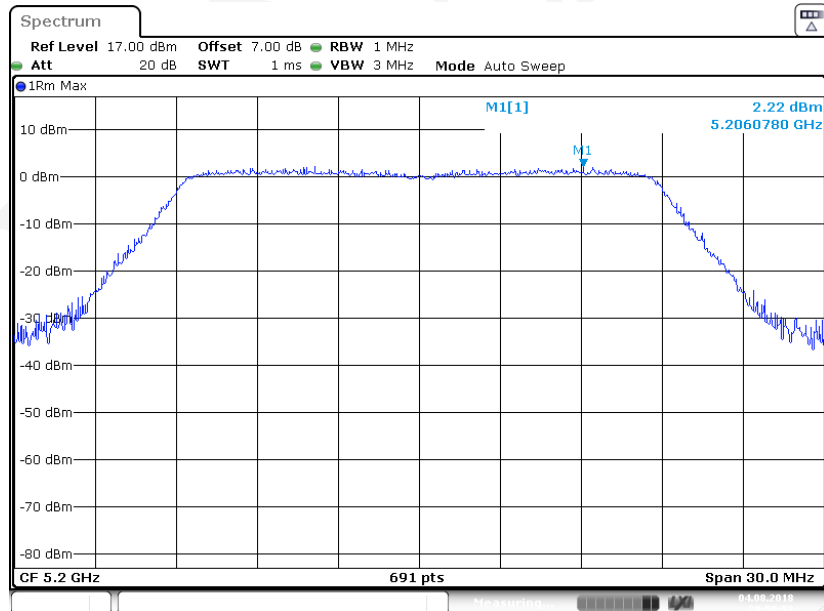


Date: 4 AUG 2018 20:58:53


802.11n-HT20 mode 5240MHz

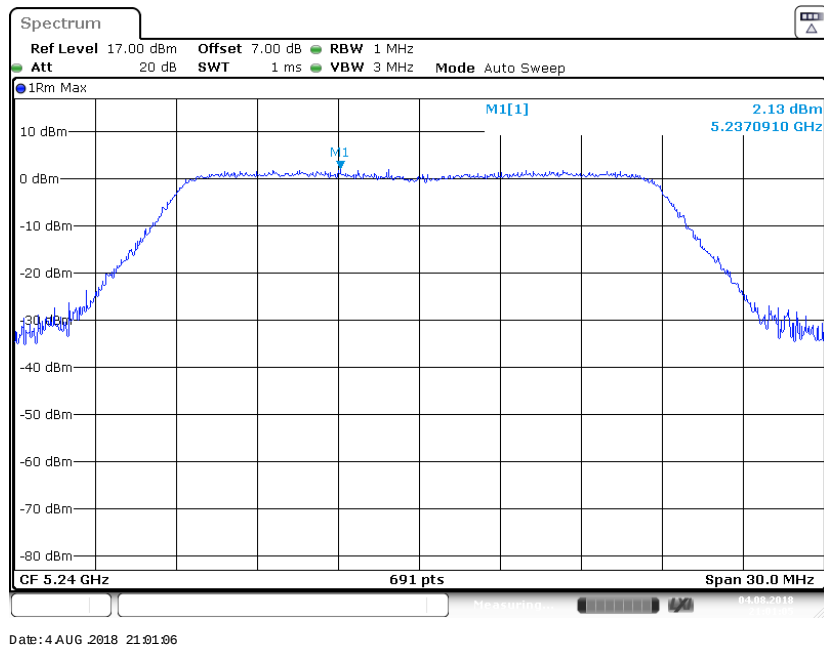

802.11ac40 mode 5190MHz

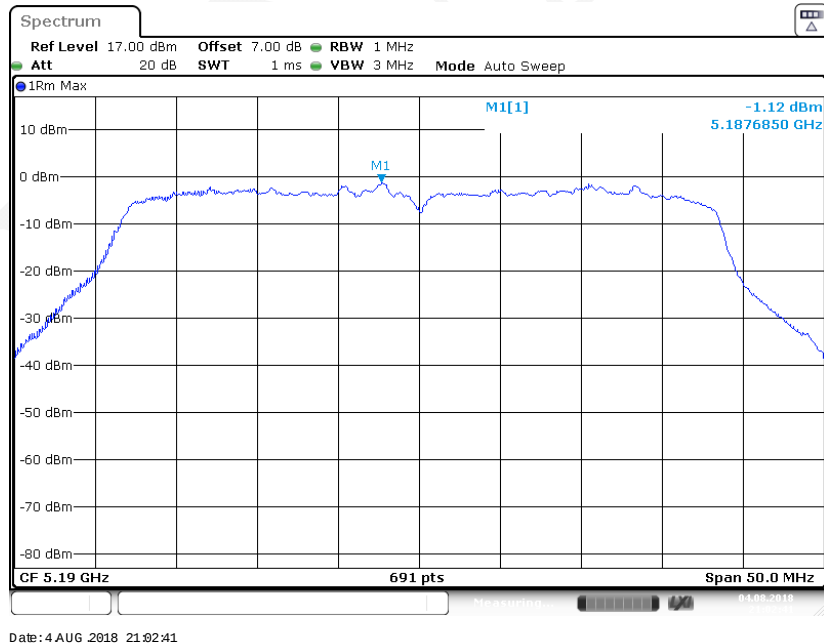


802.11ac40 mode 5230MHz

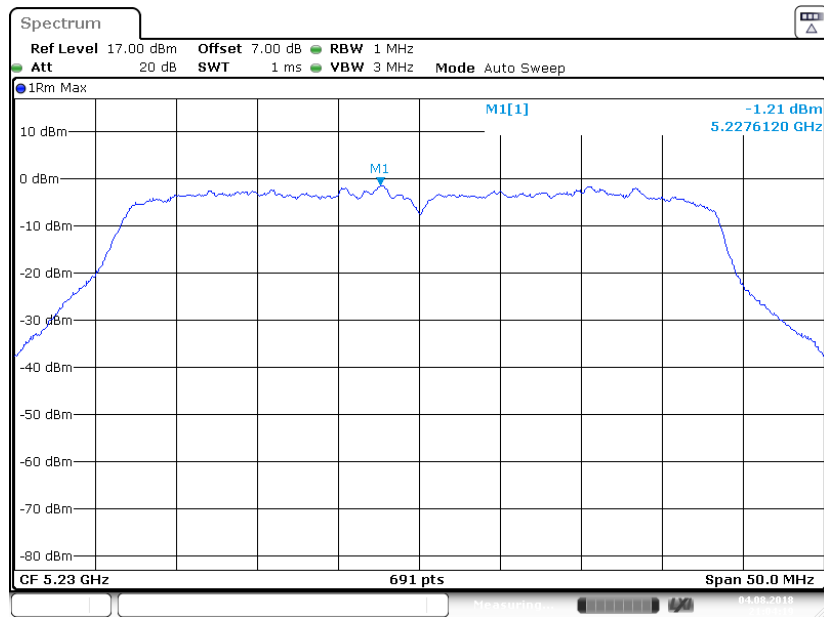


Date: 4 AUG 2018 21:04:19

802.11n-HT40 mode 5190MHz

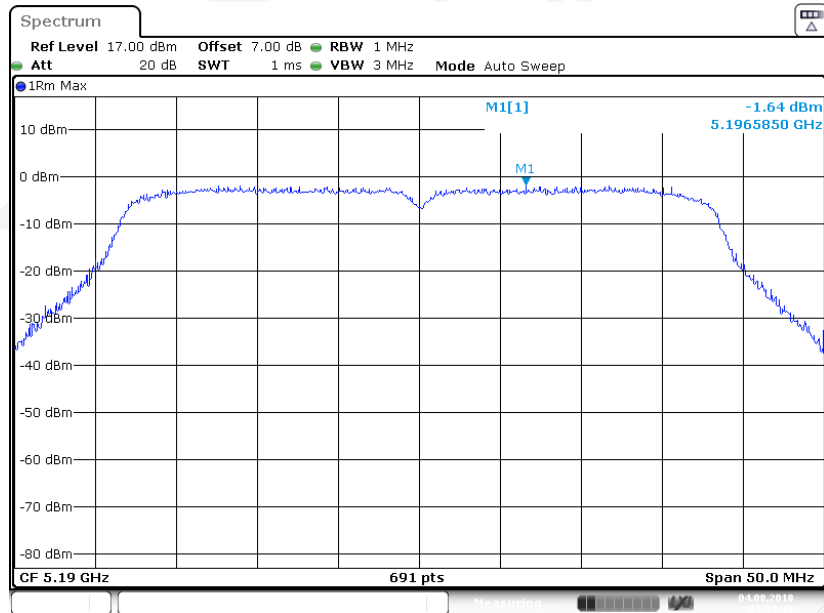


Date: 4 AUG 2018 21:03:27

802.11n-HT40 mode 5230MHz

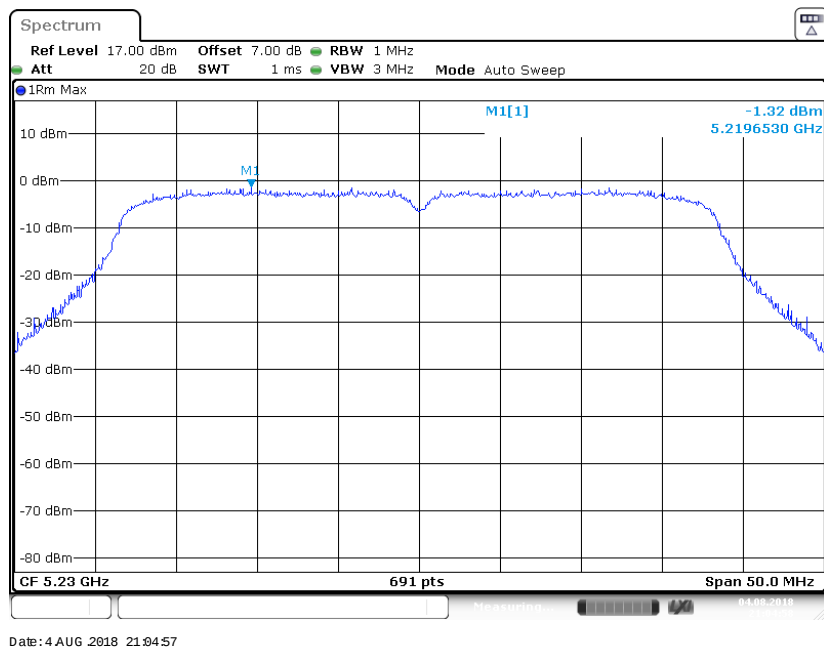


802.11ac80 mode 5210MHz

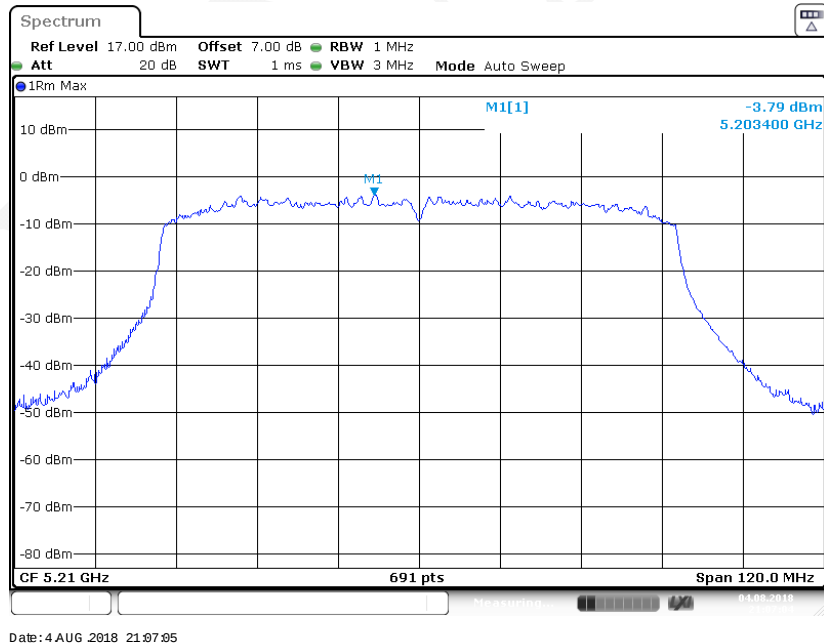


5725-5850 MHz Band:

802.11a mode 5745MHz

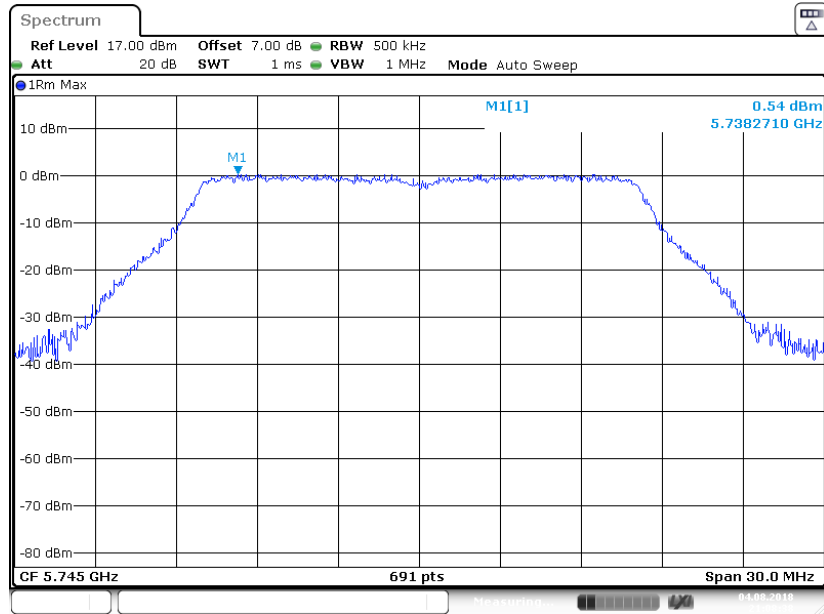


Date: 4 AUG 2018 21:08:38

802.11a mode 5785MHz

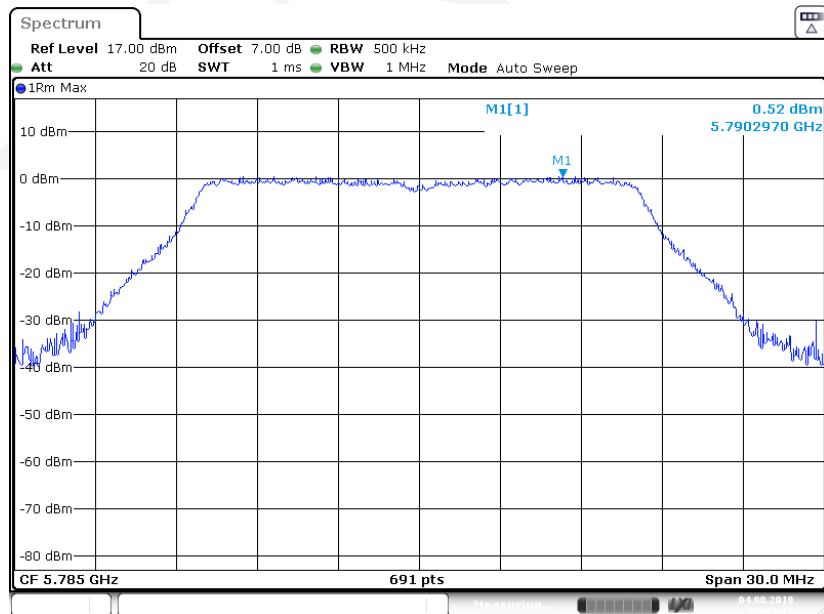


Date: 4 AUG 2018 21:11:18


802.11a mode 5825MHz

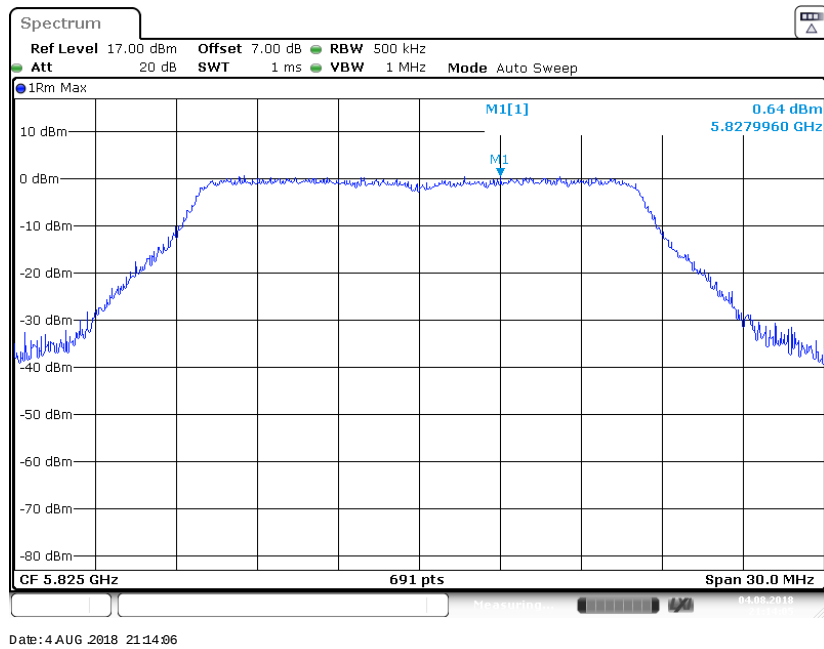

802.11ac20 mode 5745MHz

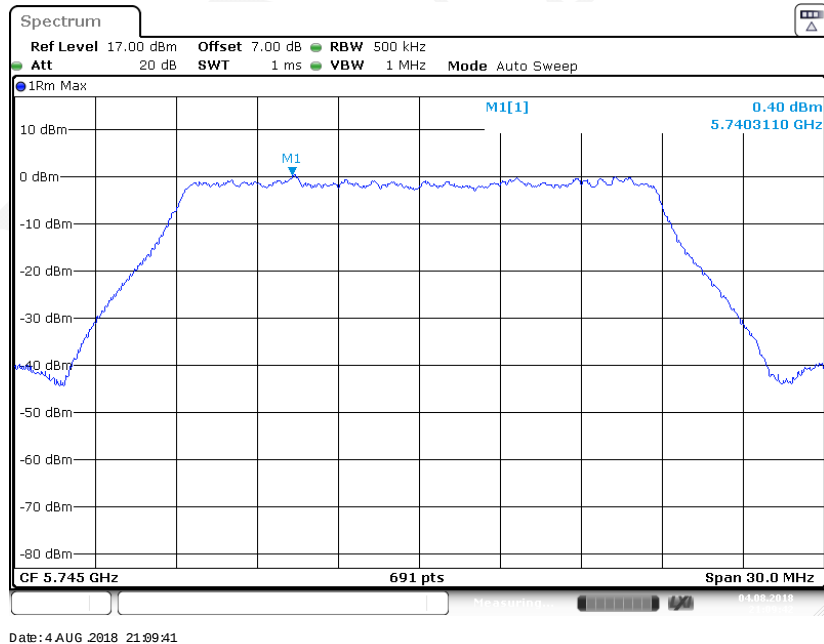


802.11ac20 mode 5785MHz

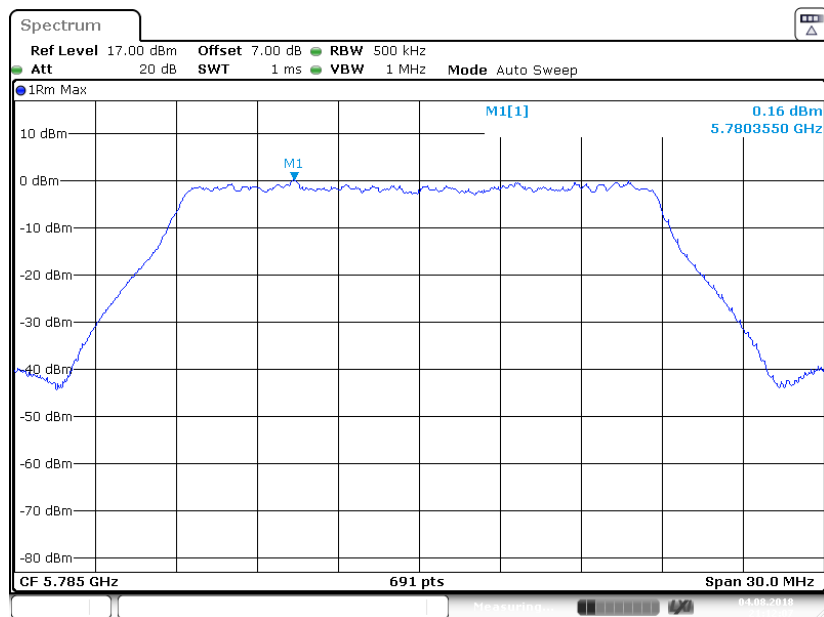


Date: 4 AUG 2018 21:12:07

802.11ac20 mode 5825MHz

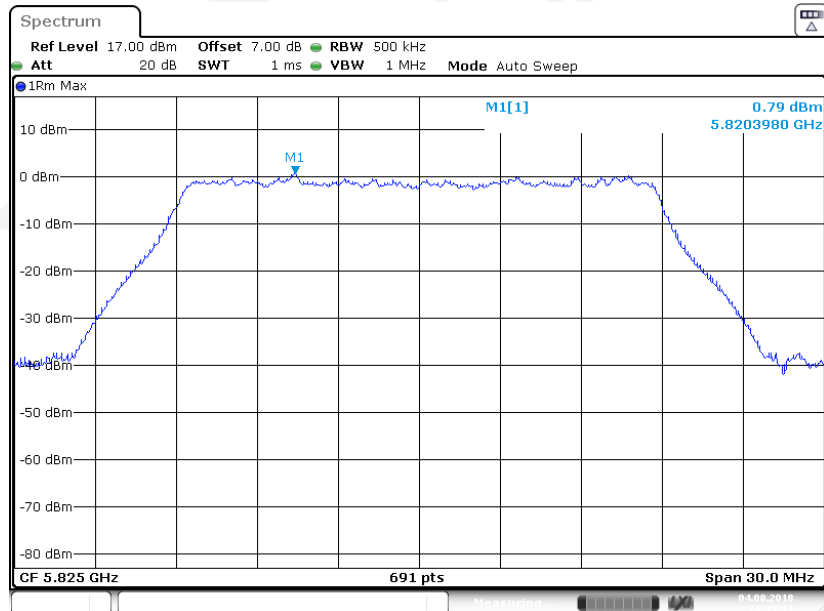


Date: 4 AUG 2018 21:15:11

802.11n-HT20 mode 5745MHz

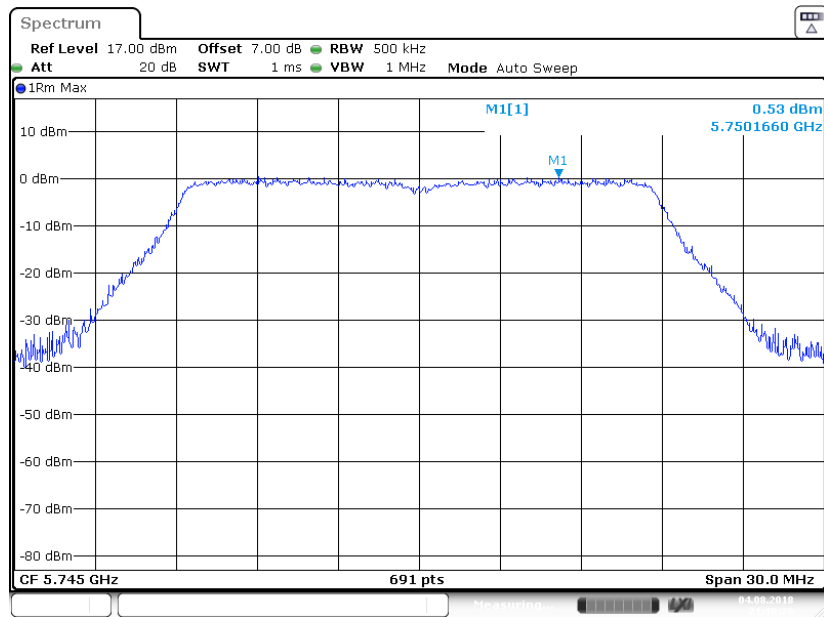


Date: 4 AUG 2018 21:10:26

802.11n-HT20 mode 5785MHz

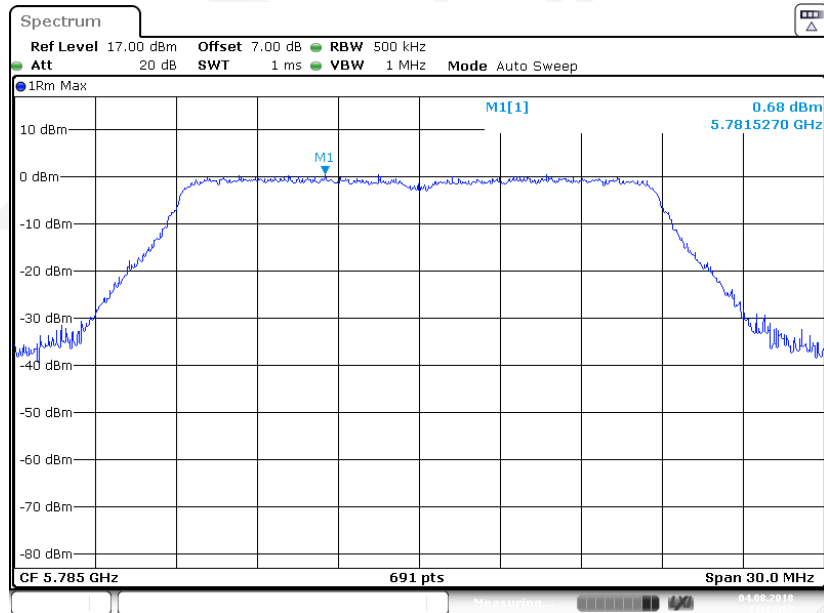


Date: 4 AUG 2018 21:12:58

802.11n-HT20 mode 5825MHz

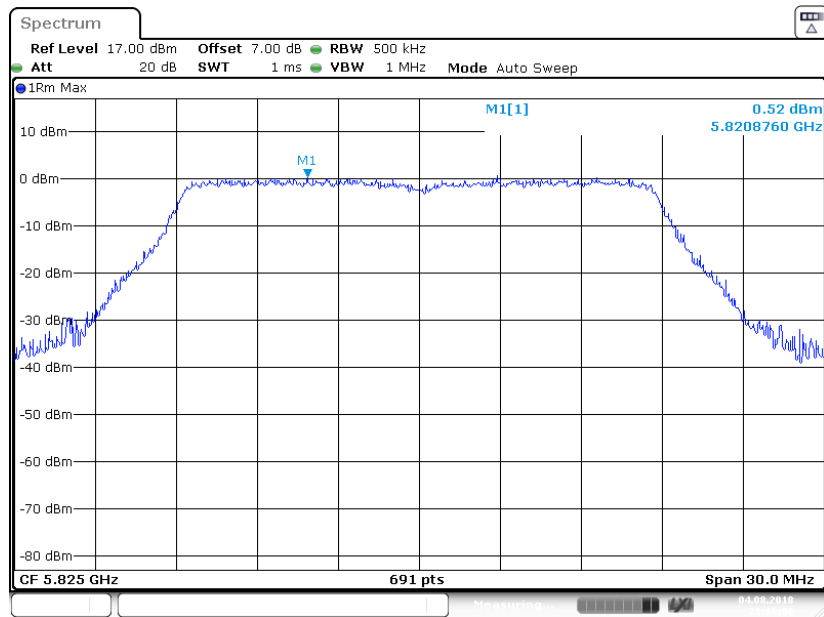


Date: 4 AUG 2018 21:16:06

802.11ac40 mode 5755MHz

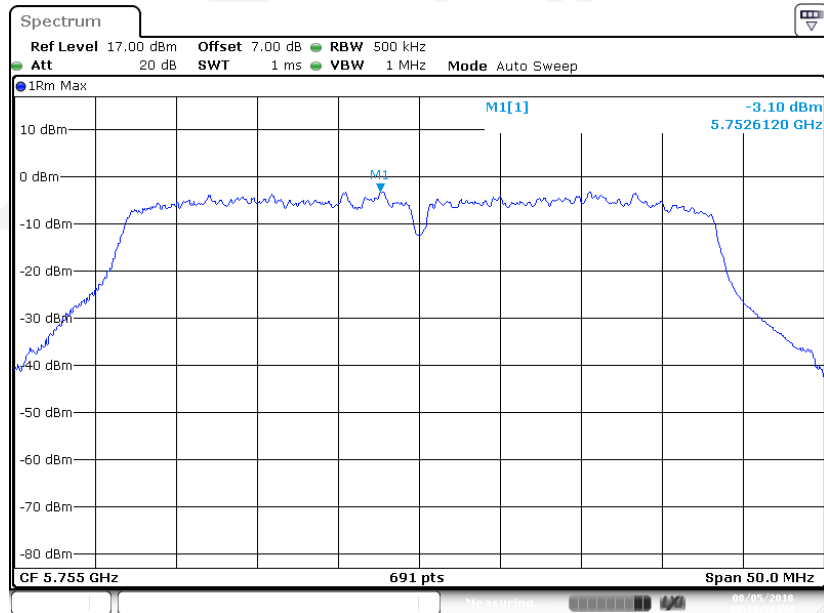


Date: 5 AUG 2018 14:10:52

802.11ac40 mode 5795MHz

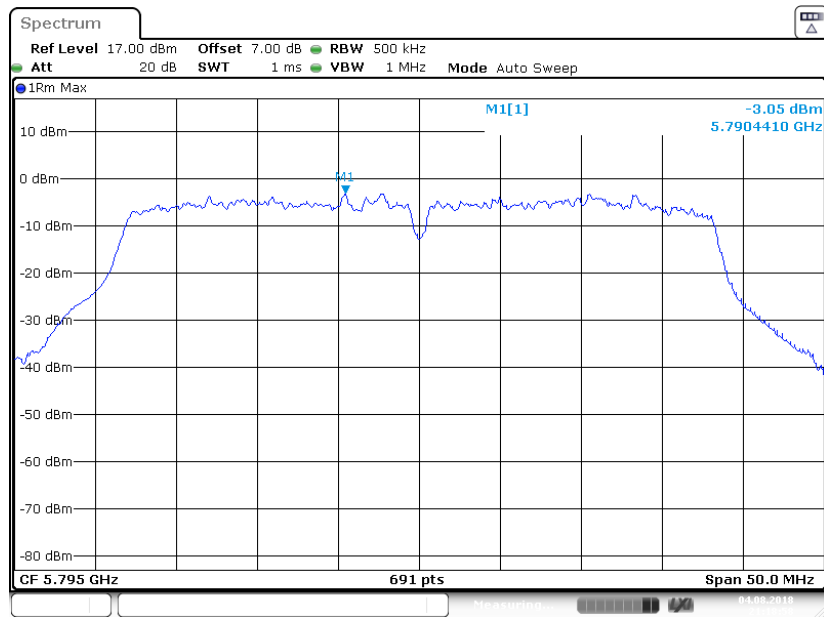


Date: 4 AUG 2018 21:18:59

802.11n-HT40 mode 5755MHz

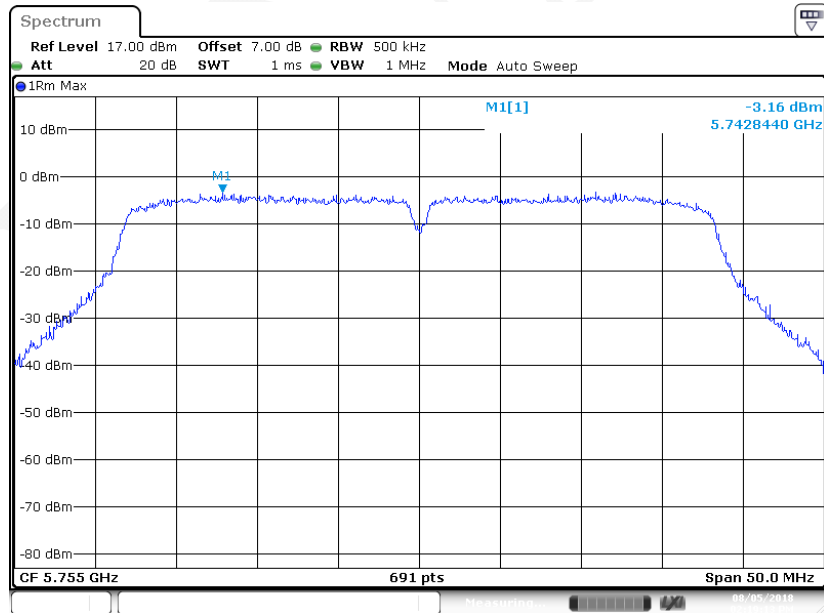


Date: 5 AUG 2018 14:19:14

802.11n-HT40 mode 5795MHz

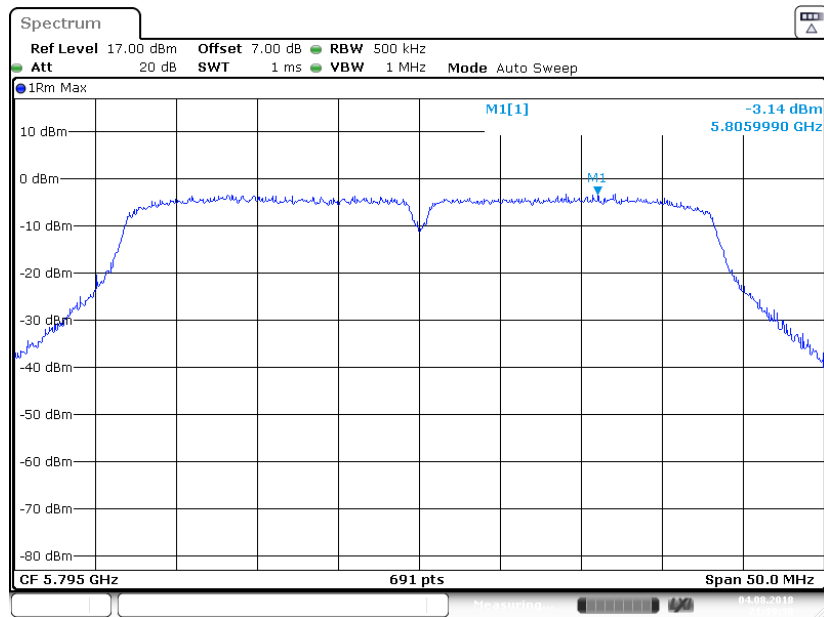

Date: 4 AUG 2018 21:19:38

802.11ac80 mode 5775MHz

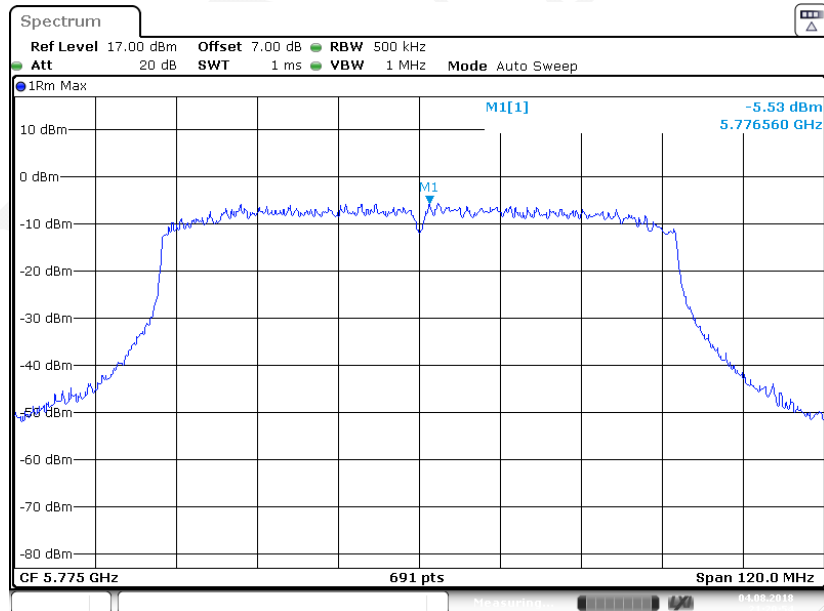

Date: 4 AUG 2018 21:20:54

***** END OF REPORT *****