

FCC PART 15.249

TEST REPORT

For

Keeson Technology Corporation Limited

No. 158, Qiumao Road, Wangjiangjing Xiuzhou district Jiaxing, Zhejiang China

FCC ID: 2AK23MC210

Report Type: CIIPC	Product Type: CONTROL BOX
Test Engineer: Matt Yao 	
Report Number: RSHA190626002-00B	
Report Date: 2019-07-09	
Reviewed By: Oscar Ye  RF Leader	
Test Laboratory: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC§15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	10
TEST PROCEDURE	10
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION.....	14
APPLICABLE STANDARD	14
EUT SETUP	14
TEST EQUIPMENT SETUP.....	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST RESULTS SUMMARY	15
TEST DATA	15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Keeson Technology Corporation Limited
Tested Model	MC210
Series Model	MC210BS、MC210TS、MC210SP、MC210KL、MC210LT、MC210BK
Model Difference	Model name
Product Type	CONTROL BOX
Dimension	148mm(L)*63mm(W)*36mm(H)
Power Supply	AC 100V~240V/DC 2*9V from batteries

All measurement and test data in this report was gathered from production sample serial number: 20190626002. (Assigned by BACL, Kunshan). The EUT was received on 2019-06-26.

Objective

This type approval report is prepared on behalf of Keeson Technology Corporation Limited in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

This is a CIIPC report based on the original report RSHA190123005-00B with FCC ID: 2AK23MC210 that grant on 2019-03-18, the differences between the original device and the current one are as follows:

A power drop protection circuit is added to the PCB board; it affects a lot on Conduction Emissions and Radiated Emissions (Below 1GHz) which were presented in this report, and other data were referred to the original report.

Related Submittal(s)/Grant(s)

FCC Part 15.249 DXX grant with FCC ID: PCU-RF372A.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Lab Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01), the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISSED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403	40	2442
2	2404	...	...
...	...	...	...
38	2440	77	2479
39	2441	78	2480

EUT was tested with Channel 1, 40 and 78.

EUT Exercise Software

RF test tool: UartAssist.exe

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
OKIN	Motor	B15527	68001060150187285017
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
OKIN	Debug Board	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
Power cable	1.0	EUT	Motor
SYNC Cable	0.2	EUT	Debug Board
DC Cable	1.0	Debug Board	Notebook
AC Power Cord	1.8	Adapter	LISN-2/AC Source/Socket

Block Diagram of Test Setup

For Conducted Emissions:

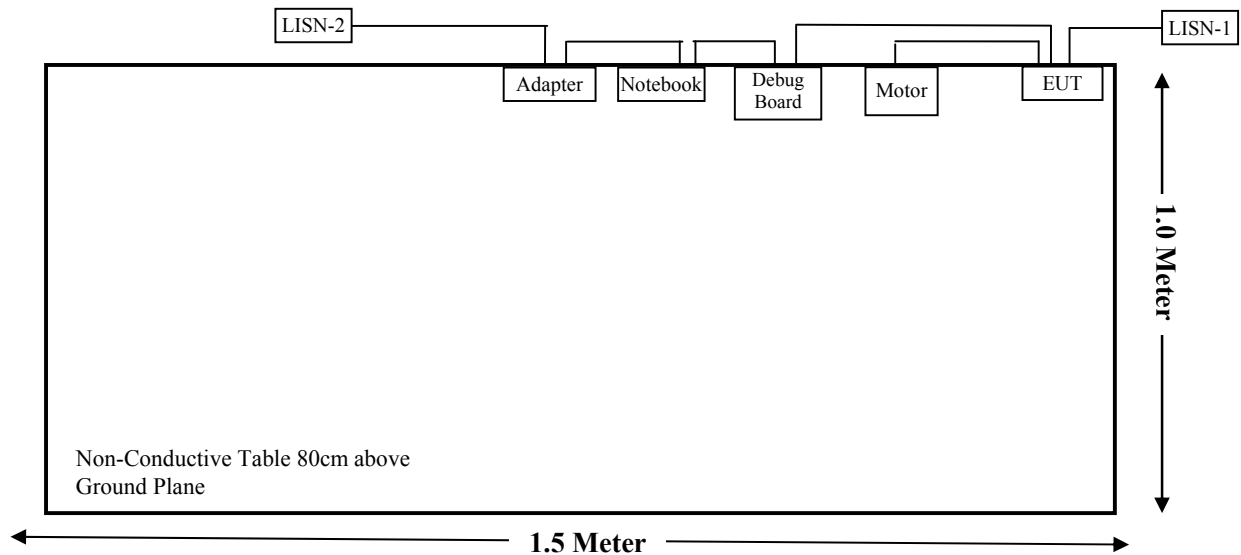

For Radiated Emissions(Below 1GHz):

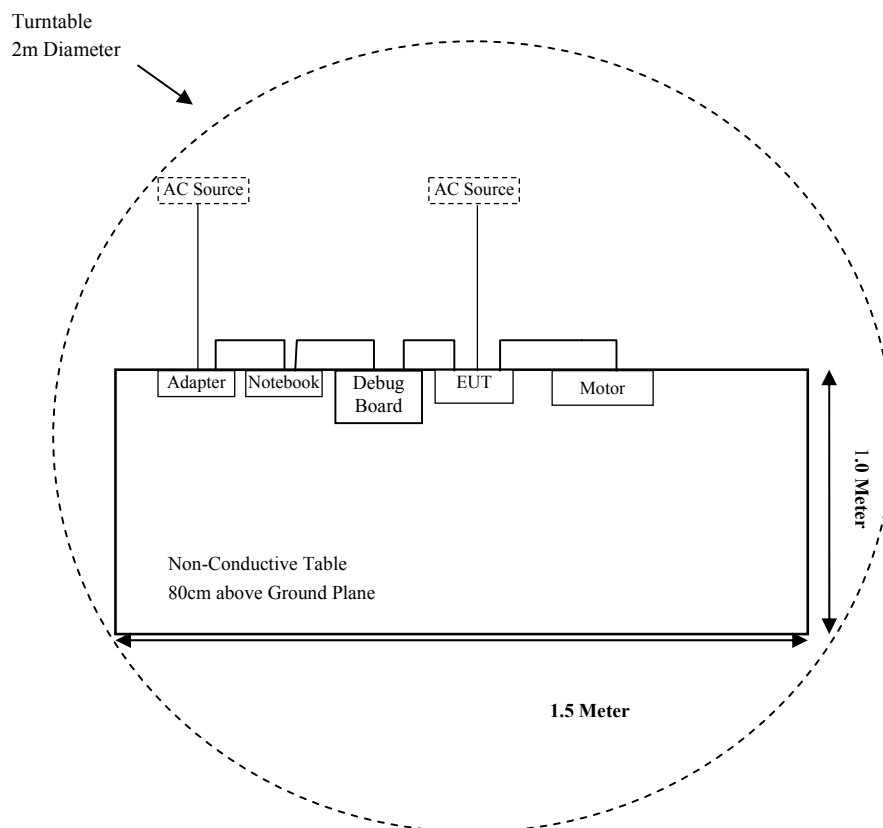

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Compliant
§15.205, §15.209, §15.249	Spurious Emissions (Below 1GHz)	Compliant
	Spurious Emissions (Above 1GHz)	Compliant (See Note 1)
§15.215 (c)	20 dB Bandwidth	Compliant (See Note 1)

Note 1: For these items, all the test data please refers to the original report RSHA190123005-00B with FCC ID: 2AK23MC210.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Conducted Emission Test					
ROHDE&SCHWARZ	EMI Test receiver	ESR	1316.3003K03-102454-Qd	2019-06-25	2020-06-24
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2018-11-12	2019-11-11
Audix	Test Software	e3	V9	--	--
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has a PCB antenna and antenna gain is 0dBi, which was permanently attached, fulfill the requirement of this section, please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

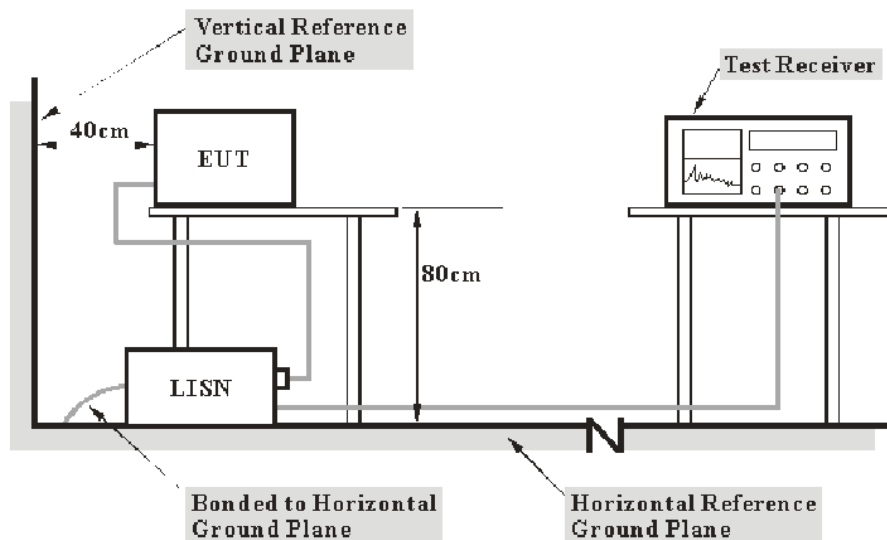

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data

Environmental Conditions


Temperature:	25.0°C
Relative Humidity:	48 %
ATM Pressure:	101.2 kPa

The testing was performed by Matt Yao on 2019-07-03.

Test Result: Compliant.


EUT operation mode: Transmitting in low channel. (Worst case)

AC 120V/60Hz, Line

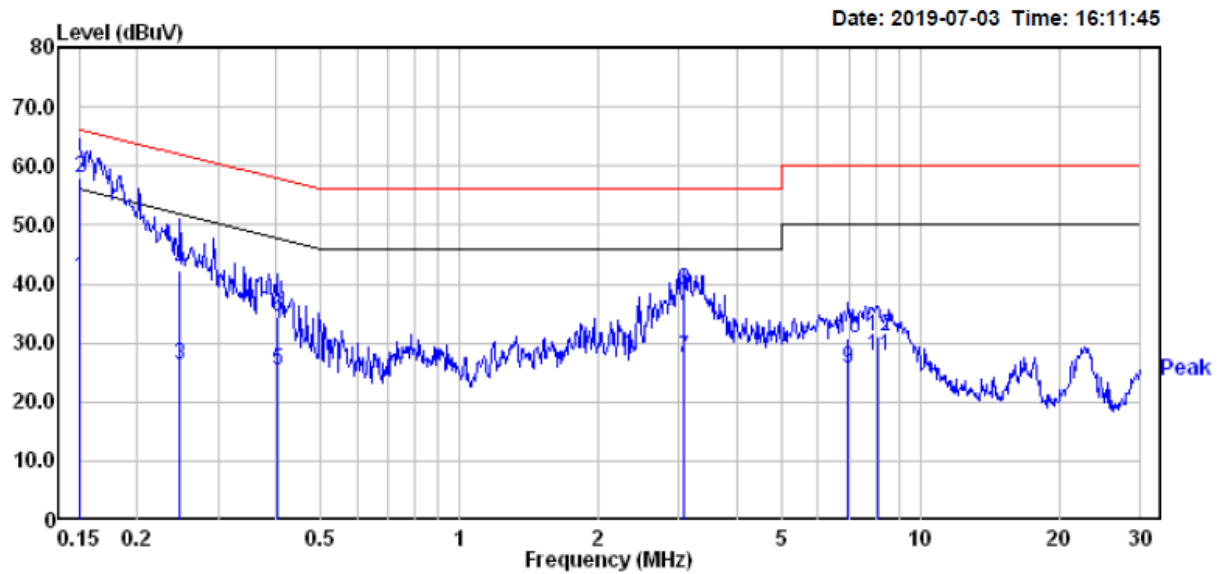

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	21.10	19.82	40.92	56.00	-15.08	Average
2	0.150	38.10	19.82	57.92	66.00	-8.08	QP
3	0.248	6.30	19.82	26.12	51.82	-25.70	Average
4	0.248	22.30	19.82	42.12	61.82	-19.70	QP
5	0.402	5.60	19.74	25.34	47.81	-22.47	Average
6	0.402	14.60	19.74	34.34	57.81	-23.47	QP
7	3.074	8.00	19.46	27.46	46.00	-18.54	Average
8	3.074	19.60	19.46	39.06	56.00	-16.94	QP
9	6.988	6.00	19.52	25.52	50.00	-24.48	Average
10	6.988	11.30	19.52	30.82	60.00	-29.18	QP
11	8.105	8.30	19.53	27.83	50.00	-22.17	Average
12	8.105	11.50	19.53	31.03	60.00	-28.97	QP

AC 120V/60Hz, Neutral

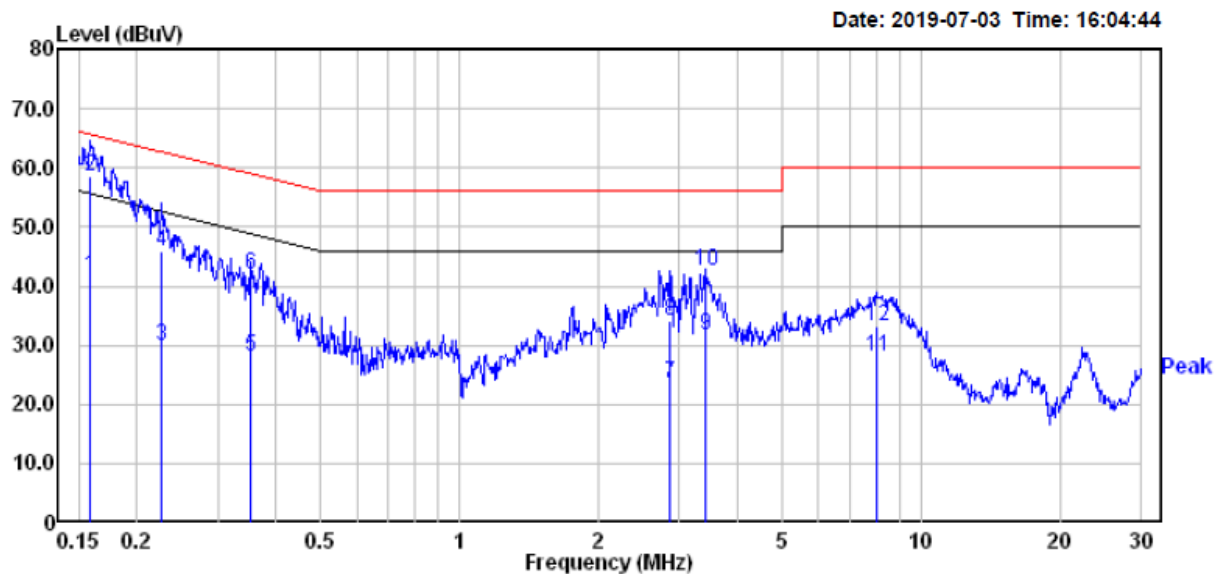

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.158	21.70	19.82	41.52	55.56	-14.04	Average
2	0.158	38.70	19.82	58.52	65.56	-7.04	QP
3	0.226	10.20	19.82	30.02	52.61	-22.59	Average
4	0.226	26.20	19.82	46.02	62.61	-16.59	QP
5	0.354	8.30	19.80	28.10	48.87	-20.77	Average
6	0.354	22.30	19.80	42.10	58.87	-16.77	QP
7	2.869	4.20	19.46	23.66	46.00	-22.34	Average
8	2.869	14.80	19.46	34.26	56.00	-21.74	QP
9	3.417	12.10	19.46	31.56	46.00	-14.44	Average
10	3.417	23.00	19.46	42.46	56.00	-13.54	QP
11	8.020	8.40	19.53	27.93	50.00	-22.07	Average
12	8.020	13.70	19.53	33.23	60.00	-26.77	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBUV) + Factor (dB) - Limit (dBUV)

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

EUT Setup

Below 1 GHz:

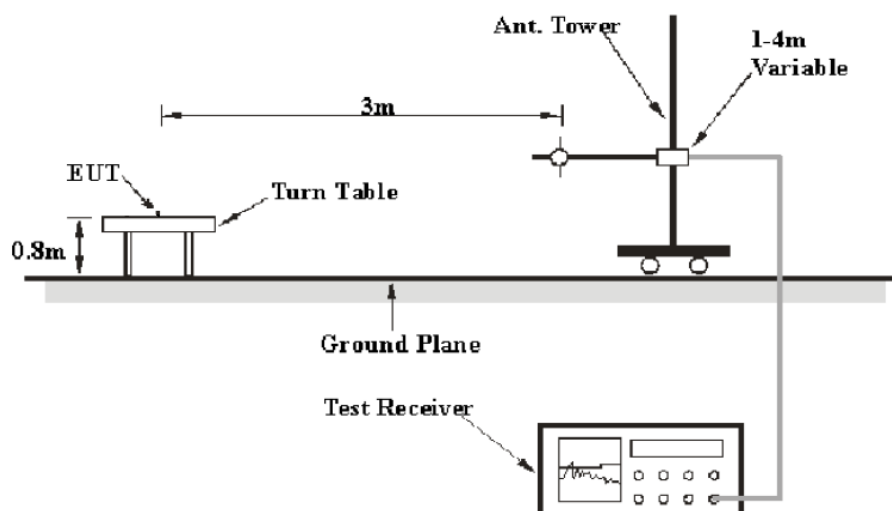

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment Setup

The system was investigated from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249.

Test Data

Environmental Conditions


Temperature:	24.2°C
Relative Humidity:	50%
ATM Pressure:	101.3kPa

The testing was performed by Matt Yao on 2019-07-02.

Test Mode: Transmitting

Spurious Emission Test: (AC power supply-worse case)**30MHz-1GHz**

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **low** channel of operation in X-axis of orientation was recorded)

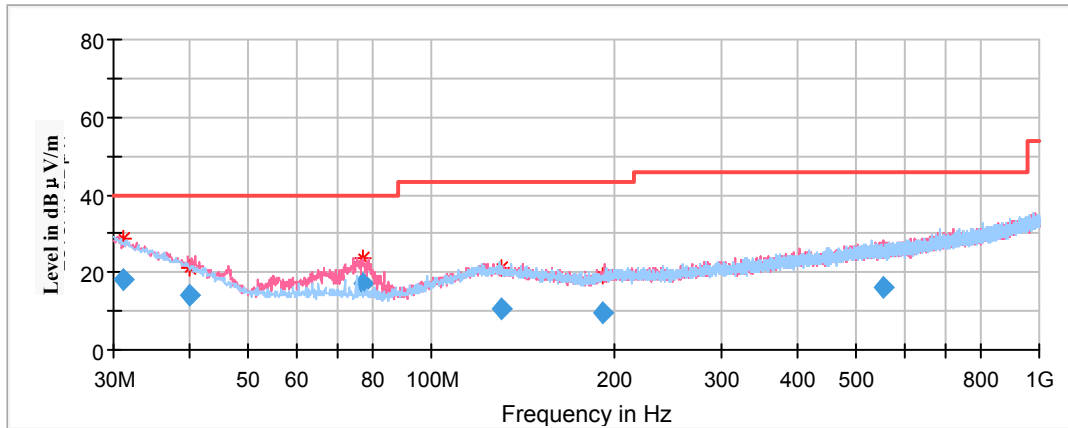

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
31.142906	18.22	199.0	V	109.0	-4.7	40.00	21.78
40.098600	14.07	100.0	V	148.0	-10.8	40.00	25.93
77.115650	17.25	100.0	V	179.0	-17.6	40.00	22.75
130.103900	10.76	199.0	H	235.0	-11.6	43.50	32.74
191.348800	9.56	100.0	V	320.0	-12.9	43.50	33.94
552.232150	16.03	199.0	V	352.0	-5.6	46.00	29.97

***** END OF REPORT *****