



Test Report Serial Number:

45461883 R1.0

Test Report Date:

24 July 2023

Project Number:

1633

EMC Test Report - Class II Permissive Change

Applicant:



The Detection Group
440 N. Wolfe Rd. E126
Sunnyvale, CA, 94085
USA

The Detection Group
440 N. Wolfe Rd. E211
Sunnyvale, CA, 94085
USA

FCC ID:

2AK4V-DT-501

Product Model Number / HVIN

DT-501

IC Registration Number

-

Product Name / PMN

DT-501

In Accordance With:

FCC 47 CFR §15.247, Part 15 Subpart B

Intentional Radiators - Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz, Unintentional Radiators

Approved By:

Ben Hewson, President

Celltech Labs Inc.
21-364 Lougheed Rd.
Kelowna, BC, V1X 7R8
Canada



Test Lab Certificate: 2470.01



**Industry
Canada**

IC Registration 3874A



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

© 2023 Celltech Labs Inc,

Table of Contents

1.0 REVISION HISTORY	4
2.0 CLIENT AND DUT INFORMATION	5
3.0 SCOPE.....	6
4.0 TEST SUMMARY.....	7
5.0 NORMATIVE REFERENCES	9
6.0 FACILITIES AND ACCREDITATIONS	10
7.0 CONDUCTED CHANNEL POWER	11
8.0 CONDUCTED SPURIOUS EMISSIONS	17
9.0 RADIATED TX EMISSIONS	23
10.0 RADIATED RX EMISSIONS.....	39
APPENDIX A – TEST SETUP DRAWINGS	47
APPENDIX B – EQUIPMENT LIST AND CALIBRATION.....	51
APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY.....	52
END OF REPORT.....	52

Table of Figures

Figure A.1 – Test Setup – Conducted Measurements.....	47
Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz	49
Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz.....	49
Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution.....	49
Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz	50

Table of Plots

Plot 7.1 – Conducted Channel Power, 906 MHz	13
Plot 7.2 – Conducted Channel Power, 914 MHz	14
Plot 7.3 – Conducted Channel Power, 924 MHz	15
Plot 8.1 – Conducted Spurious Emission Measurement	18
Plot 8.2 – Conducted Spurious Emission Measurement	19
Plot 8.3 – Conducted Spurious Emission Measurement	20
Plot 8.4 – Conducted Spurious Emission Measurement	21
Plot 9.1 – Radiated Tx Emissions, 30 – 1000MHz, Horizontal	24
Plot 9.2 – Radiated Tx Emissions, 30 – 1000MHz, Vertical	25
Plot 9.3 – Radiated Tx Emissions, Ch 1, 2 nd Harmonic, Horizontal	26
Plot 9.4 – Radiated Tx Emissions, Ch 1, 3 rd Harmonic, Horizontal	27
Plot 9.5 – Radiated Tx Emissions, Ch 1, 2 nd Harmonic, Vertical	28
Plot 9.6 – Radiated Tx Emissions, Ch 1, 3 rd Harmonic, Vertical	29
Plot 9.7 – Radiated Tx Emissions, Ch 5, 2 nd Harmonic, Horizontal	30
Plot 9.8 – Radiated Tx Emissions, Ch 5, 3 rd Harmonic, Horizontal	31
Plot 9.9 – Radiated Tx Emissions, Ch 5, 2 nd Harmonic, Vertical	32
Plot 9.10 – Radiated Tx Emissions, Ch 5, 3 rd Harmonic, Vertical	33
Plot 9.11 – Radiated Tx Emissions, Ch 10, 2 nd Harmonic, Horizontal	34
Plot 9.12 – Radiated Tx Emissions, Ch 10, 3 rd Harmonic, Horizontal	35
Plot 9.13 – Radiated Tx Emissions, Ch 10, 2 nd Harmonic, Vertical	36
Plot 9.14 – Radiated Tx Emissions, Ch 10, 3 rd Harmonic, Vertical	37
Plot 10.1 – Radiated Rx Emissions, 30-1000MHz, Horizontal	40
Plot 10.2 – Radiated Rx Emissions, 30-1000MHz, Vertical	41
Plot 10.3 – Radiated Rx Emissions, 1-3GHz, Horizontal	42
Plot 10.4 – Radiated Rx Emissions, 1-3GHz, Vertical	43
Plot 10.5 – Radiated Rx Emissions, 3-10GHz, Horizontal	44
Plot 10.6 – Radiated Rx Emissions, 3-10GHz, Vertical	45

Table of Tables

Table 7.1 – Summary of Conducted Channel Power Measurements	16
Table 8.1 – Summary of Conducted Spurious Emissions Measurements	22
Table 9.1 – Summary of Radiated Tx Emissions Measurements	38
Table 10.1 – Summary of Radiated Rx Measurements	46
Table A.1 – Conducted Measurement Setup	47
Table A.2 – Radiated Emissions Measurement Equipment	48

1.0 REVISION HISTORY

Revision History				
Samples Tested By:		Art Voss, P.Eng.		Date(s) of Evaluation:
Report Prepared By:		Art Voss, P.Eng.		Report Reviewed By:
Report Revision	Description of Revision		Revised Section	Revised By
1.0	Initial Release		n/a	Art Voss
				Revision Date
				3 - 17 July 2023
				Ben Hewson
				24 july 2023

2.0 CLIENT AND DUT INFORMATION

Client Information	
Applicant Name (FCC)	The Detection Group
Applicant Address (FCC)	440 Wolfe Rd. E126
	Sunnyvale, CA, 94085
	USA
DUT Information	
Device Identifier(s):	FCC ID: 2AK4V-DT-501
Device Type:	Industrial Digital Transceiver
Device Model(s) / HVIN:	DT-501
Device Marketing Name / PMN:	DT-501
Firmware Version ID Number / FVIN:	-
Host Marketing Name / HMN:	-
Test Sample Serial No.:	21105147
Equipment Class (FCC):	Digital Transmission System (DTS)
Transmit Frequency Range:	906 - 924MHz
Test Channels:	3 Channel
Manuf. Max. Rated Output Power:	24dBm
Manuf. Max. Rated BW/Data Rate:	n/a
Antenna Make and Model:	Whip
Antenna Type and Gain:	1.2dBi
Modulation:	BPSK-40
Mode:	Simplex
Emission Designator:	See Section 8.0
DUT Power Source:	3.7VDC Li-Ion Rechargeable
DUT Dimensions [LxWxD]	125mm x 95mm x 40mm
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE

Preface:

This Certification Report was prepared on behalf of:

The Detection Group

,(the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and ,unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

Device Description:

The HVN: DT-501 is a Class A Industrial remote hub controller with a low power 912MHz Transceiver. It is not made available to the general public and requires professional installation.

Application:

The *Applicant* wishes to remove the RF shielding to stream-line the manufacturing process. This is an application for a Class II Permissive Change.

Regulatory Requirement:

As per FCC 47 CFR 2 Subpart I , Equipment Authorization is require for this *Equipment* by means of Certification in accordance with FCC 47 CFR §15.247.

Scope of Work:

The scope of this investigation to the evaluation of the DT-501 to determine compliance to the *Rules* identified herein. It is limited to the evaluation of the Radiated Tx and Rx and antenna port Conducted emissions to ensure no degradation in the emissions exceeds those as previously filed.

RF Exposure:

As previously filed.

4.0 TEST SUMMARY

TEST SUMMARY					
Section	Description of Test	Procedure Reference	Applicable Rule Part(s) FCC	Test Date	Result
7.0	Conducted Power (Fundamental)	ANSI C63.10-2013 KDB 558074 D01v05	§2.1046 §15.247(b)(3)	5 Nov 2022	Pass
8.0	Conducted Tx Spurious Emissions	ANSI C63.10-2013 KDB 558074 D01v05	§2.1051 §15.247(d)	17 July 2023	Pass
9.0	Radiated Tx Spurious Emissions	ANSI C63.4-2014 KDB 558074 D01v05	§15.109 §15.247(d)	3 July 2023	Pass
10.0	Radiated Rx Spurious Emissions	ANSI C63.4-2014 KDB 558074 D01v05	§15.109	3 July 2023	Pass

Test Station Day Log

Date	Ambient Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)	Test Station	Tests Performed Section(s)
3 July 2023	19.0	28	102.0	OATS	9,10
17 July 2023	26.0	16	101.9	EMC	7,8

EMC - EMC Test Bench

SAC - Semi-Anechoic Chamber

OATS - Open Area Test Site

TC - Temperature Chamber

LISN - LISN Test Area

ESD - ESD Test Bench

IMM - Immunity Test Area

RI - Radiated Immunity Chamber

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.



Art Voss, P.Eng.
Technical Manager
Celltech Labs Inc.

24 July 2023

Date




5.0 NORMATIVE REFERENCES

Normative References	
ISO/IEC 17025:2017	General requirements for the competence of testing and calibration laboratories
ANSI C63.4-2014	American National Standard of Procedures for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electric and Electronic Equipment in the Range of 9kHz to 40GHz
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
CFR	Code of Federal Regulations Title 47: Telecommunication Part 2: Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Subpart B: Unintentional Radiators
CFR	Code of Federal Regulations Title 47: Telecommunication Part 15: Radio Frequency Devices Sub Part C (15.247) Intentional Radiators
FCC KDB 558074 D01v05r02	OET Major Guidance Publications, Knowledge Data Base Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under Section 15.247

6.0 FACILITIES AND ACCREDITATIONS

Facility and Accreditation:

The facilities used to evaluate this device outlined in this report are located at 21-364 Lougheed Road, Kelowna, British Columbia, Canada V1X 7R8. The radiated emissions site (OATS) conforms to the requirements set forth in ANSI C63.4 and is filed and listed with the FCC under Test Firm Registration Number CA3874 and Innovation, Science and Economic Development Canada under Test Site File Number ISED 3874A. Celltech is accredited to ISO 17025, through accrediting body A2LA and with certificate 2470.01.

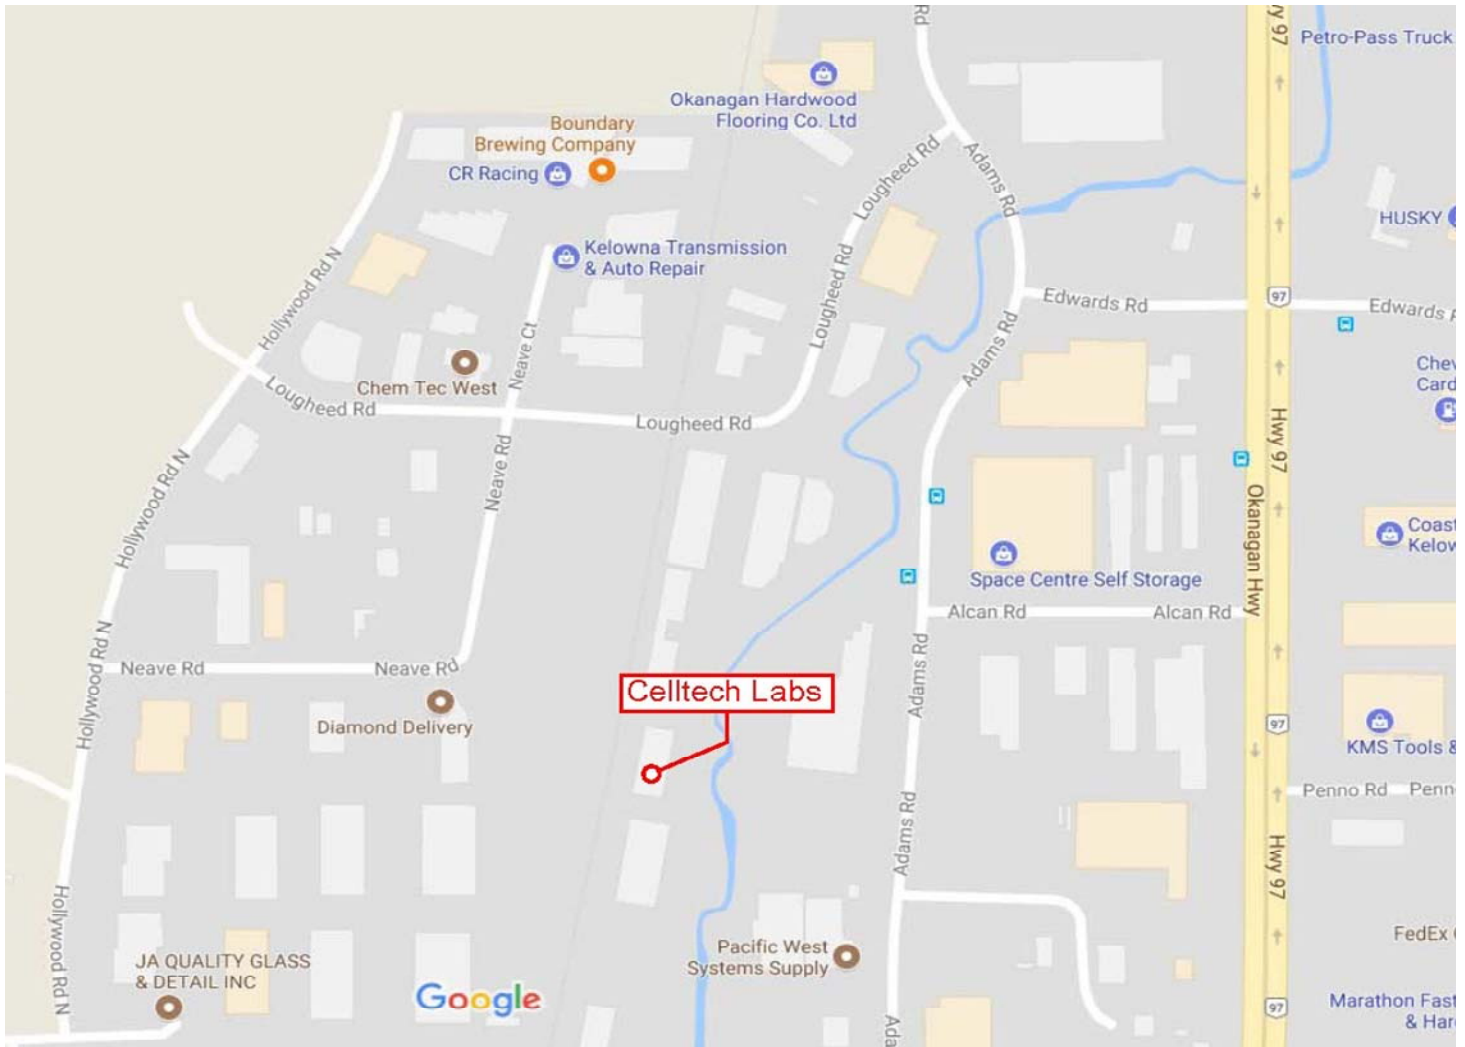

7.0 CONDUCTED CHANNEL POWER

Test Procedure

Normative Reference	FCC 47 CFR §2.1046, §15.247(b)(3), RSS-Gen (6.1.2), RSS-247 (5.4)(d), KDB 558074 (8.3.2), ANSI C63.10 (11.9.2.2.2)
----------------------------	---

Limits

47 CFR §15.247(b)(3)	(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.
RSS-247 (5.4)(d)	5.4 Transmitter output power and equivalent isotropically radiated power (e.i.r.p.) Devices shall comply with the following requirements, where applicable: d) For DTSS employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.

General Procedure

KDB 558074 (8.3.2.1)	8.3.2.1 General Section 15.247 permits the maximum conducted (average) output power to be measured as an alternative to the maximum peak conducted output power for demonstrating compliance to the limit. When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth.
C63.10 (11.9.2.2.2)	Method AVGSA-1 (trace averaging with the EUT transmitting at full power throughout each a) Set span to at least 1.5 X OBW. b) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz. c) Set VBW $\geq 3 \times$ RBW. d) Number of points in sweep $\geq 2 \times$ span / RBW. e) Sweep time = auto. f) Detector = RMS g) If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run". h) Trace average at least 100 traces in power averaging i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges.


Test Setup

Appendix A - Figure A.1

Measurement Procedure

The DUT was connected to a Spectrum Analyzer (SA) via a 30dB attenuator connected to the DUT's antenna port. The SA was configured as described above. Number of Sweep Points $\geq 2 \times$ Span / RBW = $2 \times (1.2\text{MHz} / 3\text{kHz}) = 800$, the SA was configured for 1001 Points. The output power of the DUT was set to the manufacturer's highest output power setting at the Low, Mid and High frequency channels as permitted by the device. The DUT was set to transmit at 100% Duty Cycle. The Channel Bandwidth was set to the measured 99% Occupied Bandwidth (See Section 9.0). The Band Channel Power was measured and recorded.


Plot 7.1 – Conducted Channel Power, 906 MHz

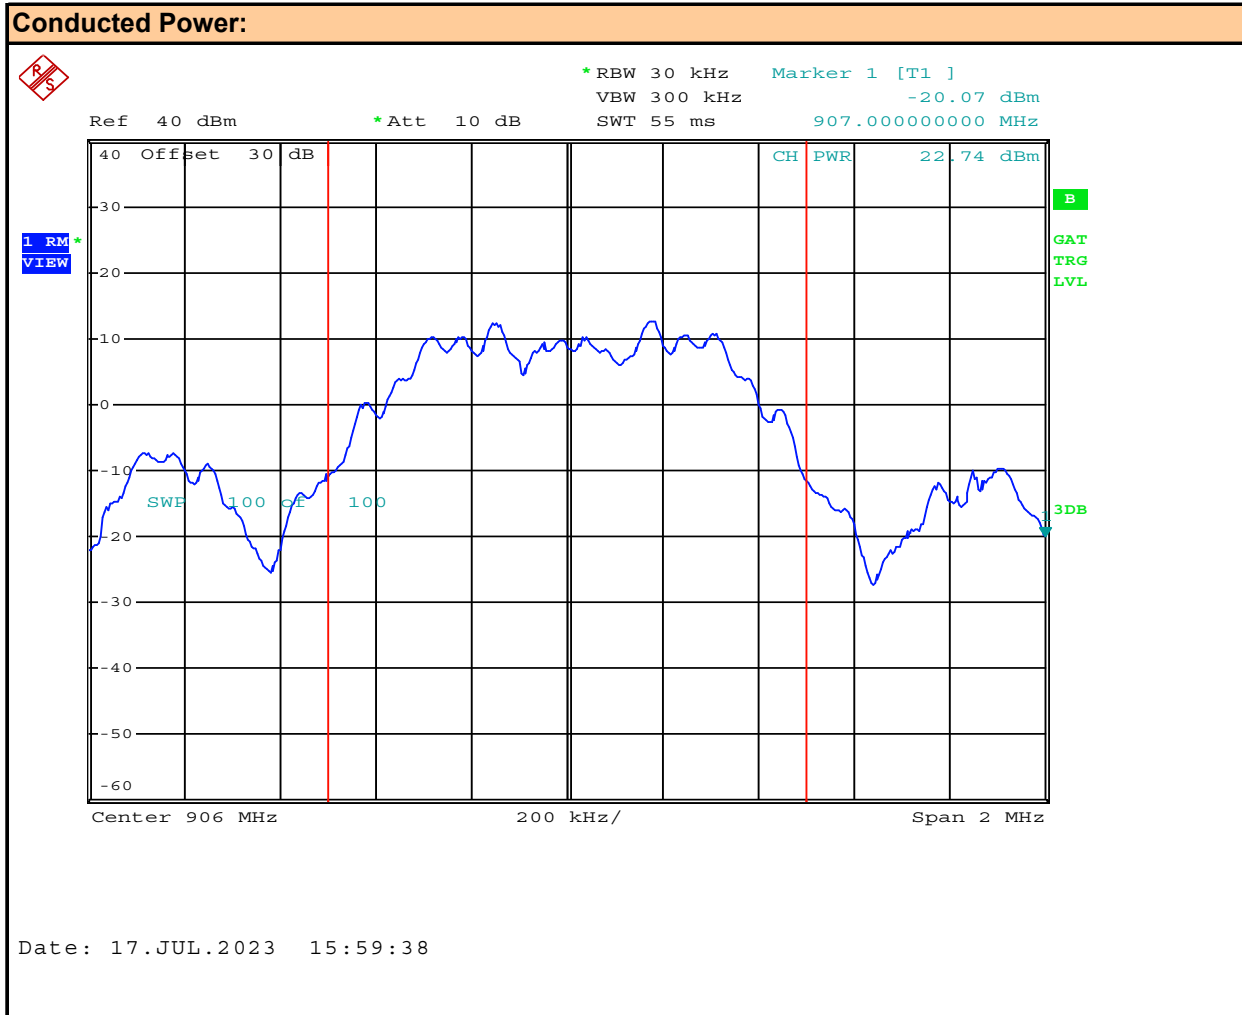

Channel: **1**
Mode: **-**

Channel Frequency: **906** MHz
Modulation: **BPSK**
Measured Channel Power: **22.75** dBm

Plot 7.2 – Conducted Channel Power, 914 MHz

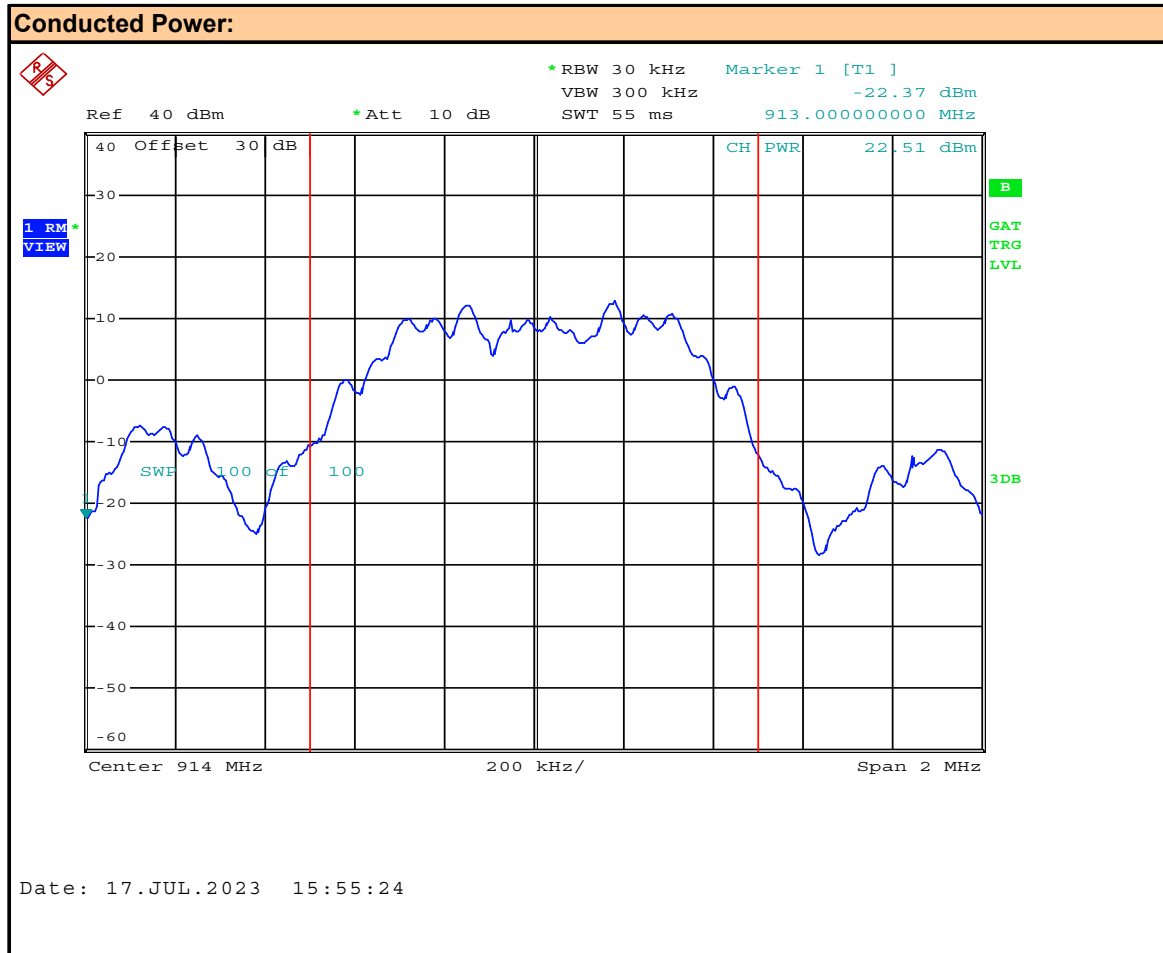

Channel:


Mode:

Channel Frequency: MHz

Modulation:

Measured Channel Power: dBm

Plot 7.3 – Conducted Channel Power, 924 MHz

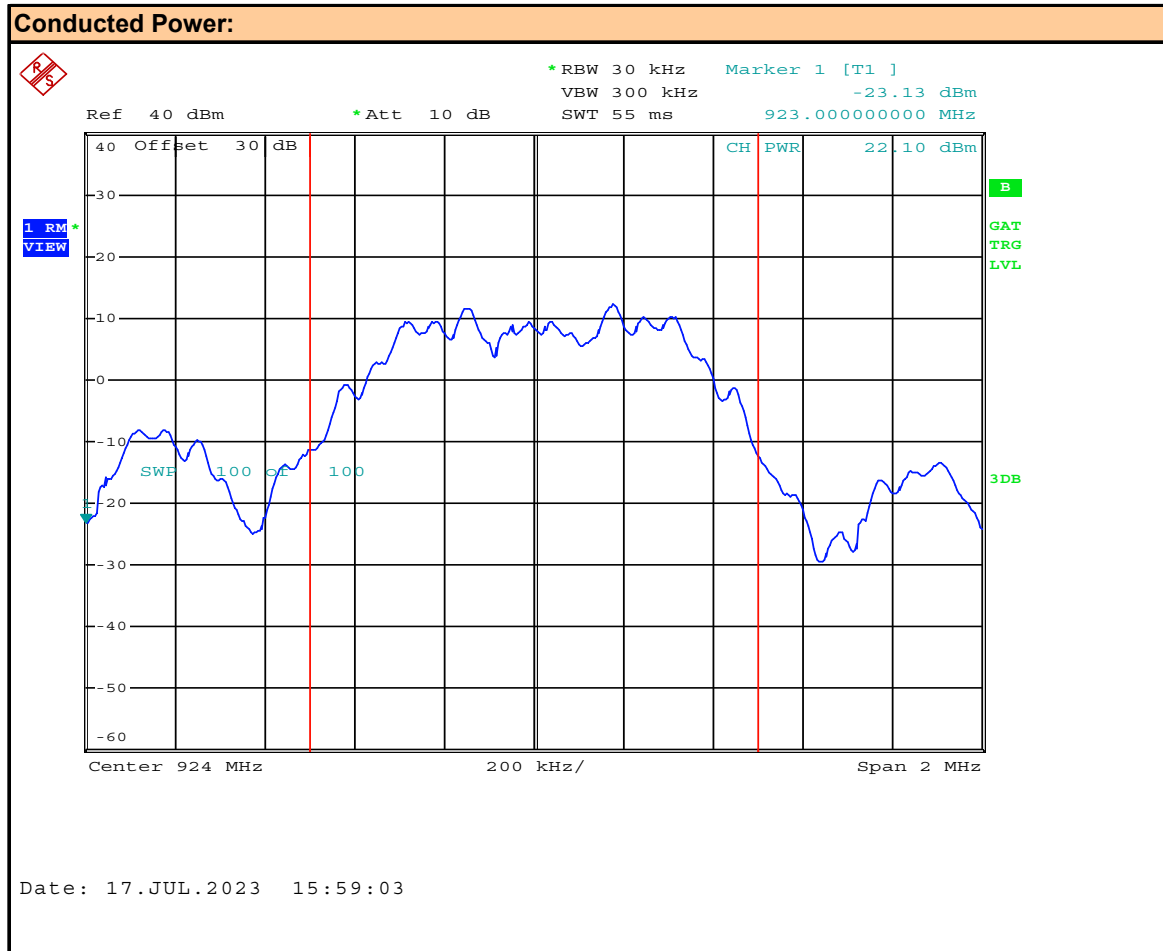

Channel: **10**
Mode: **-**

Channel Frequency: **924** MHz
Modulation: **BPSK**
Measured Channel Power: **22.10** dBm

Table 7.1 – Summary of Conducted Channel Power Measurements

§15.247(b)(3), RSS-247 (5.4)(d) Channel Output Power (RMS)						
Frequency (MHz)	Modulation	Power Setting ⁽¹⁾ (dBm)	Measured Power [E _{Meas}] (dBm)	Measured Power [E _{Meas}] (W)	Limit (W)	Margin (dB)
906.0	BPSK	Max	22.75	0.19	1.0	7.3
914.0	BPSK	Max	22.51	0.18	1.0	7.5
924.0	BPSK	Max	22.10	0.16	1.0	7.9
Results:					Complies	

(1) The output power is factory set to maximum

$$\text{Margin} = 10 \cdot \log(\text{Limit} / E_{\text{meas}})$$

RSS-247 (5.4)(d) Channel EIRP (RMS)									
Frequency	Modulation	Power	Measured	Antenna	Cable	EIRP	EIRP	Limit	Margin
(MHz)		Setting ⁽¹⁾	Power	Gain ⁽²⁾	Loss				
		(dBm)	[E _{Meas}]	[G _T]	[L _C]	(dBm)	(W)	(W)	(dB)
906.0	BPSK	Max	22.75	1.5	0.5	24.75	0.30	4.0	11.3
914.0			22.51			24.51	0.28		11.5
924.0			22.10			24.10	0.26		11.9
Results:								Complies	

$$\text{EIRP (dBm)} = E_{\text{Meas}} + G_T + L_C$$

$$\text{Margin} = \text{Limit} - \text{EIRP in dB}$$

(1) The output power is factory set to maximum

(2) Maximum permissible gain

8.0 CONDUCTED SPURIOUS EMISSIONS


Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), RSS-Gen (6.13), RSS-247 (5.5), KDB 558074 (8.7), ANSI C63.10 (11.13.3.3)
----------------------------	---

Limits

47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.
RSS-247 (5.5)	5.5 Unwanted emissions In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required. d) For DTSSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e). As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power.

Plot 8.1 – Conducted Spurious Emission Measurement

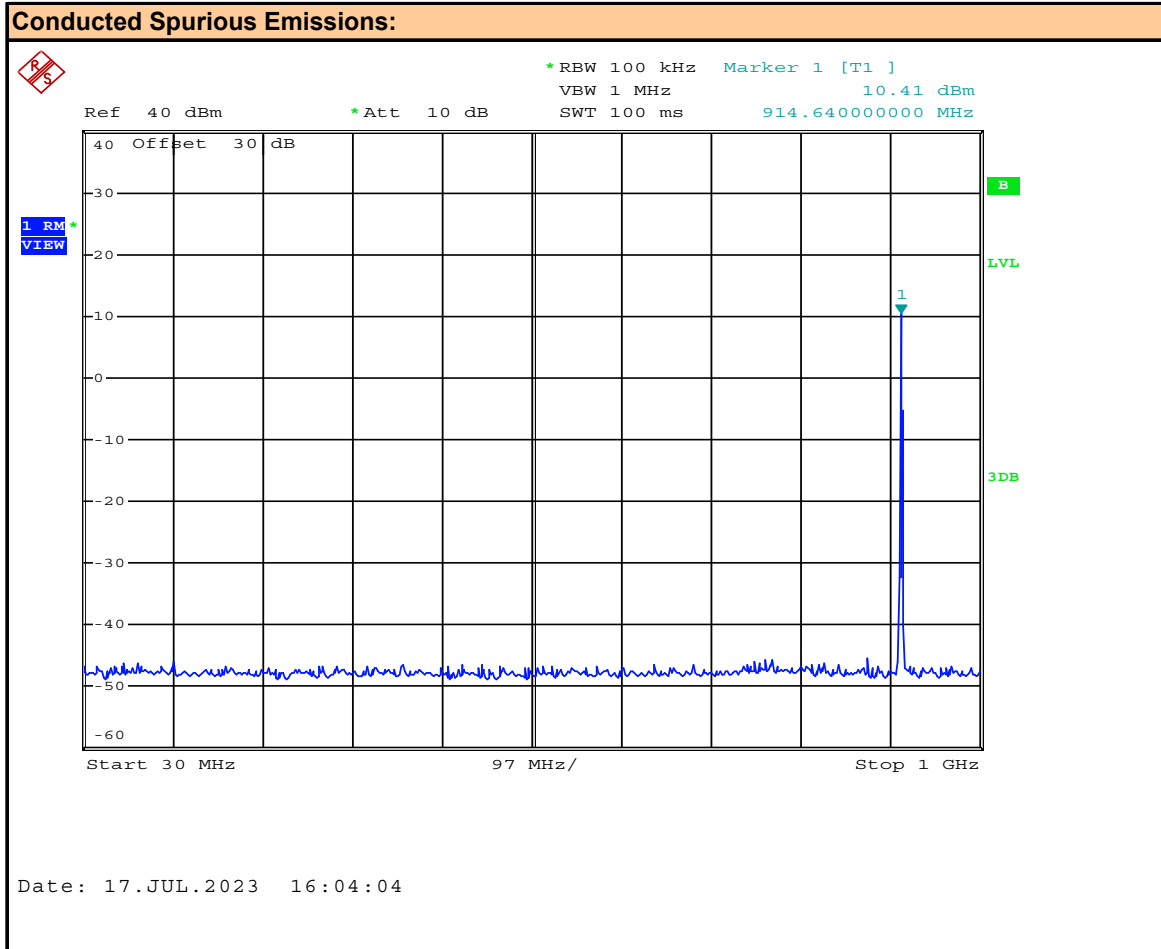

Channel: **5**

Channel Frequency: **914** MHz

Mode: **-**


Modulation: **BPSK**

Emission Frequency: **Fundamental** MHz

Measured Emission: **Fundamental** dBm

Plot 8.2 – Conducted Spurious Emission Measurement


Conducted Spurious Emissions:

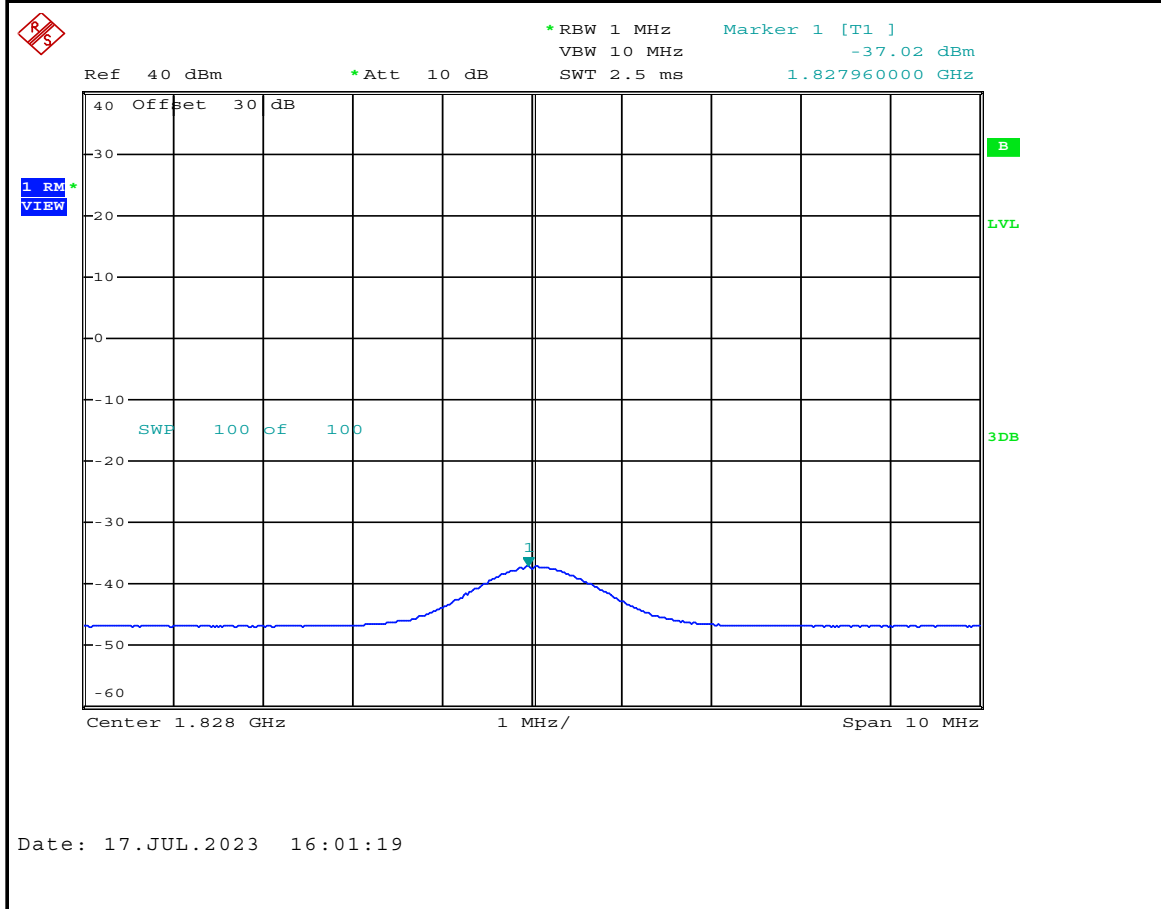

Channel:	5	Channel Frequency:	914	MHz	
Mode:	-	Modulation:	BPSK		
Emission Frequency:	1828	MHz	Measured Emission:	-37.02	dBm

Plot 8.3 – Conducted Spurious Emission Measurement

Conducted Spurious Emissions:

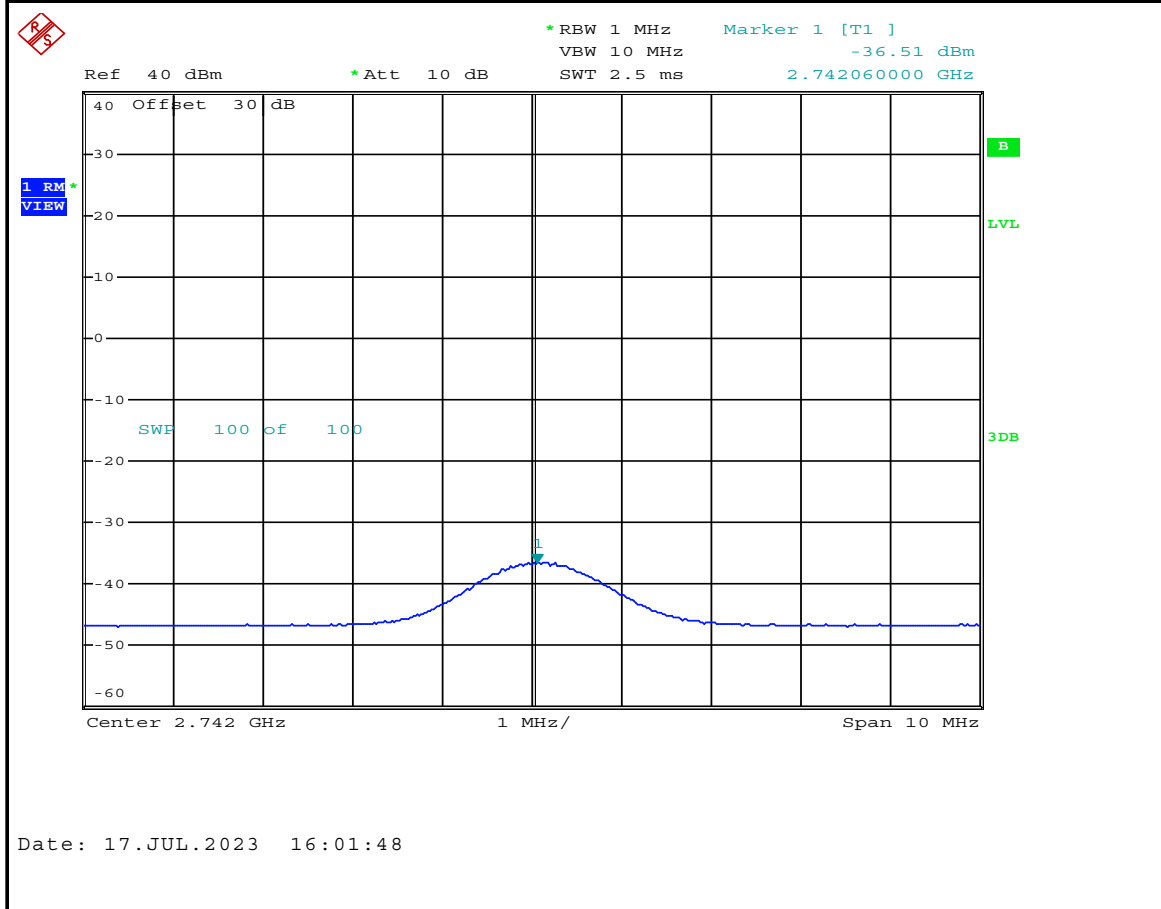

Channel: **5**

Mode: **-**

Emission Frequency: **2742** MHz


Channel Frequency: **914** MHz

Modulation: **BPSK**

Measured Emission: **-36.51** dBm

Plot 8.4 – Conducted Spurious Emission Measurement

Conducted Spurious Emissions:

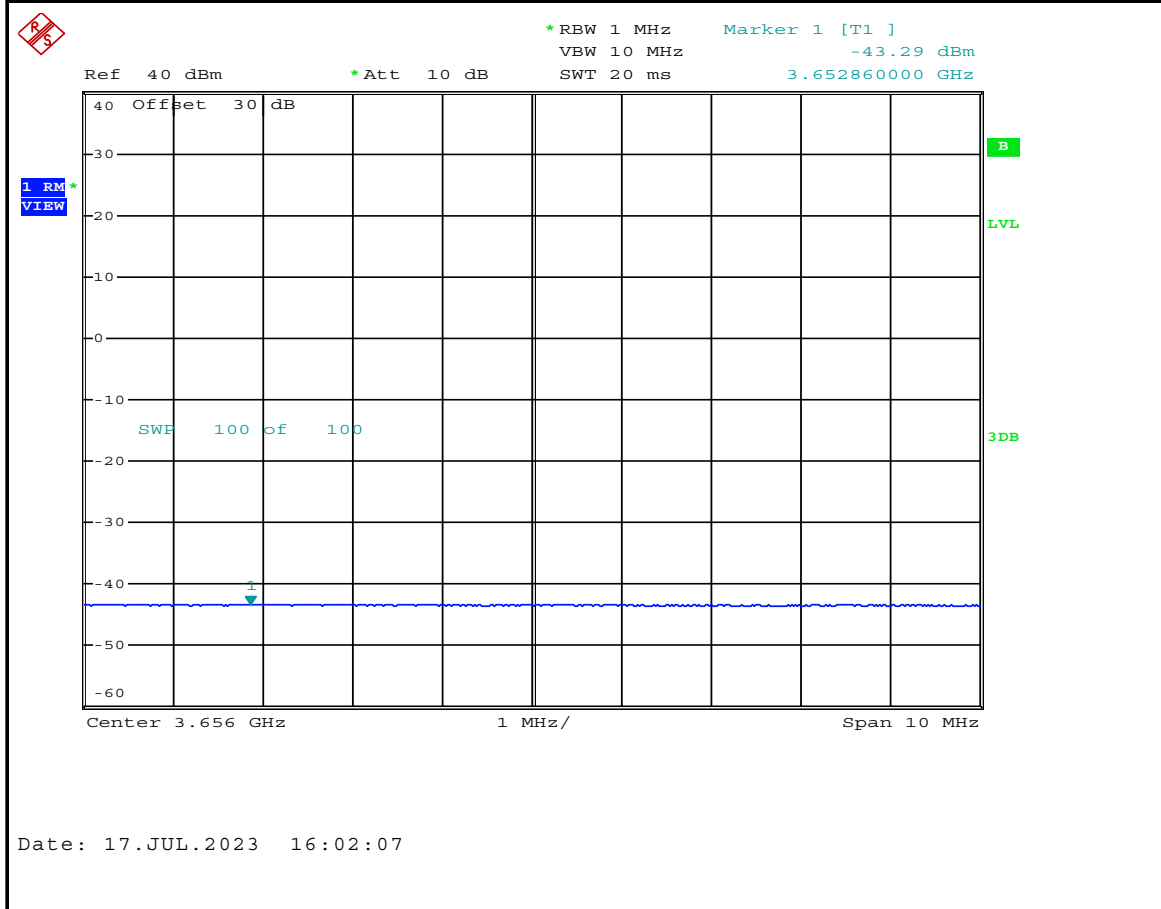

Channel:	5	Channel Frequency:	914	MHz
Mode:	-	Modulation:	BPSK	
Emission Frequency:	ND	MHz	Measured Emission:	ND
				dBm

Table 8.1 – Summary of Conducted Spurious Emissions Measurements

Conducted Spurious Emissions Measurement Results:								
Channel Number	Frequency (MHz)	Modulation	Emission Power [P _{Em}] (dBm)	Emission Frequency (MHz)	Fundamental Measurement [P _{Fund}] (dBm)	Attenuation [Atten] (dB)	Limit (dB)	Margin (dB)
5	914.00	BPSK	-37.02	1820	10.41	47.43	30	17.4
			-36.51	2742		46.92		16.9
								Complies

Attenuation [Atten] = [P_{Fund}] - [P_{Em}]

Margin = Attenuation - Limit

ND = None Detected

9.0 RADIATED TX EMISSIONS


Test Procedure

Normative Reference	FCC 47 CFR §2.1051, §15.247(d), §15.205(a), §15.205(c), §15.209(a)
	KDB 558074 (8.6), ANSI C63.10 (11.12)

Limits


47 CFR §15.247(d)	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																
47 CFR §15.209(a)	§15.209 Radiated emission limits; general requirements. (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: <table> <tr> <th>Frequency (MHz)</th><th>Field Strength (microvolts/meter)</th></tr> <tr> <td>0.009 - 0.490</td><td>2400/F (kHz) @300m</td></tr> <tr> <td>0.490 - 1.705</td><td>24000/F (kHz) @30m</td></tr> <tr> <td>1.705 - 30</td><td>30 @ 30m</td></tr> <tr> <td>30 - 88</td><td>100 @3m</td></tr> <tr> <td>88 - 216</td><td>150 @3m</td></tr> <tr> <td>216 - 960</td><td>200 @3m</td></tr> <tr> <td>Above 960</td><td>500 @3m</td></tr> </table>	Frequency (MHz)	Field Strength (microvolts/meter)	0.009 - 0.490	2400/F (kHz) @300m	0.490 - 1.705	24000/F (kHz) @30m	1.705 - 30	30 @ 30m	30 - 88	100 @3m	88 - 216	150 @3m	216 - 960	200 @3m	Above 960	500 @3m
Frequency (MHz)	Field Strength (microvolts/meter)																
0.009 - 0.490	2400/F (kHz) @300m																
0.490 - 1.705	24000/F (kHz) @30m																
1.705 - 30	30 @ 30m																
30 - 88	100 @3m																
88 - 216	150 @3m																
216 - 960	200 @3m																
Above 960	500 @3m																

Plot 9.1 – Radiated Tx Emissions, 30 – 1000MHz, Horizontal

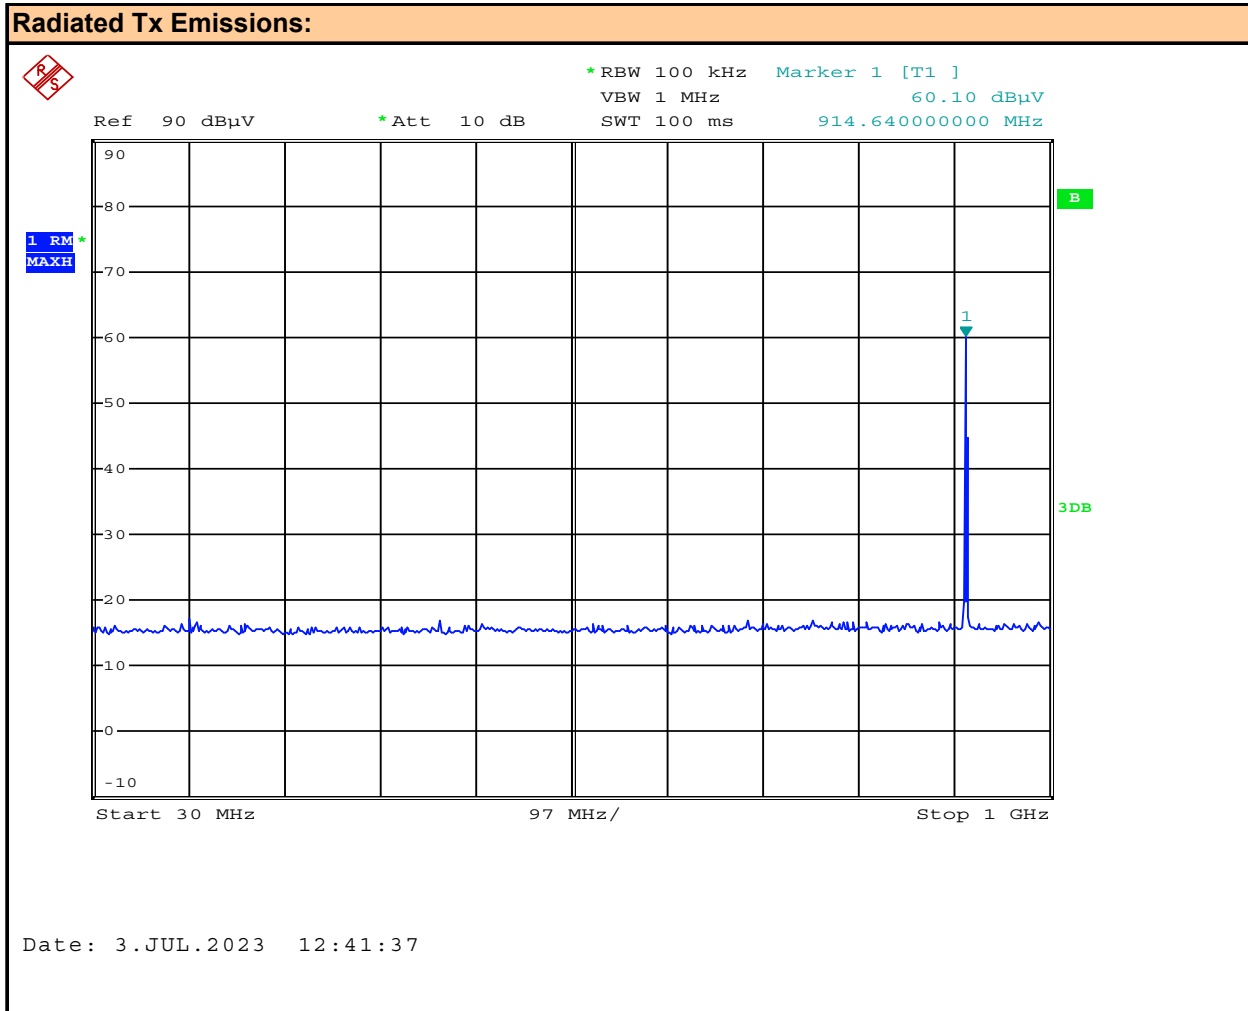


Channel:	5	Channel Frequency:	914 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Horizontal	Measured Channel Power(PK):	- dBm
Emission Frequency:	Fundamental MHz	Measured Channel Power(AV):	- dBm

Plot 9.2 – Radiated Tx Emissions, 30 – 1000MHz, Vertical

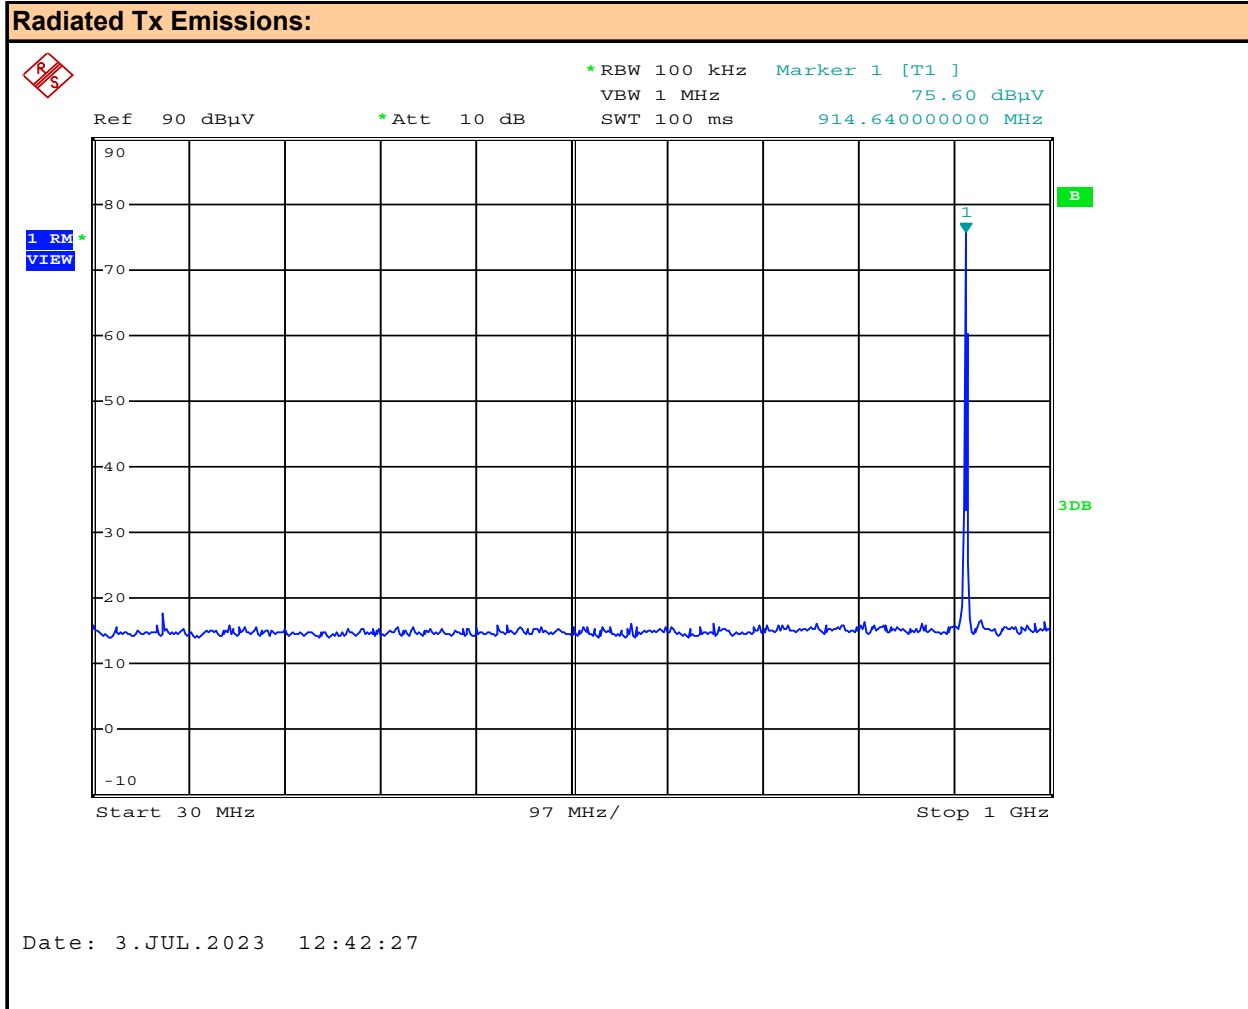


Channel:	5	Channel Frequency:	914 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Vertical	Measured Channel Power(PK):	- dBm
Emission Frequency:	Fundamental MHz	Measured Channel Power(AV):	- dBm

Plot 9.3 – Radiated Tx Emissions, Ch 1, 2nd Harmonic, Horizontal

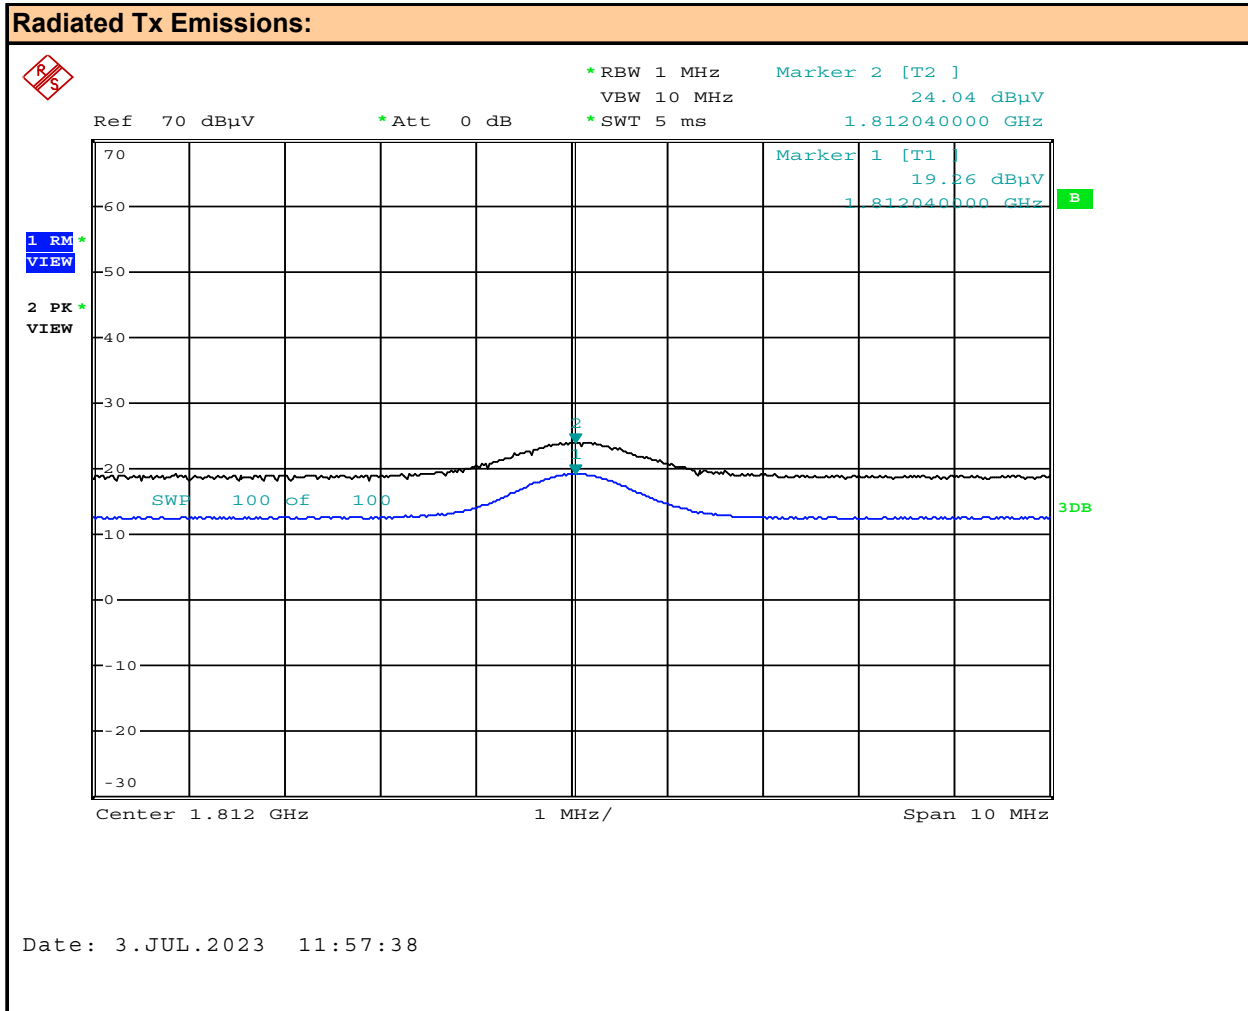


Channel:	1	Channel Frequency:	906 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Horizontal	Measured Channel Power(PK):	24.04 dBm
Emission Frequency:	1812 MHz	Measured Channel Power(AV):	19.26 dBm

Plot 9.4 – Radiated Tx Emissions, Ch 1, 3rd Harmonic, Horizontal

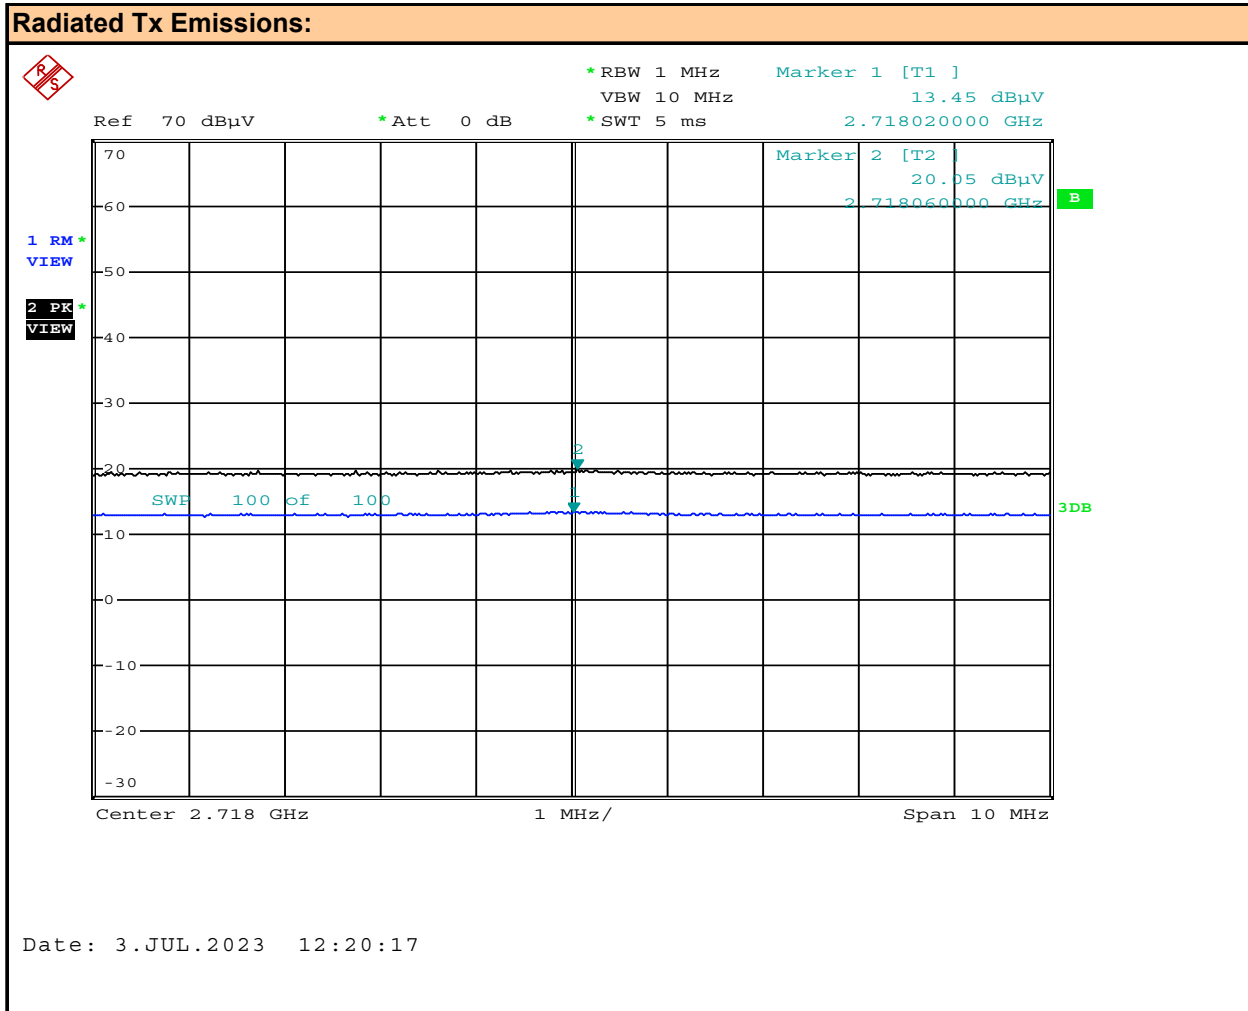


Channel:	1	Channel Frequency:	906 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Horizontal	Measured Channel Power(PK):	20.05 dBm
Emission Frequency:	2718 MHz	Measured Channel Power(AV):	13.45 dBm

Plot 9.5 – Radiated Tx Emissions, Ch 1, 2nd Harmonic, Vertical

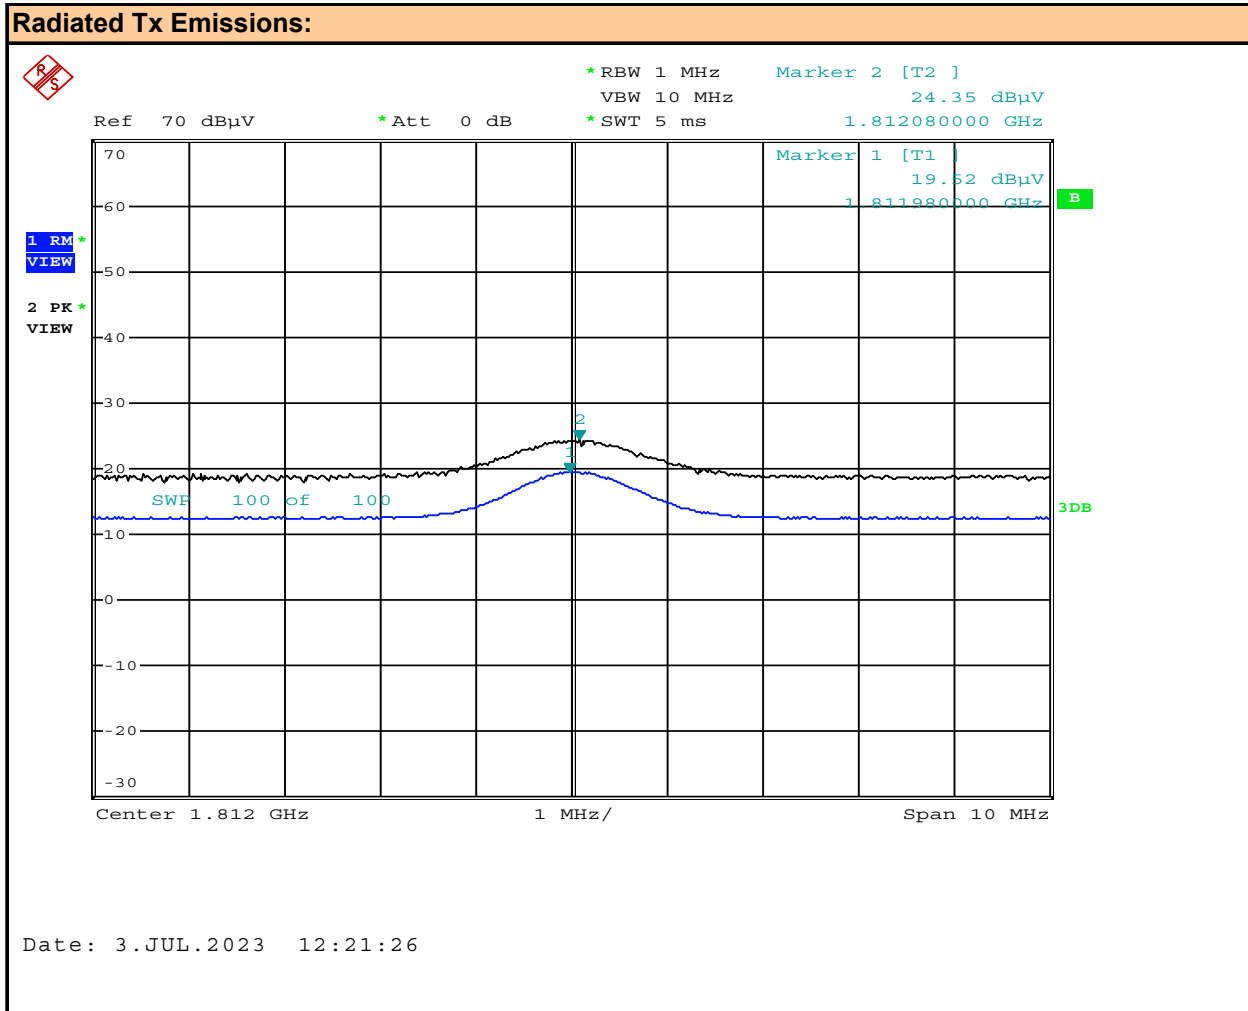


Channel:	1	Channel Frequency:	906 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Vertical	Measured Channel Power(PK):	24.35 dBm
Emission Frequency:	1812 MHz	Measured Channel Power(AV):	19.52 dBm

Plot 9.6 – Radiated Tx Emissions, Ch 1, 3rd Harmonic, Vertical

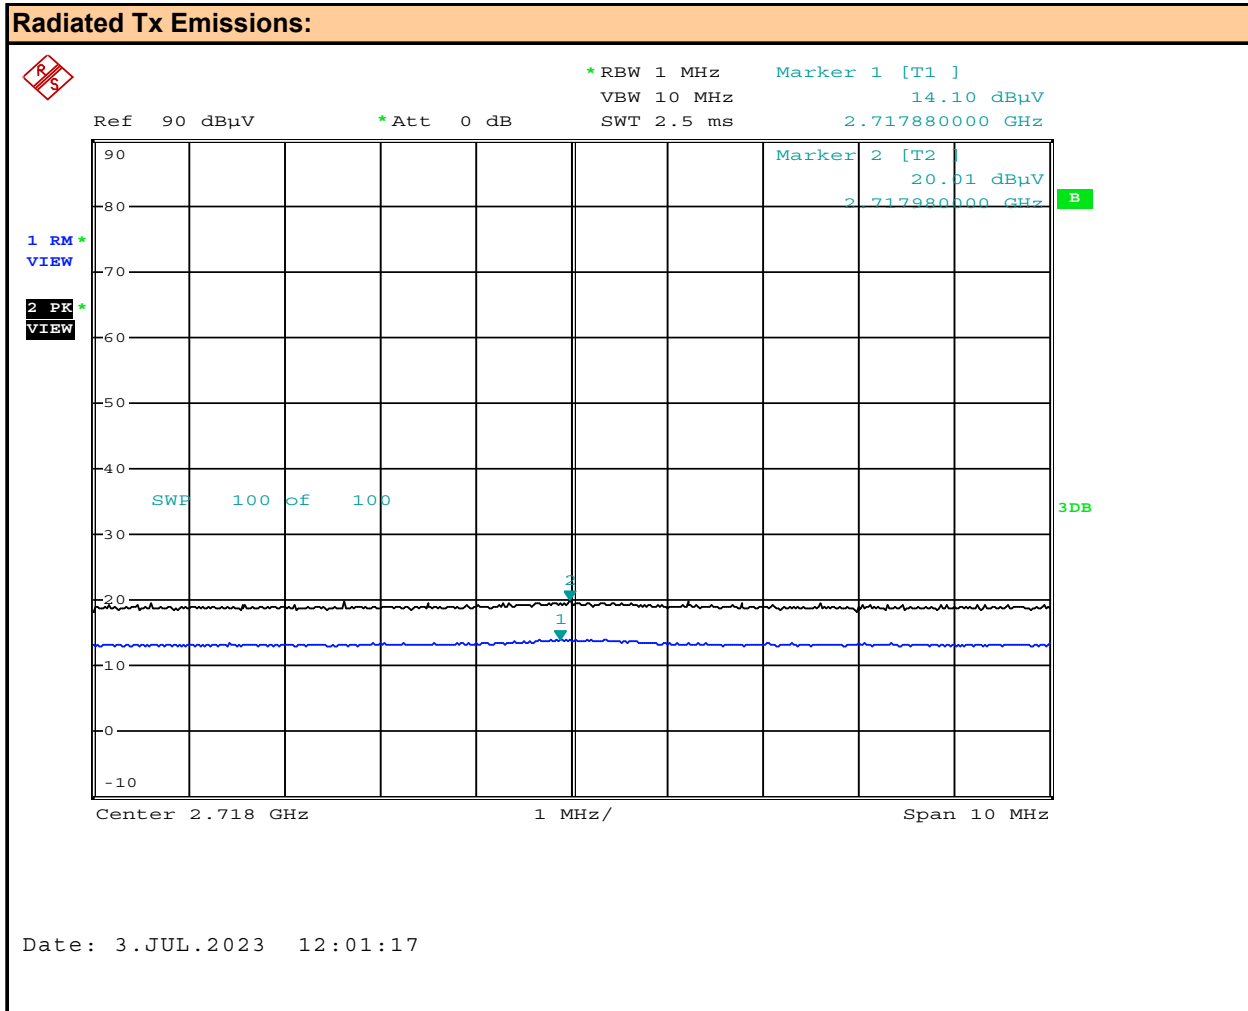


Channel:	1	Channel Frequency:	906 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Vertical	Measured Channel Power(PK):	20.01 dBm
Emission Frequency:	2718 MHz	Measured Channel Power(AV):	14.10 dBm

Plot 9.7 – Radiated Tx Emissions, Ch 5, 2nd Harmonic, Horizontal

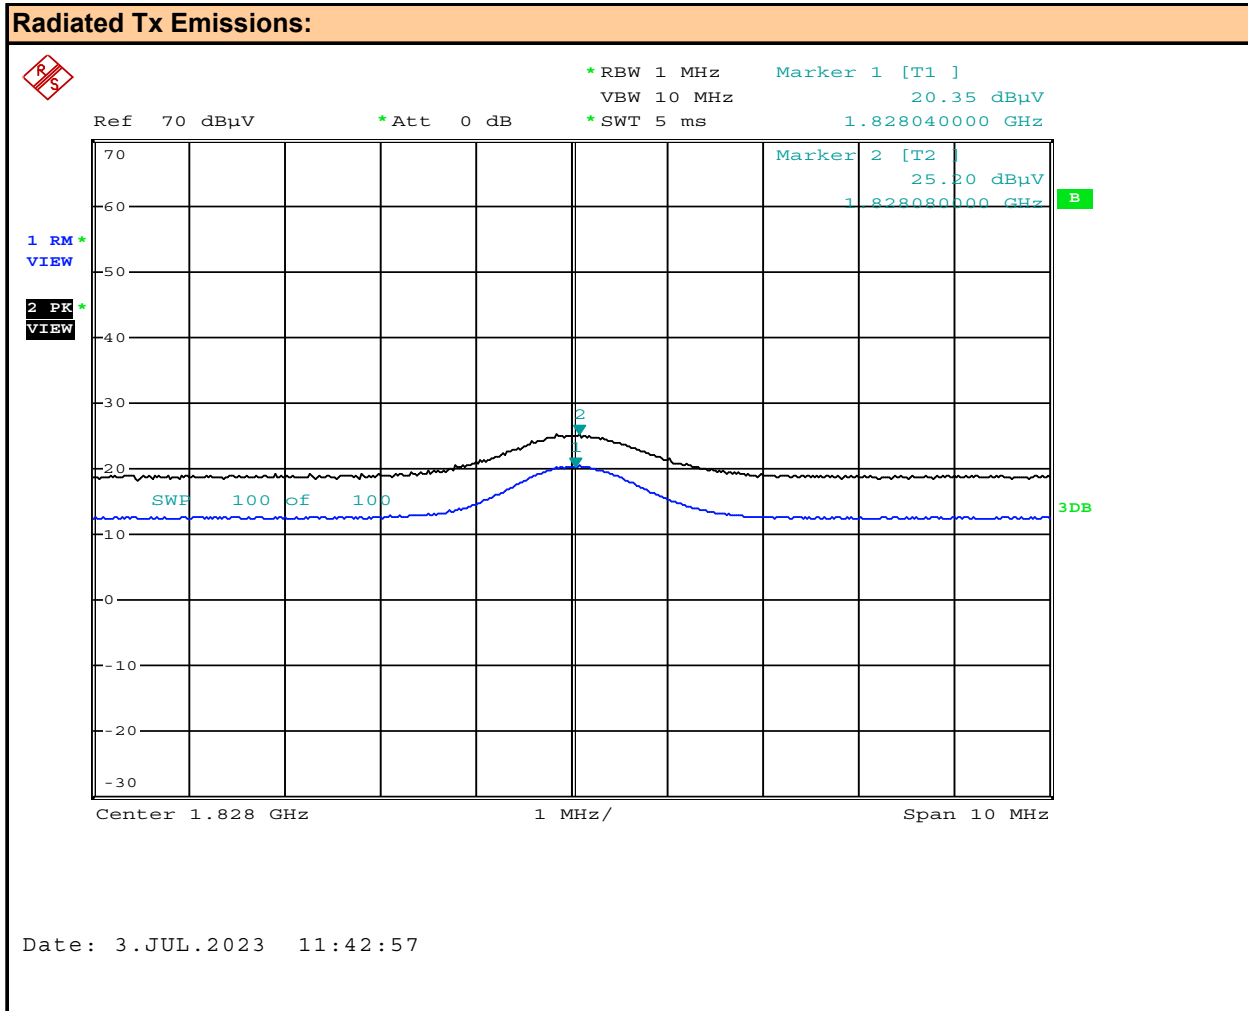


Channel:	5	Channel Frequency:	914 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Horizontal	Measured Channel Power(PK):	25.20 dBm
Emission Frequency:	1828 MHz	Measured Channel Power(AV):	20.35 dBm

Plot 9.8 – Radiated Tx Emissions, Ch 5, 3rd Harmonic, Horizontal

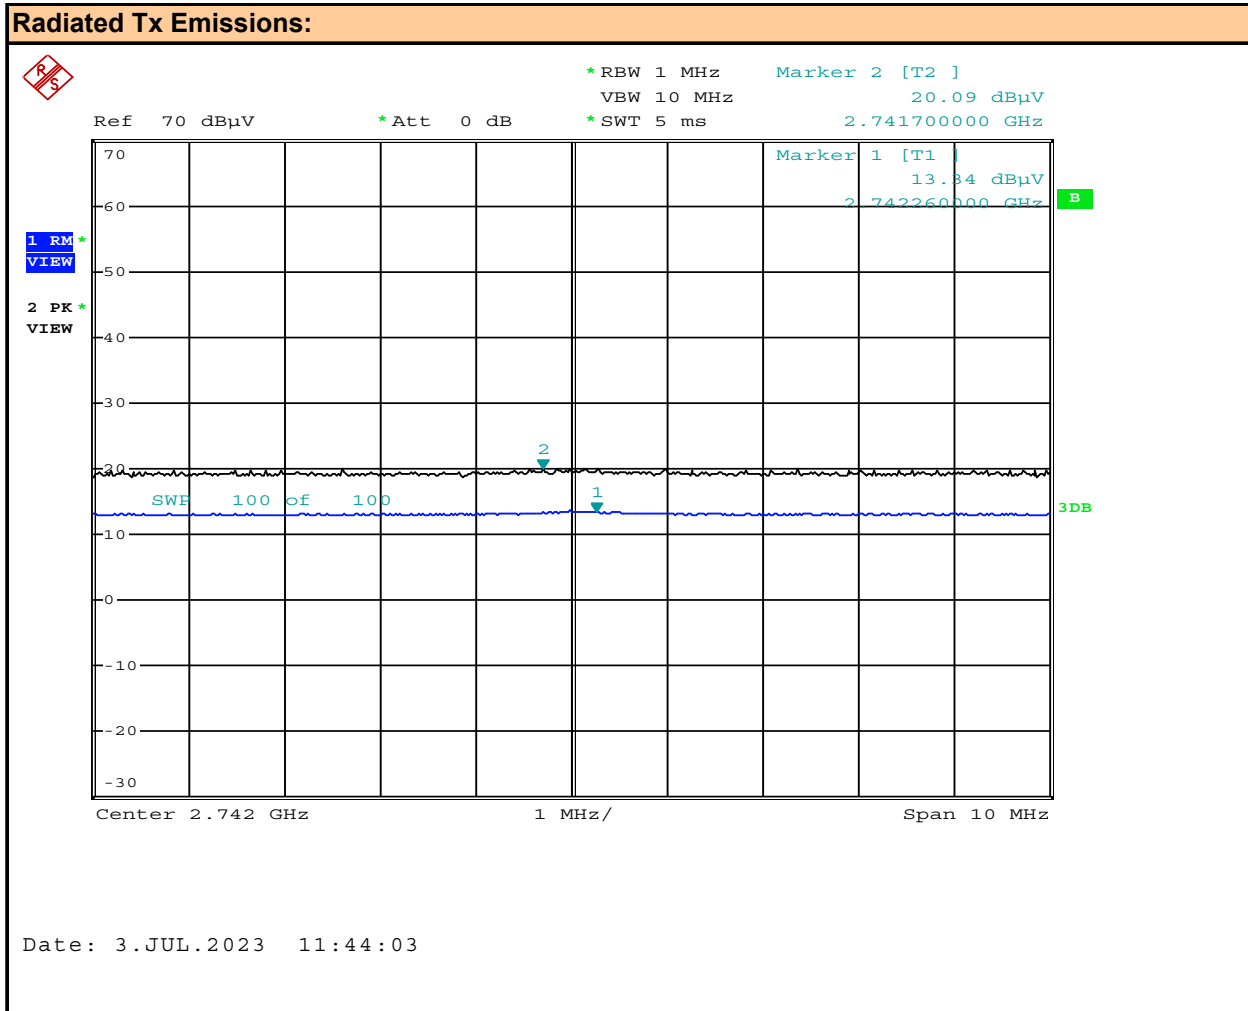


Channel:	5	Channel Frequency:	914 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Horizontal	Measured Channel Power(PK):	20.09 dBm
Emission Frequency:	2742 MHz	Measured Channel Power(AV):	13.34 dBm

Plot 9.9 – Radiated Tx Emissions, Ch 5, 2nd Harmonic, Vertical

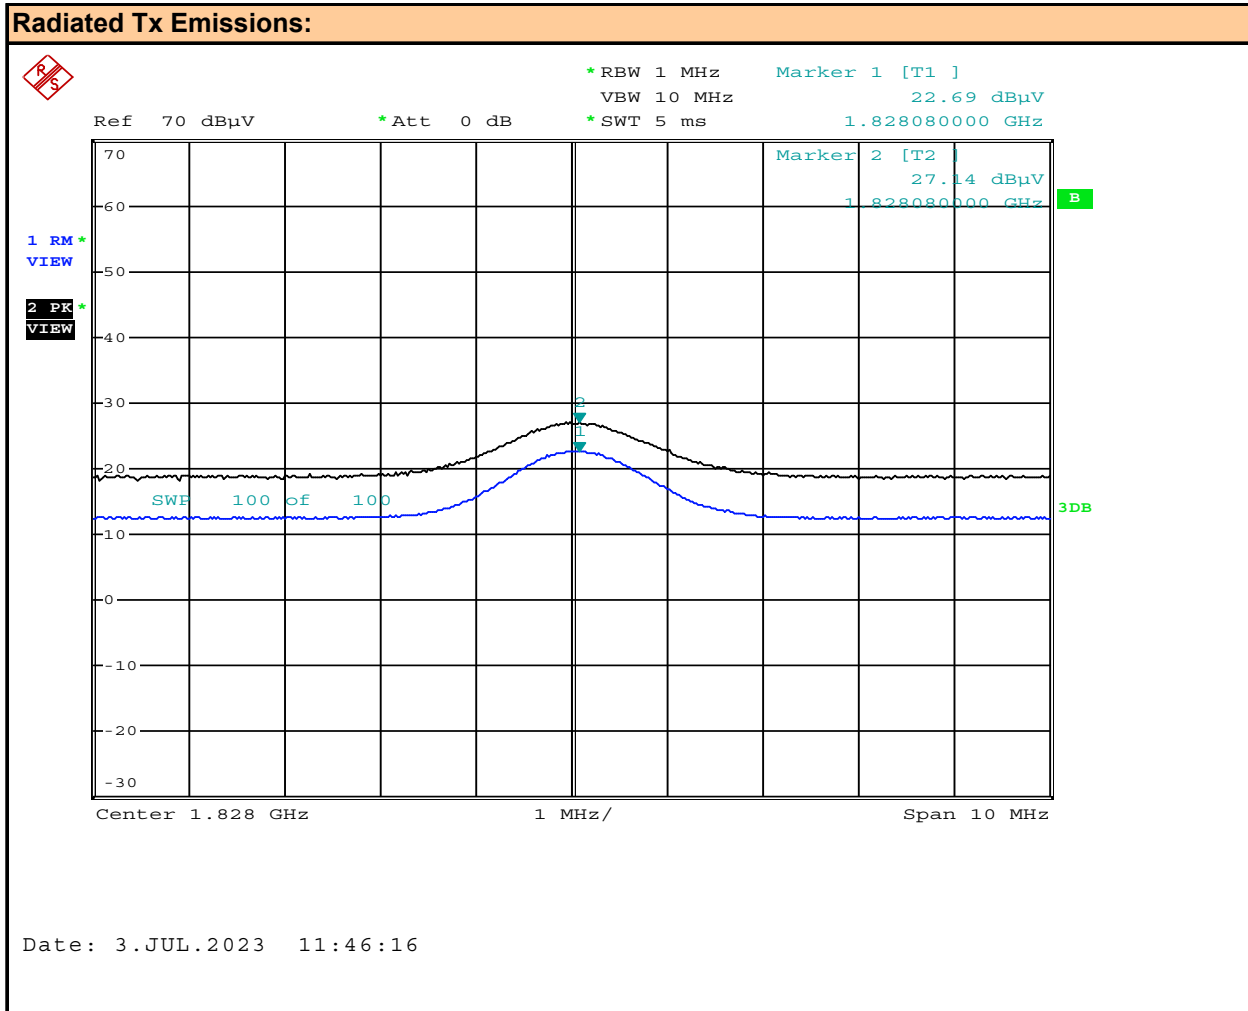


Channel:	5	Channel Frequency:	914 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Vertical	Measured Channel Power(PK):	27.14 dBm
Emission Frequency:	1828 MHz	Measured Channel Power(AV):	22.69 dBm

Plot 9.10 – Radiated Tx Emissions, Ch 5, 3rd Harmonic, Vertical

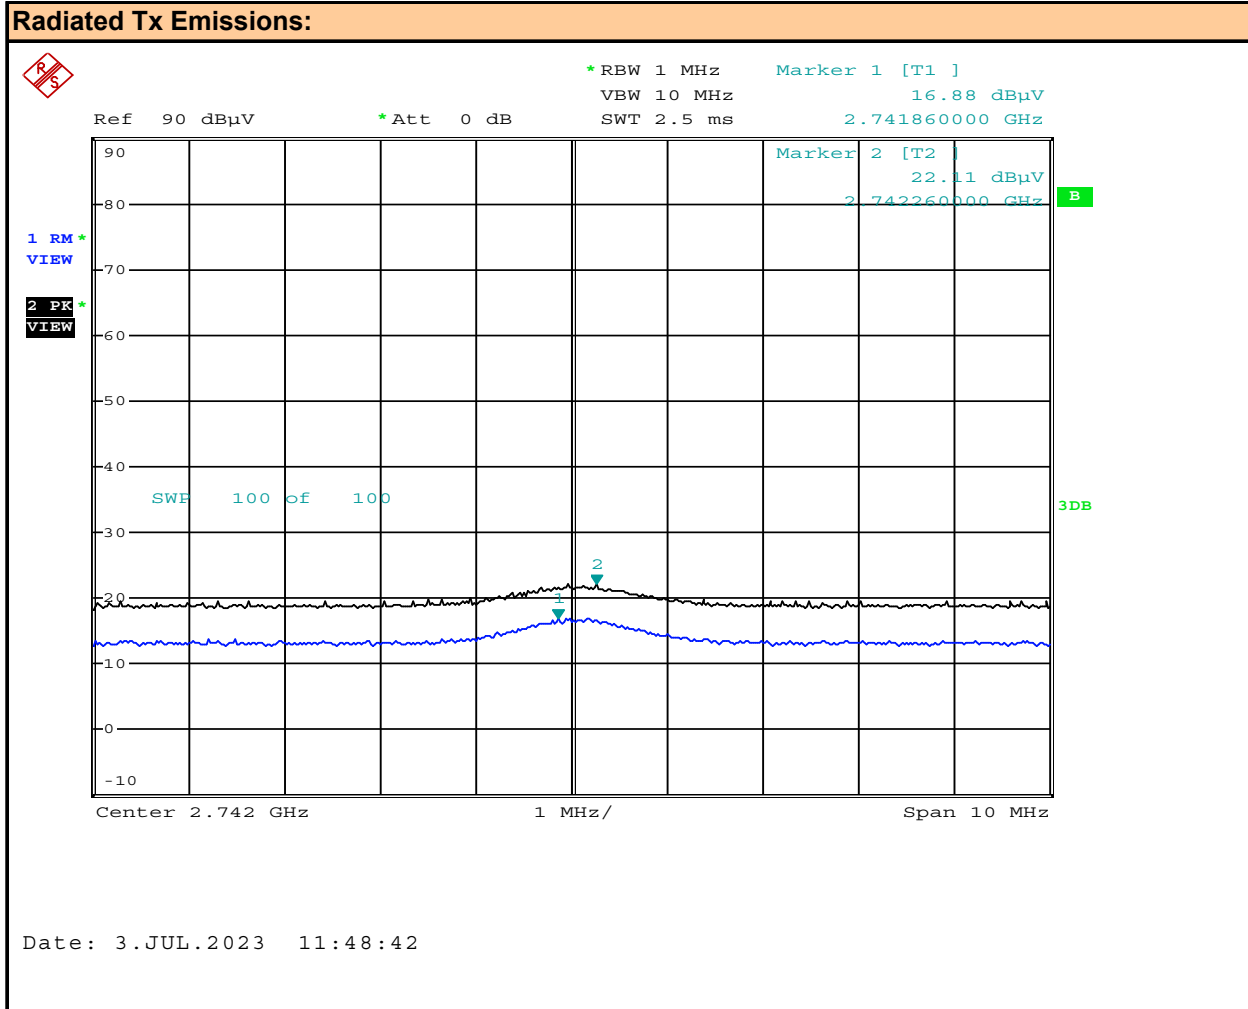


Channel:	5	Channel Frequency:	914 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Vertical	Measured Channel Power(PK):	22.11 dBm
Emission Frequency:	2742 MHz	Measured Channel Power(AV):	16.88 dBm

Plot 9.11 – Radiated Tx Emissions, Ch 10, 2nd Harmonic, Horizontal

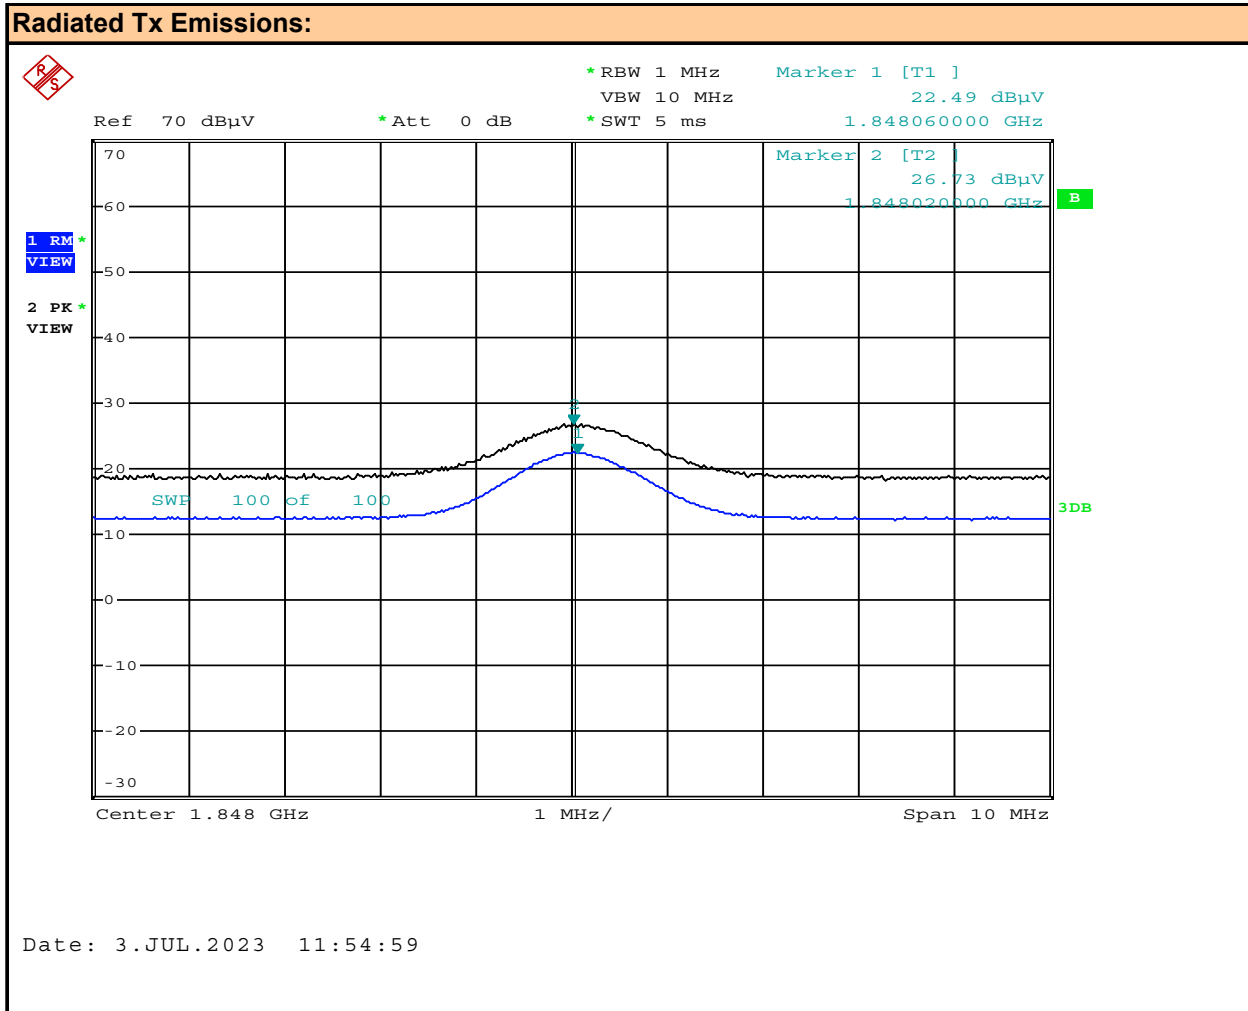


Channel:	10	Channel Frequency:	924 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Horizontal	Measured Channel Power(PK):	26.73 dBm
Emission Frequency:	1848 MHz	Measured Channel Power(AV):	22.49 dBm

Plot 9.12 – Radiated Tx Emissions, Ch 10, 3rd Harmonic, Horizontal

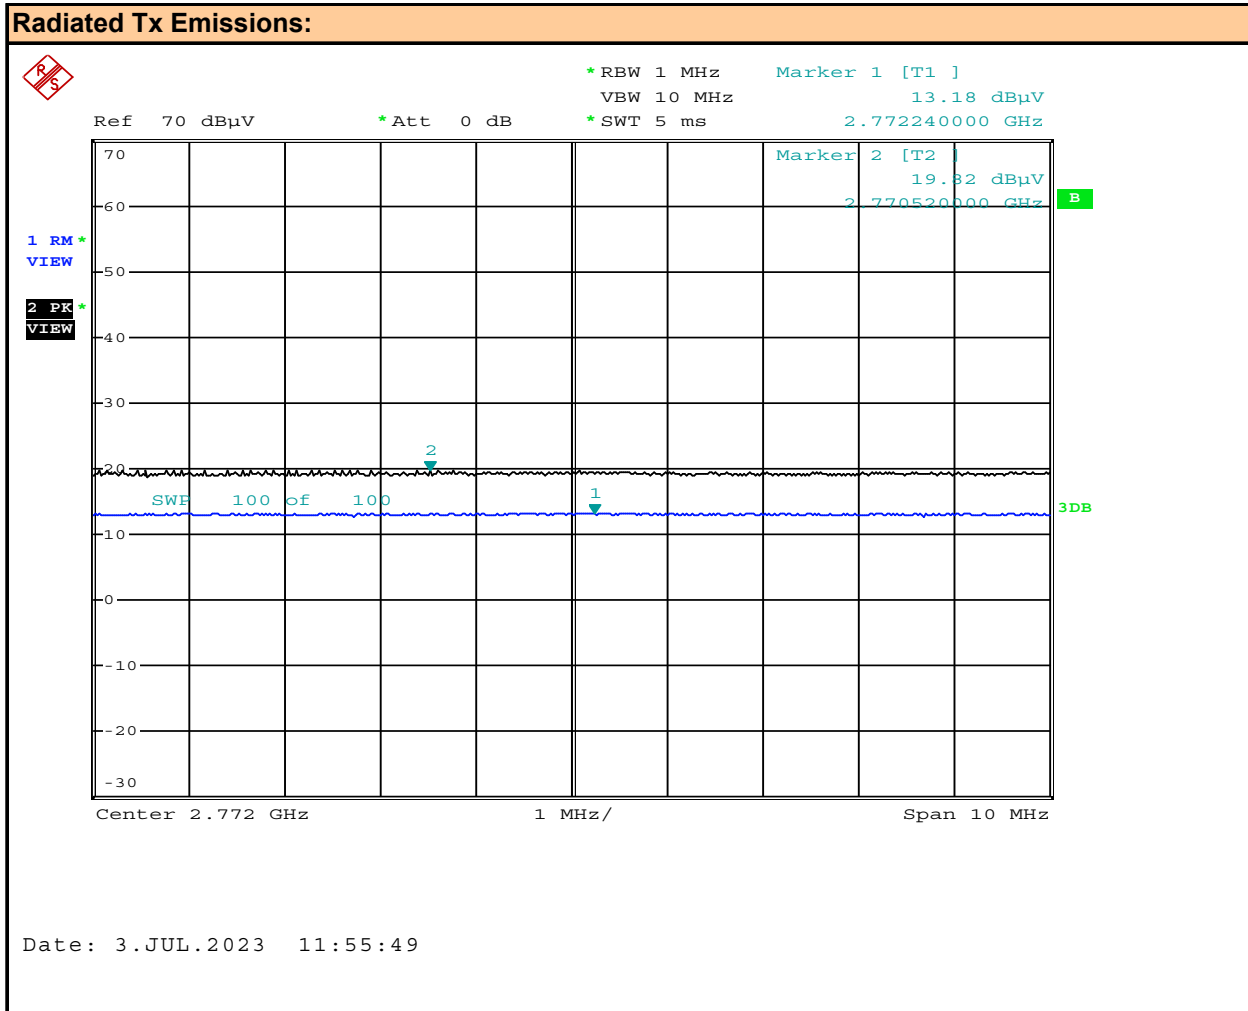


Channel:	10	Channel Frequency:	924 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Horizontal	Measured Channel Power(PK):	19.82 dBm
Emission Frequency:	2772 MHz	Measured Channel Power(AV):	13.18 dBm

Plot 9.13 – Radiated Tx Emissions, Ch 10, 2nd Harmonic, Vertical

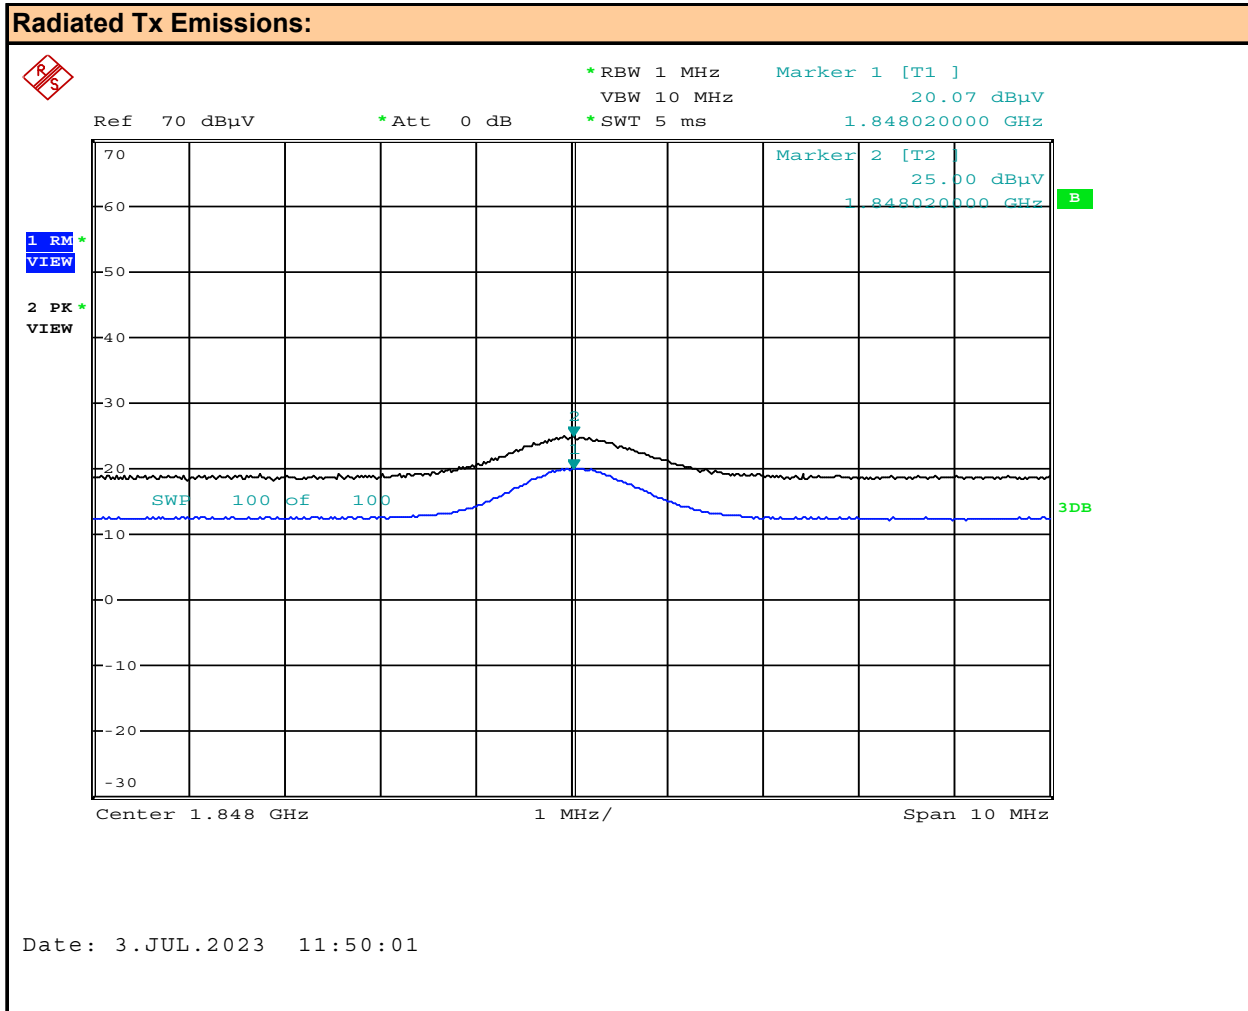

Channel:	10	Channel Frequency:	924 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Vertical	Measured Channel Power(PK):	25.00 dBm
Emission Frequency:	1848 MHz	Measured Channel Power(AV):	20.07 dBm

Plot 9.14 – Radiated Tx Emissions, Ch 10, 3rd Harmonic, Vertical

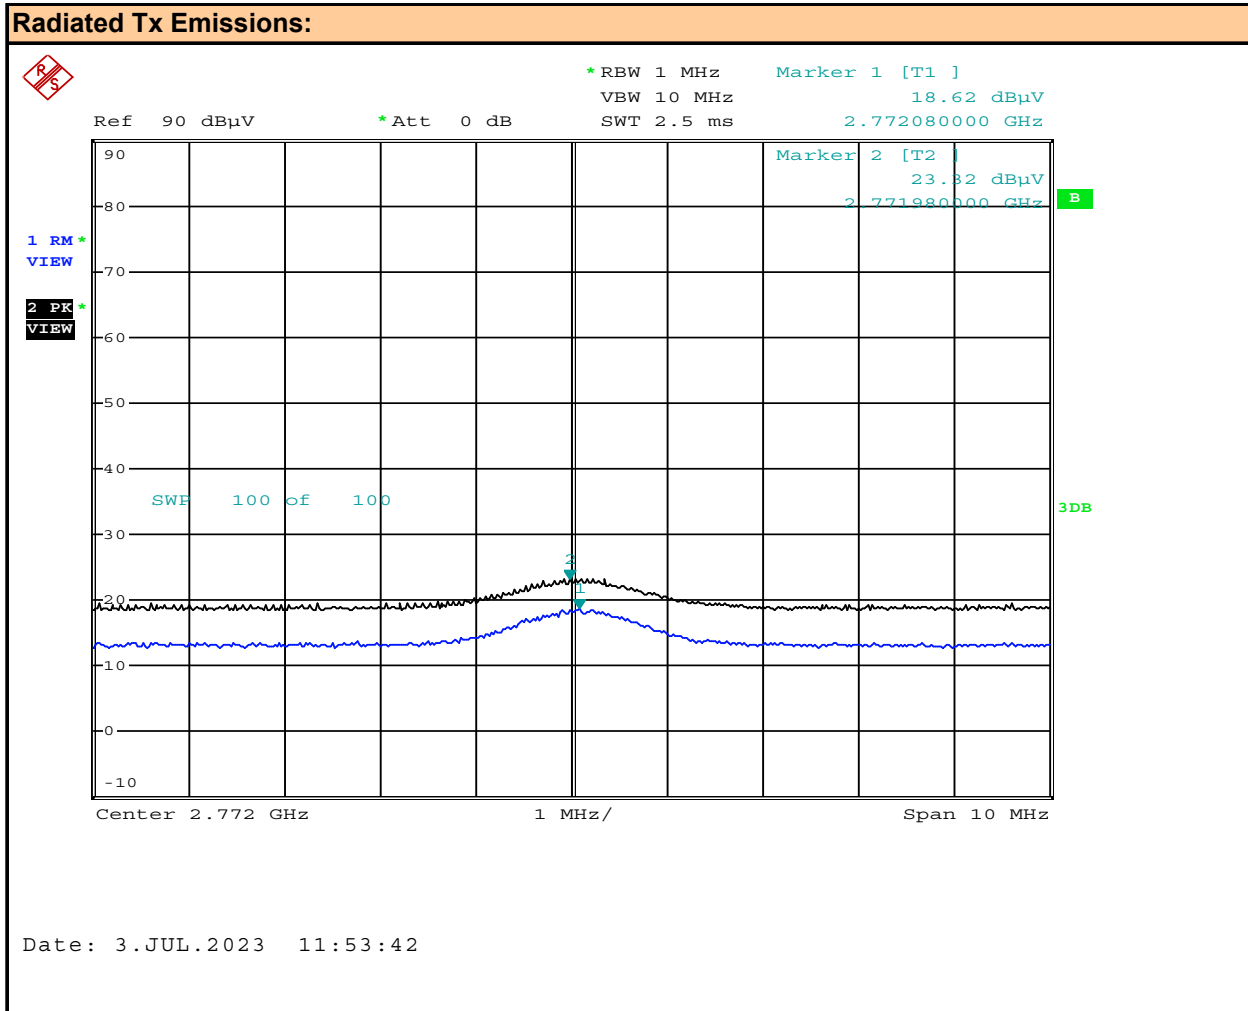

Channel:	10	Channel Frequency:	924 MHz
Mode:	-	Modulation:	BPSK
Polarization:	Vertical	Measured Channel Power(PK):	23.32 dBm
Emission Frequency:	2772 MHz	Measured Channel Power(AV):	18.62 dBm

Table 9.1 – Summary of Radiated Tx Emissions Measurements

Summary of Radiated Tx Emissions											
Measured Frequency Range (MHz)	Channel Frequency (MHz)	Antenna Polarization	Emission Frequency (MHz)	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L _C] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)	
30-1000	914.0	Horizontal	914.0	(1) AV	29.40	2.92	0.00 (3)	31.3	46.0	(1)	
30-1000	914.0	Vertical	914.0	(1) AV	29.40	2.92	0.00 (3)	31.3	46.0	(1)	
1812.0	906.0	Horizontal	1812.0	19.26 AV	26.60	3.14	0.00 (3)	49.0	54.0	5.0	
2718.0	906.0	Horizontal	2718.0	13.45 AV	28.66	4.58	0.00 (3)	46.7	54.0	7.3	
1812.0	906.0	Vertical	1812.0	19.52 AV	26.60	3.14	0.00 (3)	49.3	54.0	4.7	
2718.0	906.0	Vertical	2718.0	14.10 AV	28.66	4.58	0.00 (3)	47.3	54.0	6.7	
1828.0	914.0	Horizontal	1828.0	20.35 AV	26.64	3.14	0.00 (3)	50.1	54.0	3.9	
2742.0	914.0	Horizontal	2742.0	13.34 AV	28.66	4.58	0.00 (3)	46.6	54.0	7.4	
1828.0	914.0	Vertical	1828.0	22.69 AV	26.64	3.14	0.00 (3)	52.5	54.0	1.5	
2742.0	914.0	Vertical	2742.0	16.88 AV	28.66	4.58	0.00 (3)	50.1	54.0	3.9	
1848.0	924.0	Horizontal	1848.0	22.49 AV	26.85	3.14	0.00 (3)	52.5	54.0	1.5	
2772.0	924.0	Horizontal	2772.0	13.18 AV	28.69	4.58	0.00 (3)	46.4	54.0	7.6	
1848.0	924.0	Vertical	1848.0	20.07 AV	26.85	3.14	0.00 (3)	50.1	54.0	3.9	
2772.0	924.0	Vertical	2772.0	18.62 AV	28.69	4.58	0.00 (3)	51.9	54.0	2.1	
1812.0	906.0	Horizontal	1812.0	24.04 PK	26.60	3.14	0.00 (3)	53.8	74.0	20.2	
2718.0	906.0	Horizontal	2718.0	20.05 PK	28.66	4.58	0.00 (3)	53.3	74.0	20.7	
1812.0	906.0	Vertical	1812.0	24.35 PK	26.60	3.14	0.00 (3)	54.1	74.0	19.9	
2718.0	906.0	Vertical	2718.0	20.01 PK	28.66	4.58	0.00 (3)	53.3	74.0	20.7	
1828.0	914.0	Horizontal	1828.0	25.20 PK	26.64	3.14	0.00 (3)	55.0	74.0	19.0	
2742.0	914.0	Horizontal	2742.0	20.09 PK	28.66	4.58	0.00 (3)	53.3	74.0	20.7	
1828.0	914.0	Vertical	1828.0	27.14 PK	26.64	3.14	0.00 (3)	56.9	74.0	17.1	
2742.0	914.0	Vertical	2742.0	22.11 PK	28.66	4.58	0.00 (3)	55.3	74.0	18.7	
1848.0	924.0	Horizontal	1848.0	26.73 PK	26.85	3.14	0.00 (3)	56.7	74.0	17.3	
2772.0	924.0	Horizontal	2772.0	19.82 PK	28.69	4.58	0.00 (3)	53.1	74.0	20.9	
1848.0	924.0	Vertical	1848.0	25.00 PK	26.85	3.14	0.00 (3)	55.0	74.0	19.0	
2772.0	924.0	Vertical	2772.0	23.32 PK	28.69	4.58	0.00 (3)	56.6	74.0	17.4	
Results:									Complies		

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + ACF^E + L_C - G_A$$

Where ACF^E is the Electric Antenna Correction Factor

10.0 RADIATED RX EMISSIONS

Test Procedure

Normative Reference	FCC 47 CFR §15.109, ICES-003(6.2) ANSI C63.4-2014
----------------------------	--

Limits


47 CFR §15.109	(b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the following: 30-88MHz: 39.1dBuV/m 30-88MHz: 49.6dBuV/m @ 3m 88-216MHz: 43.5dBuV/m 88-216MHz: 54.0dBuV/m @ 3m 216-960MHz: 46.4dBuV/m 216-960MHz: 56.9dBuV/m @ 3m > 960MHz: 49.5dBuV/m > 960MHz: 60.0dBuV/m @ 3m	
ICES-003(6.2.1)	6.2.1 - Radiated Emissions Limits Below 1 GHz Class A: ITE that meets the conditions for Class A operation defined in Section 2.2 shall comply with the Class A radiated limits set out in Table 4 determined at a distance of 10 metres. 30-88MHz: 39.1dBuV/m 30-88MHz: 49.6dBuV/m @ 3m 88-216MHz: 43.5dBuV/m 88-216MHz: 54.0dBuV/m @ 3m 216-960MHz: 46.4dBuV/m 216-960MHz: 56.9dBuV/m @ 3m > 960MHz: 49.5dBuV/m > 960MHz: 60.0dBuV/m @ 3m	

Test Setup	Appendix A	Figure A.1
-------------------	-------------------	-------------------

Measurement Procedure


The DUT was set up as per ANSI C63.4:2014. Emissions were scanned between 30MHz and 1000MHz. The turntable was rotated 360 degrees and the antenna was elevated to 4m to optimize the measured emissions.

Plot 10.1 – Radiated Rx Emissions, 30-1000MHz, Horizontal

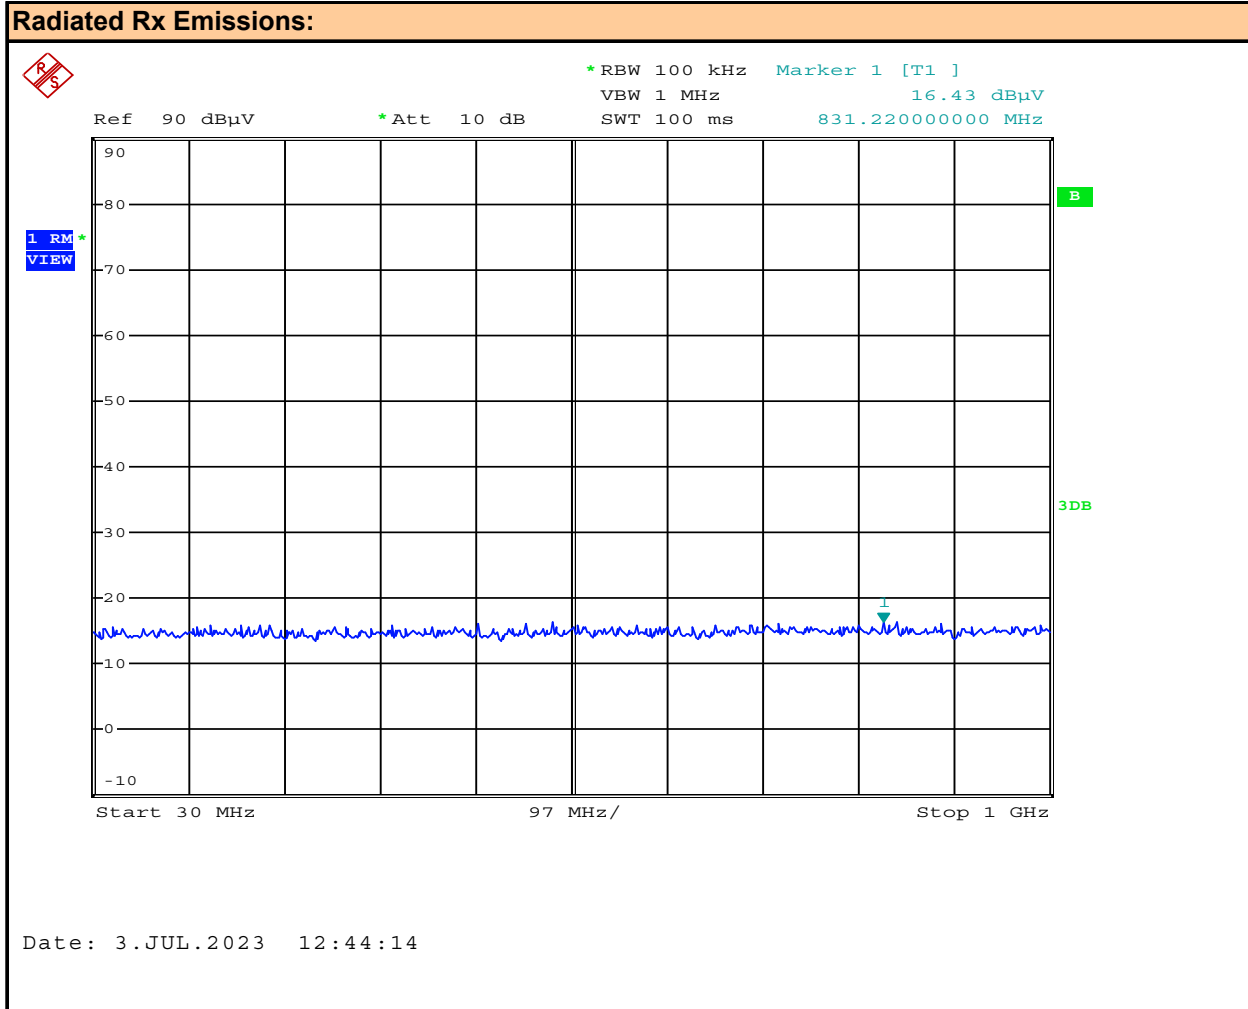


Channel:	-	Channel Frequency:	-	MHz
Mode:	-	Modulation:	-	
Polarization:	Horizontal	Measured Channel Power(PK):	ND	dBm
Emission Frequency:	ND	Measured Channel Power(AV):	ND	dBm

Plot 10.2 – Radiated Rx Emissions, 30-1000MHz, Vertical

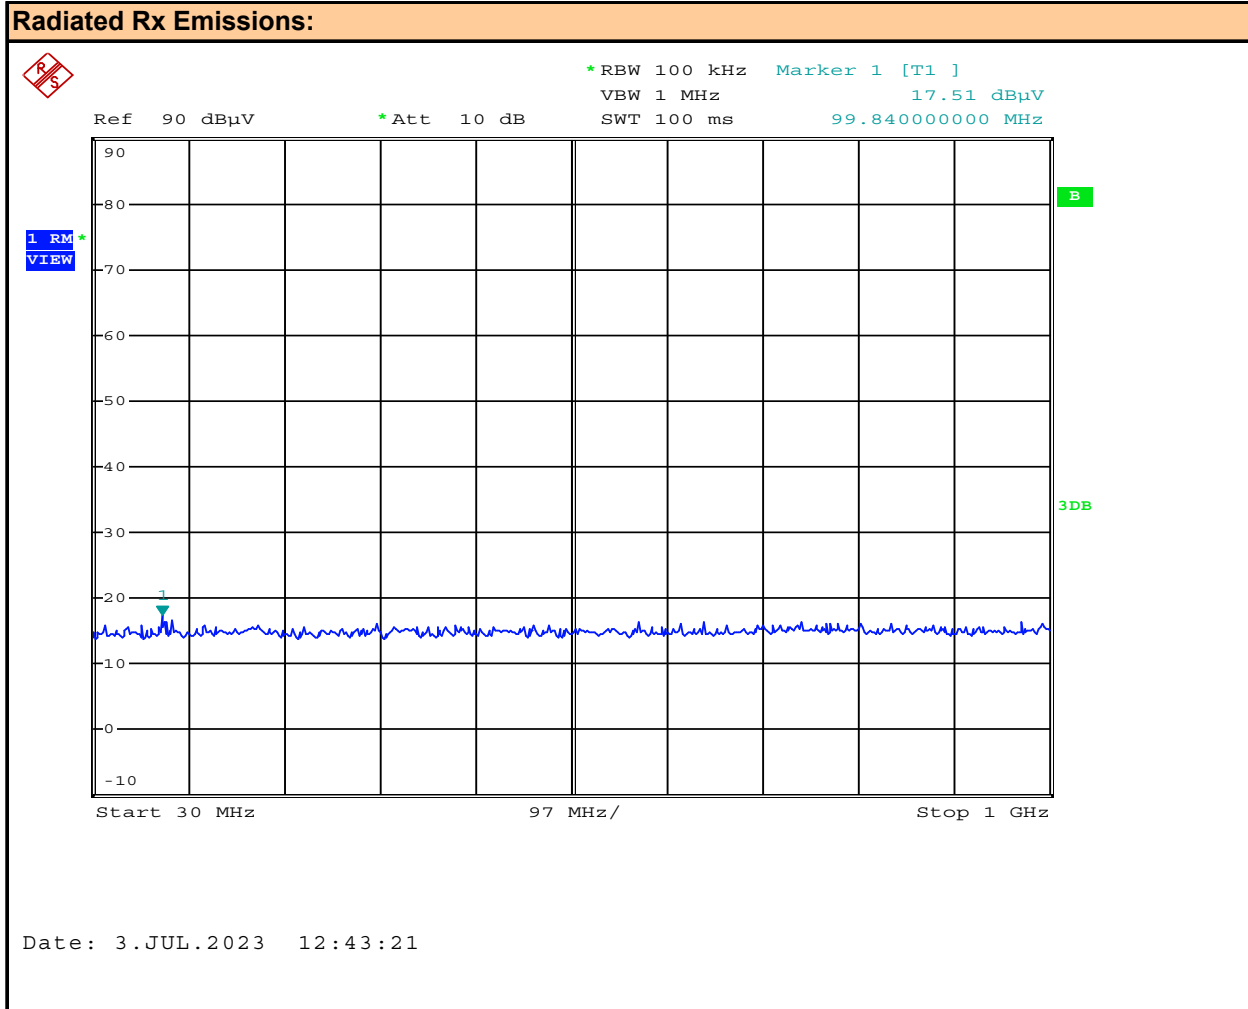


Channel:	-	Channel Frequency:	-	MHz
Mode:	-	Modulation:	-	
Polarization:	Vertical	Measured Channel Power(PK):	ND	dBm
Emission Frequency:	ND	Measured Channel Power(AV):	ND	dBm

Plot 10.3 – Radiated Rx Emissions, 1-3GHz, Horizontal

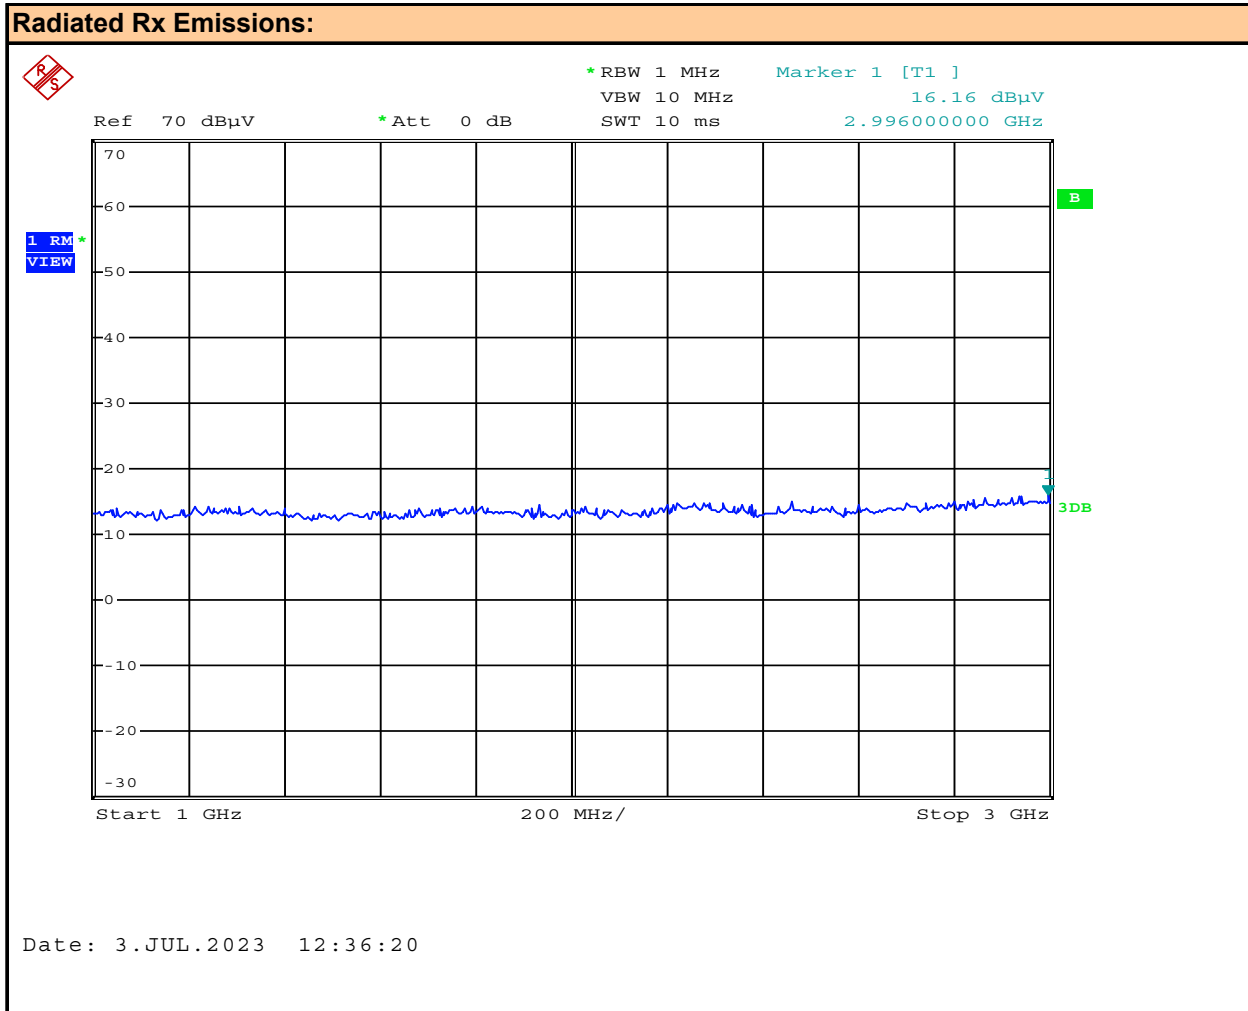


Channel:	-	Channel Frequency:	-	MHz
Mode:	-	Modulation:	-	
Polarization:	Horizontal	Measured Channel Power(PK):	ND	dBm
Emission Frequency:	ND	Measured Channel Power(AV):	ND	dBm

Plot 10.4 – Radiated Rx Emissions, 1-3GHz, Vertical

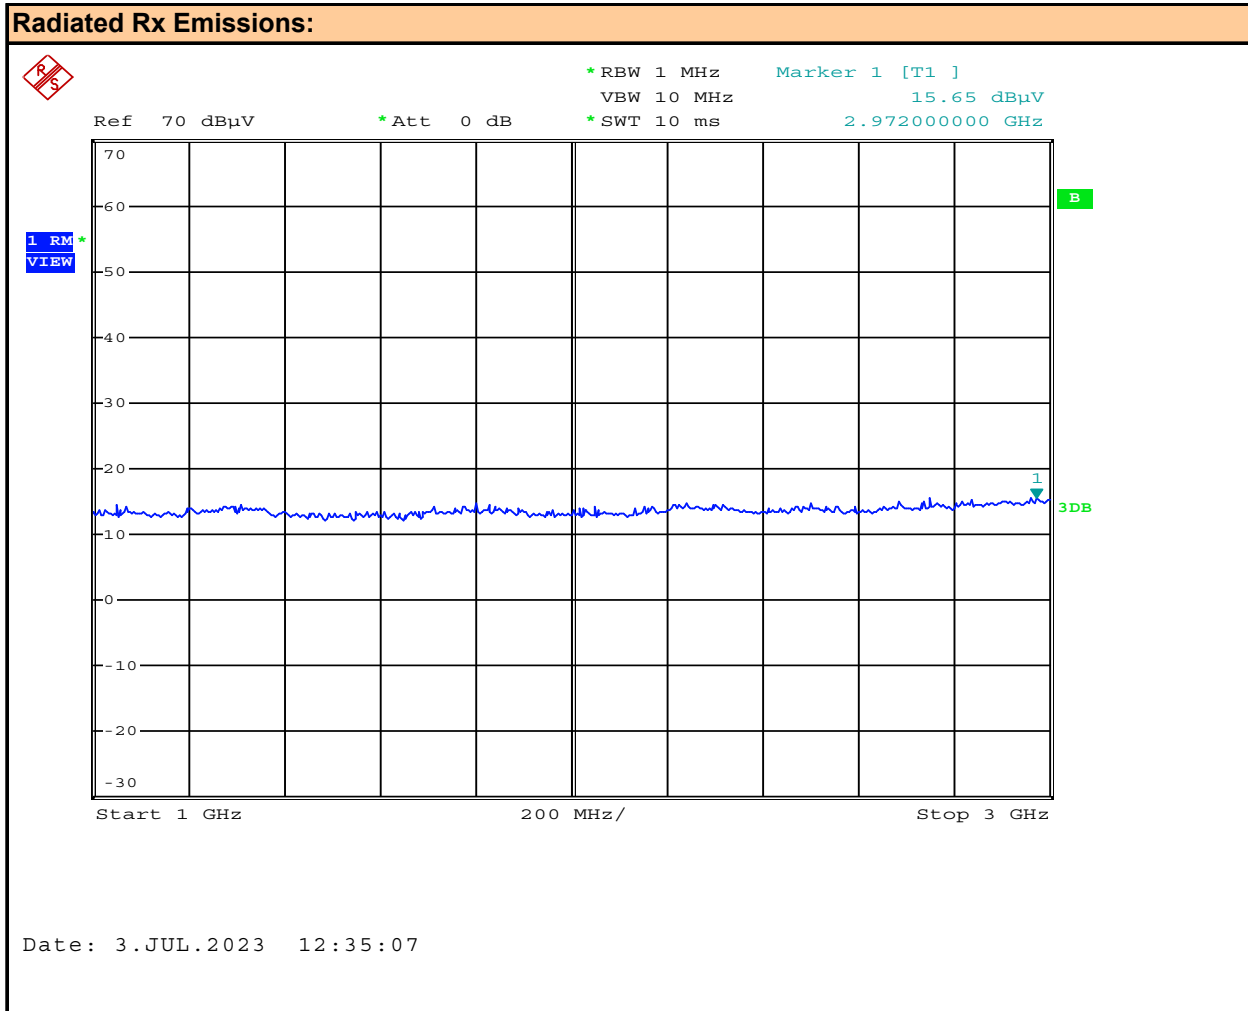


Channel:	-	Channel Frequency:	-	MHz
Mode:	-	Modulation:	-	
Polarization:	Vertical	Measured Channel Power(PK):	ND	dBm
Emission Frequency:	ND	Measured Channel Power(AV):	ND	dBm

Plot 10.5 – Radiated Rx Emissions, 3-10GHz, Horizontal

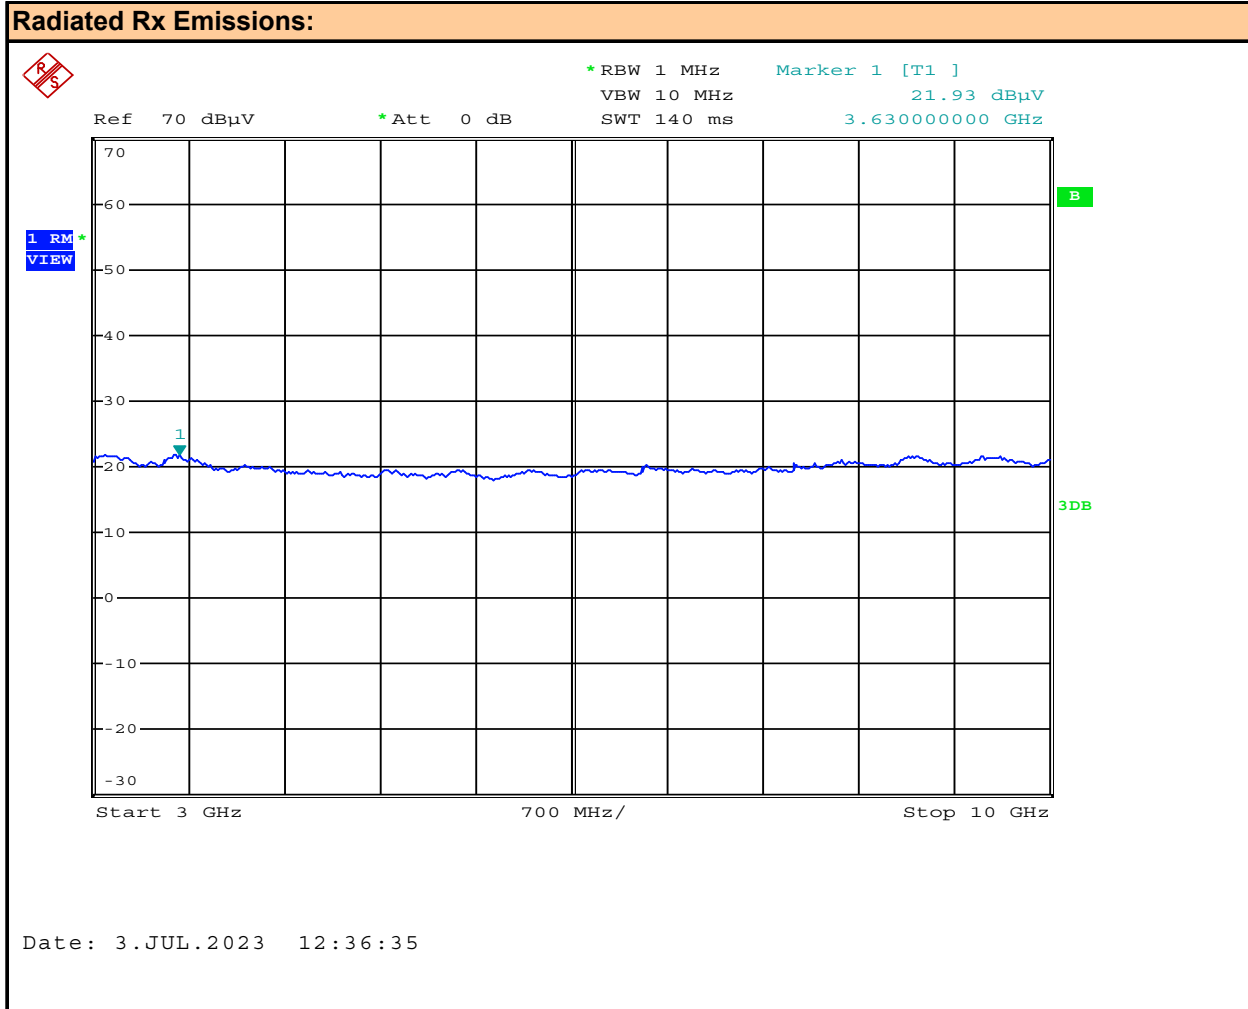

Channel:	-	Channel Frequency:	-	MHz
Mode:	-	Modulation:	-	
Polarization:	Horizontal	Measured Channel Power(PK):	ND	dBm
Emission Frequency:	ND	MHz	Measured Channel Power(AV):	ND
				dBm

Plot 10.6 – Radiated Rx Emissions, 3-10GHz, Vertical

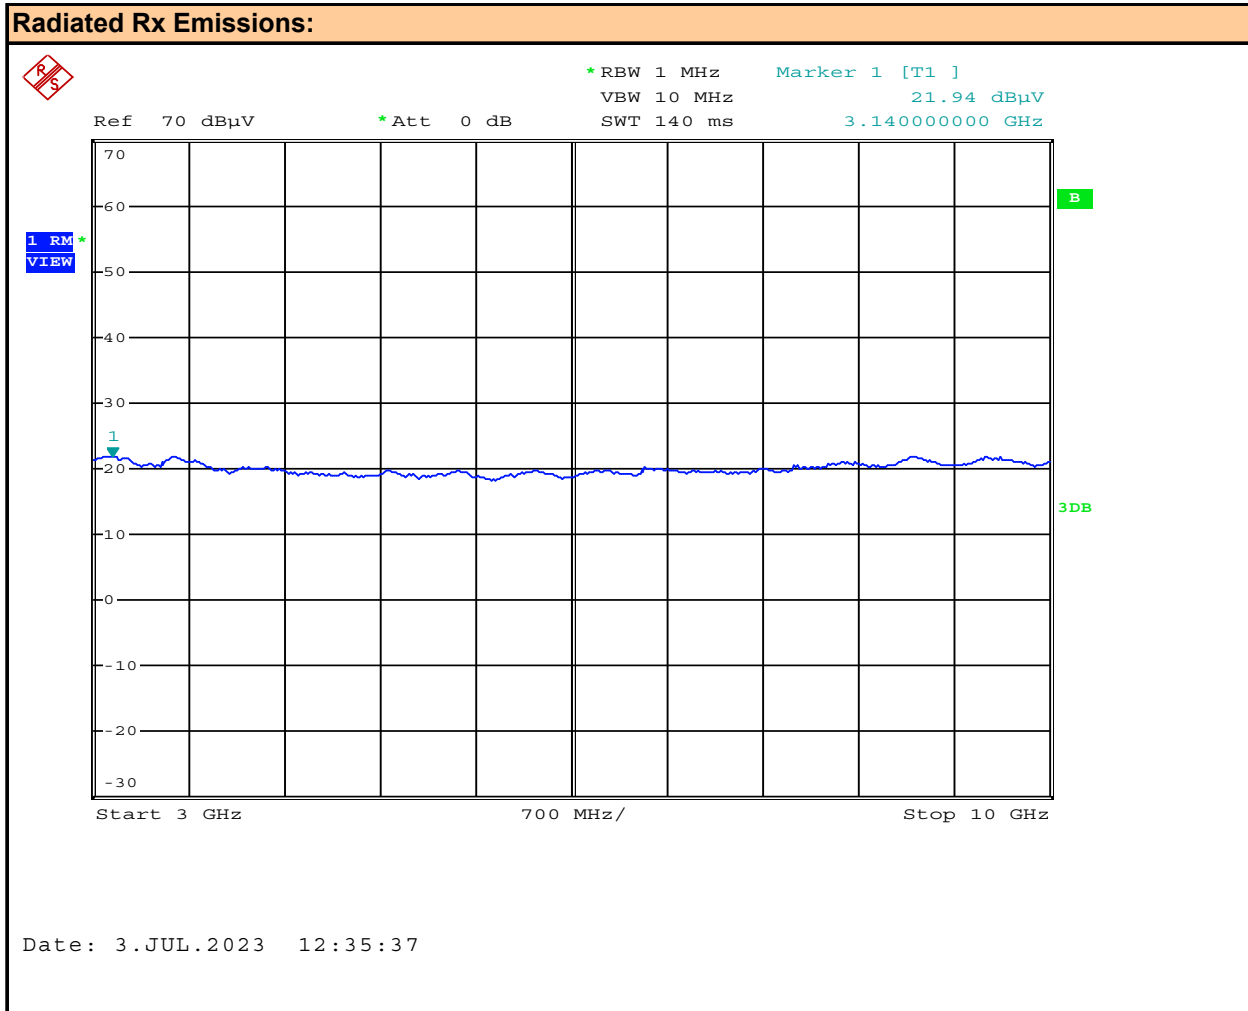

Channel:	-	Channel Frequency:	-	MHz
Mode:	-	Modulation:	-	
Polarization:	Vertical	Measured Channel Power(PK):	ND	dBm
Emission Frequency:	ND	Measured Channel Power(AV):	ND	dBm

Table 10.1 – Summary of Radiated Rx Measurements

Summary of Radiated Rx Emissions										
Measured Frequency Range (MHz)	Channel Frequency (MHz)	Antenna Polarization	Emission Frequency (MHz)	Measured Emission [E _{Meas}] (dBuV)	Antenna ACF [ACF] (dB)	Cable Loss [L _C] (dB)	Amplifier Gain [G _A] (dB)	Corrected Emission [E _{Corr}] (dBuV/m)	Limit (dBuV)	Margin (dB)
30-1000	-	Horizontal	(1)	(1) AV	-	-	0.00 (3)	(1)	-	(1)
30-1000	-	Vertical	(1)	(1) AV	-	-	0.00 (3)	(1)	-	(1)
1000-3000	-	Horizontal	(1)	(1) AV	-	-	0.00 (3)	(1)	54.0	(1)
1000-3000	-	Vertical	(1)	(1) AV	-	-	0.00 (3)	(1)	54.0	(1)
3000-1000	-	Horizontal	(1)	(1) AV	-	-	0.00 (3)	(1)	54.0	(1)
3000-1000	-	Vertical	(1)	(1) AV	-	-	0.00 (3)	(1)	54.0	(1)
Results:									Complies	

(1) No Emissions Detected (ND) above ambient or within 20dB of the limit

(3) External Amplifier not used

$$E_{\text{Corr}} = E_{\text{Meas}} + \text{ACF}^E + L_C - G_A$$

Where ACF^E is the Electric Antenna Correction Factor

APPENDIX A – TEST SETUP DRAWINGS

Table A.1 – Conducted Measurement Setup

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00241	R&S	FSU40	Spectrum Analyzer

Figure A.1 – Test Setup – Conducted Measurements

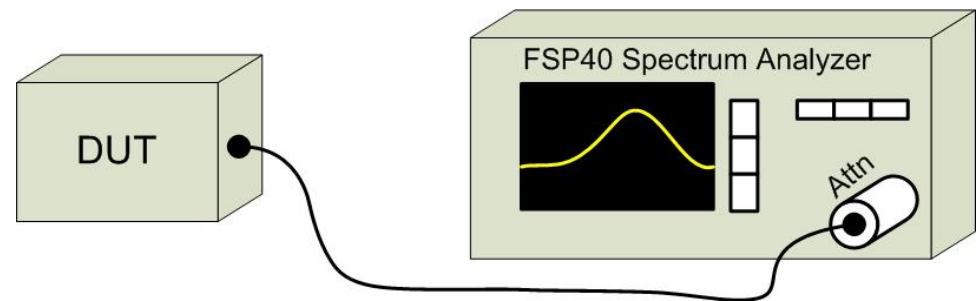


Table A.2 – Radiated Emissions Measurement Equipment

Equipment List			
Asset Number	Manufacturer	Model Number	Description
00051	HP	8566B	Spectrum Analyzer
00049	HP	85650A	Quasi-peak Adapter
00047	HP	85685A	RF Preselector
00072	EMCO	2075	Mini-mast
00073	EMCO	2080	Turn Table
00071	EMCO	2090	Multi-Device Controller
00265	Miteq	JS32-00104000-58-5P	Microwave L/N Amplifier
00241	R&S	FSU40	Spectrum Analyzer
00050	Chase	CBL-6111A	Bilog Antenna
00275	Coaxis	LMR400	25m Cable
00276	Coaxis	LMR400	4m Cable
00278	TILE	34G3	TILE Test Software
00034	ETS	3115	Double Ridged Guide Horn
00085	EMCO	6502	Loop Antenna

Figure A.2 – Test Setup Radiated Measurements 9kHzMHz – 30MHz

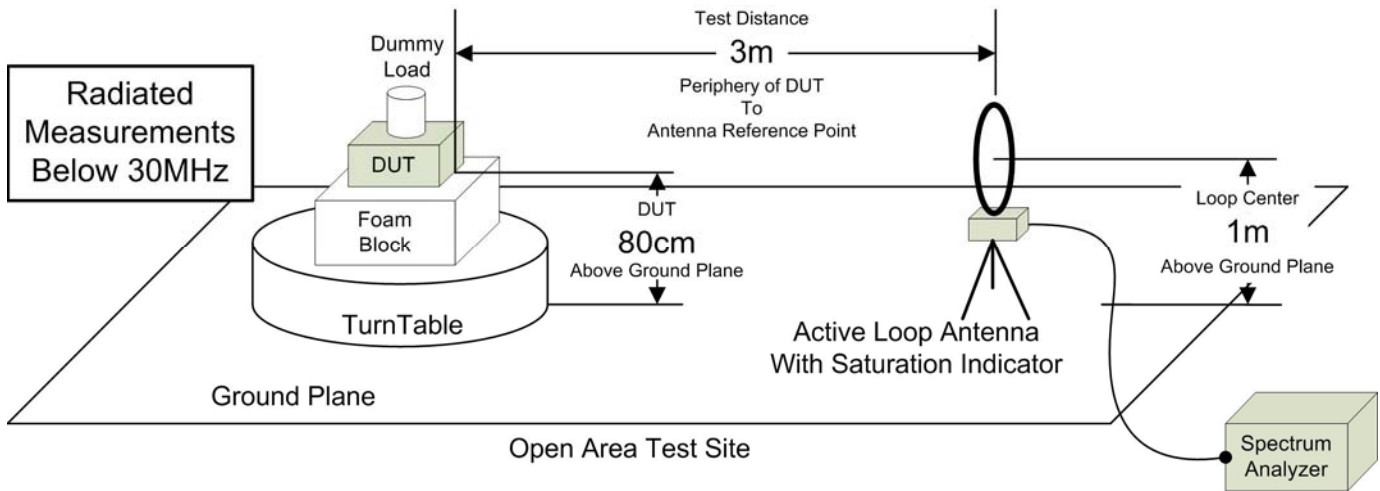


Figure A.3 – Test Setup Radiated Measurements 30MHz – 1GHz

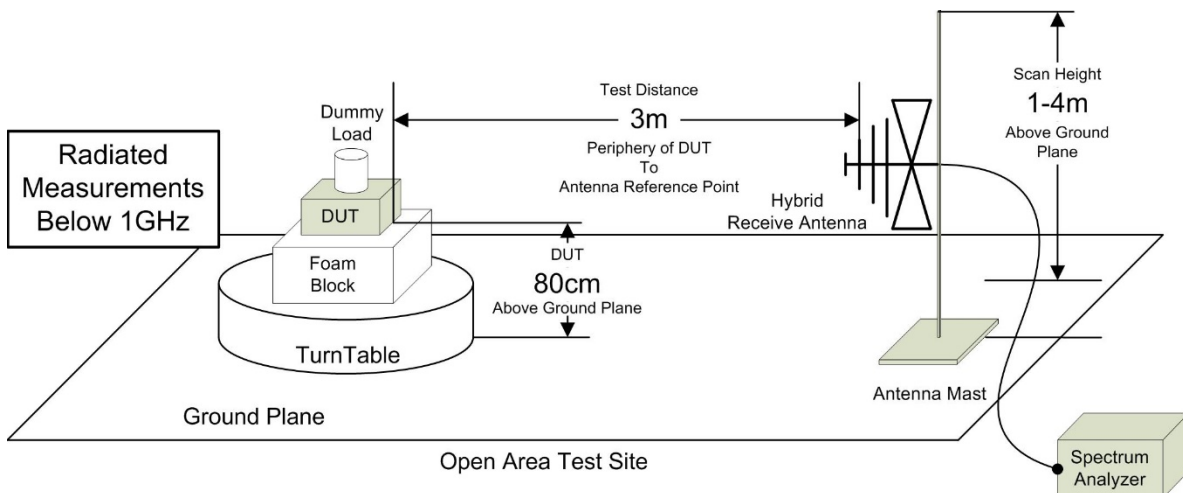


Figure A.4 – Test Setup Radiated Measurements 30MHz – 1GHz, Signal Substitution


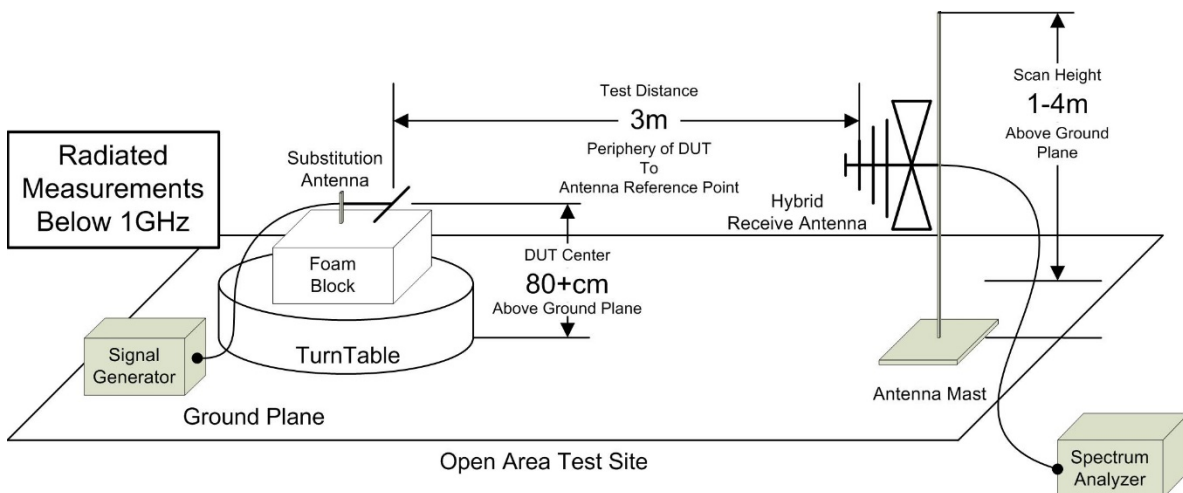


Figure A.5 – Test Setup Radiated Measurements 1 – 18GHz

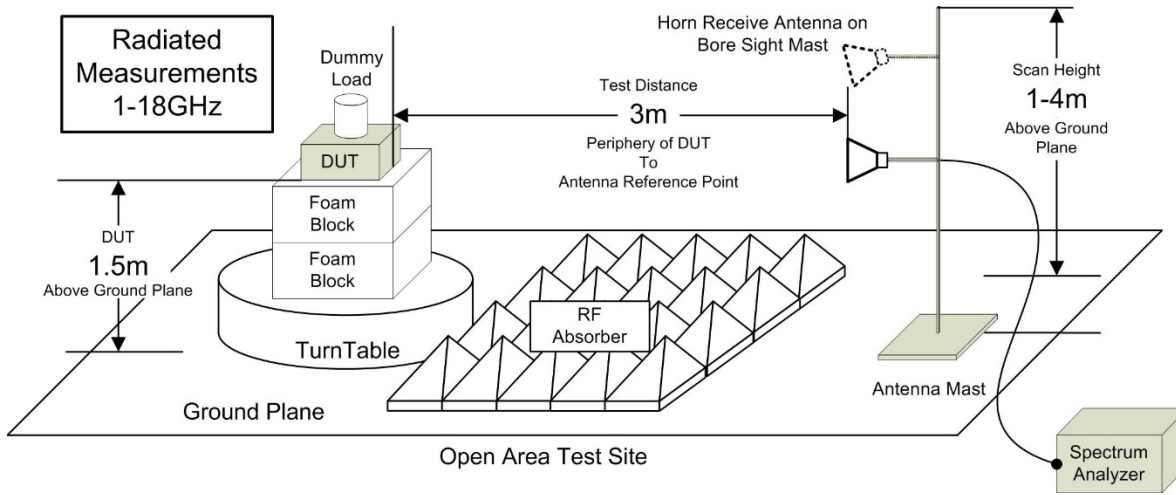

APPENDIX B – EQUIPMENT LIST AND CALIBRATION

Equipment List							
Asset Number	Manufacturer	Model Number	Serial Number	Description	Last Calibrated	Calibration Interval	Calibration Due
00050	Chase	CBL-6111A	1607	Bilog Antenna	16 Nov 2020	Triennial	16 Nov 2023
00035	ETS	3115	6276	Double Ridged Guide Horn	4 Mar 2022	Triennial	4 Mar 2025
00241	R&S	FSU40	100500	Spectrum Analyzer	10 Aug 2021	Triennial	10 Aug 2024
00005	HP	8648D	3847A00611	Signal Generator	23 Jun 2020	Triennial	23 Jun 2023
00071	EMCO	2090	9912-1484	Multi-Device Controller	n/a	n/a	n/a
00072	EMCO	2075	0001-2277	Mini-mast	n/a	n/a	n/a
00073	EMCO	2080	0002-1002	Turn Table	n/a	n/a	n/a
00263	Koaxis	KP10-1.00M-TD	263	1m Armoured Cable	COU	n/a	COU
00263B	Koaxis	KP10-1.00M-TD	263B	1m Armoured Cable	COU	n/a	COU
00275	TMS	LMR400	n/a	25m Cable	COU	n/a	COU
00278	TILE	34G3	n/a	TILE Test Software	NCR	n/a	NCR

NCR: No Calibration Required

COU: Calibrate On Use

APPENDIX C – MEASUREMENT INSTRUMENT UNCERTAINTY

CISPR 16-4 Measurement Uncertainty (U_{LAB})

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence interval using a coverage factor of $k=2$

Radiated Emissions 30MHz - 200MHz

$U_{LAB} = 5.14\text{dB}$ $U_{CISPR} = 6.3\text{dB}$

Radiated Emissions 200MHz - 1000MHz

$U_{LAB} = 5.90\text{dB}$ $U_{CISPR} = 6.3\text{dB}$

Radiated Emissions 1GHz - 6GHz

$U_{LAB} = 4.80\text{dB}$ $U_{CISPR} = 5.2\text{dB}$

Radiated Emissions 6GHz - 18GHz

$U_{LAB} = 5.1\text{dB}$ $U_{CISPR} = 5.5\text{dB}$

Power Line Conducted Emissions 9kHz to 150kHz

$U_{LAB} = 2.96\text{dB}$ $U_{CISPR} = 3.8\text{dB}$

Power Line Conducted Emissions 150kHz to 30MHz

$U_{LAB} = 3.12\text{dB}$ $U_{CISPR} = 3.4\text{dB}$

If the calculated uncertainty U_{lab} is **less** than U_{CISPR} then:

- | | |
|---|---|
| 1 | Compliance is deemed to occur if NO measured disturbance exceeds the disturbance limit |
| 2 | Non-Compliance is deemed to occur if ANY measured disturbance EXCEEDS the disturbance limit |

If the calculated uncertainty U_{lab} is **greater** than U_{CISPR} then:

- | | |
|---|--|
| 3 | Compliance is deemed to occur if NO measured disturbance, increased by ($U_{lab} - U_{CISPR}$), exceeds the disturbance limit |
| 4 | Non-Compliance is deemed to occur if ANY measured disturbance, increased by ($U_{lab} - U_{CISPR}$), EXCEEDS the disturbance limit |

Other Measurement Uncertainties (U_{LAB})

RF Conducted Emissions 9kHz - 40GHz

$U_{LAB} = 1.0\text{dB}$ $U_{CISPR} = \text{n/a}$

Frequency/Bandwidth 9kHz - 40GHz

$U_{LAB} = 0.1\text{ppm}$ $U_{CISPR} = \text{n/a}$

Temperature

$U_{LAB} = 1^\circ\text{C}$ $U_{CISPR} = \text{n/a}$

END OF REPORT