

APPENDIX 1

SAR Measurement Data

TABLE OF CONTENTS

EXHIBIT 1. SYSTEM VERIFICATION 3

EXHIBIT 2. BODY SAR MEASUREMENT 5

EXHIBIT 1. SYSTEM VERIFICATION

		SAR1g			SAR10g		
	Frequency (MHz)	Reference (W/kg)	Measured	Delta %	Reference (W/kg)	Measured	Delta %
Body	2450	12.7	12.3	-3.15%	6.03	6.16	2.16%

File Name: System Verification - 2450MHz Body Final.da52:0

DUT: D2450V2 - SN821; Type: D2450V2; Serial: SN821

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 2.014$ S/m; $\epsilon_r = 50.857$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 7/29/2025
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

System Verification at 2.45GHz_Body/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 66.67 V/m; Power Drift = 0.43 dB


Peak SAR (extrapolated) = 24.0 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 6.16 W/kg

Maximum value of SAR (measured) = 15.6 W/kg

System Verification at 2.45GHz_Body/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.9 W/kg

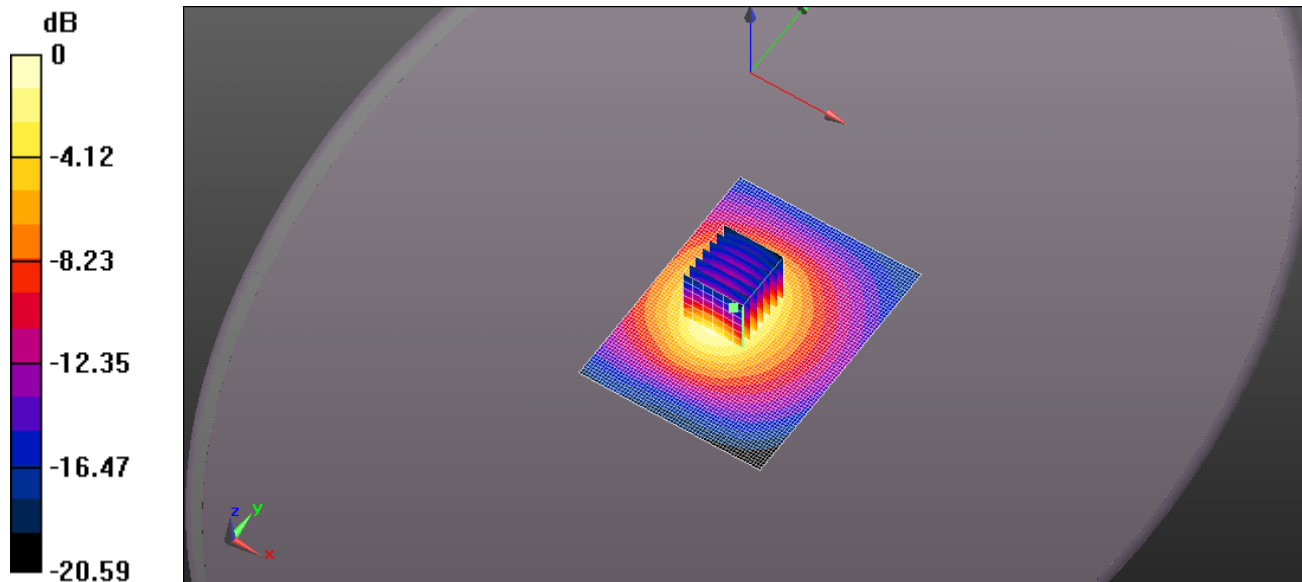

0 dB = 15.6 W/kg = 11.94 dBW/kg

EXHIBIT 2. BODY SAR MEASUREMENT

Bluetooth Position 1

Power (mW)	CH	CH. Freq (MHz)	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
3.36	1	2412	0.00839	0.00191
2.25	6	2437	0.00924	0.0019
2.77	11	2462	0.00866	0.00182

Position 2

Power (mW)	CH	CH. Freq (MHz)	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
3.36	1	2412	<0.001	<0.001
2.25	6	2437	<0.001	<0.001
2.77	11	2462	<0.001	<0.001

Position 3

Power (mW)	CH	CH. Freq (MHz)	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
3.36	1	2412	<0.001	<0.001
2.25	6	2437	<0.001	<0.001
2.77	11	2462	<0.001	<0.001

Wifi

Position 1

Power (mW)	CH	CH. Freq (MHz)	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
33.1	1	2412	0.00998	0.00497
38.5	6	2437	0.011	0.00538
44.9	11	2462	0.0072	0.00321

Position 2

Power (mW)	CH	CH. Freq (MHz)	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
33.1	1	2412	0.00498	0.00222
38.5	6	2437	0.00476	0.00157
44.9	11	2462	0.00462	0.00171

Position 3

Power (mW)	CH	CH. Freq (MHz)	BODY SAR1g (W/Kg)	BODY SAR10g (W/Kg)
33.1	1	2412	<0.001	<0.001
38.5	6	2437	0.0038	0.00169
44.9	11	2462	<0.001	<0.001

File Name: [Ateq Body 2.412 Position 1 BLE.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412.5$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 50.747$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASYS 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.412GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 999.00 dB


Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.00839 W/kg; SAR(10 g) = 0.00191 W/kg

Maximum value of SAR (measured) = 0.0126 W/kg

Body Configuration_2.412GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00807 W/kg

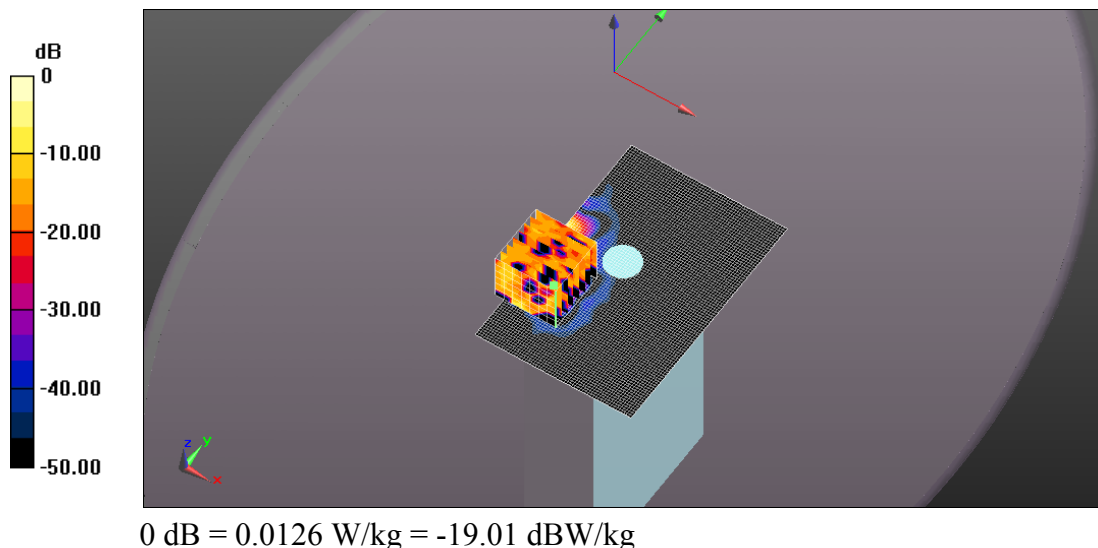

File Name: [Ateq Body 2.412 Position 2 BLE.da52:0](#)


DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412.5$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 50.747$; $\rho = 1000$ kg/m³ ; Phantom section:
Flat Section ; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.412 GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0 W/kg

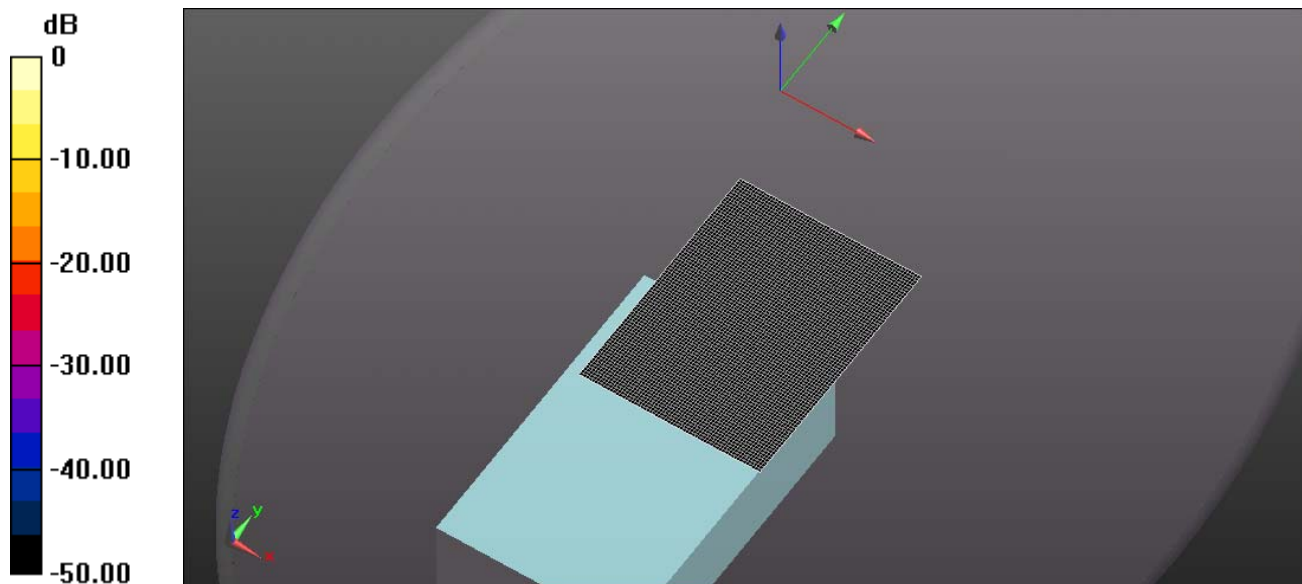

0 dB = 0 W/kg = -999.00 dBW/kg

File Name: [Ateq Body 2.412 Position 3 BLE.da52:0](#)


DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412.5$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 50.747$; $\rho = 1000$ kg/m³ ; Phantom section:
Flat Section ; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.412 GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0 W/kg

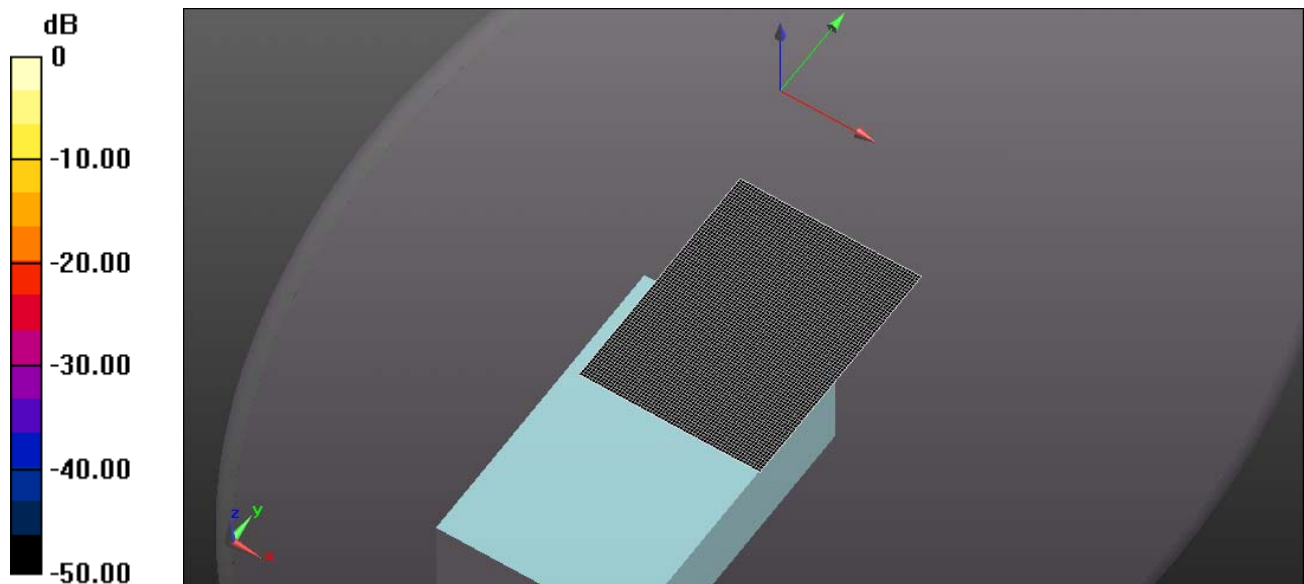

0 dB = 0 W/kg = -999.00 dBW/kg

File Name: [Ateq Body 2.437 Position 1 BLE.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2432 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2432$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.657$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.437GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 999.00 dB

Peak SAR (extrapolated) = 0.0360 W/kg

SAR(1 g) = 0.00924 W/kg; SAR(10 g) = 0.0019 W/kg


[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0150 W/kg

Body Configuration_2.437GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0.0110 W/kg

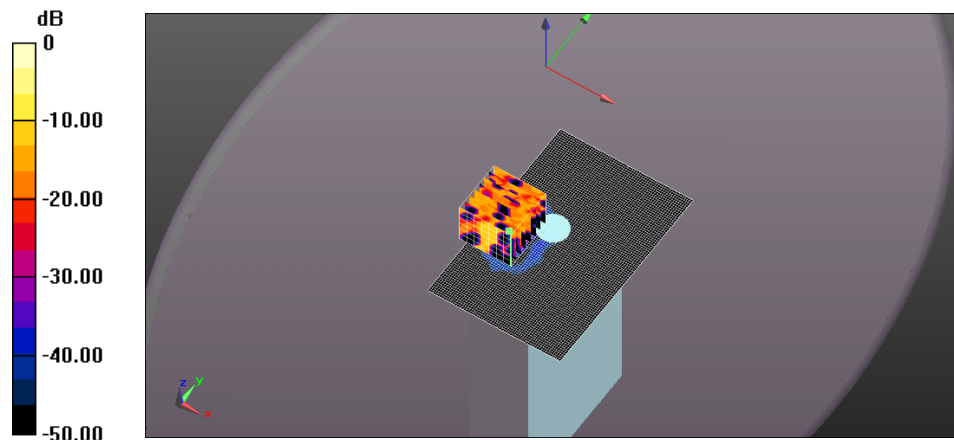

0 dB = 0.0150 W/kg = -18.23 dBW/kg

File Name: [Ateq Body 2.437 Position 2.1 BLE.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2432 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2432$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.657$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)


DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.437 GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0 W/kg

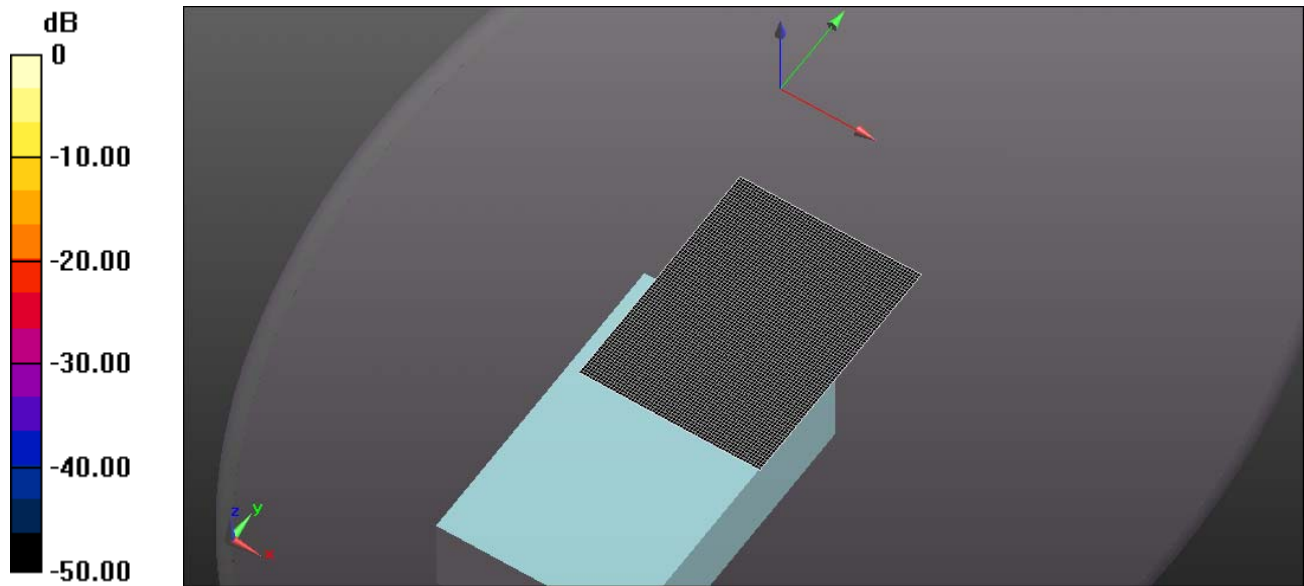

0 dB = 0 W/kg = -999.00 dBW/kg

File Name: [Ateq Body 2.437 Position 3 BLE.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2432 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2432$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 50.657$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section ; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)


DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.437 GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (interpolated) = 0 W/kg

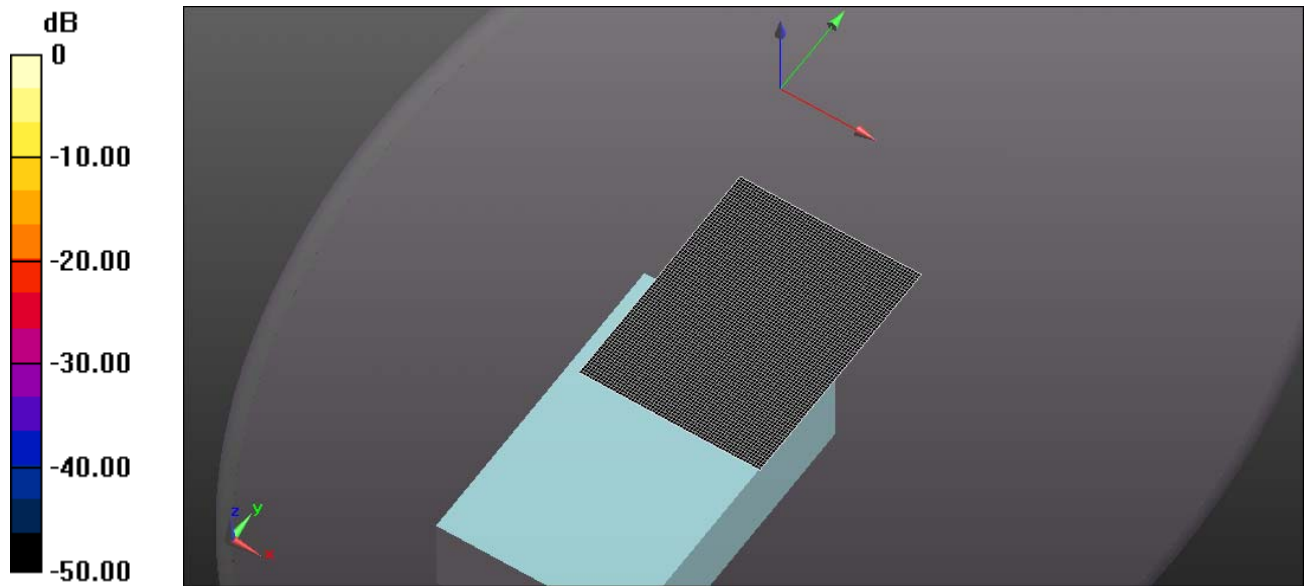

0 dB = 0 W/kg = -999.00 dBW/kg

File Name: [Ateq Body 2.462 Position 1 BLE.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462.5$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 50.525$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.462GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom Scan (7x7x7) (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 999.00 dB


Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.00866 W/kg; SAR(10 g) = 0.00182 W/kg

Maximum value of SAR (measured) = 0.0124 W/kg

Body Configuration_2.462GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0105 W/kg

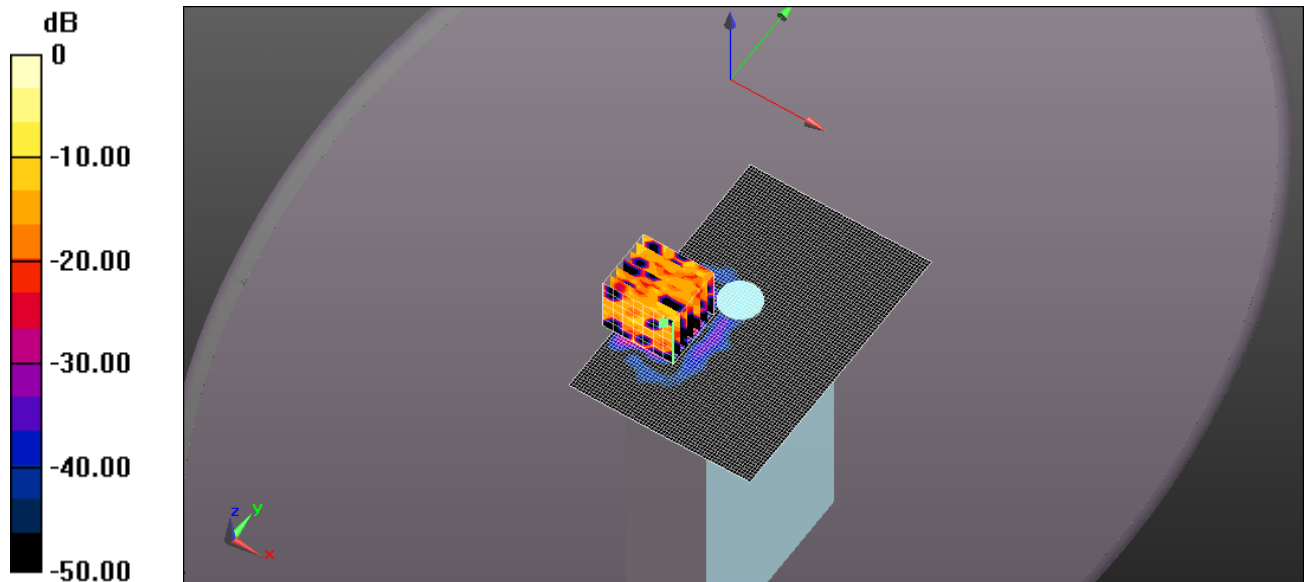

0 dB = 0.0124 W/kg = -19.06 dBW/kg

File Name: [Ateq Body 2.462 Position 2 BLE.da52:0](#)


DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462.5$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 50.525$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.462 GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0 W/kg

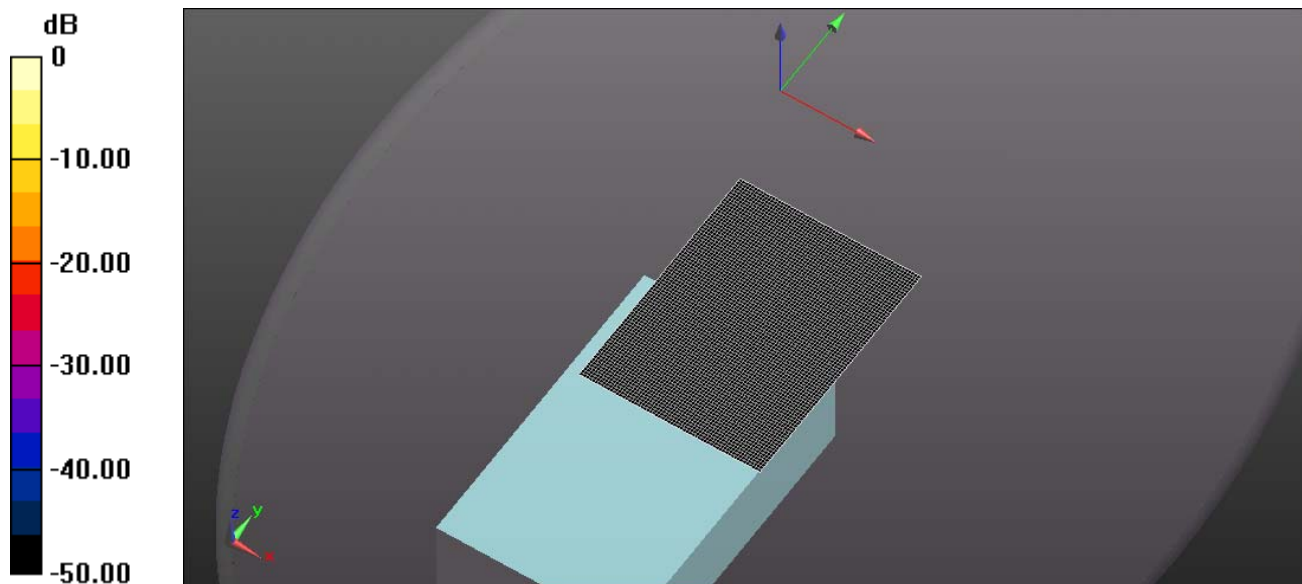

0 dB = 0 W/kg = -999.00 dBW/kg

File Name: [Ateq Body 2.462 Position 3 BLE.da52:0](#)


DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462.5$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 50.525$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.462 GHz BLE/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0 W/kg

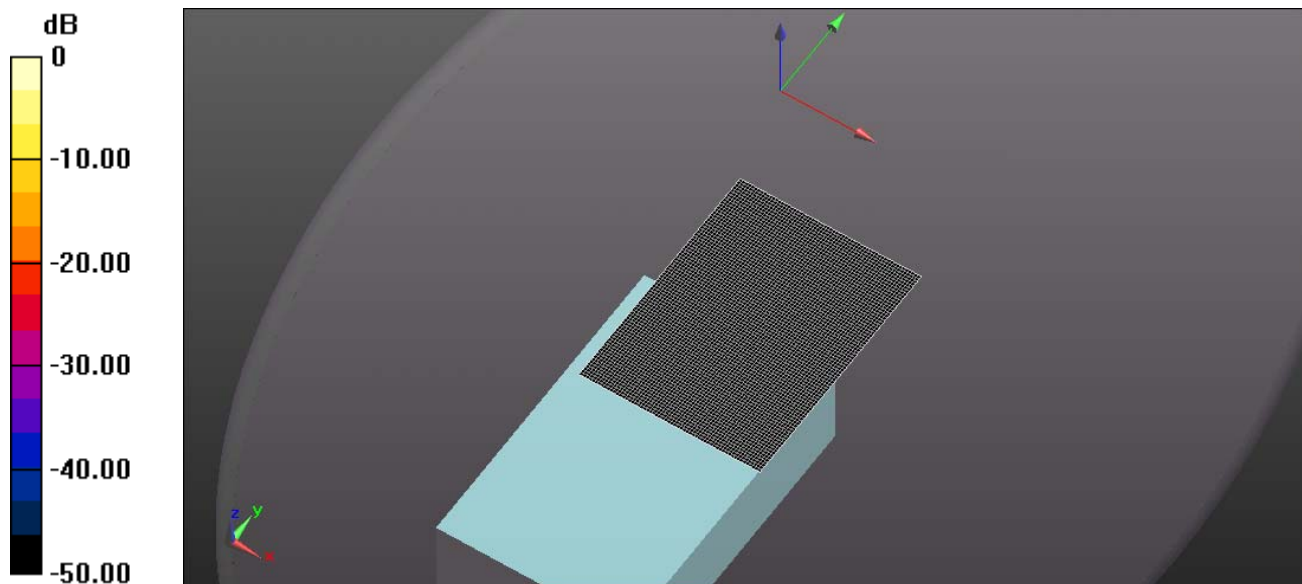

0 dB = 0 W/kg = -999.00 dBW/kg

File Name: [Ateq Body 2.412 Position 1.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412.5$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 51.069$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.412GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom

Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.860 V/m; Power Drift = -4.33 dB

Peak SAR (extrapolated) = 0.0270 W/kg


SAR(1 g) = 0.00998 W/kg; SAR(10 g) = 0.00497 W/kg

Maximum value of SAR (measured) = 0.0136 W/kg

Body Configuration_2.412GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area

Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0296 W/kg

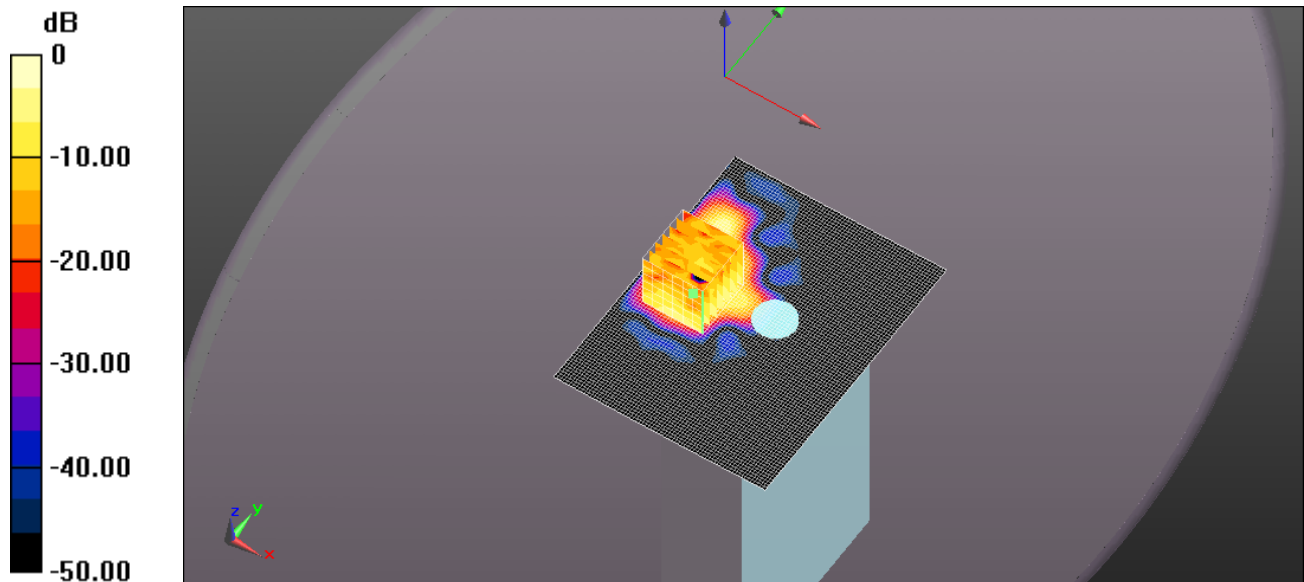

0 dB = 0.0136 W/kg = -18.65 dBW/kg

File Name: [Ateq Body 2.412 Position 2.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412.5$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 51.069$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Body Configuration_2.412GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom
Scan (7x7x7) (9x11x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5880 V/m; Power Drift = 7.42 dB


Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.00498 W/kg; SAR(10 g) = 0.00222 W/kg

Maximum value of SAR (measured) = 0.00766 W/kg

**Body Configuration_2.412GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area
Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00988 W/kg

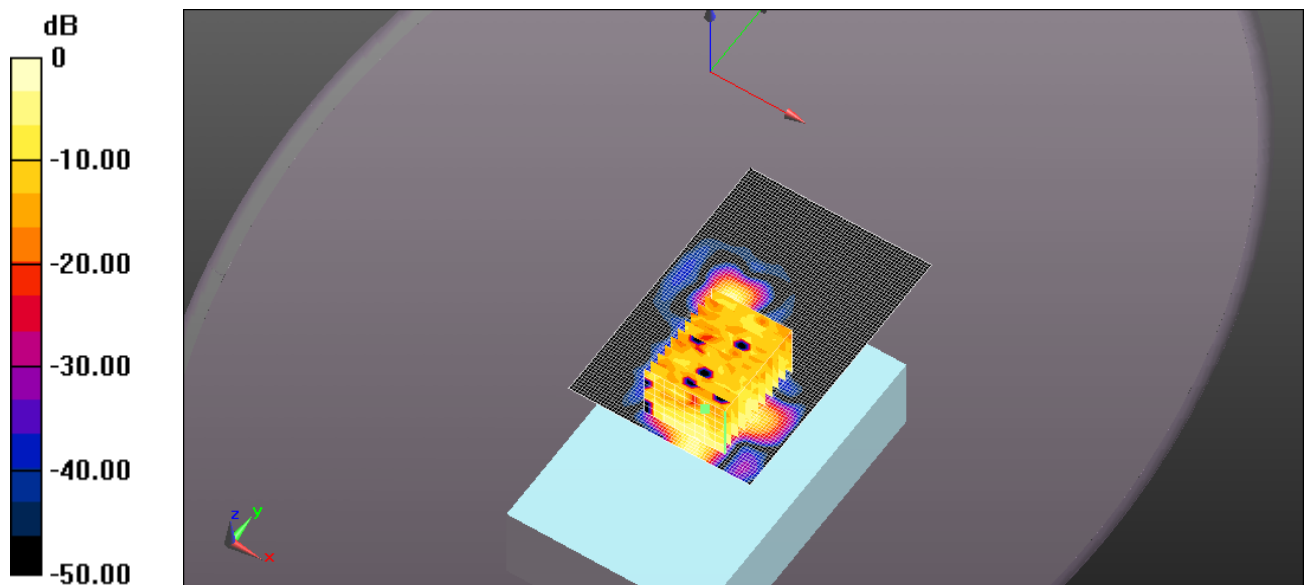

0 dB = 0.00766 W/kg = -21.16 dBW/kg

File Name: [Ateq Body 2.412 Position 3.da52:0](#)


DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412.5$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 51.069$; $\rho = 1000$ kg/m³ ; Phantom section:
Flat Section ; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Body Configuration_2.412GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area
Scan (61x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0 W/kg

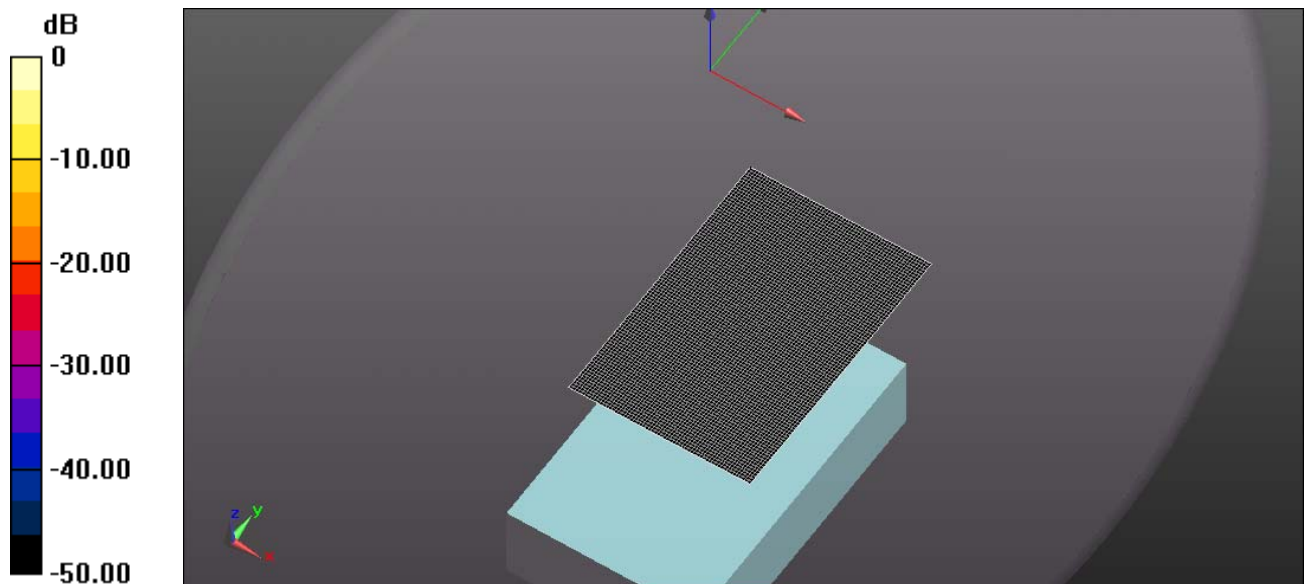

0 dB = 0 W/kg = -999.00 dBW/kg

File Name: [Ateq Body 2.437 Position 1.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412.5$ MHz; $\sigma = 1.982$ S/m; $\epsilon_r = 51.069$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.437GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom

Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.672 V/m; Power Drift = -3.87 dB

Peak SAR (extrapolated) = 0.0230 W/kg


SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00538 W/kg

Maximum value of SAR (measured) = 0.0135 W/kg

Body Configuration_2.437GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area

Scan (71x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0363 W/kg

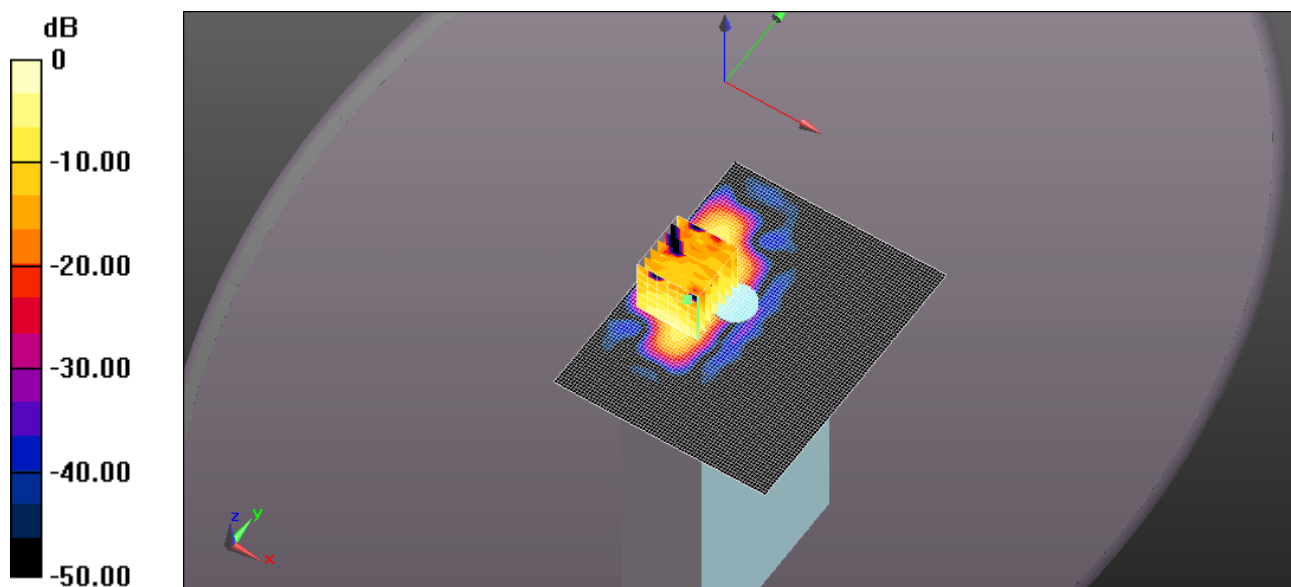

0 dB = 0.0135 W/kg = -18.69 dBW/kg

File Name: [Ateq Body 2.437 Position 2.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437.5$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 50.909$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Body Configuration_2.437GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom
Scan (7x7x7) (9x9x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 999.00 dB


Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.00476 W/kg; SAR(10 g) = 0.00157 W/kg

Maximum value of SAR (measured) = 0.00850 W/kg

**Body Configuration_2.437GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area
Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00531 W/kg

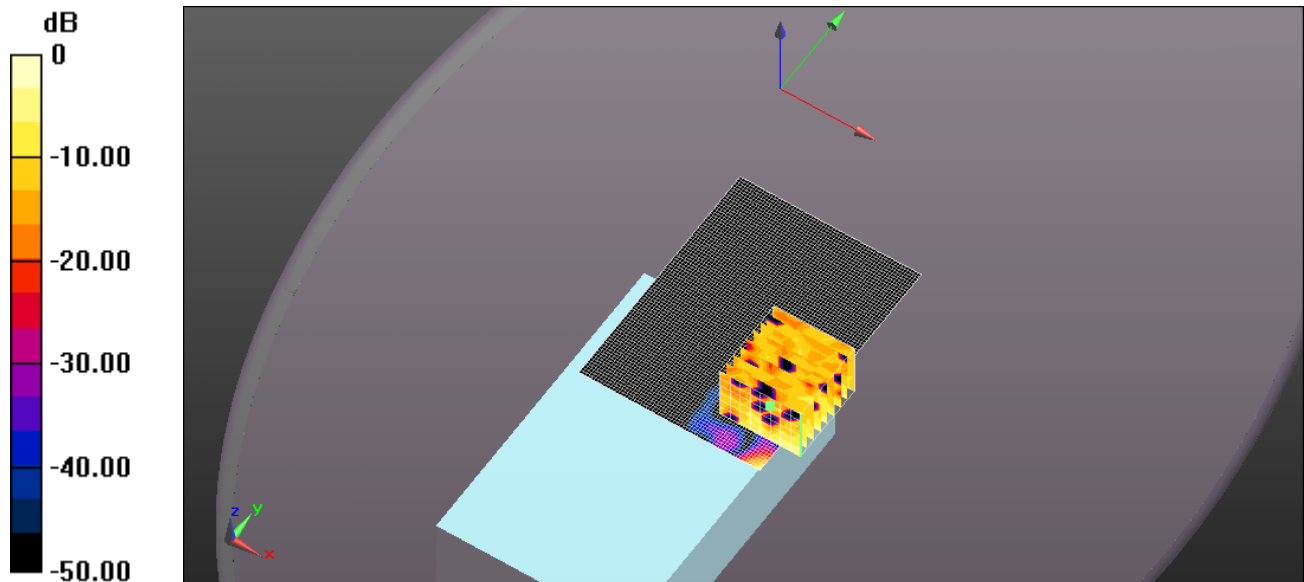

0 dB = 0.00850 W/kg = -20.71 dBW/kg

File Name: [Ateq Body 2.437 Position 3.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2437 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2437.5$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 50.909$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.437GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom

Scan (7x7x7) (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 999.00 dB

Peak SAR (extrapolated) = 0.00836 W/kg


SAR(1 g) = 0.0038 W/kg; SAR(10 g) = 0.00169 W/kg

Maximum value of SAR (measured) = 0.00618 W/kg

Body Configuration_2.437GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area

Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0142 W/kg

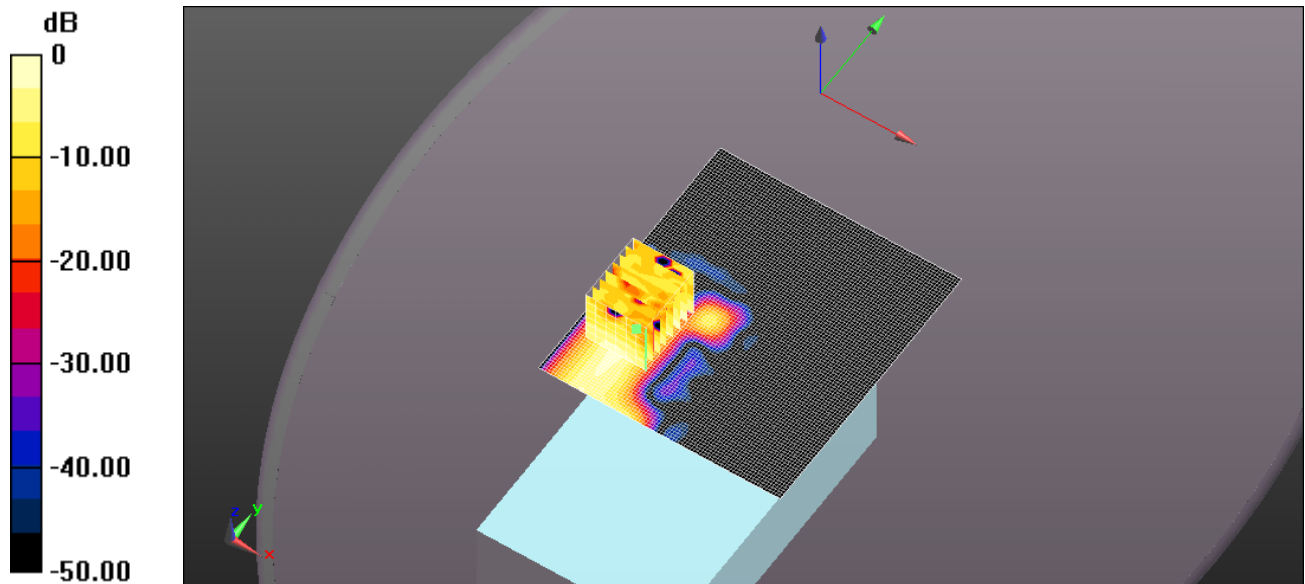

File Name: [Ateq Body 2.462 Position 1.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462.5$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 50.825$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

Body Configuration_2.462GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom

Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.3370 V/m; Power Drift = 9.59 dB

Peak SAR (extrapolated) = 0.0240 W/kg


SAR(1 g) = 0.0072 W/kg; SAR(10 g) = 0.00321 W/kg

Maximum value of SAR (measured) = 0.0103 W/kg

Body Configuration_2.462GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area

Scan (81x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0240 W/kg

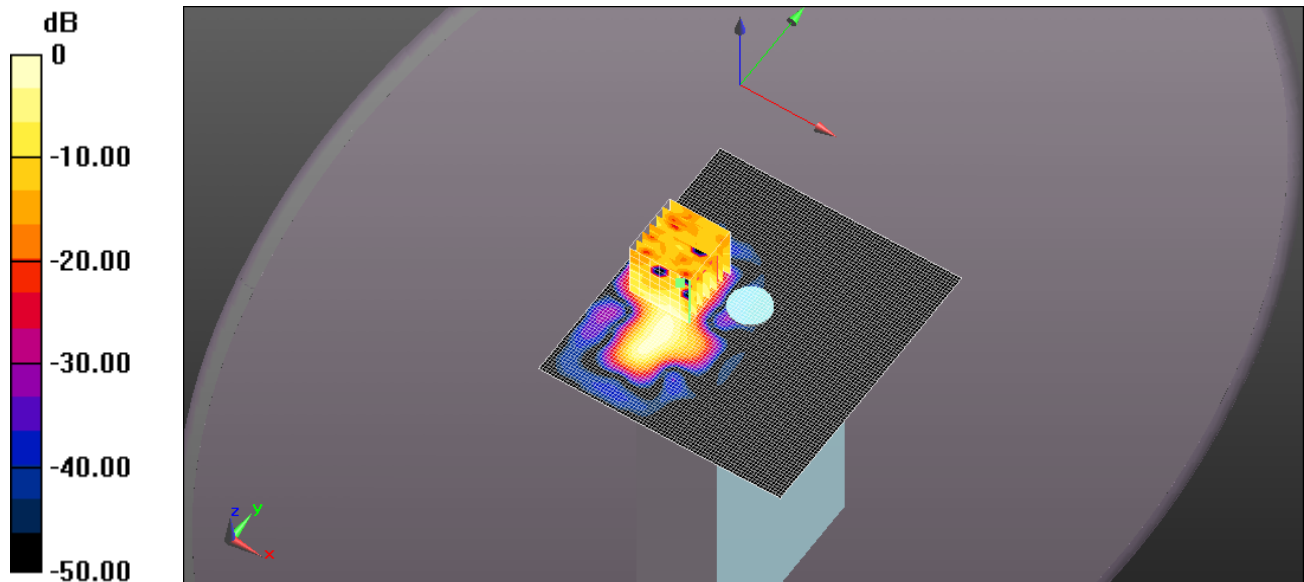

0 dB = 0.0103 W/kg = -19.89 dBW/kg

File Name: [Ateq Body 2.462 Position 2.da52:0](#)

DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462.5$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 50.825$; $\rho = 1000$ kg/m³; Phantom section:
Flat Section; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Body Configuration_2.462GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Zoom
Scan (7x7x7) (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 999.00 dB


Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00462 W/kg; SAR(10 g) = 0.00171 W/kg

Maximum value of SAR (measured) = 0.00686 W/kg

**Body Configuration_2.462GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area
Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.00553 W/kg

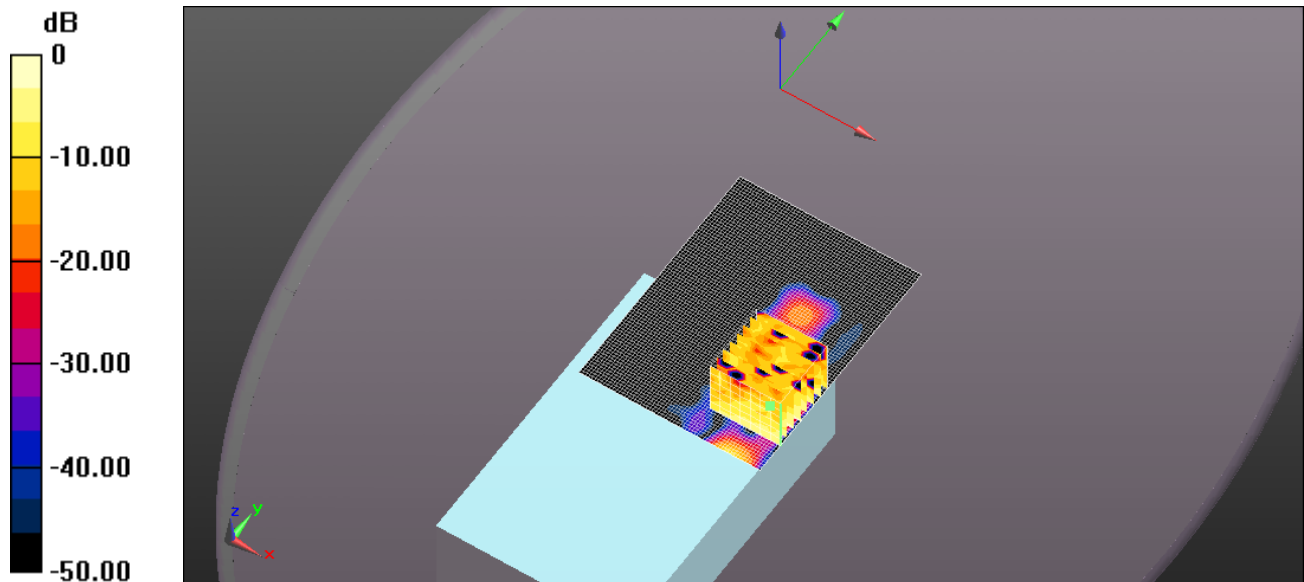

0 dB = 0.00686 W/kg = -21.64 dBW/kg

File Name: [Ateq Body 2.462 Position 3.da52:0](#)


DUT: ATEQ ET3550; Type: Hand Held Device; Serial: 0007

Communication System: UID 0, CW (0); Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462.5$ MHz; $\sigma = 2.026$ S/m; $\epsilon_r = 50.825$; $\rho = 1000$ kg/m³ ; Phantom section:
Flat Section ; Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ES3DV3 - SN3250; ConvF(4.65, 4.41, 4.33); Calibrated: 3/10/2025;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn874; Calibrated: 8/8/2024
- Phantom: ELI 4.0; Type: QD OVA 001 BB; Serial: 1057
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Body Configuration_2.462GHz/d=10mm, Pin=250mW, dist=1.4mm (EX-Probe)/Area
Scan (61x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0 W/kg

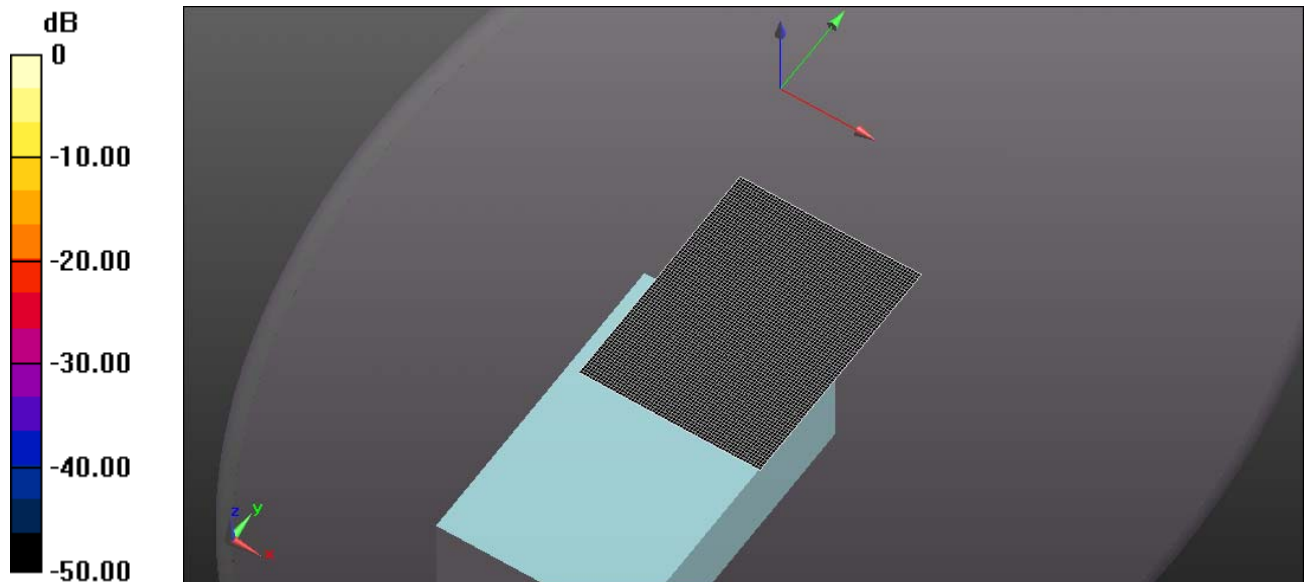

0 dB = 0 W/kg = -999.00 dBW/kg