




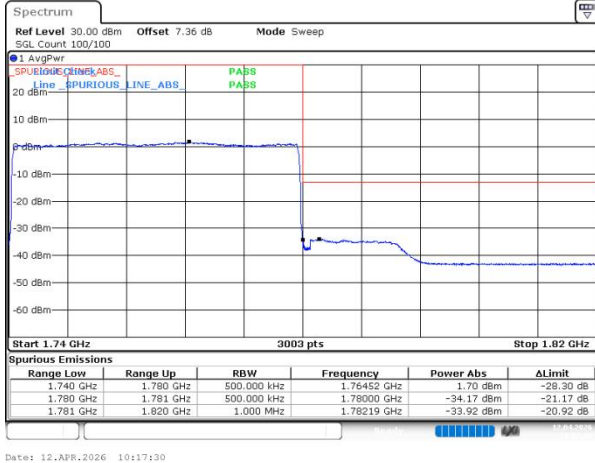


n66 SCS=15kHz DFT_64QAM BW=40MHz
HighChannel=352000 RB=216@0

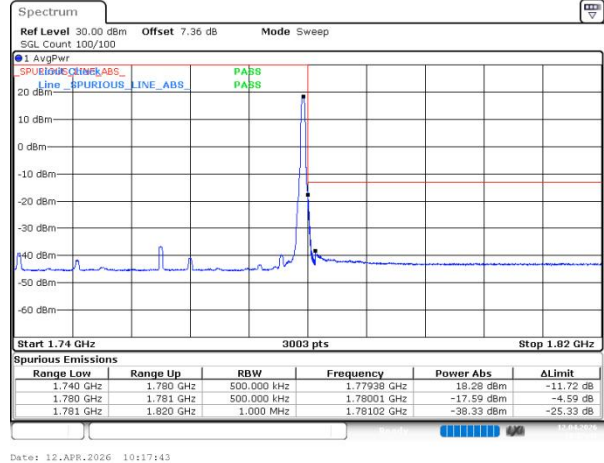

n66 SCS=15kHz DFT_256QAM BW=40MHz
HighChannel=352000 RB=1@215

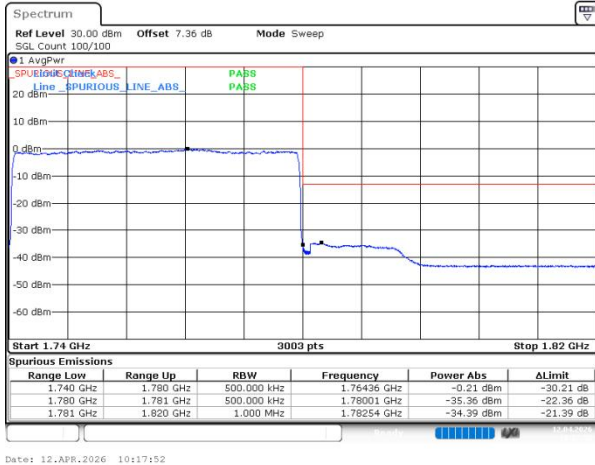


n66 SCS=15kHz DFT_256QAM BW=40MHz
HighChannel=352000 RB=216@0

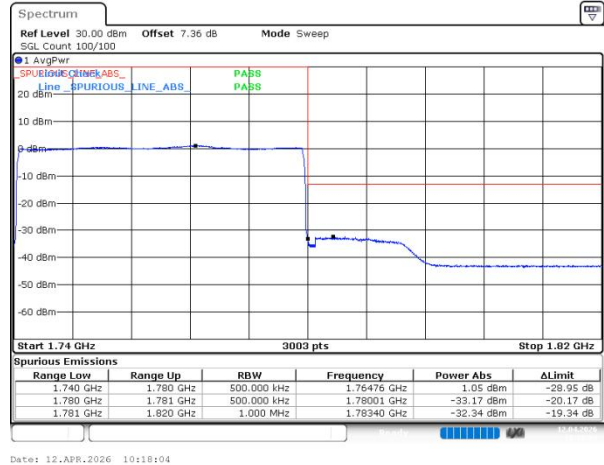


n66 SCS=15kHz CP_QPSK BW=40MHz HighChannel=352000
RB=216@0

6. Conducted Spurious Emissions

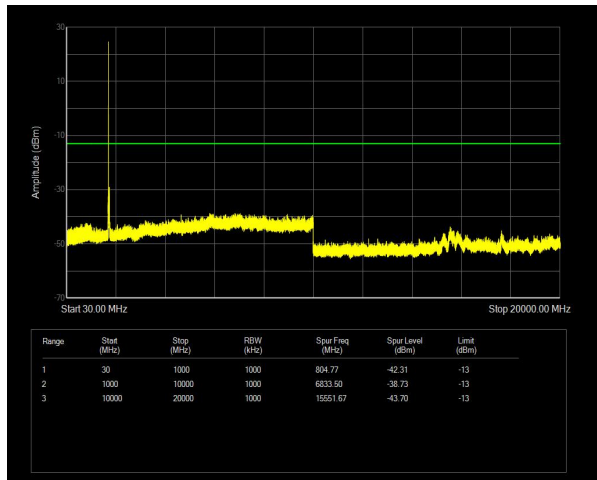


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=346000

RB=1@0

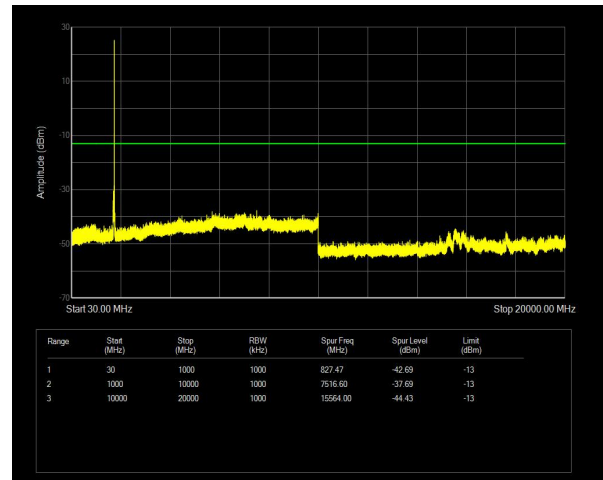


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=346000

RB=1@215

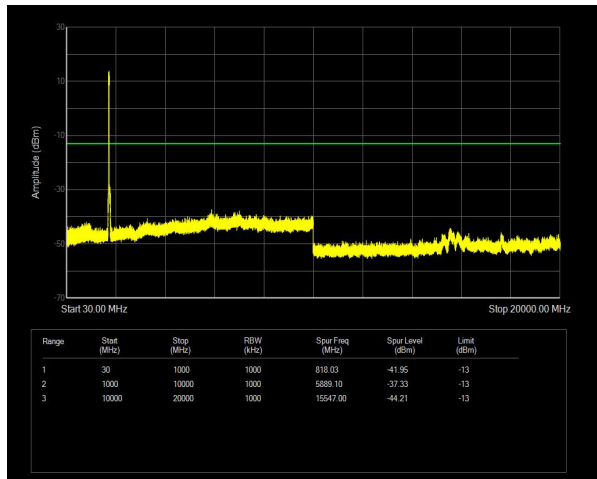


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=346000

RB=216@0

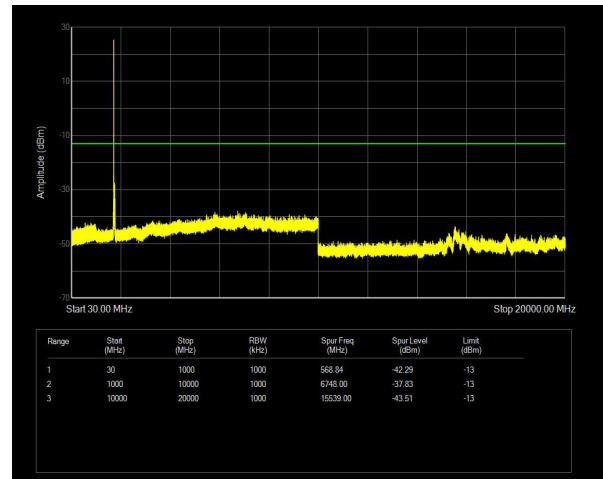


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000

RB=1@0

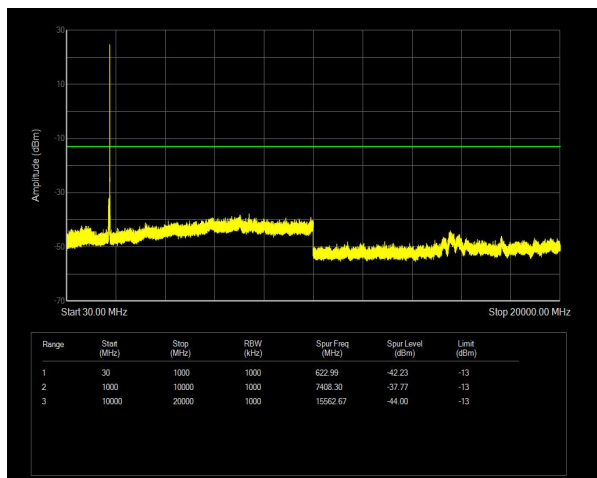


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000

RB=1@215

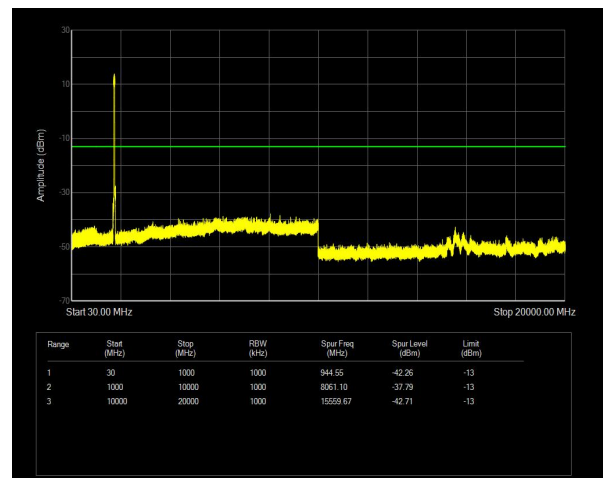


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000


RB=216@0

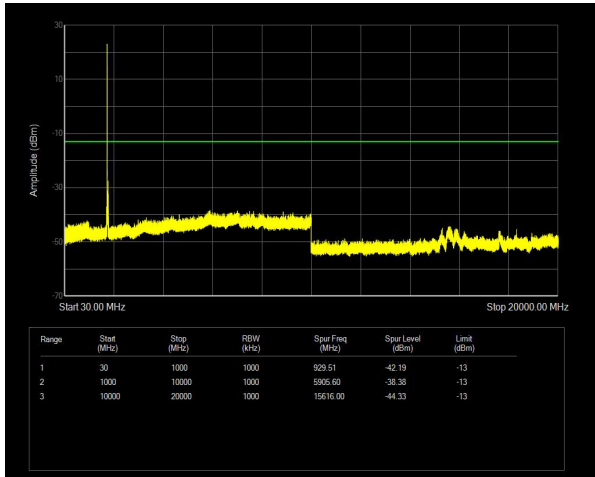

n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=352000
RB=1@0

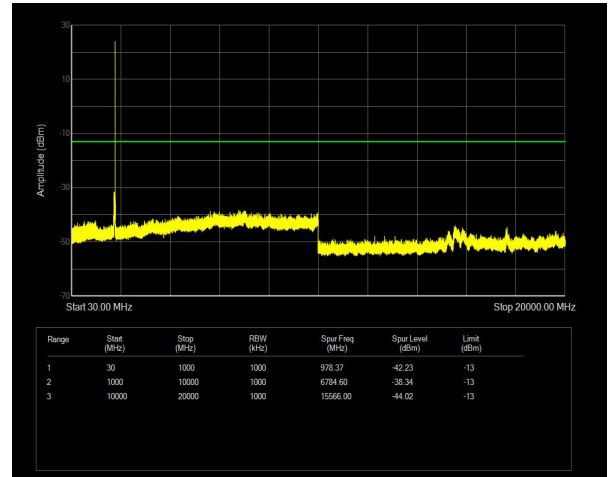

n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=352000
RB=1@215

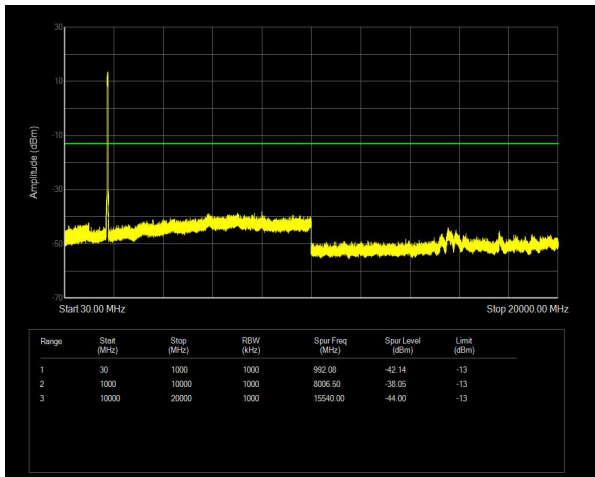

n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=352000
RB=216@0

7. Radiated Spurious Emissions

n66 - DFT-s-OFDM - PI/2 BPSK - 25M - Low Channel									
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	SPA. Reading (dBm)	S.G. Power (dBm)	Cable loss (dB)	Antenna Gain (dBi)	Polarization (H/V)	Result
3420	-44.18	-13	-31.18	-51.84	-51.38	4.22	11.42	H	Pass
5130	-48.65	-13	-35.65	-61.08	-54.92	5.37	11.64	H	Pass
8550	-41.12	-13	-28.12	-60.44	-45.23	6.89	11	H	Pass
3420	-45.35	-13	-32.35	-53.23	-52.55	4.22	11.42	V	Pass
5130	-46.71	-13	-33.71	-58.87	-52.98	5.37	11.64	V	Pass
8550	-33.38	-13	-20.38	-52.31	-37.49	6.89	11	V	Pass

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.