FCC Test Report

Report No.: AGC00927200301FE03

FCC ID	:	2AKARU1000F
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	U1000F
BRAND NAME	:	ZK Radio
MODEL NAME	:	U1000F, UHF1-5F, UHF2-5F, UHF1-10F, UHF2-10F, UHF5F Pro, UHF10F Pro, UR300-10F, UR200-5F, UR200-10F, UR200B-10F, UR300-5F, U1000F, U2000F, UT400-5F, UT400-10F, UR500SF, UR500BF, UR500SF-T, UR500BF-T, UR501SF, UR501BF, UR501SF-T, UR501BF-T, UR502SF, UR502BF, UR502SF-T, UR502BE-T
APPLICANT	:	Guangdong ZK Radio Electronic Tech Co., Ltd
DATE OF ISSUE	:	Apr. 16, 2020
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:
This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 16, 2020	Valid	Initial Release

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY 5

2. GENERAL INFORMATION 6

2.1. PRODUCT DESCRIPTION 6
2.2. TABLE OF CARRIER FREQUENCYS 6
2.3. RECEIVER INPUT BANDWIDTH 7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE 7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR 7
2.6. RELATED SUBMITTAL(S) / GRANT (S) 7
2.7. TEST METHODOLOGY 7
2.8. SPECIAL ACCESSORIES 7
2.9. EQUIPMENT MODIFICATIONS 7

3. MEASUREMENT UNCERTAINTY 8

4. DESCRIPTION OF TEST MODES 9

5. SYSTEM TEST CONFIGURATION 10

5.1. CONFIGURATION OF EUT SYSTEM 10
5.2. EQUIPMENT USED IN EUT SYSTEM 10
5.3. SUMMARY OF TEST RESULTS 10

6. TEST FACILITY 11

7. PEAK OUTPUT POWER 12

7.1. MEASUREMENT PROCEDURE 12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 12
7.3. LIMITS AND MEASUREMENT RESULT 13

8. 20DB BANDWIDTH 15

8.1. MEASUREMENT PROCEDURE 15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 15
8.3. LIMITS AND MEASUREMENT RESULTS 15

9. CONDUCTED SPURIOUS EMISSION 17

9.1. MEASUREMENT PROCEDURE 17
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 17
9.3. MEASUREMENT EQUIPMENT USED 17

9.4. LIMITS AND MEASUREMENT RESULT 17

10. RADIATED EMISSION 22

10.1. MEASUREMENT PROCEDURE 22
10.2. TEST SETUP 24
10.3. LIMITS AND MEASUREMENT RESULT 25
10.4. TEST RESULT 25

11. NUMBER OF HOPPING FREQUENCY 31

11.1. MEASUREMENT PROCEDURE 31
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 31
11.3. MEASUREMENT EQUIPMENT USED 31
11.4. LIMITS AND MEASUREMENT RESULT 31

12. TIME OF OCCUPANCY (DWELL TIME) 32

12.1. MEASUREMENT PROCEDURE 32
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 32
12.3. MEASUREMENT EQUIPMENT USED 32
12.4. LIMITS AND MEASUREMENT RESULT 32

13. FREQUENCY SEPARATION 36

13.1. MEASUREMENT PROCEDURE 36
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION) 36
13.3. MEASUREMENT EQUIPMENT USED 36
13.4. LIMITS AND MEASUREMENT RESULT 36

14. FCC LINE CONDUCTED EMISSION TEST 37

14.1. LIMITS OF LINE CONDUCTED EMISSION TEST 37
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 37
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 38
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 38
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 39

APPENDIX A: PHOTOGRAPHS OF TEST SETUP 41

APPENDIX B: PHOTOGRAPHS OF EUT 43

1. VERIFICATION OF CONFORMITY

Applicant	Guangdong ZK Radio Electronic Tech Co., Ltd
Address	1004 Room, 3 block B, Tian-an-Yun-Gu, Ban Tian, Longgang, Shenzhen, China
Manufacturer	Guangdong ZK Radio Electronic Tech Co., Ltd
Address	1004 Room, 3 block B, Tian-an-Yun-Gu, Ban Tian, Longgang, Shenzhen, China
Factory	Guangdong ZK Radio Electronic Tech Co., Ltd
Address	1004 Room, 3 block B, Tian-an-Yun-Gu, Ban Tian, Longgang, Shenzhen, China
Product Designation	U1000F
Brand Name	ZK Radio
Test Model	U1000F
Series Model	UHF1-5F, UHF2-5F, UHF1-10F, UHF2-10F, UHF5F Pro, UHF10F Pro, UR300-10F, UR200-5F, UR200-10F, UR200B-10F, UR300-5F, U1000F, U2000F, UT400-5F, UT400-10F, UR500SF, UR500BF, UR500SF-T, UR500BF-T, UR501SF, UR501BF, UR501SF-T, UR501BF-T, UR502SF, UR502BF, UR502SF-T, UR502BE-T
Difference description	just different names for the domestic and overseas market.
Date of test	Apr. 01, 2020 to Apr. 15, 2020
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rules Part 15.247.

Prepared By	Sky Dong (Project Engineer)	Apr. 16, 2020
Reviewed By	Max Zhang (Reviewer)	Apr. 16, 2020
Approved By	Forrest Lei (Authorized Officer)	Apr. 16, 2020

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is “RFID” designed as a “Communication Device”. It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	920MHz to 925MHz
RF Output Power	25.365dBm(Max)
Modulation	ASK(FHSS)
Number of channels	51
Hardware Version	MI610_V1.5
Software Version	MI610_V1.0
Antenna Designation	Integral Antenna
Antenna Gain	8dBi
Power Supply	DC 12V

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
902~928MHZ	1	920.0MHz
	2	920.1MHz
	:	:
	50	924.9MHz
	51	925.0MHz

Note: The channel spacing is 0.1MHz.

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 100kHz.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 51 hopping sequence in data mode:
21,23,33,25,27,31,07,09,13,11,15,02,06,01,03,05,04,08,10,12,14,16,17,18,19,20,
24,26,27,28,29,30,32,34,35,36,37,38,40,41,42,43,45,44,47,46,48,49,50,51

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter.

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in measurement” (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX
4	Hopping mode

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The test software is the UHF Card Issuer-v2.04 which can set the EUT into the individual test modes.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure :

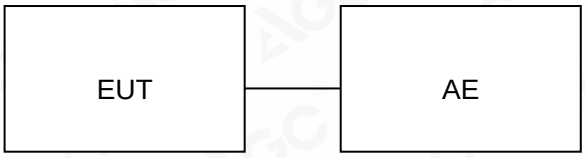

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	U1000F	U1000F	2AKARU1000F	EUT
2	Adapter	KT12005000	DC12V	AE
3	PC	M3	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Peak Output Power	Compliant
§15.247	20 dB Bandwidth	Compliant
§15.247	Spurious Emission	Compliant
15.247&15.209	Radiated Emission	Compliant
§15.207	Conduction Emission	Compliant
§15.247	Number of Hopping Frequency	Compliant
§15.247	Time of Occupancy	Compliant
§15.247	Frequency Separation	Compliant

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 10, 2019	Jun. 09, 2020
LISN	R&S	ESH2-Z5	100086	Aug. 26, 2019	Aug. 25, 2020
Test software	R&S	ES-K1 (Ver V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Feb. 26, 2020	Feb. 25, 2021
Attenuator	ZHINAN	E-002	N/A	Aug. 26, 2019	Aug. 25, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2017	Sep. 20, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 16, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 09, 2019	Jan. 08, 2021
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A

7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE

For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
3. RBW > 20 dB bandwidth of the emission being measured.
4. VBW ⩾RBW.
5. Sweep: Auto.
6. Detector function: Peak.
7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

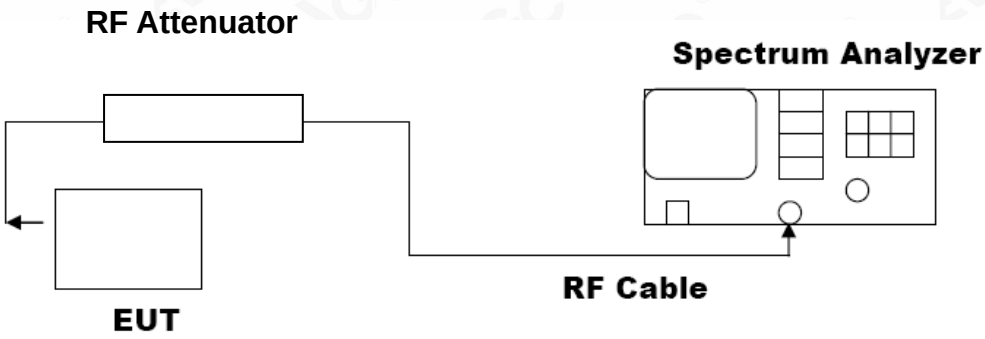

7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR ASK MOUDULATION			
Frequency (MHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
920.0	25.365	28	Pass
922.5	25.175	28	Pass
925.0	24.955	28	Pass

Low Channel

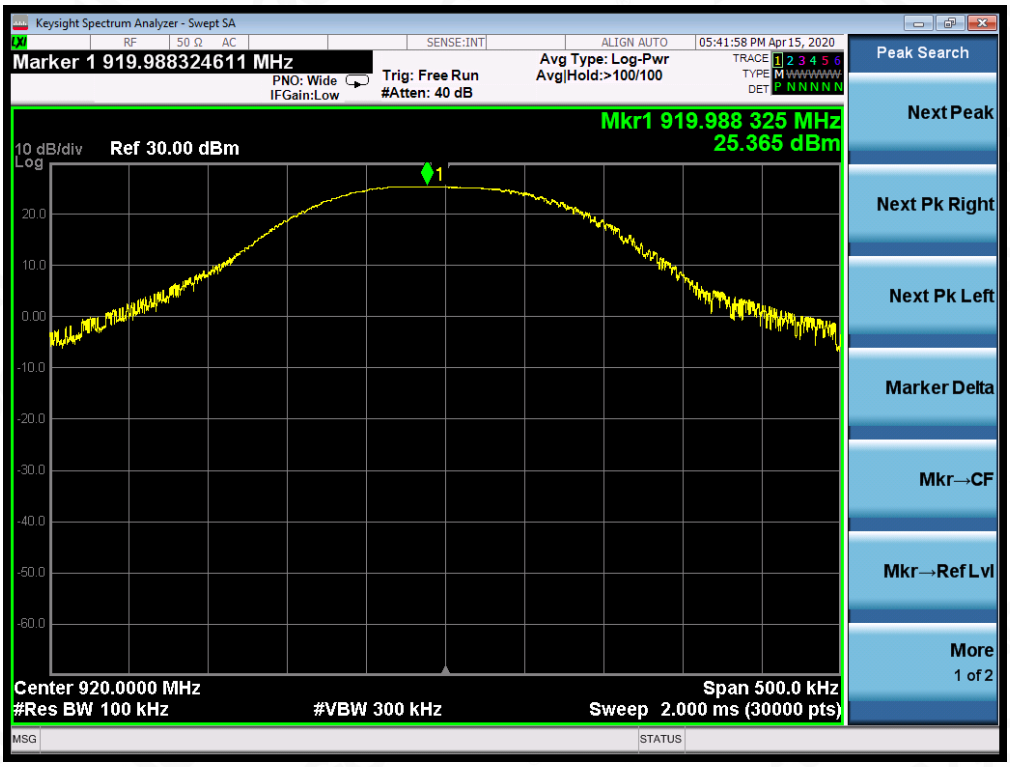

Middle Channel

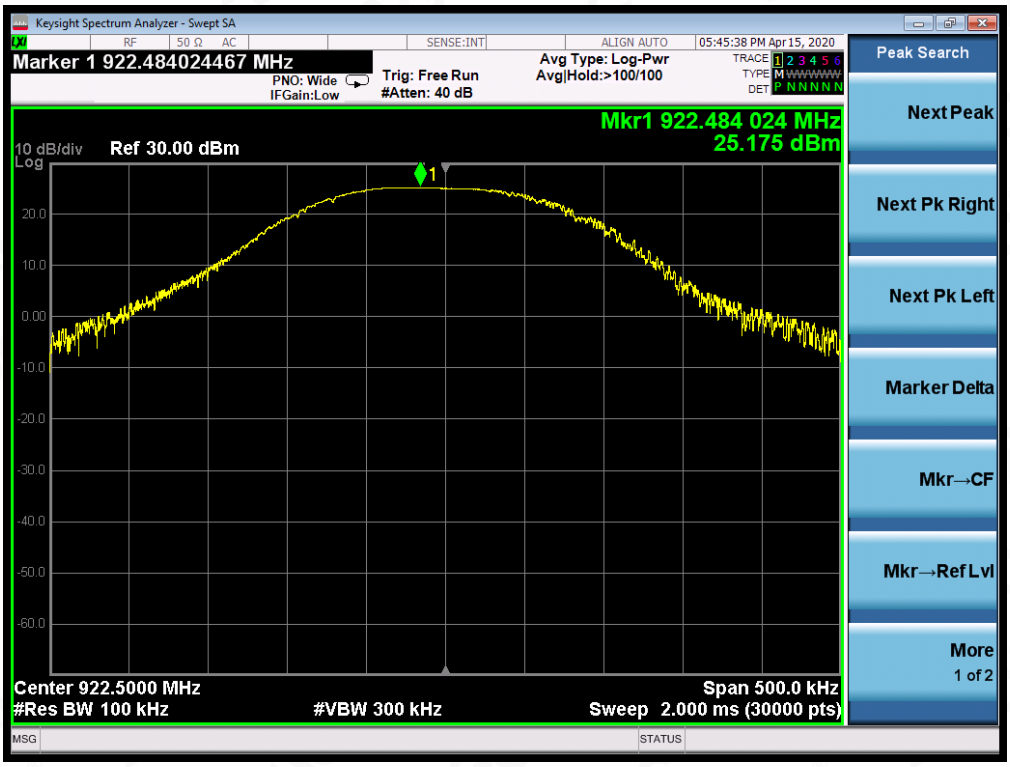

High Channel

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
   The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

MEASUREMENT RESULT FOR ASK MOUDULATION			
Applicable Limits	Measurement Result		
	Test Data (kHz)		Criteria
N/A	Low Channel	90.46	PASS
	Middle Channel	90.34	PASS
	High Channel	90.82	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

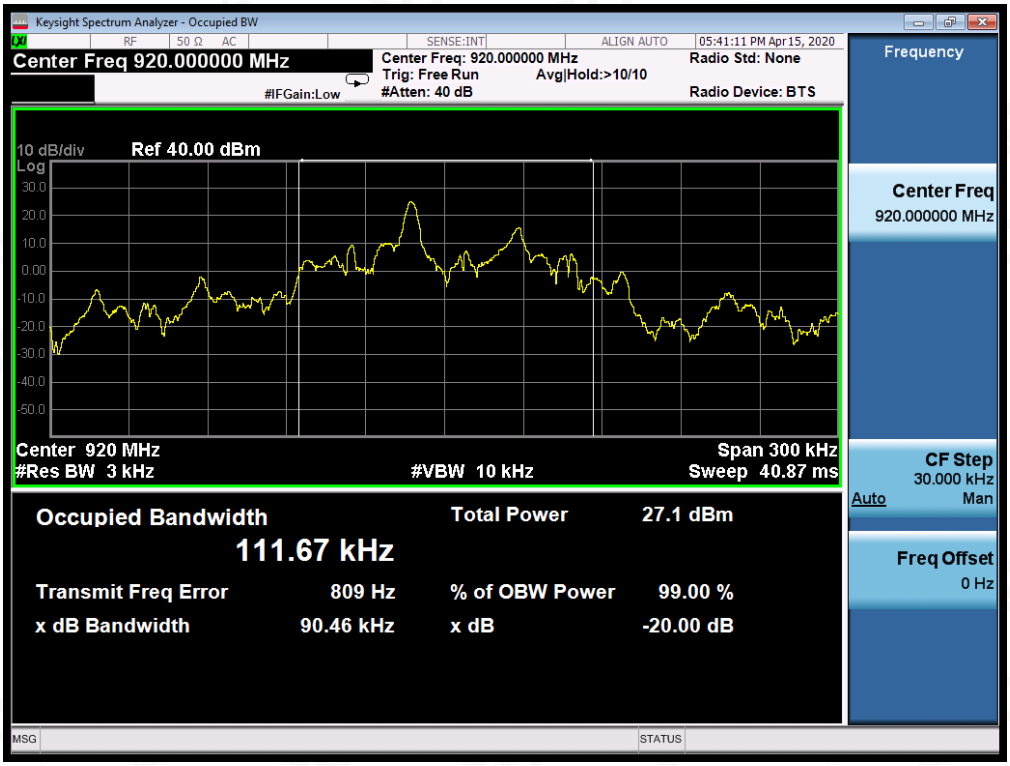

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

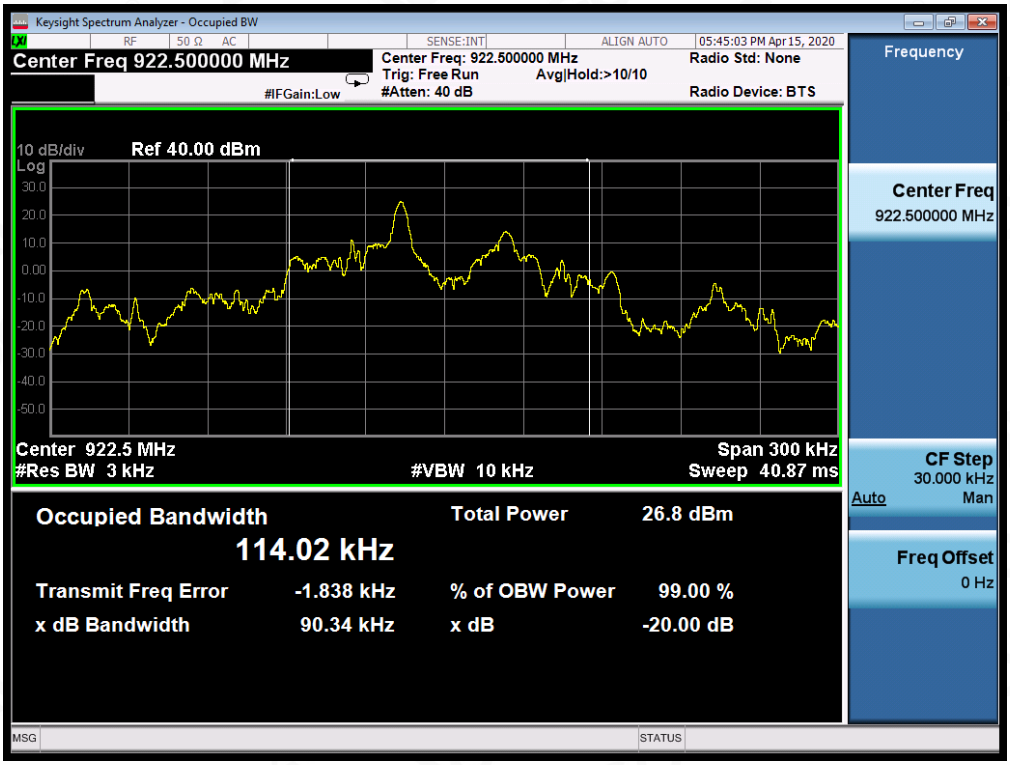

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

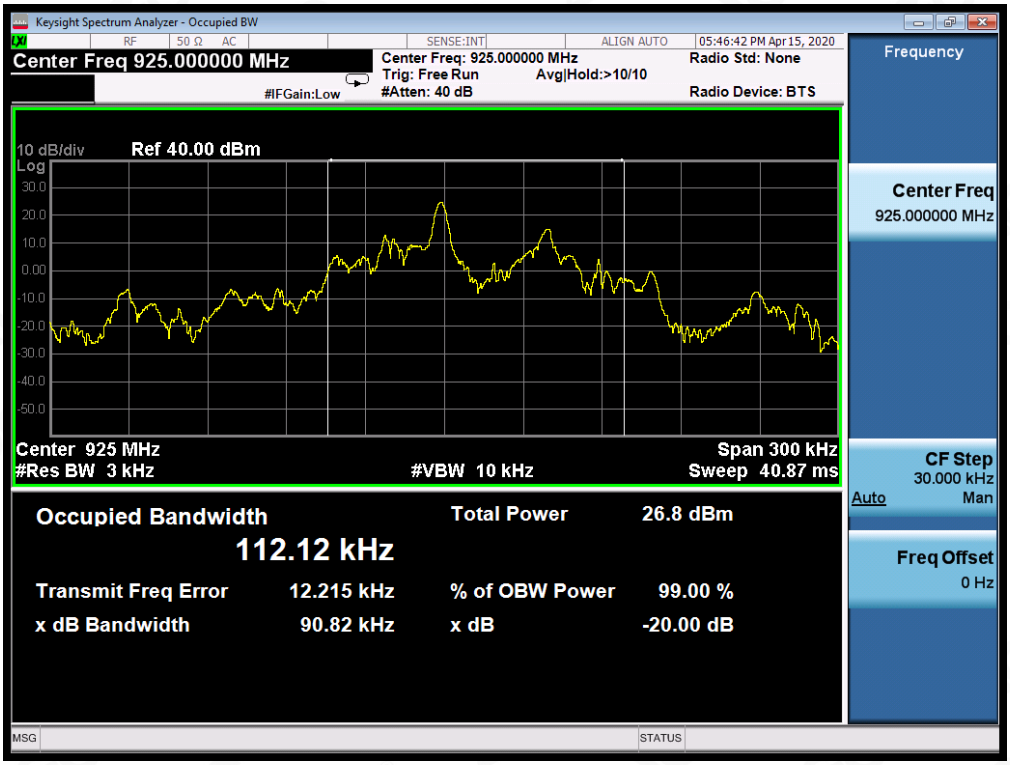

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
   RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Criteria
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS

TEST RESULT FOR ENTIRE FREQUENCY RANGE

ASK MODULATION IN LOW CHANNEL

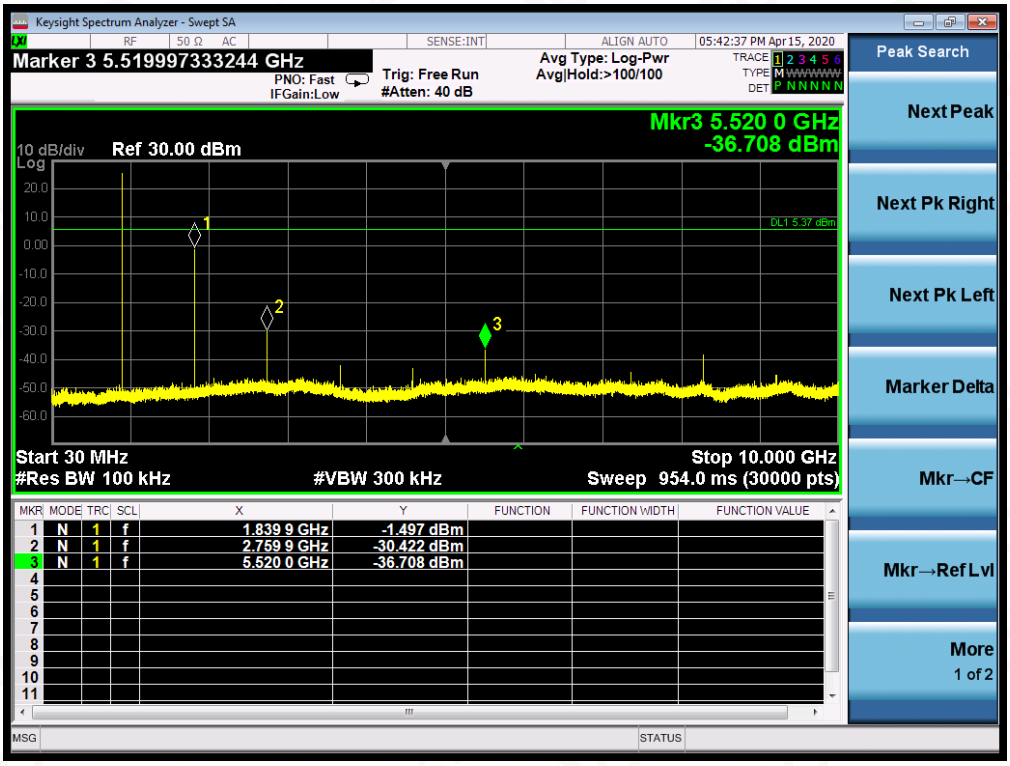

ASK MODULATION IN MIDDLE CHANNEL

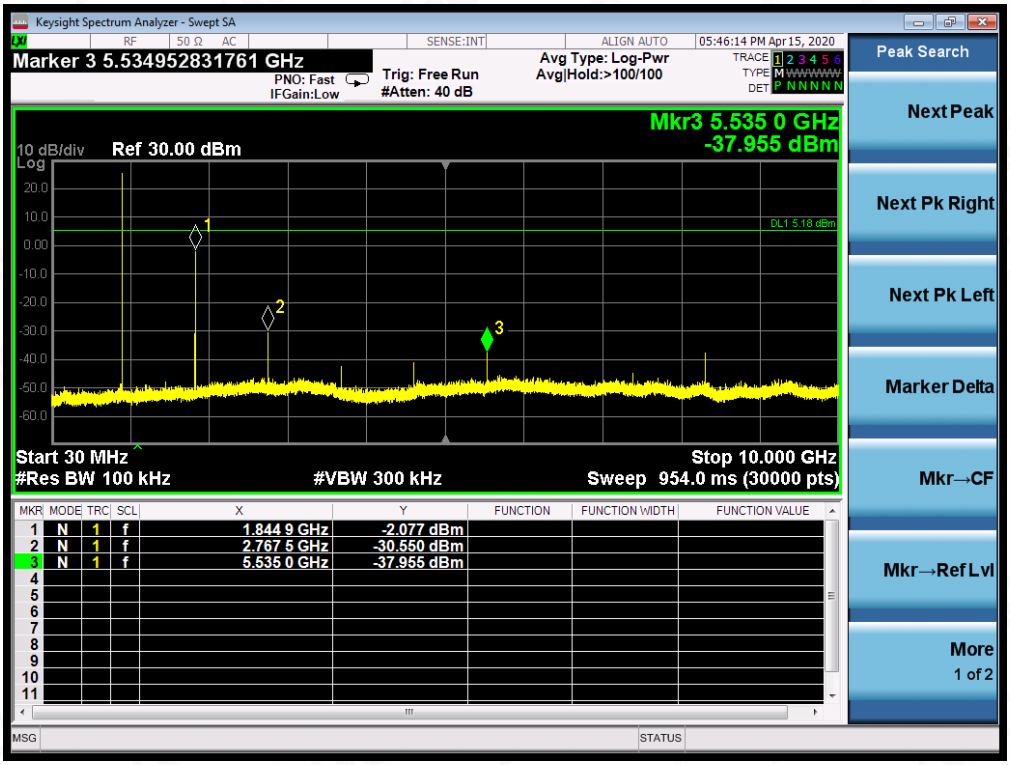

ASK MODULATION IN HIGH CHANNEL

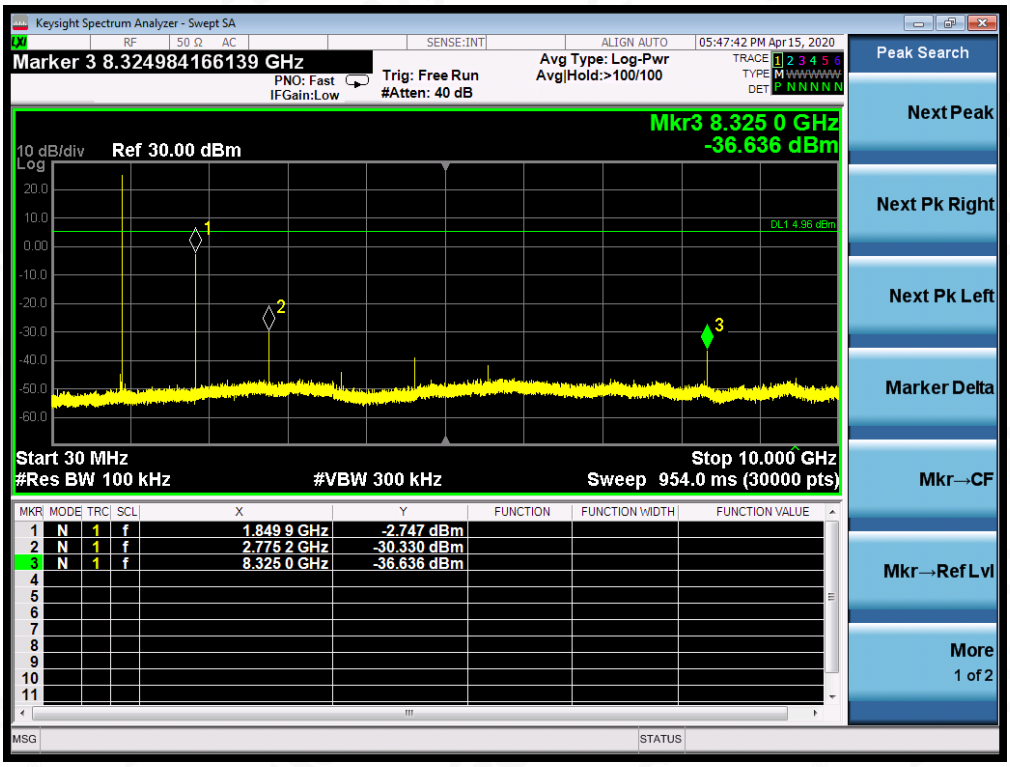

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.

TEST RESULT FOR BAND EDGE

ASK MODULATION IN LOW CHANNEL

Hopping off

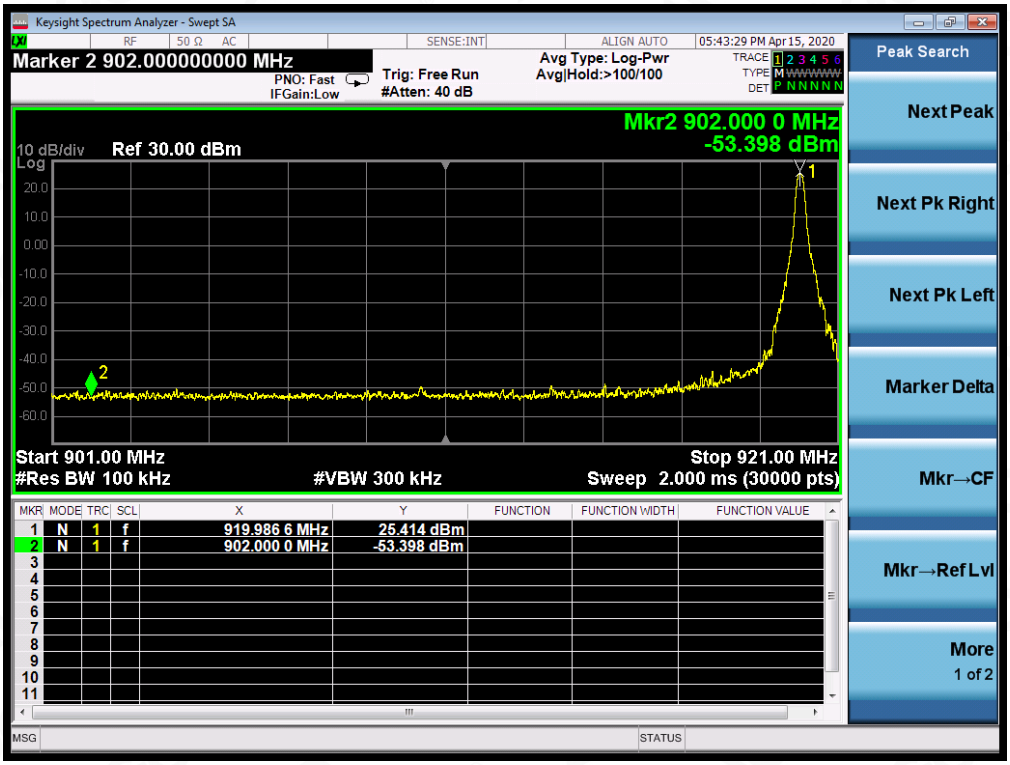

Hopping on

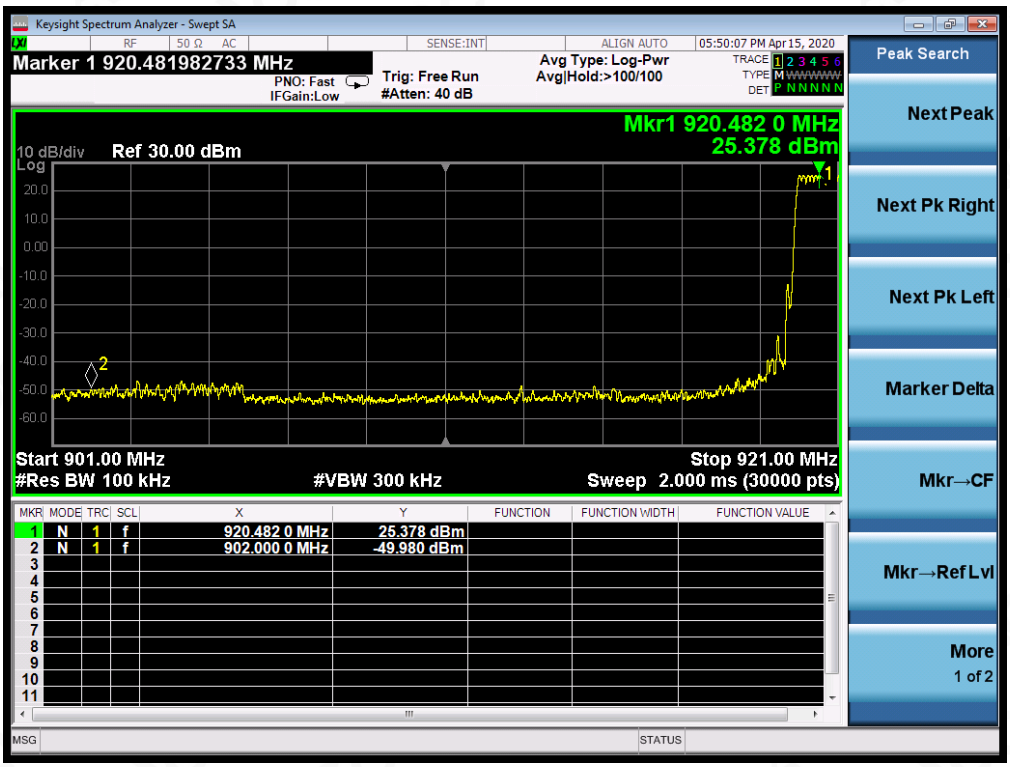

ASK MODULATION IN HIGH CHANNEL

Hopping off

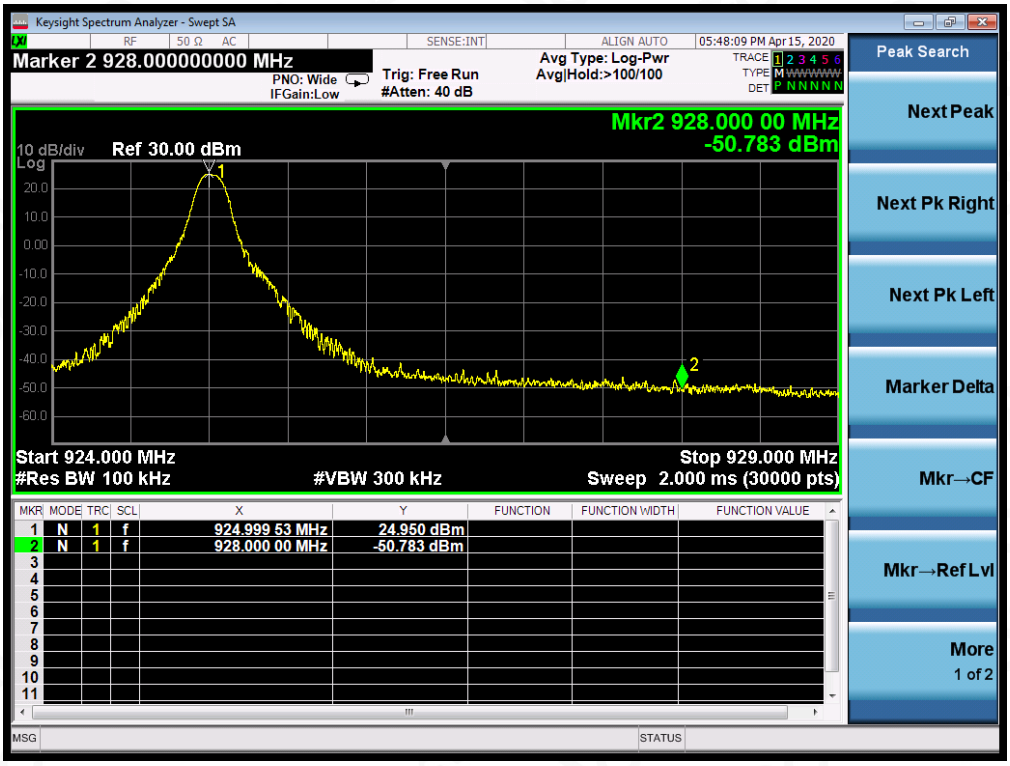

Hopping on

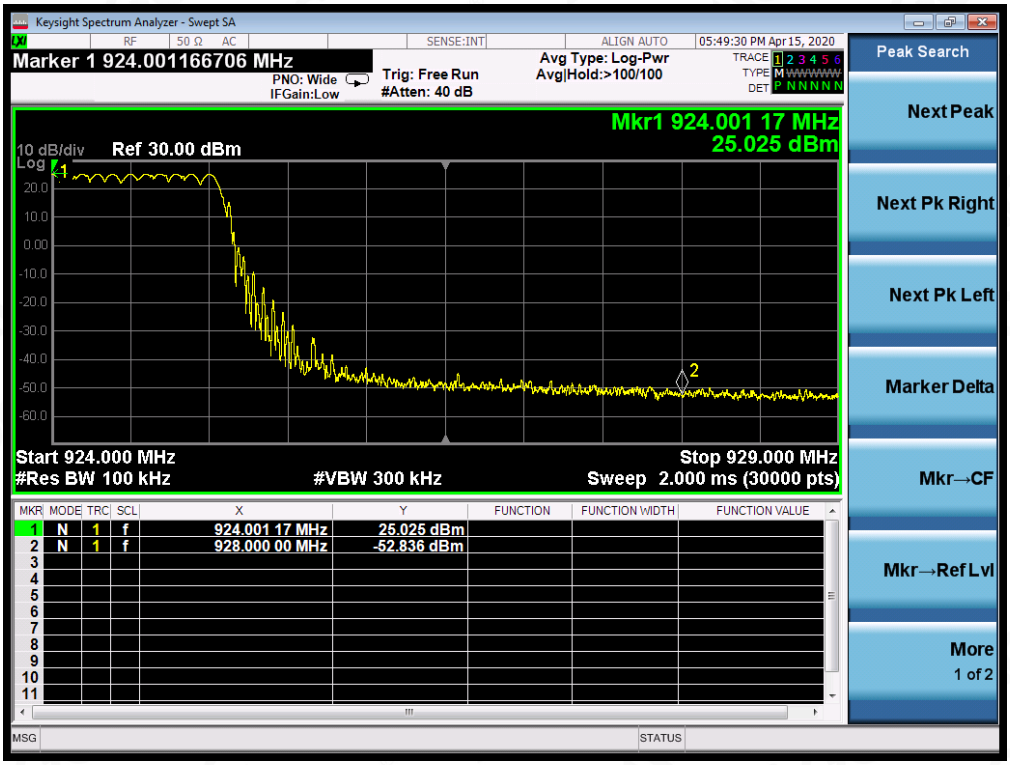

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

10.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

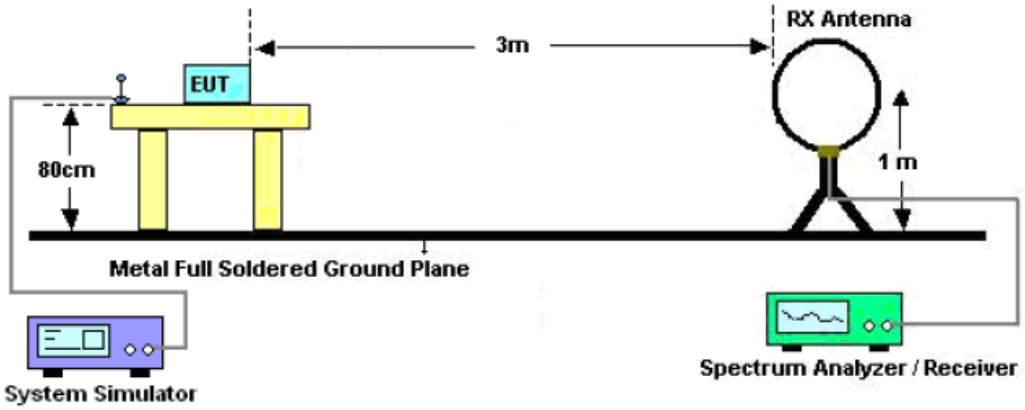

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

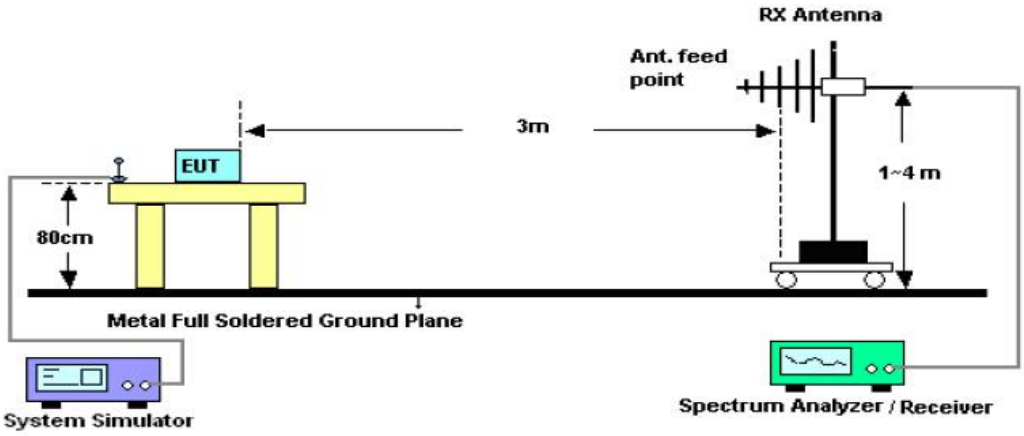

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

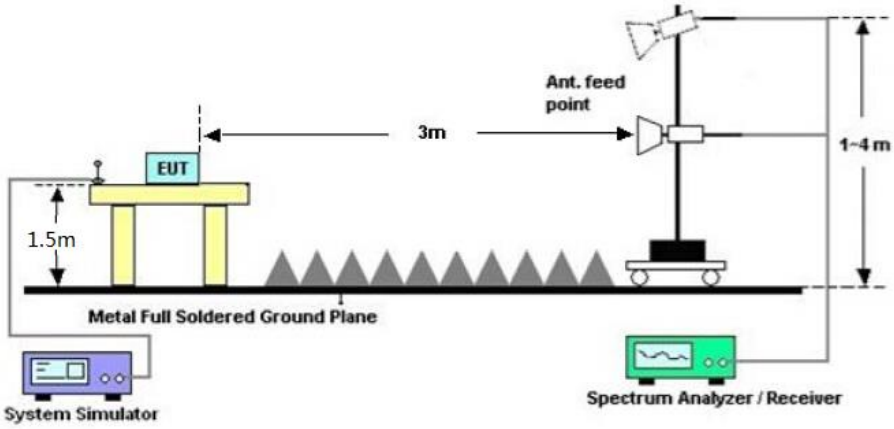

10.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,
the test records reported below are the worst result compared to other modes.

10.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

EUT	UHF Card Issuer	**Model Name**	U1000F
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Horizontal

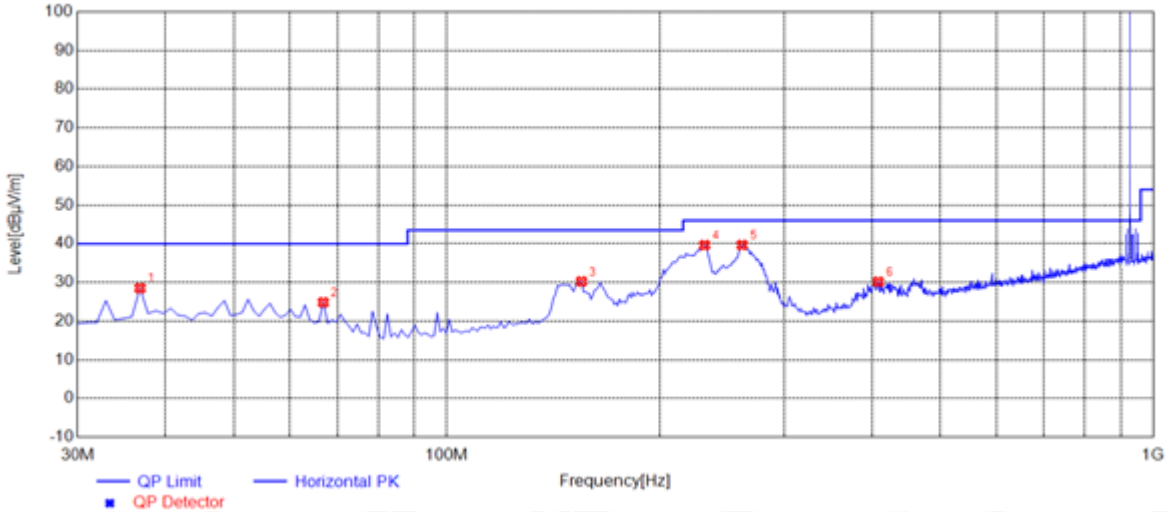

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	28.49	14.16	40.00	11.51	100	273	Horizontal
2	66.8600	24.84	12.76	40.00	15.16	100	233	Horizontal
3	155.130	30.23	14.93	43.50	13.27	200	260	Horizontal
4	231.760	39.63	14.17	46.00	6.37	100	156	Horizontal
5	261.830	39.66	14.71	46.00	6.34	100	273	Horizontal
6	408.300	30.16	19.99	46.00	15.84	100	253	Horizontal

RESULT: PASS

EUT	UHF Card Issuer	Model Name	U1000F
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

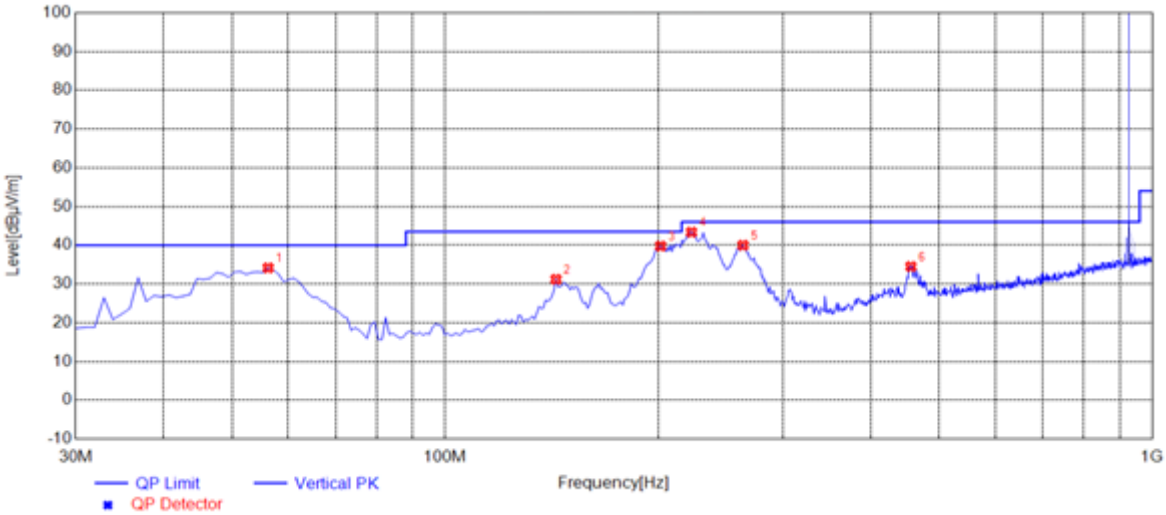

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	56.1900	34.15	14.20	40.00	5.85	100	170	Vertical
2	143.490	31.19	14.88	43.50	12.31	100	246	Vertical
3	201.690	39.77	12.17	43.50	3.73	100	13	Vertical
4	223.030	43.37	13.51	46.00	2.63	100	316	Vertical
5	263.770	39.99	14.88	46.00	6.01	100	63	Vertical
6	455.830	34.49	21.10	46.00	11.51	100	136	Vertical

RESULT: PASS

Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
2. The “Factor” value can be calculated automatically by software of measurement system.
3. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.

RADIATED EMISSION ABOVE 1GHZ

EUT	UHF Card Issuer	**Model Name**	U1000F
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2760.008	60.53	-9.27	51.26	74.00	-22.74	peak
2760.008	55.42	-9.27	46.15	54.00	-7.85	AVG
3680.008	57.26	-7.68	49.58	74.00	-24.42	peak
3680.008	53.41	-7.68	45.73	54.00	-8.27	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	UHF Card Issuer	**Model Name**	U1000F
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2760.008	60.12	-9.27	50.85	74.00	-23.15	peak
2760.008	55.08	-9.27	45.81	54.00	-8.19	AVG
3680.008	56.53	-7.68	48.85	74.00	-25.15	peak
3680.008	52.18	-7.68	44.50	54.00	-9.50	AVG

Remark:
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	UHF Card Issuer	**Model Name**	U1000F
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 2	**Antenna**	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2767.502	60.69	-9.18	51.51	74.00	-22.49	peak
2767.502	55.42	-9.18	46.24	54.00	-7.76	AVG
3690.006	56.78	-7.54	49.24	74.00	-24.76	peak
3690.006	52.53	-7.54	44.99	54.00	-9.01	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	UHF Card Issuer	**Model Name**	U1000F
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 2	**Antenna**	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2767.502	59.24	-9.18	50.06	74.00	-23.94	peak
2767.502	54.39	-9.18	45.21	54.00	-8.79	AVG
3690.006	55.96	-7.54	48.42	74.00	-25.58	peak
3690.006	51.85	-7.54	44.31	54.00	-9.69	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	UHF Card Issuer	**Model Name**	U1000F
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 3	**Antenna**	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2775.012	59.88	-9.07	50.81	74.00	-23.19	peak
2775.012	54.77	-9.07	45.70	54.00	-8.30	AVG
3700.009	55.54	-7.38	48.16	74.00	-25.84	peak
3700.009	51.29	-7.38	43.91	54.00	-10.09	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	UHF Card Issuer	**Model Name**	U1000F
Temperature	25°C	**Relative Humidity**	55.4%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 3	**Antenna**	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
2775.012	60.25	-9.07	51.18	74.00	-22.82	peak
2775.012	55.16	-9.07	46.09	54.00	-7.91	AVG
3700.009	54.89	-7.38	47.51	74.00	-26.49	peak
3700.009	50.26	-7.38	42.88	54.00	-11.12	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RESULT: PASS

Note:

Other emissions from 1G to 10 GHz are considered as ambient noise. No recording in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The “Factor” value can be calculated automatically by software of measurement system.

11. NUMBER OF HOPPING FREQUENCY

11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
3. VBW ≥ RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
4. Allow the trace to stabilize.

11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

11.4. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	>=50	51	PASS

TEST PLOT FOR NO. OF TOTAL CHANNELS

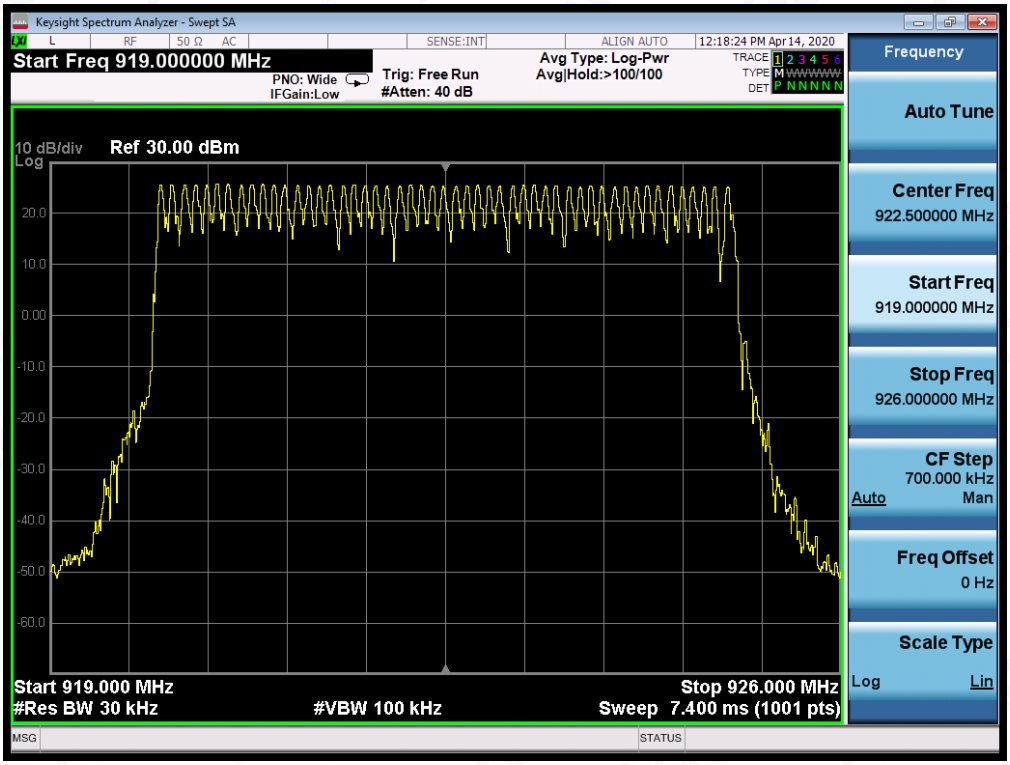

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Zero span, centered on a hopping channel.
2. RBW shall be≤channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
4. Detector function: Peak. Trace: Max hold.
5. Use the marker-delta function to determine the transmit time per hop.
6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:
   (Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) × (period specified in the requirements / analyzer sweep time)
7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

12.4. LIMITS AND MEASUREMENT RESULT

Channel	Time of Pulse (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)
Low	29.41	3	88.23	400
Middle	29.41	3	88.23	400
High	29.41	3	88.23	400

TEST PLOT OF LOW CHANNEL

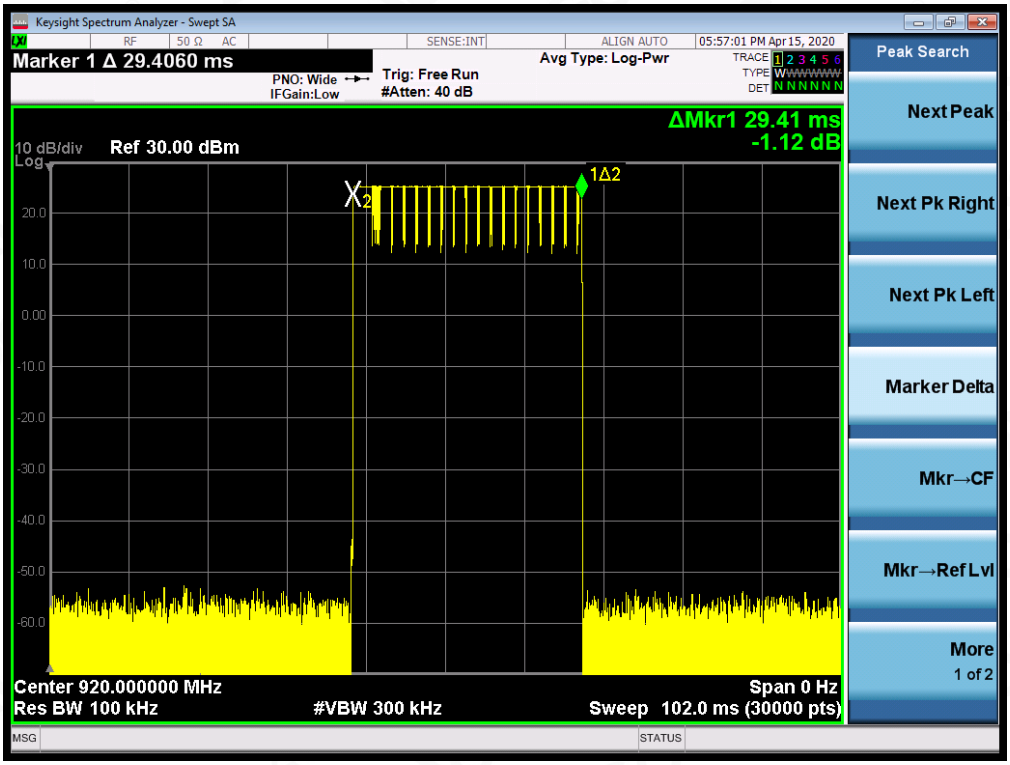

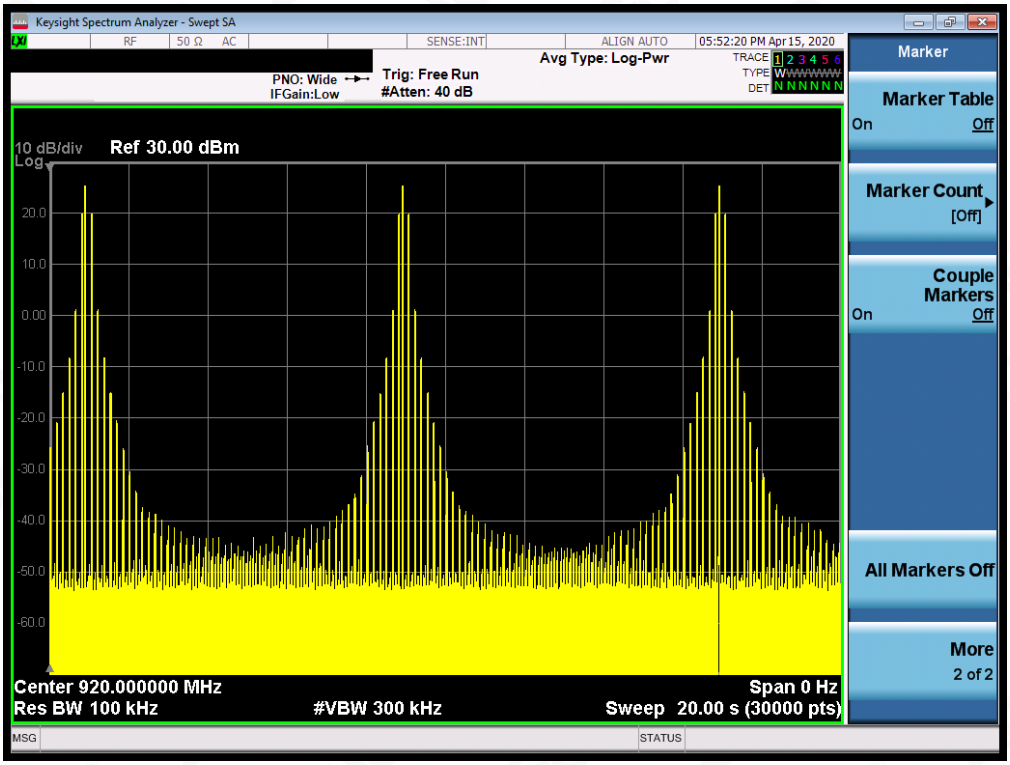

TEST PLOT OF MIDDLE CHANNEL

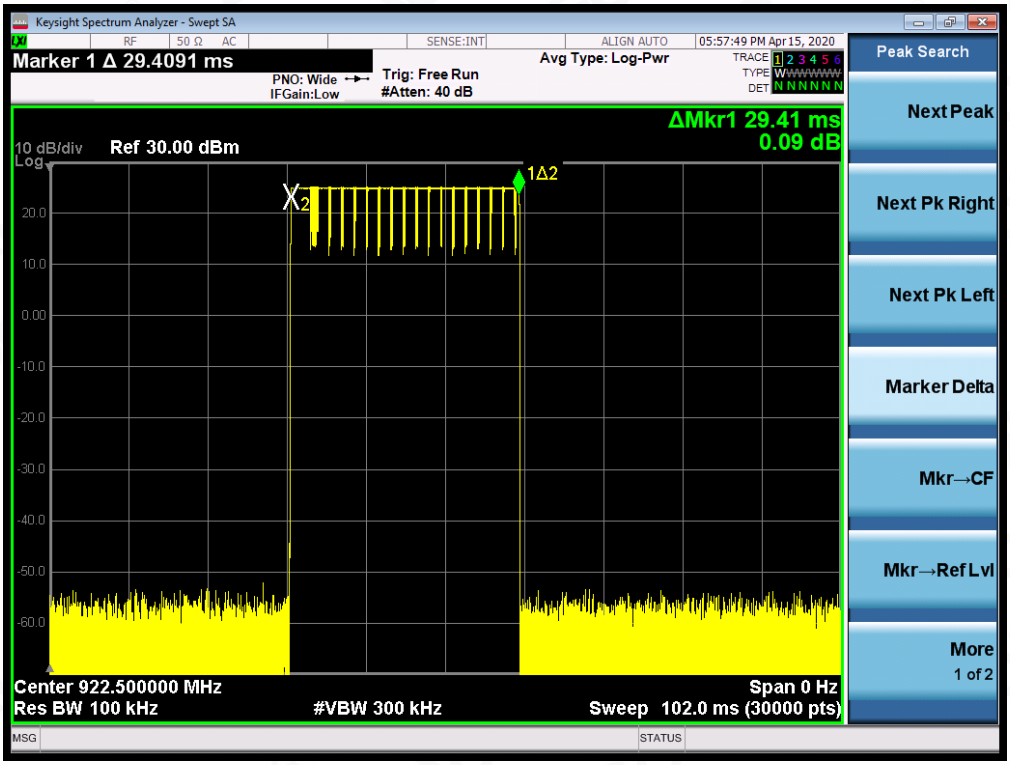

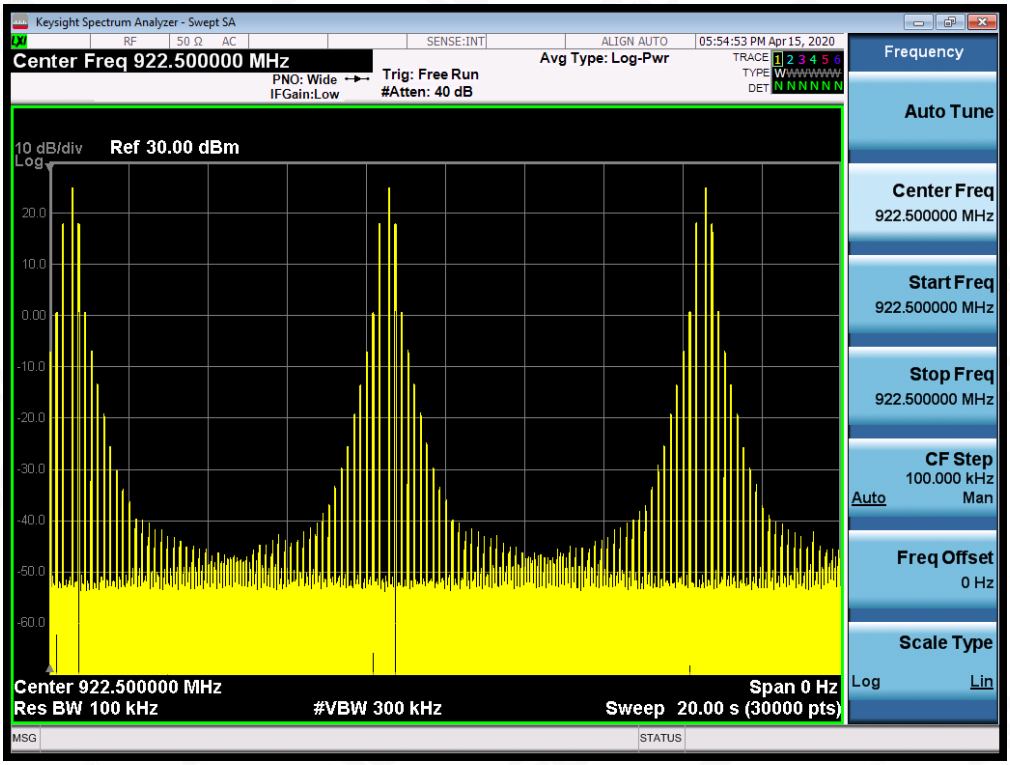

TEST PLOT OF HIGH CHANNEL

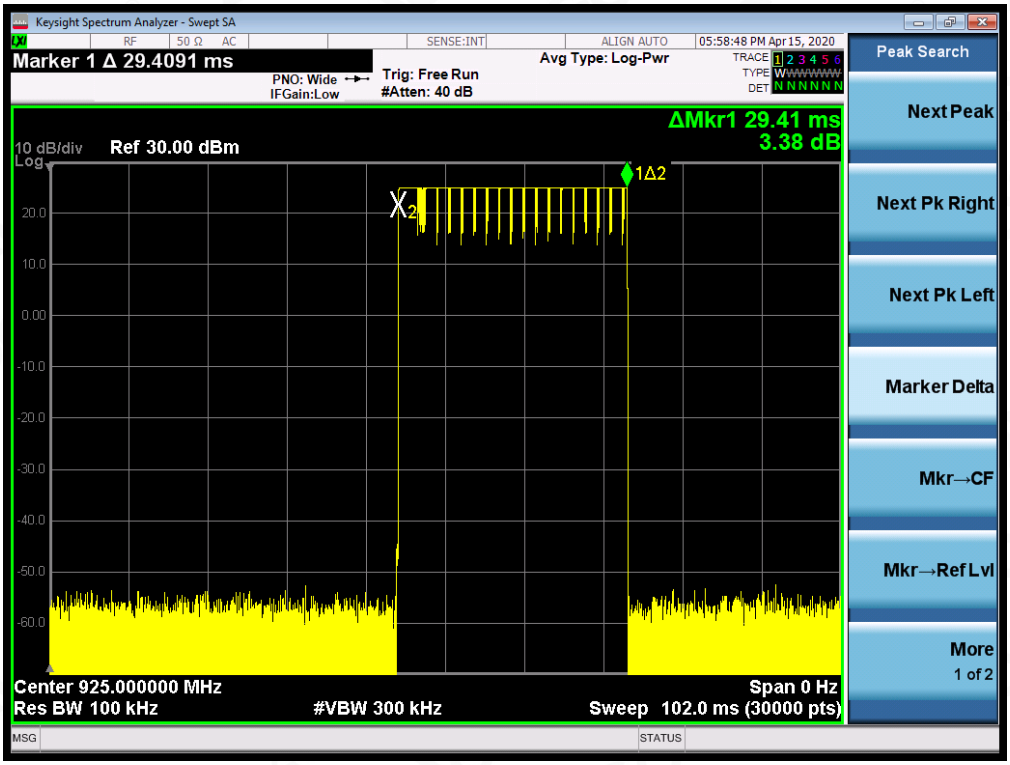

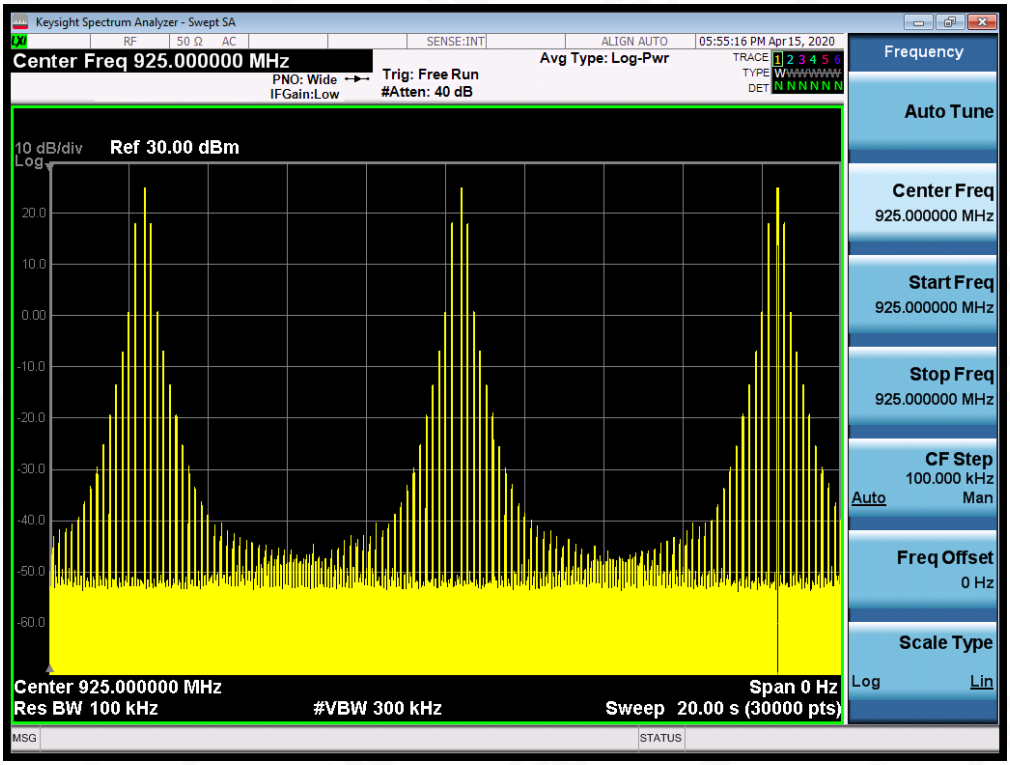

13. FREQUENCY SEPARATION

13.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span: Wide enough to capture the peaks of two adjacent channels.
2. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
3. Video (or average) bandwidth (VBW) ≥ RBW.
4. Sweep: Auto. e) Detector function: Peak. f) Trace: Max hold. g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 6.2

13.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.3

13.4. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	Pass
CH01-CH02	96.3	>=25 KHz or 2/3 20 dB BW	

TEST PLOT FOR FREQUENCY SEPARATION

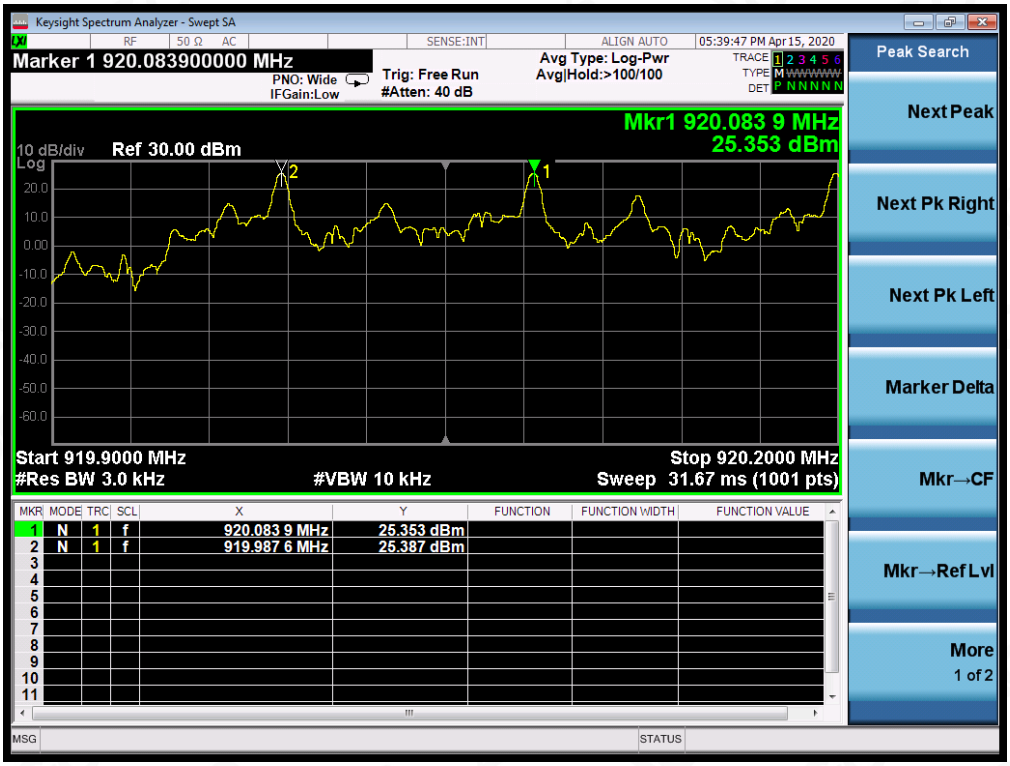

14. FCC LINE CONDUCTED EMISSION TEST

14.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:
1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

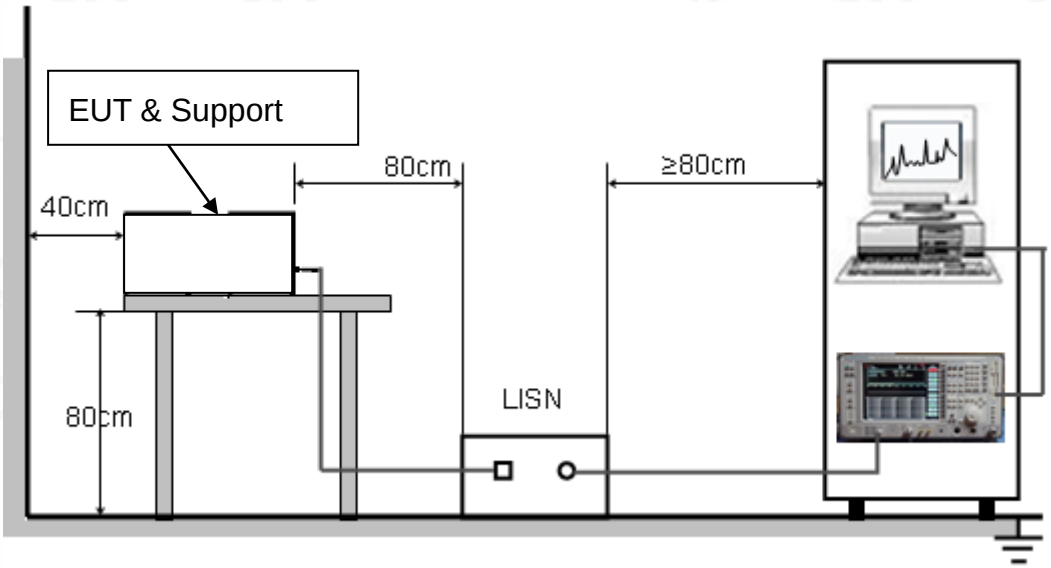

14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC 120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter which received AC 120V/60Hz power by a LISN..
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

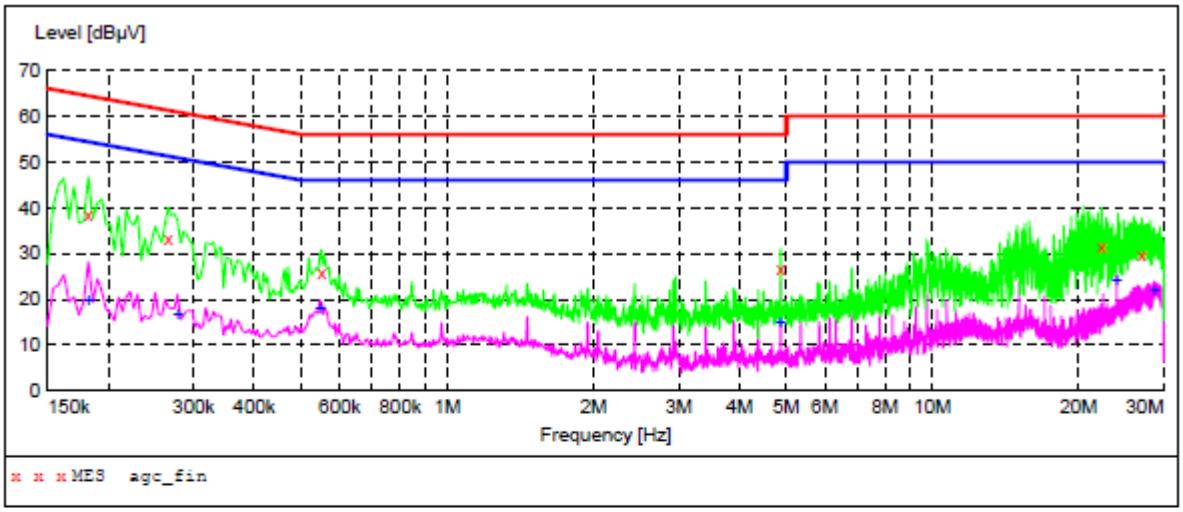

MEASUREMENT RESULT: "agc_fin"

2020/4/2 21:39

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.182000	38.60	11.3	64	25.8	QP	L1	FLO
0.266000	33.40	11.3	61	27.8	QP	L1	FLO
0.550000	25.80	11.3	56	30.2	QP	L1	FLO
4.870000	26.50	11.4	56	29.5	QP	L1	FLO
22.338000	31.50	12.4	60	28.5	QP	L1	FLO
27.030000	29.80	12.6	60	30.2	QP	L1	FLO

MEASUREMENT RESULT: "agc_fin2"

2020/4/2 21:39

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.182000	19.80	11.3	54	34.6	AV	L1	FLO
0.278000	16.50	11.3	51	34.4	AV	L1	FLO
0.546000	18.10	11.3	46	27.9	AV	L1	FLO
4.866000	14.70	11.4	46	31.3	AV	L1	FLO
24.002000	24.00	12.5	50	26.0	AV	L1	FLO
28.678000	21.80	12.7	50	28.2	AV	L1	FLO

RESULT: PASS

LINE CONDUCTED EMISSION TEST-N

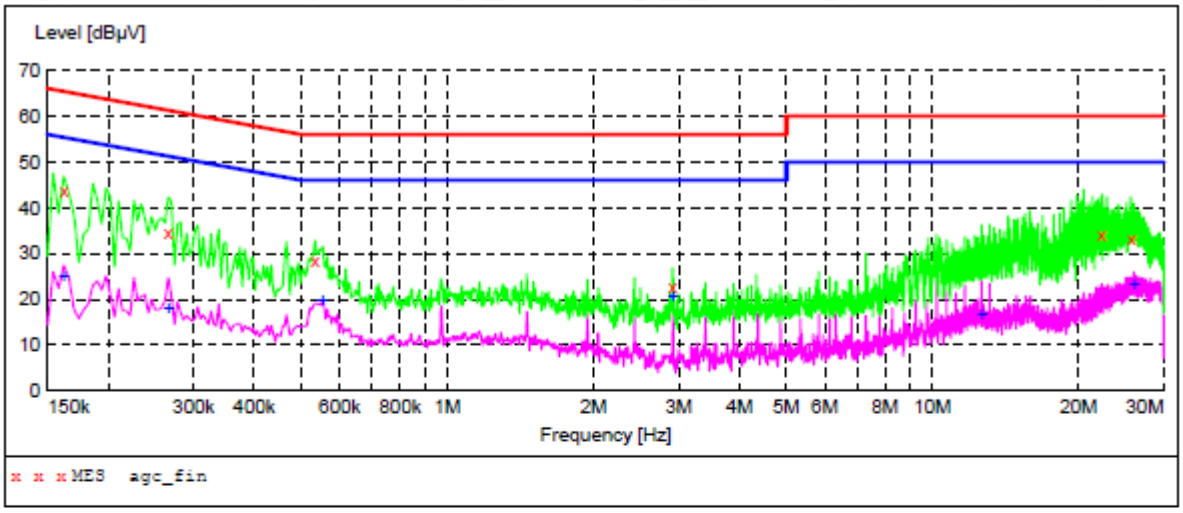

MEASUREMENT RESULT: "agc_fin"

2020/4/2 21:35

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.162000	43.60	11.3	65	21.8	QP	N	FLO
0.266000	34.50	11.3	61	26.7	QP	N	FLO
0.534000	28.60	11.3	56	27.4	QP	N	FLO
2.914000	22.60	11.4	56	33.4	QP	N	FLO
22.358000	34.10	12.4	60	25.9	QP	N	FLO
25.726000	33.30	12.6	60	26.7	QP	N	FLO

MEASUREMENT RESULT: "agc_fin2"

2020/4/2 21:34

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.162000	24.90	11.3	55	30.5	AV	N	FLO
0.266000	18.00	11.3	51	33.2	AV	N	FLO
0.554000	19.60	11.3	46	26.4	AV	N	FLO
2.918000	20.60	11.4	46	25.4	AV	N	FLO
12.650000	16.80	11.8	50	33.2	AV	N	FLO
26.014000	23.00	12.6	50	27.0	AV	N	FLO

RESULT: PASS

Note: All the test modes had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC RADIATED EMISSION TEST SETUP

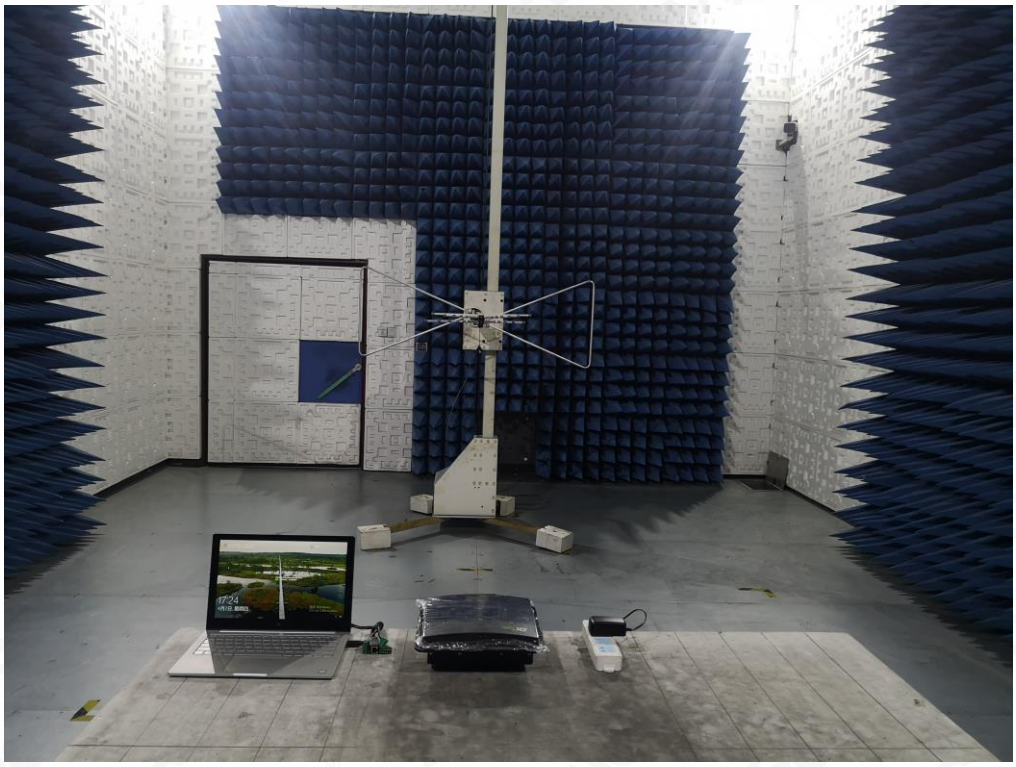

CONDUCTED EMISSION TEST SETUP

APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT

TOP VIEW OF EUT

BOTTOM VIEW OF EUT

FRONT VIEW OF EUT

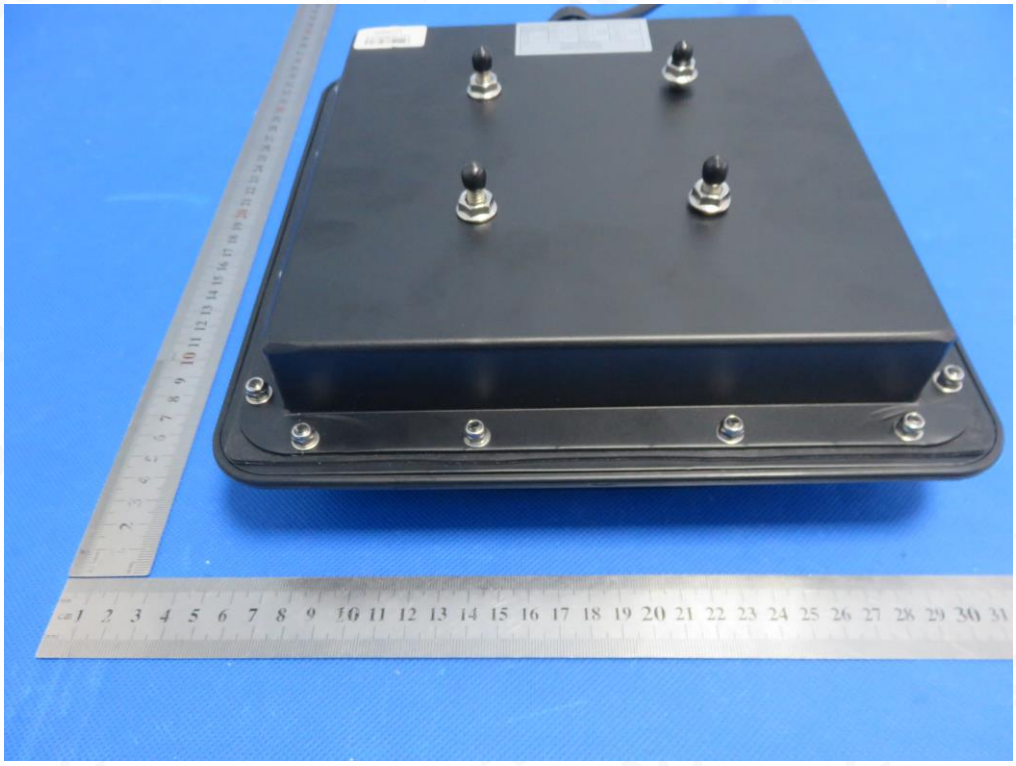

BACK VIEW OF EUT

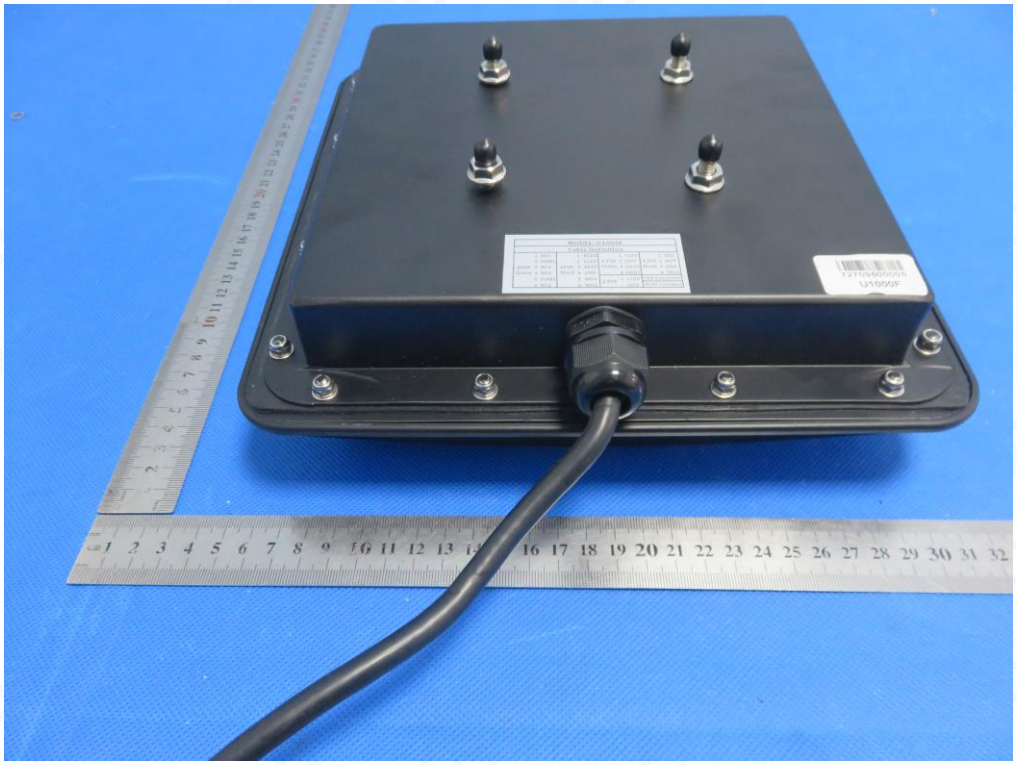

LEFT VIEW OF EUT

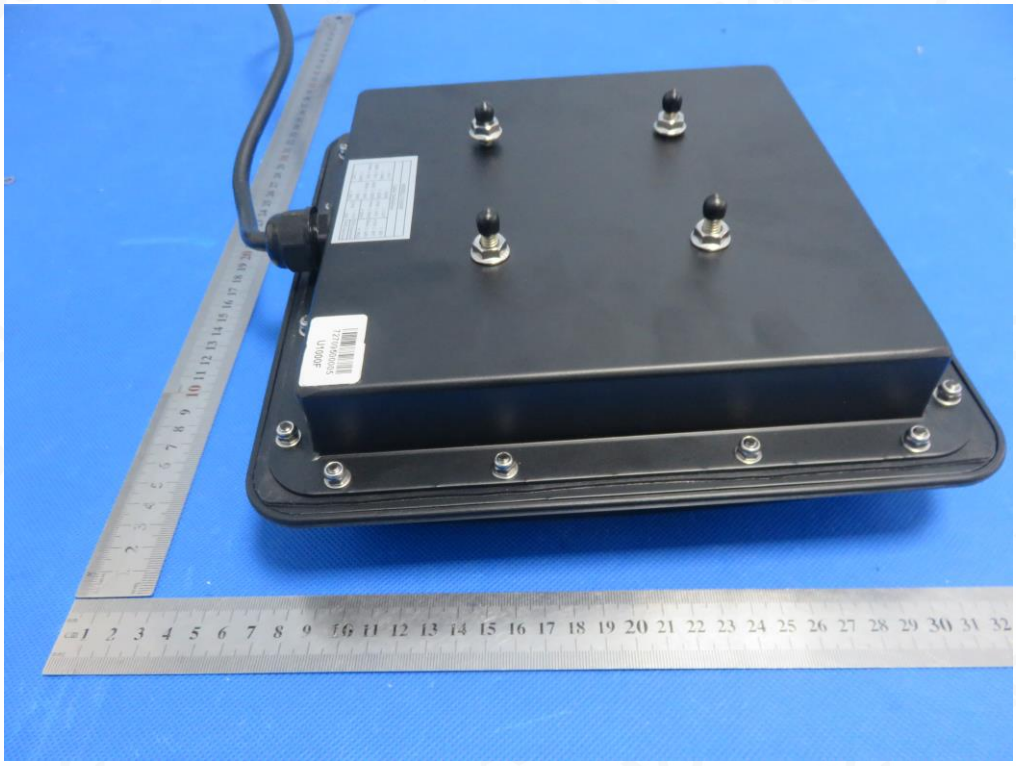

RIGHT VIEW OF EUT

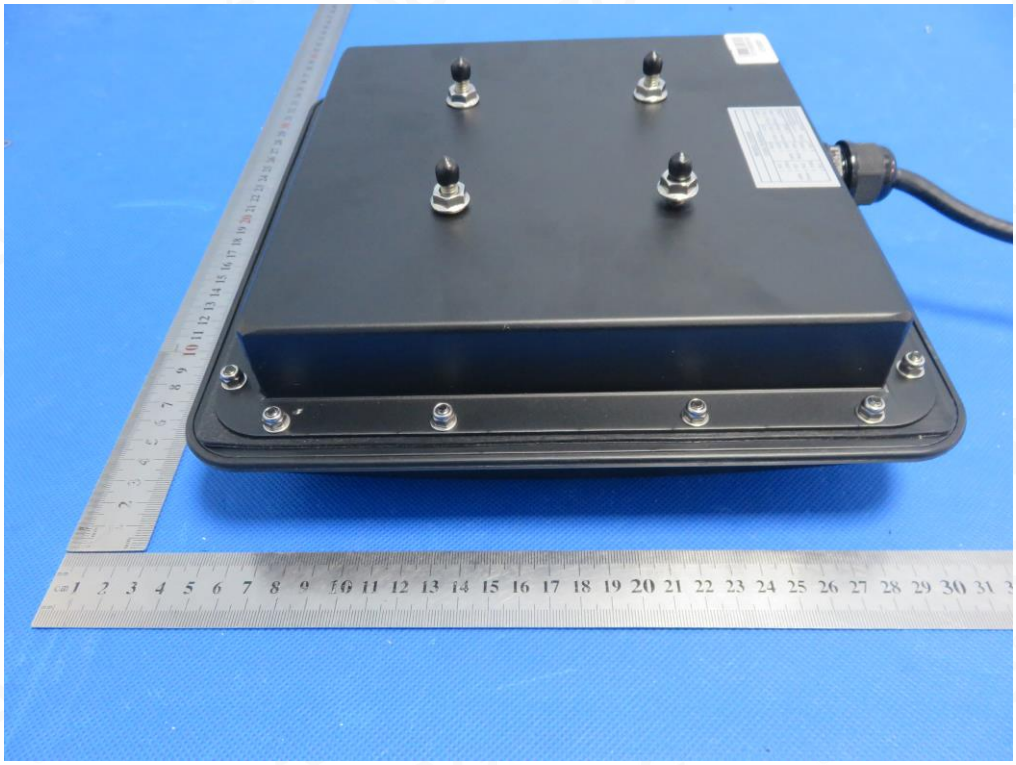

OPEN VIEW-1 OF EUT

OPEN VIEW-1 OF EUT

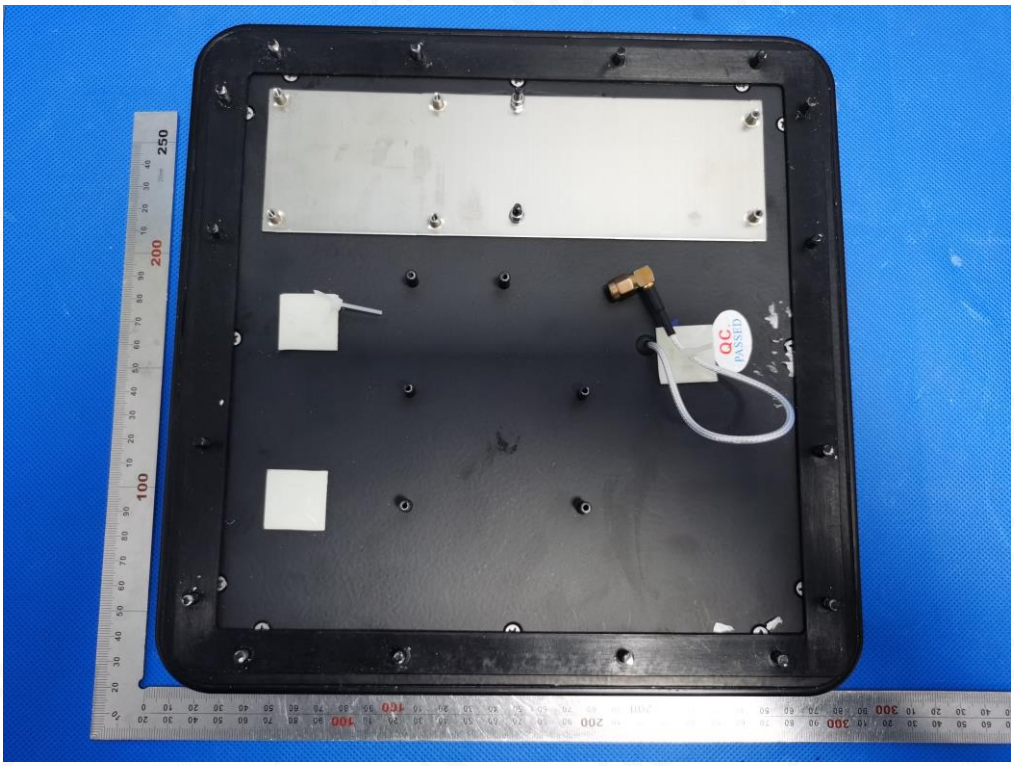

INTERNAL VIEW-1 OF EUT

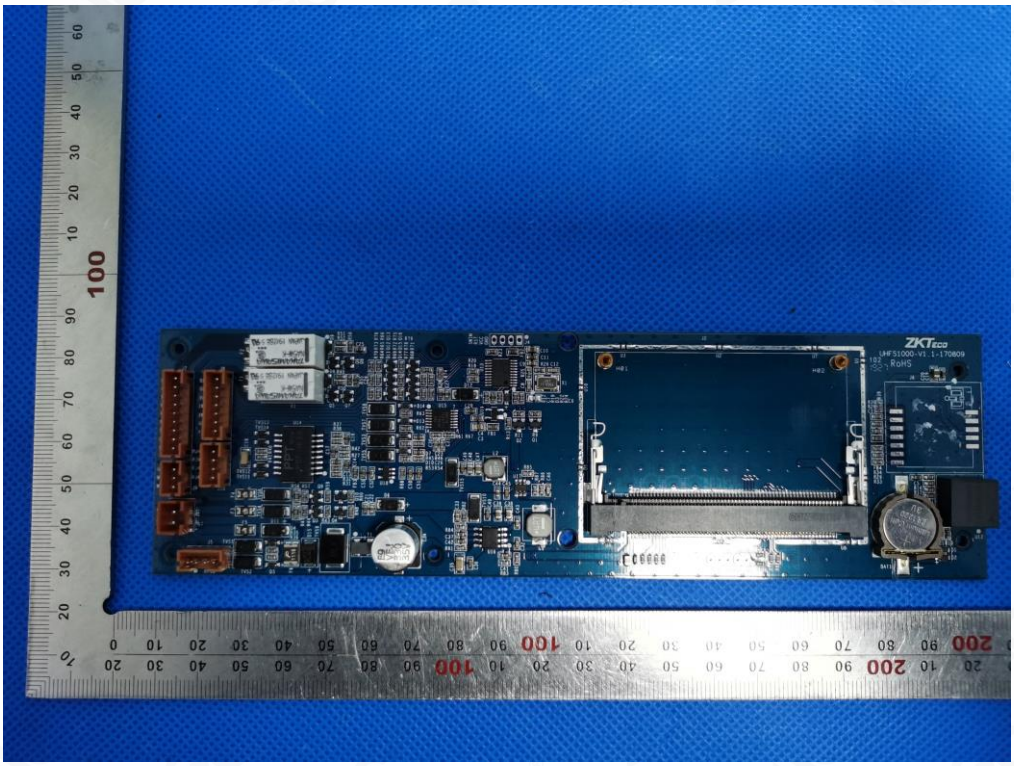

INTERNAL VIEW-2 OF EUT

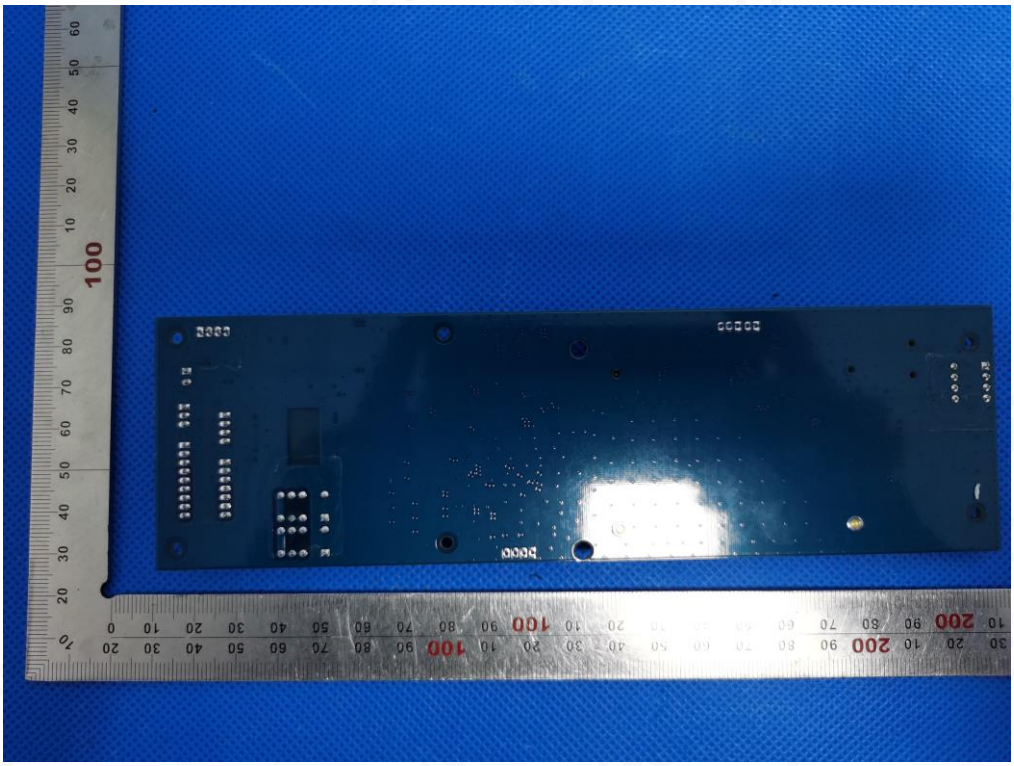

INTERNAL VIEW-3 OF EUT

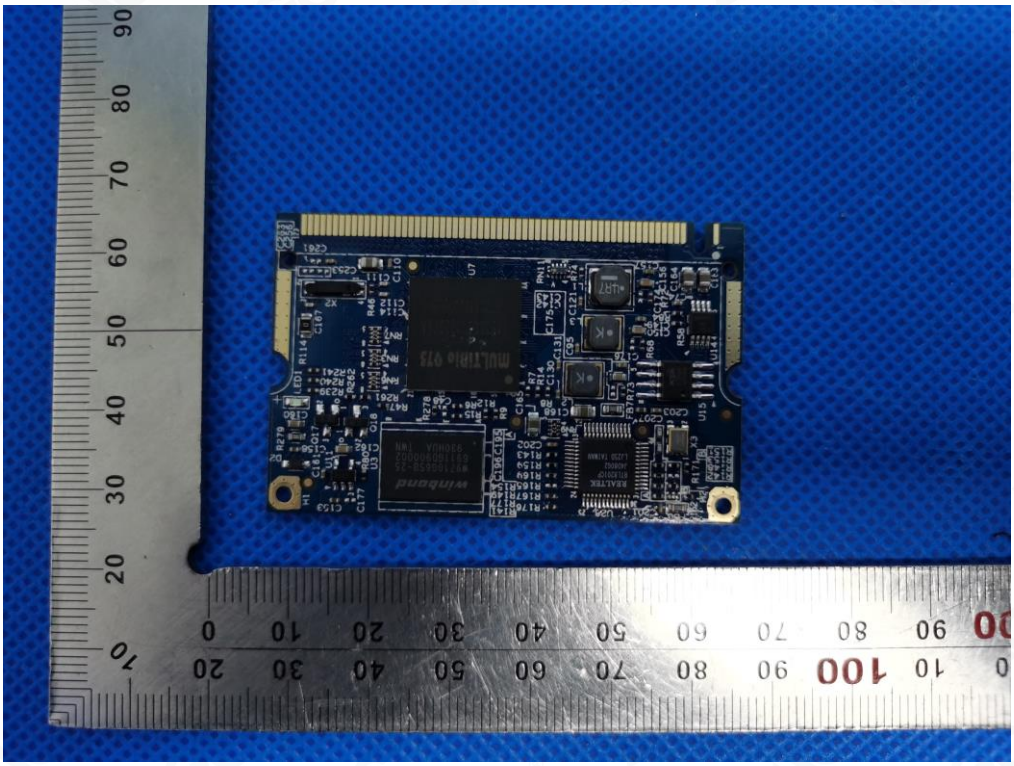

INTERNAL VIEW-4 OF EUT

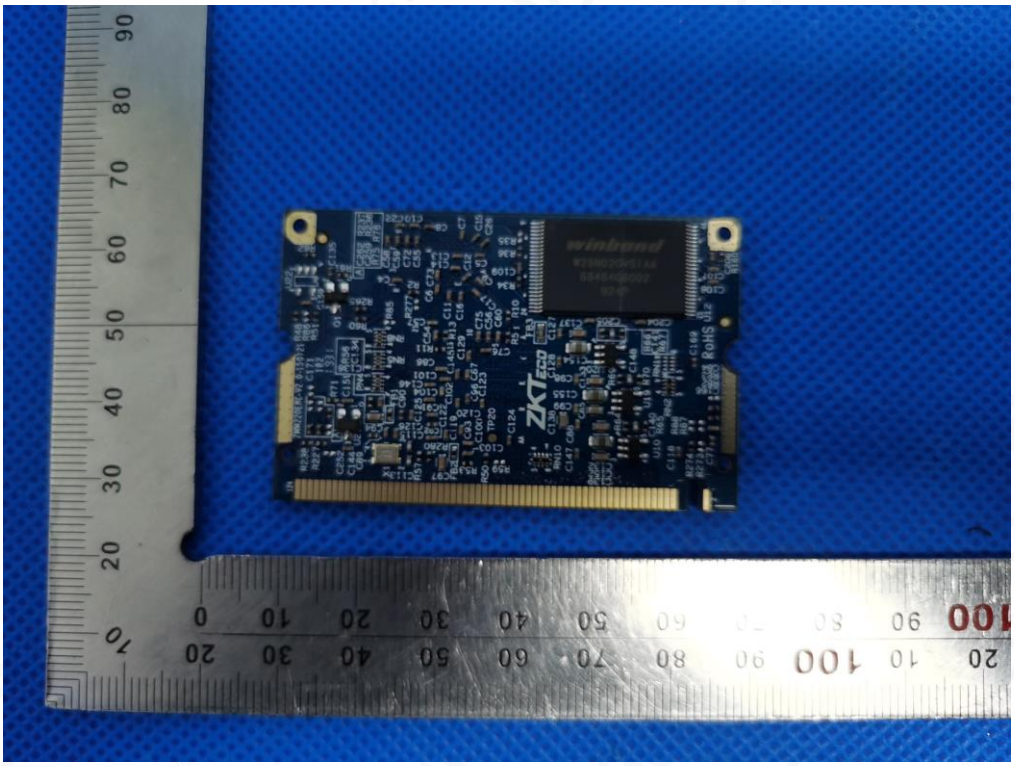

INTERNAL VIEW-5 OF EUT

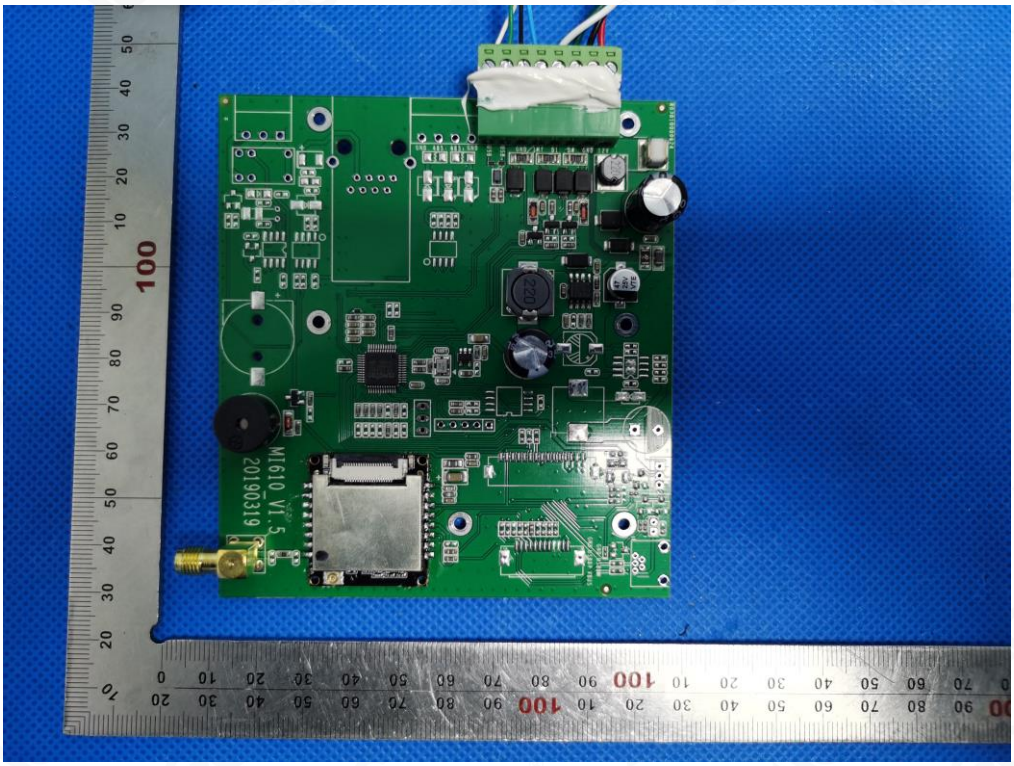

INTERNAL VIEW-6 OF EUT

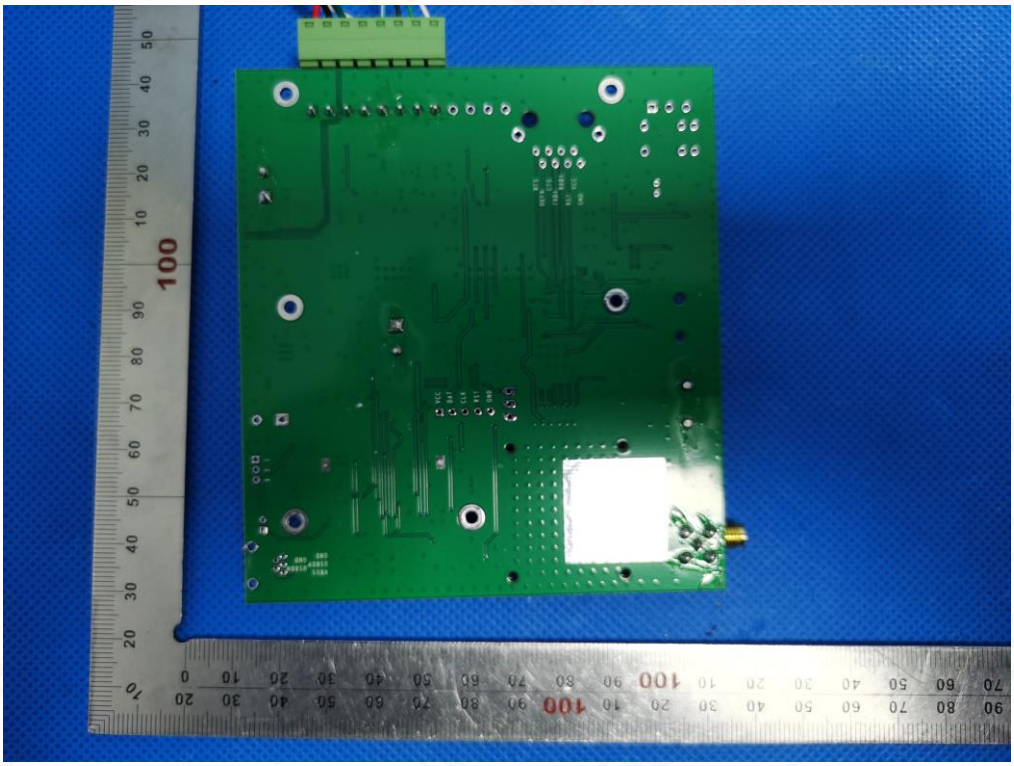

INTERNAL VIEW-7 OF EUT

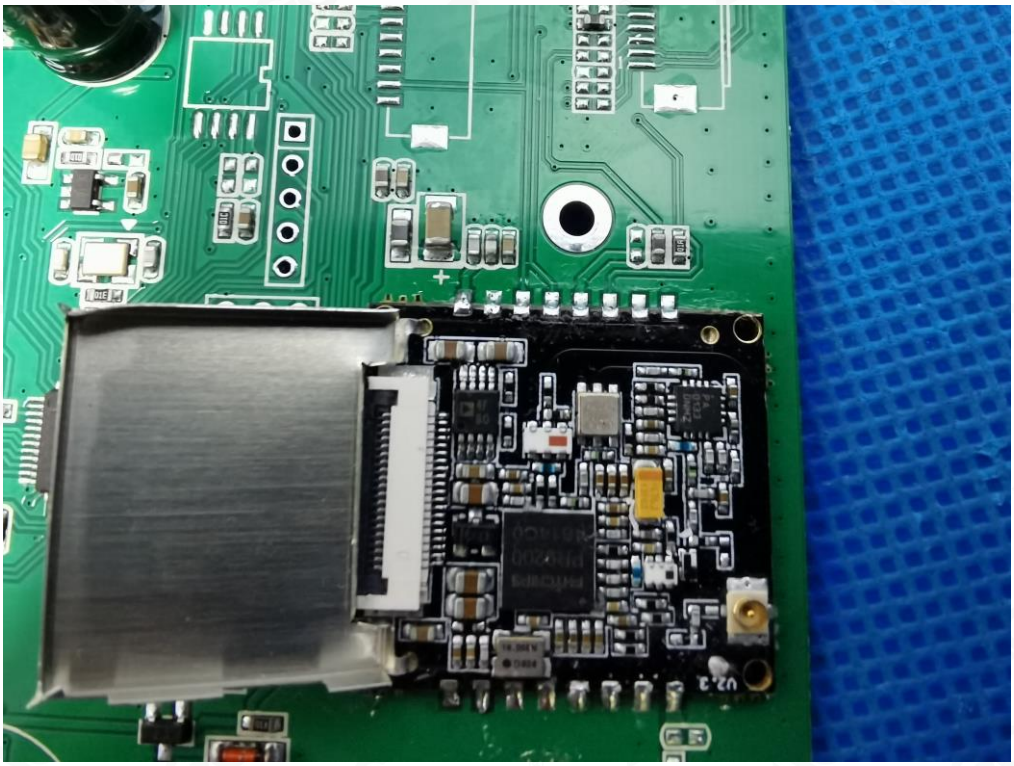

----END OF REPORT----