Test Mode: TX / IEEE 802.11g (CH High) **Tested by:** Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** April 1, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1801.000	48.57	-6.26	42.31	74.00	-31.69	V	Peak
2152.000	46.82	-4.17	42.65	74.00	-31.35	V	Peak
2539.000	46.67	-2.19	44.48	74.00	-29.52	V	Peak
3286.000	47.96	-0.88	47.08	74.00	-26.92	V	Peak
4105.000	43.91	1.96	45.87	74.00	-28.13	V	Peak
4834.000	43.58	4.44	48.02	74.00	-25.98	V	Peak
1954.000	47.89	-5.29	42.60	74.00	-31.40	H	Peak
2512.000	48.50	-2.24	46.26	74.00	-27.74	H	Peak
3061.000	46.01	-1.26	44.75	74.00	-29.25	H	Peak
3952.000	44.32	1.39	45.71	74.00	-28.29	H	Peak
4663.000	43.57	3.88	47.45	74.00	-26.55	H	Peak
5176.000	44.54	5.29	49.83	74.00	-24.17	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11n HT20 MHz (CH Low) **Tested by:** Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** April 1, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1765.000	51.91	-6.35	45.56	74.00	-28.44	V	Peak
2629.000	46.66	-2.03	44.63	74.00	-29.37	V	Peak
3214.000	51.79	-1.00	50.79	74.00	-23.21	V	Peak
4195.000	43.72	2.28	46.00	74.00	-28.00	V	Peak
4825.000	47.01	4.41	51.42	74.00	-22.58	V	Peak
6022.000	42.19	6.12	48.31	74.00	-25.69	V	Peak
1558.000	47.76	-6.78	40.98	74.00	-33.02	H	Peak
2494.000	48.37	-2.29	46.08	74.00	-27.92	H	Peak
3214.000	48.75	-1.00	47.75	74.00	-26.25	H	Peak
4231.000	44.01	2.40	46.41	74.00	-27.59	H	Peak
5230.000	43.68	5.39	49.07	74.00	-24.93	H	Peak
5914.000	42.21	6.04	48.25	74.00	-25.75	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11n HT20 MHz (CH Mid) **Tested by:** Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** April 1, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1801.000	47.62	-6.26	41.36	74.00	-32.64	V	Peak
2512.000	46.73	-2.24	44.49	74.00	-29.51	V	Peak
3250.000	48.26	-0.94	47.32	74.00	-26.68	V	Peak
4132.000	44.35	2.05	46.40	74.00	-27.60	V	Peak
4879.000	45.96	4.59	50.55	74.00	-23.45	V	Peak
5635.000	42.59	5.93	48.52	74.00	-25.48	V	Peak
2071.000	46.87	-4.61	42.26	74.00	-31.74	H	Peak
2512.000	47.42	-2.24	45.18	74.00	-28.82	H	Peak
2791.000	46.26	-1.74	44.52	74.00	-29.48	H	Peak
3799.000	44.79	0.74	45.53	74.00	-28.47	H	Peak
4645.000	43.41	3.82	47.23	74.00	-26.77	H	Peak
5212.000	43.97	5.36	49.33	74.00	-24.67	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / EEE 802.11n HT20 MHz (CH High) **Tested by:** Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** April 1, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1756.000	48.19	-6.36	41.83	74.00	-32.17	V	Peak
2512.000	47.08	-2.24	44.84	74.00	-29.16	V	Peak
3286.000	47.89	-0.88	47.01	74.00	-26.99	V	Peak
4258.000	44.35	2.50	46.85	74.00	-27.15	V	Peak
4924.000	44.98	4.73	49.71	74.00	-24.29	V	Peak
6265.000	41.44	6.51	47.95	74.00	-26.05	V	Peak
1963.000	46.02	-5.23	40.79	74.00	-33.21	H	Peak
2557.000	46.37	-2.16	44.21	74.00	-29.79	H	Peak
3772.000	45.09	0.63	45.72	74.00	-28.28	H	Peak
4672.000	44.70	3.91	48.61	74.00	-25.39	H	Peak
5140.000	43.45	5.23	48.68	74.00	-25.32	H	Peak
6193.000	41.83	6.39	48.22	74.00	-25.78	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11n HT40 MHz (CH Low) **Tested by:** Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** April 1, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1738.000	51.25	-6.40	44.85	74.00	-29.15	V	Peak
2530.000	47.12	-2.21	44.91	74.00	-29.09	V	Peak
3232.000	50.67	-0.97	49.70	74.00	-24.30	V	Peak
3808.000	43.91	0.78	44.69	74.00	-29.31	V	Peak
4339.000	43.71	2.78	46.49	74.00	-27.51	V	Peak
4852.000	45.44	4.50	49.94	74.00	-24.06	V	Peak
1360.000	47.95	-7.21	40.74	74.00	-33.26	H	Peak
2134.000	47.12	-4.27	42.85	74.00	-31.15	H	Peak
2530.000	47.27	-2.21	45.06	74.00	-28.94	H	Peak
3232.000	44.87	-0.97	43.90	74.00	-30.10	H	Peak
3790.000	44.90	0.70	45.60	74.00	-28.40	H	Peak
4672.000	44.37	3.91	48.28	74.00	-25.72	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / IEEE 802.11n HT40 MHz (CH Mid) **Tested by:** Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** April 1, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1765.000	49.49	-6.35	43.14	74.00	-30.86	V	Peak
2503.000	46.97	-2.25	44.72	74.00	-29.28	V	Peak
3250.000	48.01	-0.94	47.07	74.00	-26.93	V	Peak
4204.000	44.68	2.31	46.99	74.00	-27.01	V	Peak
4870.000	44.24	4.56	48.80	74.00	-25.20	V	Peak
5401.000	42.98	5.69	48.67	74.00	-25.33	V	Peak
1756.000	47.59	-6.36	41.23	74.00	-32.77	H	Peak
2512.000	47.90	-2.24	45.66	74.00	-28.34	H	Peak
3349.000	44.78	-0.77	44.01	74.00	-29.99	H	Peak
4321.000	44.40	2.72	47.12	74.00	-26.88	H	Peak
5320.000	42.40	5.55	47.95	74.00	-26.05	H	Peak
6130.000	43.14	6.29	49.43	74.00	-24.57	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Mode: TX / EEE 802.11n HT40 MHz (CH High) **Tested by:** Saber Huang

Ambient temperature: 24°C **Relative humidity:** 52% RH **Date:** April 1, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1765.000	47.78	-6.35	41.43	74.00	-32.57	V	Peak
2512.000	47.40	-2.24	45.16	74.00	-28.84	V	Peak
3268.000	48.54	-0.91	47.63	74.00	-26.37	V	Peak
4150.000	44.36	2.12	46.48	74.00	-27.52	V	Peak
4897.000	43.41	4.64	48.05	74.00	-25.95	V	Peak
5752.000	42.73	5.98	48.71	74.00	-25.29	V	Peak
1342.000	48.57	-7.27	41.30	74.00	-32.70	H	Peak
2512.000	47.64	-2.24	45.40	74.00	-28.60	H	Peak
3646.000	44.54	0.10	44.64	74.00	-29.36	H	Peak
4600.000	43.89	3.68	47.57	74.00	-26.43	H	Peak
5176.000	44.07	5.29	49.36	74.00	-24.64	H	Peak
6058.000	42.27	6.17	48.44	74.00	-25.56	H	Peak

REMARKS:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

7.3.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

7.3.3. TEST PROCEDURES (please refer to measurement standard)

8.2 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ⩾ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ⩾ 6 dB.

7.3.4. TEST SETUP

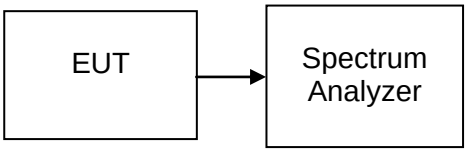

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.3.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	12140	>500	PASS
Mid	2437	12150		PASS
High	2462	12140		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16360	>500	PASS
Mid	2437	16360		PASS
High	2462	16360		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	17090	>500	PASS
Mid	2437	17120		PASS
High	2462	17100		PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	35700	>500	PASS
Mid	2437	35430		PASS
High	2452	35520		PASS

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

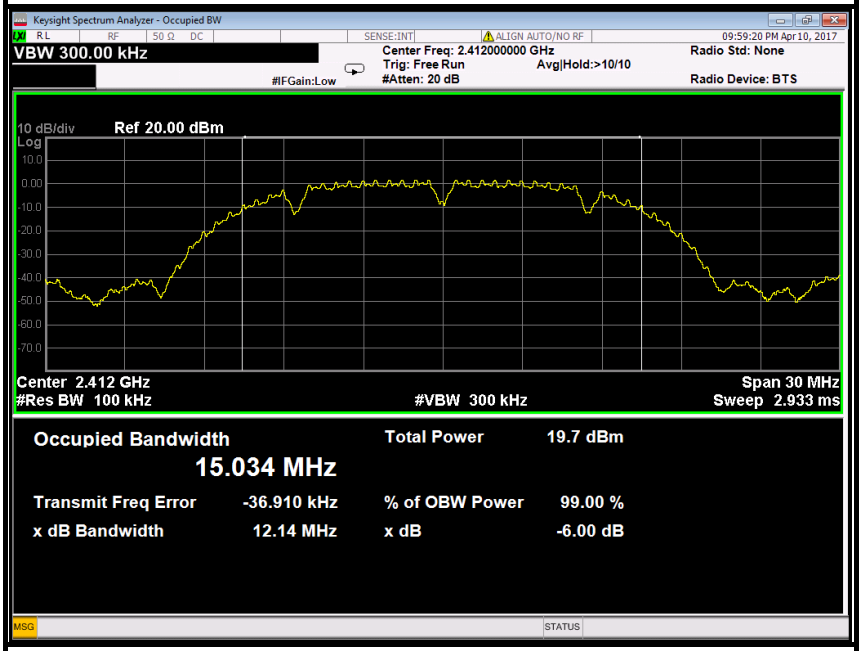

6dB Bandwidth (CH Mid)

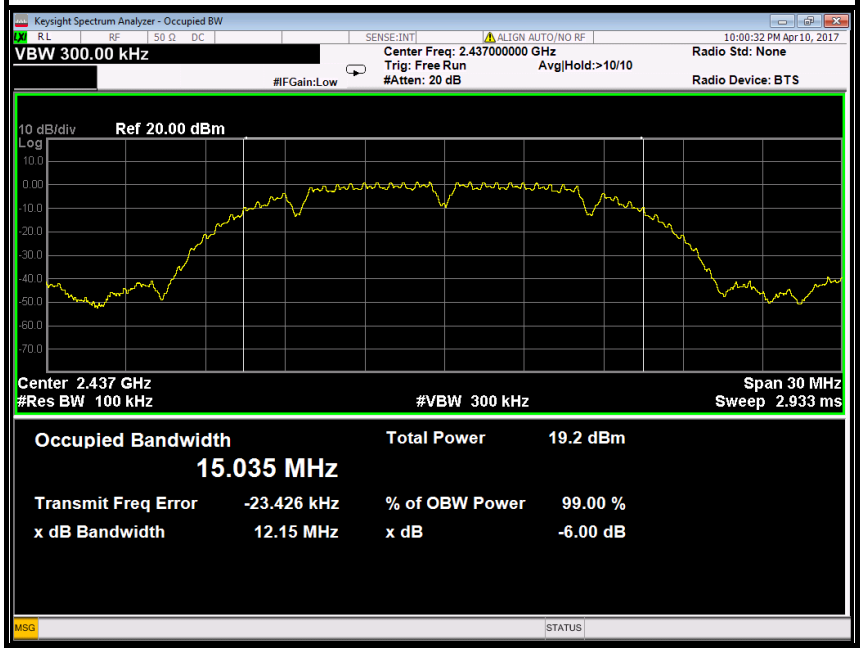

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6dB Bandwidth (CH High)

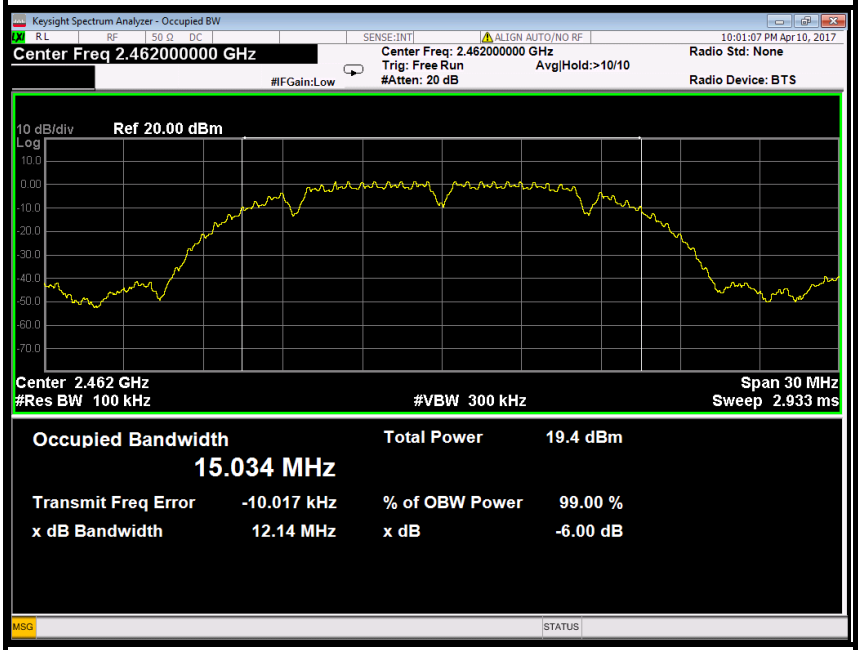

IEEE 802.11g mode

6dB Bandwidth (CH Low)

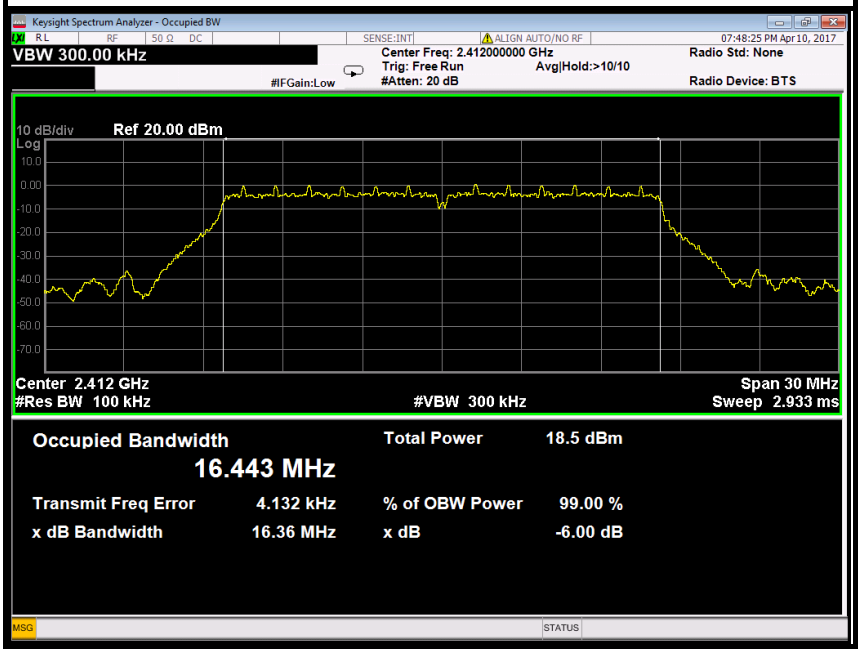

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6dB Bandwidth (CH Mid)

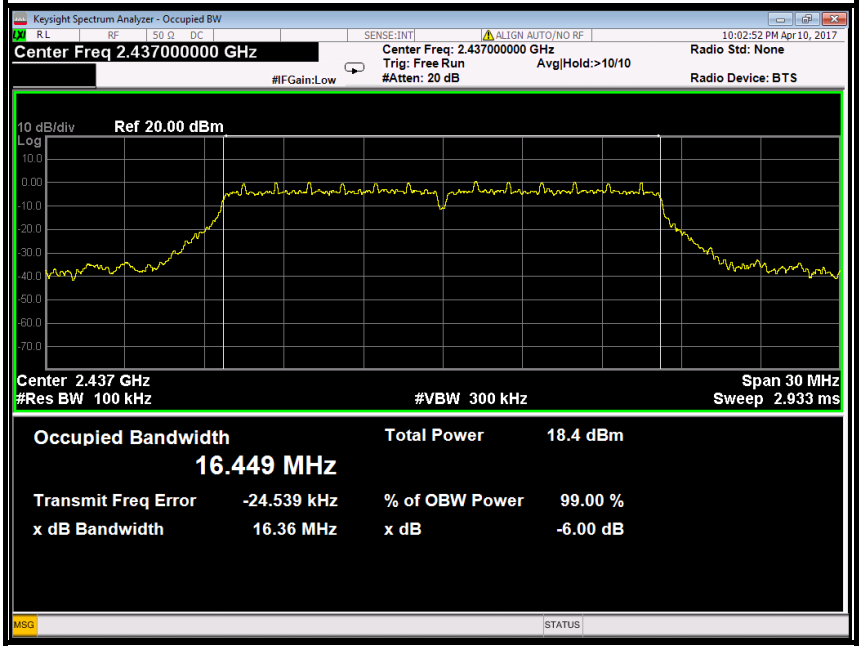

6dB Bandwidth (CH High)

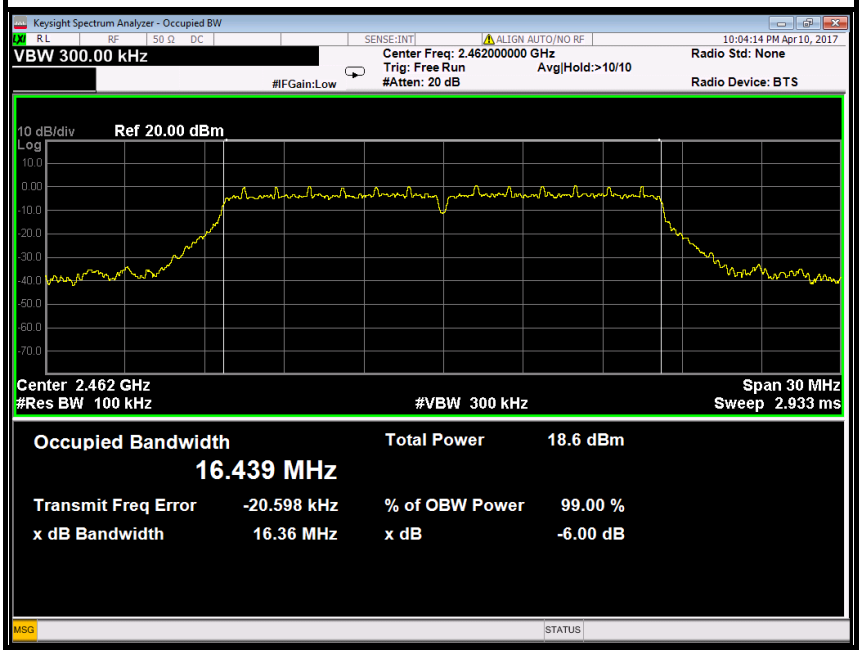

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT20 MHz mode

6dB Bandwidth (CH Low)

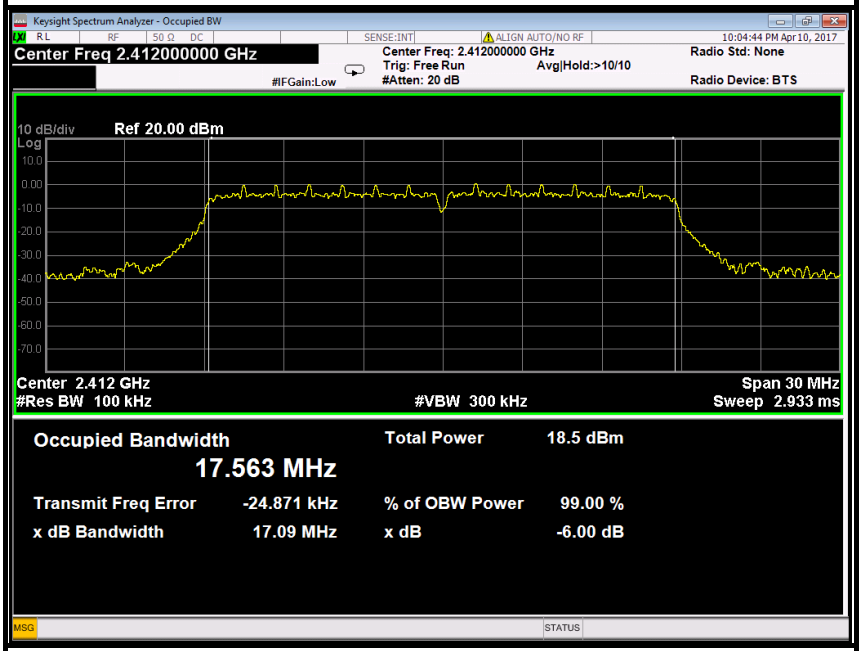

6dB Bandwidth (CH Mid)

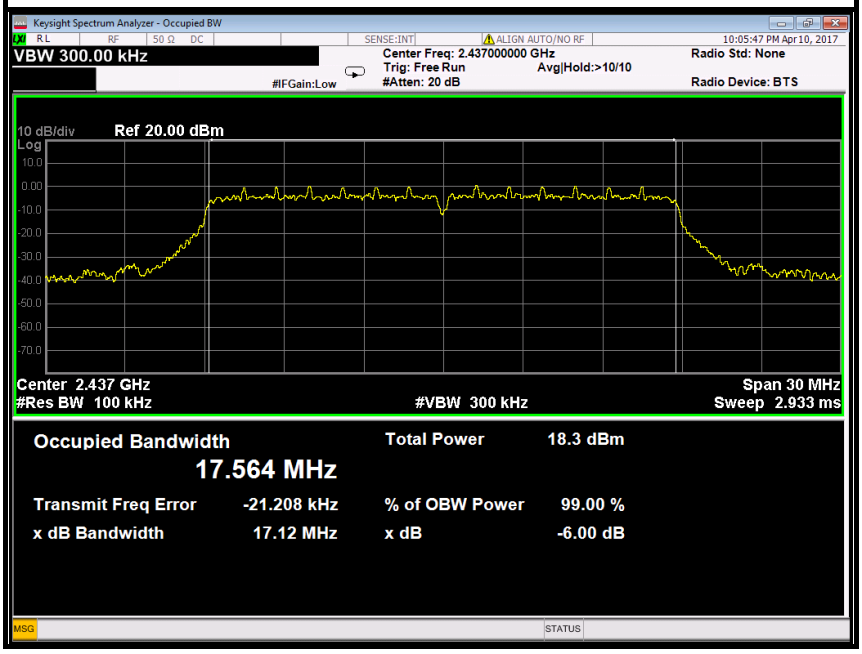

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

6dB Bandwidth (CH High)

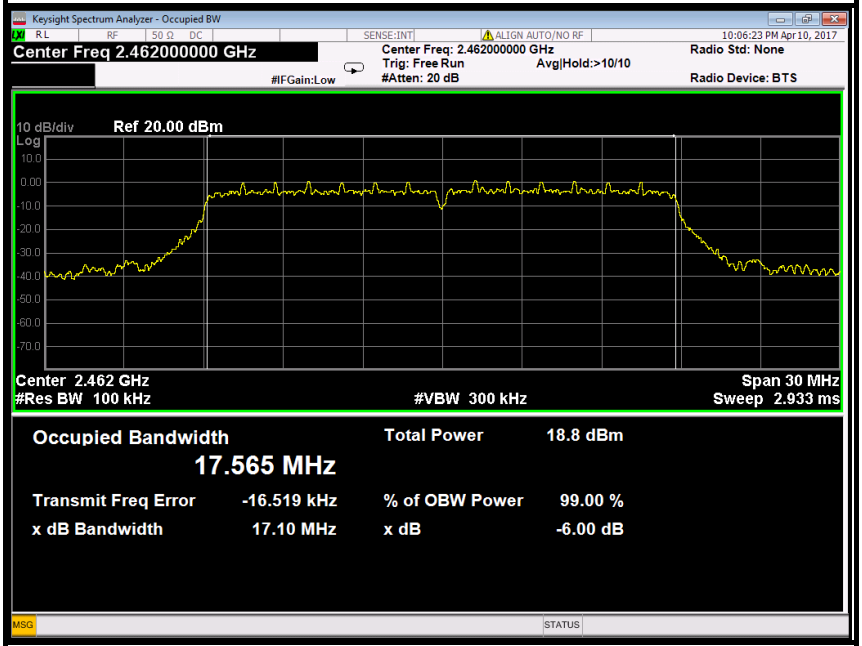

IEEE 802.11n HT40 MHz mode

6dB Bandwidth (CH Low)

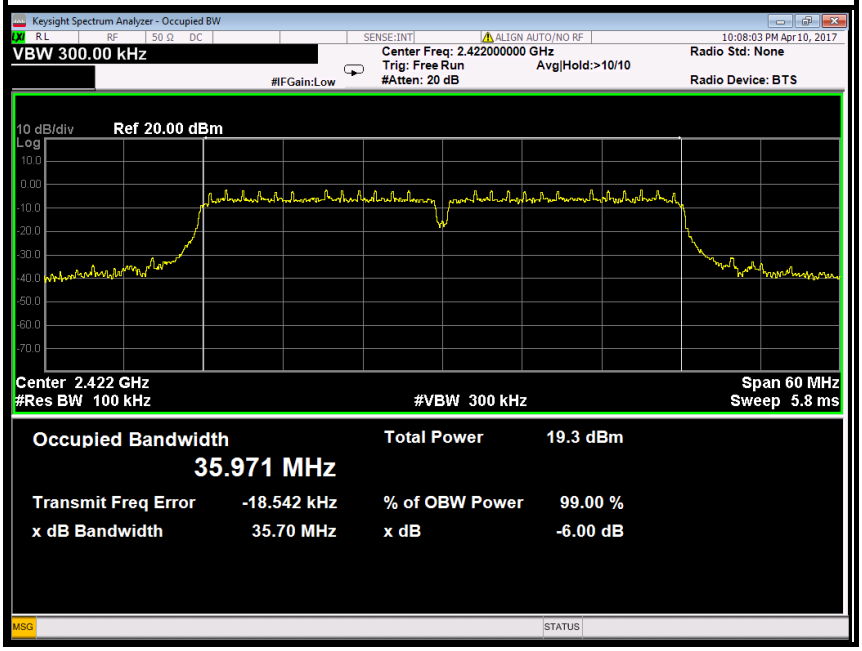

6dB Bandwidth (CH Mid)

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

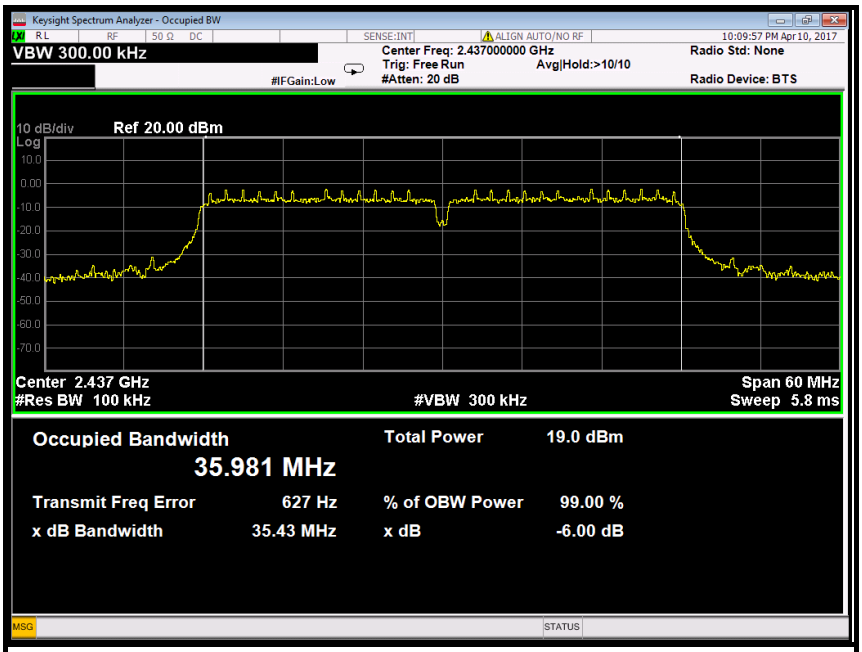

6dB Bandwidth (CH High)

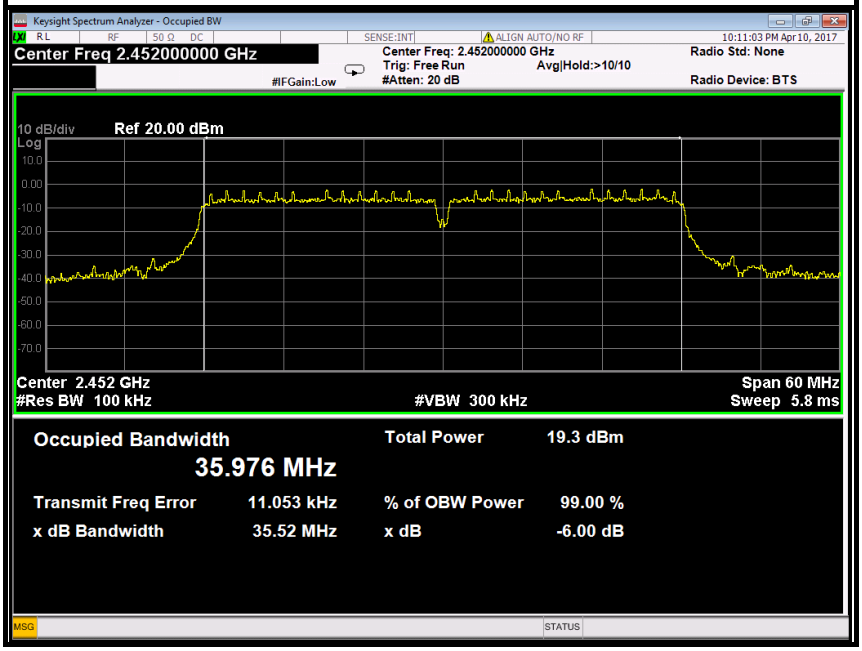

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.4. ANTENNA GAIN

MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

LIMITS

FCC	IC
Antenna Gain	
6 dBi	

TEST RESULTS

IEEE 802.11b mode

T_{nom}	V_{nom}	Lowest channel 2412MHz	Middle channel 2437MHz	Highest channel 2462MHz
Conducted power [dBm/MHz] Measured with DSSS modulation		3.13	3.03	2.73
Radiated power [dBm/MHz] Measured with DSSS modulation		5.87	5.94	5.27
ain [dBi] Calculated		2.74	2.91	2.54
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.5. PEAK OUTPUT POWER

7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.5.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2017	02/20/2018
Power Sensor	Anritsu	MA2411B	1126150	02/21/2017	02/20/2018

7.5.3. TEST PROCEDURES (please refer to measurement standard)

9.1.1 RBW ≥ *DTS bandwidth*

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.
a) Set the RBW ≥ *DTS bandwidth*.
b) Set VBW ≥ 3 RBW.
c) Set span ≥ 3 x RBW
d) Sweep time = auto couple.
e) Detector = peak.
f) Trace mode = max hold.
g) Allow trace to fully stabilize.
h) Use peak marker function to determine the peak amplitude level.

9.1.3 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

7.5.4. TEST SETUP

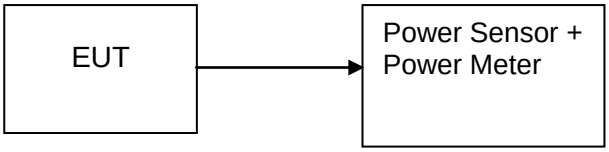

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.5.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	14.90	0.03090	Peak	1	PASS
Mid	2437	14.80	0.03020			PASS
High	2462	14.50	0.02818			PASS
Low	2412	12.60	0.01820	AVG	1	PASS
Mid	2437	12.40	0.01738			PASS
High	2462	12.10	0.01622			PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	20.70	0.11749	Peak	1	PASS
Mid	2437	21.00	0.12589			PASS
High	2462	21.00	0.12589			PASS
Low	2412	11.30	0.01349	AVG	1	PASS
Mid	2437	11.60	0.01445			PASS
High	2462	11.70	0.01479			PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	20.20	0.10471	Peak	1	PASS
Mid	2437	20.30	0.10715			PASS
High	2462	20.50	0.11220			PASS
Low	2412	11.50	0.01413	AVG	1	PASS
Mid	2437	11.60	0.01445			PASS
High	2462	11.80	0.01514			PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2422	20.50	0.11220	Peak	1	PASS
Mid	2437	20.80	0.12023			PASS
High	2452	20.90	0.12303			PASS
Low	2422	11.80	0.01514	AVG	1	PASS
Mid	2437	12.00	0.01585			PASS
High	2452	12.00	0.01585			PASS

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.6. BAND EDGES MEASUREMENT

7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.6.2. TEST INSTRUMENTS

Radiated Emission Test Site 966(2)					
Name of Equipment	**Manufacturer**	**Model Number**	**Serial Number**	**Last Calibration**	**Due Calibration**
PSA Series Spectrum Analyzer	Agilent	N9010A	MY55370330	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The FCC Site Registration number is 101879.

3. N.C.R = No Calibration Required.

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
   (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
   (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO / Detector=PEAK
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

7.6.4. TEST SETUP

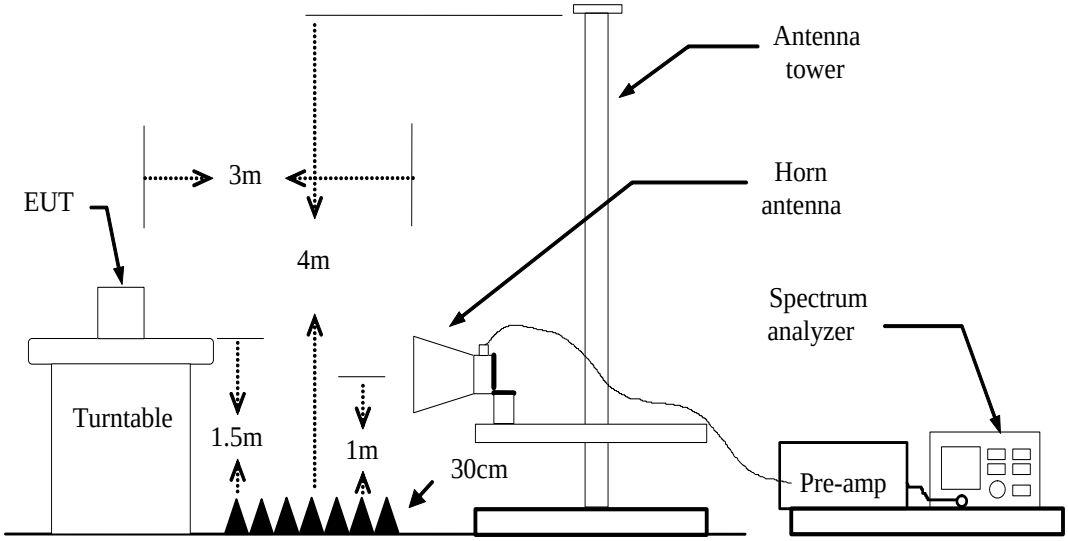

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.6.5. TEST RESULTS

Test Plot

IEEE 802.11b mode

Band Edges (CH Low)

Detector mode: Peak **Polarity: Vertical**

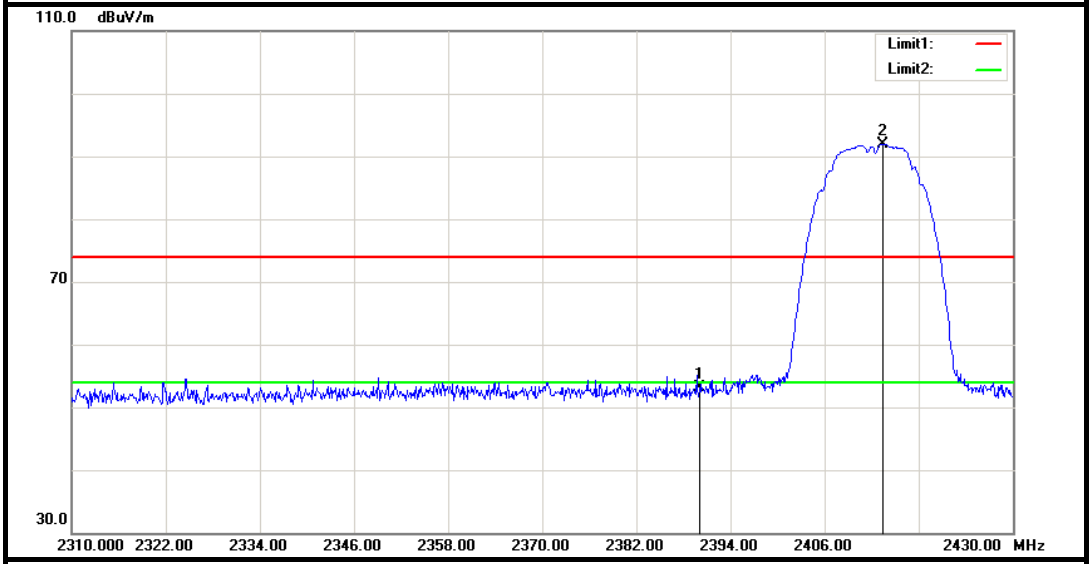

Detector mode: Average **Polarity: Vertical**

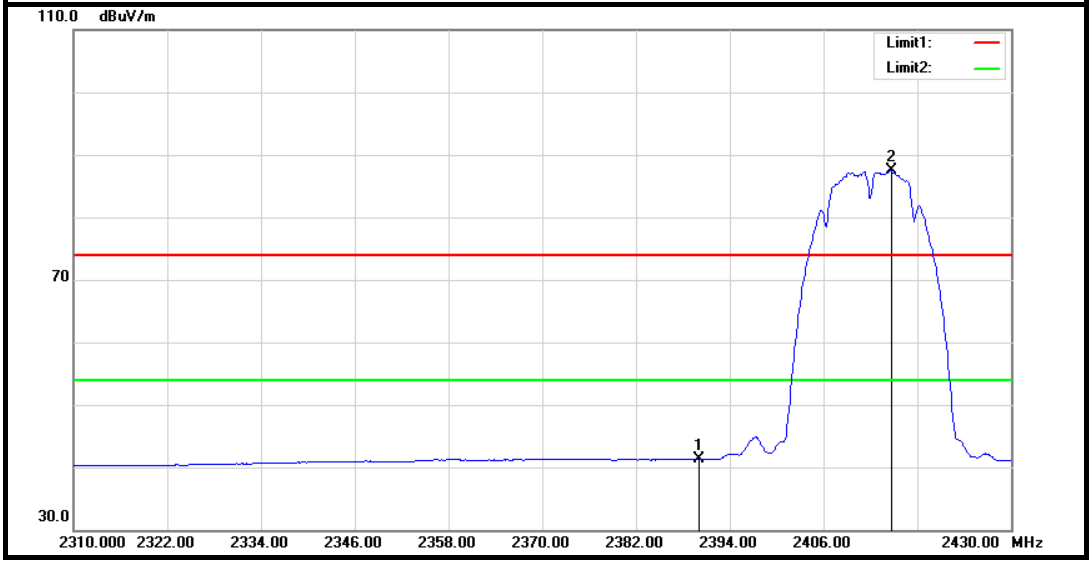

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	55.88	-2.86	53.02	74.00	-20.98	Peak	Vertical
2	2413.440	94.68	-2.73	91.95	---	---	Peak	Vertical
3	2390.000	44.24	-2.86	41.38	54.00	-12.62	Average	Vertical
4	2414.640	90.24	-2.73	87.51	---	---	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

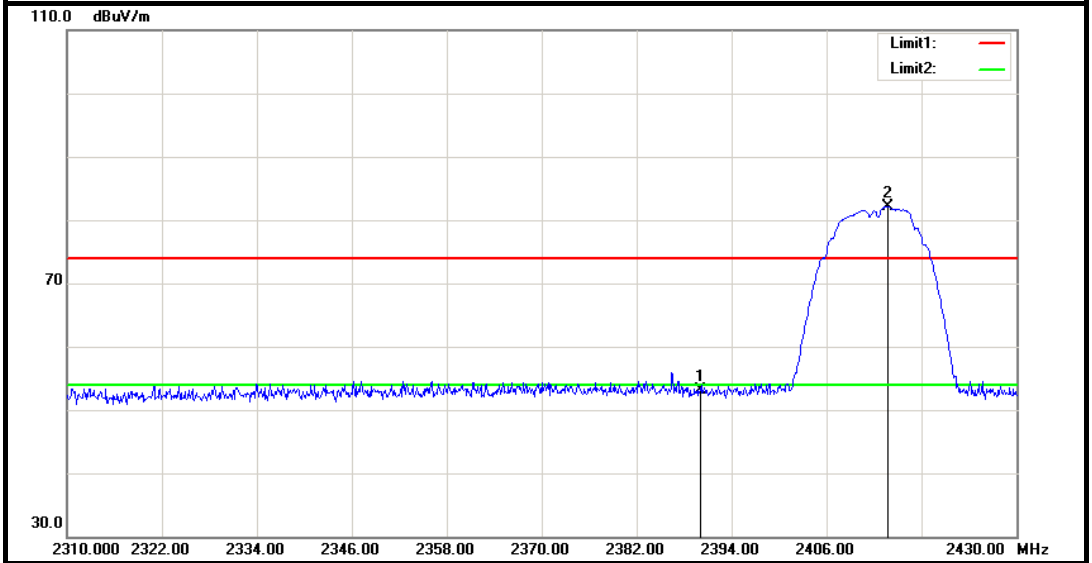

Detector mode: Average **Polarity: Horizontal**

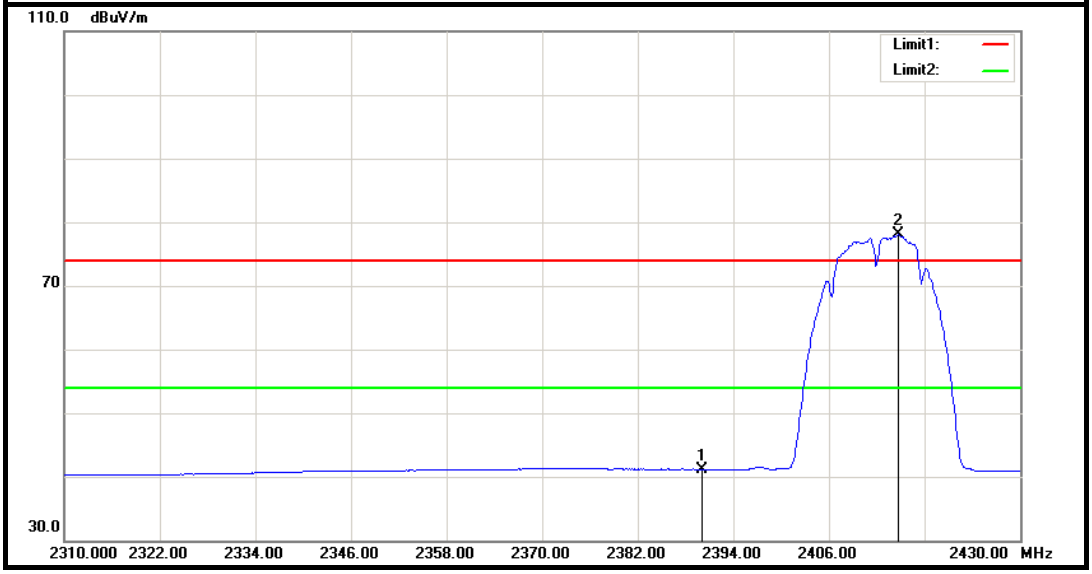

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	56.04	-2.86	53.18	74.00	-20.82	Peak	Horizontal
2	2413.680	84.81	-2.73	82.08	---	---	Peak	Horizontal
3	2390.000	44.00	-2.86	41.14	54.00	-12.86	Average	Horizontal
4	2414.640	80.78	-2.73	78.05	---	---	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Band Edges (CH High)

Detector mode: Peak **Polarity: Vertical**

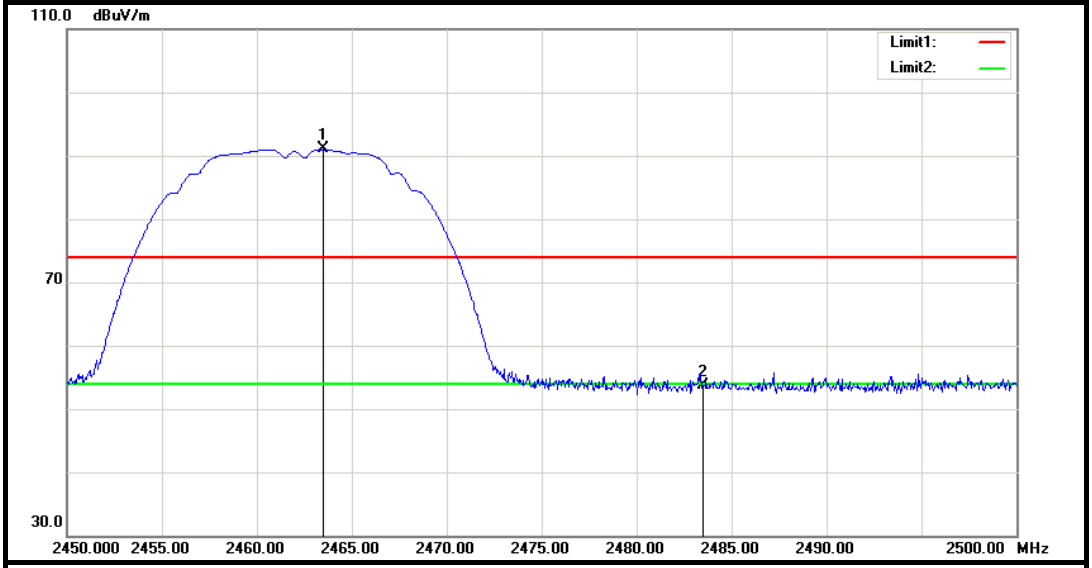

Detector mode: Average **Polarity: Vertical**

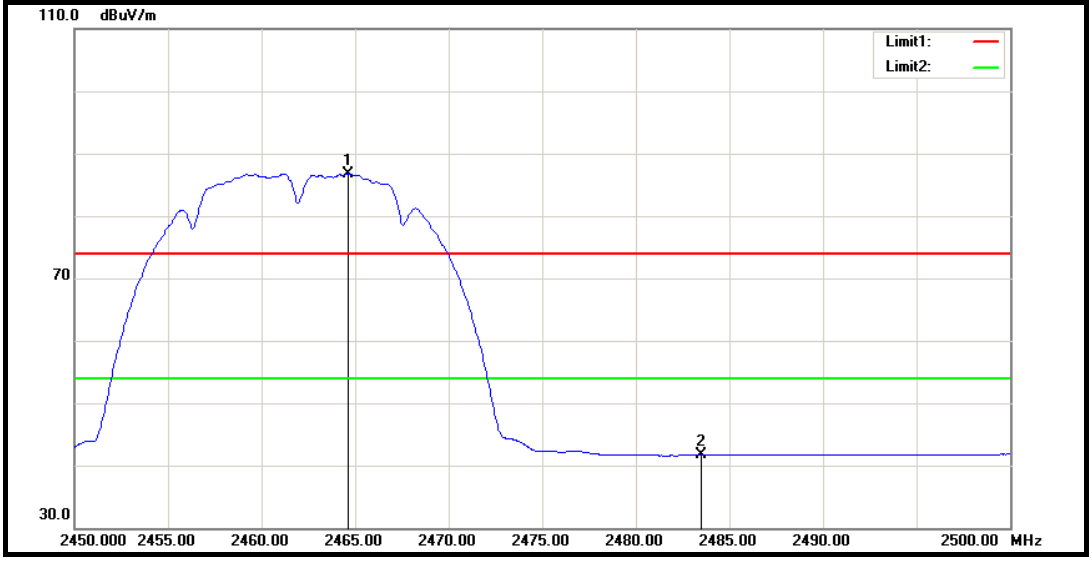

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2463.500	93.48	-2.46	91.02	---	---	Peak	Vertical
2	2483.500	56.05	-2.35	53.70	74.00	-20.30	Peak	Vertical
3	2464.650	89.25	-2.45	86.80	---	---	Average	Vertical
4	2483.500	44.12	-2.35	41.77	54.00	-12.23	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

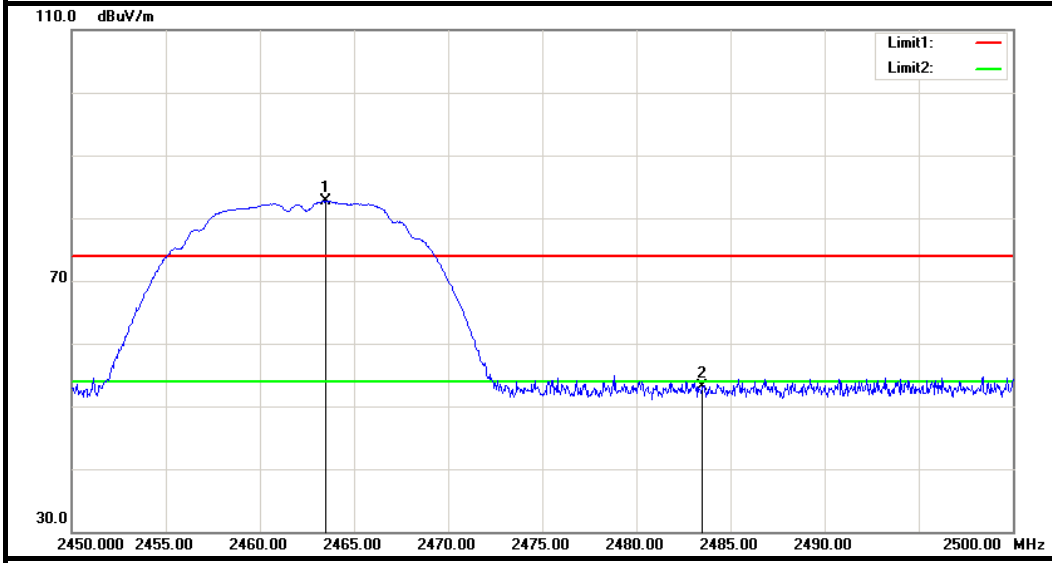

Detector mode: Average **Polarity: Horizontal**

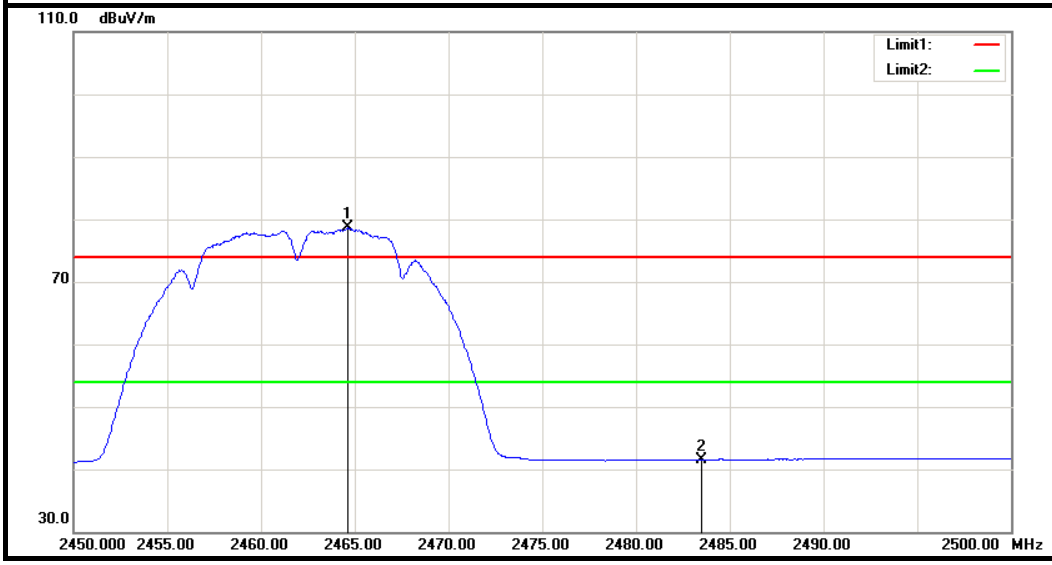

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2463.500	85.19	-2.46	82.73	---	---	Peak	Horizontal
2	2483.500	55.40	-2.35	53.05	74.00	-20.95	Peak	Horizontal
3	2464.650	81.06	-2.45	78.61	---	---	Average	Horizontal
4	2483.500	43.86	-2.35	41.51	54.00	-12.49	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11g mode
Band Edges (CH Low)

Detector mode: Peak **Polarity: Vertical**

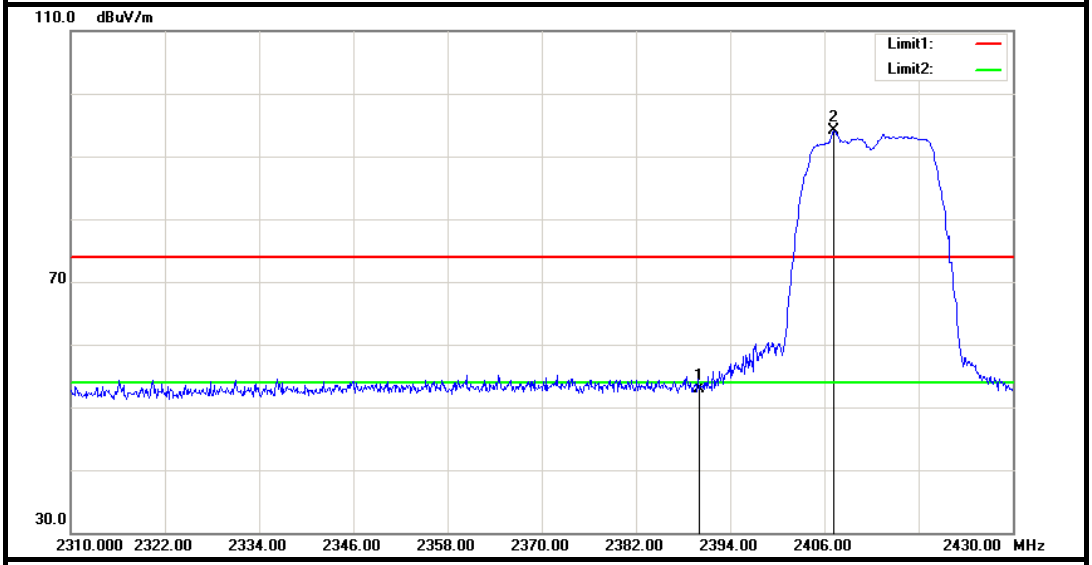

Detector mode: Average **Polarity: Vertical**

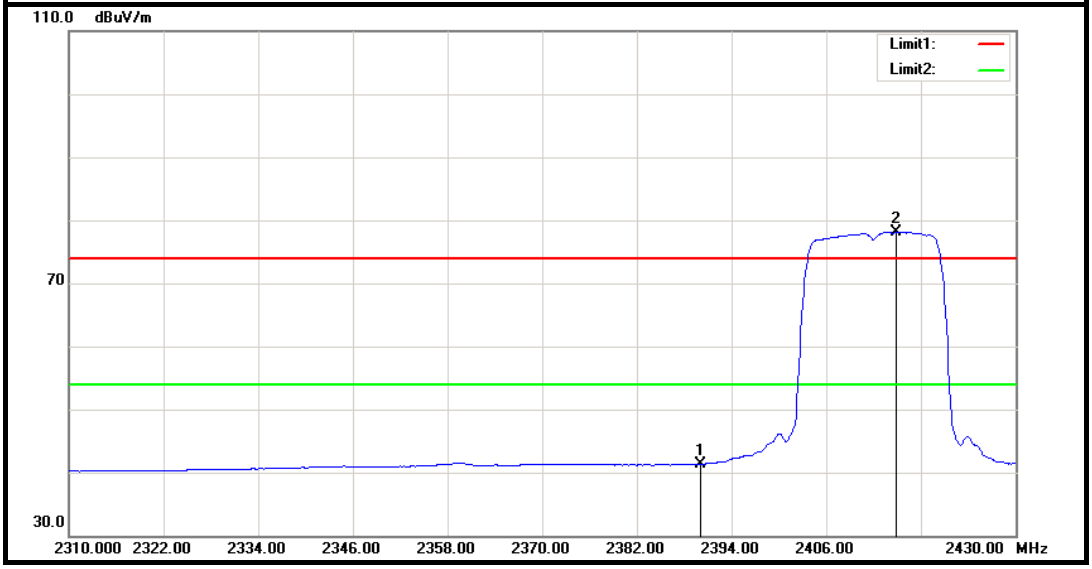

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	55.69	-2.86	52.83	74.00	-21.17	Peak	Vertical
2	2407.200	96.86	-2.77	94.09	---	---	Peak	Vertical
3	2390.000	44.21	-2.86	41.35	54.00	-12.65	Average	Vertical
4	2414.880	80.83	-2.73	78.10	---	---	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

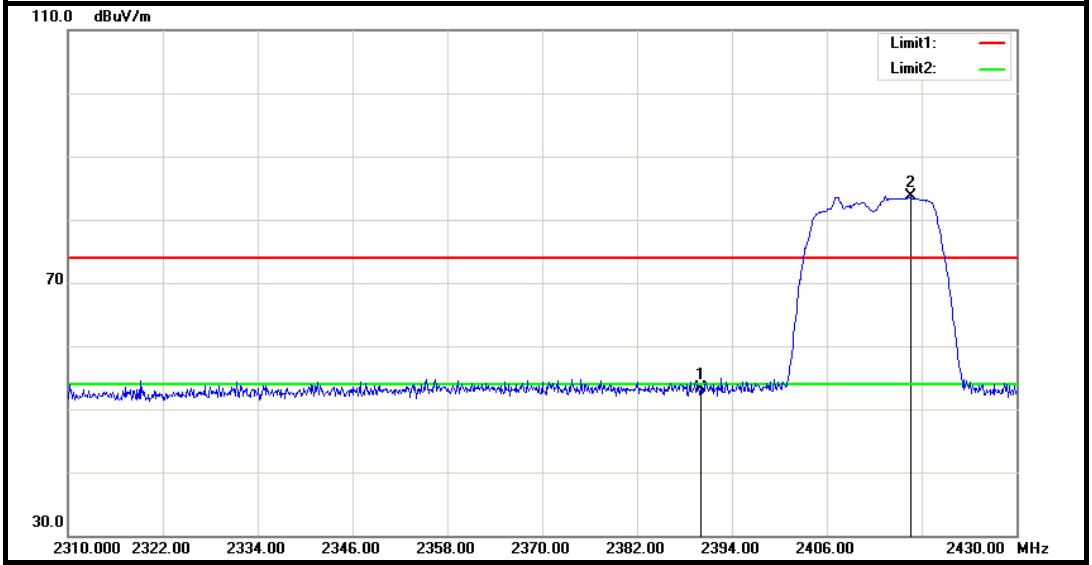

Detector mode: Average **Polarity: Horizontal**

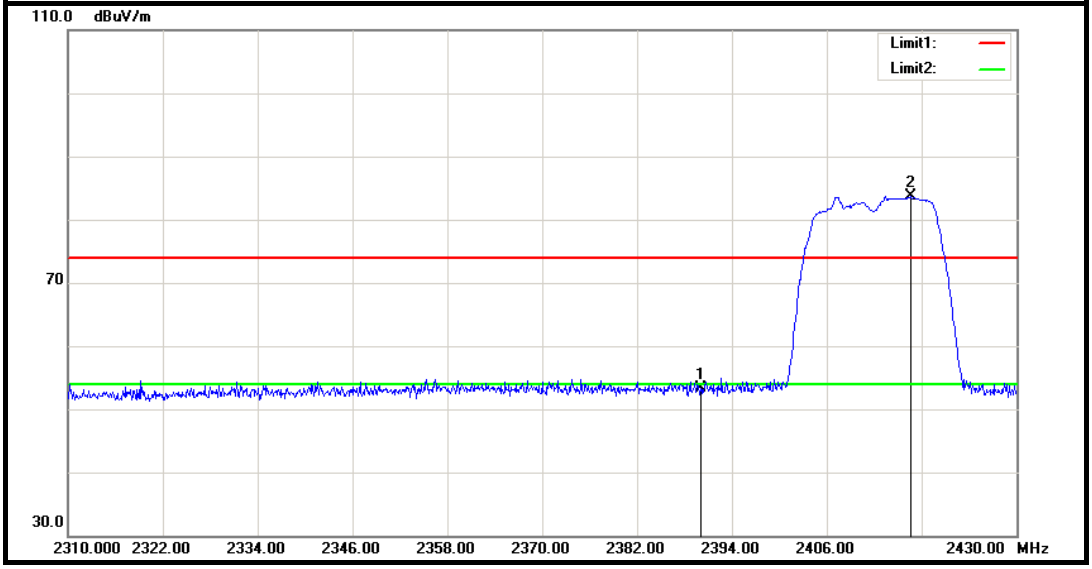

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	56.10	-2.86	53.24	74.00	-20.76	Peak	Horizontal
2	2416.560	86.46	-2.72	83.74	---	---	Peak	Horizontal
3	2390.000	43.95	-2.86	41.09	54.00	-12.91	Average	Horizontal
4	2415.120	72.31	-2.73	69.58	---	---	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Band Edges (CH High)

Detector mode: Peak **Polarity: Vertical**

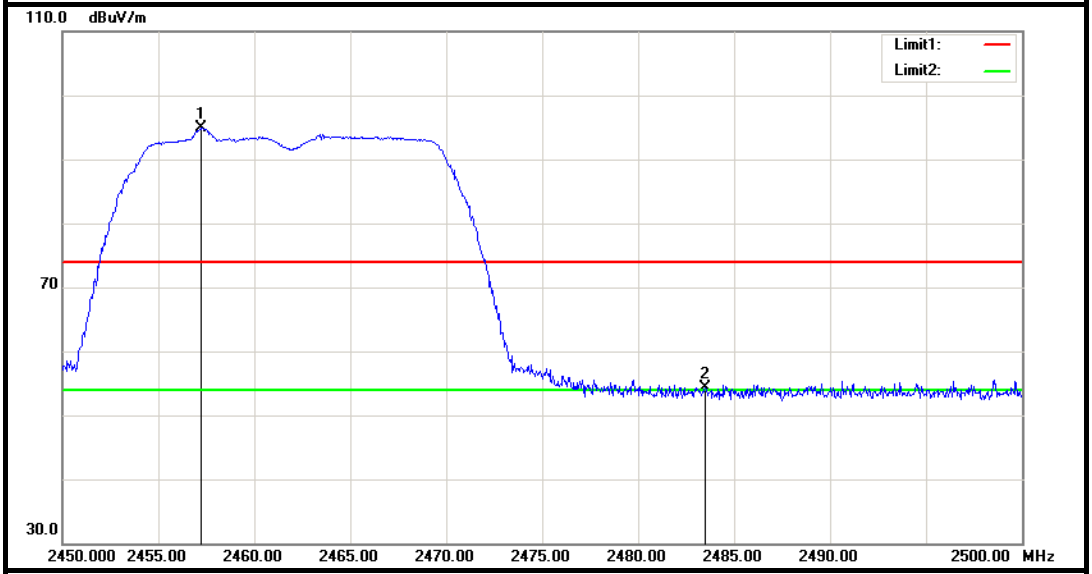

Detector mode: Average **Polarity: Vertical**

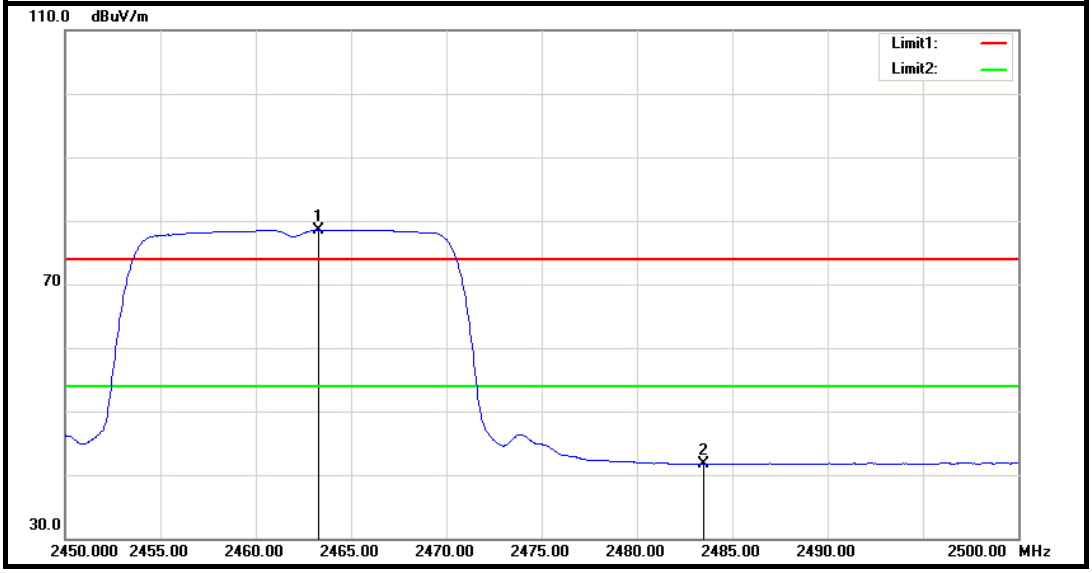

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2457.250	97.37	-2.49	94.88	---	---	Peak	Vertical
2	2483.500	56.71	-2.35	54.36	74.00	-19.64	Peak	Vertical
3	2463.300	81.04	-2.46	78.58	---	---	Average	Vertical
4	2483.500	44.06	-2.35	41.71	54.00	-12.29	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

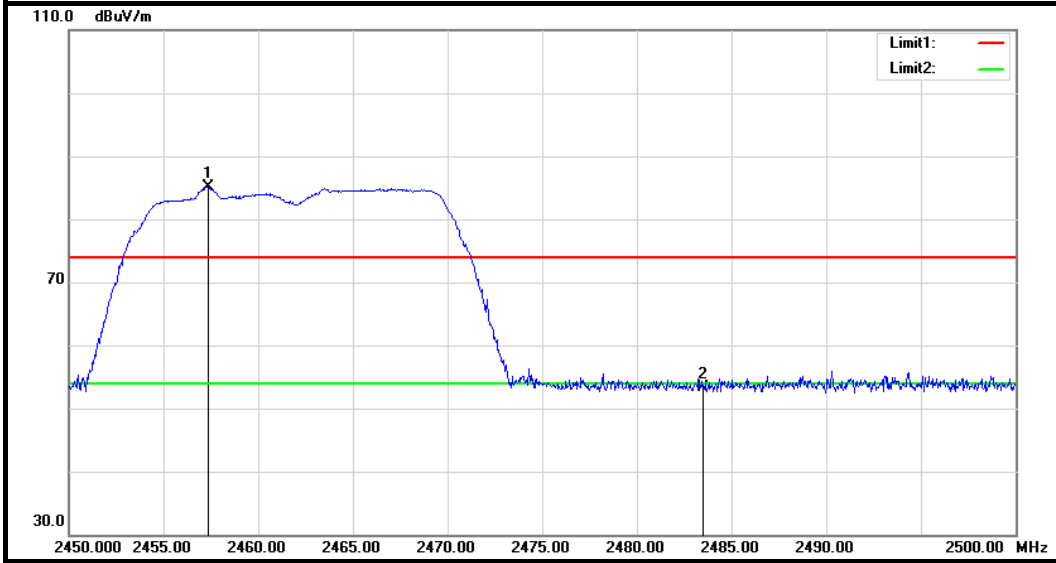

Detector mode: Average **Polarity: Horizontal**

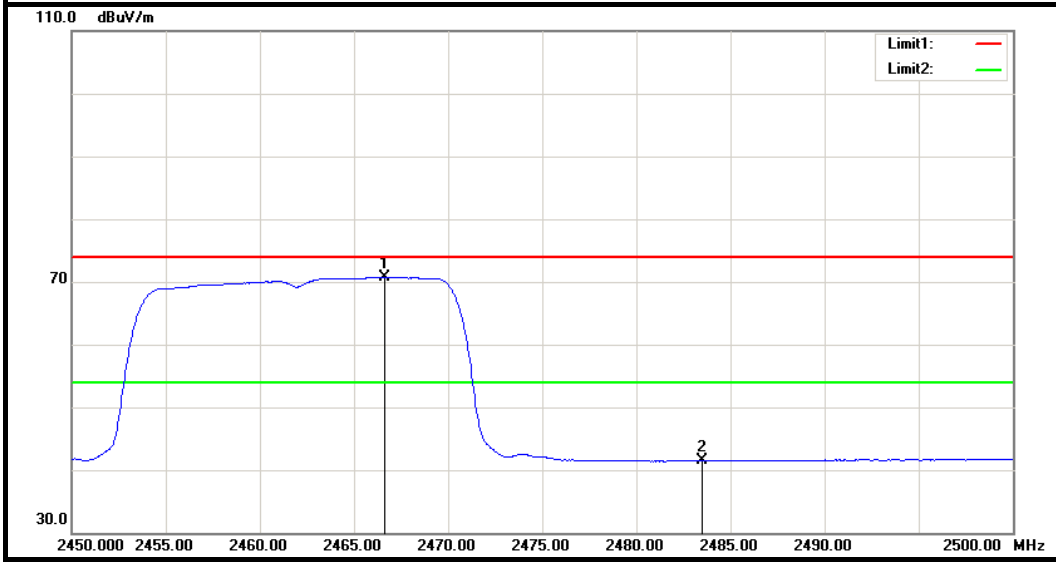

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2457.350	87.63	-2.49	85.14	---	---	Peak	Horizontal
2	2483.500	55.70	-2.35	53.35	74.00	-20.65	Peak	Horizontal
3	2466.650	73.14	-2.44	70.70	---	---	Average	Horizontal
4	2483.500	43.82	-2.35	41.47	54.00	-12.53	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT20 MHz mode
Band Edges (CH Low)

Detector mode: Peak **Polarity: Vertical**

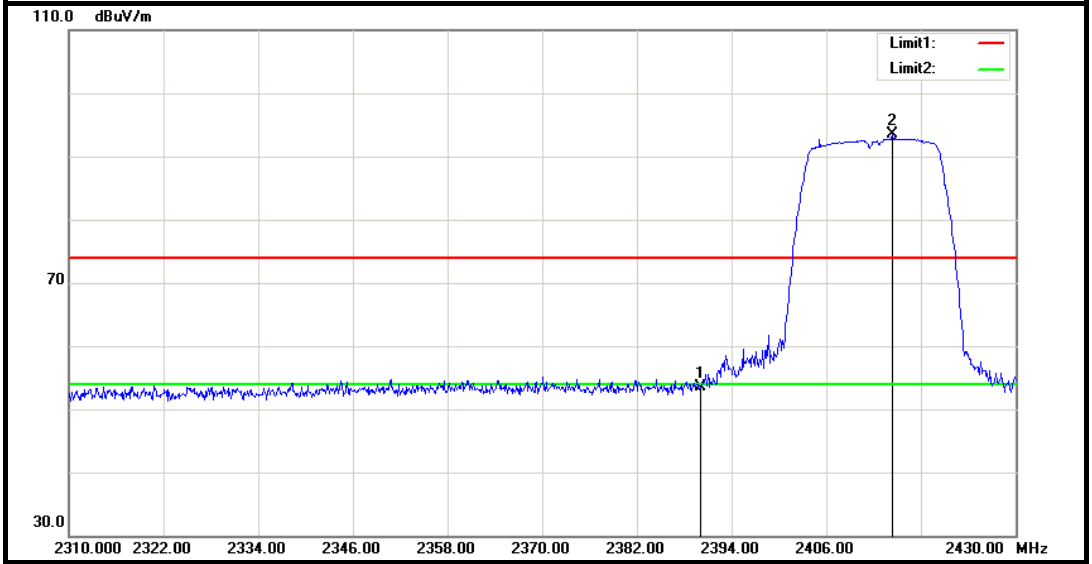

Detector mode: Average **Polarity: Vertical**

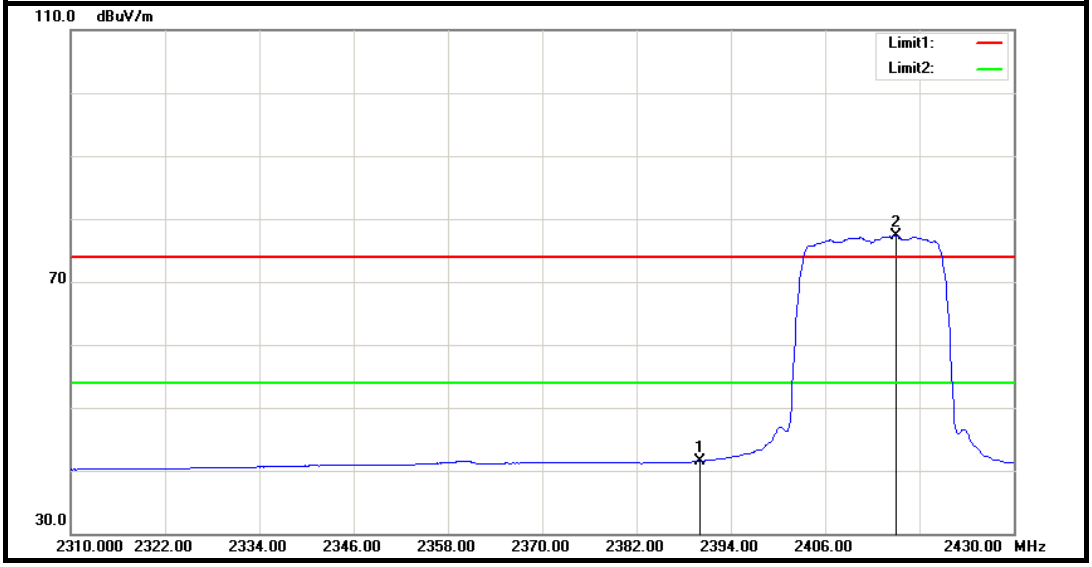

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	56.42	-2.86	53.56	74.00	-20.44	Peak	Vertical
2	2414.400	96.27	-2.73	93.54	---	---	Peak	Vertical
3	2390.000	44.35	-2.86	41.49	54.00	-12.51	Average	Vertical
4	2415.000	80.02	-2.73	77.29	---	---	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

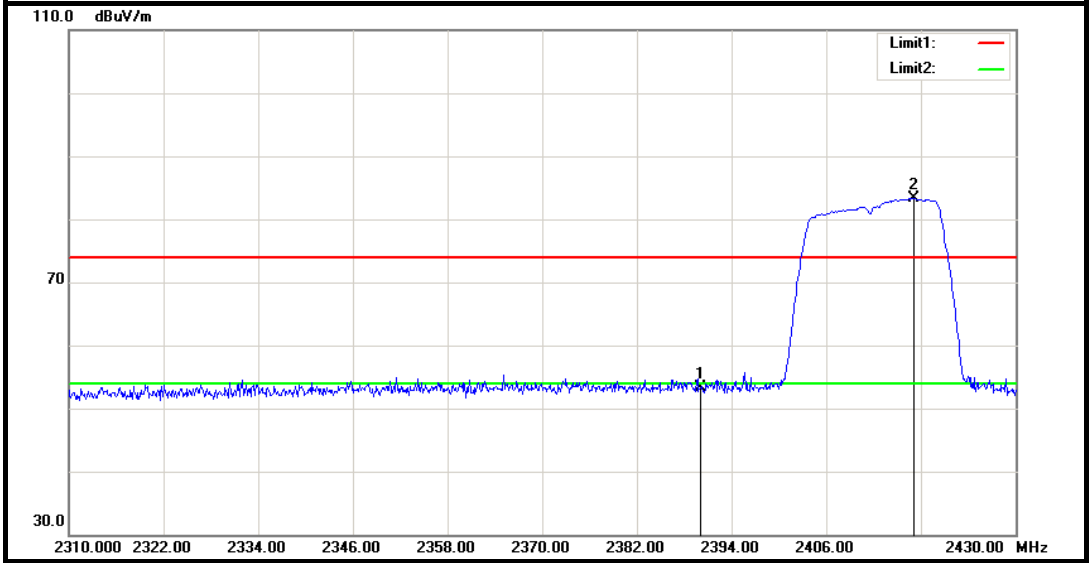

Detector mode: Average **Polarity: Horizontal**

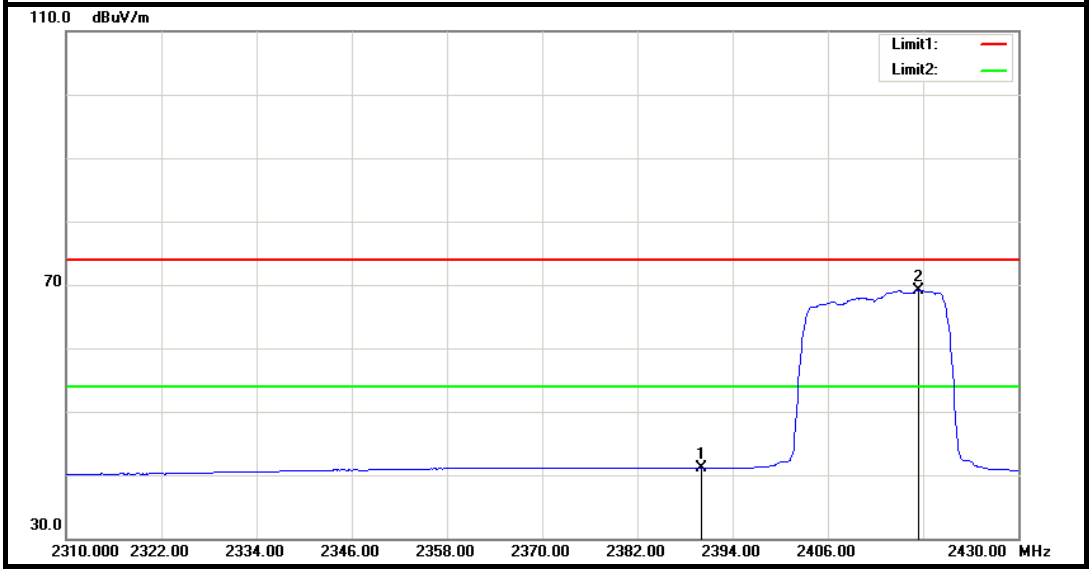

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	56.19	-2.86	53.33	74.00	-20.67	Peak	Horizontal
2	2417.160	86.01	-2.71	83.30	---	---	Peak	Horizontal
3	2390.000	43.93	-2.86	41.07	54.00	-12.93	Average	Horizontal
4	2417.400	71.88	-2.71	69.17	---	---	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Band Edges (CH High)

Detector mode: Peak **Polarity: Vertical**

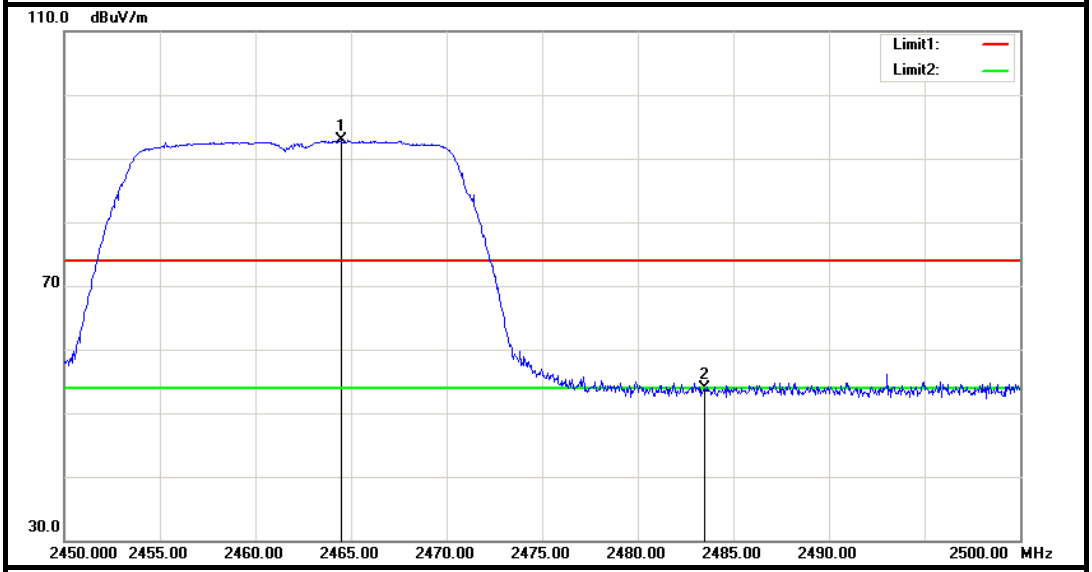

Detector mode: Average **Polarity: Vertical**

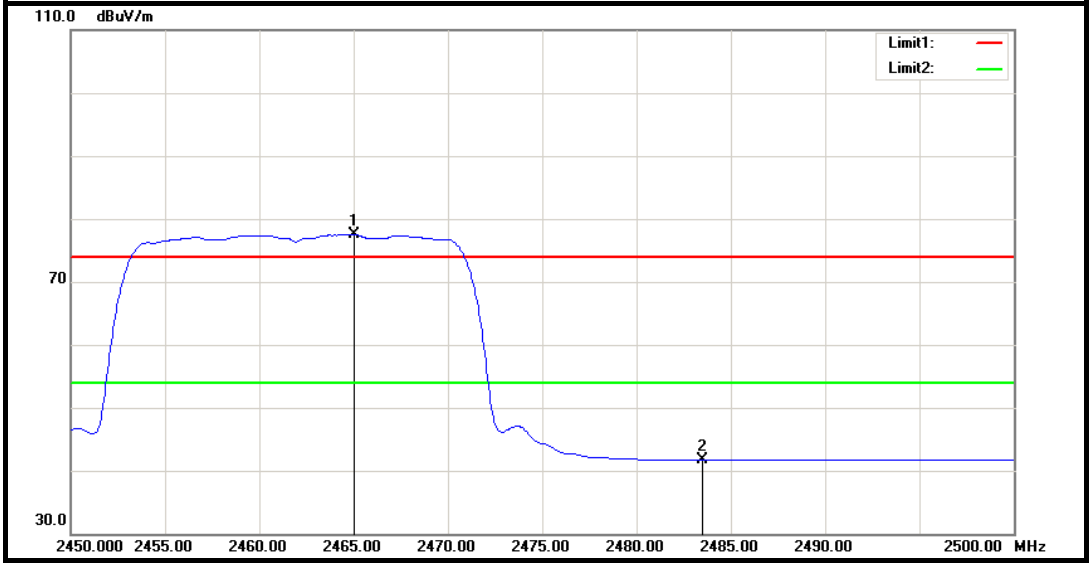

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2464.500	95.40	-2.45	92.95	---	---	Peak	Vertical
2	2483.500	56.31	-2.35	53.96	74.00	-20.04	Peak	Vertical
3	2465.050	79.95	-2.45	77.50	---	---	Average	Vertical
4	2483.500	44.00	-2.35	41.65	54.00	-12.35	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

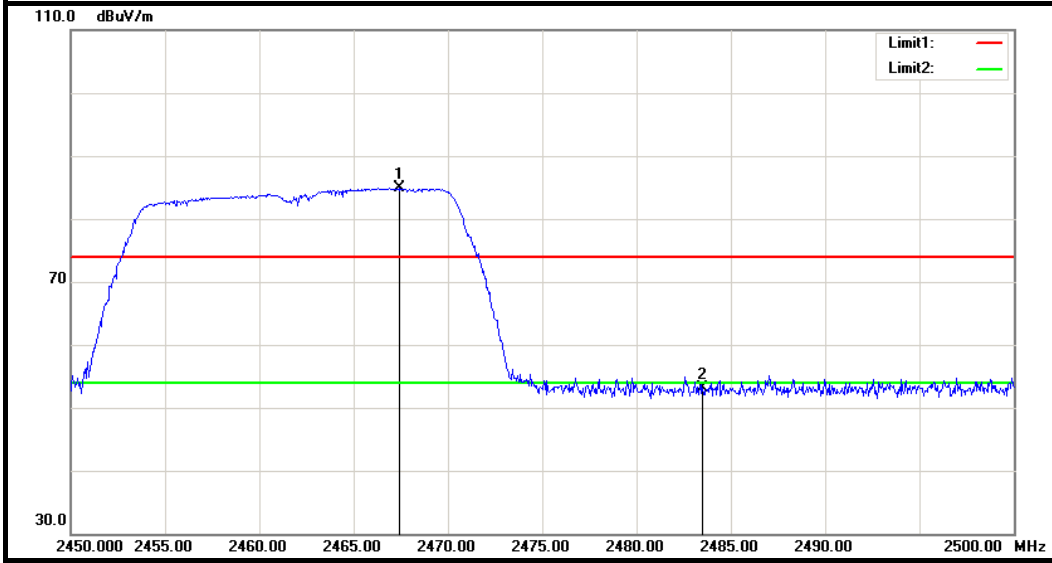

Detector mode: Average **Polarity: Horizontal**

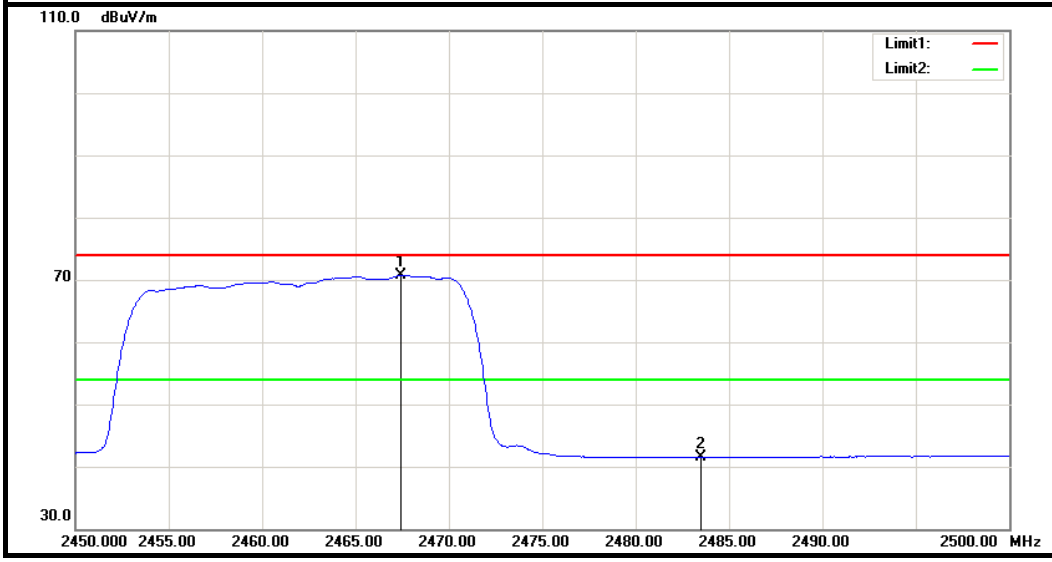

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2467.450	87.38	-2.44	84.94	---	---	Peak	Horizontal
2	2483.500	55.47	-2.35	53.12	74.00	-20.88	Peak	Horizontal
3	2467.450	73.13	-2.44	70.69	---	---	Average	Horizontal
4	2483.500	43.84	-2.35	41.49	54.00	-12.51	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT40 MHz mode
Band Edges (CH Low)

Detector mode: Peak **Polarity: Vertical**

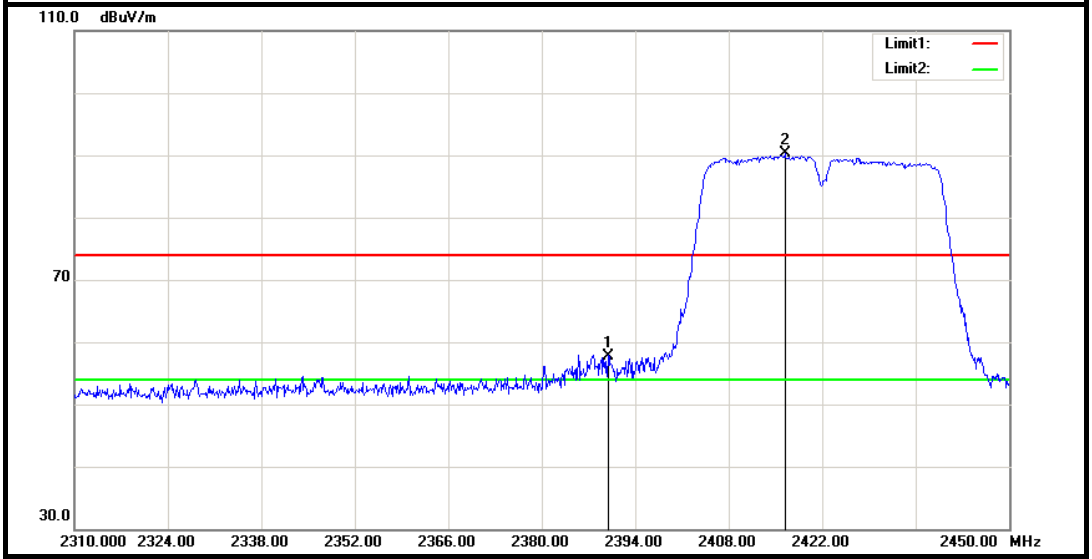

Detector mode: Average **Polarity: Vertical**

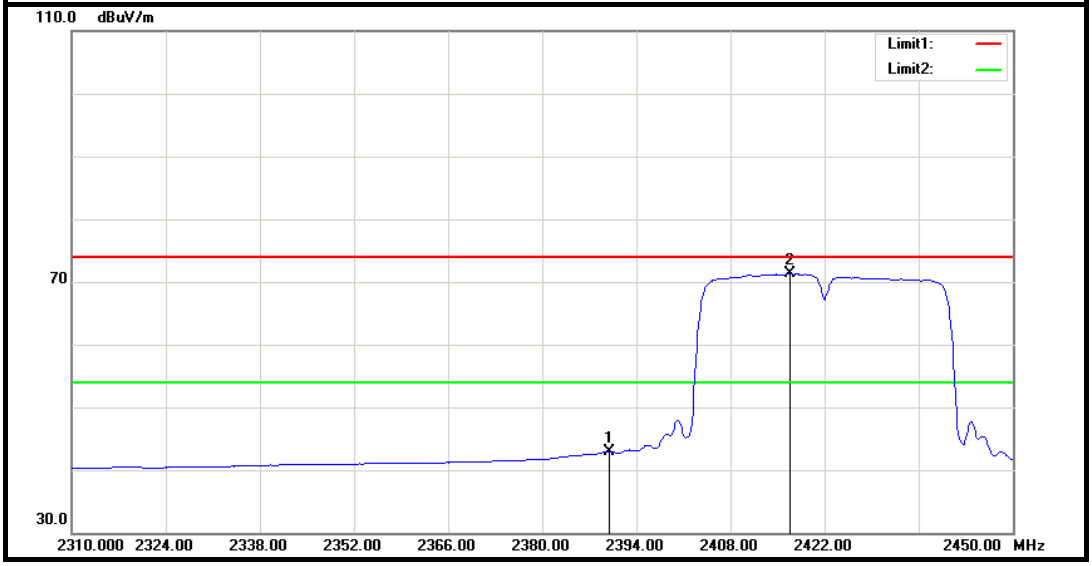

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	60.52	-2.86	57.66	74.00	-16.34	Peak	Vertical
2	2416.400	92.94	-2.72	90.22	---	---	Peak	Vertical
3	2390.000	45.79	-2.86	42.93	54.00	-11.07	Average	Vertical
4	2416.820	73.99	-2.72	71.27	---	---	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

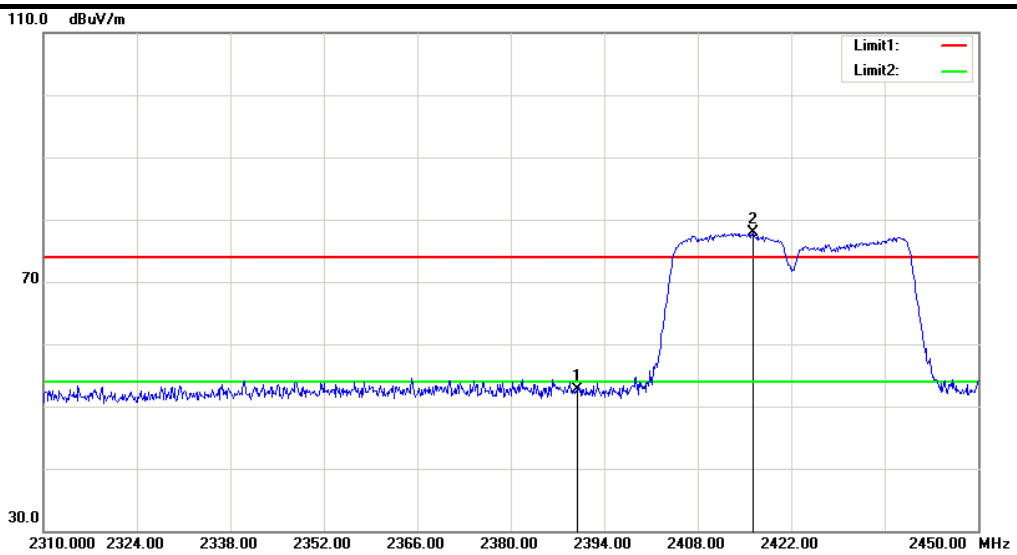

Detector mode: Average **Polarity: Horizontal**

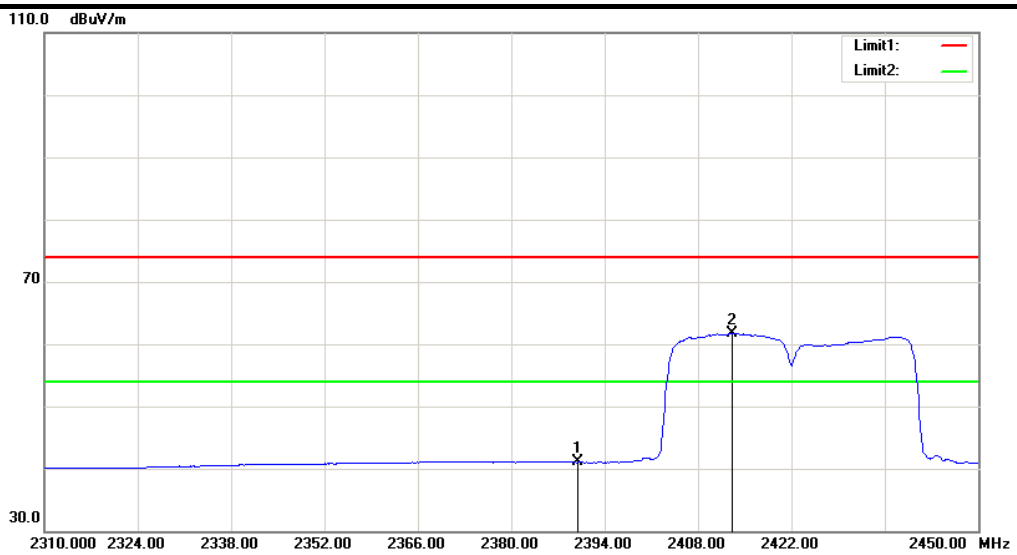

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2390.000	55.59	-2.86	52.73	74.00	-21.27	Peak	Horizontal
2	2416.260	80.53	-2.72	77.81	---	---	Peak	Horizontal
3	2390.000	43.88	-2.86	41.02	54.00	-12.98	Average	Horizontal
4	2413.180	64.45	-2.74	61.71	---	---	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Band Edges (CH High)

Detector mode: Peak **Polarity: Vertical**

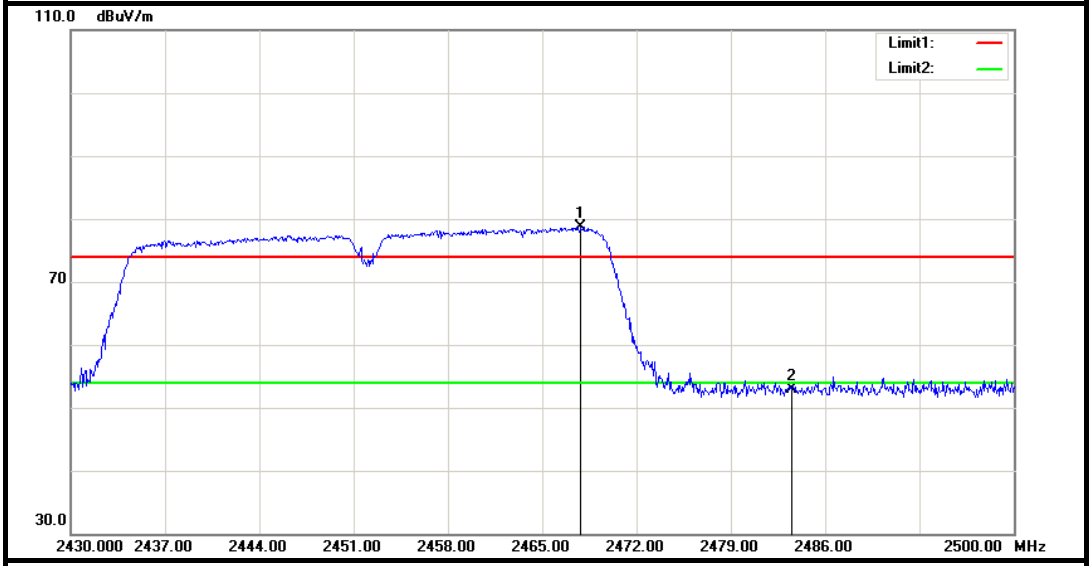

Detector mode: Average **Polarity: Vertical**

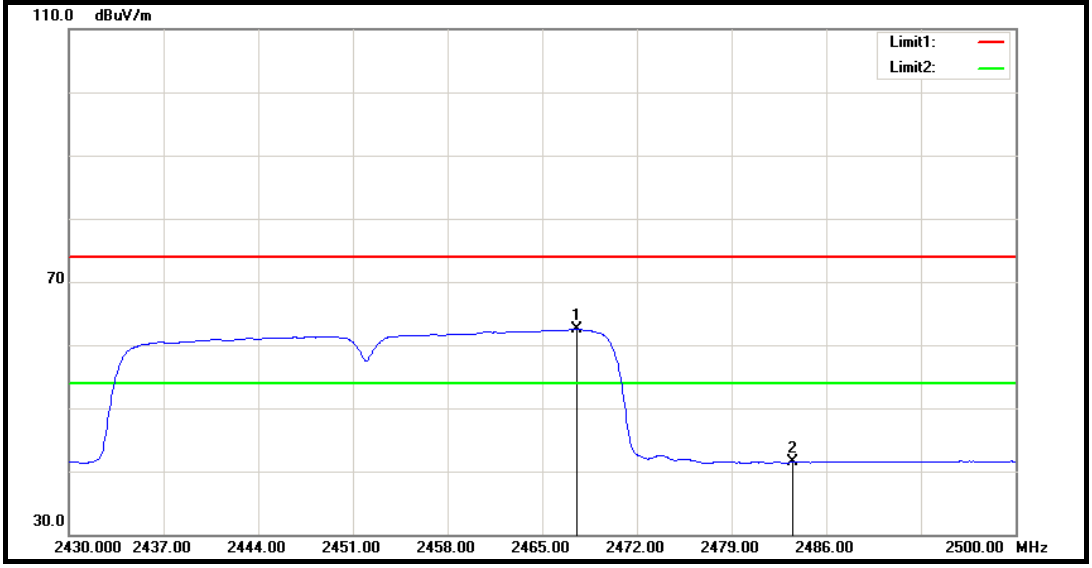

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2467.870	81.12	-2.44	78.68	---	---	Peak	Vertical
2	2483.500	55.21	-2.35	52.86	74.00	-21.14	Peak	Vertical
3	2467.520	64.92	-2.44	62.48	---	---	Average	Vertical
4	2483.500	43.78	-2.35	41.43	54.00	-12.57	Average	Vertical

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Detector mode: Peak **Polarity: Horizontal**

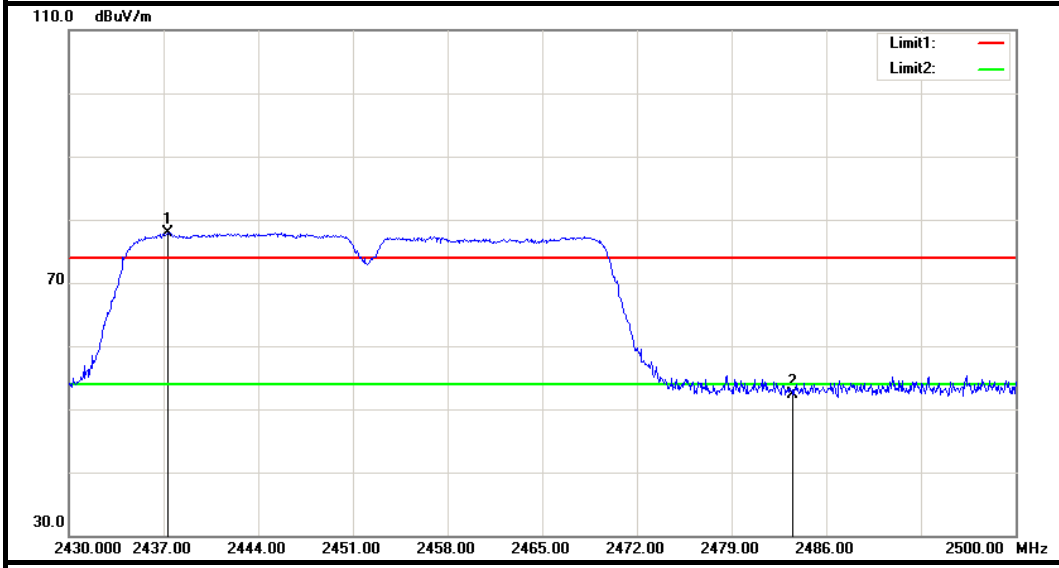

Detector mode: Average **Polarity: Horizontal**

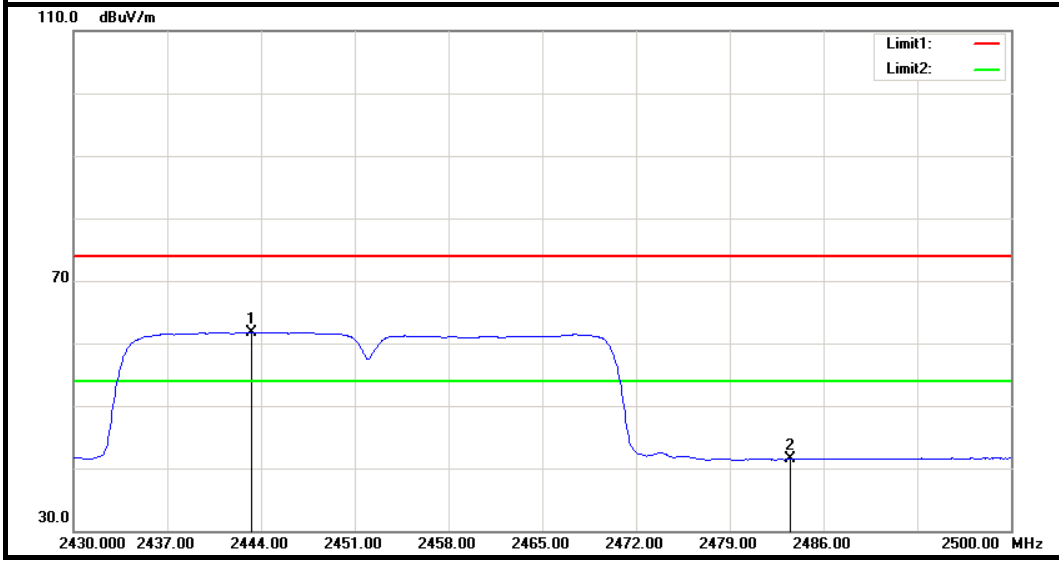

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	2437.350	80.50	-2.60	77.90	---	---	Peak	Horizontal
2	2483.500	54.73	-2.35	52.38	74.00	-21.62	Peak	Horizontal
3	2443.300	64.37	-2.57	61.80	---	---	Average	Horizontal
4	2483.500	43.79	-2.35	41.44	54.00	-12.56	Average	Horizontal

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

7.7.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e)specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e.,if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

7.7.4. TEST SETUP

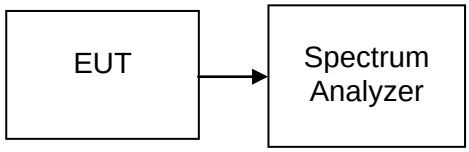

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

7.7.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-13.145	8	PASS
Mid	2437	1.969		PASS
High	2462	1.401		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-15.304	8	PASS
Mid	2437	-15.982		PASS
High	2462	-16.424		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-15.349	8	PASS
Mid	2437	-16.381		PASS
High	2462	-15.925		PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2422	-17.878	8	PASS
Mid	2437	-18.960		PASS
High	2452	-13.145		PASS

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

Test Plot

IEEE 802.11b mode

PPSD (CH Low)

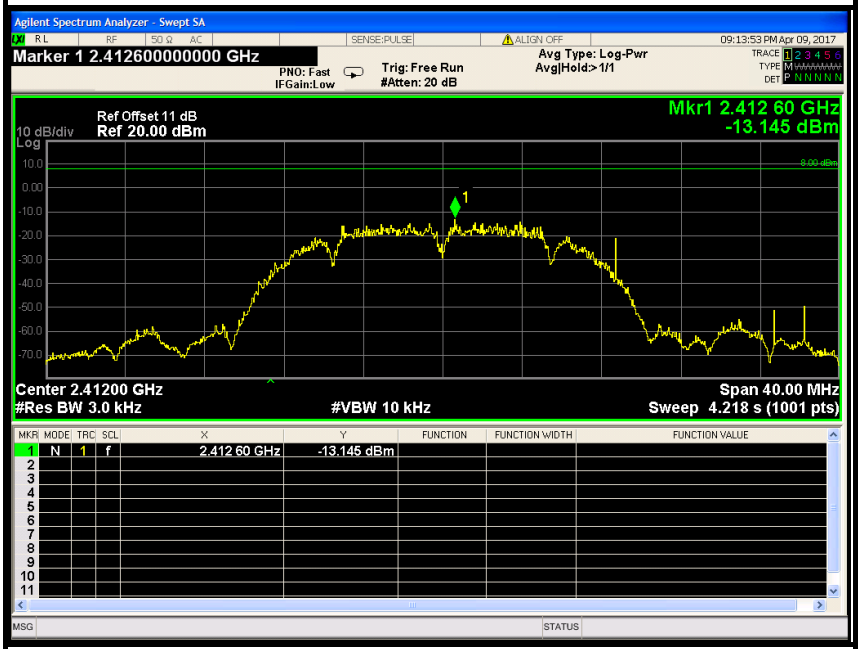

PPSD (CH Mid)

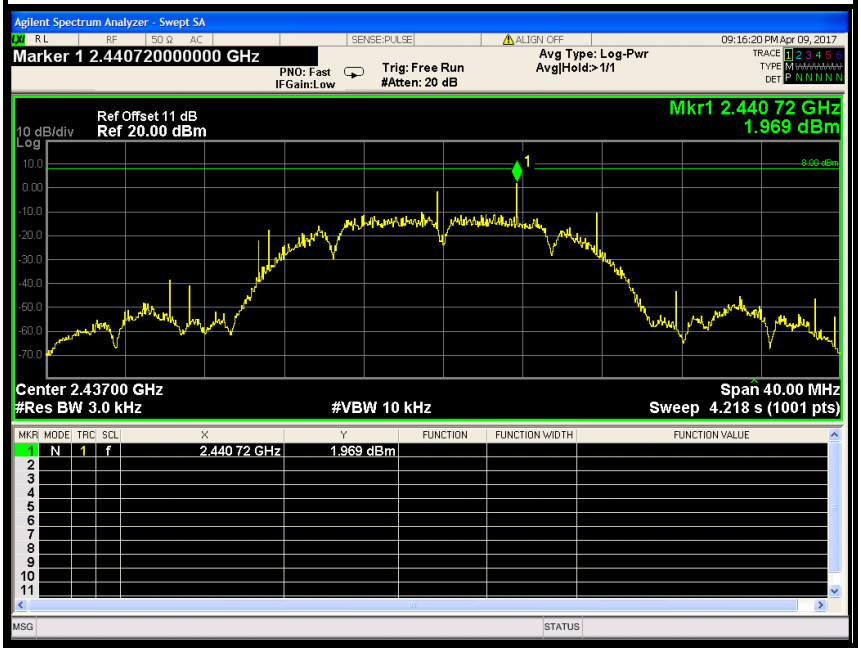

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

PPSD (CH High)

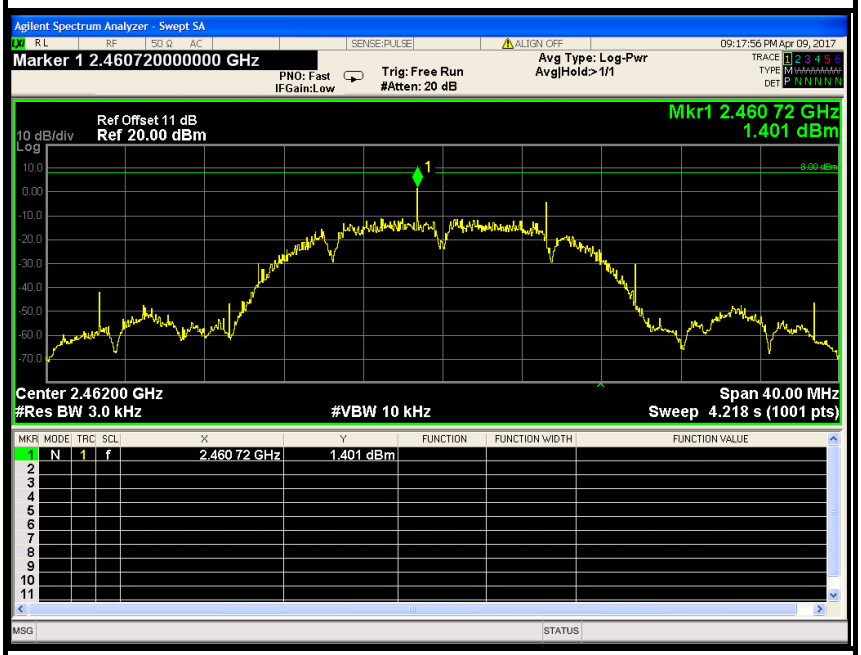

IEEE 802.11g mode

PPSD (CH Low)

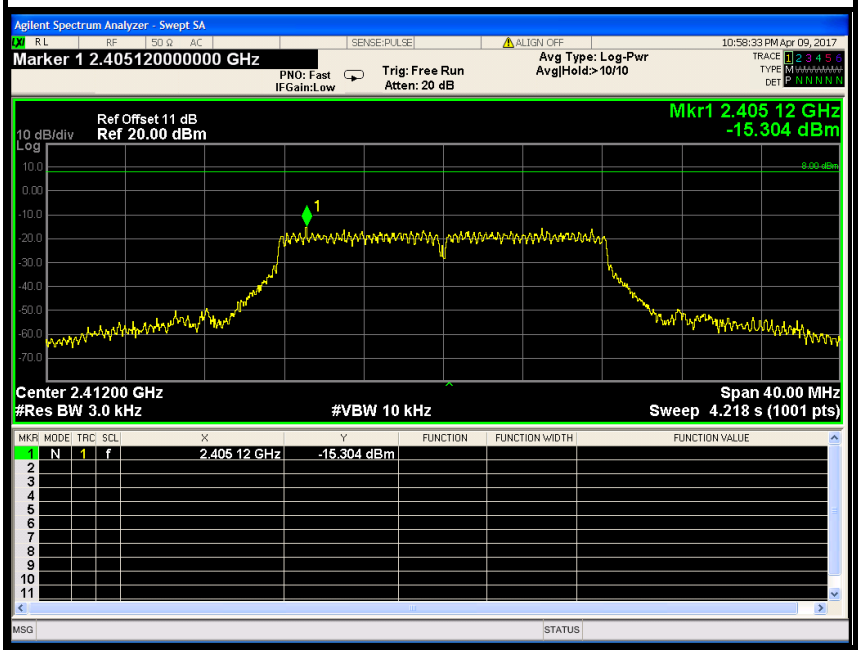

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

PPSD (CH Mid)

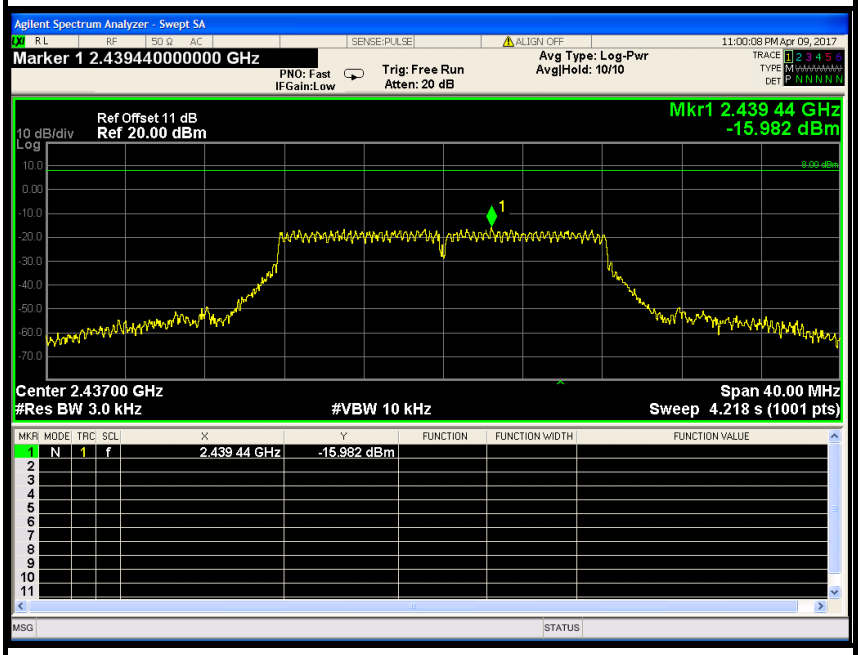

PPSD (CH High)

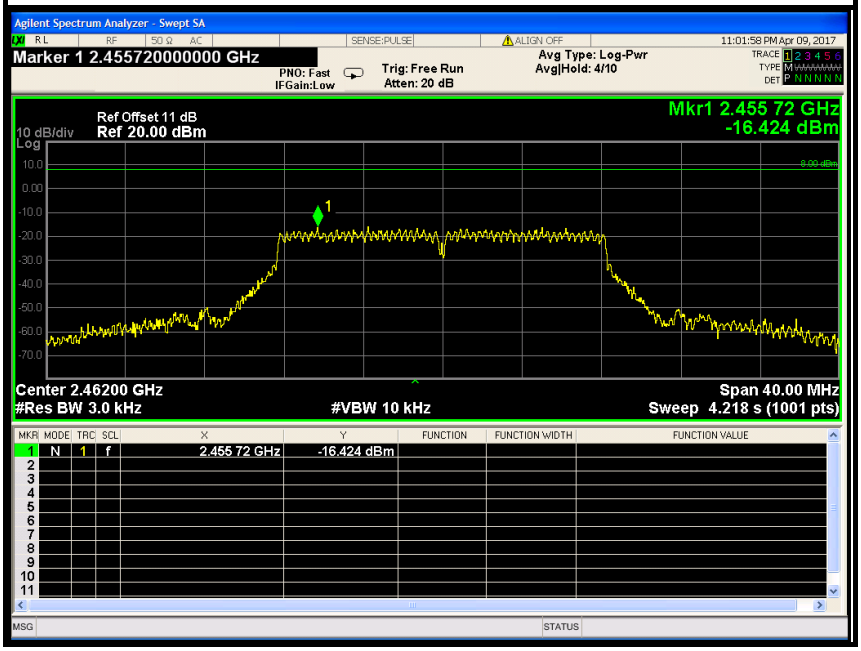

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

IEEE 802.11n HT20 MHz mode

PPSD (CH Low)

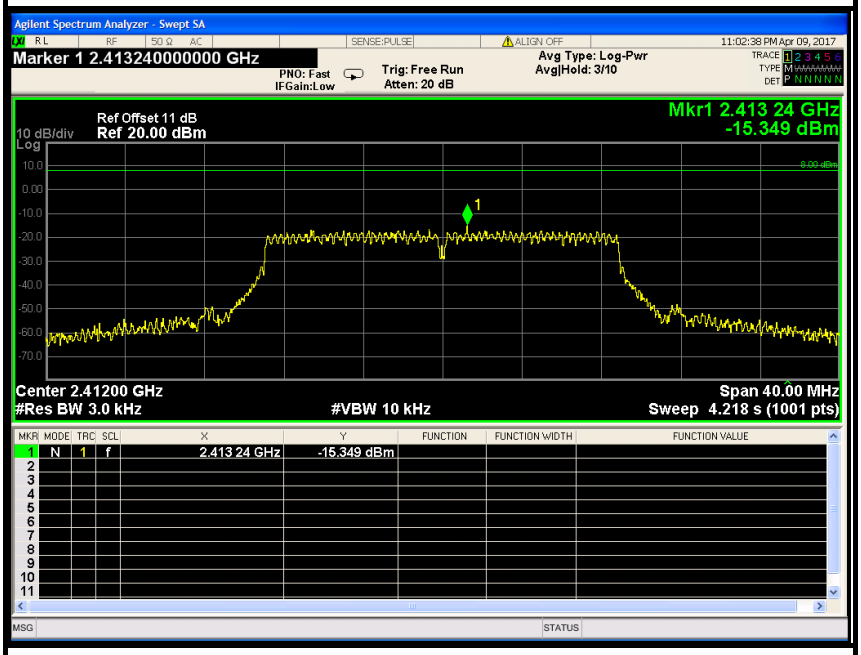

PPSD (CH Mid)

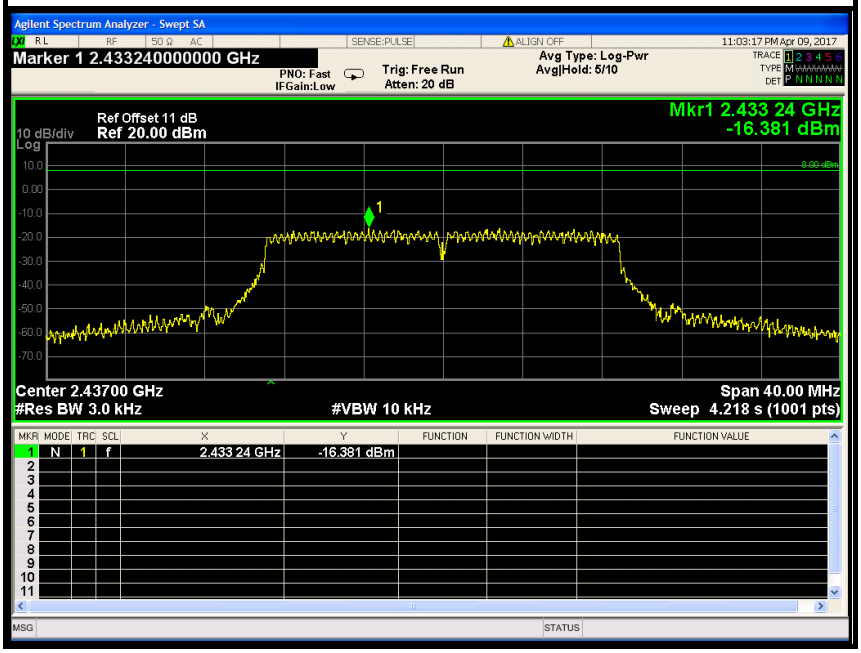

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

PPSD (CH High)

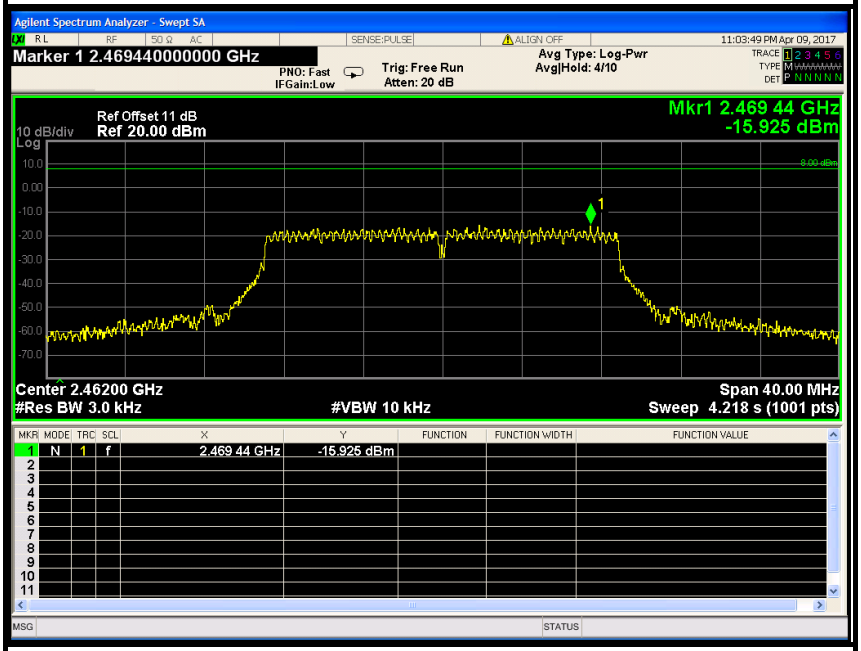

IEEE 802.11n HT40 MHz mode

PPSD (CH Low)

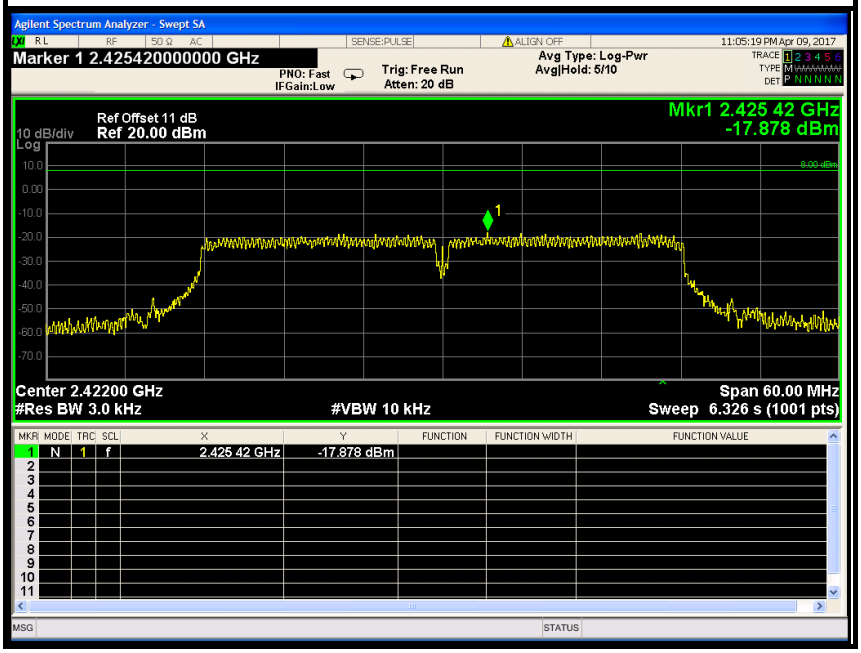

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

PPSD (CH Mid)

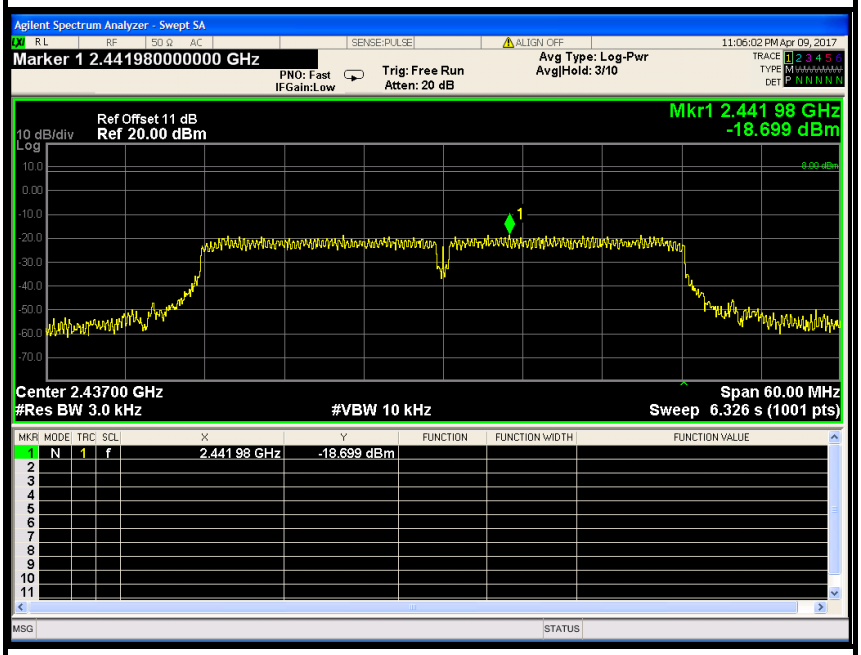

PPSD (CH High)

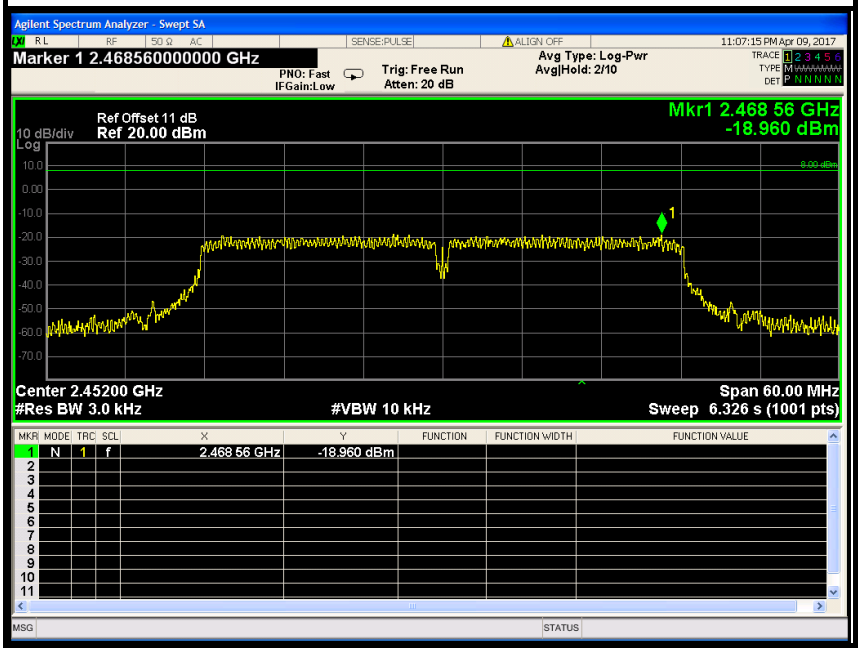

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.