



Test Report – FCC_1.1310 RF Exposure

Applicant: Vanguard Protex Global Inc.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 5/25/2022

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.	CUSTOMER INFORMATION.....	3
1.1	TEST RESULT SUMMARY	3
2.	LOCATION OF TESTING	3
2.1	TEST LABORATORY	3
2.2	TESTING WAS PERFORMED, REVIEWED BY	4
3.	TEST SAMPLE(S) (EUT/DUT).....	5
3.1	DESCRIPTION OF THE EUT.....	5
3.2	CONFIGURATION OF EUT	5
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	6
4.1	TEST METHODS/STANDARDS/GUIDANCE	6
4.1.1	<i>Limits for Maximum Permissible Exposure (MPE)</i>	6
4.2	TEST EQUIPMENT LIST	7
4.3	EQUATIONS.....	8
5.	RF EXPOSURE.....	9
5.1	NEAR FIELD MEASUREMENT	9
5.1.1	<i>0.001 – 400 kHz, Configuration 1, E-Field</i>	10
5.1.2	<i>0.001 – 400 kHz, Configuration 1, H-Field</i>	11
5.1.3	<i>0.001 – 400 kHz, Configuration 1, B-Field</i>	12
6.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	13
7.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	13
8.	HISTORY OF TEST REPORT CHANGES	13



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

1. Customer Information

Applicant: Vanguard Protex Global Inc.
Address: 720 Brooker Creek Blvd. Suite 223
Oldsmar Florida, 34677, United States

1.1 Test Result Summary

The following test procedure was used FCC 1.1310. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Clauses	Description of the Requirements	Result (Pass, Fail or N/A)
FCC 1.1310	Limits for Maximum Permissible Exposure (MPE)	Pass

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780
FCC Designation # US1070
FCC site registration is under A2LA certificate # 0955.01
ISED Canada test site registration # 2056A
EU Notified Body # 1177
For all designations see A2LA scope # 0955.01



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

2.2 Testing was performed, reviewed by

Dates of Testing: 4/20/2022 – 4/21/2022

Signature:

Sr. EMC Engineer
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

5/25/2022

Signature:

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

5/25/2022



3. Test Sample(s) (EUT/DUT)

The test sample was received: 4/19/2022

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID	2AKCG-VP1742
Brief Description	Inductive Charging Sensor
Model(s) #	VP-1742
Firmware version	N/A
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Technology	Inductive Charging Sensor
Antenna Type	N/A
Voltage Rating (AC or Batt.)	AC
Frequency Range	110-205 kHz

3.2 Configuration of EUT

Configuration	Mode
1	Operational, with a cell phone load

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Retail Security electronic wireless charging. The device is a wireless inductive charger that transmits between 110-205 kHz. The charger (a.k.a. the Base Station, or Transmitter) transmits and receives data to the inductive charging receiver inside a mobile phone. Data is exchanged solely for the purpose of managing the charging system itself, and its reach is limited to the near field. The radio is not preapproved.



Peripherals used during Testing:

No peripherals used.

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance

The measurement was performed as per Section 1.1310 (e)(1). Full test results are available in this report.

4.1.1 Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30
F=frequency in MHz *=Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).				



4.2 Test Equipment List

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Field Probe Meter	E-Field, H-Field, B-Field Probe Handheld Meter	WaveControl	SMP2	20SN1400	8/19/20	8/19/2023
Field Probe	E-Field Probe - 100 kHz to 8 GHz	WaveControl	WPF8	20WP041171	8/19/20	8/19/2023
Field Probe	E-Field & B-Field Probe - 10 Hz to 400 kHz	WaveControl	WP400	20WP100701	8/21/20	8/21/2023
Field Probe	H-Field Probe - 300 kHz to 60 MHz	WaveControl	WPH60	20WP110071	8/20/20	8/20/2023



4.3 Equations

POWER DENSITY

$$E(V/m) = \text{SQRT} (30 * P * G) / d$$

$$Pd(W/m^2) = E^2 / 377$$

$$S = \text{EIRP} / (4 * \text{Pi} * D^2)$$

Where:

S = Power density, in mW/cm²

EIRP = Equivalent Isotropic Radiated Power, in mW

D = Separation distance in cm

Power density is converted from units of mW/cm² to units of W/m² by multiplying by 10.

DISTANCE

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

Where:

D = Separation distance in cm

EIRP = Equivalent Isotropic Radiated Power, in mW

S = Power density in mW/cm²

SOURCE-BASED DUTY CYCLE (When applicable (for example, multi-slot mobile phone applications) A duty cycle factor may be applied.)

$$\text{Source-based time-average EIRP} = (\text{DC} / 100) * \text{EIRP}$$

Where:


DC = Duty Cycle in % as applicable.

EIRP = Equivalent Isotropic radiated Power, in mW

5. RF Exposure

5.1 Near Field Measurement

Requirement and Limits from 47 CFR PART 1, Subpart I, Section 1.1310. A pre-scan of all usable axes was conducted, and the worst case axis was used for each configuration.

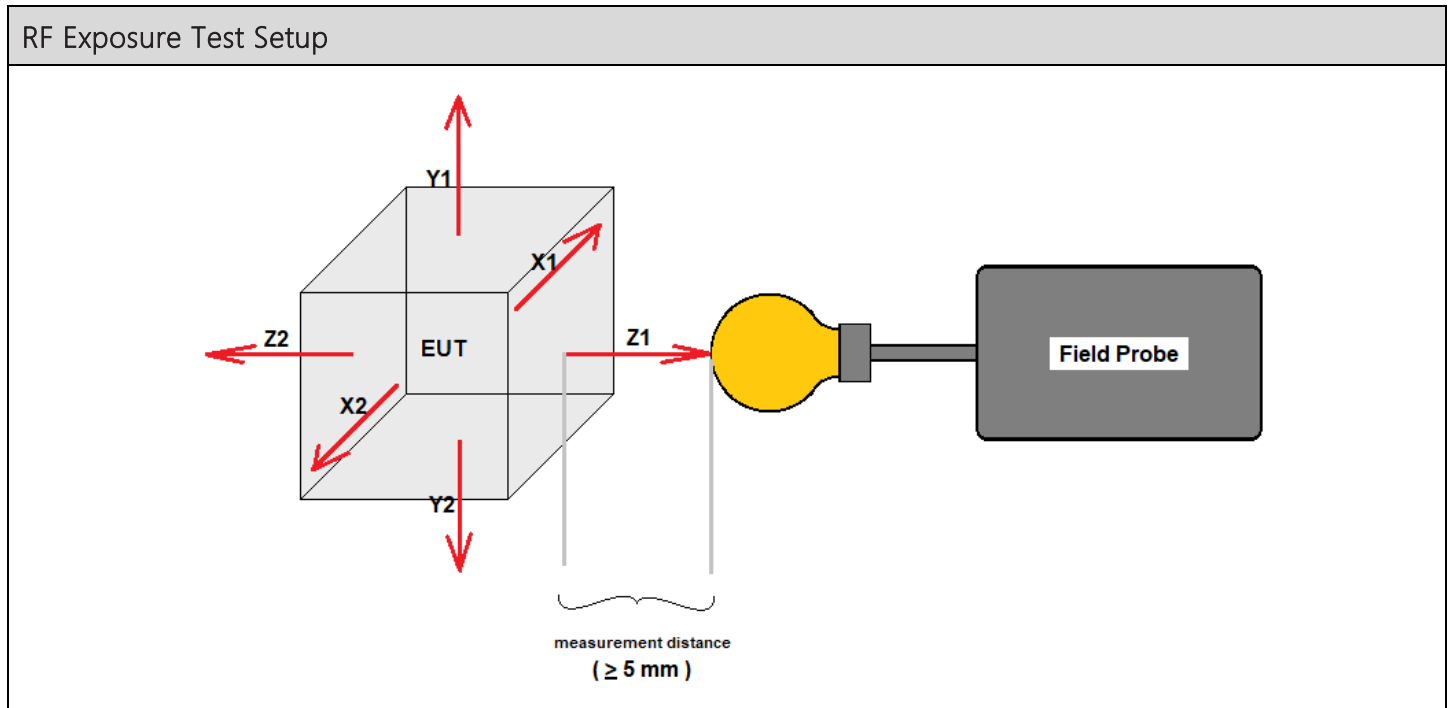

Note: Axes X1, X2, Z1, and Z2 were evaluated, but are not practically useable for this EUT.

Note: Measurements were carried out at a distance of 5 mm.

Note: Averaging time for all measurements was 6 minutes.

5.1.1 Test Data


Configuration	Measurement	Limit
1	79.09 V/m	614
1	0.047 A/m	1.63
1	0.061 μT	1.63



5.1.2 0.001 – 400 kHz, Configuration 1, E-Field

Configuration	Worst-case Orientation Axis
1	Y1


Test Data

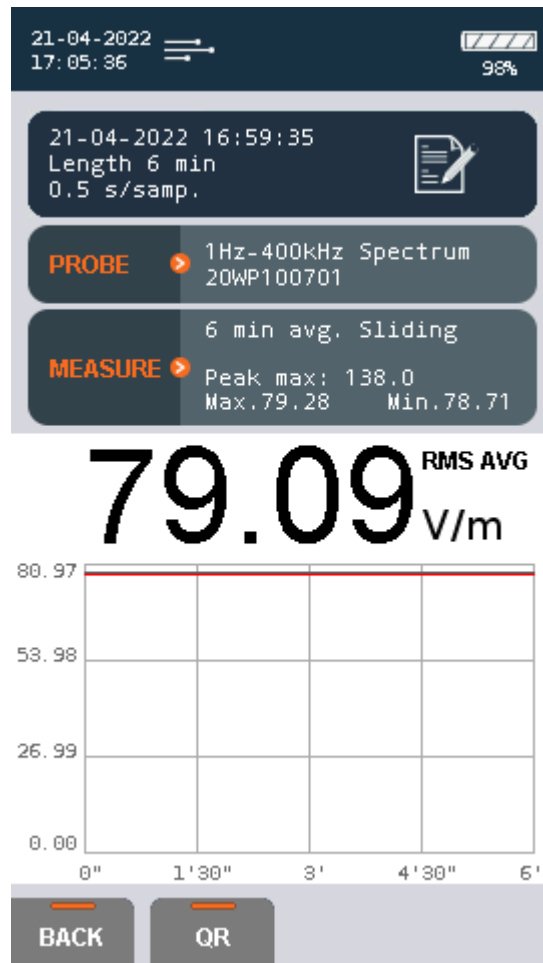



5.1.3 0.001 – 400 kHz, Configuration 1, H-Field


Configuration	Worst-case Orientation Axis
1	Y1

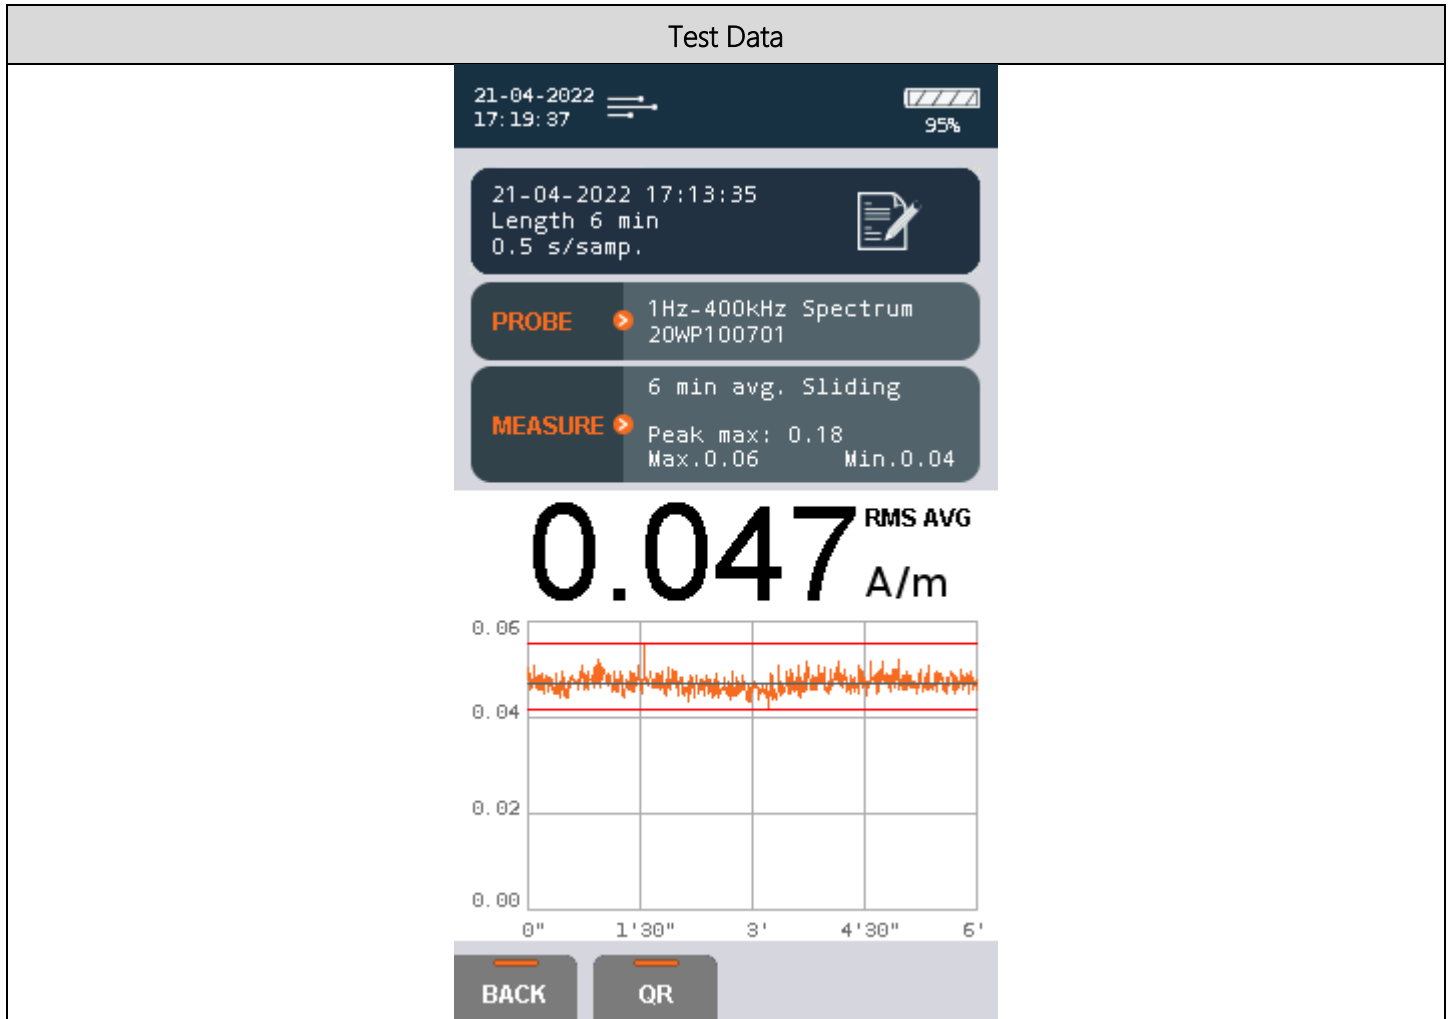



5.1.4 0.001 – 400 kHz, Configuration 1, B-Field

Configuration	Worst-case Orientation Axis
1	Y1

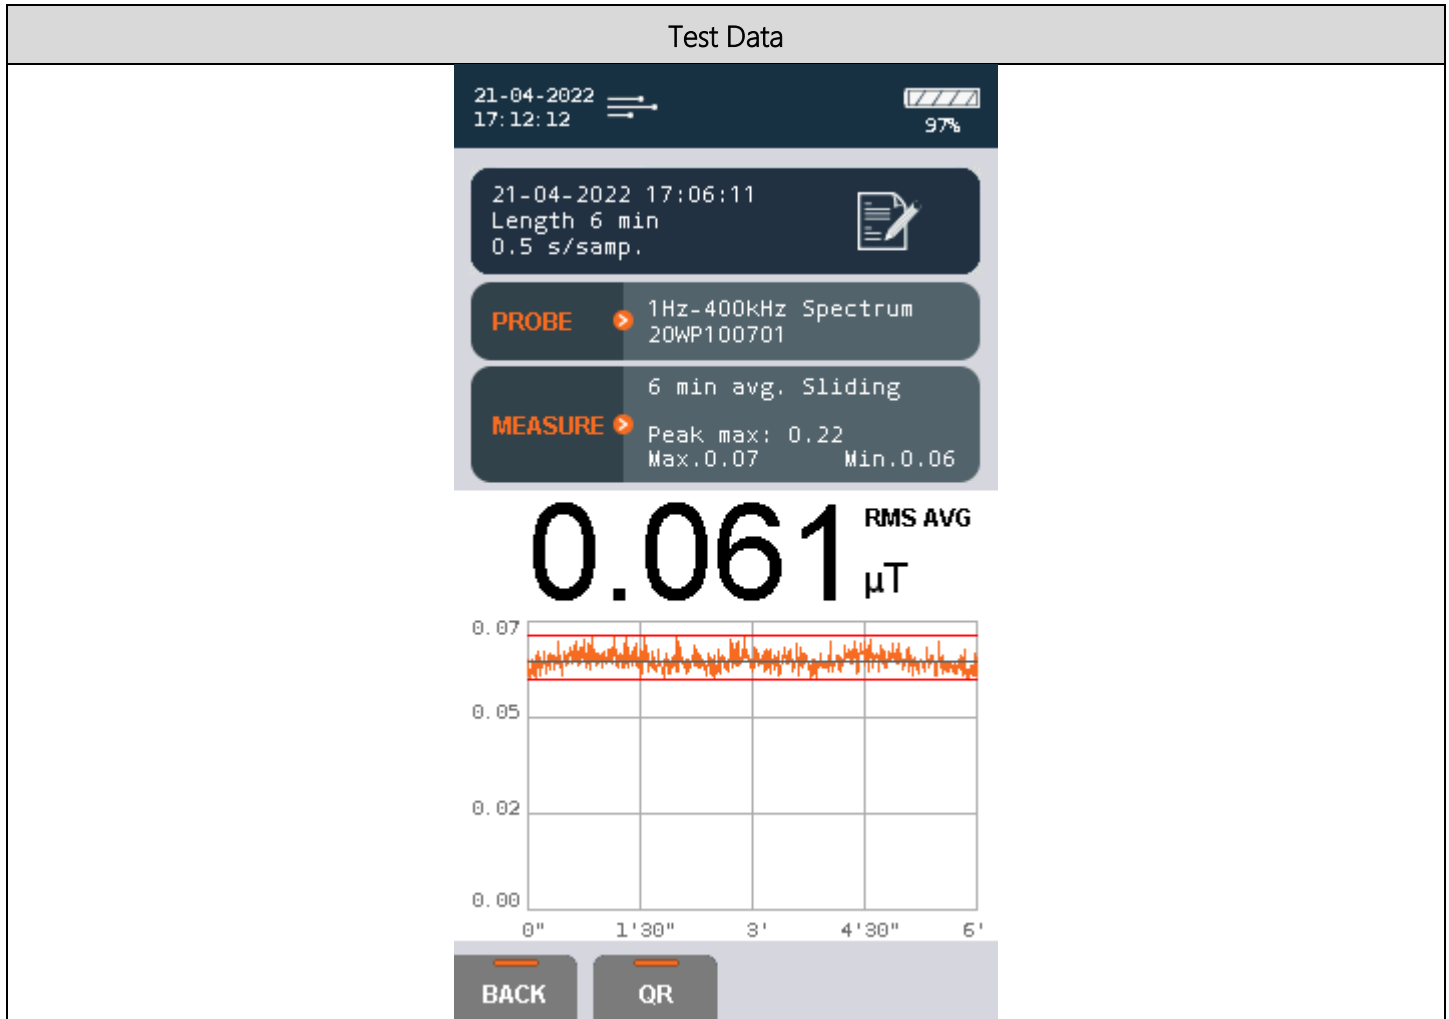



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

6. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in a separate document.

7. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate document.

8. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_1869-22_FCC_1.1310(NS)_	1	Initial release	5/24/2022
	3	Updated pages 3,5.9	5/25/2022



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
