

Meas.1 Body Plane with Top Edge 0mm on 39 Channel in Bluetooth mode with ANT 3

Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Band             | Group, UID           | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [°C] | Liquid Temperature [°C] |
|----------------------|------------------------------|------------------|----------------------|---------------------------------|-------------------|------------------------|------------------|--------------------------|-------------------------|
| Flat, HSL            | EDGE TOP, 0.00               | ISM 2.4 GHz Band | Bluetooth, 10035-CAA | 2441.0, 39                      | 7.17              | 1.82                   | 39.8             | 22.6                     | 21.7                    |

Hardware Setup


| Phantom                            | TSL, Measured Date        | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|---------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2159 | HBBL-600-10000 2026-07-10 | EX3DV4 - SN7607, 2025-08-06 | DAE4 Sn1710, 2026-01-12 |

Scan Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 72.0 x 120.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 12.0 x 12.0  | 5.0 x 5.0 x 5.0    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| Grading Ratio       | 1.5          | 1.5                |
| MAIA                | Y            | N/A                |
| Surface Detection   | VMS + 6p     | VMS + 6p           |
| Scan Method         | Measured     | Measured           |

Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-07-10    | 2026-07-10    |
| psSAR1g [W/kg]      | 0.246         | 0.290         |
| psSAR10g [W/kg]     | 0.094         | 0.108         |
| Power Drift [dB]    | -0.10         | -0.03         |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 43.2          |
| Dist 3dB Peak [mm]  |               | 5.8           |

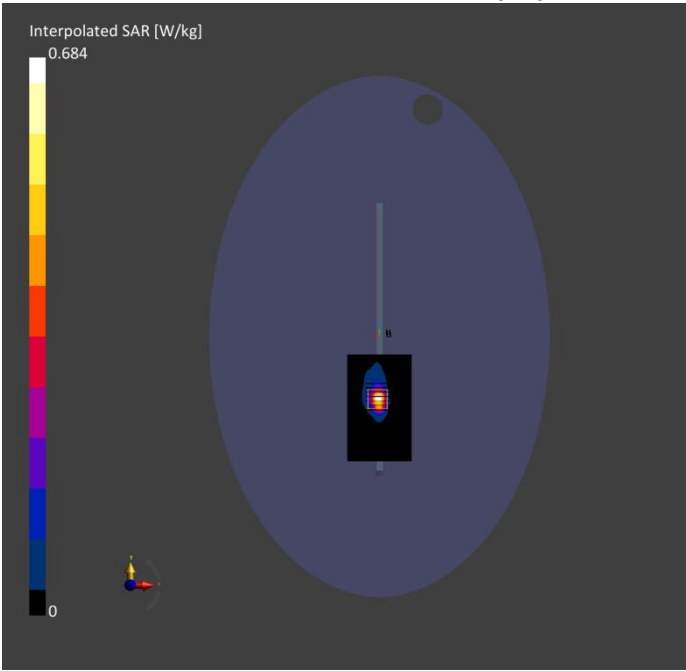

Ti-CC26060266-ATD-1

## Meas.2 Body Plane with Top Edge 0mm on 6 Channel in IEEE802.11b mode with ANT MIMO

### Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Band        | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [°C] | Liquid Temperature [°C] |
|----------------------|------------------------------|-------------|-----------------|---------------------------------|-------------------|------------------------|------------------|--------------------------|-------------------------|
| Flat, HSL            | EDGE TOP, 0.00               | WLAN 2.4GHz | WLAN, 10012-CAB | 2437.0, 6                       | 7.17              | 1.82                   | 39.9             | 22.6                     | 21.7                    |

### Hardware Setup


| Phantom                            | TSL, Measured Date        | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|---------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2159 | HBBL-600-10000 2026-07-10 | EX3DV4 - SN7607, 2025-08-06 | DAE4 Sn1710, 2026-01-12 |

### Scan Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 72.0 x 192.0 | 30.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 12.0 x 12.0  | 5.0 x 5.0 x 5.0    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| Grading Ratio       | 1.5          | 1.5                |
| MAIA                | N/A          | N/A                |
| Surface Detection   | VMS + 6p     | VMS + 6p           |
| Scan Method         | Measured     | Measured           |

### Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-07-10    | 2026-07-10    |
| psSAR1g [W/kg]      | 0.533         | 0.641         |
| psSAR10g [W/kg]     | 0.214         | 0.246         |
| Power Drift [dB]    | -0.06         | 0.00          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 47.0          |
| Dist 3dB Peak [mm]  |               | 6.0           |

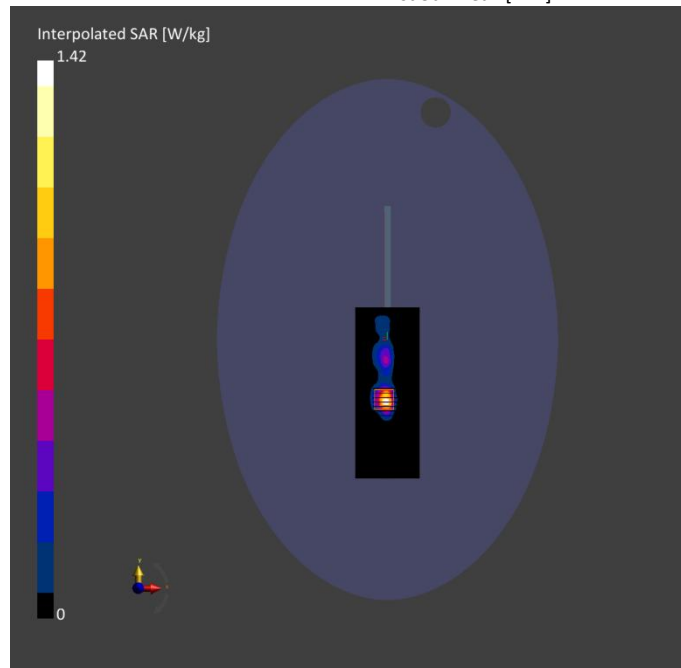

Ti-CC26060266-ATD-1

## Meas.3 Body Plane with Top Edge 0mm on 54 Channel in IEEE802.11n40 mode with ANT MIMO

### Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Band      | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [°C] | Liquid Temperature [°C] |
|----------------------|------------------------------|-----------|-----------------|---------------------------------|-------------------|------------------------|------------------|--------------------------|-------------------------|
| Flat, HSL            | EDGE TOP, 0.00               | WLAN 5GHz | WLAN, 10599-AAD | 5270.0, 54                      | 5.37              | 4.79                   | 35.0             | 22.5                     | 21.5                    |

### Hardware Setup


| Phantom                            | TSL, Measured Date        | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|---------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2159 | HBBL-600-10000 2026-07-11 | EX3DV4 - SN7607, 2025-08-06 | DAE4 Sn1710, 2026-01-12 |

### Scan Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 60.0 x 180.0 | 24.0 x 24.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0  | 4.0 x 4.0 x 2.0    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| Grading Ratio       | 1.5          | 1.4                |
| MAIA                | Y            | N/A                |
| Surface Detection   | VMS + 6p     | VMS + 6p           |
| Scan Method         | Measured     | Measured           |

### Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-07-11    | 2026-07-11    |
| psSAR1g [W/kg]      | 0.457         | 0.663         |
| psSAR10g [W/kg]     | 0.138         | 0.175         |
| Power Drift [dB]    | -0.11         | -0.04         |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 53.8          |
| Dist 3dB Peak [mm]  |               | 4.9           |

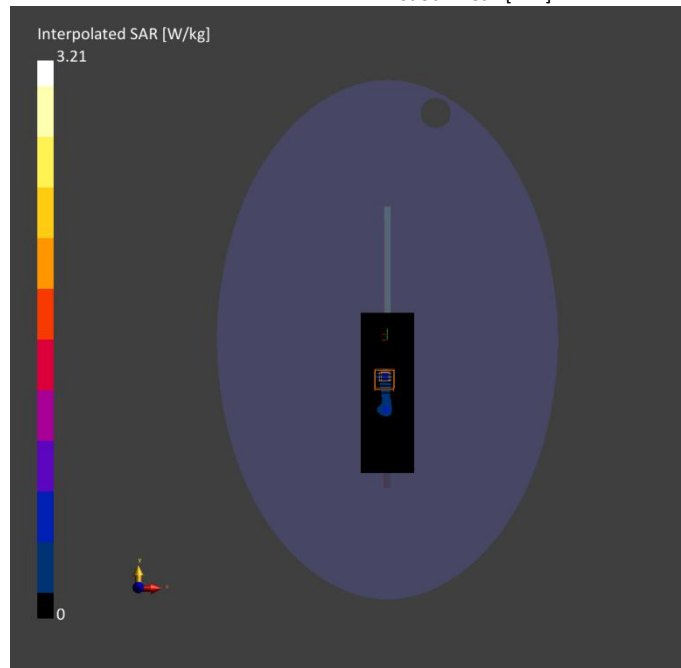

Ti-CC26060266-ATD-1

## Meas.4 Body Plane with Top Edge 0mm on 118 Channel in IEEE802.11n40 mode with ANT MIMO

### Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Band      | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [°C] | Liquid Temperature [°C] |
|----------------------|------------------------------|-----------|-----------------|---------------------------------|-------------------|------------------------|------------------|--------------------------|-------------------------|
| Flat, HSL            | EDGE TOP, 0.00               | WLAN 5GHz | WLAN, 10599-AAD | 5590.0, 118                     | 5.14              | 4.96                   | 36.0             | 22.3                     | 21.6                    |

### Hardware Setup


| Phantom                            | TSL, Measured Date        | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|---------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2159 | HBBL-600-10000 2026-07-14 | EX3DV4 - SN7607, 2025-08-06 | DAE4 Sn1710, 2026-01-12 |

### Scan Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 60.0 x 180.0 | 24.0 x 24.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0  | 4.0 x 4.0 x 2.0    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| Grading Ratio       | 1.5          | 1.4                |
| MAIA                | Y            | N/A                |
| Surface Detection   | VMS + 6p     | VMS + 6p           |
| Scan Method         | Measured     | Measured           |

### Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-07-14    | 2026-07-14    |
| psSAR1g [W/kg]      | 0.497         | 0.661         |
| psSAR10g [W/kg]     | 0.130         | 0.156         |
| Power Drift [dB]    | 0.03          | -0.05         |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 48.8          |
| Dist 3dB Peak [mm]  |               | 4.8           |

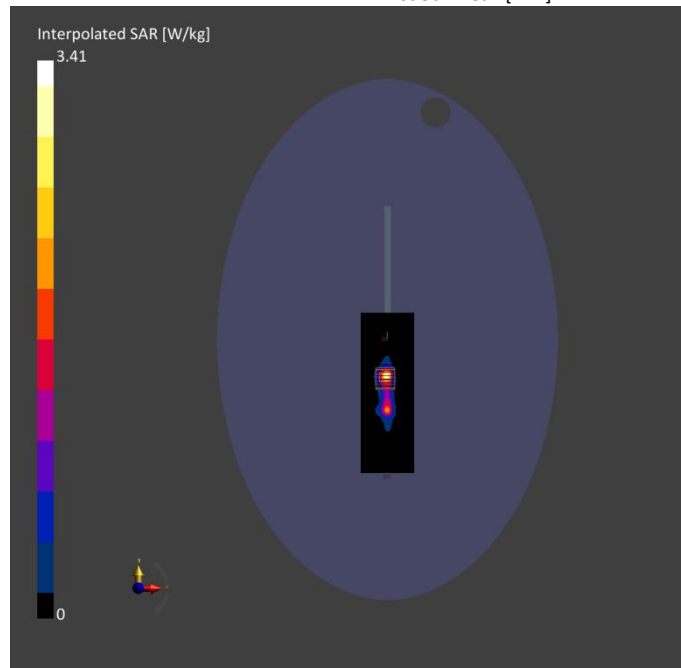

Ti-CC26060266-ATD-1

Meas.5 Body Plane with Top Edge 0mm on 151 Channel in IEEE802.11n40 mode with Antenna MIMO

### Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Band      | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [°C] | Liquid Temperature [°C] |
|----------------------|------------------------------|-----------|-----------------|---------------------------------|-------------------|------------------------|------------------|--------------------------|-------------------------|
| Flat, HSL            | EDGE TOP, 0.00               | WLAN 5GHz | WLAN, 10599-AAD | 5755.0, 151                     | 5.1               | 5.15                   | 35.6             | 22.2                     | 21.5                    |

### Hardware Setup


| Phantom                            | TSL, Measured Date        | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|---------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2159 | HBBL-600-10000 2026-07-15 | EX3DV4 - SN7607, 2025-08-06 | DAE4 Sn1710, 2026-01-12 |

### Scan Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 60.0 x 180.0 | 24.0 x 24.0 x 22.0 |
| Grid Steps [mm]     | 10.0 x 10.0  | 4.0 x 4.0 x 2.0    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| Grading Ratio       | 1.5          | 1.4                |
| MAIA                | Y            | N/A                |
| Surface Detection   | VMS + 6p     | VMS + 6p           |
| Scan Method         | Measured     | Measured           |

### Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-07-15    | 2026-07-15    |
| psSAR1g [W/kg]      | 0.521         | 0.663         |
| psSAR10g [W/kg]     | 0.142         | 0.152         |
| Power Drift [dB]    | 0.07          | 0.00          |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 45.0          |
| Dist 3dB Peak [mm]  |               | 4.8           |

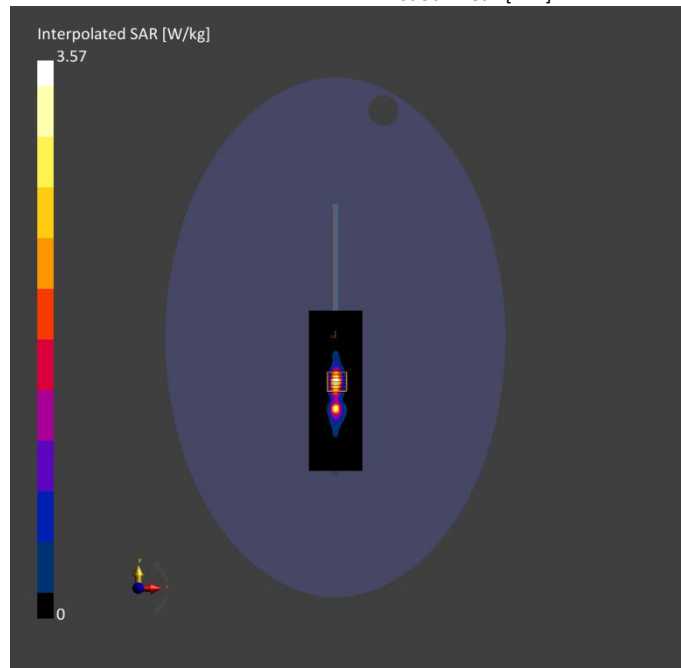

Ti-CC26060266-ATD-1

## Meas.6 Body Plane with Top Edge 0mm on 87 Channel in IEEE802.11ax80 mode with Antenna MIMO

### Exposure Conditions

| Phantom Section, TSL | Position, Test Distance [mm] | Band    | Group, UID      | Frequency [MHz], Channel Number | Conversion Factor | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [°C] | Liquid Temperature [°C] |
|----------------------|------------------------------|---------|-----------------|---------------------------------|-------------------|------------------------|------------------|--------------------------|-------------------------|
| Flat, HSL            | EDGE TOP, 0.00               | U-NII-5 | WLAN, 10731-AAC | 6385.0, 87                      | 5.6               | 5.76                   | 34.2             | 22.3                     | 21.3                    |

### Hardware Setup

| Phantom                            | TSL, Measured Date        | Probe, Calibration Date     | DAE, Calibration Date   |
|------------------------------------|---------------------------|-----------------------------|-------------------------|
| ELI V8.0 (20deg probe tilt) - 2159 | HBBL-600-10000 2026-07-16 | EX3DV4 - SN7607, 2025-08-06 | DAE4 Sn1710, 2026-01-12 |

### Scan Setup

|                     | Area Scan    | Zoom Scan          |
|---------------------|--------------|--------------------|
| Grid Extents [mm]   | 51.0 x 187.0 | 23.8 x 23.8 x 22.0 |
| Grid Steps [mm]     | 8.5 x 8.5    | 3.4 x 3.4 x 1.4    |
| Sensor Surface [mm] | 3.0          | 1.4                |
| Graded Grid         | Yes          | Yes                |
| Grading Ratio       | 1.5          | 1.4                |
| MAIA                | N/A          | N/A                |
| Surface Detection   | VMS + 6p     | VMS + 6p           |
| Scan Method         | Measured     | Measured           |

### Measurement Results

|                     | Area Scan     | Zoom Scan     |
|---------------------|---------------|---------------|
| Date                | 2026-07-16    | 2026-07-16    |
| psSAR1g [W/kg]      | 0.603         | 0.657         |
| psSAR10g [W/kg]     | 0.132         | 0.133         |
| Power Drift [dB]    | 0.06          | -0.10         |
| Power Scaling       | Disabled      | Disabled      |
| Scaling Factor [dB] |               |               |
| TSL Correction      | No correction | No correction |
| M2/M1 [%]           |               | 51.8          |
| Dist 3dB Peak [mm]  |               | 4.0           |

