

Photo 9



Photo 10



Photo 11



Photo 12

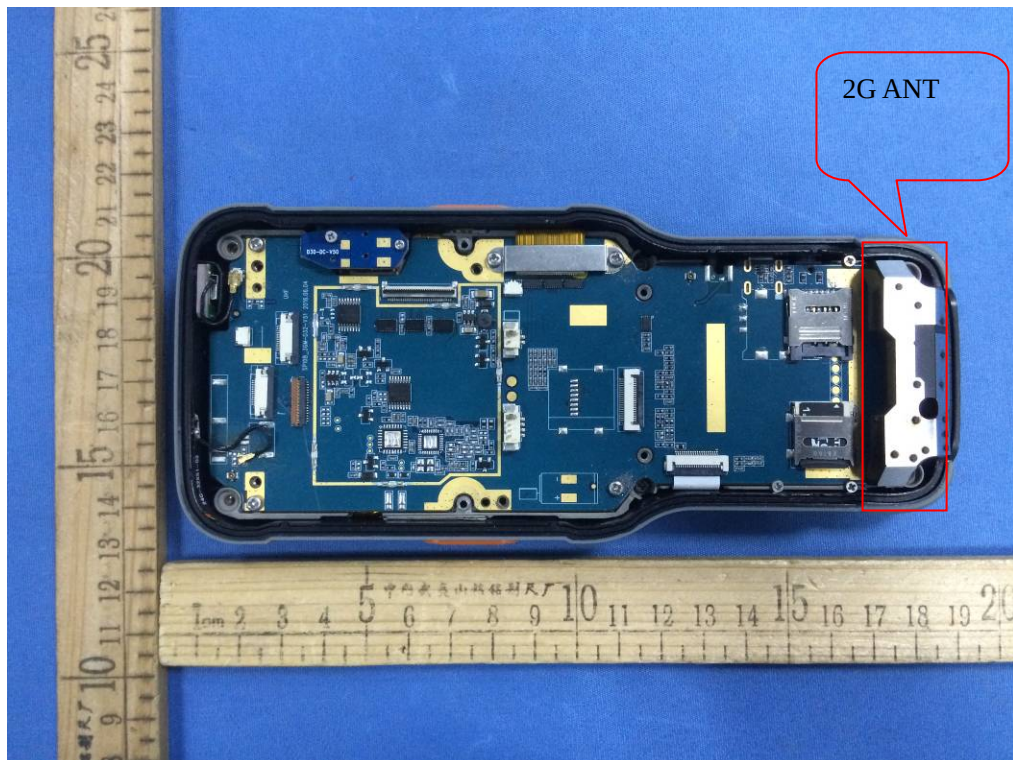


Photo 13

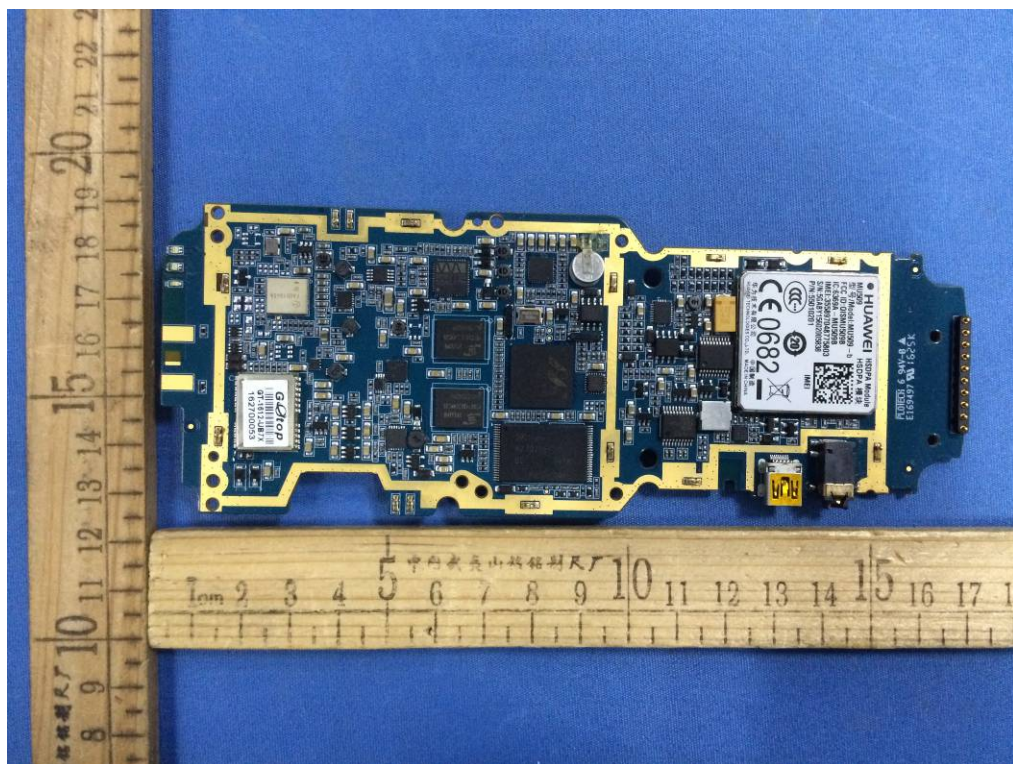


Photo 14

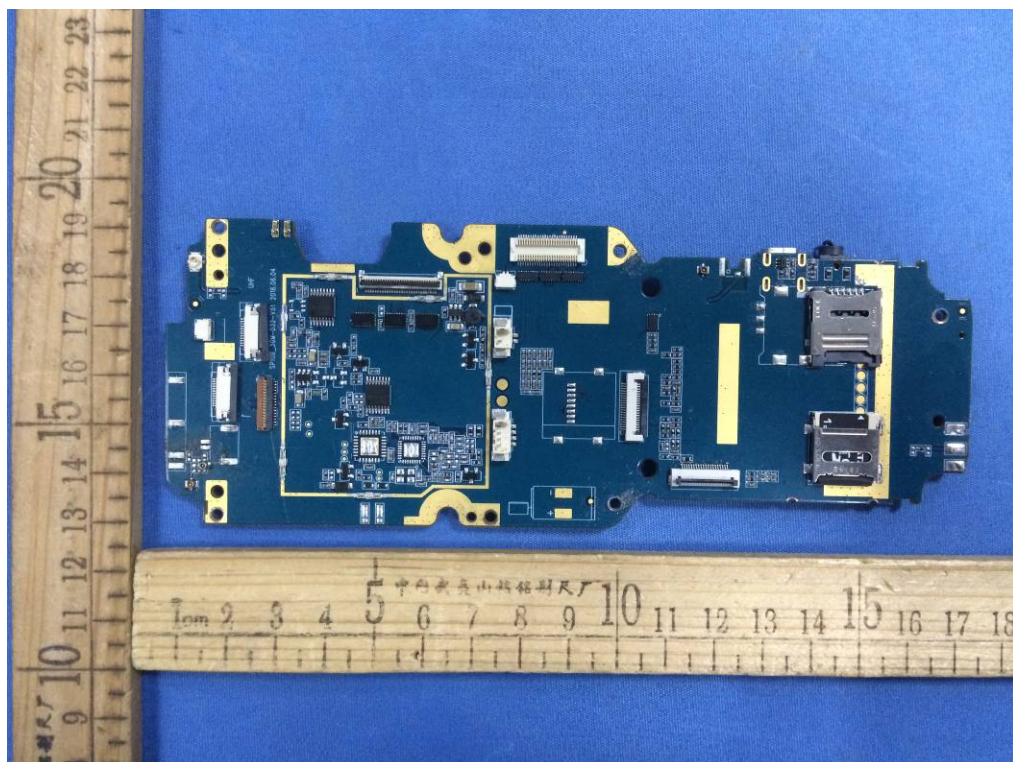


Photo 15

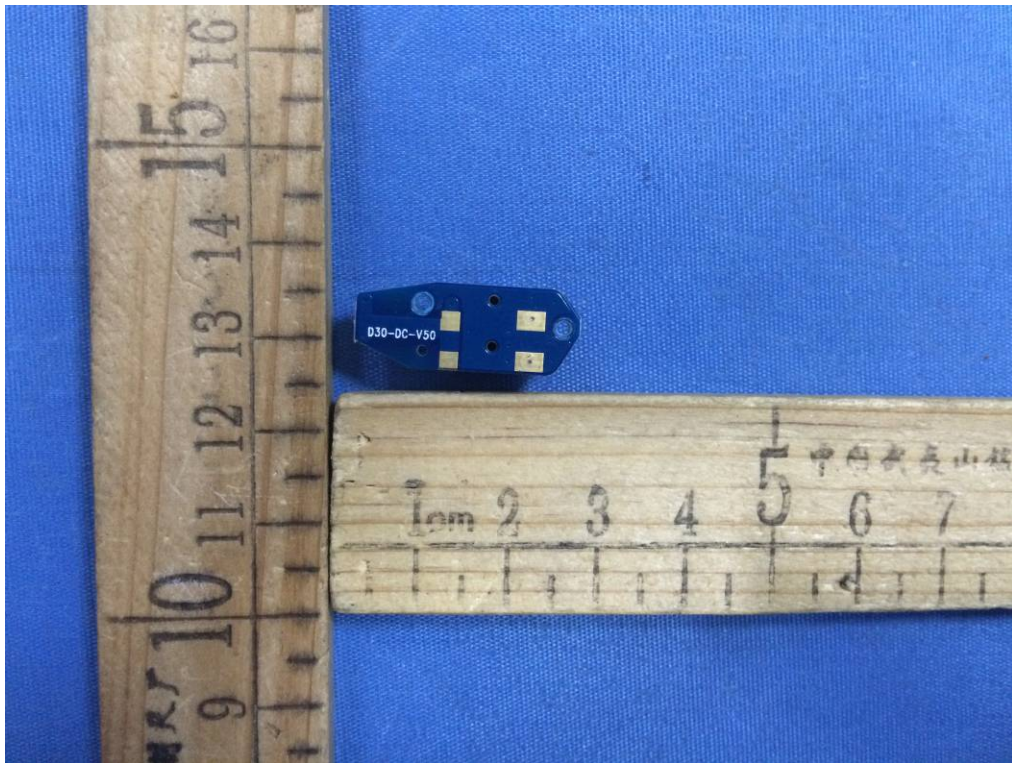


Photo 16

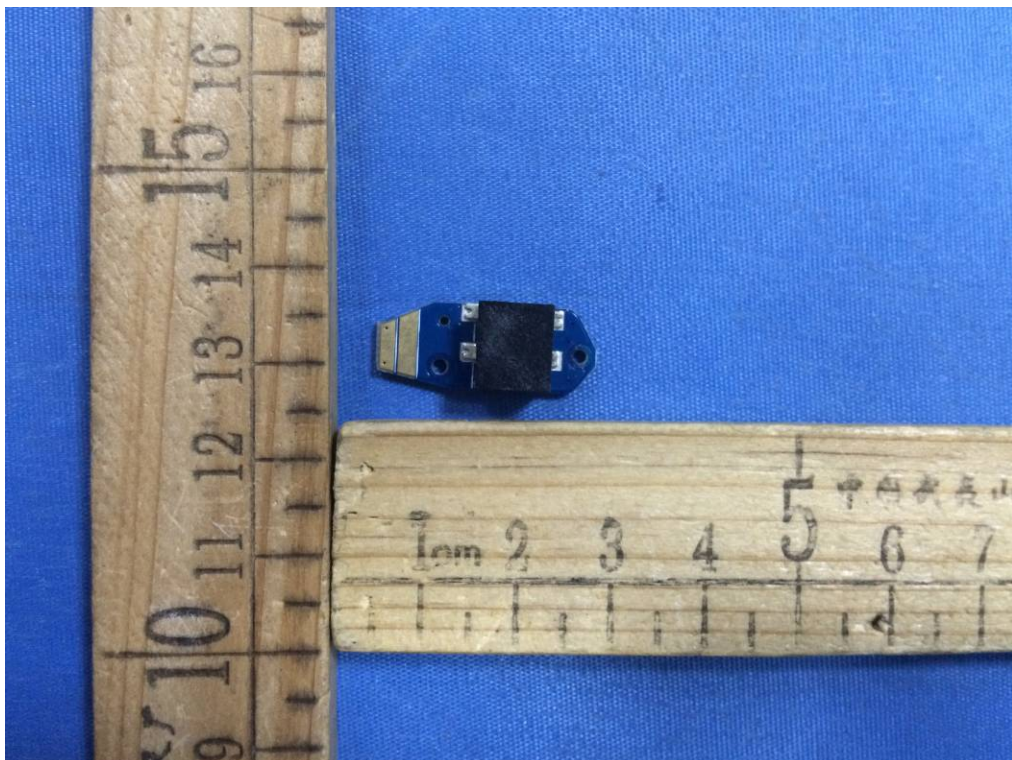


Photo 17

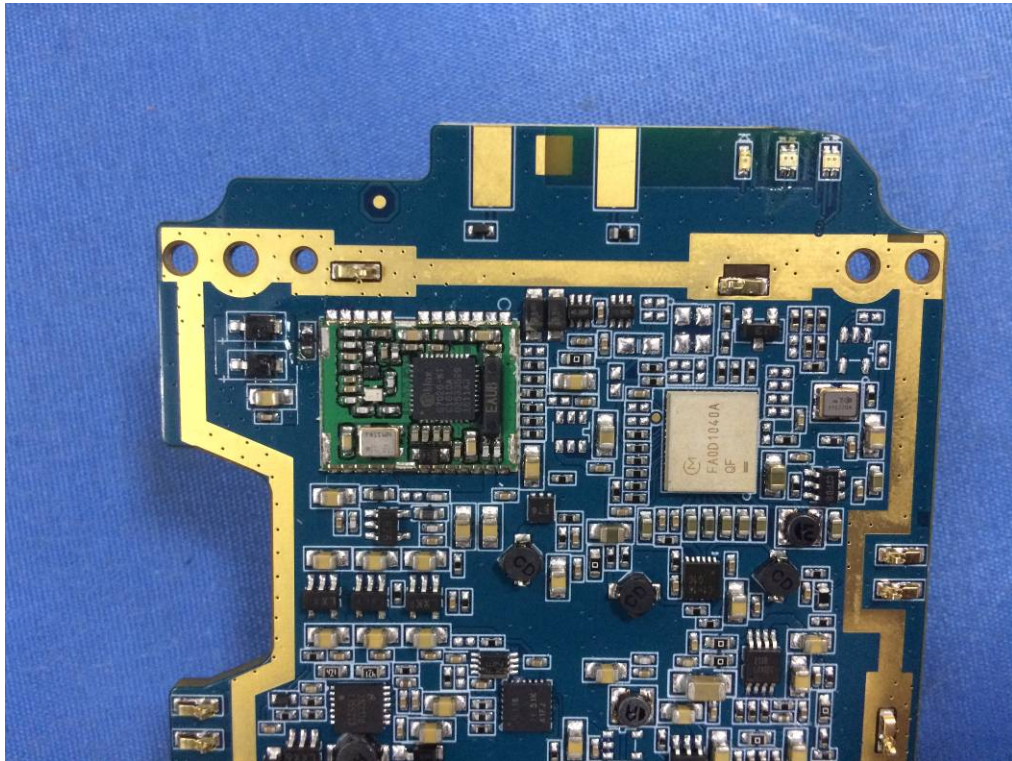


Photo 18

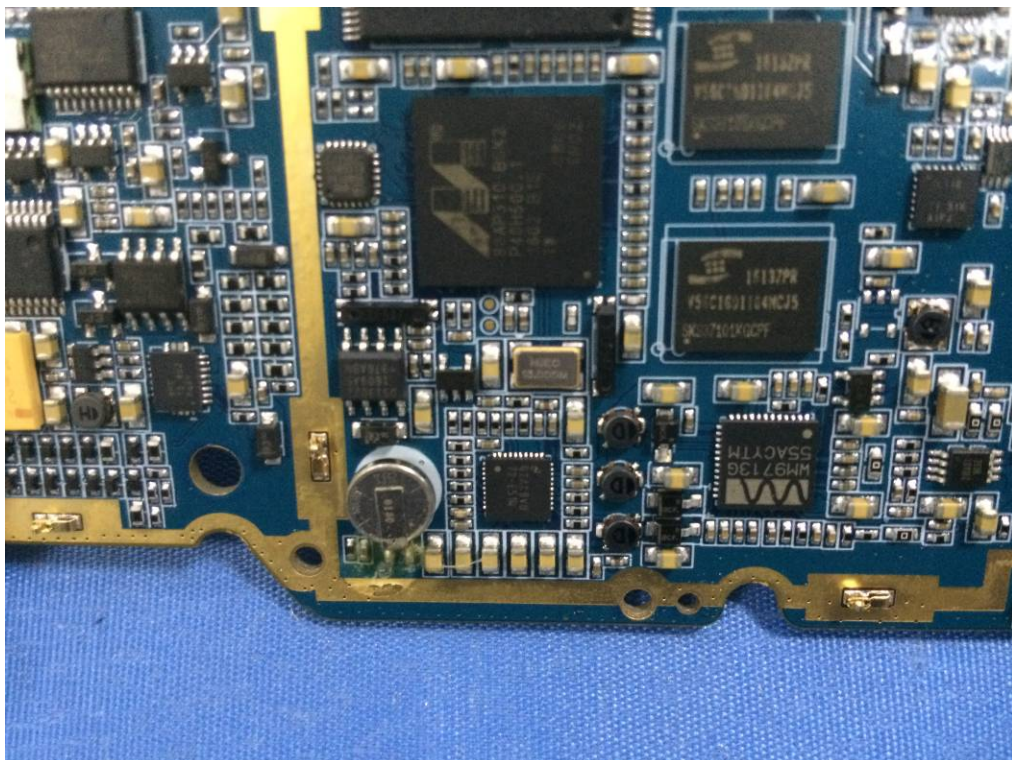


Photo 19



Photo 20

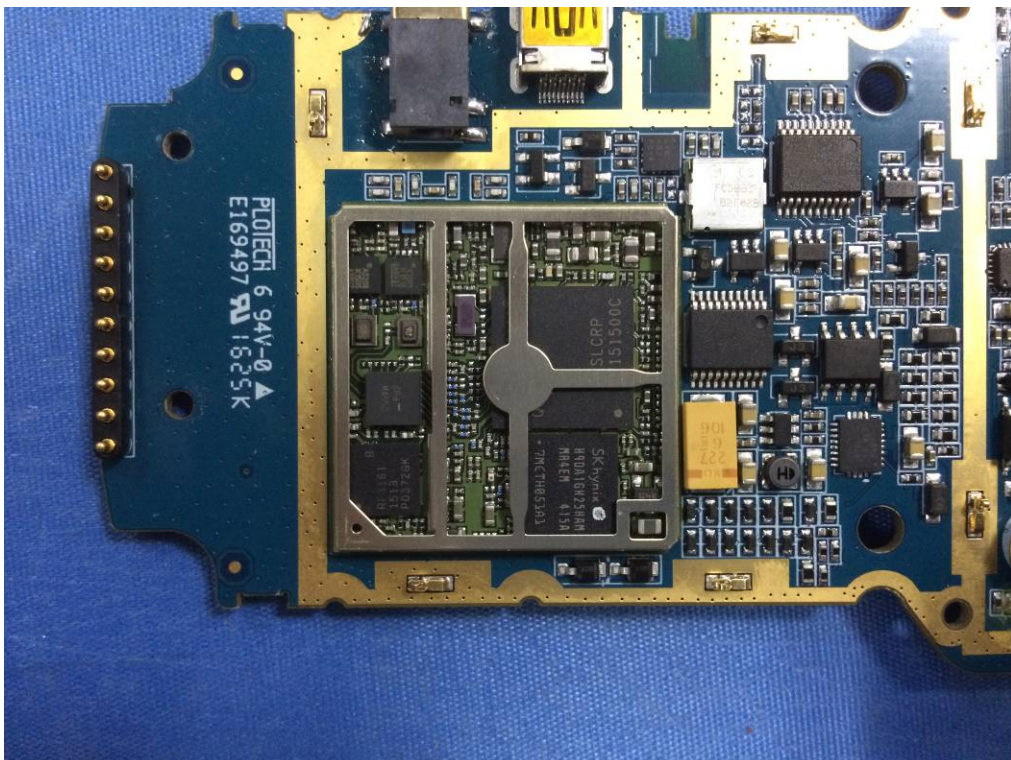


Photo 21



Photo 22

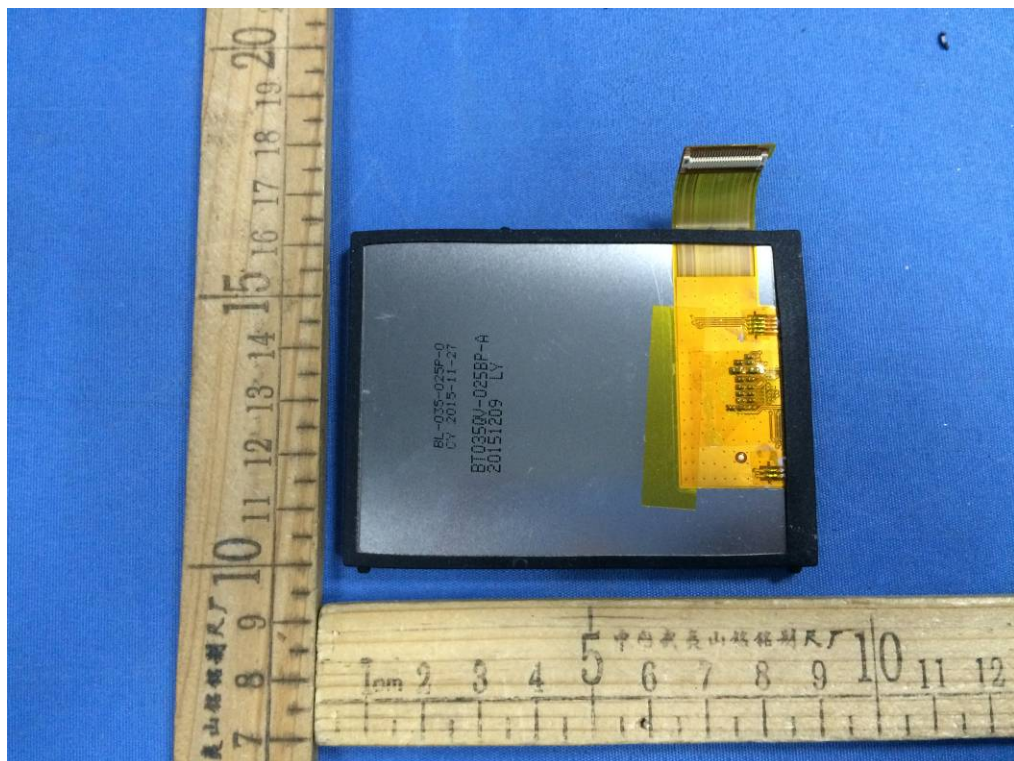


Photo 23



Photo 24

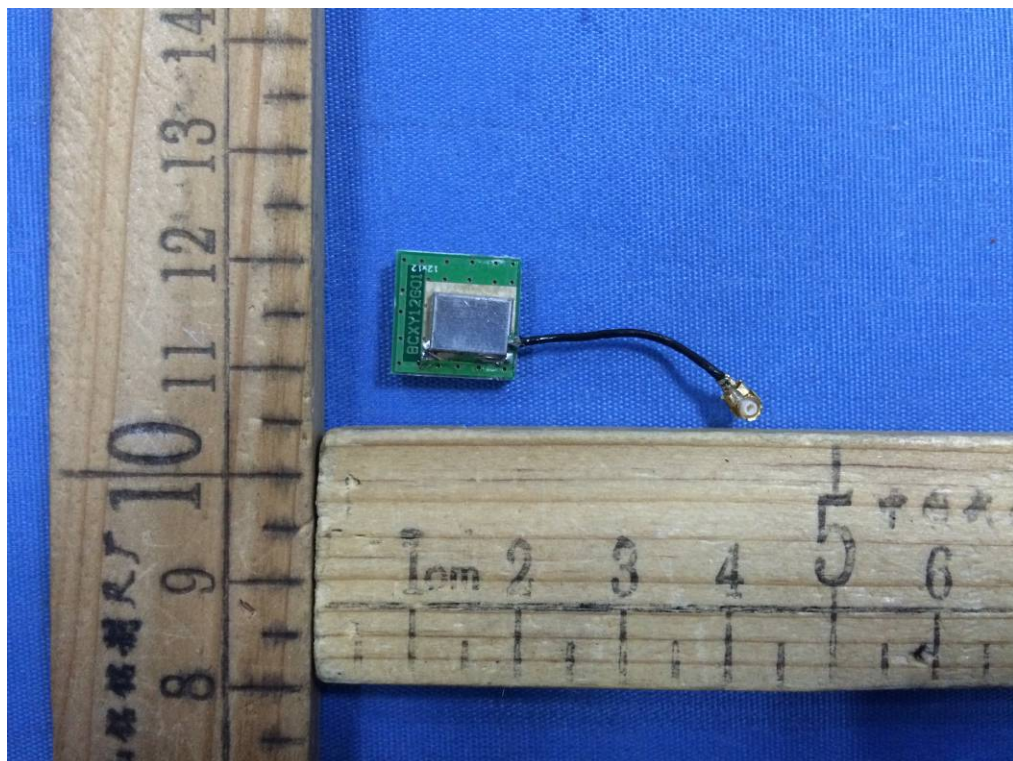


Photo 25

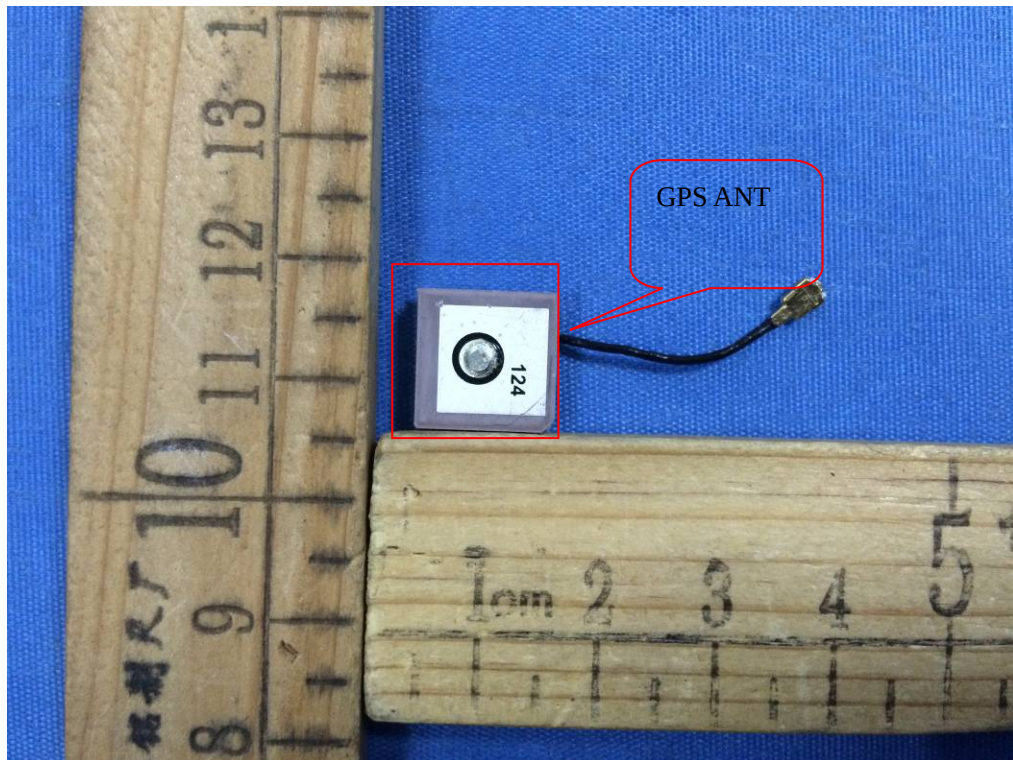


Photo 26

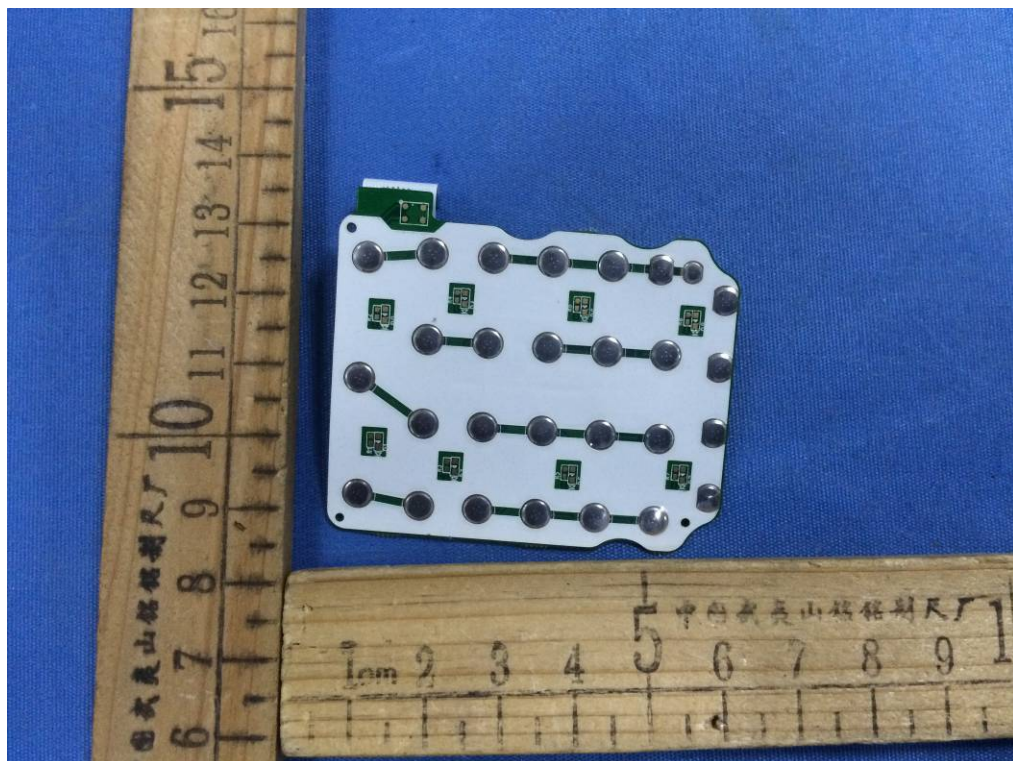


Photo 27

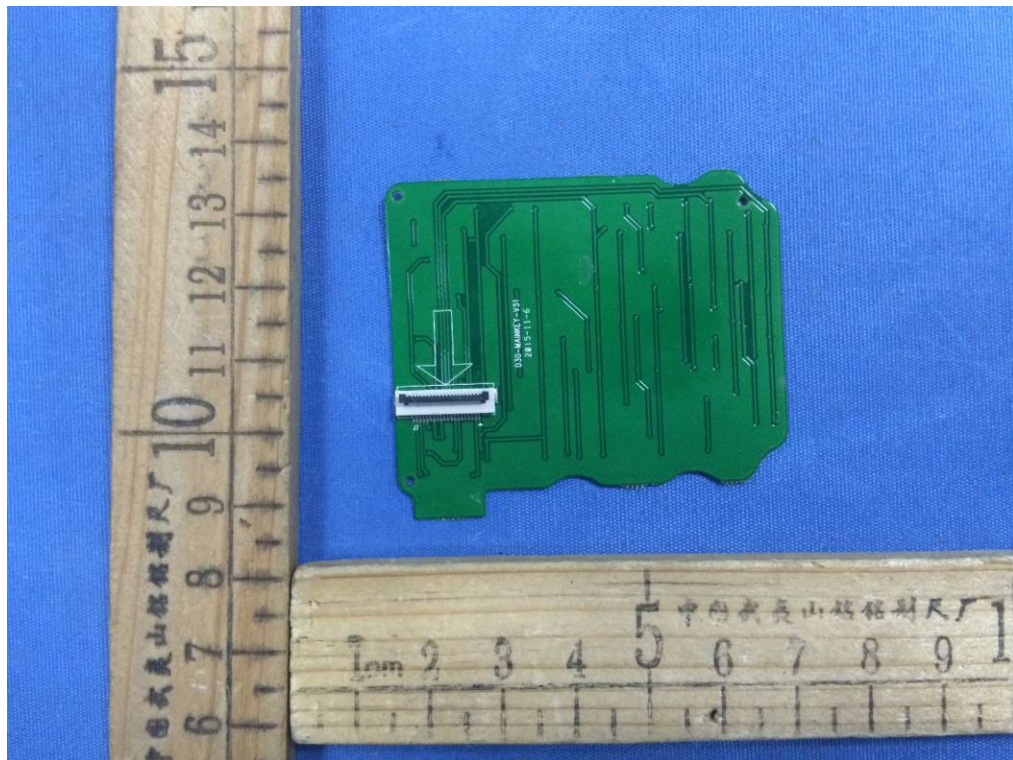


Photo 28



Photo 29



Photo 30



Photo 31

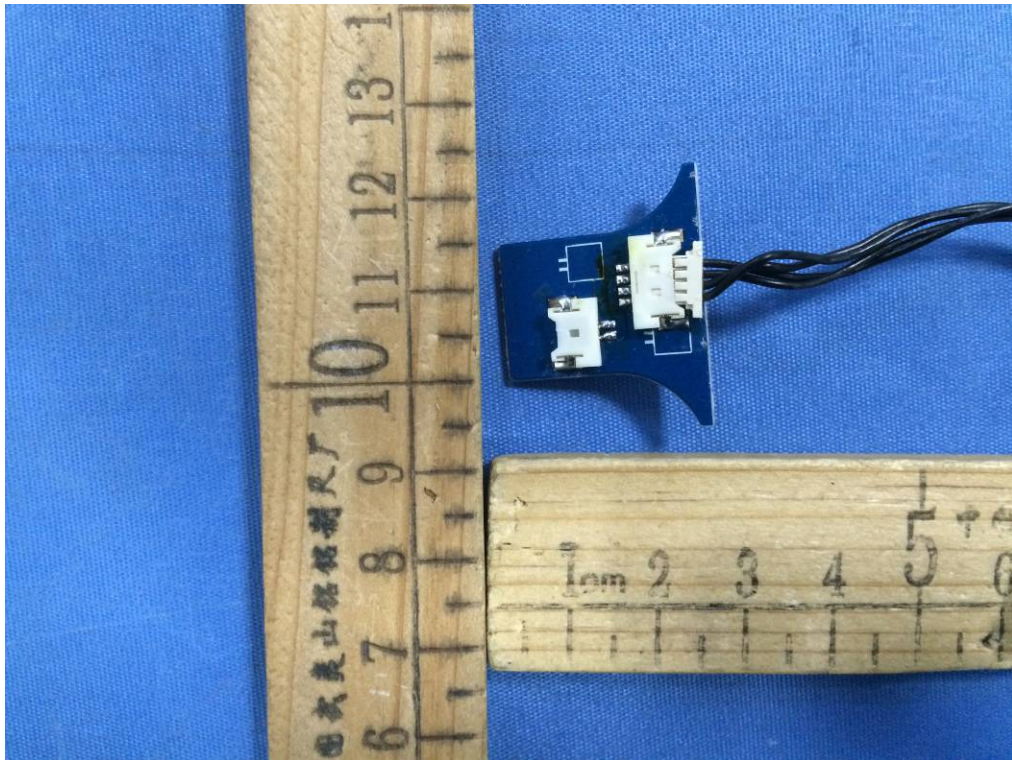


Photo 32



Photo 33



Photo 34

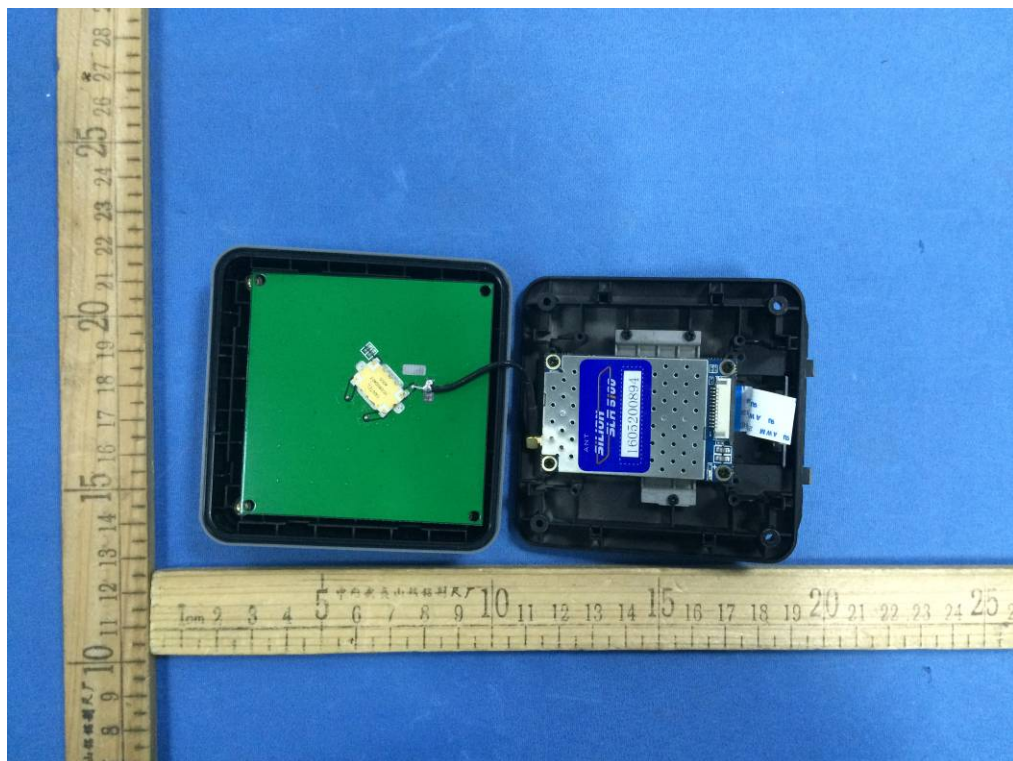


Photo 35

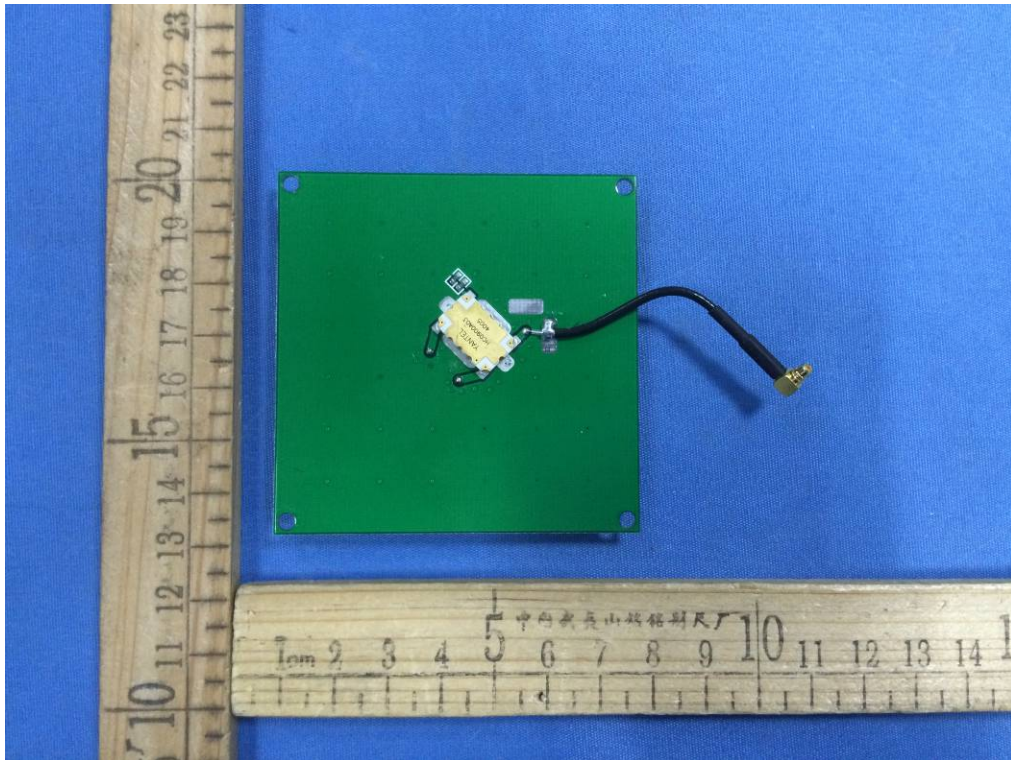


Photo 36

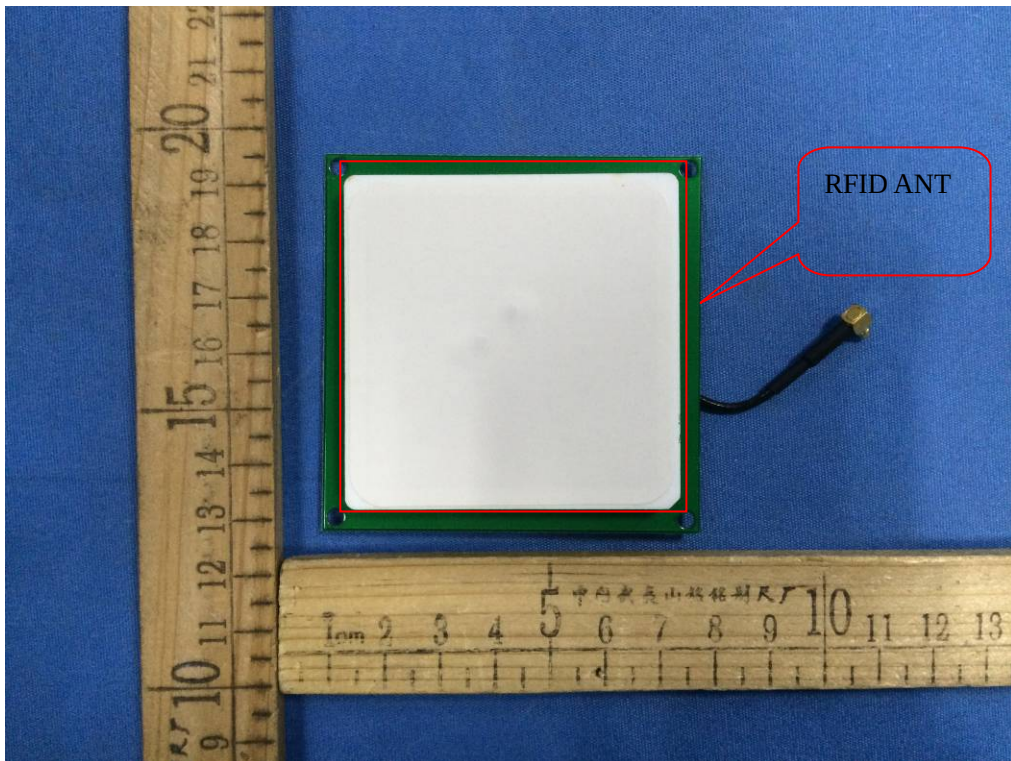


Photo 37

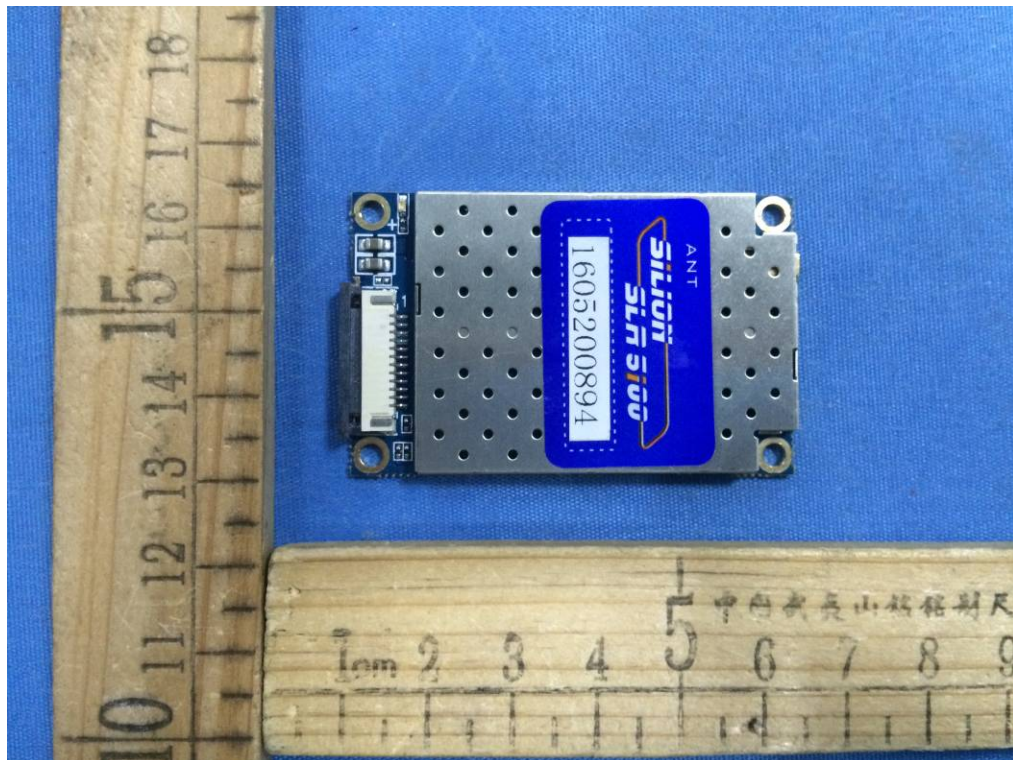


Photo 38

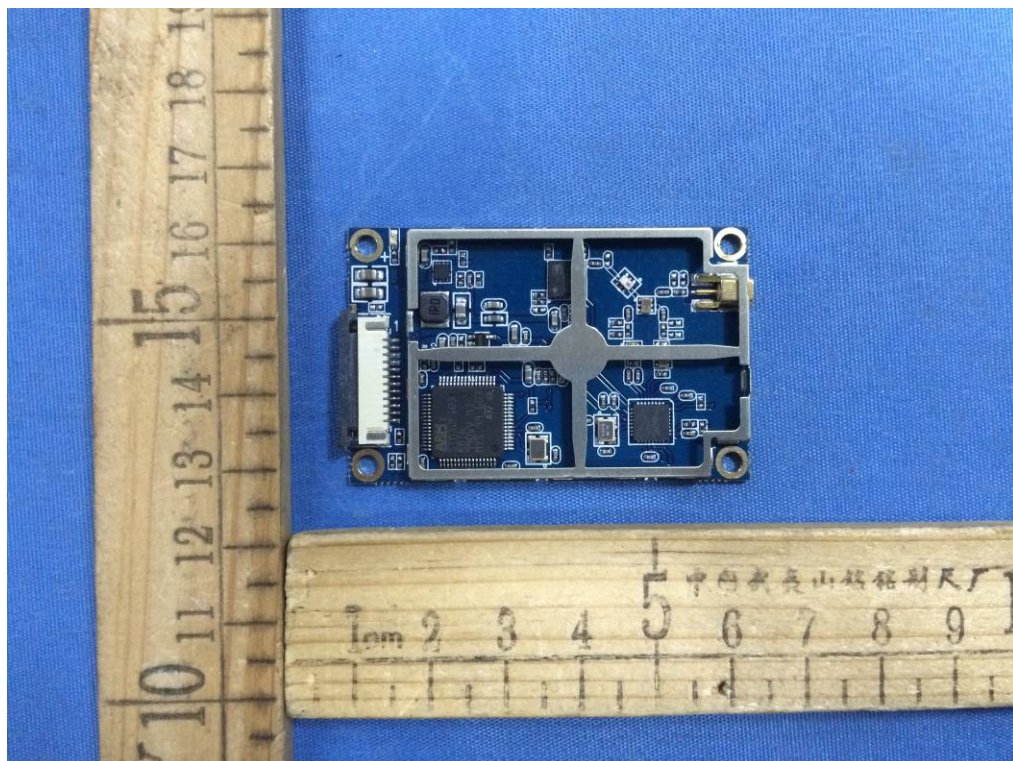


Photo 39

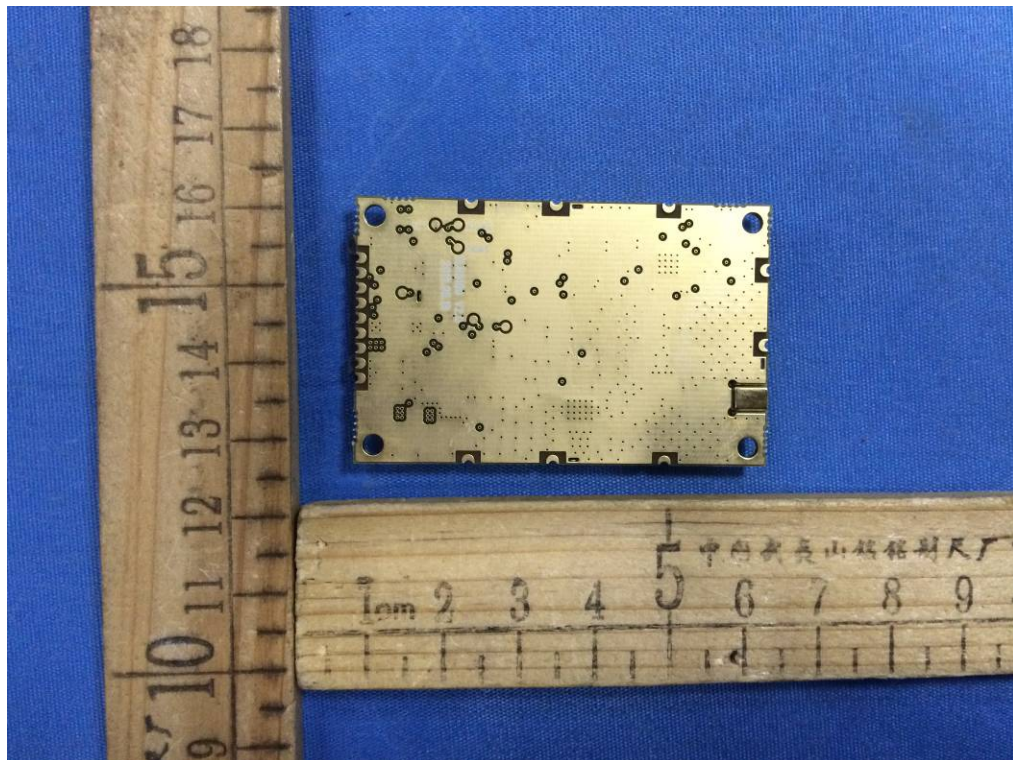


Photo 40



Technical specifications and safety information from the label:

- BI Switching Power Supply**
- Model No. BT15-05520
- Input: AC 100-240V~50/60Hz 0.5A
- Output: DC 5.5V --- 25A
- Output Power: 137.5W
- Output Voltage Regulation: $\leq 1\%$
- Output Current Regulation: $\leq 1\%$
- Efficiency: $\geq 85\%$
- Power Factor: ≥ 0.95
- Temperature Rise: $\leq 20^\circ\text{C}$
- Operating Temperature: $0^\circ\text{C} \sim 40^\circ\text{C}$
- Storage Temperature: $-20^\circ\text{C} \sim 60^\circ\text{C}$
- Humidity: $5\% \sim 95\%$
- Shock: 2000m/s^2
- Vibration: 10m/s^2
- EMC: CE
- UL: UL
- RoHS: RoHS
- CE: CE
- CCC: CCC
- MADE IN CHINA