

**FCC 47 CFR PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

*For*

Touch, Infinity Dock

MODEL No.: FT102-Z, FT115-Z

FCC ID: 2AKHBFT102

Trademark: FANTEM

REPORT NO.: ES161013031E3

ISSUE DATE: October 31, 2016

Prepared for

Fantem Technologies(Shenzhen) Co.,Ltd

5th Floor, Yingtang Building, South 5th Road, HI-tech Park, Nanshan District,  
Shenzhen, Guangdong, China, 518057

Prepared by

EMTEK (SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China

TEL: 86-755-26954280

FAX: 86-755-26954282

## Table of Contents

|           |                                                            |           |
|-----------|------------------------------------------------------------|-----------|
| <b>1</b>  | <b>TEST RESULT CERTIFICATION.....</b>                      | <b>3</b>  |
| <b>2</b>  | <b>EUT TECHNICAL DESCRIPTION.....</b>                      | <b>4</b>  |
| <b>3</b>  | <b>SUMMARY OF TEST RESULT .....</b>                        | <b>8</b>  |
| <b>4</b>  | <b>TEST METHODOLOGY .....</b>                              | <b>9</b>  |
| 4.1       | GENERAL DESCRIPTION OF APPLIED STANDARDS .....             | 9         |
| 4.2       | MEASUREMENT EQUIPMENT USED .....                           | 9         |
| 4.3       | DESCRIPTION OF TEST MODES.....                             | 10        |
| <b>5</b>  | <b>FACILITIES AND ACCREDITATIONS .....</b>                 | <b>11</b> |
| 5.1       | FACILITIES .....                                           | 11        |
| 5.2       | LABORATORY ACCREDITATIONS AND LISTINGS .....               | 11        |
| <b>6</b>  | <b>TEST SYSTEM UNCERTAINTY .....</b>                       | <b>12</b> |
| <b>7</b>  | <b>SETUP OF EQUIPMENT UNDER TEST .....</b>                 | <b>13</b> |
| 7.1       | RADIO FREQUENCY TEST SETUP 1.....                          | 13        |
| 7.2       | RADIO FREQUENCY TEST SETUP 2.....                          | 13        |
| 7.3       | CONDUCTED EMISSION TEST SETUP.....                         | 15        |
| 7.4       | BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....            | 16        |
| 7.5       | SUPPORT EQUIPMENT .....                                    | 16        |
| <b>8</b>  | <b>TEST REQUIREMENTS .....</b>                             | <b>17</b> |
| 8.1       | DTS (6DB) BANDWIDTH .....                                  | 17        |
| 8.2       | MAXIMUM PEAK CONDUCTED OUTPUT POWER .....                  | 20        |
| 8.3       | MAXIMUM POWER SPECTRAL DENSITY .....                       | 23        |
| 8.4       | UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS ..... | 26        |
| 8.5       | RADIATED SPURIOUS EMISSION .....                           | 32        |
| 8.6       | CONDUCTED EMISSIONS TEST .....                             | 59        |
| 8.7       | ANTENNA APPLICATION .....                                  | 62        |
| <b>9</b>  | <b>PHOTOS OF TEST SETUP .....</b>                          | <b>63</b> |
| <b>10</b> | <b>PHOTOS OF THE EUT .....</b>                             | <b>66</b> |

## 1 TEST RESULT CERTIFICATION

Applicant: Fantem Technologies(Shenzhen) Co.,Ltd  
5th Floor, Yingtang Building, South 5th Road, HI-tech Park, Nanshan District,  
Shenzhen, Guangdong, China, 518057

Manufacturer: Fantem Technologies(Shenzhen) Co.,Ltd  
North, 3/F, Yitao Technology Industrial Park, Baihua Yuan Rd., The Second Industrial  
Area, Guangming Sub-district Office, Guangming New District, Shenzhen,  
Guangdong, China

EUT Description: Touch, Infinity Dock

Model Number: FT102-Z, FT115-Z

File Number: ES161013031E3

Date of Test: October 15, 2016 to October 31, 2016

Measurement Procedure Used:

| APPLICABLE STANDARDS                                          |             |
|---------------------------------------------------------------|-------------|
| STANDARD                                                      | TEST RESULT |
| FCC 47 CFR Part 2, Subpart J<br>FCC 47 CFR Part 15, Subpart C | PASS        |

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report

Date of Test : October 15, 2016 to October 31, 2016

Prepared by : Joanna Jiao  
Joanna Jiao/Editor

Reviewer : Joe Xia  
Joe Xia/Supervisor

Approved & Authorized Signer : Lisa Wang  
Lisa Wang/Manager



## 2 EUT TECHNICAL DESCRIPTION

| Characteristics                      | Description                                                                                                                                                     |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Device Type</b>                   | Bluetooth 4.0 with classic model                                                                                                                                |
| <b>Data Rate</b>                     | 1Mbps for BT v2.0/v2.1/v3.0 BR GFSK modulation<br>2Mbps for BT v2.0/v2.1/v3.0 EDR pi/4-DQPSK modulation<br>3Mbps for BT v2.0/v2.1/v3.0 EDR 8DPSK modulation     |
| <b>Modulation:</b>                   | GFSK modulation for BT v2.0/v2.1/v3.0 BR(1Mbps)<br>pi/4-DQPSK modulation for BT v2.0/v2.1/v3.0 EDR(2Mbps)<br>8DPSK modulation for BT v2.0/v2.1/v3.0 EDR (3Mbps) |
| <b>Operating Frequency Range(s):</b> | 2402-2480MHz for BT v2.0 BR /2.0+EDR;<br>2402-2480MHz for BT v2.1 BR /2.1+EDR;<br>2402-2480MHz for BT v3.0 BR /3.0+ EDR;                                        |
| <b>Number of Channels:</b>           | 79 channels for BT v2.0/v2.1/v3.0 BR;<br>79 channels for BT v2.0/v2.1/v3.0 EDR;                                                                                 |
| <b>Transmit Power Max:</b>           | 4.330dBm for BT v2.0/v2.1/v3.0 EDR;<br>4.864dBm for BT v2.0/v2.1/v3.0 BR;                                                                                       |
| <b>Antenna Type :</b>                | FPC Antenna                                                                                                                                                     |
| <b>Antenna Gain:</b>                 | 1.43dBi;                                                                                                                                                        |
| <b>Power supply:</b>                 | <input checked="" type="checkbox"/> DC supply:<br>DC 3.8/4000mAh from Li-ion Battery and DC 5V from USB Port                                                    |
|                                      | <input checked="" type="checkbox"/> Adapter supply:<br>Model: G101U-050200B-1<br>Input: 100-240V~, 50-60Hz, 0.25A<br>Output: DC 5V, 2A                          |

**Note:** for more details, please refer to the User's manual of the EUT.

| Characteristics           | Description                                                                                                                            |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Device Type               | Bluetooth 4.0 with BLE model                                                                                                           |
| Data Rate                 | 1Mbps;                                                                                                                                 |
| Modulation                | GFSK;                                                                                                                                  |
| Operating Frequency Range | 2402-2480MHz                                                                                                                           |
| Number of Channels        | 40 Channels                                                                                                                            |
| Transmit Power Max        | -2.599dBm for BT;                                                                                                                      |
| Antenna Type              | FPC Antenna                                                                                                                            |
| Antenna Gain              | 1.43dBi                                                                                                                                |
| Power supply:             | <input checked="" type="checkbox"/> DC supply:<br>DC 3.8/4000mAh from Li-ion Battery and DC 5V from USB Port                           |
|                           | <input checked="" type="checkbox"/> Adapter supply:<br>Model: G101U-050200B-1<br>Input: 100-240V~, 50-60Hz, 0.25A<br>Output: DC 5V, 2A |

**Note:** for more details, please refer to the User's manual of the EUT.

| Characteristics                 | Description                                                                                                                                                                                                                                                         |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Device Type                     | Wifi 2.4G Device                                                                                                                                                                                                                                                    |
| IEEE 802.11 WLAN Mode Supported | <input checked="" type="checkbox"/> 802.11b(20MHz bandwidth)<br><input checked="" type="checkbox"/> 802.11g(20MHz bandwidth)<br><input checked="" type="checkbox"/> 802.11n(20MHz bandwidth)<br><input checked="" type="checkbox"/> 802.11n(40MHz bandwidth)        |
| Data Rate                       | <input checked="" type="checkbox"/> 802.11 b:1,2,5.5,11Mbps<br><input checked="" type="checkbox"/> 802.11 g:6,9,12,18,24,36,48,54Mbps<br><input checked="" type="checkbox"/> 802.11n(HT20):MCS0-MCS7<br><input checked="" type="checkbox"/> 802.11n(HT40):MCS0-MCS7 |
| MIMO Mode                       | N/A                                                                                                                                                                                                                                                                 |
| Modulation                      | DSSS with DBPSK/DQPSK/CCK for 802.11b<br>OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n                                                                                                                                                                              |
| Operating Frequency Range       | <input checked="" type="checkbox"/> 2412-2462MHz for 802.11b/g<br><input checked="" type="checkbox"/> 2412-2462MHz for 802.11n(HT20)<br><input checked="" type="checkbox"/> 2422-2452MHz for 802.11n(HT40)                                                          |
| Number of Channels              | <input checked="" type="checkbox"/> 11 channels for 802.11b/g<br><input checked="" type="checkbox"/> 11 channels for 802.11n(HT20)<br><input checked="" type="checkbox"/> 7 channels for 802.11n(HT40)                                                              |
| Transmit Power Max              | 16.18dBm for 802.11b<br>14.23dBm for 802.11g<br>14.24dBm for 802.11n(HT20)<br>14.22dBm for 802.11n(HT40)                                                                                                                                                            |
| Antenna Type                    | FPC Antenna                                                                                                                                                                                                                                                         |
| Smart system                    | <input checked="" type="checkbox"/> SISO for 802.11b/g/n<br><input type="checkbox"/> MIMO for 802.11n                                                                                                                                                               |
| Antenna Gain                    | 1.43dBi                                                                                                                                                                                                                                                             |
| Power supply:                   | <input checked="" type="checkbox"/> DC supply:<br>DC 3.8/4000mAh from Li-ion Battery and DC 5V from USB Port                                                                                                                                                        |
|                                 | <input checked="" type="checkbox"/> Adapter supply:<br>Model: G101U-050200B-1<br>Input: 100-240V~, 50-60Hz, 0.25A<br>Output: DC 5V, 2A                                                                                                                              |

**Note:** for more details, please refer to the User's manual of the EUT.

| Characteristics               | Description                                                                                                                            |
|-------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Device Type                   | NFC                                                                                                                                    |
| Modulation:                   | ASK                                                                                                                                    |
| Operating Frequency Range(s): | 13.56MHz                                                                                                                               |
| Number of Channels:           | 1 channel                                                                                                                              |
| Antenna Type :                | Induction coil                                                                                                                         |
| Power supply:                 | <input checked="" type="checkbox"/> DC supply:<br>DC 3.8/4000mAh from Li-ion Battery and DC 5V from USB Port                           |
|                               | <input checked="" type="checkbox"/> Adapter supply:<br>Model: G101U-050200B-1<br>Input: 100-240V~, 50-60Hz, 0.25A<br>Output: DC 5V, 2A |

**Note:** for more details, please refer to the User's manual of the EUT.

### 3 SUMMARY OF TEST RESULT

| FCC Part Clause                                                                                                                                                                                                                                                    | Test Parameter                                                   | Verdict | Remark |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|---------|--------|
| 15.247(a)(2)                                                                                                                                                                                                                                                       | DTS (6dB) Bandwidth                                              | PASS    |        |
| 15.247(b)(3)                                                                                                                                                                                                                                                       | Maximum Peak Conducted Output Power                              | PASS    |        |
| 15.247(e)                                                                                                                                                                                                                                                          | Maximum Power Spectral Density Level                             | PASS    |        |
| 15.247(d)                                                                                                                                                                                                                                                          | Unwanted Emission Into Non-Restricted Frequency Bands            | PASS    |        |
| 15.247(d)<br>15.209                                                                                                                                                                                                                                                | Unwanted Emission Into Restricted Frequency Bands<br>(conducted) | PASS    |        |
| 15.247(d)<br>15.209<br>15.205                                                                                                                                                                                                                                      | Radiated Spurious Emission                                       | PASS    |        |
| 15.207                                                                                                                                                                                                                                                             | Conducted Emission Test                                          | PASS    |        |
| 15.247(b)                                                                                                                                                                                                                                                          | Antenna Application                                              | PASS    |        |
|                                                                                                                                                                                                                                                                    |                                                                  |         |        |
| NOTE1: N/A (Not Applicable)                                                                                                                                                                                                                                        |                                                                  |         |        |
| NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits. |                                                                  |         |        |

#### RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AKHBFT102 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 4 TEST METHODOLOGY

### 4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v03r04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

### 4.2 MEASUREMENT EQUIPMENT USED

#### 4.2.1 Conducted Emission Test Equipment

| EQUIPMENT TYPE     | MFR             | MODEL NUMBER | SERIAL NUMBER  | LAST CAL.    |
|--------------------|-----------------|--------------|----------------|--------------|
| Test Receiver      | Rohde & Schwarz | ESCI         | 26115-010-0027 | May 28, 2016 |
| L.I.S.N.           | Rohde & Schwarz | ENV216       | 101161         | May 28, 2016 |
| 50Ω Coaxial Switch | Anritsu         | MP59B        | 6100175589     | May 29, 2016 |
| Voltage Probe      | Rohde & Schwarz | ESH2-Z3      | 100122         | May 29, 2016 |

#### 4.2.2 Radiated Emission Test Equipment

| EQUIPMENT TYPE    | MFR             | MODEL NUMBER       | SERIAL NUMBER | LAST CAL.    |
|-------------------|-----------------|--------------------|---------------|--------------|
| EMI Test Receiver | Rohde & Schwarz | ESU                | 1302.6005.26  | May 29, 2016 |
| Pre-Amplifier     | HP              | 8447D              | 2944A07999    | May 28, 2016 |
| Pre-Amplifier     | A.H.            | PAM-0126           | 1415261       | May 28, 2016 |
| Bilog Antenna     | Schwarzbeck     | VULB9163           | 142           | May 28, 2016 |
| Loop Antenna      | Schwarzbeck     | FMZB 1519          | 1519-012      | May 28, 2016 |
| Horn Antenna      | Schwarzbeck     | BBHA 9170          | BBHA9170399   | May 29, 2016 |
| Horn Antenna      | Schwarzbeck     | BBHA 9120          | 1178          | May 29, 2016 |
| Cable             | Schwarzbeck     | AK9513             | ACRX1         | May 29, 2016 |
| Cable             | Rosenberger     | N/A                | FP2RX2        | May 29, 2016 |
| Cable             | Schwarzbeck     | AK9513             | CRPX1         | May 29, 2016 |
| Cable             | Schwarzbeck     | AK9513             | CRRX2         | May 29, 2016 |
| Cable             | H+B             | 0.5M<br>SF104-26.5 | 289147/4      | May 29, 2016 |
| Cable             | H+B             | 3M<br>SF104-26.5   | 295838/4      | May 29, 2016 |
| Cable             | H+B             | 6M<br>SF104-26.5   | 295840/4      | May 29, 2016 |

#### 4.2.3 Radio Frequency Test Equipment

| EQUIPMENT TYPE    | MFR     | MODEL NUMBER | SERIAL NUMBER | LAST CAL.    |
|-------------------|---------|--------------|---------------|--------------|
| Spectrum Analyzer | Agilent | E4407B       | 88156318      | May 29, 2016 |
| Signal Analyzer   | Agilent | N9010A       | My53470879    | May 29, 2016 |
| Power meter       | Anritsu | ML2495A      | 0824006       | May 29, 2016 |
| Power sensor      | Anritsu | MA2411B      | 0738172       | May 29, 2016 |

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### 4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (Bluetooth V4.0:1Mbps) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for Bluetooth V4.0:

| Channel                                                         | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|-----------------------------------------------------------------|-----------------|---------|-----------------|---------|-----------------|
| 0                                                               | 2402            | 19      | 2440            | ...     | ...             |
| 1                                                               | 2404            | 20      | 2442            | 37      | 2476            |
| 2                                                               | 2406            | 21      | 2444            | 38      | 2478            |
| ...                                                             | ...             | ...     | ...             | 39      | 2480            |
| Note: $f_c = 2402\text{MHz} + k \times 2\text{MHz}$ $k=1$ to 39 |                 |         |                 |         |                 |

Test Frequency and channel for Bluetooth V4.0:

| Lowest Frequency |                 | Middle Frequency |                 | Highest Frequency |                 |
|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| Channel          | Frequency (MHz) | Channel          | Frequency (MHz) | Channel           | Frequency (MHz) |
| 0                | 2402            | 19               | 2440            | 39                | 2480            |

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

### 5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29

The certificate is valid until 2016.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.4

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, April 17, 2013

The Certificate Registration Number is 709623.

Accredited by FCC, July 24, 2013

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 29, 2012

The Certificate Registration Number is 4480A.

Name of Firm

: EMTEK (SHENZHEN) CO., LTD..

Site Location

: Bldg 69, Majialong Industry Zone,  
Nanshan District, Shenzhen, Guangdong, China

## 6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


| Parameter                      | Uncertainty               |
|--------------------------------|---------------------------|
| Radio Frequency                | $\pm 1 \times 10^{-5}$    |
| Maximum Peak Output Power Test | $\pm 1.0\text{dB}$        |
| Conducted Emissions Test       | $\pm 2.0\text{dB}$        |
| Radiated Emission Test         | $\pm 2.0\text{dB}$        |
| Power Density                  | $\pm 2.0\text{dB}$        |
| Occupied Bandwidth Test        | $\pm 1.0\text{dB}$        |
| Band Edge Test                 | $\pm 3\text{dB}$          |
| All emission, radiated         | $\pm 3\text{dB}$          |
| Antenna Port Emission          | $\pm 3\text{dB}$          |
| Temperature                    | $\pm 0.5^{\circ}\text{C}$ |
| Humidity                       | $\pm 3\%$                 |

Measurement Uncertainty for a level of Confidence of 95%

## 7 SETUP OF EQUIPMENT UNDER TEST

### 7.1 RADIO FREQUENCY TEST SETUP 1

The Bluetooth 4.0 DTS component's antenna port(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



### 7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the the specified distance from the EUT.

Above 30MHz:


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

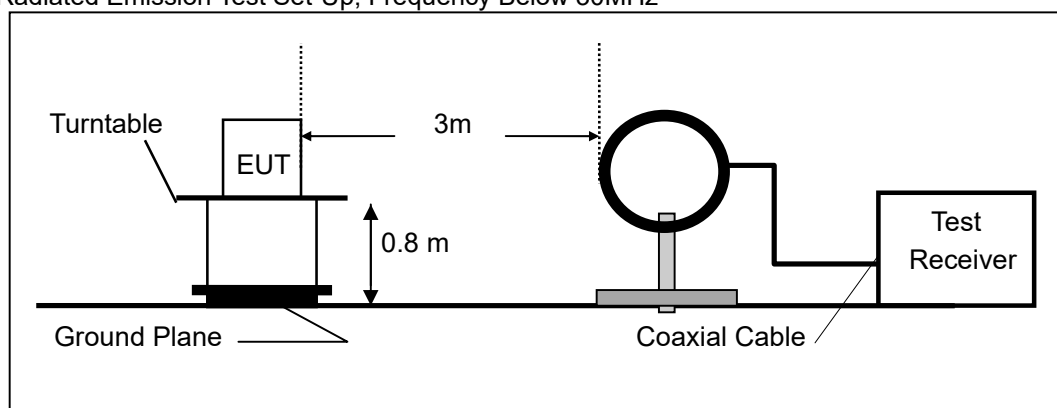

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

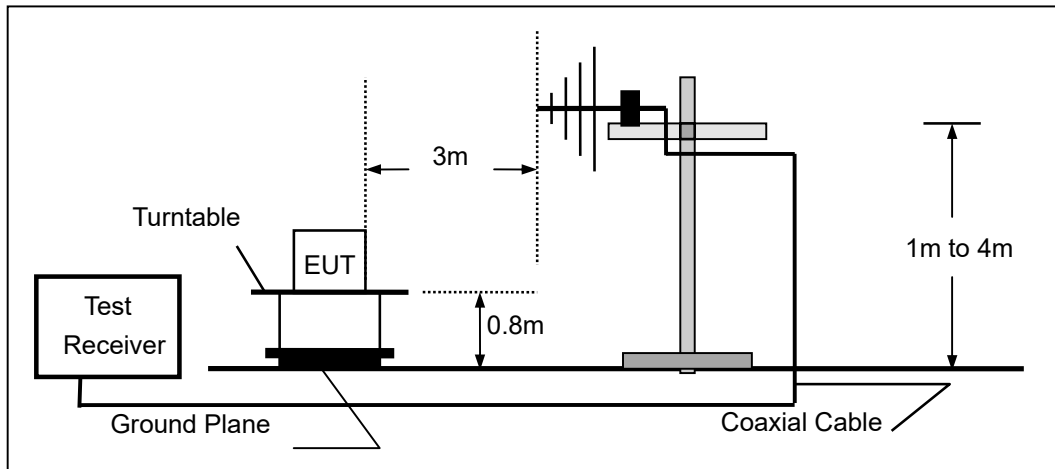

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

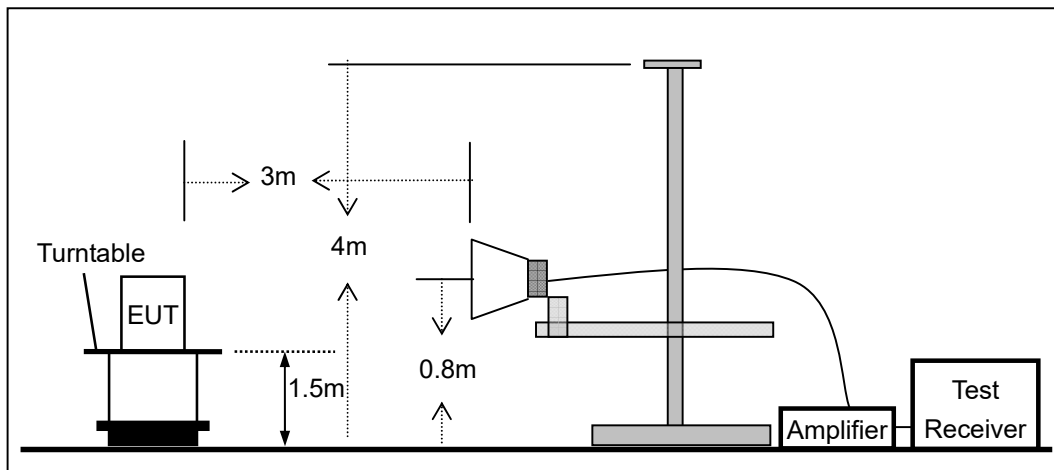


### 7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.

According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

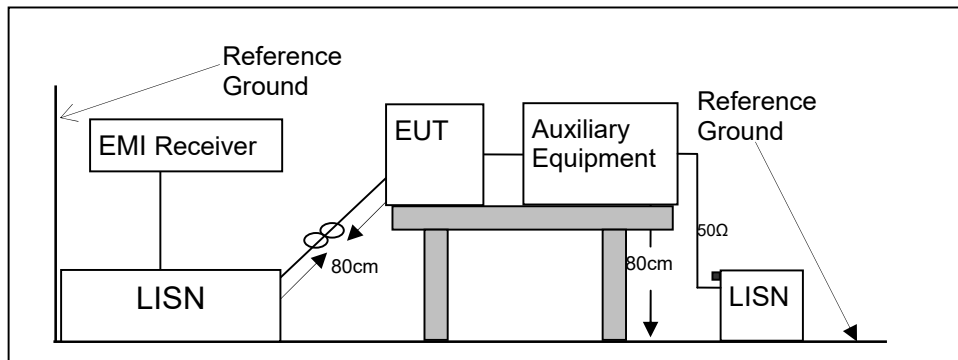

#### 7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

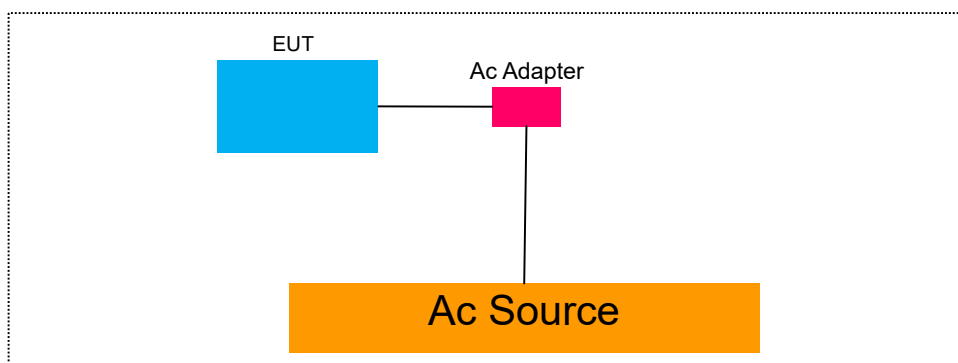

#### 7.5 SUPPORT EQUIPMENT

| Item | Equipment | Mfr/Brand | Model/Type No. | FCC ID | Series No. | Note |
|------|-----------|-----------|----------------|--------|------------|------|
| N/A  | N/A       | N/A       | N/A            | N/A    | N/A        | N/A  |

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 8 TEST REQUIREMENTS

### 8.1 DTS (6DB) BANDWIDTH

#### 8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 DTS 01 Meas. Guidance v03r04

#### 8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

#### 8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup

#### 8.1.4 Test Procedure

The EUT was operating in Bluetooth 4.0DTS mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

### Test Results


|               |      |             |                  |
|---------------|------|-------------|------------------|
| Temperature : | 24°C | Test Date : | October 20, 2016 |
| Humidity :    | 53 % | Test By:    | King Kong        |

| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Bandwidth (kHz) | Limit (kHz) | Verdict |
|----------------|----------------|-------------------------|-----------------------------|-------------|---------|
| GFSK           | 0              | 2402                    | 696.9                       | >500        | PASS    |
|                | 19             | 2440                    | 698.2                       | >500        | PASS    |
|                | 39             | 2480                    | 694.1                       | >500        | PASS    |


|            |                     |
|------------|---------------------|
| Test Model | DTS (6dB) Bandwidth |
|            | GFSK                |
|            | Channel 0: 2402MHz  |

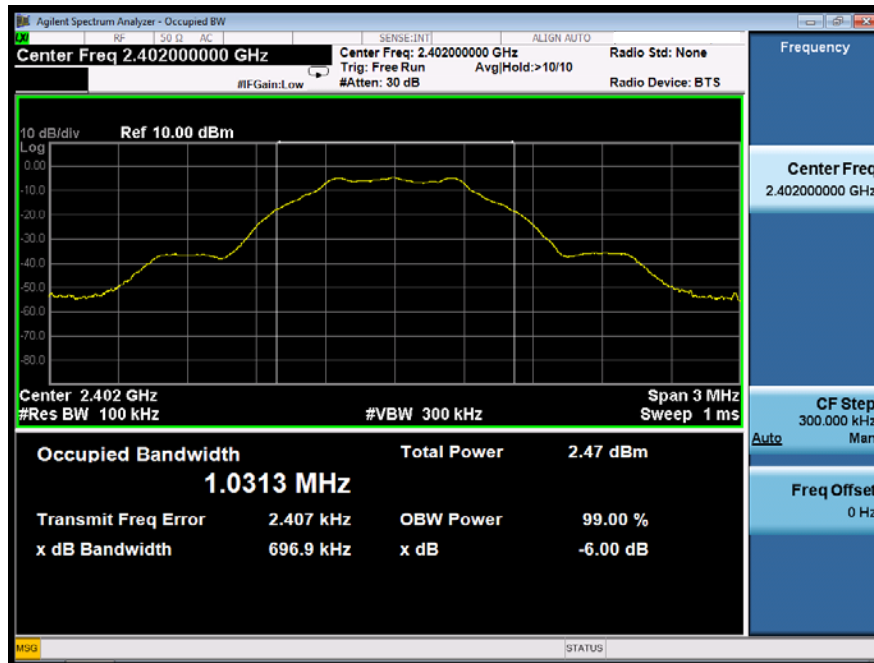

|            |                     |
|------------|---------------------|
| Test Model | DTS (6dB) Bandwidth |
|            | GFSK                |
|            | Channel 19: 2440MHz |

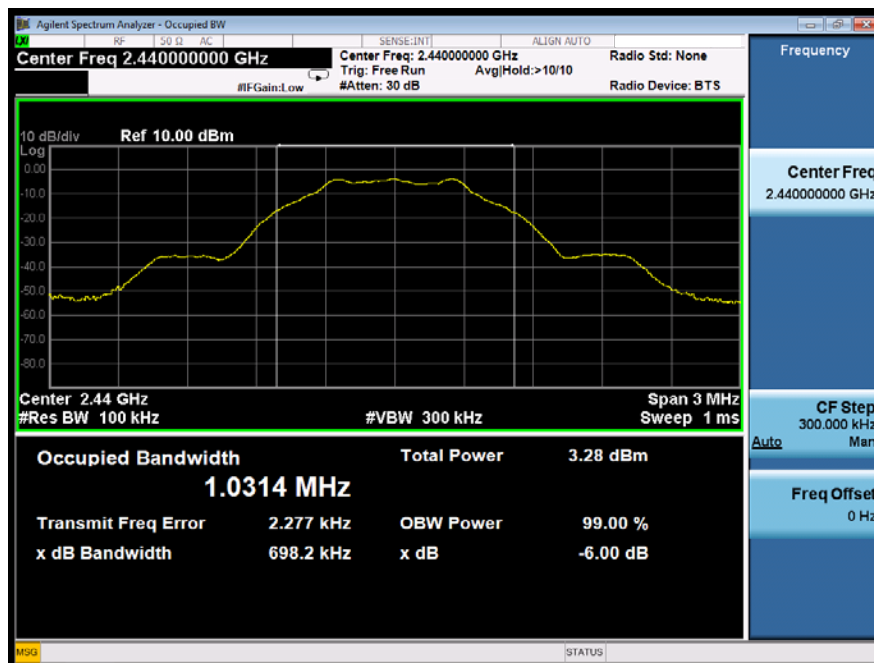

|            |                     |  |
|------------|---------------------|--|
| Test Model | DTS (6dB) Bandwidth |  |
|            | GFSK                |  |
|            | Channel 39: 2480MHz |  |

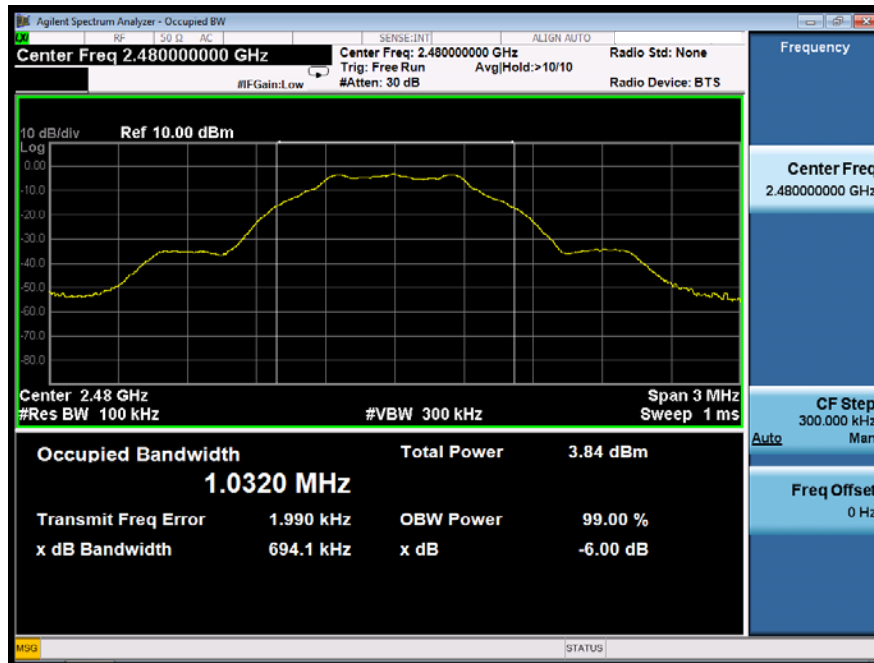

## 8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 DTS 01 Meas. Guidance v03r04

### 8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

### 8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 8.2.4 Test Procedure

#### ■ According to FCC Part 15.247(b)(3)

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. For smart system, Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Set the RBW  $\geq$  DTS bandwidth (about 1MHz).

Set VBW = 3\*RBW (about 3MHz)

Set the span  $\geq$  3\*RBW

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize. Use peak marker function to determine the peak amplitude level.

#### ■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Results


|              |      |            |                  |
|--------------|------|------------|------------------|
| Temperature: | 24°C | Test Date: | October 20, 2016 |
| Humidity:    | 53 % | Test By:   | King Kong        |

| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Level (dBm) | Limit (dBm) | Verdict |
|----------------|----------------|-------------------------|-------------------------|-------------|---------|
| GFSK           | 0              | 2402                    | -4.010                  | 30          | PASS    |
|                | 19             | 2440                    | -3.045                  | 30          | PASS    |
|                | 39             | 2480                    | -2.599                  | 30          | PASS    |

|            |                                |
|------------|--------------------------------|
| Test Model | Maximum Conducted Output Power |
|            | GFSK                           |
|            | Channel 0: 2402MHz             |



|            |                                |
|------------|--------------------------------|
| Test Model | Maximum Conducted Output Power |
|            | GFSK                           |
|            | Channel 19: 2440MHz            |

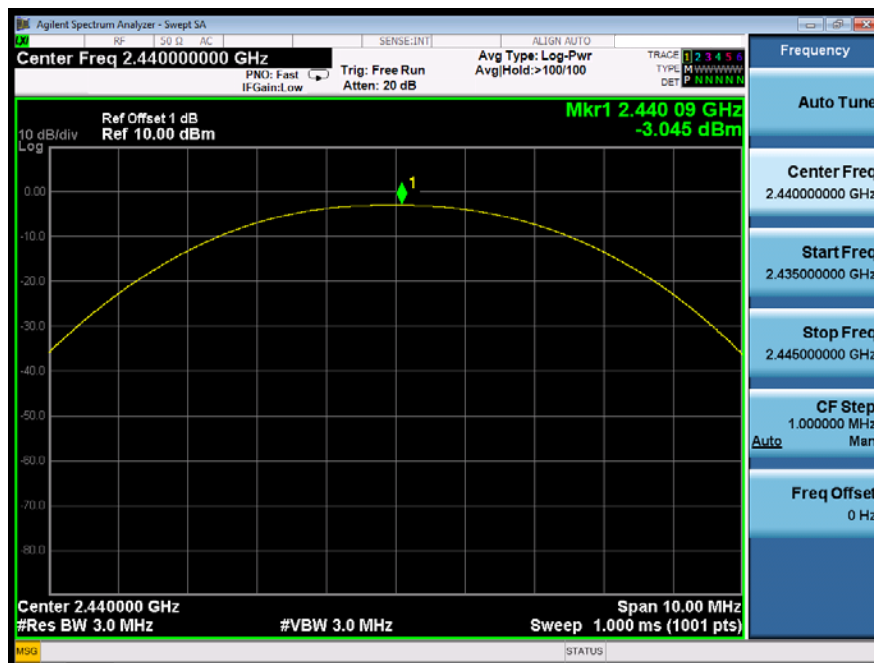

|            |                                |  |
|------------|--------------------------------|--|
| Test Model | Maximum Conducted Output Power |  |
|            | GFSK                           |  |
|            | Channel 39: 2480MHz            |  |



## 8.3 MAXIMUM POWER SPECTRAL DENSITY

### 8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 DTS 01 Meas. Guidance v03r04

### 8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup

### 8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

### 8.3.5 Test Results

|              |       |            |                  |
|--------------|-------|------------|------------------|
| Temperature: | 24 °C | Test Date: | October 20, 2016 |
| Humidity:    | 53 %  | Test By:   | King Kong        |

| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Level (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|----------------|----------------|-------------------------|------------------------------|------------------|---------|
| GFSK           | 0              | 2402                    | -19.242                      | 8                | PASS    |
|                | 19             | 2440                    | -18.414                      | 8                | PASS    |
|                | 39             | 2480                    | -17.879                      | 8                | PASS    |

Note: N/A


Test Model

Power Spectral Density  
GFSK  
Channel 0: 2402MHz



Test Model

Power Spectral Density  
GFSK  
Channel 19: 2440MHz

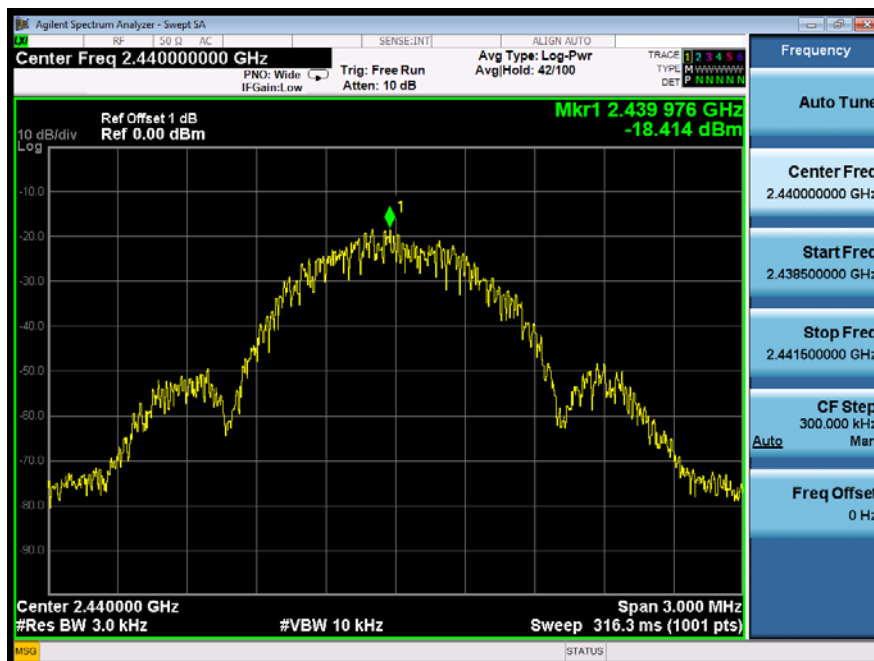

|            |                        |
|------------|------------------------|
| Test Model | Power Spectral Density |
|            | GFSK                   |
|            | Channel 39: 2480MHz    |



## **8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS**

### **8.4.1 Applicable Standard**

According to FCC Part 15.247(d) and KDB 558074 DTS 01 Meas. Guidance v03r04

### **8.4.2 Conformance Limit**

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### **8.4.3 Test Configuration**

Test according to clause 7.1 radio frequency test setup

### **8.4.4 Test Procedure**

The transmitter output (antenna port) was connected to the spectrum analyzer

#### **■ Reference level measurement**

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to = 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

#### **■ Emission level measurement**

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

### **8.4.5 Test Results**

|            |                                                                       |
|------------|-----------------------------------------------------------------------|
| Test Model | PSD(Power Spectral Density ) RBW=100kHz<br>GFSK<br>Channel 0: 2402MHz |
|------------|-----------------------------------------------------------------------|



|            |                                                                                    |
|------------|------------------------------------------------------------------------------------|
| Test Model | Unwanted Emissions in non-restricted frequency bands<br>GFSK<br>Channel 0: 2402MHz |
|------------|------------------------------------------------------------------------------------|



|            |                    |  |
|------------|--------------------|--|
| Test Model | Band edge          |  |
|            | GFSK               |  |
|            | Channel 0: 2402MHz |  |



Test Model

PSD(Power Spectral Density ) RBW=100kHz  
GFSK  
Channel 19: 2440MHz



Test Model

Unwanted Emissions In Non-Restricted Frequency Bands  
GFSK  
Channel 19: 2440MHz



Test Model

PSD(Power Spectral Density ) RBW=100kHz  
GFSK  
Channel 19: 2480MHz




Test Model

Unwanted Emissions In Non-Restricted Frequency Bands  
GFSK  
Channel 39: 2480MHz



Test Model

Band edge  
GFSDK  
Channel 39: 2480MHz

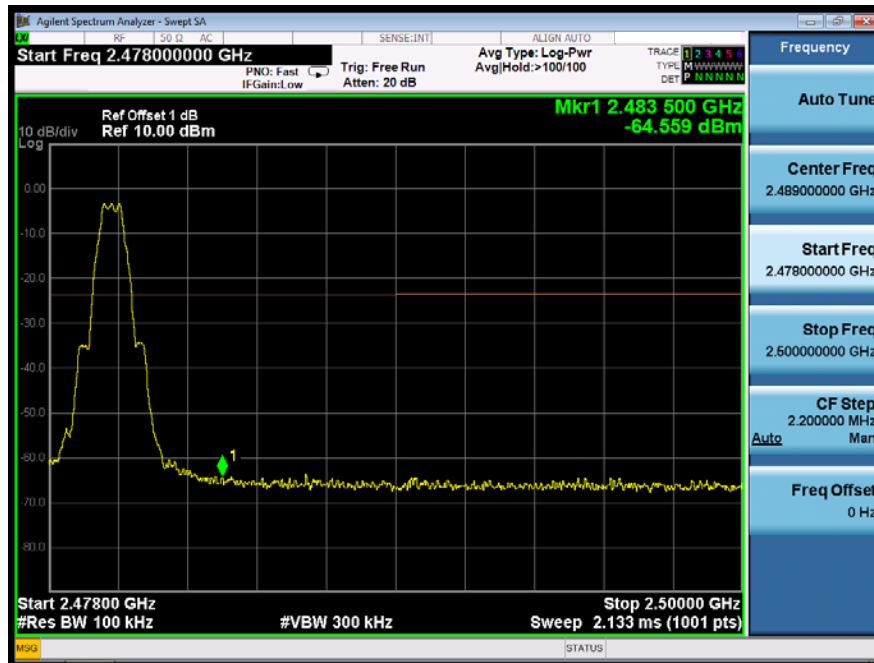

## 8.5 RADIATED SPURIOUS EMISSION

### 8.5.1 Applicable Standard

According to FCC Part 15.247(d), 15.209, 15.205 and KDB 558074 DTS 01 Meas. Guidance v03r04

### 8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009-0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490-1.705               | 2400/F(KHz)           | 20 log (uV/m)           | 30                   |
| 1.705-30                  | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

Remark :1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10\*Ig(100 [kHz]/narrower RBW [kHz]). , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

### 8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup

### 8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 8.5.5 Test Results

#### ■ Spurious Emission below 30MHz (9KHz to 150KHz)

|              |         |            |                  |
|--------------|---------|------------|------------------|
| Temperature: | 24°C    | Test Date: | October 20, 2016 |
| Humidity:    | 53 %    | Test By:   | King Kong        |
| Test mode:   | TX Mode |            |                  |

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                              | Ant.Pol.<br>H/V | Emission Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Over<br>(dB) | Result |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------|----------------------|--------------|--------|
| --                                                                                                                                                                                                                                                                                                          | --              | --                         | --                   | --           | --     |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                            |                      |              |        |


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance/ test distance})$  ( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor


■ Spurious Emission below 30MHz (150KHz to 30MHz)

|            |                                                 |  |                             |
|------------|-------------------------------------------------|--|-----------------------------|
| Test Model | Spurious Emission below 30MHz (150KHz to 30MHz) |  |                             |
|            | TX Mode                                         |  | Polarity: H                 |
|            | Temperature: 24℃                                |  | Test By: King Kong          |
|            | Humidity: 53 %                                  |  | Test Date: October 20, 2016 |

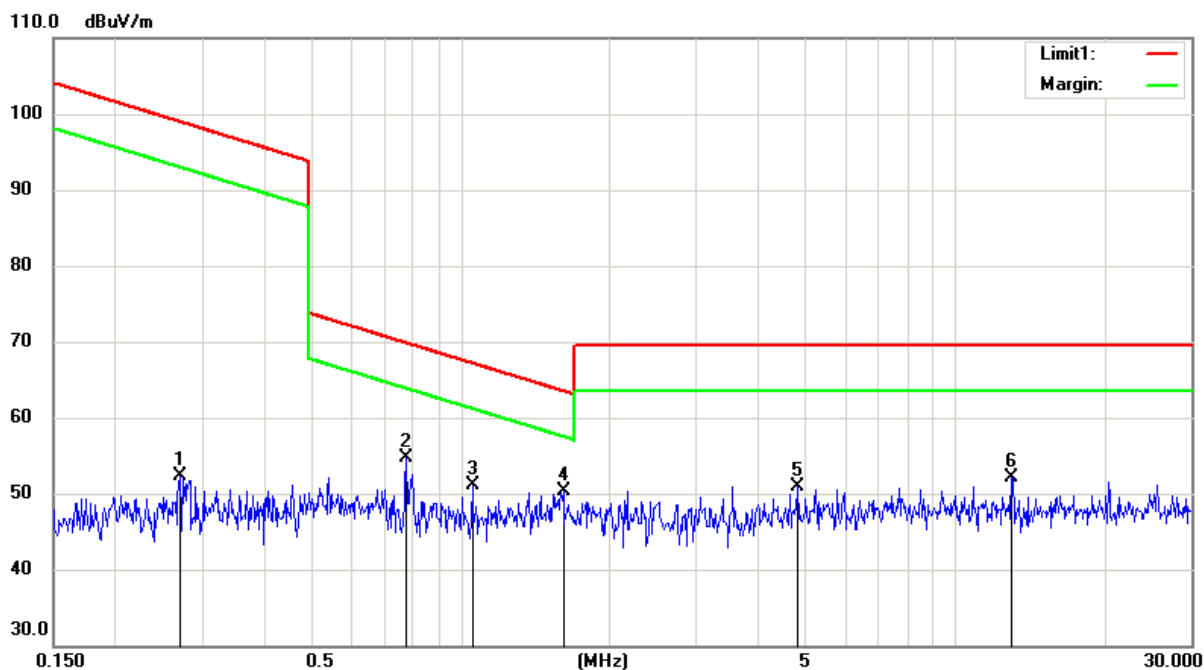

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>H/V | Emission Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Over<br>(dB) | Result |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------|----------------------|--------------|--------|
| --                                                                                                                                                                                                                                                                                                        | --              | --                         | --                   | --           | --     |
| 0.78                                                                                                                                                                                                                                                                                                      | H               | 54.65                      | 69.83                | -15.18       | Pass   |
| 1.05                                                                                                                                                                                                                                                                                                      | H               | 51.16                      | 67.17                | -16.01       | Pass   |
| 1.61                                                                                                                                                                                                                                                                                                      | H               | 50.26                      | 63.49                | -13.23       | Pass   |
| 4.80                                                                                                                                                                                                                                                                                                      | H               | 50.89                      | 69.50                | -18.61       | Pass   |
| 12.99                                                                                                                                                                                                                                                                                                     | H               | 52.13                      | 69.50                | -17.37       | Pass   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                            |                      |              |        |


|            |                                                 |  |                             |
|------------|-------------------------------------------------|--|-----------------------------|
| Test Model | Spurious Emission below 30MHz (150KHz to 30MHz) |  |                             |
|            | TX Mode                                         |  | Polarity: V                 |
|            | Temperature: 24°C                               |  | Test By: King Kong          |
|            | Humidity: 53 %                                  |  | Test Date: October 20, 2016 |

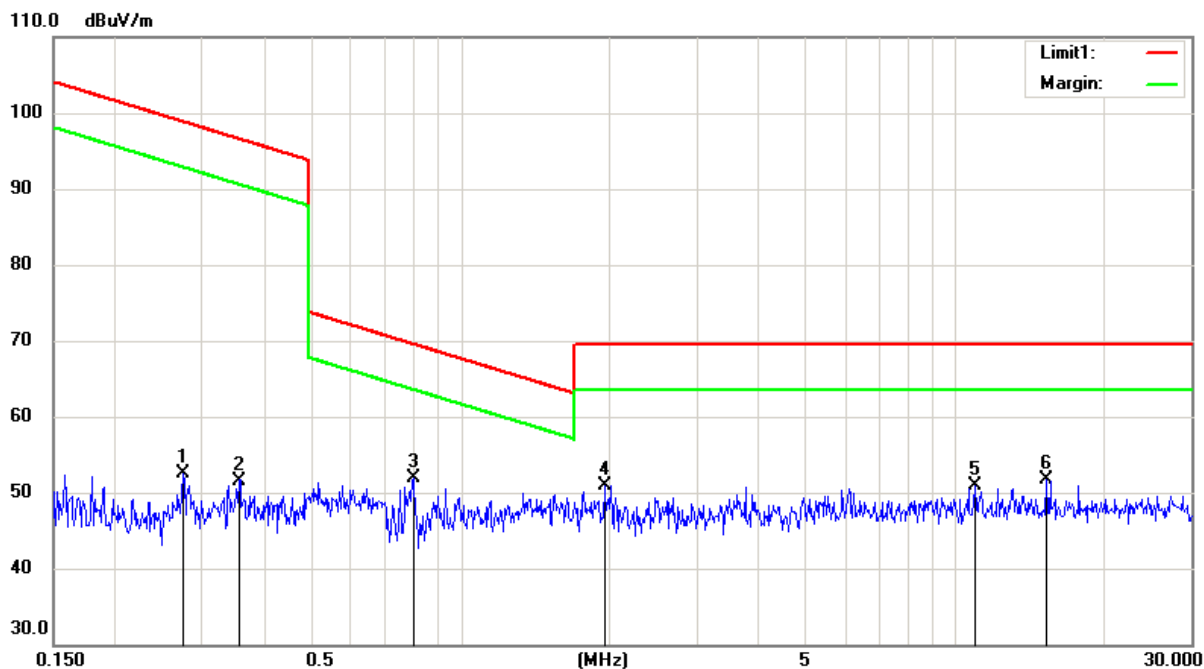

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Po .<br>H/V | Emission Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Over<br>(dB) | Result |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----------------------------|----------------------|--------------|--------|
| --                                                                                                                                                                                                                                                                                                        | --              | --                         | --                   | --           | --     |
| --                                                                                                                                                                                                                                                                                                        | --              | --                         | --                   | --           | --     |
| 0.80                                                                                                                                                                                                                                                                                                      | V               | 51.83                      | 69.55                | -17.72       | Pass   |
| 1.95                                                                                                                                                                                                                                                                                                      | V               | 50.86                      | 69.50                | -18.64       | Pass   |
| 10.96                                                                                                                                                                                                                                                                                                     | V               | 50.89                      | 69.50                | -18.61       | Pass   |
| 15.31                                                                                                                                                                                                                                                                                                     | V               | 51.63                      | 69.50                | -17.87       | Pass   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                            |                      |              |        |

■ Spurious Emission below 1GHz (30MHz to 1GHz)


|                                              |                  |                             |
|----------------------------------------------|------------------|-----------------------------|
| Spurious Emission below 1GHz (30MHz to 1GHz) |                  |                             |
| Test Model                                   | GFSK             | Polarity: H                 |
|                                              | 2402MHz          | Test By: King Kong          |
|                                              | Temperature: 24℃ | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %   |                             |

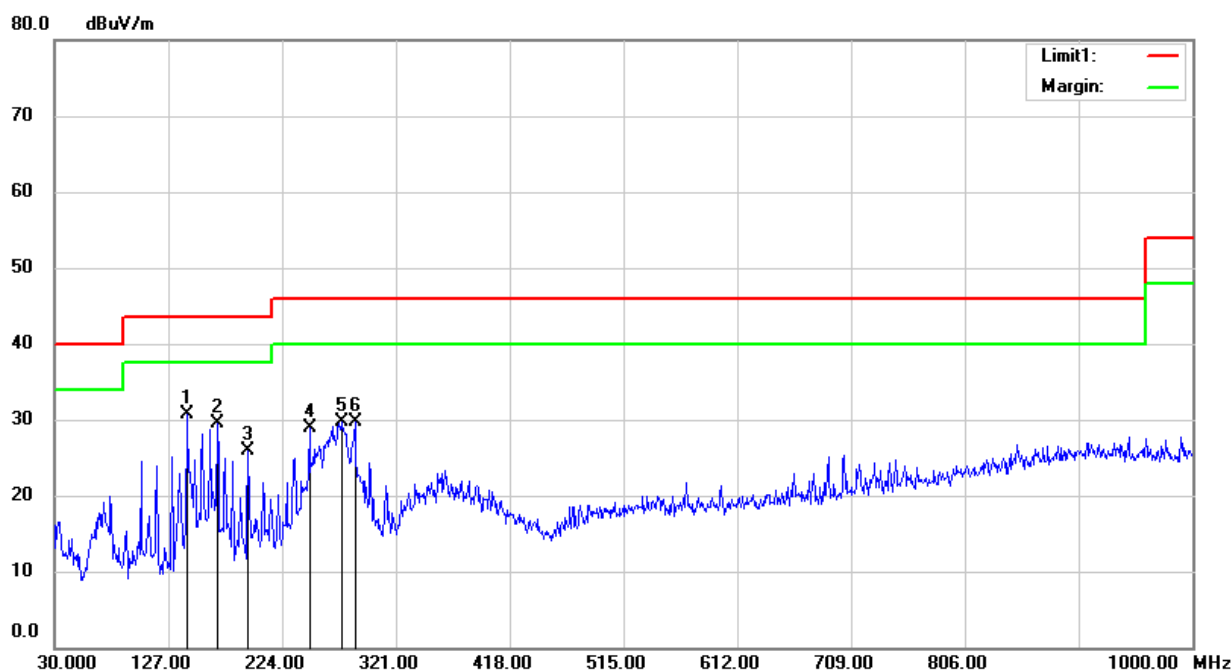

| Freq.<br>(MHz) | Ant.Pol.<br>/V | Emission<br>Level(dBuV/m) | Limit 3m<br>(dBuV/m) | Over(dB) |
|----------------|----------------|---------------------------|----------------------|----------|
| 142.5          | H              | 30.70                     | 43.50                | -12.80   |
| 168.71         | H              | 29.59                     | 43.50                | -13.91   |
| 194.90         | H              | 25.98                     | 43.50                | -17.52   |
| 247.28         | H              | 28.97                     | 46.0                 | -17.03   |
| 274.44         | H              | 29.62                     | 46.00                | -16.38   |
| 286.08         | H              | 29.63                     | 46.00                | -16.37   |


**Note:** (1)Emission Level= Reading Level+Probe Factor +Cable Loss.  
(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

|                                              |                    |                             |
|----------------------------------------------|--------------------|-----------------------------|
| Spurious Emission below 1GHz (30MHz to 1GHz) |                    |                             |
| Test Model                                   | GFSK               | Polarity: V                 |
|                                              | 2402MHz            | Test By: King Kong          |
|                                              | Temperature: 24 °C | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %     |                             |

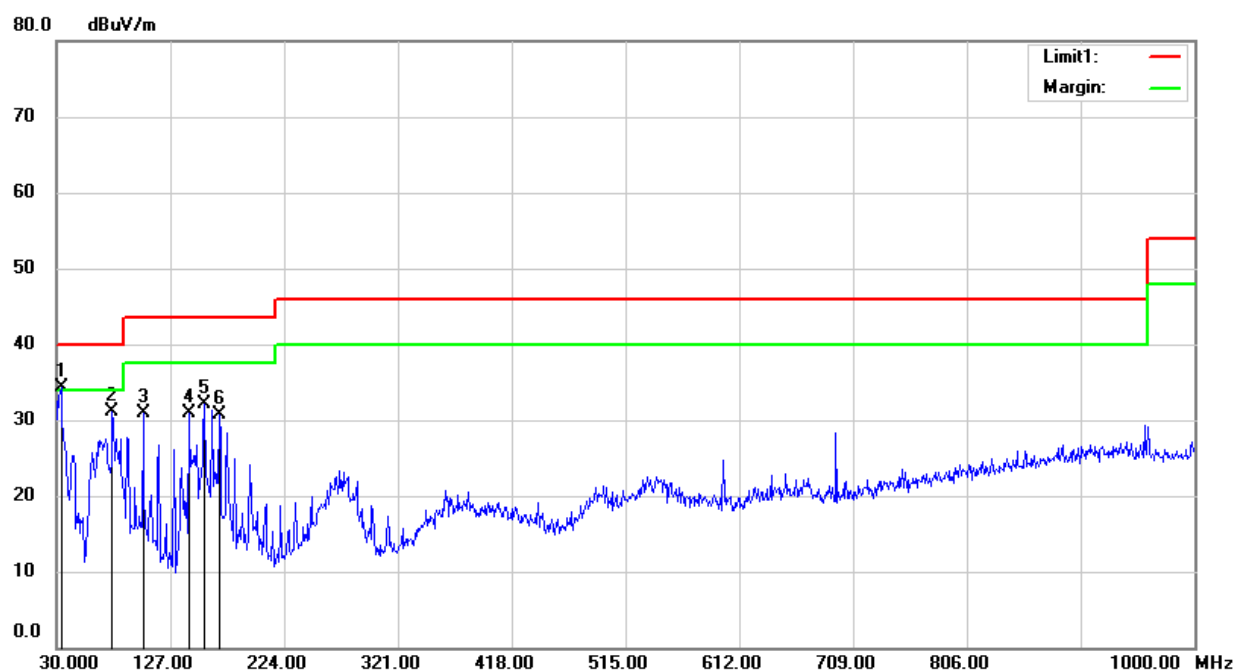


| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>/V | Emission<br>Level(dBuV/m) | Limit 3m<br>(dBuV/m) | Over(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------------------------|----------------------|----------|
| 33.88                                                                                                                                                                                                                                                                                                     | V              | 34.30                     | 40.00                | -5.70    |
| 77.53                                                                                                                                                                                                                                                                                                     | V              | 31.16                     | 40.00                | -8.84    |
| 103.72                                                                                                                                                                                                                                                                                                    | V              | 30.98                     | 43.50                | -12.52   |
| 142.52                                                                                                                                                                                                                                                                                                    | V              | 30.91                     | 43.50                | -12.59   |
| 156.10                                                                                                                                                                                                                                                                                                    | V              | 32.07                     | 43.50                | -11.43   |
| 168.71                                                                                                                                                                                                                                                                                                    | V              | 30.73                     | 43.50                | -12.77   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                |                           |                      |          |

|                                              |                  |                             |
|----------------------------------------------|------------------|-----------------------------|
| Spurious Emission below 1GHz (30MHz to 1GHz) |                  |                             |
| Test Model                                   | GFSK             | Polarity: H                 |
|                                              | 2440MHz          | Test By: King Kong          |
|                                              | Temperature: 24℃ | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %   |                             |

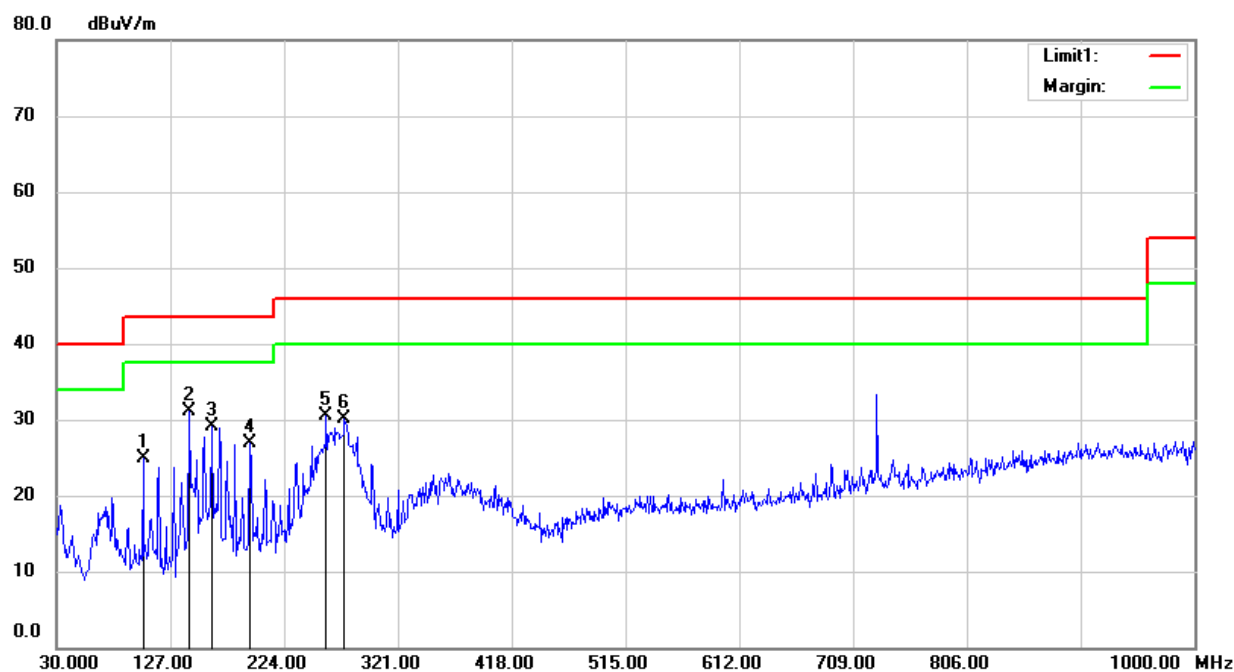


| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) | Limit 3m<br>(dBuV/m) | Over(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|----------------------|----------|
| 103.72                                                                                                                                                                                                                                                                                                    | H               | 24.86                     | 43.50                | -18.64   |
| 143.49                                                                                                                                                                                                                                                                                                    | H               | 31.12                     | 43.50                | -12.38   |
| 162.89                                                                                                                                                                                                                                                                                                    | H               | 29.17                     | 43.50                | -14.33   |
| 194.90                                                                                                                                                                                                                                                                                                    | H               | 26.87                     | 43.5                 | -16.63   |
| 259.89                                                                                                                                                                                                                                                                                                    | H               | 30.48                     | 46.00                | -15.52   |
| 275.41                                                                                                                                                                                                                                                                                                    | H               | 30.03                     | 46.00                | -15.97   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                           |                      |          |

|                                              |                  |                             |
|----------------------------------------------|------------------|-----------------------------|
| Spurious Emission below 1GHz (30MHz to 1GHz) |                  |                             |
| Test Model                                   | GFSK             | Polarity: V                 |
|                                              | 2440MHz          | Test By: King Kong          |
|                                              | Temperature: 24℃ | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %   |                             |

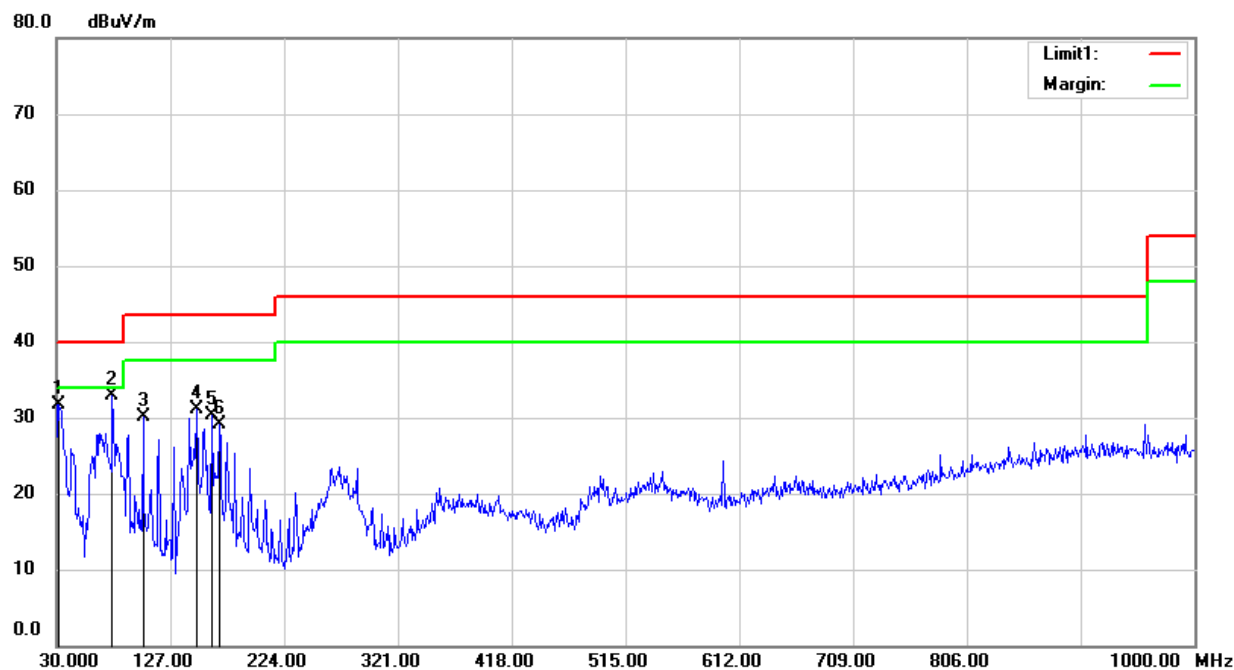


| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) | Limit 3m<br>(dBuV/m) | Over(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|----------------------|----------|
| 31.94                                                                                                                                                                                                                                                                                                     | V               | 31.69                     | 40.00                | -8.31    |
| 77.53                                                                                                                                                                                                                                                                                                     | V               | 32.83                     | 40.00                | -7.17    |
| 1 3.72                                                                                                                                                                                                                                                                                                    | V               | 30.09                     | 43.50                | -13.41   |
| 149.31                                                                                                                                                                                                                                                                                                    | V               | 31.19                     | 43.50                | -12.31   |
| 161.92                                                                                                                                                                                                                                                                                                    | V               | 30.23                     | 43.50                | -13.27   |
| 168.71                                                                                                                                                                                                                                                                                                    | V               | 29.05                     | 43.50                | -14.45   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                           |                      |          |

|                                              |                  |                             |
|----------------------------------------------|------------------|-----------------------------|
| Spurious Emission below 1GHz (30MHz to 1GHz) |                  |                             |
| Test Model                                   | GFSK             | Polarity: H                 |
|                                              | 2480MHz          | Test By: King Kong          |
|                                              | Temperature: 24℃ | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %   |                             |

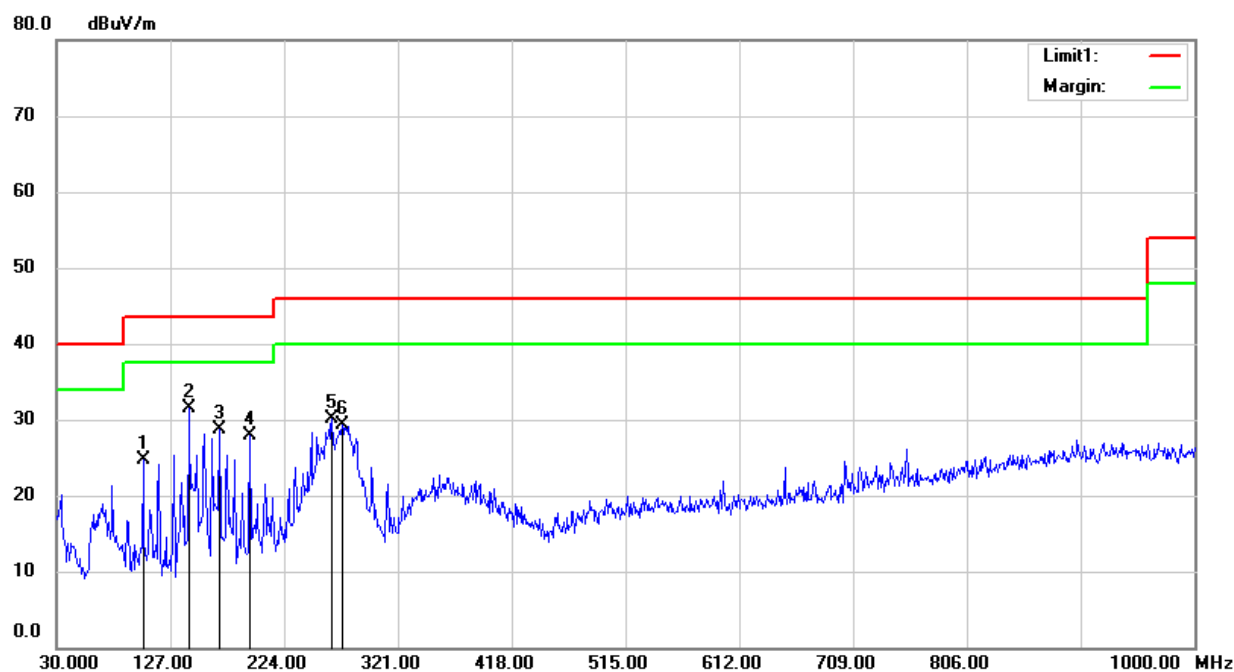

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) | Limit 3m<br>(dBuV/m) | Over(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|----------------------|----------|
| 103.72                                                                                                                                                                                                                                                                                                    | H               | 24.64                     | 43.50                | -18.86   |
| 142.52                                                                                                                                                                                                                                                                                                    | H               | 31.55                     | 43.50                | -11.95   |
| 168.71                                                                                                                                                                                                                                                                                                    | H               | 28.66                     | 43.50                | -14.84   |
| 194.90                                                                                                                                                                                                                                                                                                    | H               | 27.88                     | 43.5                 | -15.62   |
| 264.74                                                                                                                                                                                                                                                                                                    | H               | 30.03                     | 46.00                | -15.97   |
| 273.47                                                                                                                                                                                                                                                                                                    | H               | 29.39                     | 46.00                | -16.61   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                           |                      |          |


|                                              |                  |                             |
|----------------------------------------------|------------------|-----------------------------|
| Spurious Emission below 1GHz (30MHz to 1GHz) |                  |                             |
| Test Model                                   | GFSK             | Polarity: V                 |
|                                              | 2480MHz          | Test By: King Kong          |
|                                              | Temperature: 24℃ | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %   |                             |

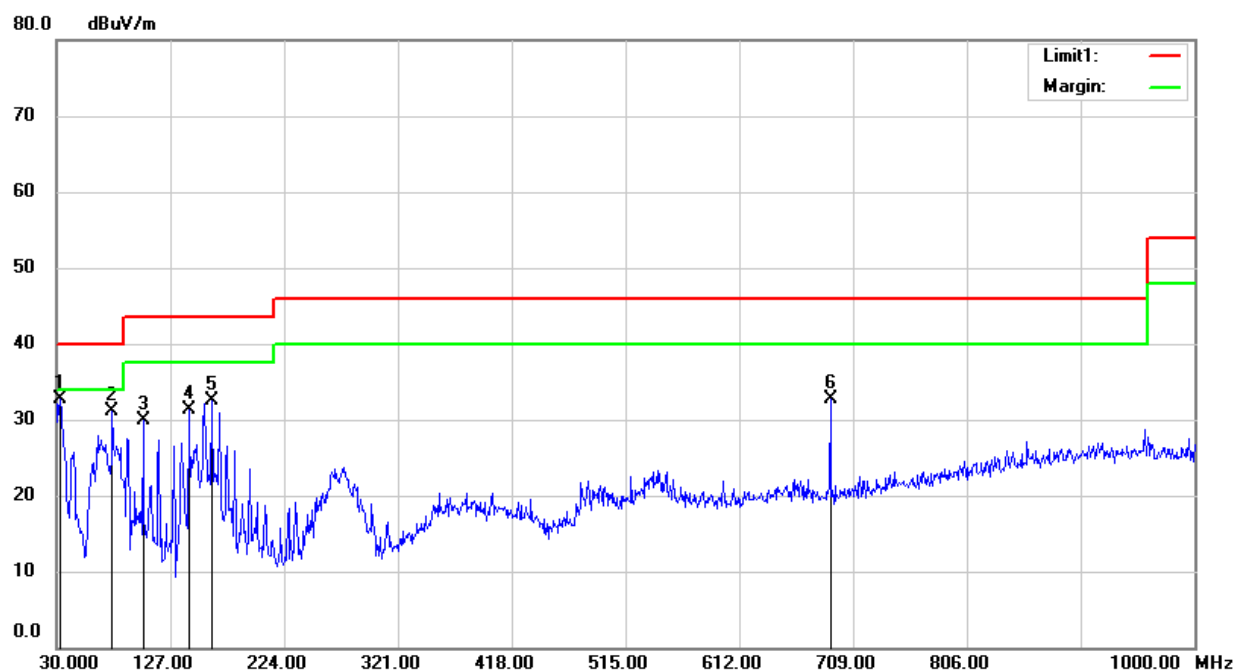

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) | Limit 3m<br>(dBuV/m) | Over(dB) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|----------------------|----------|
| 32.91                                                                                                                                                                                                                                                                                                     | V               | 32.80                     | 40.00                | -7.20    |
| 77.53                                                                                                                                                                                                                                                                                                     | V               | 31.04                     | 40.00                | -8.96    |
| 103.72                                                                                                                                                                                                                                                                                                    |                 | 29.91                     | 43.50                | -13.59   |
| 142.52                                                                                                                                                                                                                                                                                                    | V               | 31.29                     | 43.50                | -12.21   |
| 161.92                                                                                                                                                                                                                                                                                                    | V               | 32.57                     | 43.50                | -10.93   |
| 689.60                                                                                                                                                                                                                                                                                                    | V               | 32.77                     | 46.00                | -13.23   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                           |                      |          |

■ Spurious Emission Above 1GHz (1GHz to 18GHz)


|                                              |                  |  |                             |
|----------------------------------------------|------------------|--|-----------------------------|
| Spurious Emission Above 1GHz (1GHz to 18GHz) |                  |  |                             |
| Test Model                                   | GFSK             |  | Polarity: H                 |
|                                              | 2402MHz          |  | Test By: King Kong          |
|                                              | Temperature: 24℃ |  | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %   |  |                             |

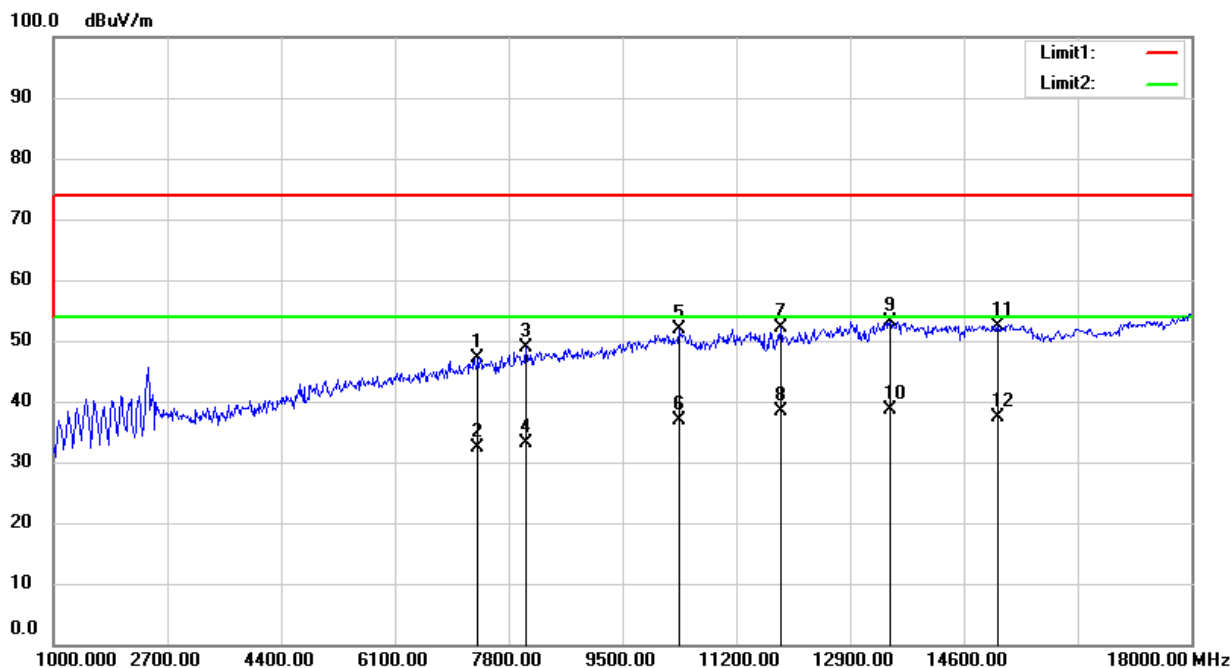

| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) |       | Limit 3m<br>(dBuV/m) |       | Over(dB) |        |
|----------------|----------|---------------------------|-------|----------------------|-------|----------|--------|
|                |          | PK                        | AV    | PK                   | AV    | PK       | AV     |
| --             | --       | --                        | --    | --                   | --    | --       | --     |
| --             | -        | --                        | --    | --                   | --    | --       | --     |
| 10350. 0       | H        | 51.98                     | 36.9  | 74.00                | 54.00 | -22.02   | -17.10 |
| 11863.00       | H        | 52.13                     | 38.40 | 74.00                | 54.00 | -21.87   | -15.60 |
| 13495.00       | H        | 53.15                     | 38.70 | 74.00                | 54.00 | -20.85   | -15.30 |
| 15110.00       | H        | 52.48                     | 37.30 | 74.00                | 54.00 | -21.52   | -16.70 |


**Note:** (1)Emission Level= Reading Level+Probe Factor +Cable Loss.  
(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

|                                              |                    |                             |  |
|----------------------------------------------|--------------------|-----------------------------|--|
| Spurious Emission Above 1GHz (1GHz to 18GHz) |                    |                             |  |
| Test Model                                   | GFSK               | Polarity: V                 |  |
|                                              | 2402MHz            | Test By: King Kong          |  |
|                                              | Temperature: 24 °C | Test Date: October 20, 2016 |  |
|                                              | Humidity: 53 %     |                             |  |

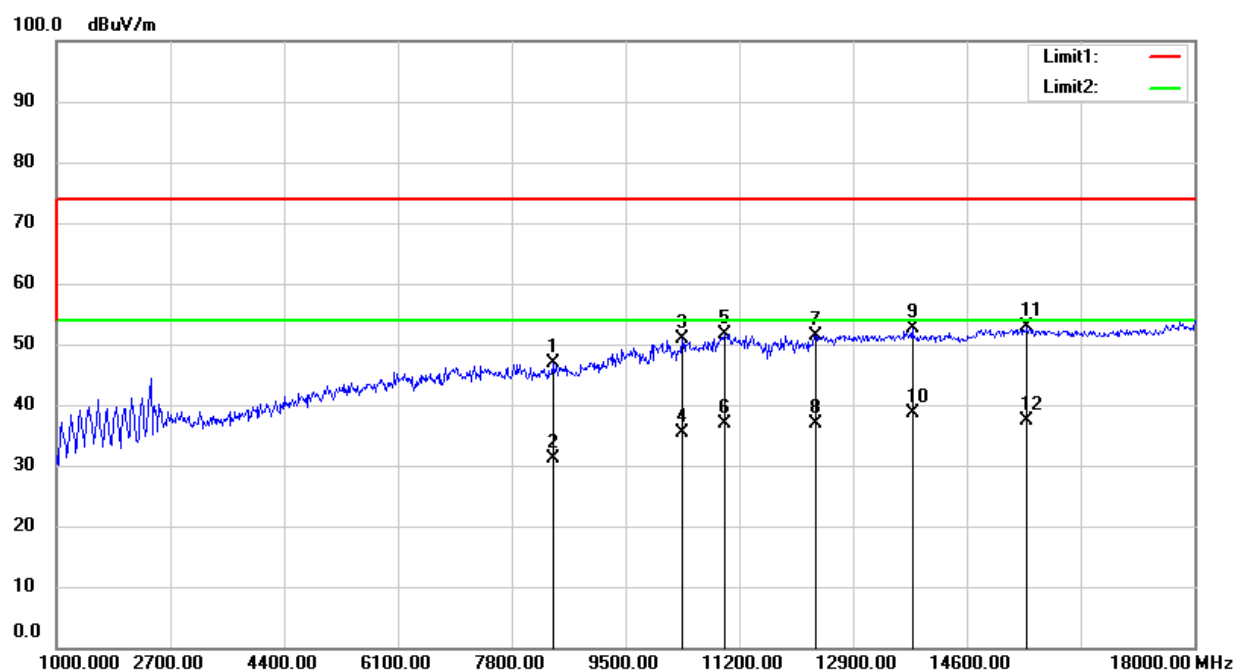

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol. | Emission<br>Level(dBuV/m) |       | Limit 3m<br>(dBuV/m) |       | Over(dB) |        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------|-------|----------------------|-------|----------|--------|
|                                                                                                                                                                                                                                                                                                           |          | PK                        | AV    | PK                   | AV    | PK       | AV     |
| -                                                                                                                                                                                                                                                                                                         | --       | --                        | --    | --                   | --    | --       | --     |
| 10350.00                                                                                                                                                                                                                                                                                                  | V        | 50.82                     | 35.40 | 74.00                | 54.00 | -23.18   | -18.60 |
| 10979.00                                                                                                                                                                                                                                                                                                  | V        | 51.59                     | 36.80 | 74.00                | 54.00 | -22.41   | -17.20 |
| 12339.00                                                                                                                                                                                                                                                                                                  | V        | 51.46                     | 36.90 | 74.00                | 54.00 | -22.54   | -17.10 |
| 13784.00                                                                                                                                                                                                                                                                                                  | V        | 52.54                     | 38.70 | 74.00                | 54.00 | -21.46   | -15.30 |
| 15501.00                                                                                                                                                                                                                                                                                                  | V        | 52.92                     | 37.30 | 74.00                | 54.00 | -21.08   | -16.70 |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |          |                           |       |                      |       |          |        |


|                                              |                             |
|----------------------------------------------|-----------------------------|
| Spurious Emission Above 1GHz (1GHz to 18GHz) |                             |
| Test Model                                   | GFSK                        |
|                                              | 2440MHz                     |
|                                              | Temperature: 24℃            |
|                                              | Humidity: 53 %              |
|                                              | Polarity: H                 |
|                                              | Test By: King Kong          |
|                                              | Test Date: October 20, 2016 |

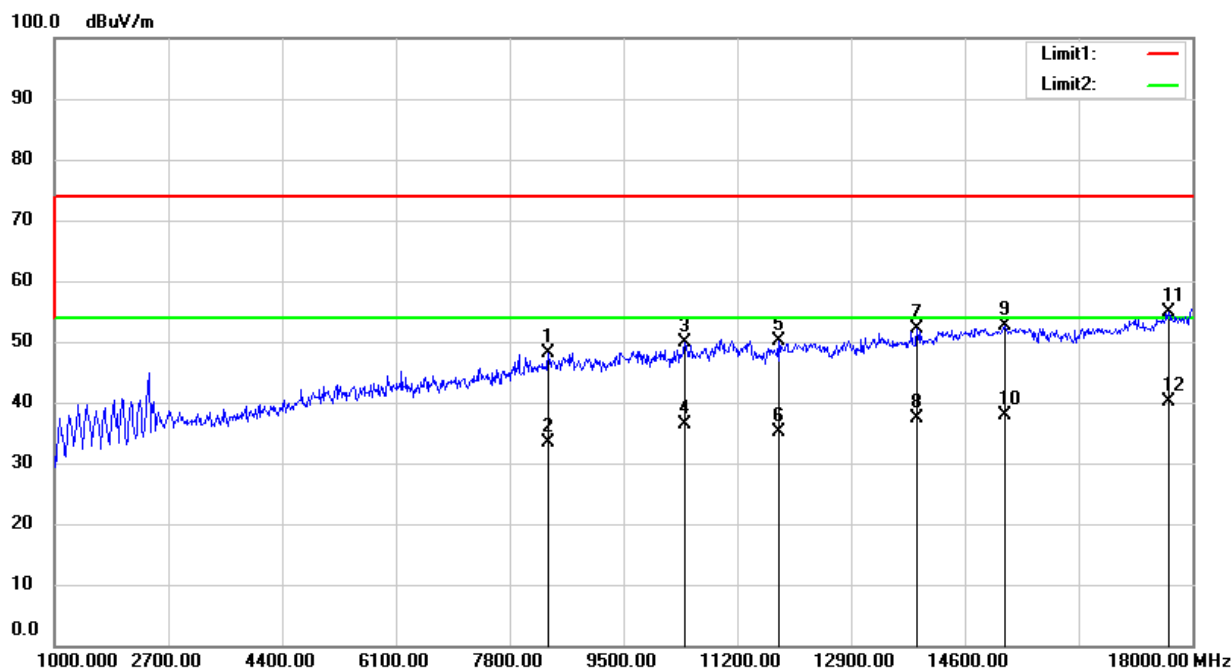

| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) |       | Limit 3m<br>(dBuV/m) |       | Over(dB) |        |
|----------------|----------|---------------------------|-------|----------------------|-------|----------|--------|
|                |          | PK                        | AV    | PK                   | AV    | PK       | AV     |
| --             | --       | --                        | --    | --                   | --    | --       | --     |
| 10418.00       | H        | 49.79                     | 36.40 | 74.00                | 54.00 | -24.21   | -17.60 |
| 11812.00       | H        | 50.22                     | 35.20 | 74.00                | 54.00 | -23.78   | -18.80 |
| 13886.00       | H        | 52.08                     | 37.40 | 74.00                | 54.00 | -21.92   | -16.60 |
| 15195.00       | H        | 52.72                     | 37.90 | 74.00                | 54.00 | -21.28   | -16.10 |
| 17643.00       | H        | 54.96                     | 40.10 | 74.00                | 54.00 | -19.04   | -13.90 |


**Note:** (1)Emission Level= Reading Level+Probe Factor +Cable Loss.  
(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

|                                              |                    |  |                             |
|----------------------------------------------|--------------------|--|-----------------------------|
| Spurious Emission Above 1GHz (1GHz to 18GHz) |                    |  |                             |
| Test Model                                   | GFSK               |  | Polarity: V                 |
|                                              | 2440MHz            |  | Test By: King Kong          |
|                                              | Temperature: 24 °C |  | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %     |  |                             |

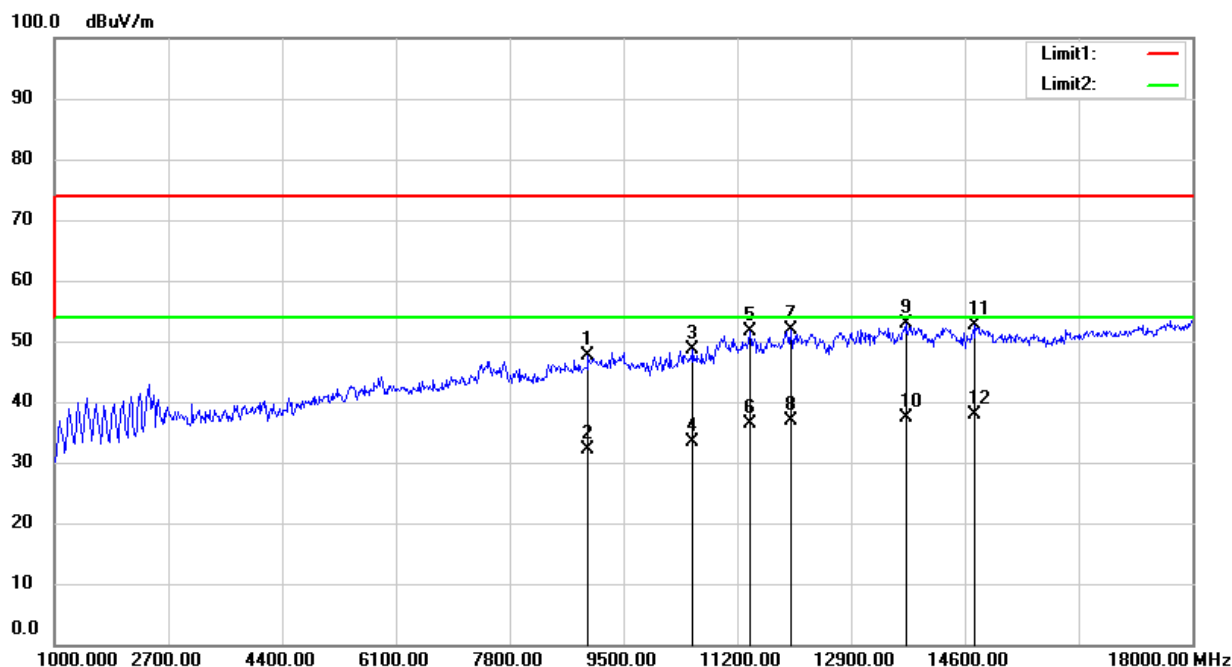

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | A t.Pol. | Emission<br>Level(dBuV/m) |       | Limit 3m<br>(dBuV/m) |       | Over(dB) |        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------|-------|----------------------|-------|----------|--------|
|                                                                                                                                                                                                                                                                                                           |          | PK                        | AV    | PK                   | AV    | PK       | AV     |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | --    | --                   | --    | --       | --     |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | --    | --                   | --    | --       | --     |
| 11387.00                                                                                                                                                                                                                                                                                                  | V        | 51.56                     | 36.40 | 74.00                | 54.00 | -22.44   | -17.60 |
| 11999.00                                                                                                                                                                                                                                                                                                  | V        | 51.87                     | 36.90 | 74.00                | 54.00 | -22.13   | -17.10 |
| 13716.00                                                                                                                                                                                                                                                                                                  | V        | 52.84                     | 37.30 | 74.00                | 54.00 | -21.16   | -16.70 |
| 14753.00                                                                                                                                                                                                                                                                                                  | V        | 52.58                     | 37.80 | 74.00                | 54.00 | -21.42   | -16.20 |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |          |                           |       |                      |       |          |        |


|                                              |                             |
|----------------------------------------------|-----------------------------|
| Spurious Emission Above 1GHz (1GHz to 18GHz) |                             |
| Test Model                                   | GFSK                        |
|                                              | 2480MHz                     |
|                                              | Temperature: 24℃            |
|                                              | Humidity: 53 %              |
|                                              | Polarity: H                 |
|                                              | Test By: King Kong          |
|                                              | Test Date: October 20, 2016 |

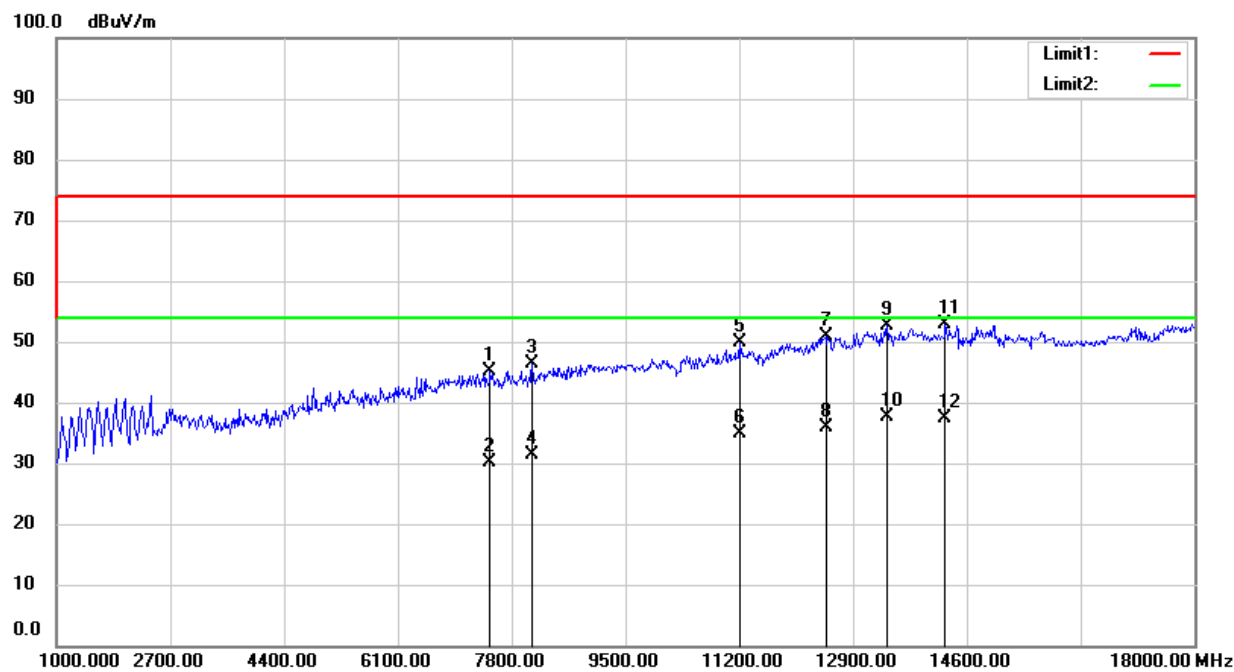

| Freq.<br>(MHz) | An .Pol. | Emission<br>Level(dBuV/m) |       | Limit 3m<br>(dBuV/m) |       | Over(dB) |        |
|----------------|----------|---------------------------|-------|----------------------|-------|----------|--------|
|                |          | PK                        | AV    | PK                   | AV    | PK       | AV     |
| --             | --       | --                        | --    | --                   | --    | --       | --     |
| -              | --       | --                        | --    | --                   | --    | --       | --     |
| 11200.00       | H        | 49.80                     | 34.80 | 74.00                | 54.00 | -24.20   | -19.20 |
| 12492.00       | H        | 50.77                     | 35.90 | 74.00                | 54.00 | -23.23   | -18.10 |
| 13410.00       | H        | 52.53                     | 37.60 | 74.00                | 54.00 | -21.47   | -16.40 |
| 14277.00       | H        | 52.81                     | 37.40 | 74.00                | 54.00 | -21.19   | -16.60 |

**Note:** (1)Emission Level= Reading Level+Probe Factor +Cable Loss.  
(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


|                                              |                  |  |                             |
|----------------------------------------------|------------------|--|-----------------------------|
| Spurious Emission Above 1GHz (1GHz to 18GHz) |                  |  |                             |
| Test Model                                   | GFSK             |  | Polarity: V                 |
|                                              | 2480MHz          |  | Test By: King Kong          |
|                                              | Temperature: 24℃ |  | Test Date: October 20, 2016 |
|                                              | Humidity: 53 %   |  |                             |

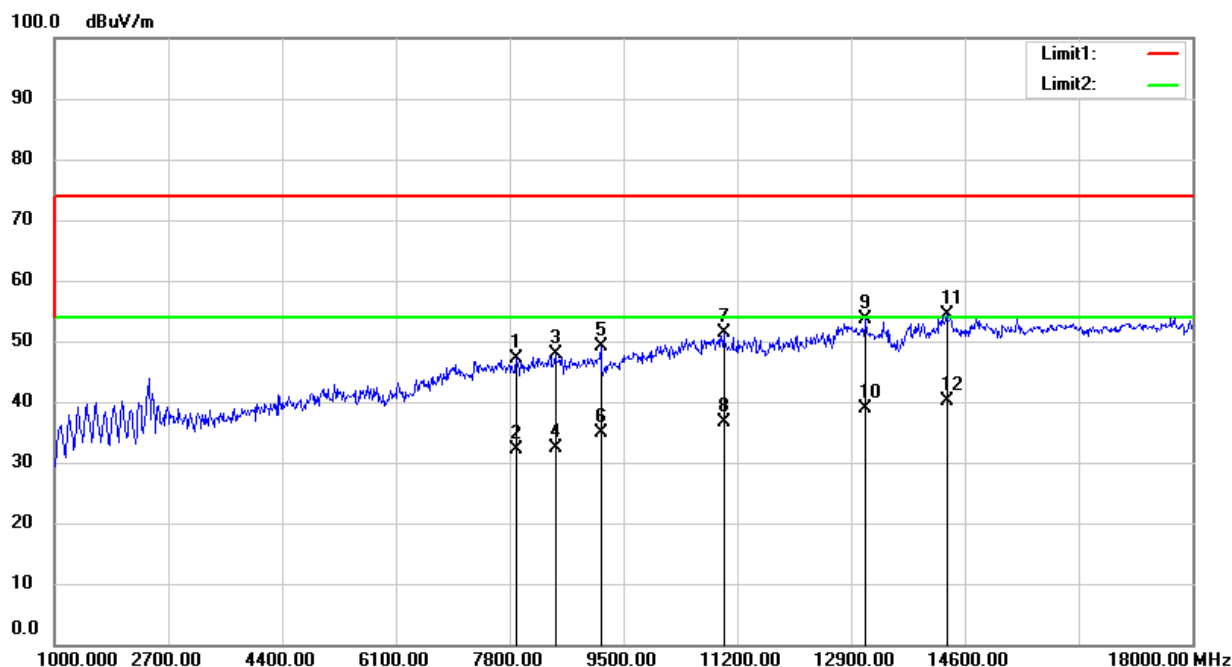

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol. | Emission<br>Level(dBuV/m) |       | Limit 3m<br>(dBuV/m) |       | Over(dB) |        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------|-------|----------------------|-------|----------|--------|
|                                                                                                                                                                                                                                                                                                           |          | PK                        | AV    | PK                   | AV    | PK       | AV     |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | --    | --                   | --    | --       | --     |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | --    | --                   | --    | --       | --     |
| 9160.00                                                                                                                                                                                                                                                                                                   | V        | 49.01                     | 34.80 | 74.00                | 54.00 | -22.46   | -19.20 |
| 10996.00                                                                                                                                                                                                                                                                                                  | V        | 51.34                     | 36.70 | 74.00                | 54.00 | -22.52   | -17.30 |
| 13121.00                                                                                                                                                                                                                                                                                                  | V        | 53.62                     | 38.90 | 74.00                | 54.00 | -21.43   | -15.10 |
| 14328.00                                                                                                                                                                                                                                                                                                  | V        | 54.29                     | 40.10 | 74.00                | 54.00 | -21.51   | -13.90 |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |          |                           |       |                      |       |          |        |

■ Spurious Emission Above 1GHz (18GHz to 25GHz)


|                                               |                  |  |                             |
|-----------------------------------------------|------------------|--|-----------------------------|
| Spurious Emission Above 1GHz (18GHz to 25GHz) |                  |  |                             |
| Test Model                                    | GFSK             |  | Polarity: H                 |
|                                               | 2402MHz          |  | Test By: King Kong          |
|                                               | Temperature: 24℃ |  | Test Date: October 20, 2016 |
|                                               | Humidity: 53 %   |  |                             |

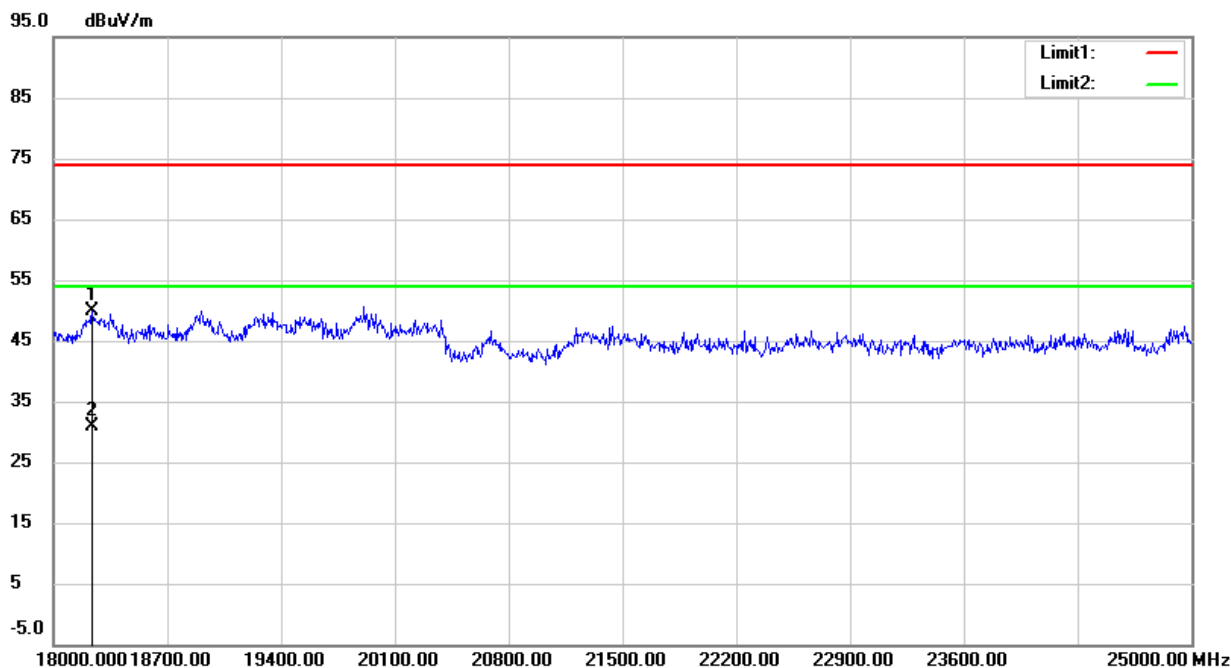

| Freq.<br>(MHz) | Ant.Pol. | Emission<br>Level(dBuV/m) |    | Limit 3m<br>(dBuV/m) |    | Over(dB) |    |
|----------------|----------|---------------------------|----|----------------------|----|----------|----|
|                |          | PK                        | AV | PK                   | AV | PK       | AV |
| --             | --       | --                        | -- | --                   | -- | --       | -- |
| --             | --       | --                        | -- | --                   | -- | --       | -- |
| --             | --       | --                        | -- | --                   | -- | --       | -- |
| --             | --       | --                        | -- | --                   | -- | --       | -- |
| --             | --       | --                        | -- | --                   | -- | --       | -- |
| --             | --       | --                        | -- | --                   | -- | --       | -- |


**Note:** (1)Emission Level= Reading Level+Probe Factor +Cable Loss.  
(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

|                                               |                    |  |                             |
|-----------------------------------------------|--------------------|--|-----------------------------|
| Spurious Emission Above 1GHz (18GHz to 25GHz) |                    |  |                             |
| Test Model                                    | GFSK               |  | Polarity: V                 |
|                                               | 2402MHz            |  | Test By: King Kong          |
|                                               | Temperature: 24 °C |  | Test Date: October 20, 2016 |
|                                               | Humidity: 53 %     |  |                             |

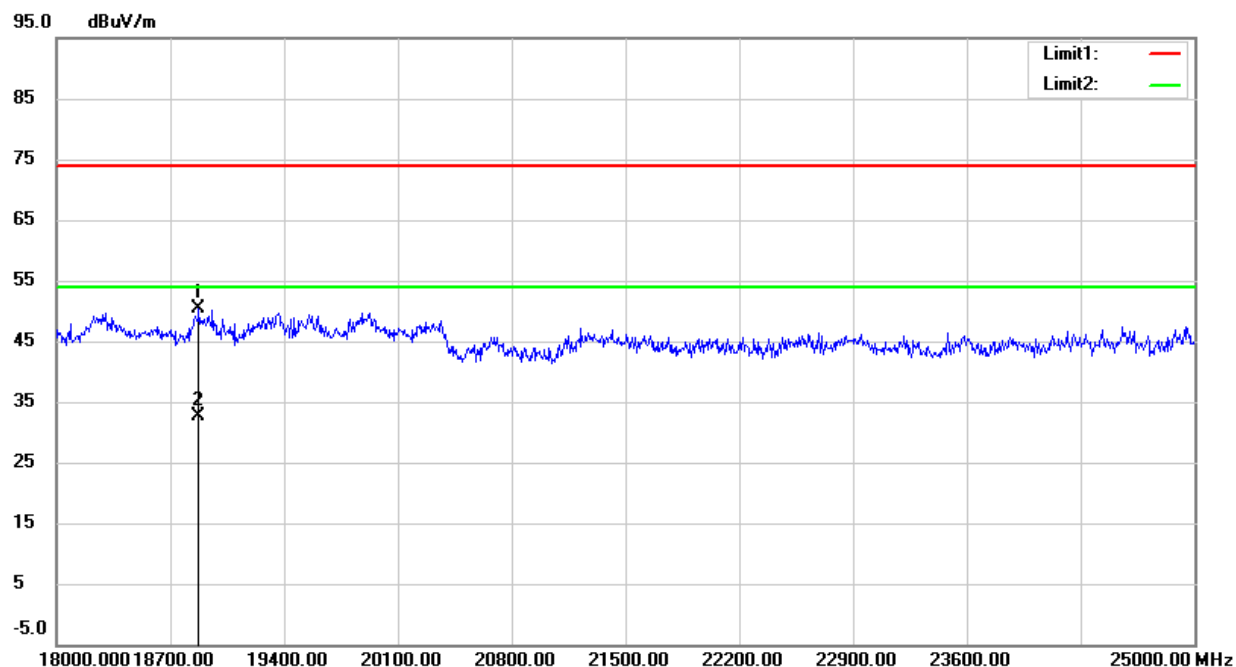


| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol. | Emission<br>Level(dBuV/m) |    | Limit 3m<br>(dBuV/m) |    | Over(dB) |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------|----|----------------------|----|----------|----|
|                                                                                                                                                                                                                                                                                                           |          | PK                        | AV | PK                   | AV | PK       | AV |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |          |                           |    |                      |    |          |    |

|                                               |                             |
|-----------------------------------------------|-----------------------------|
| Spurious Emission Above 1GHz (18GHz to 25GHz) |                             |
| Test Model                                    | GFSK                        |
|                                               | 2440MHz                     |
|                                               | Temperature: 24℃            |
|                                               | Humidity: 53 %              |
|                                               | Polarity: H                 |
|                                               | Test By: King Kong          |
|                                               | Test Date: October 20, 2016 |

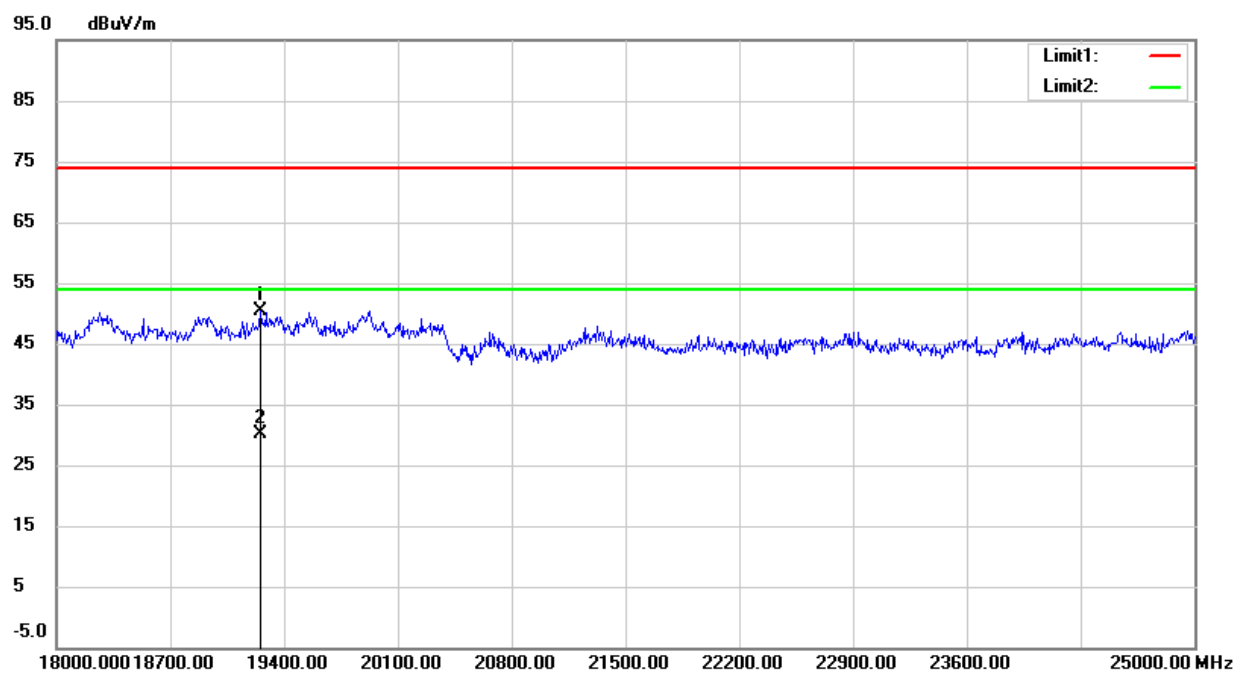


| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |    | Limit 3m<br>(dBuV/m) |    | Over(dB) |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|----|----------------------|----|----------|----|
|                                                                                                                                                                                                                                                                                                           |                 | PK                        | AV | PK                   | AV | PK       | AV |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                           |    |                      |    |          |    |

|                                               |                    |  |                             |
|-----------------------------------------------|--------------------|--|-----------------------------|
| Spurious Emission Above 1GHz (18GHz to 25GHz) |                    |  |                             |
| Test Model                                    | GFSK               |  | Polarity: V                 |
|                                               | 2440MHz            |  | Test By: King Kong          |
|                                               | Temperature: 24 °C |  | Test Date: October 20, 2016 |
|                                               | Humidity: 53 %     |  |                             |

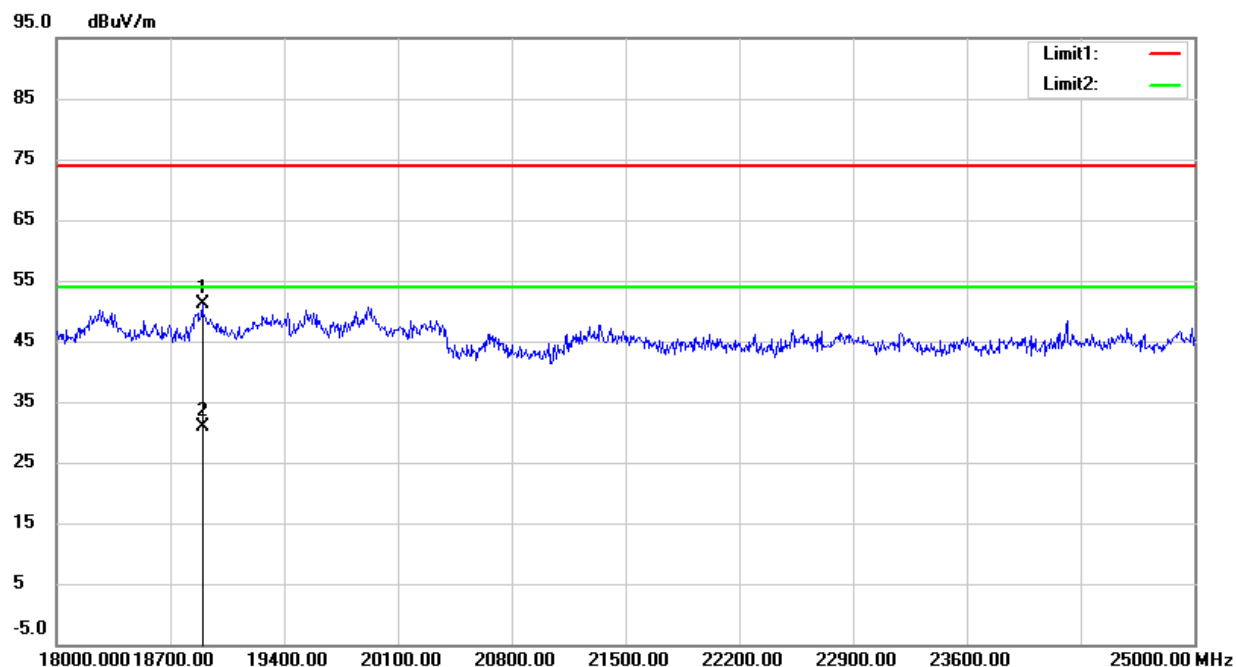


| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol. | Emission<br>Level(dBuV/m) |    | Limit 3m<br>(dBuV/m) |    | Over(dB) |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------------------|----|----------------------|----|----------|----|
|                                                                                                                                                                                                                                                                                                           |          | PK                        | AV | PK                   | AV | PK       | AV |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --       | --                        | -- | --                   | -- | --       | -- |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |          |                           |    |                      |    |          |    |

|                                               |                             |
|-----------------------------------------------|-----------------------------|
| Spurious Emission Above 1GHz (18GHz to 25GHz) |                             |
| Test Model                                    | GFSK                        |
|                                               | 2480MHz                     |
|                                               | Temperature: 24℃            |
|                                               | Humidity: 53 %              |
|                                               | Polarity: H                 |
|                                               | Test By: King Kong          |
|                                               | Test Date: October 20, 2016 |

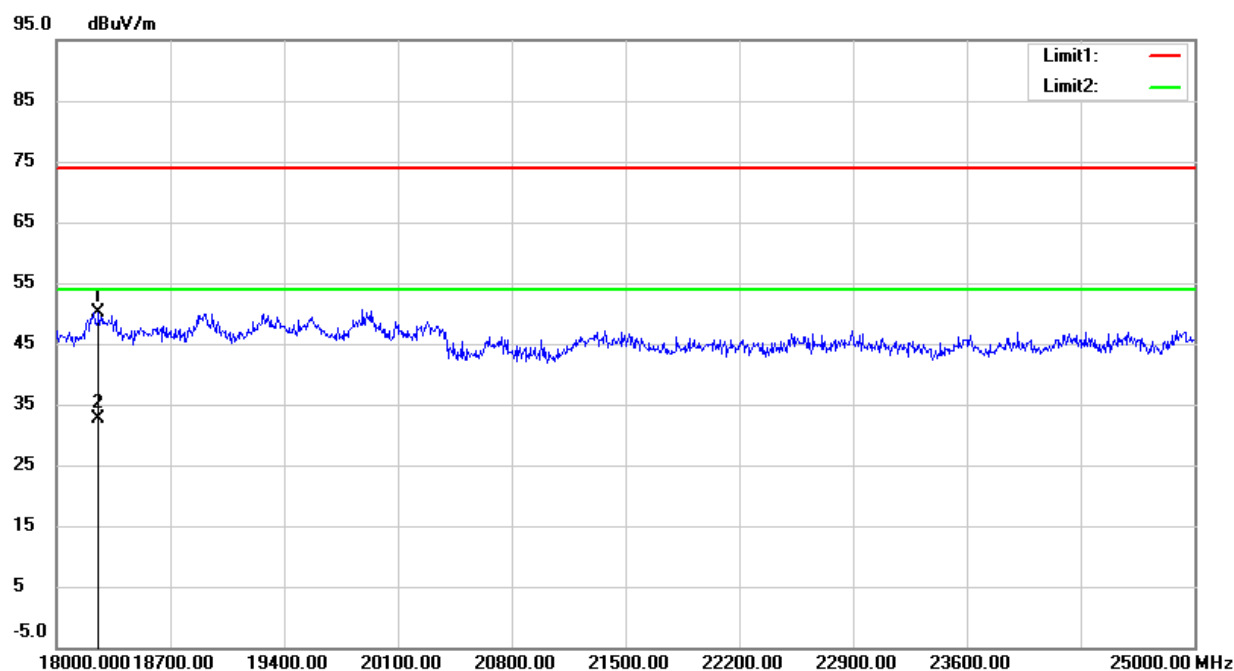

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |    | Limit 3m<br>(dBuV/m) |    | Over(dB) |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------------------------|----|----------------------|----|----------|----|
|                                                                                                                                                                                                                                                                                                           |                 | PK                        | AV | PK                   | AV | K        | AV |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --              | --                        | -- | --                   | -- | --       | -- |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                           |    |                      |    |          |    |


|                                               |                    |  |                             |
|-----------------------------------------------|--------------------|--|-----------------------------|
| Spurious Emission Above 1GHz (18GHz to 25GHz) |                    |  |                             |
| Test Model                                    | GFSK               |  | Polarity: V                 |
|                                               | 2480MHz            |  | Test By: King Kong          |
|                                               | Temperature: 24 °C |  | Test Date: October 20, 2016 |
|                                               | Humidity: 53 %     |  |                             |

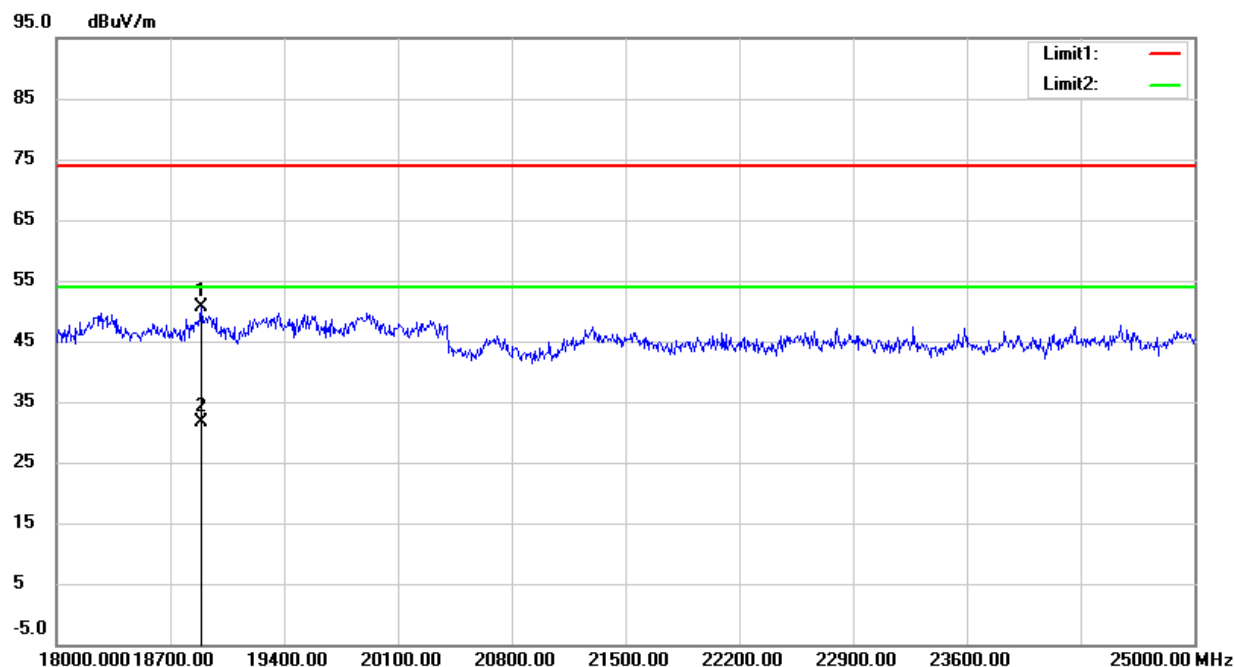

| Freq.<br>(MHz)                                                                                                                                                                                                                                                                                            | Ant. Pol. |    | Emission<br>Level(dBuV/m) |    | Limit 3m<br>(dBuV/m) |    | Ov r(dB) |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----|---------------------------|----|----------------------|----|----------|----|
|                                                                                                                                                                                                                                                                                                           | H         | V  | PK                        | AV | PK                   | AV | PK       | AV |
| --                                                                                                                                                                                                                                                                                                        | --        | -- | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --        | -- | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --        | -- | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --        | -- | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --        | -- | --                        | -- | --                   | -- | --       | -- |
| --                                                                                                                                                                                                                                                                                                        | --        | -- | --                        | -- | --                   | -- | --       | -- |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |           |    |                           |    |                      |    |          |    |

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz


|                                                   |                             |
|---------------------------------------------------|-----------------------------|
| Spurious Emission in Restricted Band 2310-2390MHz |                             |
| Test Model                                        | GFSK                        |
|                                                   | 2402MHz                     |
|                                                   | Temperature: 24℃            |
|                                                   | Humidity: 53 %              |
|                                                   | Polarity: H                 |
|                                                   | Test By: King Kong          |
|                                                   | Test Date: October 20, 2016 |

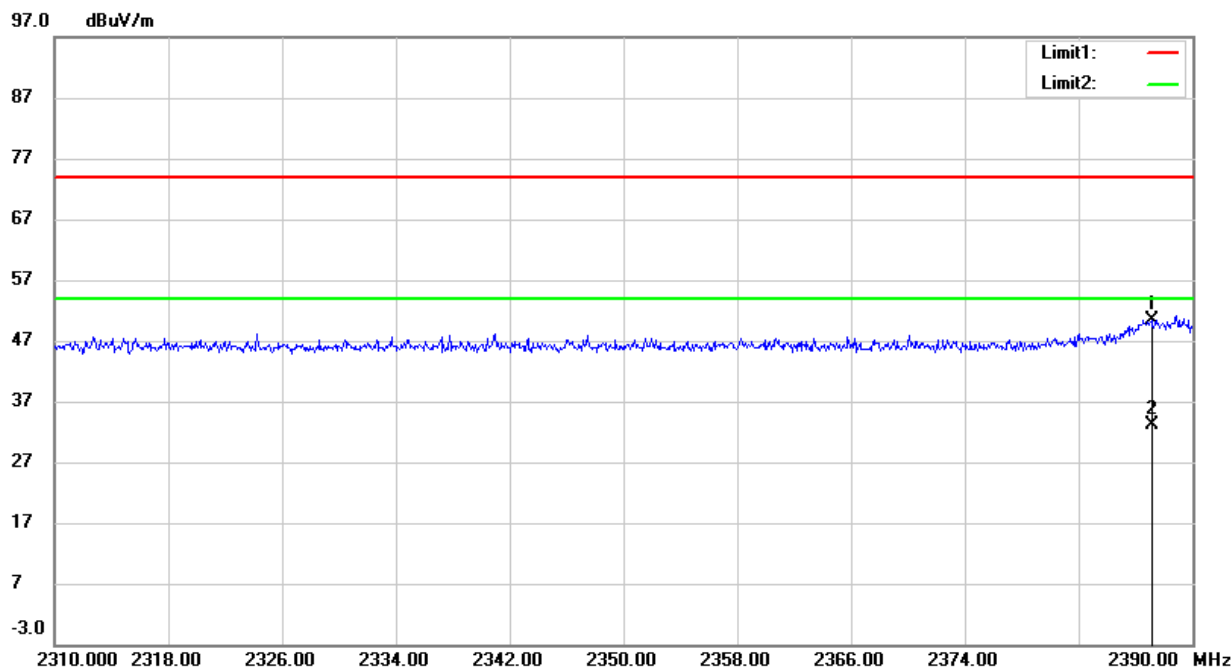

| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | PK(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|--------------|-----------------------|-------------------|-----------------------|-------------------|
| 2387.120        | H            | 50.36                 | 74                | 33.10                 | 54                |


**Note:** (1)Emission Level= Reading Level+Probe Factor +Cable Loss.  
(2) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

|                                                   |                    |                             |
|---------------------------------------------------|--------------------|-----------------------------|
| Spurious Emission in Restricted Band 2310-2390MHz |                    |                             |
| Test Model                                        | GFSK               | Polarity: V                 |
|                                                   | 2402MHz            | Test By: King Kong          |
|                                                   | Temperature: 24 °C | Test Date: October 20, 2016 |
|                                                   | Humidity: 53 %     |                             |

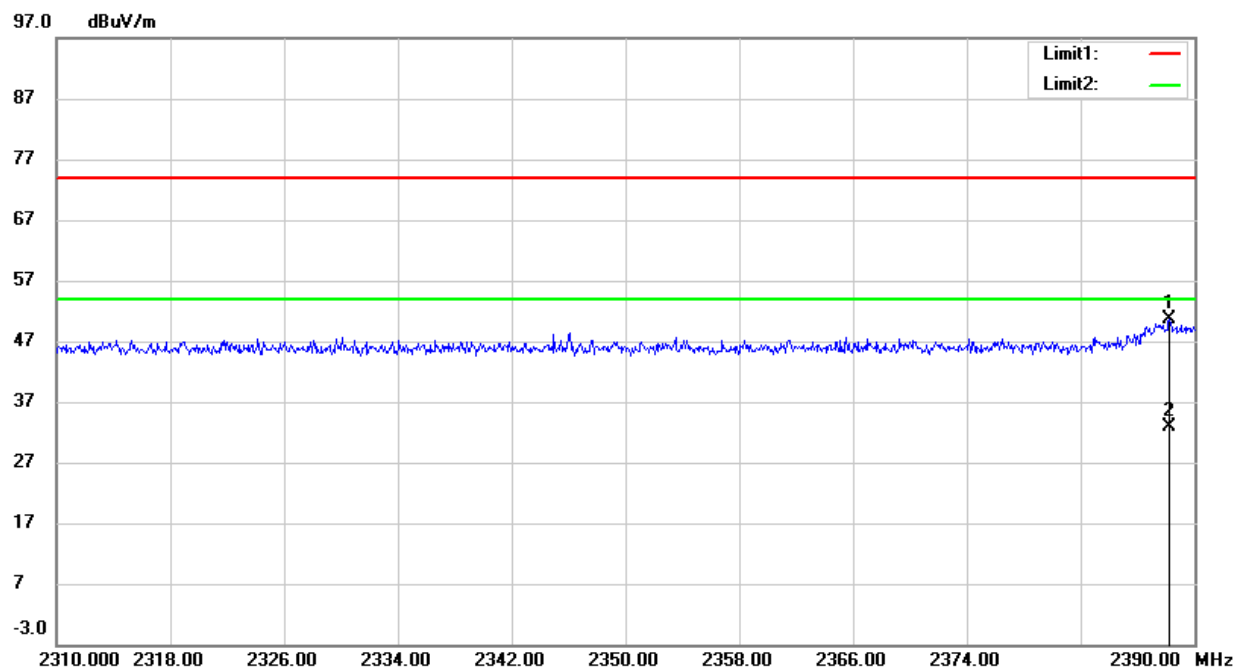


| Frequency (MHz)                                                                                                                                                                                                                                                                                             | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | PK(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------|-------------------|-----------------------|-------------------|
| 2388.240                                                                                                                                                                                                                                                                                                    | V            | 50.69                 | 74                | 32.90                 | 54                |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |              |                       |                   |                       |                   |

|                                                     |                    |                             |
|-----------------------------------------------------|--------------------|-----------------------------|
| Spurious Emission in Restricted Band 2483.5-2500MHz |                    |                             |
| Test Model                                          | GFSK               | Polarity: H                 |
|                                                     | 2480MHz            | Test By: King Kong          |
|                                                     | Temperature: 24 °C | Test Date: October 20, 2016 |
|                                                     | Humidity: 53 %     |                             |

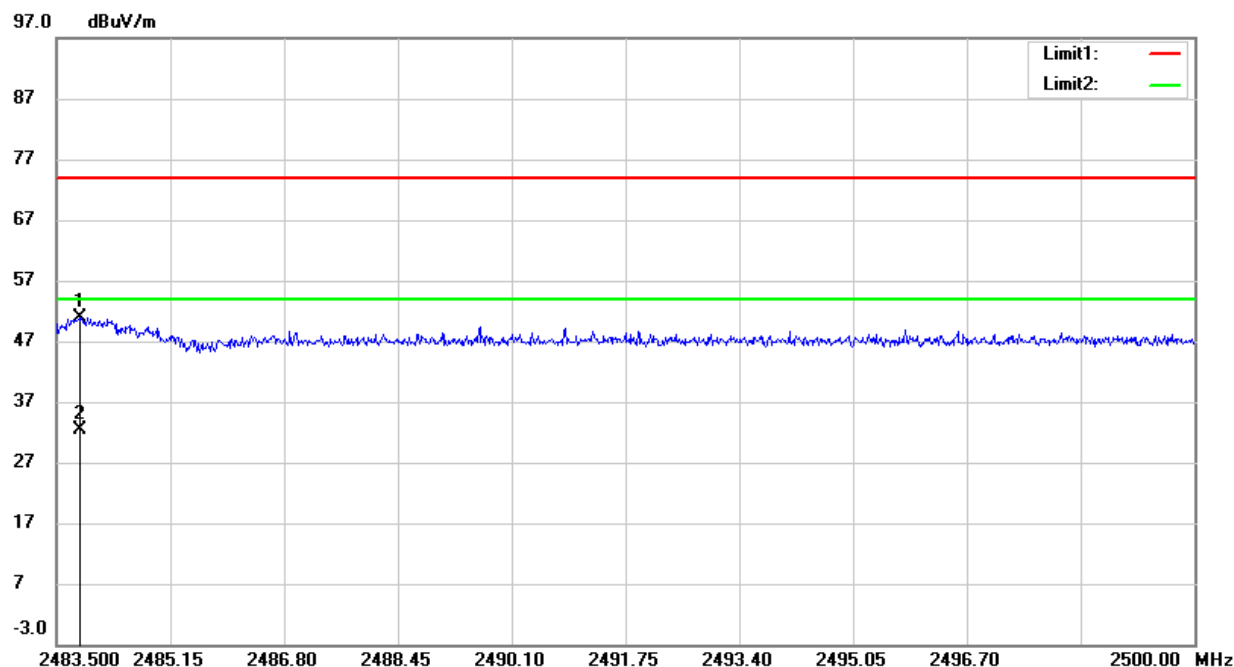

| Frequency<br>(MHz)                                                                                                                                                                                                                                                                                          | Polarity<br>H/V | PK(dBuV/m)<br>(VBW=3MHz) | Limit 3m<br>(dBuV/m) | PK(dBuV/m)<br>(VBW=10Hz) | Limit 3m<br>(dBuV/m) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------|----------------------|--------------------------|----------------------|
| 2483.847                                                                                                                                                                                                                                                                                                    | H               | 50.94                    | 74                   | 32.40                    | 54                   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                          |                      |                          |                      |

|                                                     |                    |                             |
|-----------------------------------------------------|--------------------|-----------------------------|
| Spurious Emission in Restricted Band 2483.5-2500MHz |                    |                             |
| Test Model                                          | GFSK               | Polarity: V                 |
|                                                     | 2480MHz            | Test By: King Kong          |
|                                                     | Temperature: 24 °C | Test Date: October 20, 2016 |
|                                                     | Humidity: 53 %     |                             |

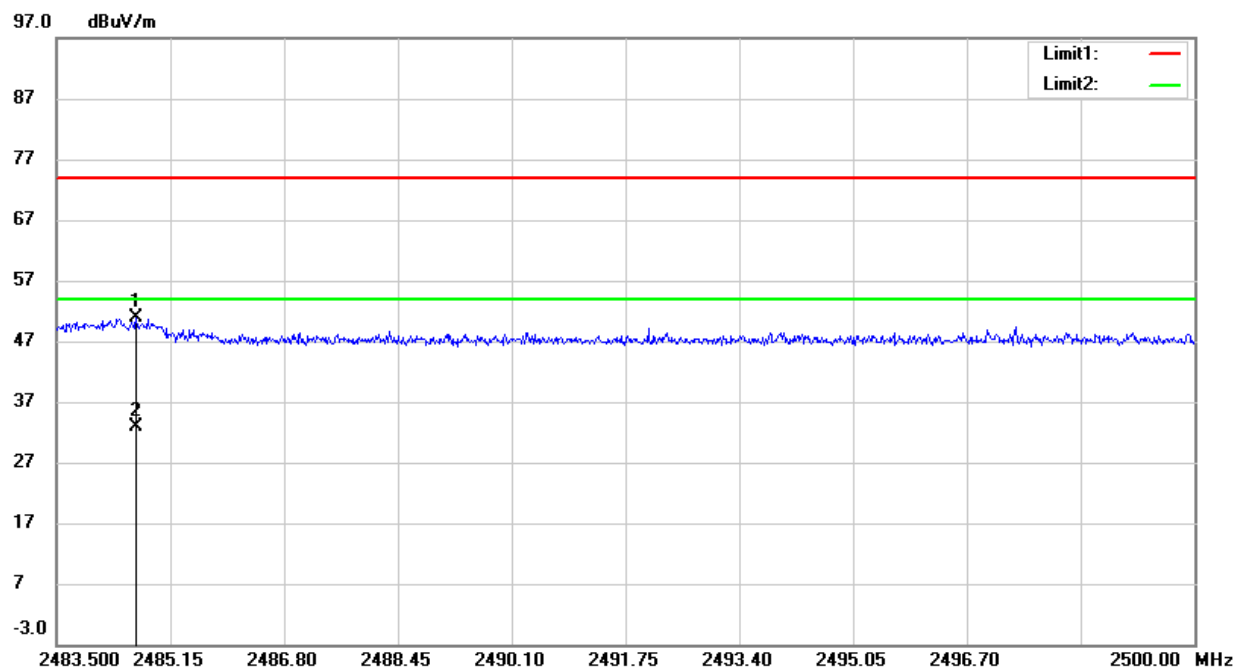

| Frequency<br>(MHz)                                                                                                                                                                                                                                                                                          | Polarity<br>H/V | PK(dBuV/m)<br>(VBW=3MHz) | Limit 3m<br>(dBuV/m) | PK(dBuV/m)<br>(VBW=10Hz) | Limit 3m<br>(dBuV/m) |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|--------------------------|----------------------|--------------------------|----------------------|
| 2484.655                                                                                                                                                                                                                                                                                                    | V               | 50.86                    | 74                   | 32.90                    | 54                   |
| <b>Note:</b> (1)Emission Level= Reading Level+Probe Factor +Cable Loss.<br>(2) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |                 |                          |                      |                          |                      |

## 8.6 CONDUCTED EMISSIONS TEST

### 8.6.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.6.2 Conformance Limit

| Conducted Emission Limit                                                                                                                                                  |            |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|
| Frequency(MHz)                                                                                                                                                            | Quasi-peak | Average |
| 0.15-0.5                                                                                                                                                                  | 66-56      | 56-46   |
| 0.5-5.0                                                                                                                                                                   | 56         | 46      |
| 5.0-30.0                                                                                                                                                                  | 60         | 50      |
| Note: 1. The lower limit shall apply at the transition frequencies<br>2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz. |            |         |

### 8.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

### 8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.  
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
 Repeat above procedures until all frequency measured were complete.

### 8.6.5 Test Results

Pass

We test the EUT at 120V and 240V, and show the worst result as bellow.


|            |                          |  |                 |                    |
|------------|--------------------------|--|-----------------|--------------------|
| Test Model | Conducted Emissions Test |  | Test Line: Line |                    |
|            | TX mode                  |  |                 | Test By: King Kong |
|            | Temperature: 24℃         |  |                 |                    |
|            | Humidity: 53 %           |  |                 |                    |
|            |                          |  |                 |                    |

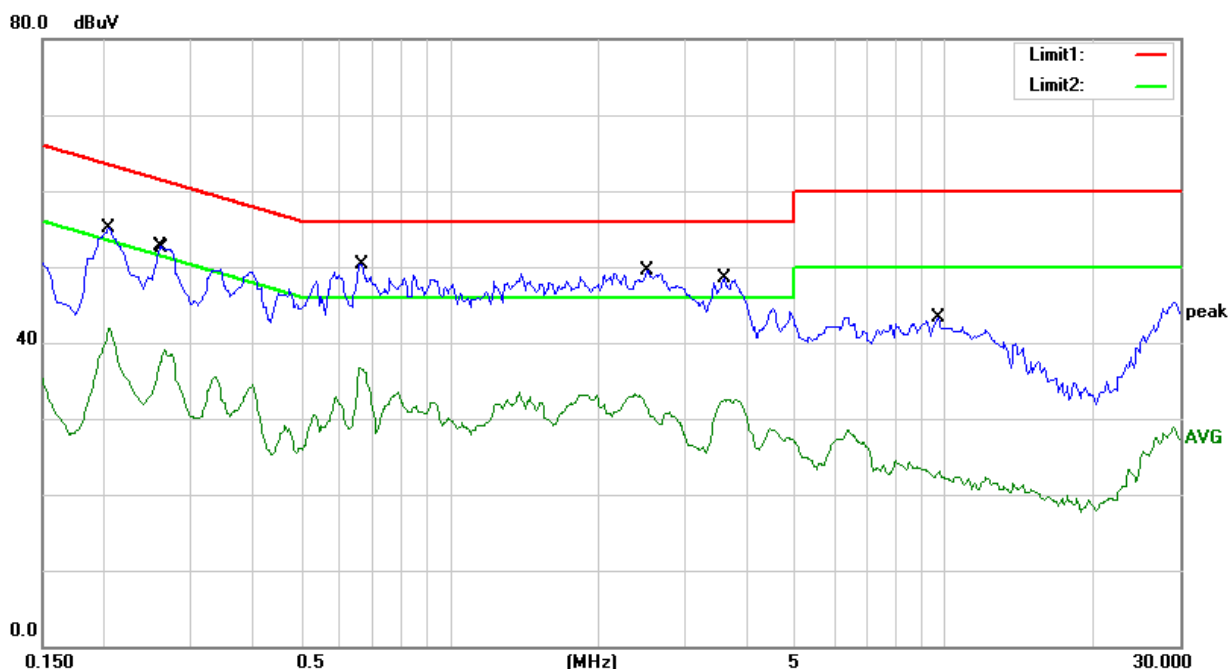

| Test Line | Frequency MHz | Emission Level QP dB(μV) | Emission Level AV dB(μV) | Limits QP dB(μV) | Limits AV dB(μV) | Over QP dB(μV) | Over AV dB(μV) |
|-----------|---------------|--------------------------|--------------------------|------------------|------------------|----------------|----------------|
| Line      | 0.21          | 55.09                    | 41.99                    | 63.41            | 53.41            | -8.32          | -11.42         |
|           | 0.27          | 52.69                    | 39.05                    | 61.43            | 51.27            | -8.74          | -12.22         |
|           | 0.67          | 50.26                    | 36.65                    | 56.00            | 46.00            | -5.74          | -9.35          |
|           | 2.51          | 49.57                    | 33.46                    | 56.00            | 46.00            | -6.43          | -12.54         |
|           | 3.59          | 48.44                    | 32.49                    | 56.00            | 46.00            | -7.56          | -13.51         |
|           | 9.71          | 43.28                    | 28.58                    | 60.00            | 50.00            | -16.72         | -21.42         |

**Note:** (2) Emission Level = Reading Level + Factor + Cable Loss.  
(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

|            |                          |  |                    |                    |
|------------|--------------------------|--|--------------------|--------------------|
| Test Model | Conducted Emissions Test |  | Test Line: Neutral |                    |
|            | TX mode                  |  |                    | Test By: King Kong |
|            | Temperature: 24℃         |  |                    |                    |
|            | Humidity: 53 %           |  |                    |                    |
|            |                          |  |                    |                    |
|            |                          |  |                    |                    |

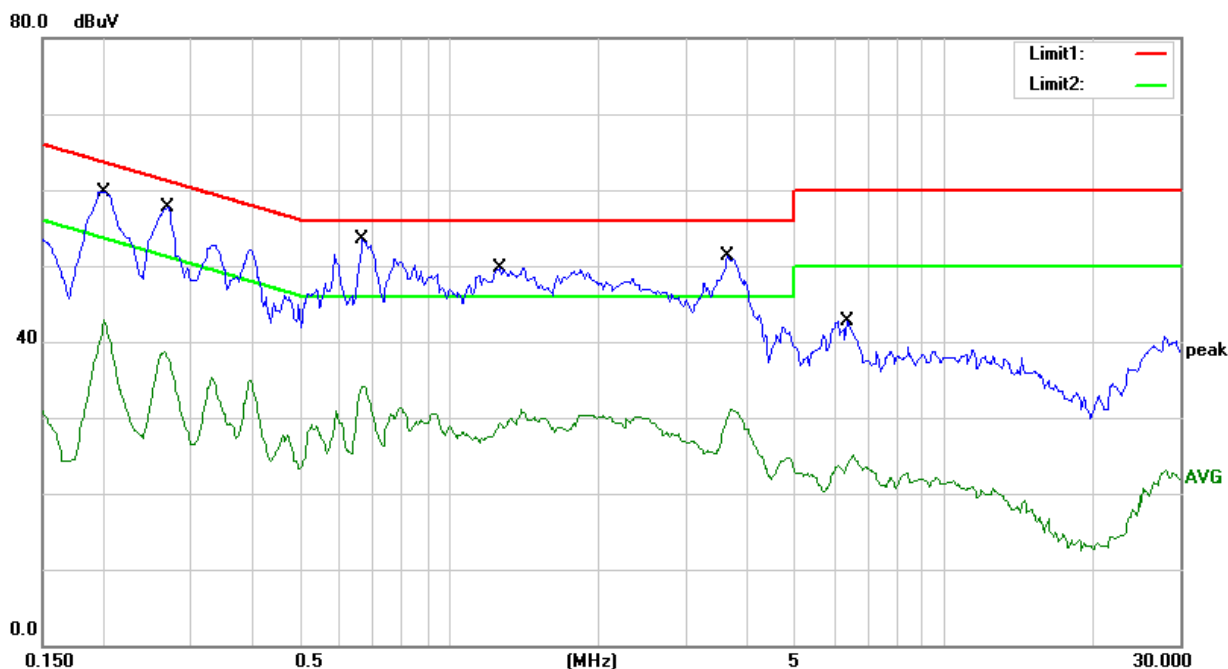

| Test Line                                                                                                                                                                                                                                                                                              | Frequency MHz | Emission Level QP dB(μV) | Emission Level AV dB(μV) | Limits QP dB(μV) | Limits AV dB(μV) | Over QP dB(μV) | Over AV dB(μV) |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------|--------------------------|------------------|------------------|----------------|----------------|
| Neutral                                                                                                                                                                                                                                                                                                | 0.20          | 56.23                    | 42.91                    | 63.61            | 53.61            | -7.38          | -10.70         |
|                                                                                                                                                                                                                                                                                                        | 0.27          | 55.23                    | 38.63                    | 61.12            | 51.12            | -5.89          | -12.49         |
|                                                                                                                                                                                                                                                                                                        | 0.67          | 50.14                    | 34.07                    | 56.00            | 46.00            | -5.86          | -11.93         |
|                                                                                                                                                                                                                                                                                                        | 1.27          | 47.63                    | 31.19                    | 56.00            | 46.00            | -8.37          | -14.81         |
|                                                                                                                                                                                                                                                                                                        | 3.65          | 50.23                    | 31.07                    | 56.00            | 46.00            | -5.77          | -14.93         |
|                                                                                                                                                                                                                                                                                                        | 6.37          | 42.74                    | 25.06                    | 60.00            | 50.00            | -17.26         | -24.94         |
| <b>Note:</b> (2)Emission Level= Reading Level+ Factor +Cable Loss.<br>(3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. |               |                          |                          |                  |                  |                |                |

## 8.7 ANTENNA APPLICATION

### 8.7.1 Antenna Requirement

| Standard            | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.7.2 Result

PASS.

The EUT has 1 antenna: a FPC Antenna for BT3.0 with classic model.

The EUT has 1 antenna: a FPC Antenna for BT4.0 with BLE model.

The EUT has 1 antenna: a FPC Antenna for wifi 2.4G.

The EUT has 1 antenna: a FPC Antenna for Z-WAVE.



The EUT has 1 antenna: a Induction coil Antenna for NFC.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
  - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
  - ☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.


## 9 PHOTOS OF TEST SETUP

### ■ For Conducted Emission

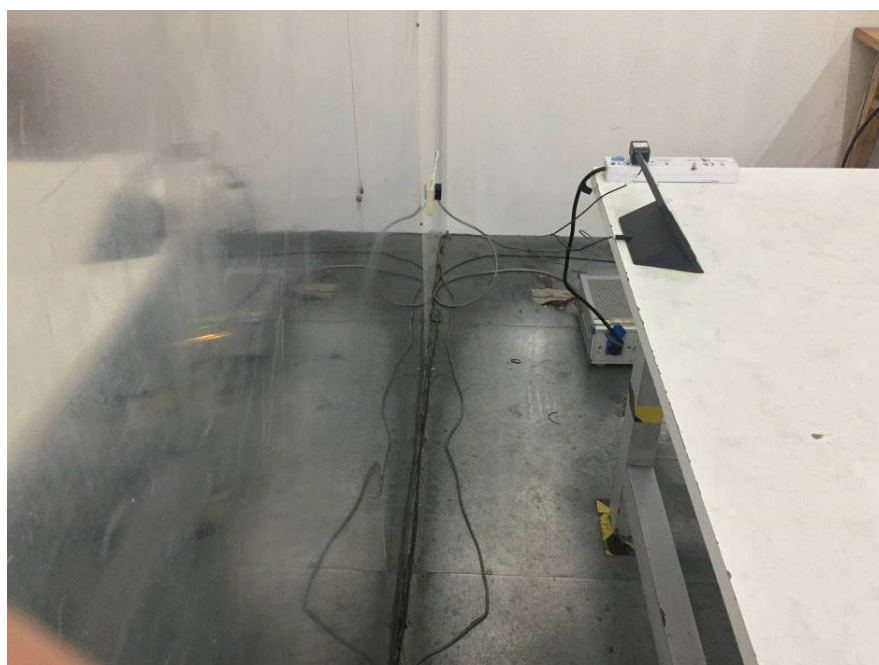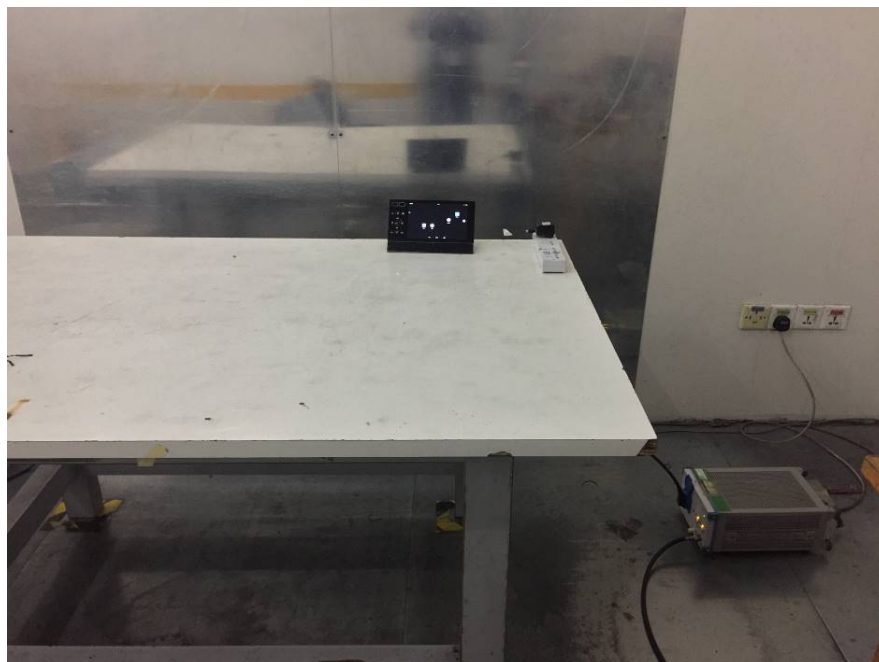



■ For Radiated Spurious Emission






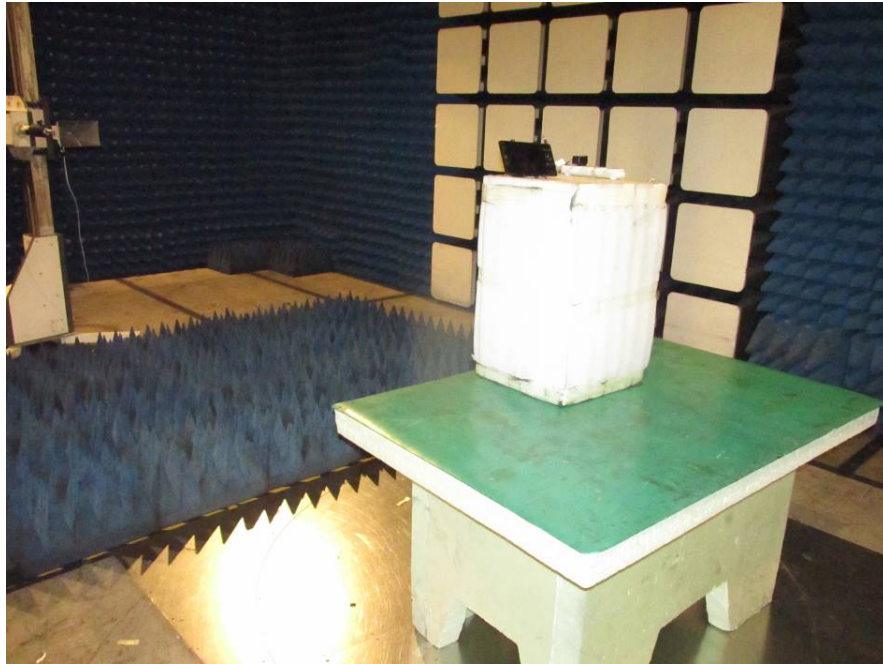




## 10 PHOTOS OF THE EUT




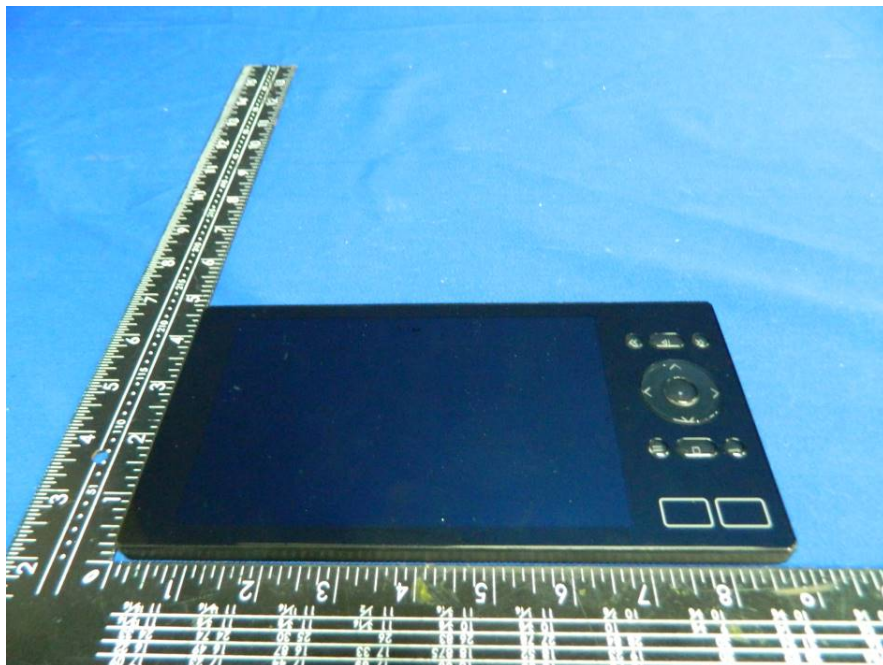
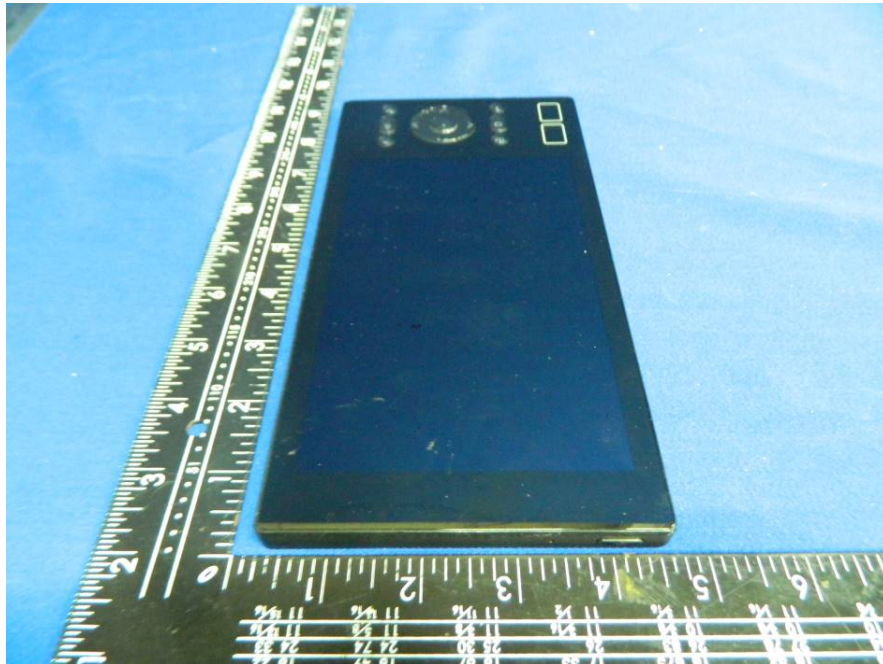


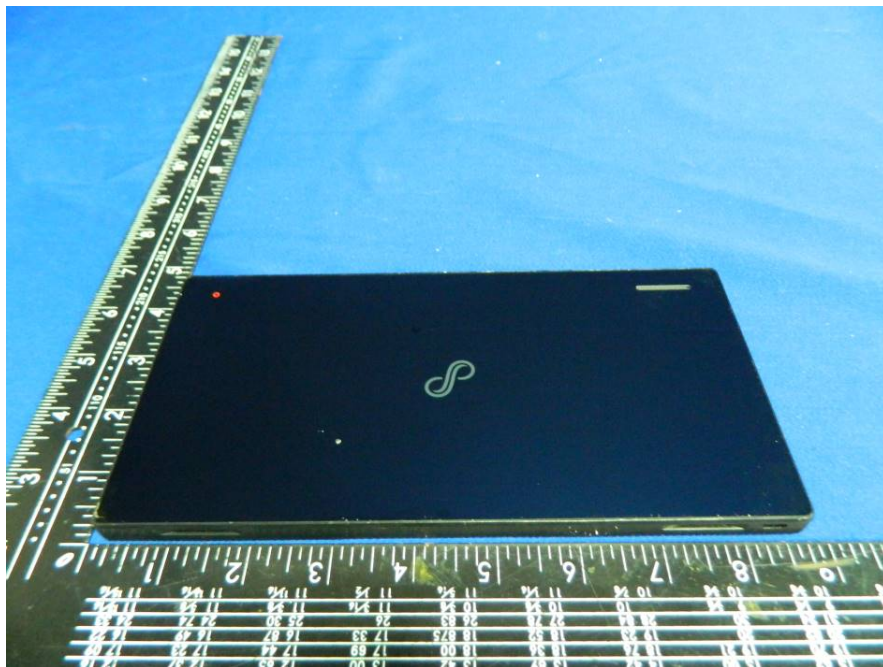
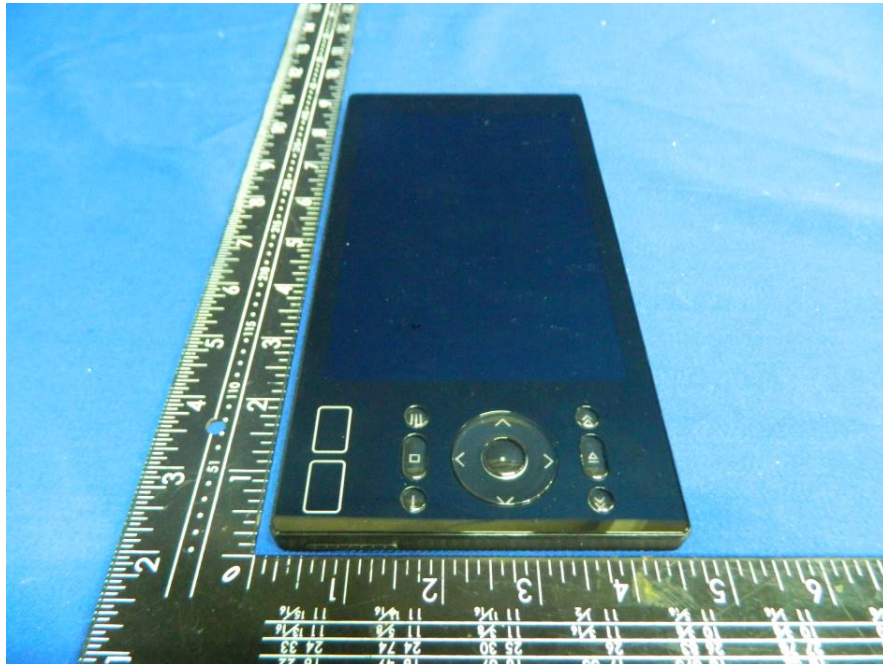


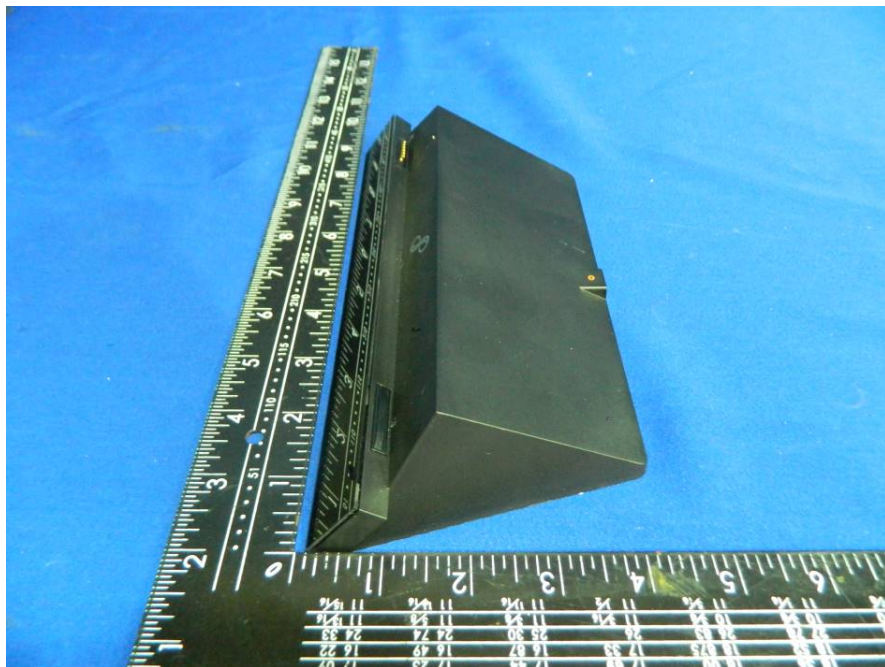
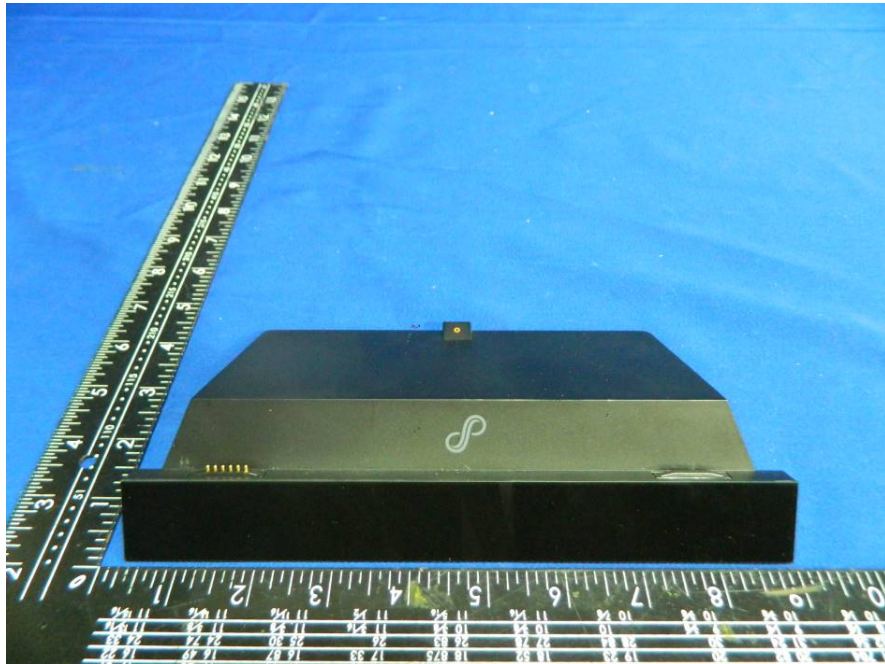


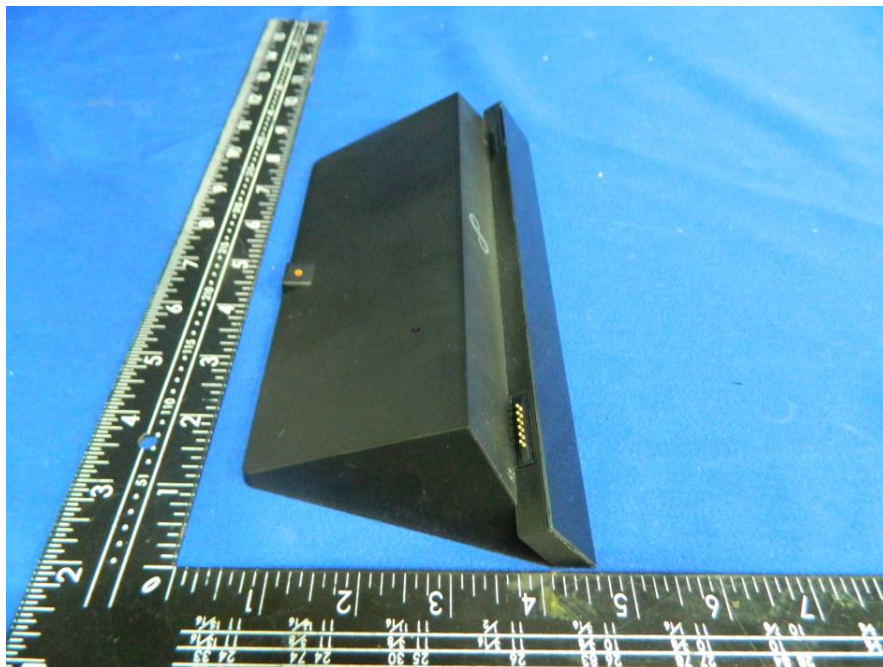
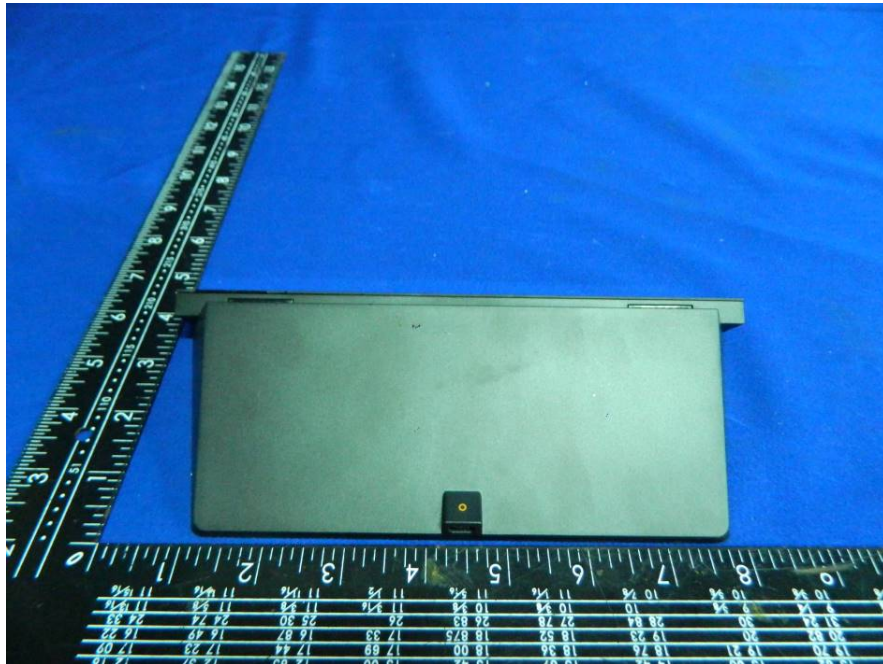


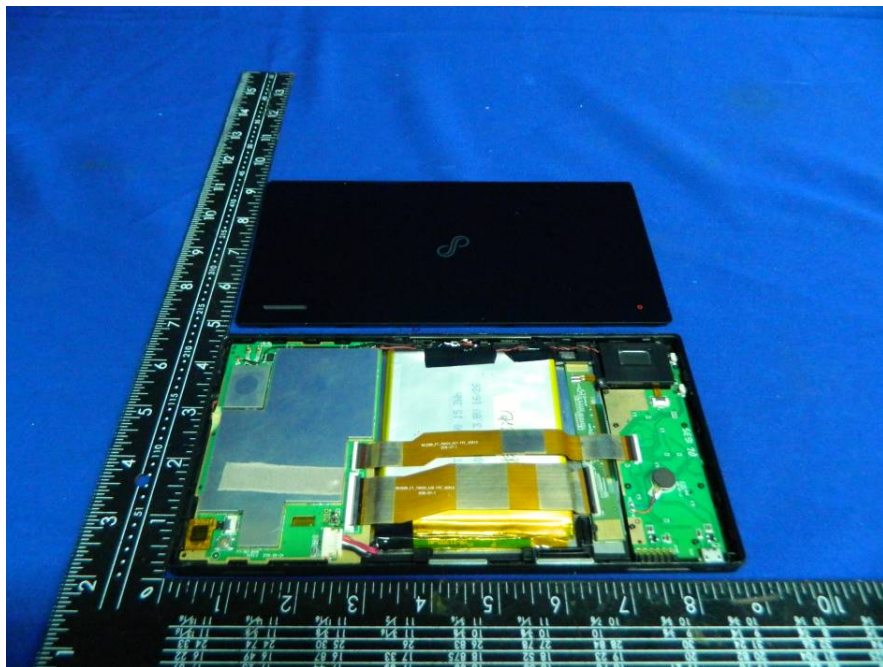

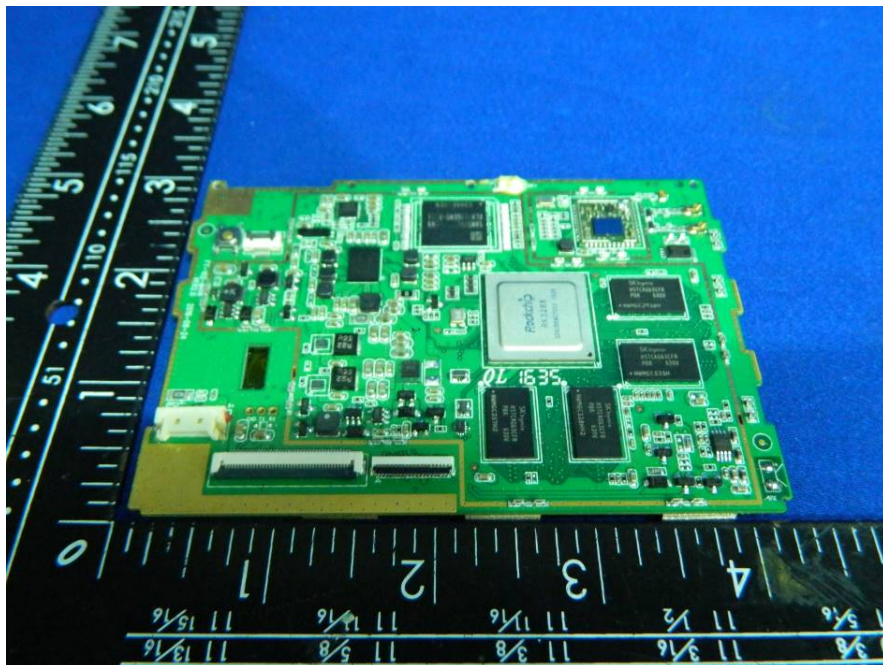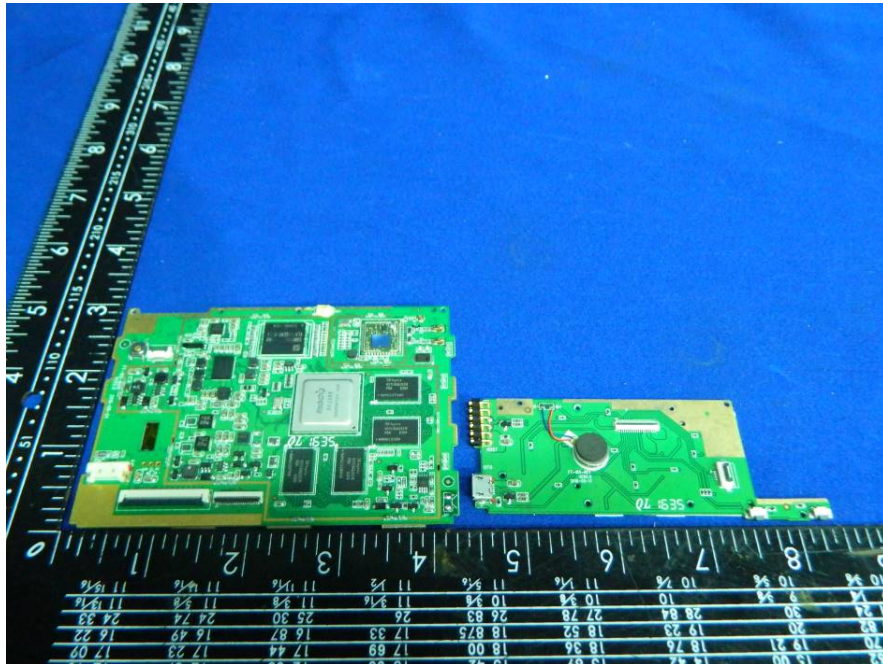

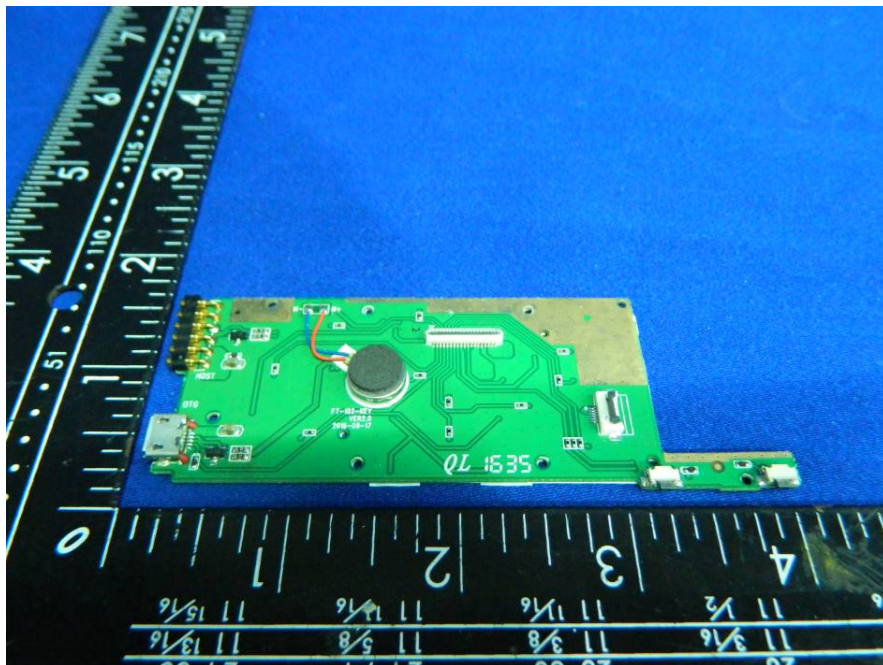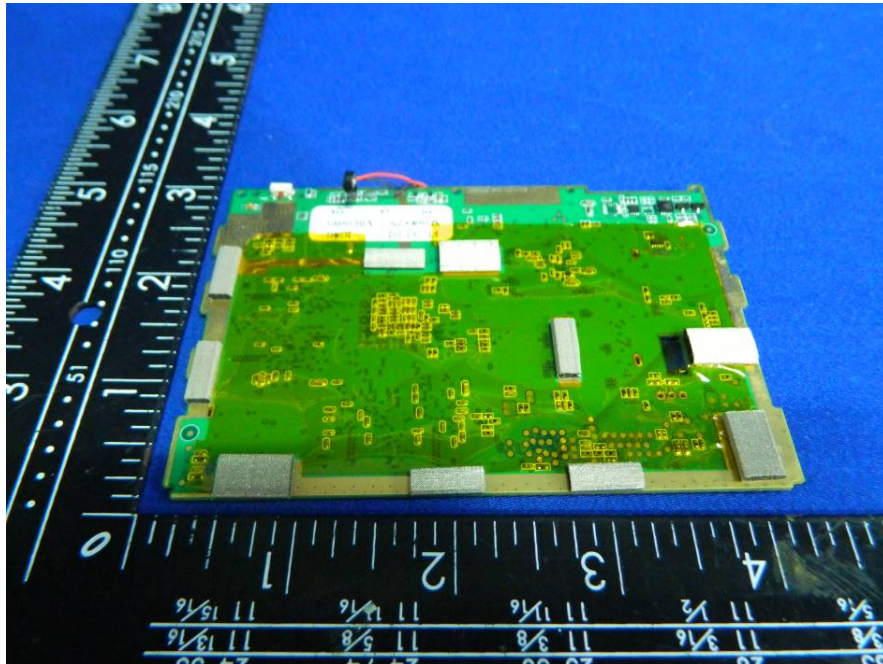

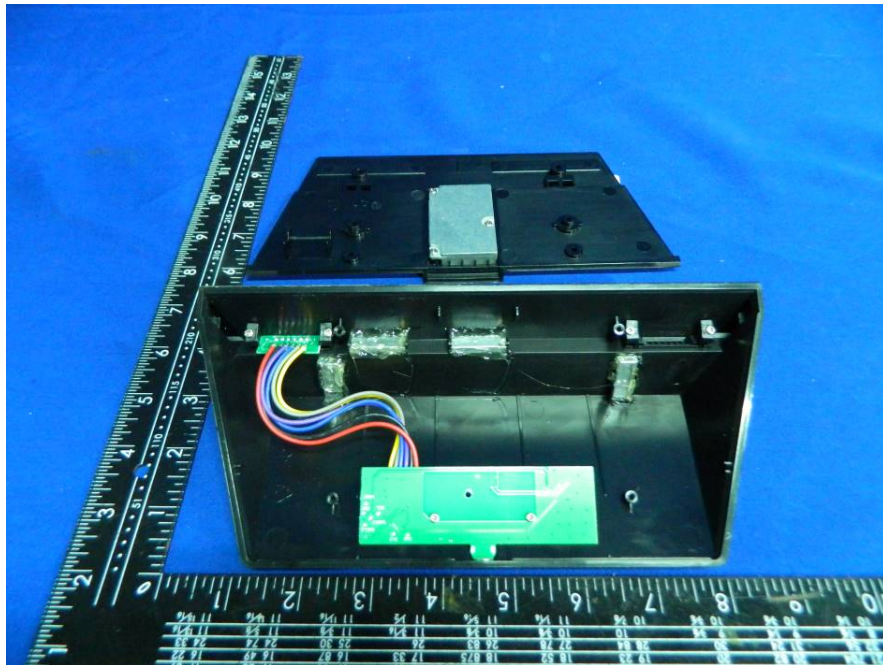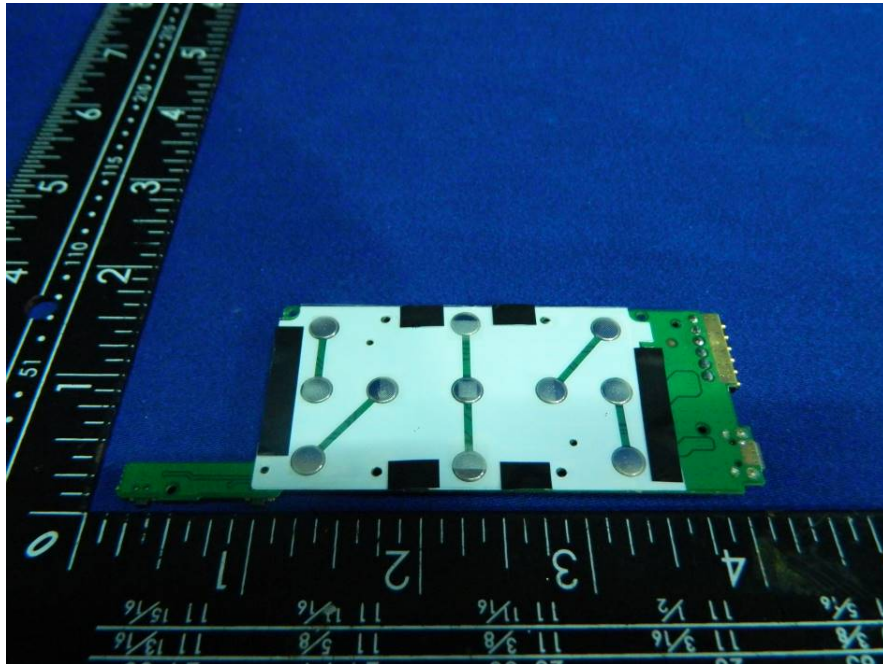

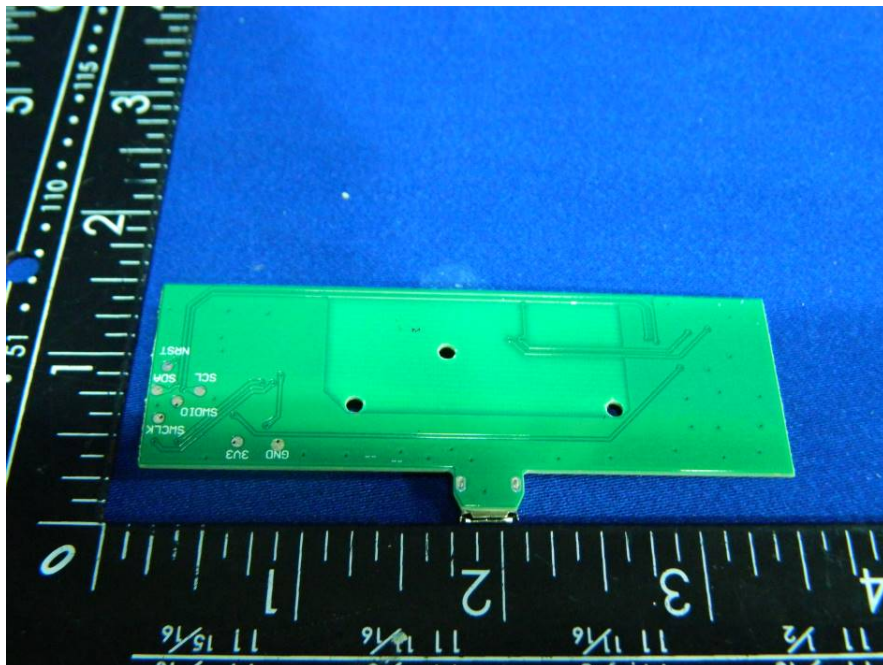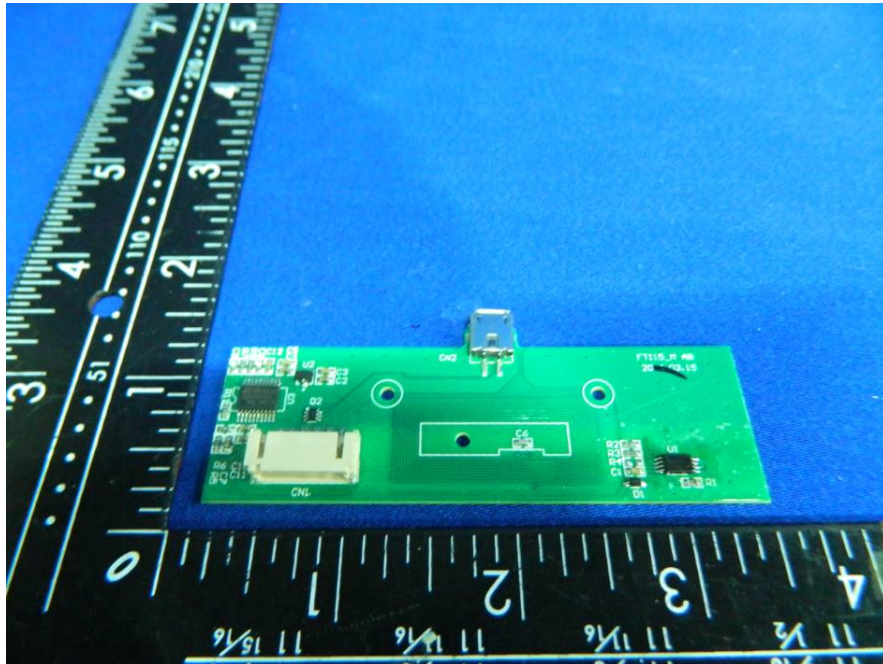



-----The end-----