

FCC PART 15.407
TEST REPORT

For

Prodrone Technology (Shenzhen) Co., Ltd

11th floor, Tower 1, Novel Park, 4078 Dongbin Road, Nanshan District, Shenzhen, China

FCC ID: 2AKIE-PD-O2-WF

Report Type: Original Report	Product Type: GDUO ₂
Report Number: RSZ180109810-00	
Report Date: 2018-02-02	
Reviewed By: RF Engineer	Rocky Kang <i>Rocky Kang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE	6
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
APPLICABLE STANDARD	12
RESULT	12
FCC §15.203 – ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
§15.205 & §15.209 & §15.407(b) (4),(6),(7) – UNDESIRABLE EMISSION	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST RESULTS SUMMARY	16
TEST DATA	16
§15.407(b) (4) –OUT OF BAND EMISSION	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.407(e) –6dB EMISSION BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST DATA	28
FCC §15.407(a) (3)– CONDUCTED TRANSMITTER OUTPUT POWER	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42

FCC §15.407(a) (3) - POWER SPECTRAL DENSITY.....44
 APPLICABLE STANDARD44
 TEST PROCEDURE44
 TEST DATA45

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Prodrone Technology (Shenzhen) Co., Ltd's* product, model number: *MGP03-O2 WF* (FCC ID: 2AKIE-PD-O2-WF) in this report was a *GDUO₂*, which was measured approximately: 190 mm (L) × 85 mm (W) × 65 mm (H) , rated with input voltage: DC 11.4 V battery or DC 13.05V from adapter.

Adapter Information:

Model: CPD-BC03

Input: AC 100-240V, 50/60Hz, 1.5A

Output: DC 13.05V, 3.0 A

**All measurement and test data in this report was gathered from production sample serial number: 180109810 (Assigned by BACL, shenzhen).The EUT supplied by the applicant was received on 2018-01-09.*

Objective

This type approval report is prepared on behalf of *Prodrone Technology (Shenzhen) Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

Submittal with the remote control unit of a system with FCC ID: 2AKIE-PD-RC03-WF.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

And KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	uncertainty
Occupied Channel Bandwidth	±5%
RF Output Power with Power meter	±0.5dB
RF conducted test with spectrum	±1.5dB
AC Power Lines Conducted Emissions	±1.95dB
All emissions, radiated	±4.88dB
Temperature	-30~60 °C
Humidity	±6%
Supply voltages	±0.4%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.


EUT Exercise Software

“ART.GUI” software was used for wifi testing.

Mode	Data rate	Power level		
		Low channel	Middle channel	High channel
802.11a	6 Mbps	20	20	20
802.11n20	MCS0	20	20	20


Duty cycle

802.11a Mode

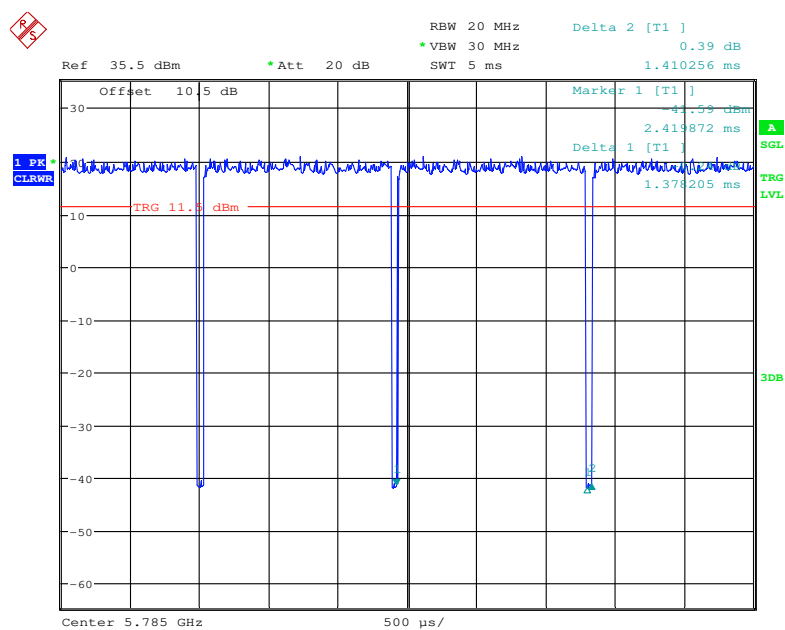

Date: 24.JAN.2018 21:01:46

802.11n20 mode

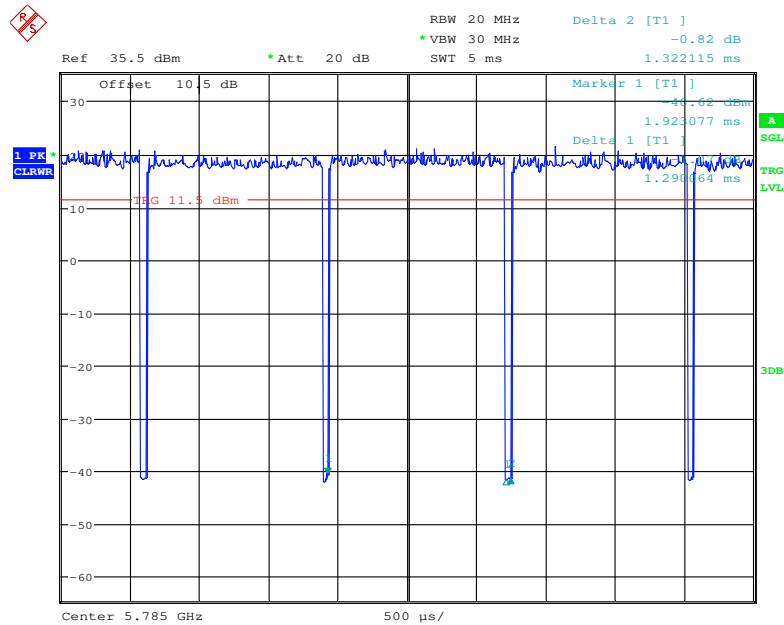

Date: 24.JAN.2018 21:00:49

Band	Duty Cycle (%)	T(ms)	1/T(kHz)	VBW Setting	10log(1/ Duty Cycle)
802.11a	98	-	-	10Hz	-
802.11n20	98	-	-	10Hz	-

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

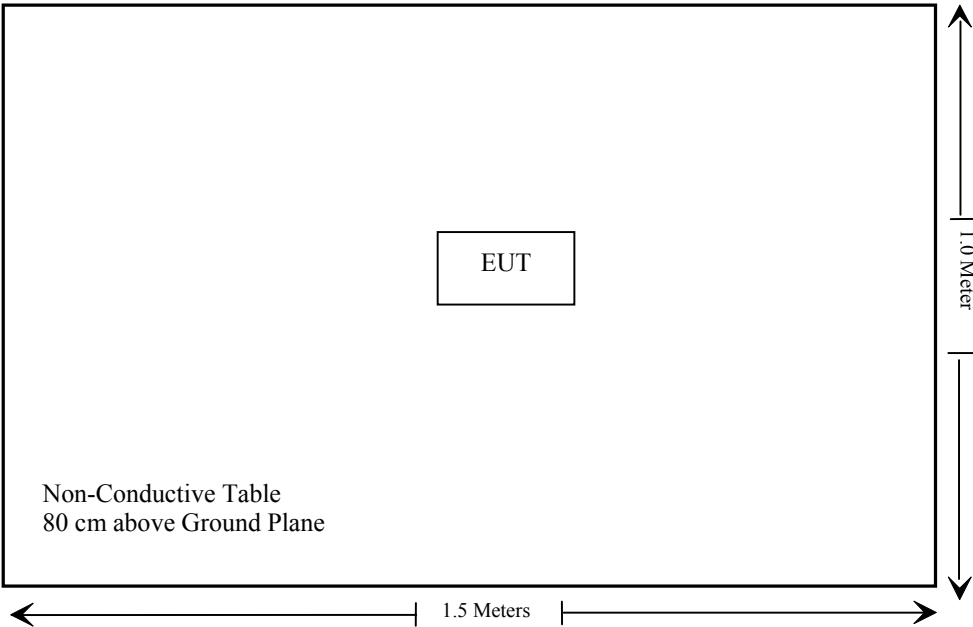

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Not Applicable
§15.205& §15.209 &§15.407(b) (4),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (4)	Out Of Band Emission	Compliance
§15.407(e)	6dB Bandwidth	Compliance
§15.407(a) (3)	Conducted Transmitter Output Power	Compliance
§15.407 (a) (3)	Power Spectral Density	Compliance

Note:

Not Applicable: The EUT is powered by battery and the battery can be removed to a charger while it's charging

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-29	2020-12-28
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-04	2017-12-29	2020-12-28
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2017-12-05	2018-12-05
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2017-04-09	2018-04-09
Agilent	Power Meter	N1912A	MY5000492	2017-11-18	2018-11-17
Agilent	Power Sensor	N1921A	MY54210024	2017-11-18	2018-11-17
Ducommun technologies	RF Cable	RG-214	3	2017-11-22	2018-05-22
WEINSCHTEL	10dB Attenuator	5324	AU 3842	2017-11-22	2018-05-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 1.1307 (b)(1), 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Maximum Tune-up power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
5745-5825	2.0	1.58	21	125.89	20	0.04	1.0

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

This product has two internal wifi antenna which were permanently attached with maximum gain 2.0 dBi, fulfill the requirement of this section, and please refer to the EUT photo.

Result: Compliance.

§15.205 & §15.209 & §15.407(b) (4),(6),(7) – UNDESIRABLE EMISSION**Applicable Standard**

FCC §15.407 (b) (4), (6), (7); §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


(4) For transmitters operating in the 5.725-5.85 GHz band:


(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

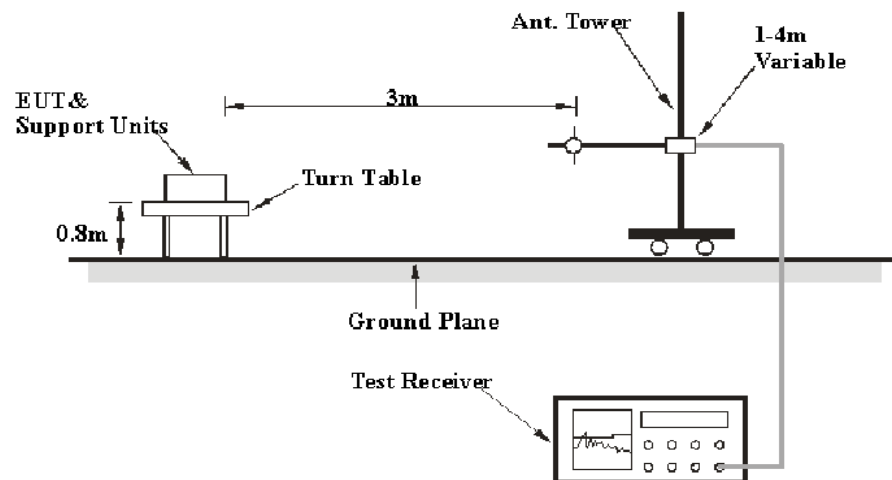

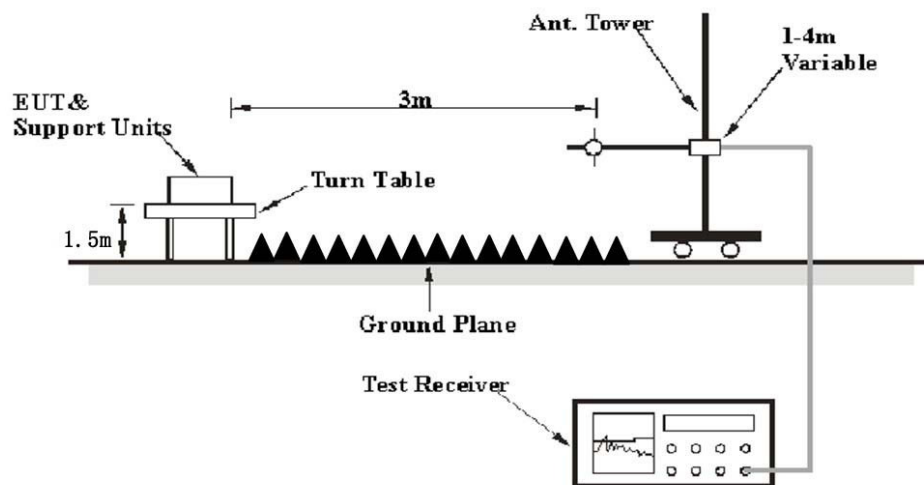Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Ave.
	1MHz	> 1/T ^{Note 2}	/	Ave.

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Radiated Spurious Emission

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-23.

EUT operation mode: Transmitting with two antenna simultaneously

30 MHz~1 GHz: (Worst case is 5825MHz in 802.11n20 mode)

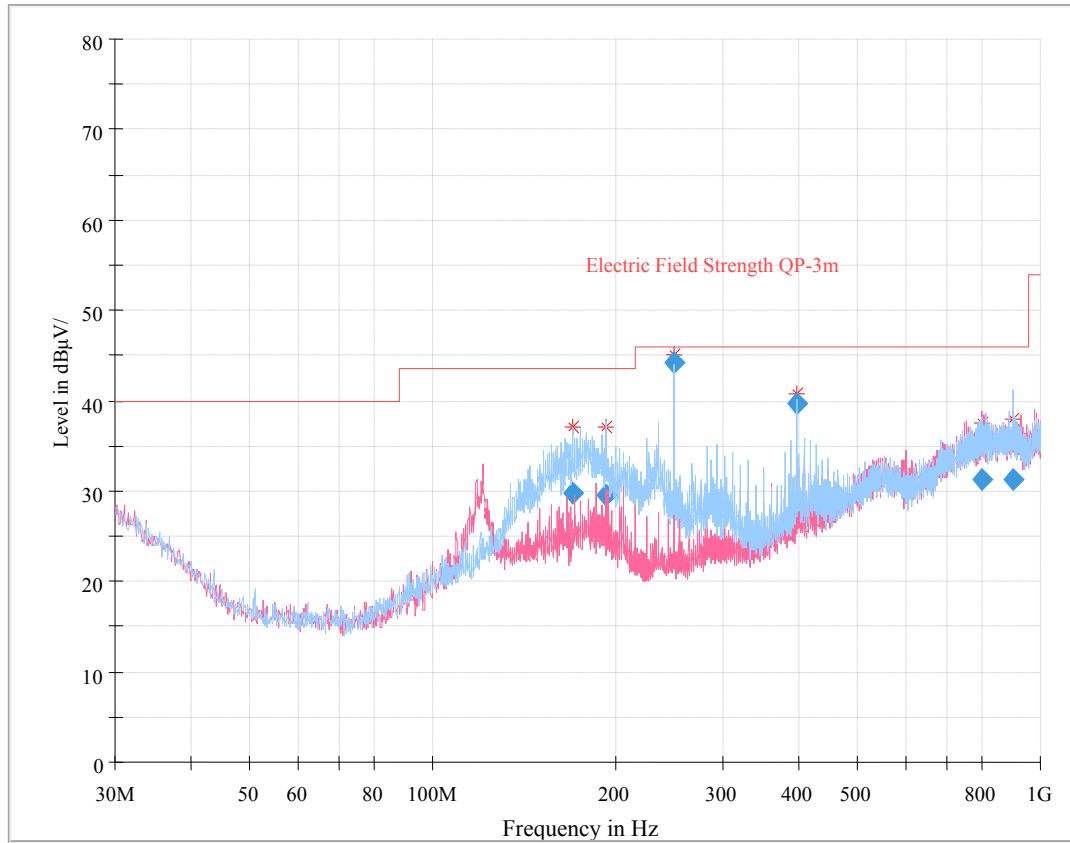

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
170.129500	29.85	137.0	H	0.0	-5.9	43.50	13.65
192.100875	29.62	113.0	H	162.0	-5.5	43.50	13.88
249.991875	44.15	108.0	H	91.0	-4.6	46.00	1.85
398.383875	39.64	100.0	H	77.0	0.0	46.00	6.36
804.149000	31.24	232.0	V	313.0	9.0	46.00	14.76
899.159000	31.28	225.0	H	0.0	9.7	46.00	14.72

1000 MHz ~ 40 GHz: (5725-5850 MHz)**802.11a mode:**

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	(PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
5745 MHz									
5745.00	72.44	PK	145	2.1	H	42.15	114.59	/	/
5745.00	59.06	Ave.	145	2.1	H	42.15	101.21	/	/
5745.00	69.71	PK	21	1.1	V	42.15	111.86	/	/
5745.00	56.58	Ave.	21	1.1	V	42.15	98.73	/	/
5724.97	46.61	PK	129	1.9	H	42.15	88.76	122.13	33.37
5718.36	35.19	PK	255	1.6	H	42.15	77.34	110.34	33.00
5689.37	29.65	PK	180	2.1	H	42.15	71.80	97.33	25.53
11490.00	39.01	PK	310	1.3	H	18.06	57.07	74	16.93
11490.00	26.07	Ave.	310	1.3	H	18.06	44.13	54	9.87
5785 MHz									
5785.00	72.91	PK	207	2.0	H	42.08	114.99	/	/
5785.00	59.46	Ave.	207	2.0	H	42.08	101.54	/	/
5785.00	71.15	PK	285	2.5	V	42.08	113.23	/	/
5785.00	58.17	Ave.	285	2.5	V	42.08	100.25	/	/
11570.00	41.18	PK	265	2.3	H	18.04	59.22	74	14.78
11570.00	26.52	Ave.	265	2.3	H	18.04	44.56	54	9.44
5825 MHz									
5825.00	74.41	PK	243	1.7	H	42.08	116.49	/	/
5825.00	60.92	Ave.	243	1.7	H	42.08	103.00	/	/
5825.00	68.36	PK	358	1.1	V	42.08	110.44	/	/
5825.00	56.23	Ave.	358	1.1	V	42.08	98.31	/	/
5850.30	39.23	PK	327	1.2	H	42.55	81.78	121.52	39.74
5856.39	32.16	PK	52	1.2	H	42.55	74.71	110.41	35.70
5875.69	27.78	PK	306	1.0	H	42.55	70.33	104.69	34.36
11650.00	40.52	PK	21	2.1	H	18.04	58.56	74	15.44
11650.00	26.29	Ave.	21	2.1	H	18.04	44.33	54	9.67

802.11n20 mode:

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part 15.407/205/209	
	Reading (dBμV)	(PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
5745 MHz									
5745.00	73.47	PK	118	2.3	H	42.15	115.62	/	/
5745.00	60.88	Ave.	118	2.3	H	42.15	103.03	/	/
5745.00	71.32	PK	81	1.7	V	42.15	113.47	/	/
5745.00	58.34	Ave.	81	1.7	V	42.15	100.49	/	/
5724.85	40.23	PK	109	2.1	H	42.15	82.38	121.86	39.48
5719.33	31.57	PK	154	1.5	H	42.15	73.72	110.61	36.89
5696.51	28.63	PK	347	1.1	H	42.15	70.78	102.62	31.84
11490.00	41.36	PK	177	2.1	H	18.06	59.42	74	14.58
11490.00	26.75	Ave.	177	2.1	H	18.06	44.81	54	9.19
5785 MHz									
5785.00	72.42	PK	213	1.5	H	42.08	114.50	/	/
5785.00	59.77	Ave.	213	1.5	H	42.08	101.85	/	/
5785.00	69.49	PK	23	1.9	V	42.08	111.57	/	/
5785.00	55.26	Ave.	23	1.9	V	42.08	97.34	/	/
11570.00	41.62	PK	274	1.4	H	18.32	59.94	74	14.06
11570.00	26.37	Ave.	274	1.4	H	18.32	44.69	54	9.31
5825 MHz									
5825.00	72.49	PK	220	1.2	H	42.08	114.57	/	/
5825.00	58.46	Ave.	220	1.2	H	42.08	100.54	/	/
5825.00	68.34	PK	45	1.3	V	42.08	110.42	/	/
5825.00	54.95	Ave.	45	1.3	V	42.08	97.03	/	/
5850.25	33.63	PK	138	2.1	H	42.55	76.18	121.63	45.45
5855.39	30.57	PK	126	1.5	H	42.55	73.12	110.69	37.57
5879.63	27.89	PK	133	1.6	H	42.55	70.44	101.77	31.33
11650.00	41.74	PK	258	1.5	H	18.32	60.06	74	13.94
11650.00	27.81	Ave.	258	1.5	H	18.32	46.13	54	7.87

Note:

Corrected Amplitude = Corrected Factor + Reading



Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit- Corr. Amplitude



Spurious emissions more than 20 dB below the limit were not reported.

802.11n20 mode


Pre-scan for 1~18 GHz, H

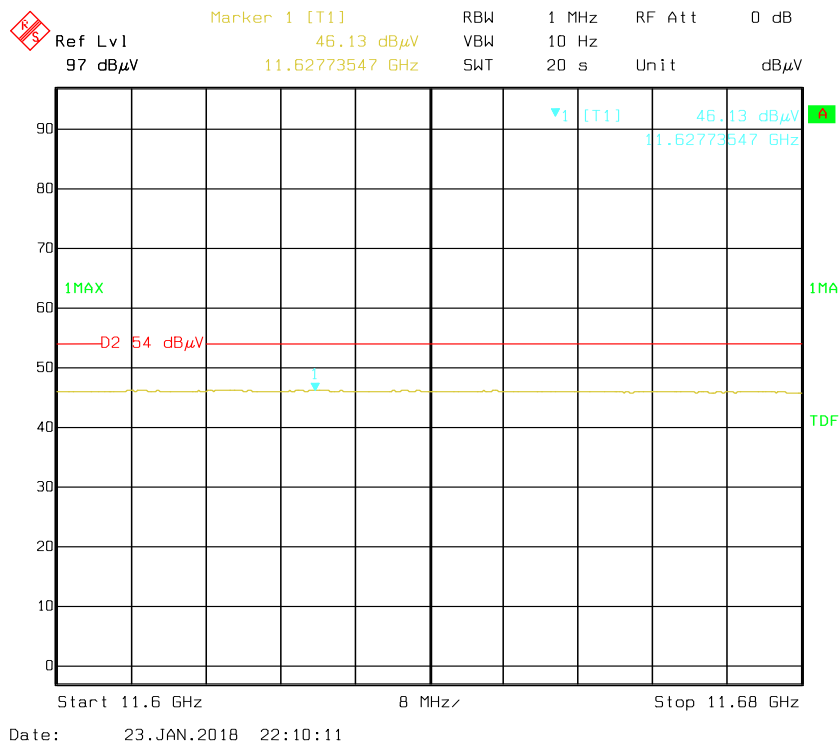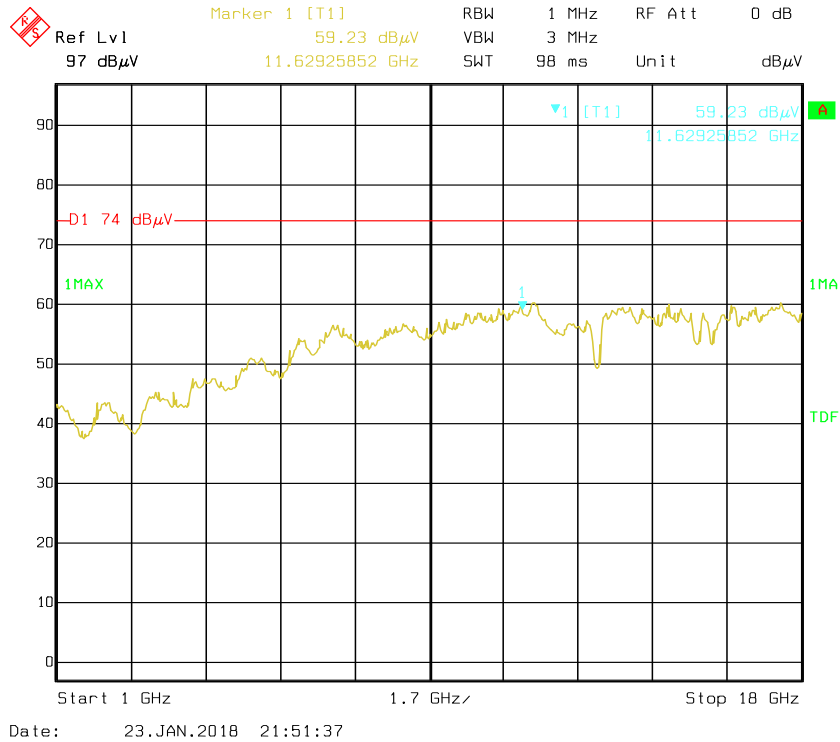


Pre-scan for 1~18 GHz, V

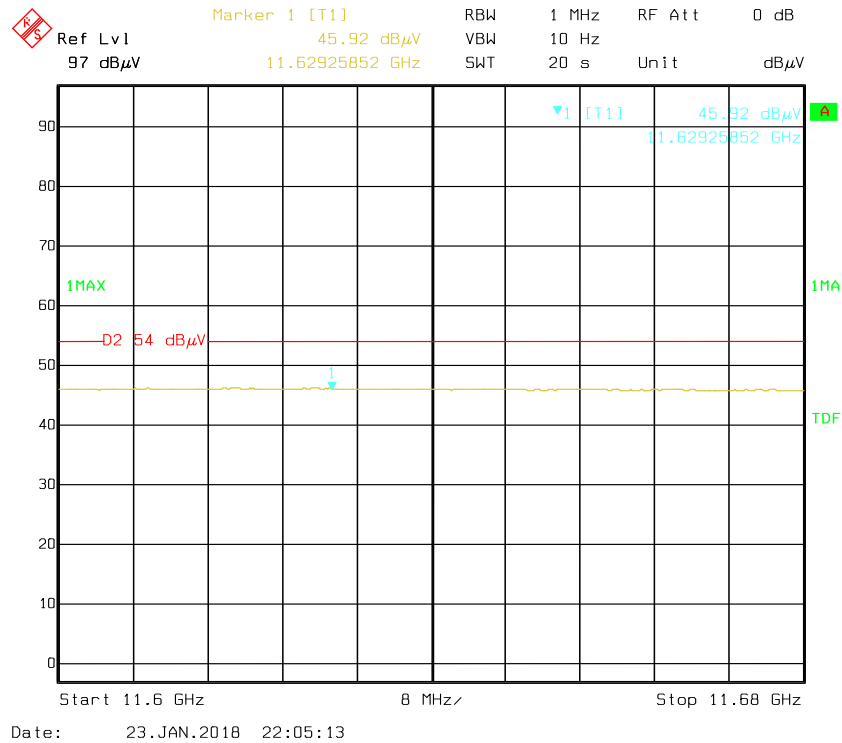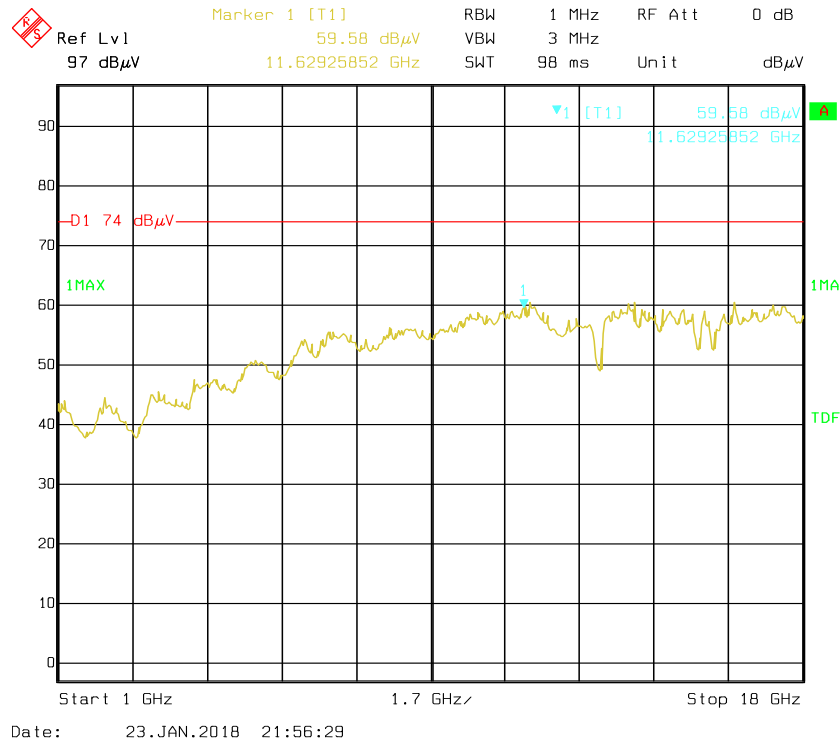

5825 MHz, Above 18 GHz, H

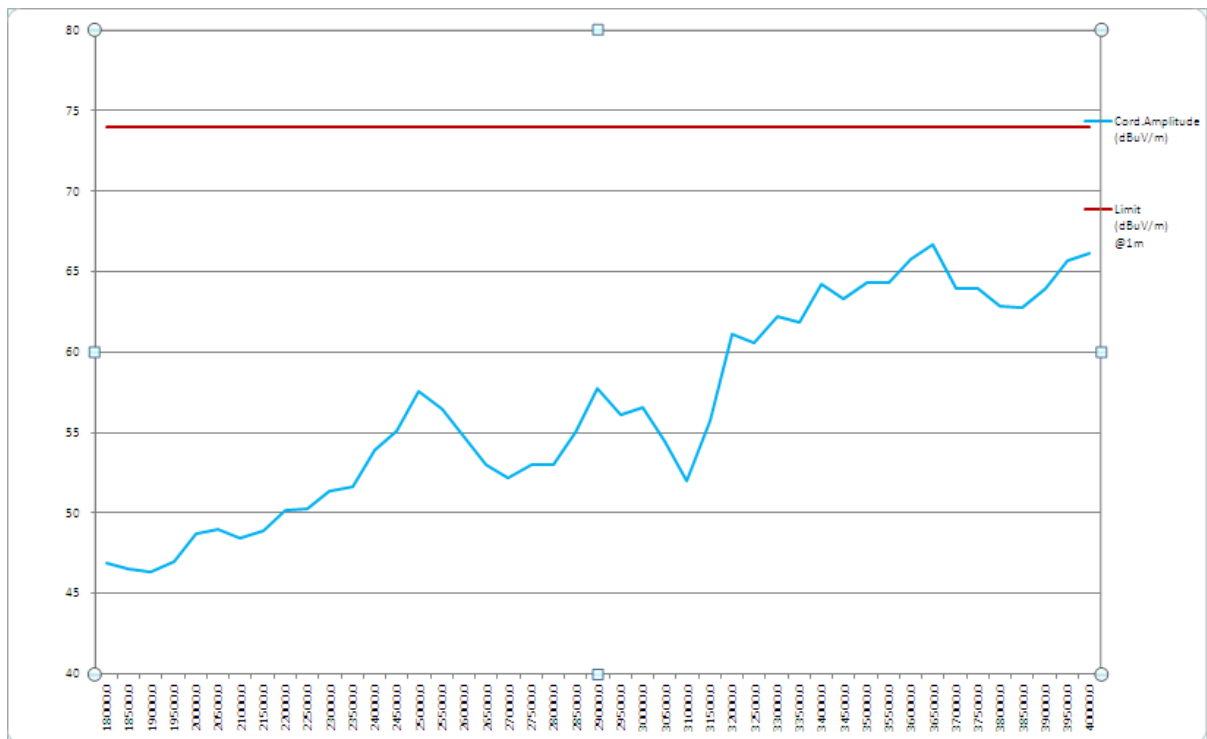

5825 MHz, Above 18 GHz, V

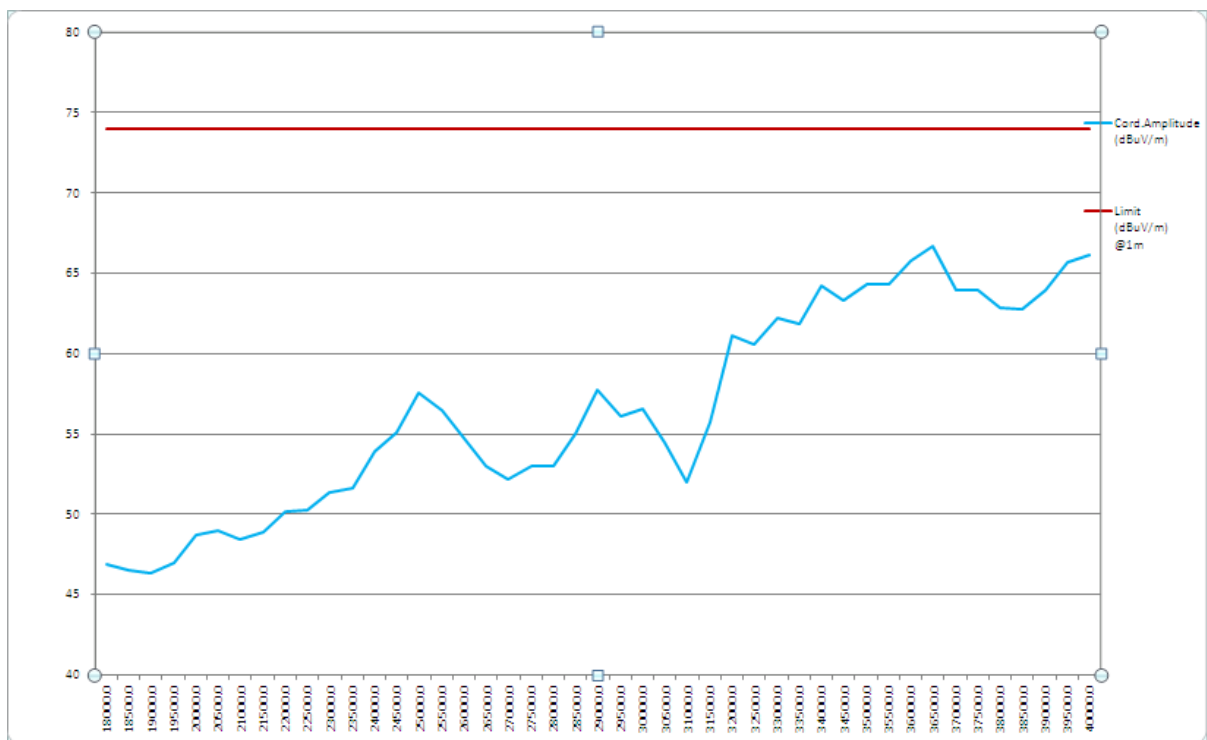

§15.407(b) (4) –OUT OF BAND EMISSION


Applicable Standard

FCC §15.407 (b) (4);

For transmitters operating in the 5.725–5.825 GHz band: All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The Resolution bandwidth is set to 1MHz, The Video bandwidth is set to ≥ 1 MHz, report the peak value out of the operating band.
3. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Dylan Li on 2018-01-23.

EUT operation mode: Transmitting

Note: The antenna gain had been offset in the plots, the limit is EIRP.


Antenna 0:

802.11a mode, Band Edge, Left Side

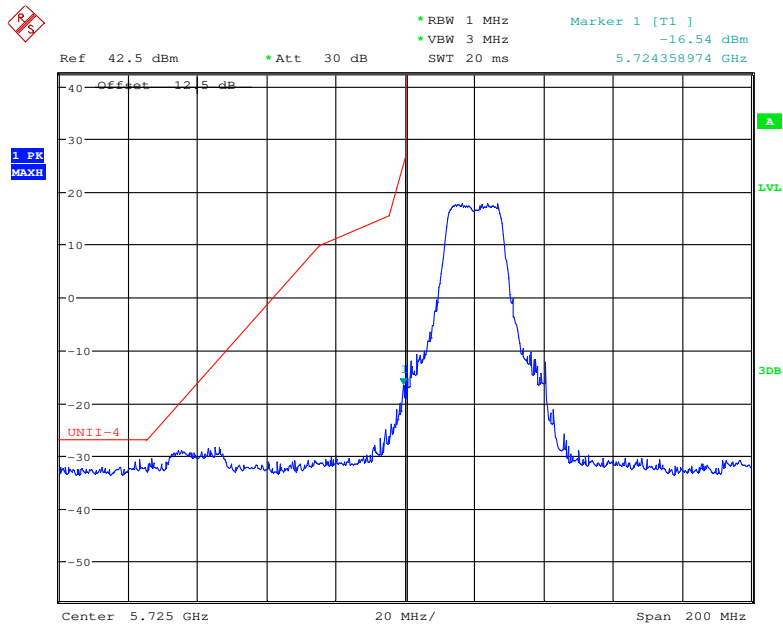


Date: 23.JAN.2018 22:26:43

802.11a mode, Band Edge, Right Side

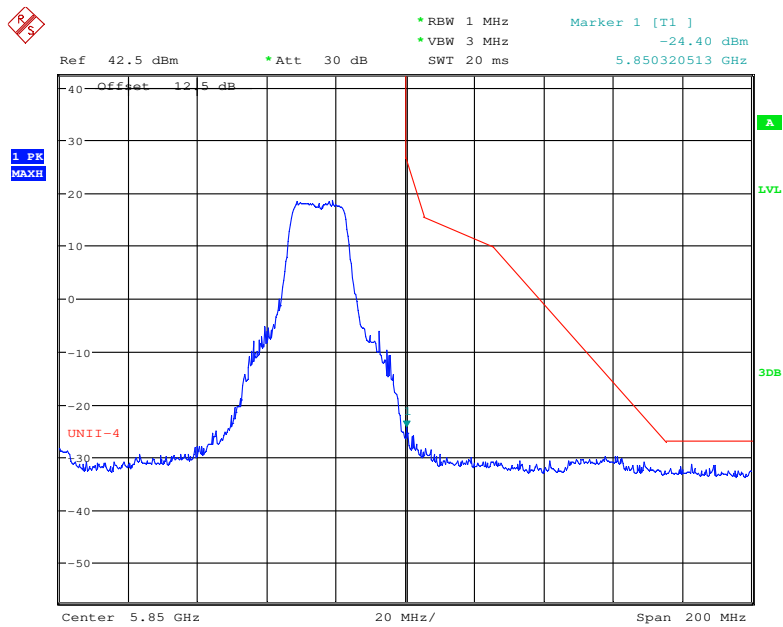


Date: 23.JAN.2018 22:28:25

802.11n20 mode, Band Edge, Left Side

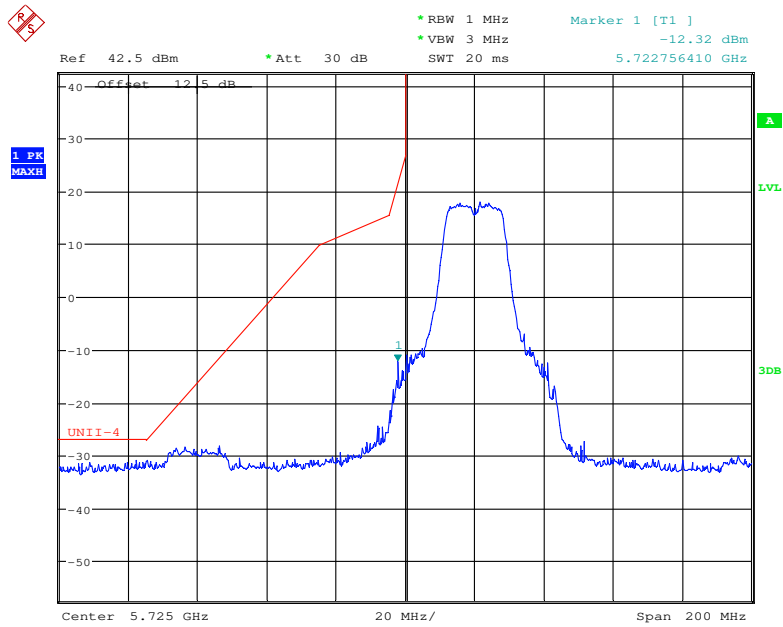

Date: 23.JAN.2018 22:25:49


802.11n20 mode, Band Edge, Right Side

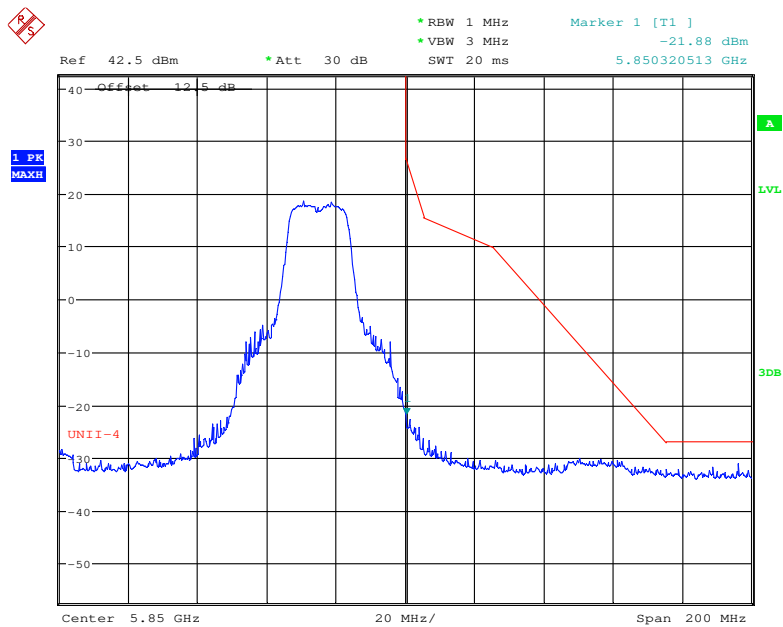

Date: 23.JAN.2018 22:24:08


Antenna 1:

802.11a mode, Band Edge, Left Side

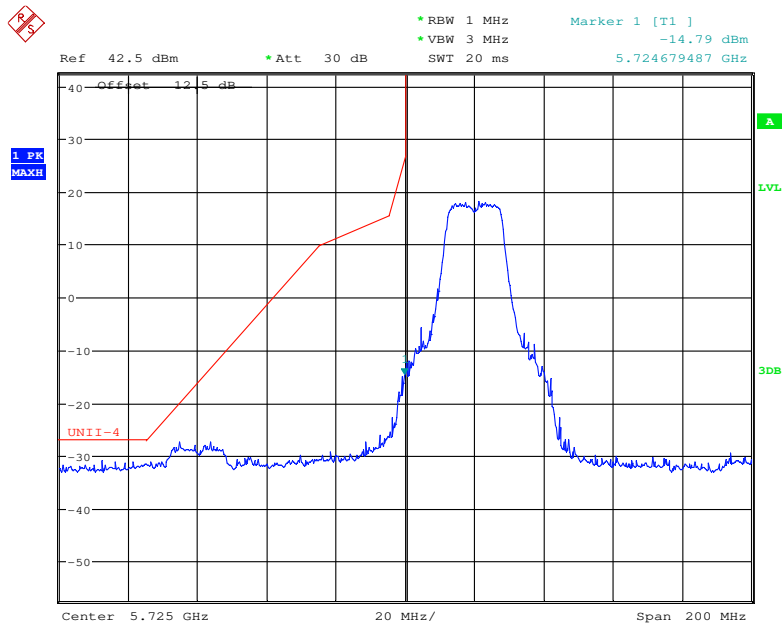


Date: 23.JAN.2018 22:49:48

802.11a mode, Band Edge, Right Side

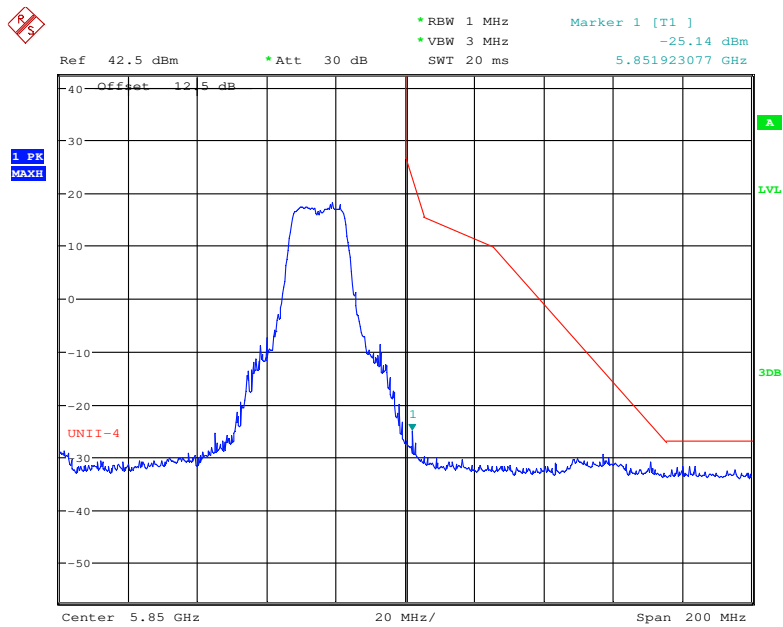


Date: 23.JAN.2018 22:52:03

802.11n20 mode, Band Edge, Left Side

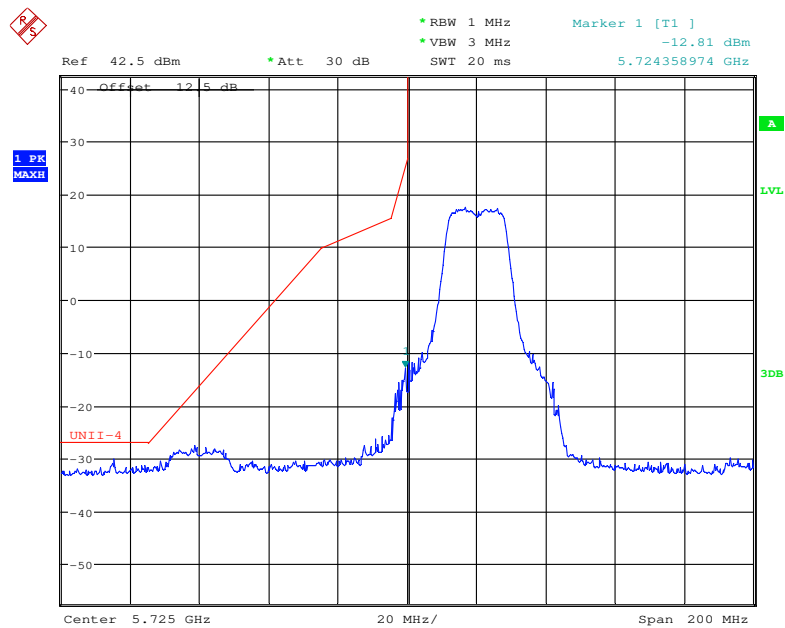

Date: 23.JAN.2018 22:54:49

802.11n20 mode, Band Edge, Right Side

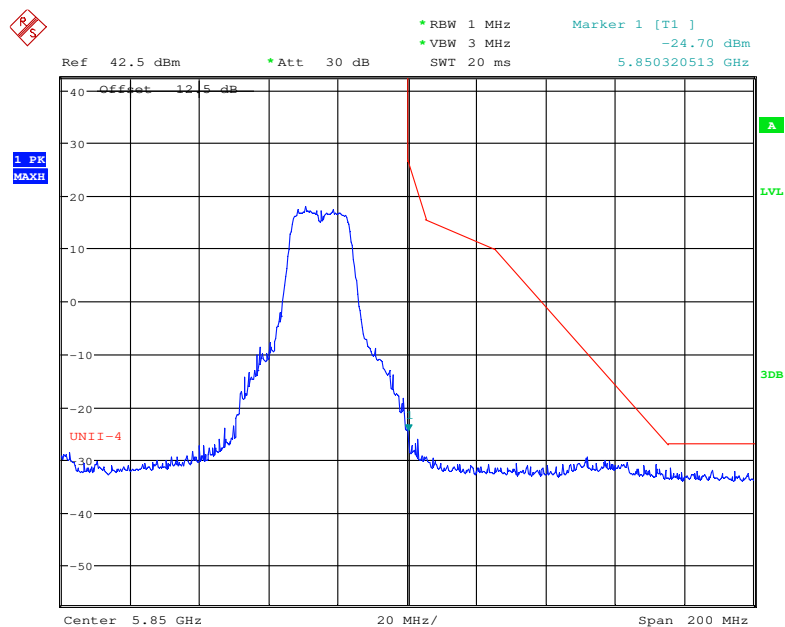

Date: 23.JAN.2018 22:53:36

Note: According the testing data, all the emissions was below the limit 3dB, so the two antennas transmit simultaneously result was pass.

FCC §15.407(e) –6dB EMISSION BANDWIDTH

Applicable Standard


Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure

1. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-23.

EUT operation mode: Transmitting


Test Result: Pass; please refer to the following tables and plots.

5725 MHz – 5850 MHz:

Frequency (MHz)	Antenna Port	6dB Bandwidth (MHz)	99% bandwidth (MHz)
802.11a			
5745	0	16.39	17.12
	1	16.39	17.12
5785	0	16.39	17.12
	1	16.44	17.05
5825	0	16.39	17.12
	1	16.44	17.05
802.11n20			
5745	0	17.16	18.21
	1	17.07	18.27
5785	0	17.16	18.21
	1	17.16	18.21
5825	0	17.36	18.14
	1	17.12	18.14


Antenna 0:

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

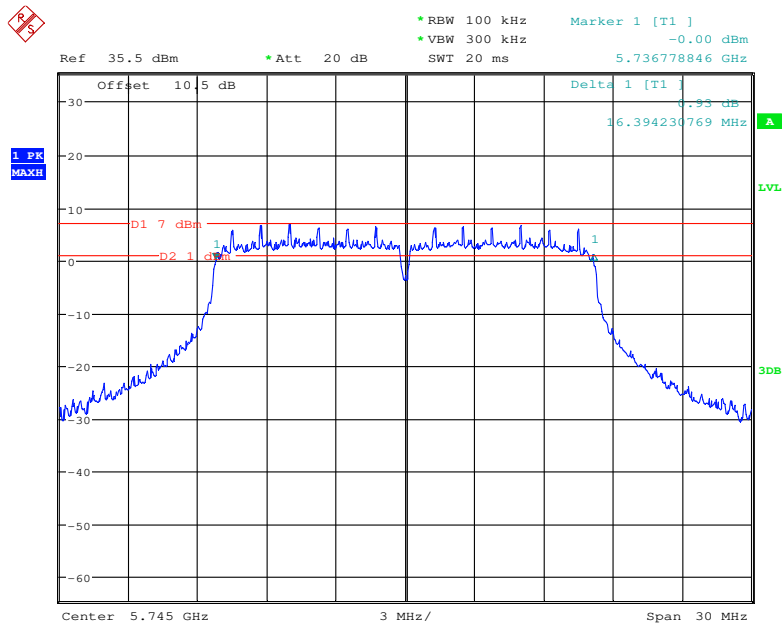


Date: 23.JAN.2018 23:44:19

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

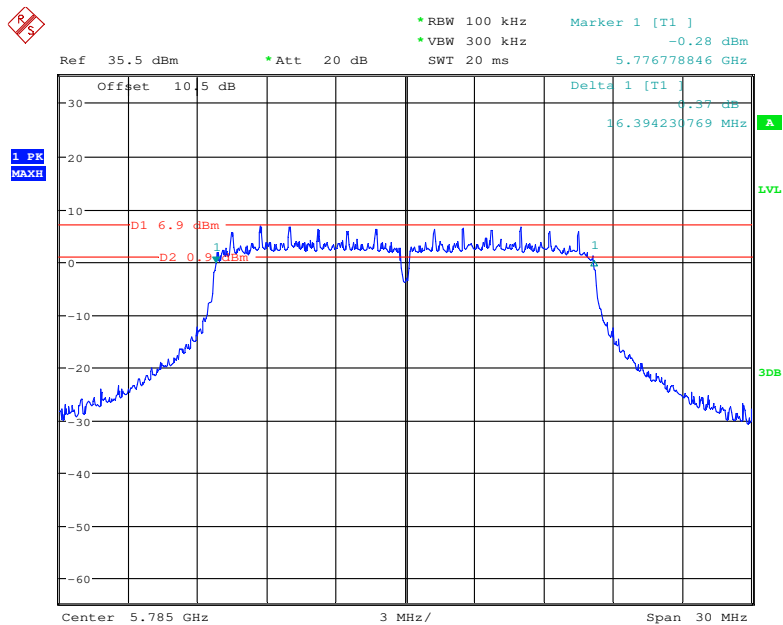


Date: 23.JAN.2018 23:41:41

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

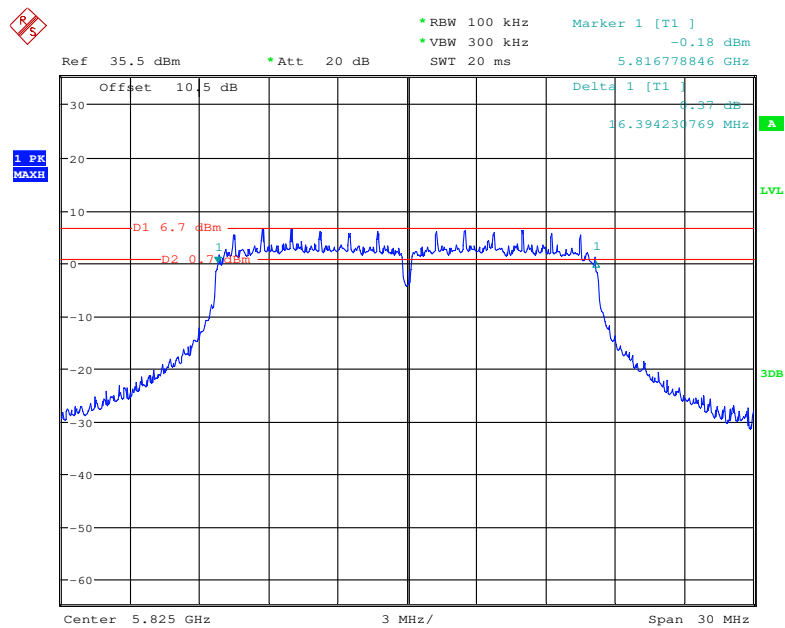


Date: 23.JAN.2018 23:40:08

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

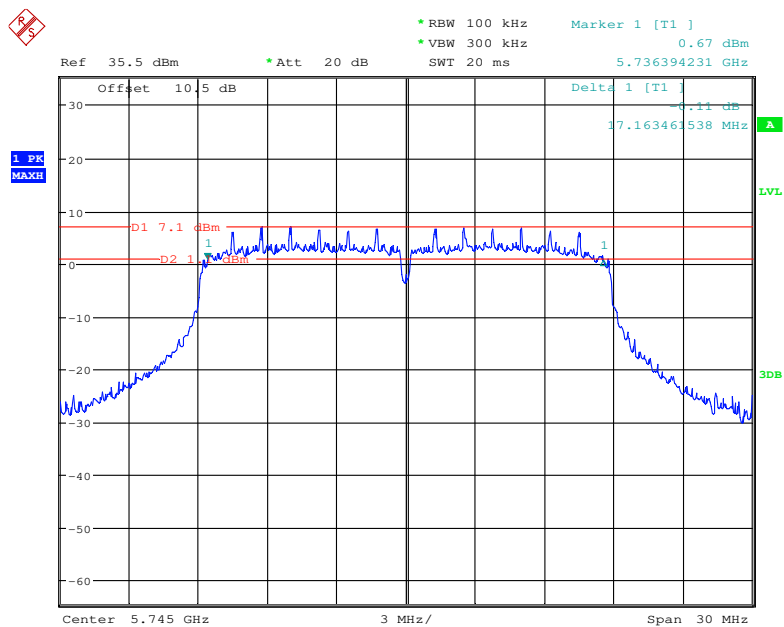


Date: 23.JAN.2018 23:32:59

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

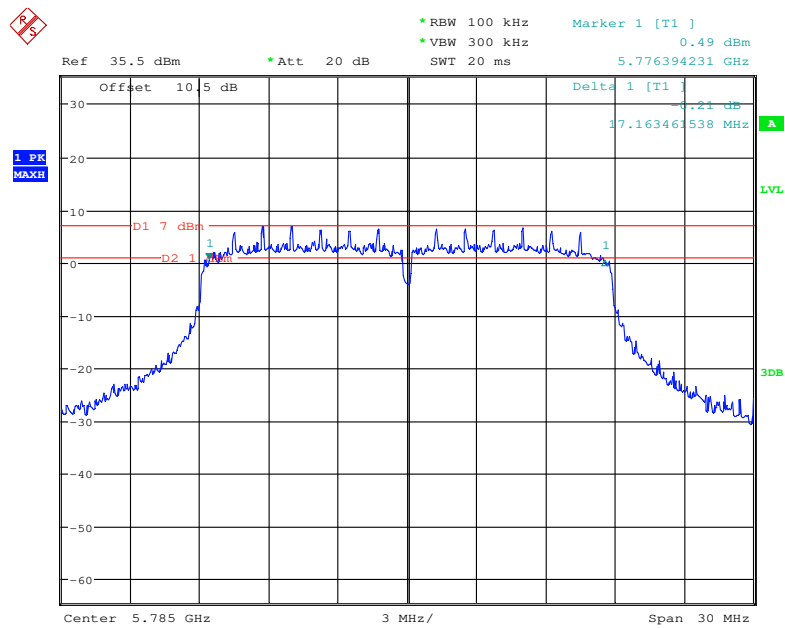


Date: 23.JAN.2018 23:36:44

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

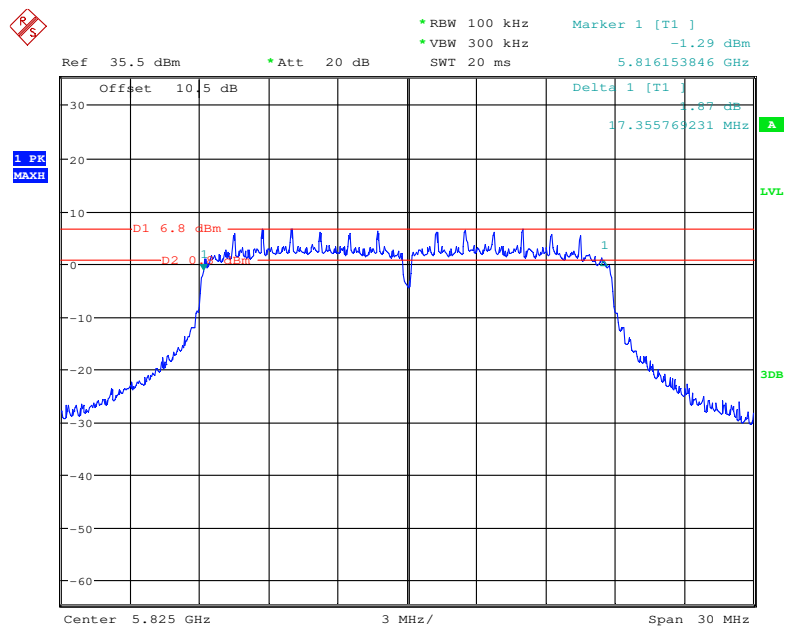


Date: 23.JAN.2018 23:38:40

802.11a mode, 99% Occupied Bandwidth, 5745 MHz

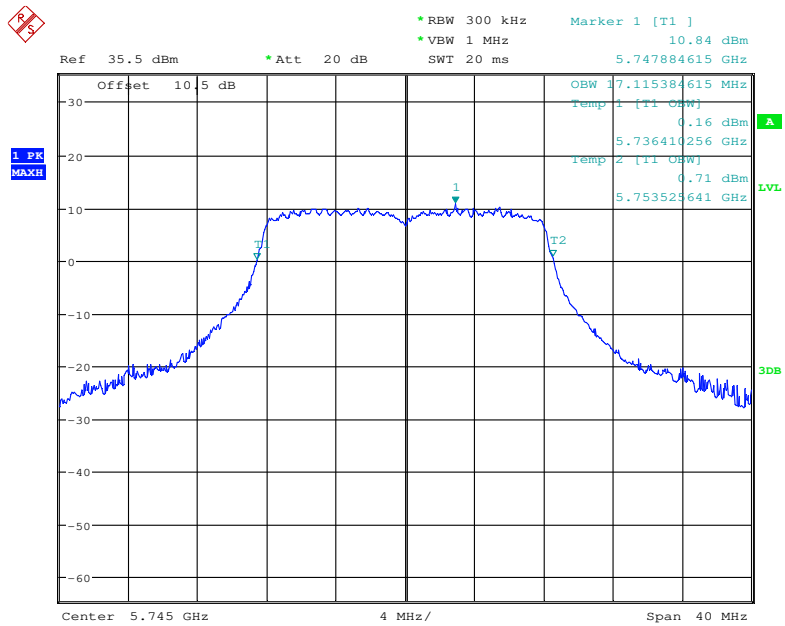


Date: 23.JAN.2018 23:46:08

802.11a mode, 99% Occupied Bandwidth, 5785 MHz

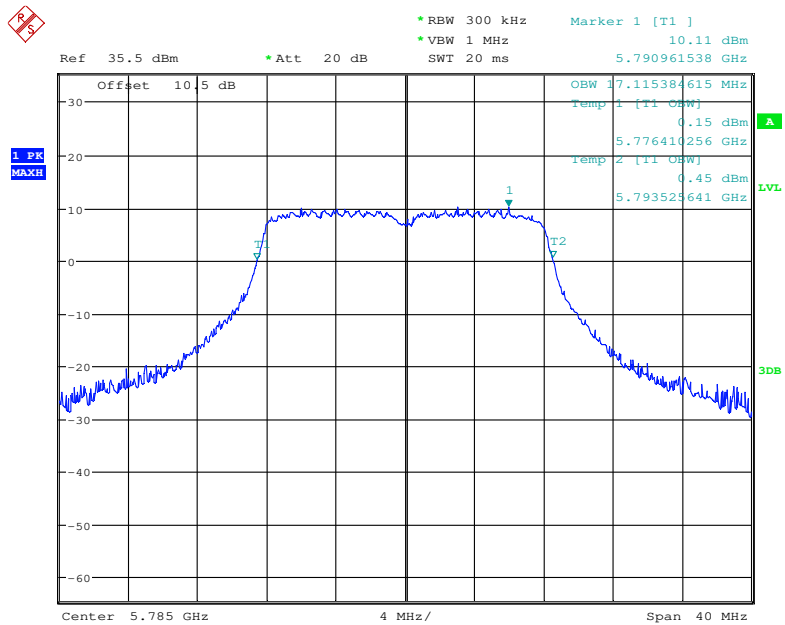


Date: 23.JAN.2018 23:46:51

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

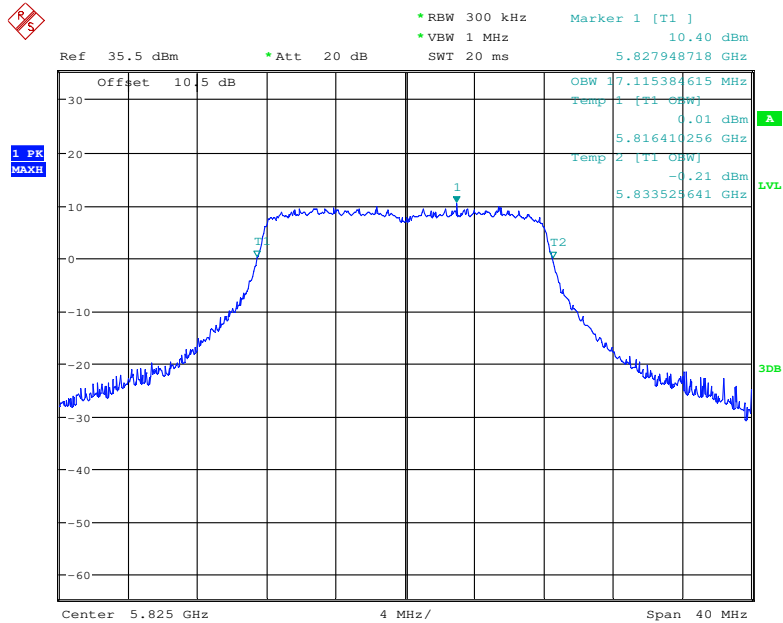


Date: 23.JAN.2018 23:47:26

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

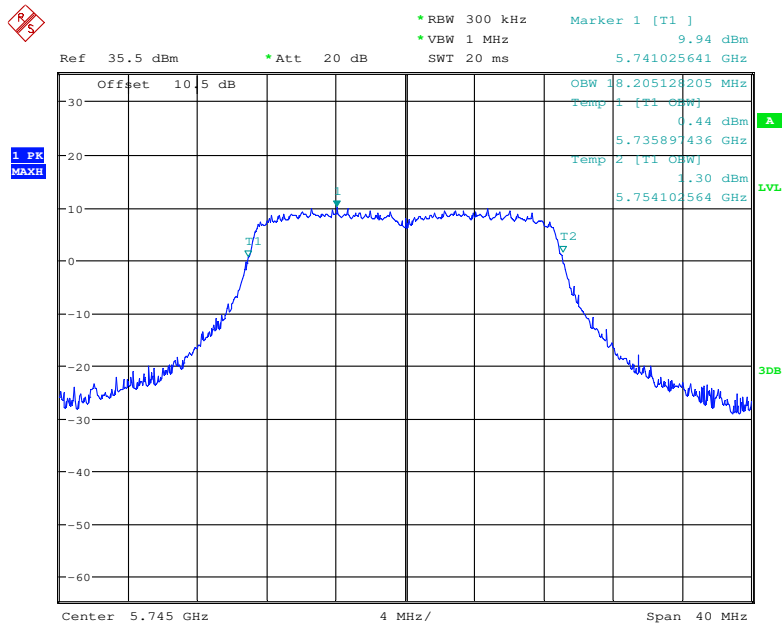


Date: 23.JAN.2018 23:49:28

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

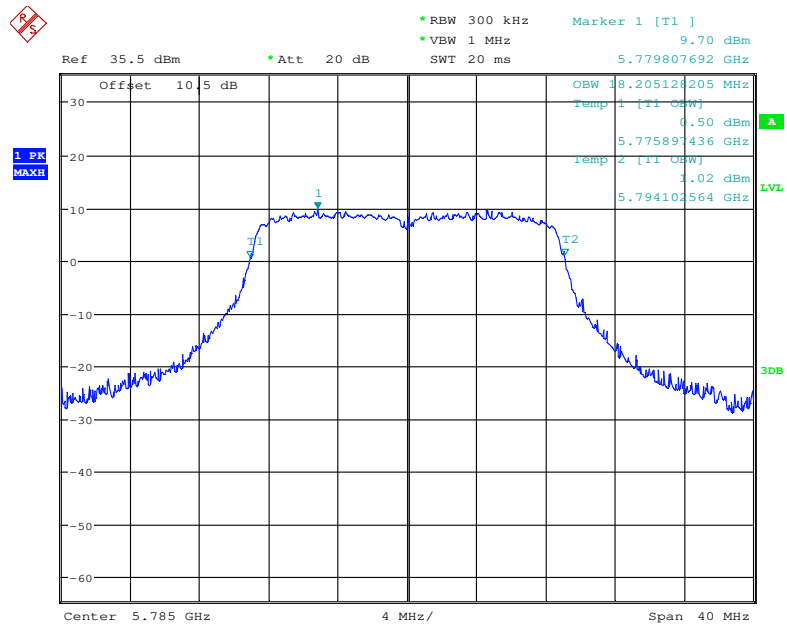

Date: 23.JAN.2018 23:48:56


802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

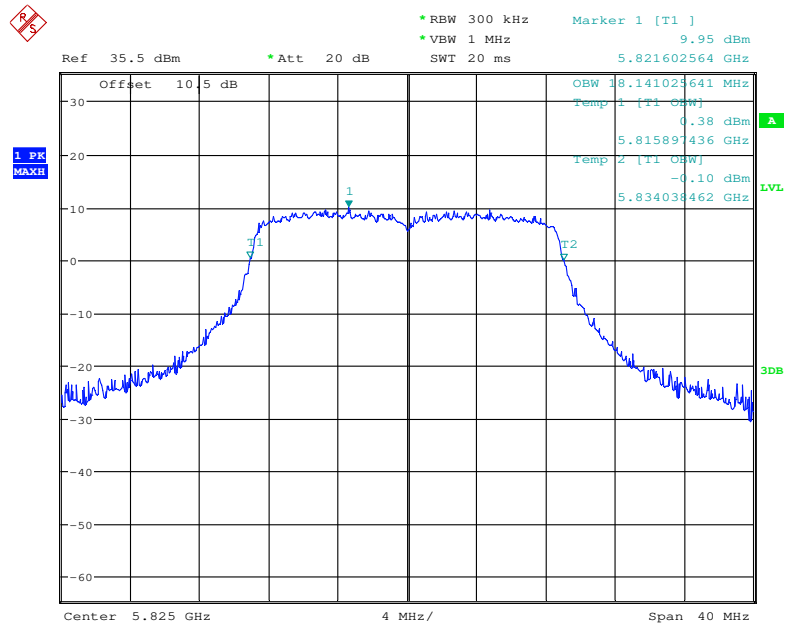

Date: 23.JAN.2018 23:48:09


Antenna 1:

802.11a mode, 6dB Emission Bandwidth, 5745 MHz

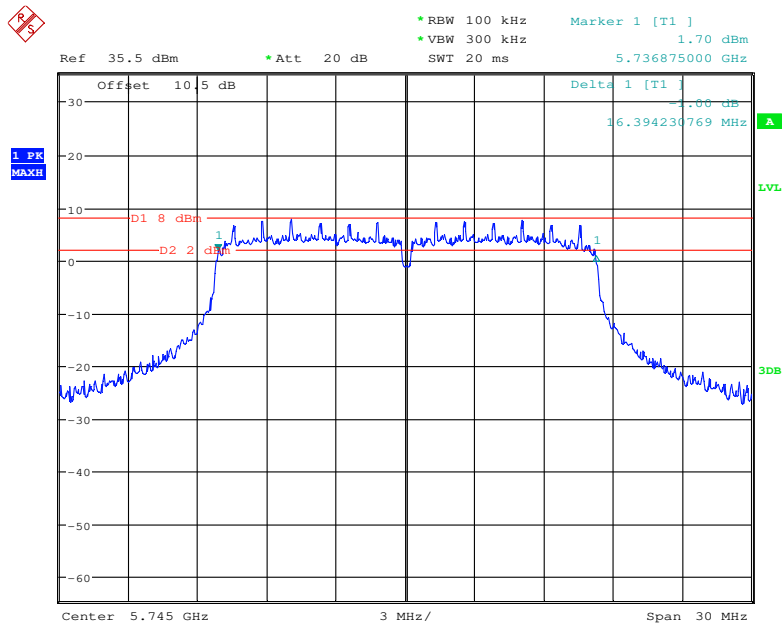


Date: 23.JAN.2018 23:09:06

802.11a mode, 6dB Emission Bandwidth, 5785 MHz

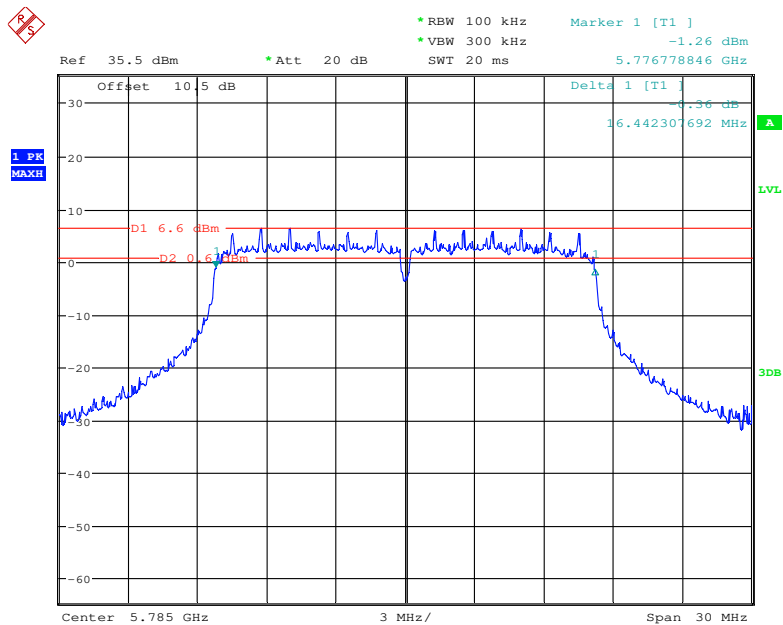


Date: 23.JAN.2018 23:16:46

802.11a mode, 6dB Emission Bandwidth, 5825 MHz

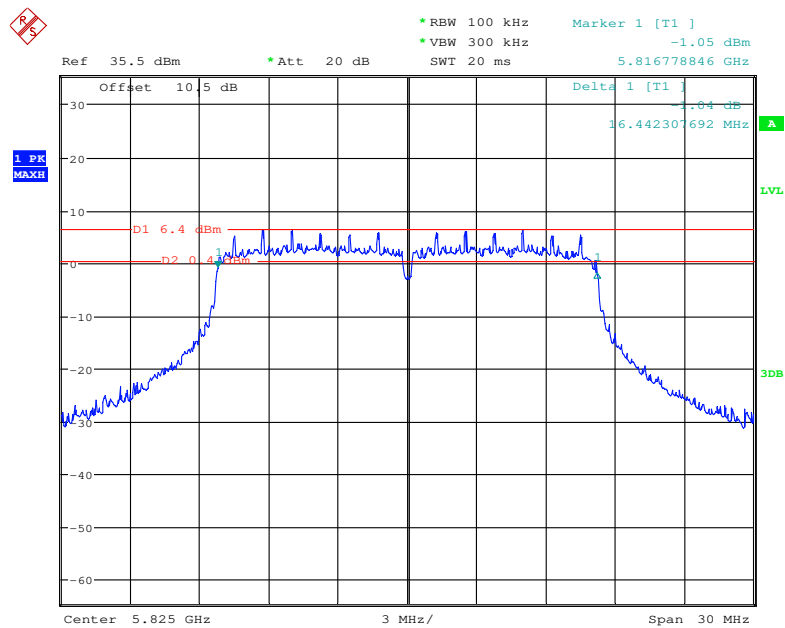


Date: 23.JAN.2018 23:18:33

802.11n20 mode, 6dB Emission Bandwidth, 5745 MHz

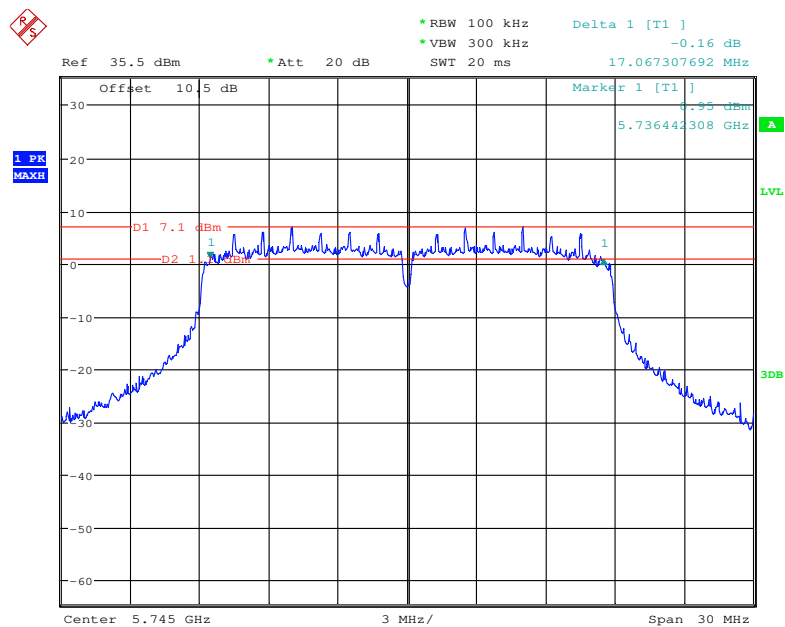


Date: 23.JAN.2018 23:25:45

802.11n20 mode, 6dB Emission Bandwidth, 5785 MHz

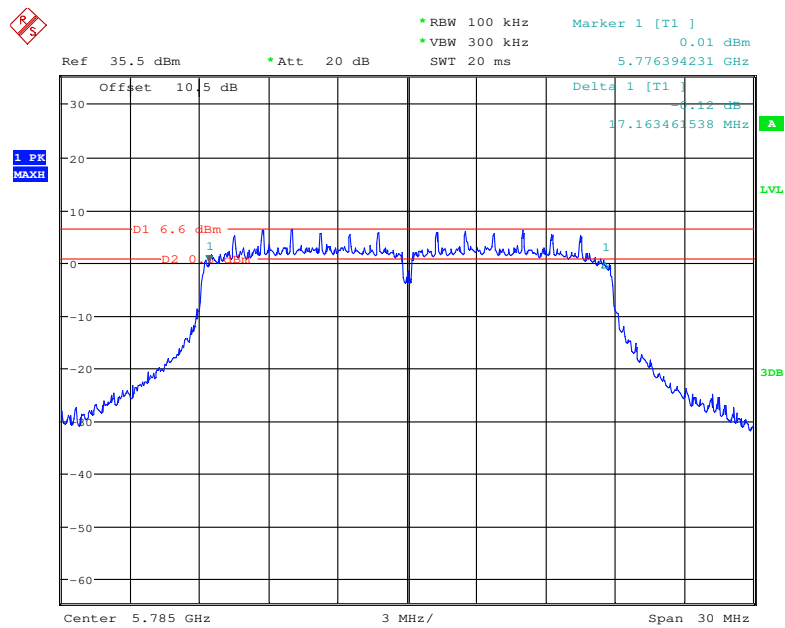

Date: 23.JAN.2018 23:22:24

802.11n20 mode, 6dB Emission Bandwidth, 5825 MHz

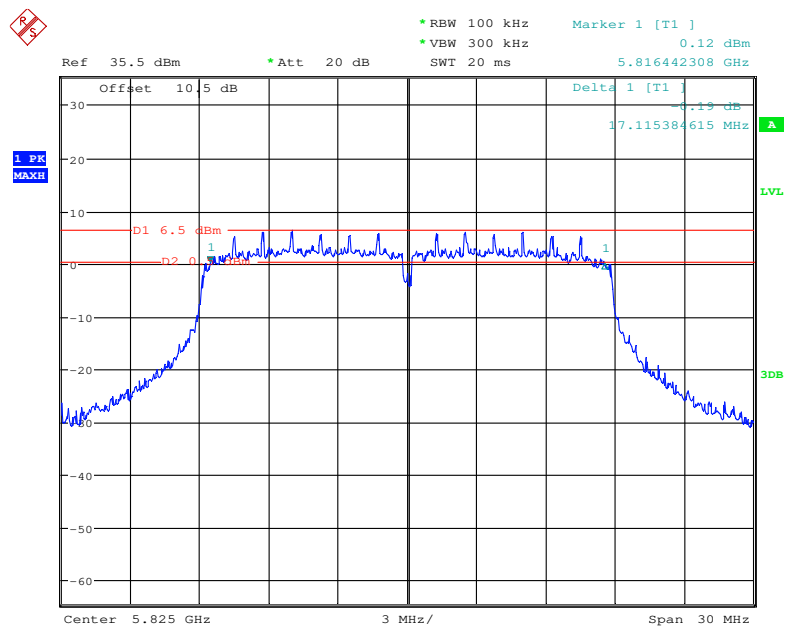

Date: 23.JAN.2018 23:20:27

1 PK
MAXH

Ref 35.5 dBm * Att 20 dB

* RBW 300 kHz * VBW 1 MHz

SWT 20 ms

Marker 1 [T1] 10.19 dBm

5.750512821 GHz

Offset 10.5 dB

OBW 17.115384615 MHz

Temp 1 [T1 OBW]

-0.13 dBm

5.736474359 GHz

Temp 2 [T1 OBW]

0.52 dBm

5.753589744 GHz

Center 5.745 GHz

4 MHz/

Span 40 MHz

Date: 23.JAN.2018 23:04:51

Ref 35.5 dBm * Att 20 dB

* RBW 300 kHz Marker 1 [T1] 10.54 dBm
 * VBW 1 MHz 5.787948718 GHz
 SWT 20 ms

Offset 10.5 dB

OBW 17.051281051 MHz
 Temp 1 [T1 OBW] 0.13 dBm
 5.776474359 GHz
 Temp 2 [T1 OBW] 0.74 dBm
 5.793523641 GHz

1 PK MAXH


LVL

3dB

Center 5.785 GHz 4 MHz/ Span 40 MHz


Date: 23.JAN.2018 23:04:10

802.11a mode, 99% Occupied Bandwidth, 5825 MHz

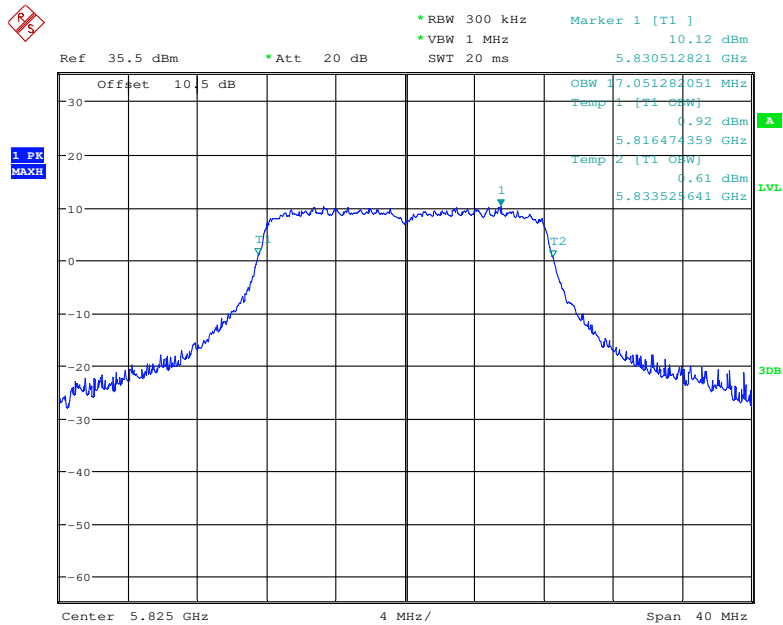


Date: 23.JAN.2018 23:03:05

802.11n20 mode, 99% Occupied Bandwidth, 5745 MHz

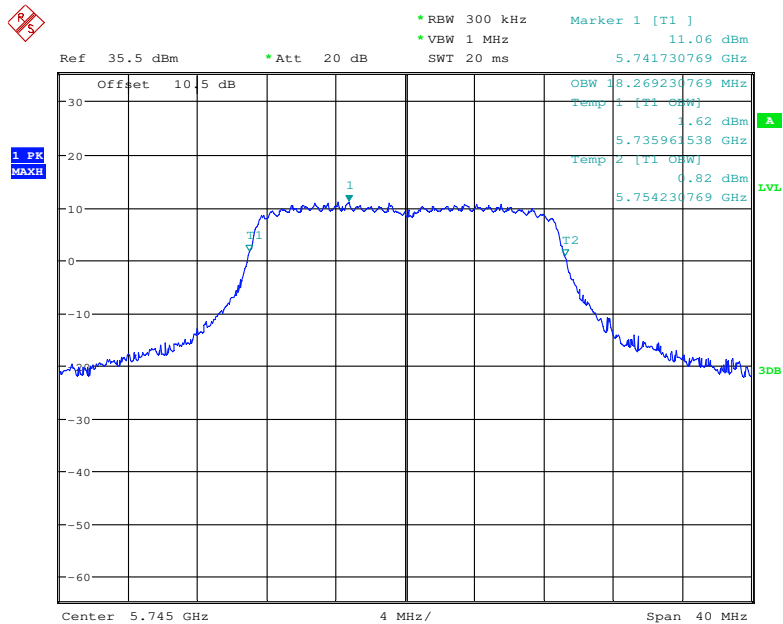


Date: 23.JAN.2018 23:00:26

802.11n20 mode, 99% Occupied Bandwidth, 5785 MHz

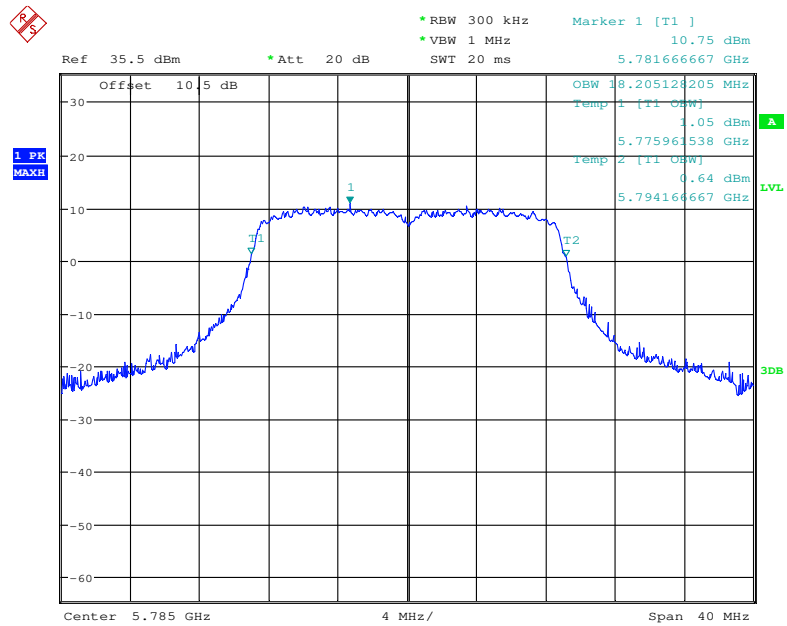

Date: 23.JAN.2018 23:01:17

802.11n20 mode, 99% Occupied Bandwidth, 5825 MHz

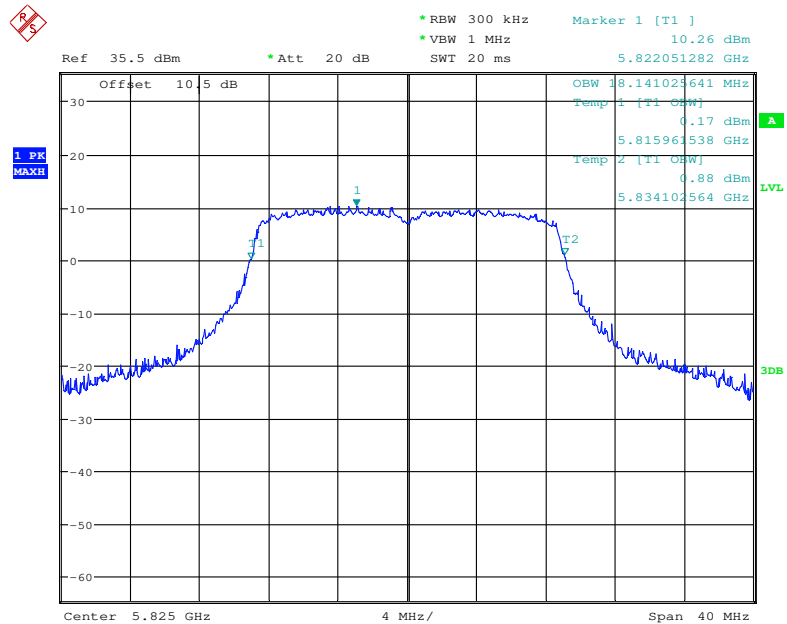


Date: 23.JAN.2018 23:02:12

FCC §15.407(a) (3)– CONDUCTED TRANSMITTER OUTPUT POWER**Applicable Standard**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	54 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables.

5725 MHz – 5850 MHz

Frequency (MHz)	Antenna Port	Average Output Power (dBm)	Total Output Power (dBm)	Limit (dBm)
	802.11a			
5745	0	18.04	20.81	30
	1	17.54		
5785	0	17.67	20.32	
	1	16.91		
5825	0	17.44	20.11	
	1	16.74		
	802.11n20			
5745	0	17.99	20.78	30
	1	17.53		
5785	0	17.71	20.30	
	1	16.83		
5825	0	17.48	20.01	
	1	16.45		

Note: This Device Emploies Cyclic Delay Diversity.

When determining reductions in conducted power limits, array gain is calculated as follows: As to this device, $N_{ANT} \leq 4$, Array Gain = 0 dB.

Total directional gain (dBi) = gain of individual transmit antennas (dBi) + 0 (dB) = 2dBi.

FCC §15.407(a) (3) - POWER SPECTRAL DENSITY

Applicable Standard

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Dylan Li on 2018-01-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the following tables and plots.

5725 MHz – 5850 MHz:

Frequency (MHz)	Antenna Port	Power Spectral Density (dBm/500kHz)	Total Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)
802.11a				
5745	0	5.97	8.84	30
	1	5.69		
5785	0	6.64	8.97	
	1	5.15		
5825	0	6.15	8.80	
	1	5.40		
802.11n20				
5745	0	5.77	8.75	30
	1	5.71		
5785	0	5.82	8.39	
	1	4.90		
5825	0	6.35	8.94	
	1	5.47		


Note: This Device Emploies Cyclic Delay Diversity.

When determining reductions in conducted power limits, array gain is calculated as follows: Array gain = $10 \log (\text{NANT})$, where NANT is the number of transmit antennas.

Total directional gain (dBi) = gain of individual transmit antennas (dBi) + Array gain (dBi)
 $= 2\text{dBi} + 3\text{dBi} = 5\text{dBi}$.


Antenna 0:

802.11a mode, Power Spectral Density, 5745 MHz

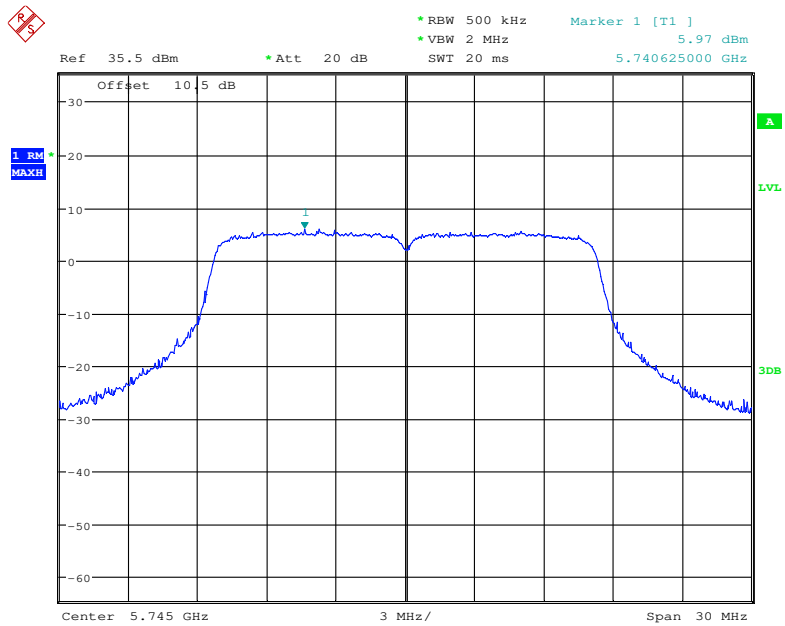


Date: 23.JAN.2018 22:34:50

802.11a mode, Power Spectral Density, 5785 MHz

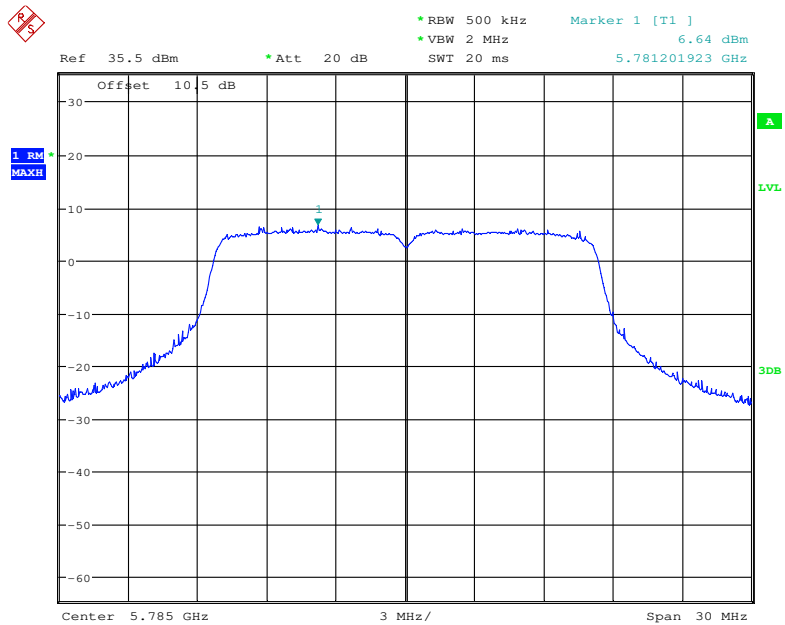


Date: 23.JAN.2018 22:34:02

802.11a mode, Power Spectral Density, 5825 MHz

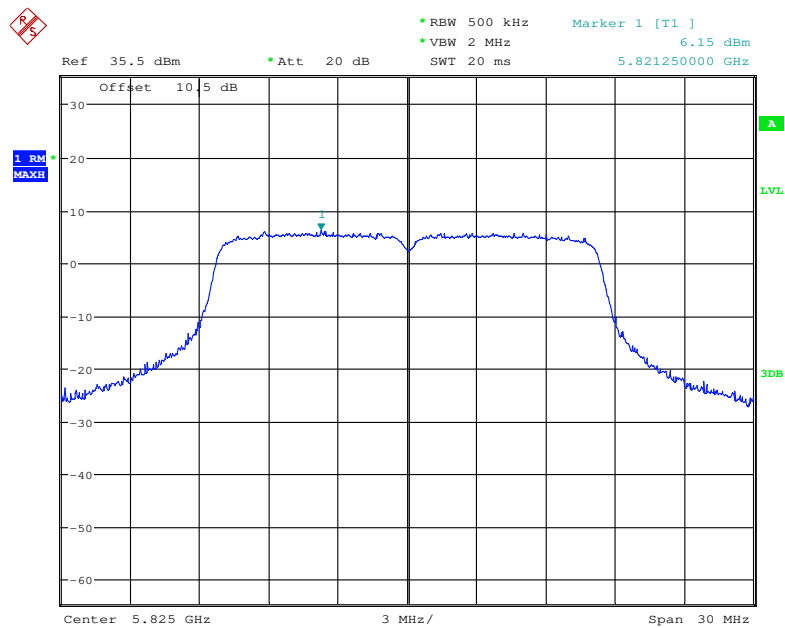


Date: 23.JAN.2018 22:33:01


802.11n20 mode, Power Spectral Density, 5745 MHz

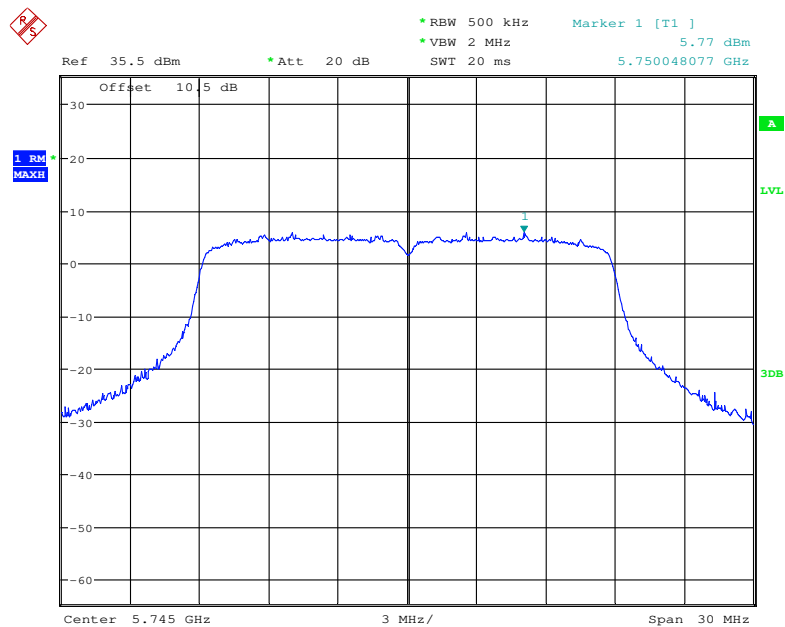

Date: 23.JAN.2018 22:35:33

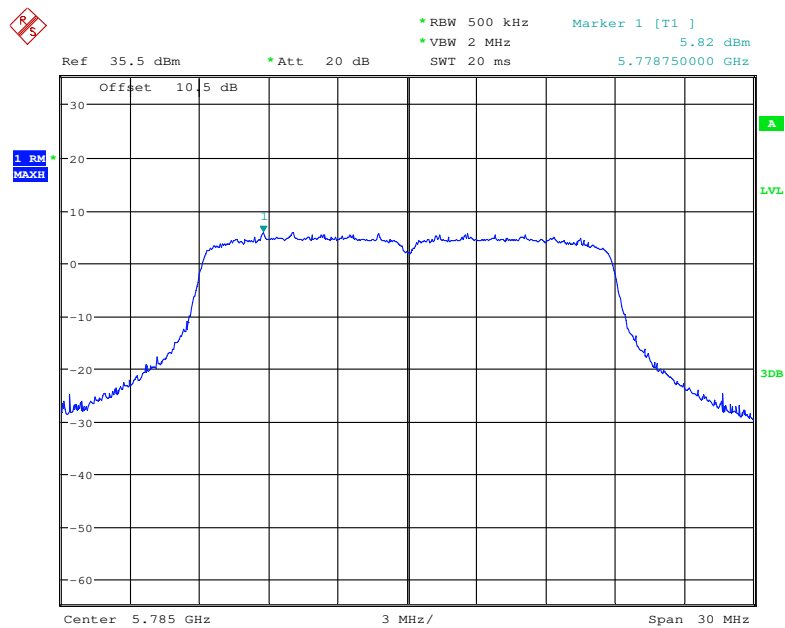802.11n20 mode, Power Spectral Density, 5785 MHz


Date: 23.JAN.2018 22:36:29

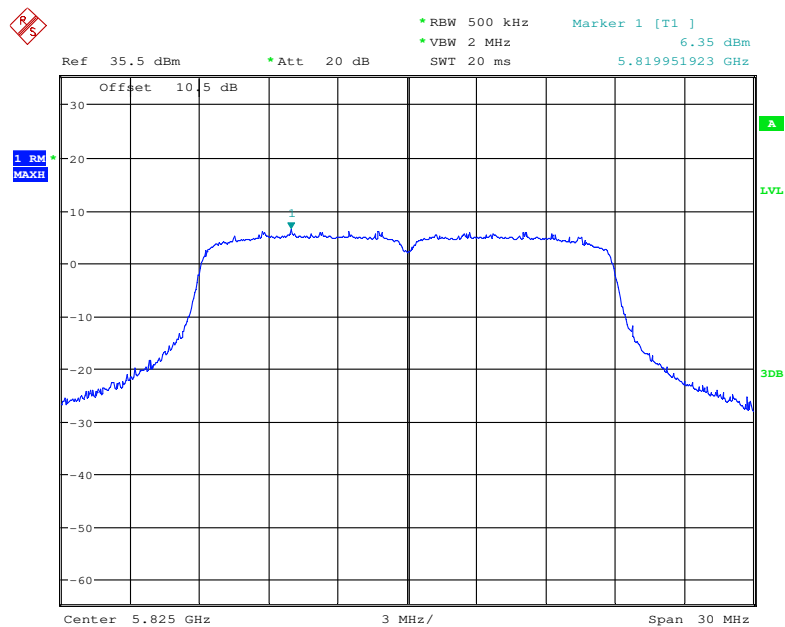802.11n20 mode, Power Spectral Density, 5825 MHz

Date: 23.JAN.2018 22:37:08


Antenna 1:

802.11a mode, Power Spectral Density, 5745 MHz

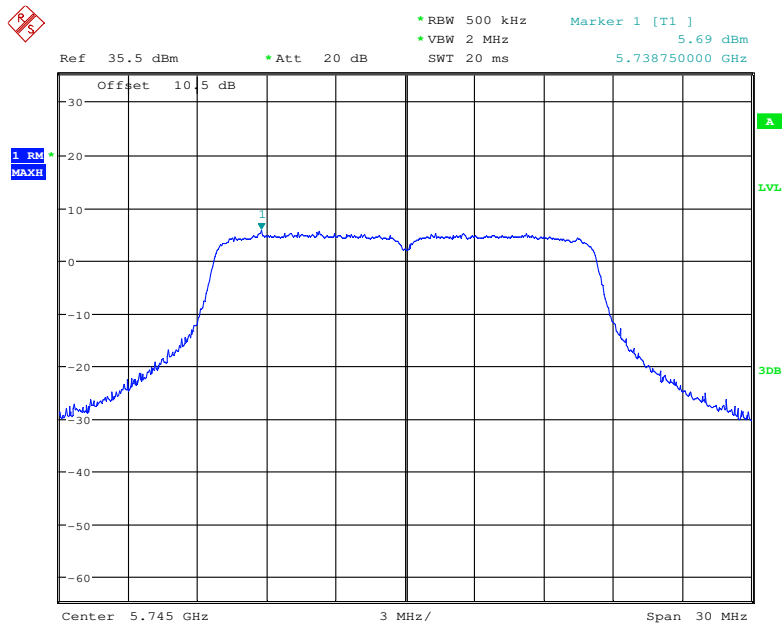


Date: 23.JAN.2018 22:43:47

802.11a mode, Power Spectral Density, 5785 MHz

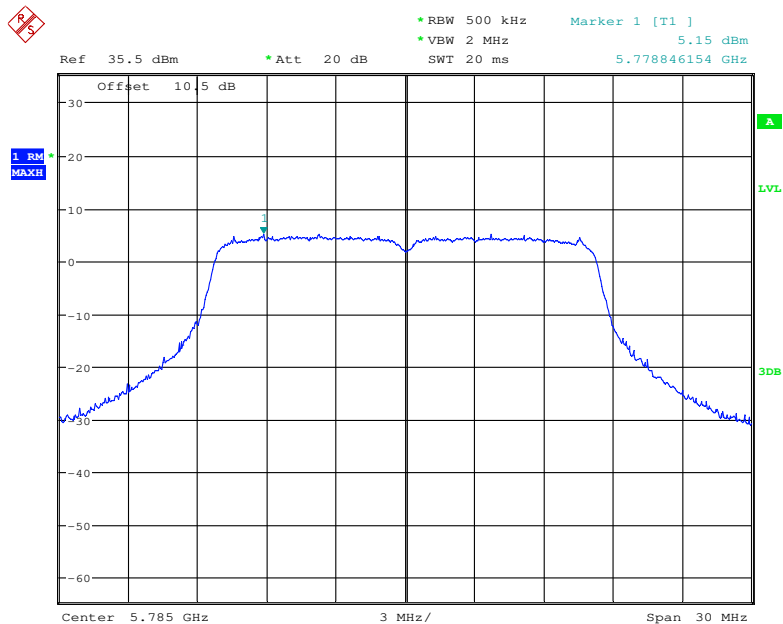


Date: 23.JAN.2018 22:44:48

802.11a mode, Power Spectral Density, 5825 MHz

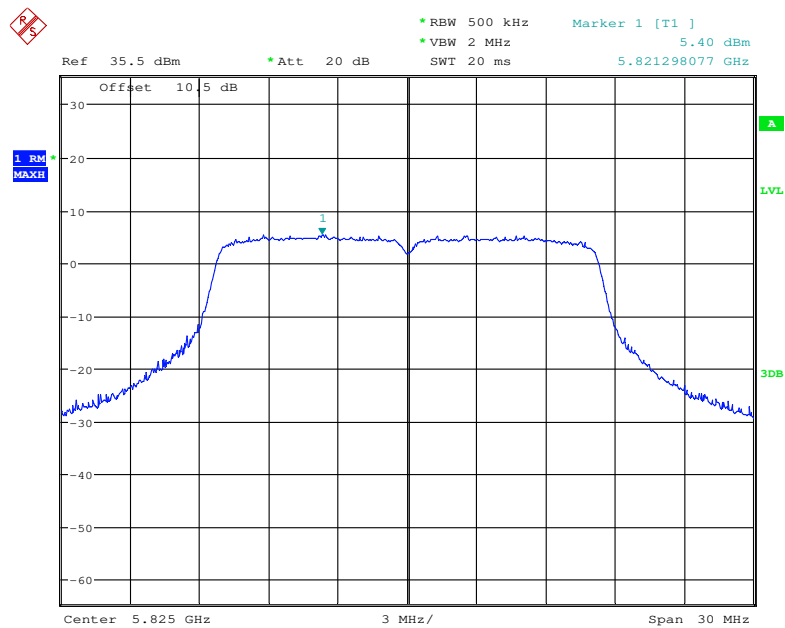


Date: 23.JAN.2018 22:45:45

802.11n20 mode, Power Spectral Density, 5745 MHz

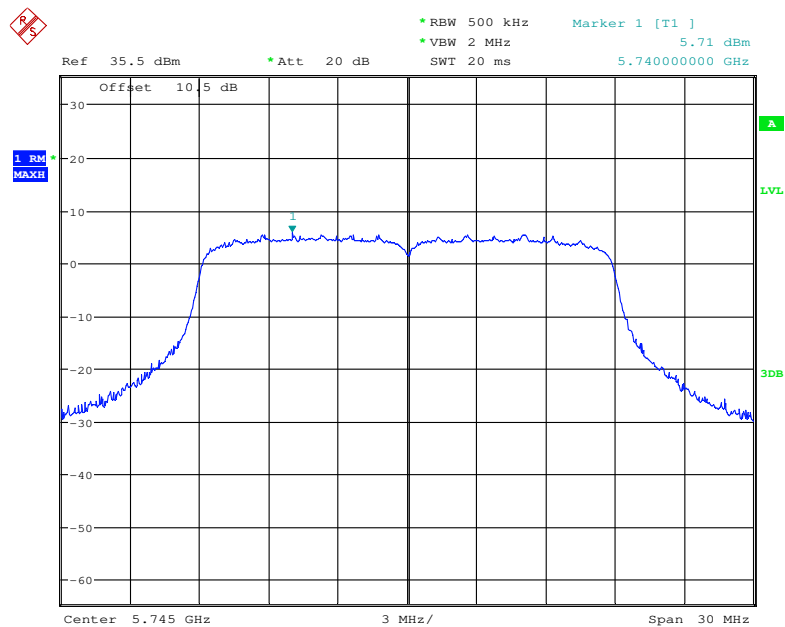


Date: 23.JAN.2018 22:42:56

802.11n20 mode, Power Spectral Density, 5785 MHz

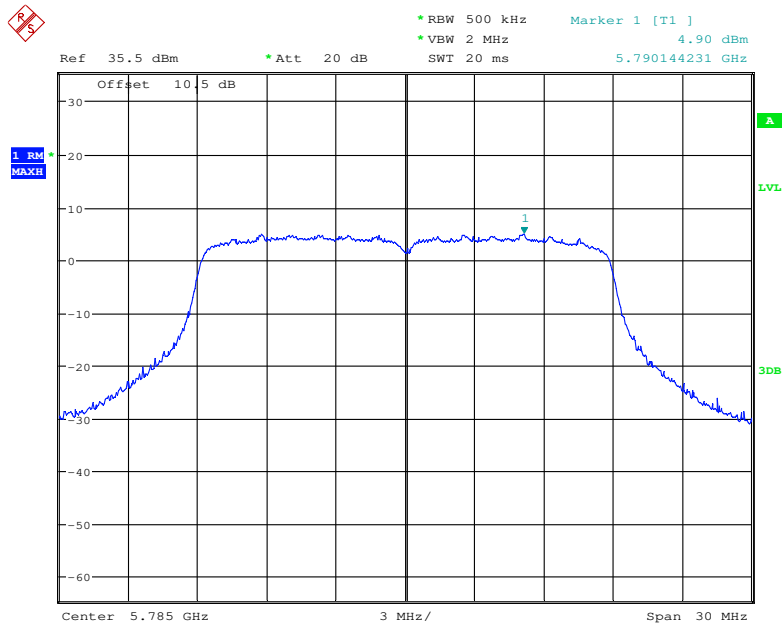

Date: 23.JAN.2018 22:42:18

802.11n20 mode, Power Spectral Density, 5825 MHz

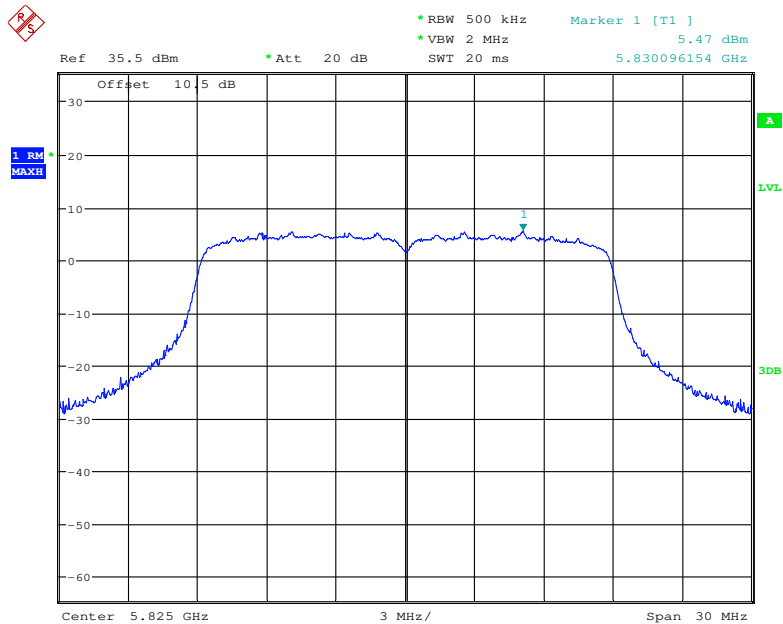

Date: 23.JAN.2018 22:41:20

***** END OF REPORT *****