



MEASUREMENT REPORT

FCC PART 15.247 BLE

Report No.: S2025062326390105

Issue Date: 09-11-2025

Applicant: Lumi United Technology Co., Ltd
Address: B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen, China
FCC ID: 2AKIT-DLD06
Product: Smart Lock U400
Model No.: DL-D06E
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (15.247)
Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v05r02
Result: Pass
Item Receipt Date: 2025-02-07
Test Date: 2025-02-12 to 2025-04-02

Compiled By

Chuang Li

(Chuang Li)
Senior Test Engineer

Approved By

Line Chen

(Line Chen)
Engineer Manager



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) The test report shall not be reproduced except in full without the written approval of Fangguang Inspection & Testing Co., Ltd. Wuxi Branch

The test report must not be used by the client to claim product certifications, approval, or endorsement by NVLAP, NIST or any agency of U.S. Government.

Revision History

Report No.	Version	Description	Issue Date
S2025062326390105	Rev. 01	/	09-11-2025

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. Fangguang Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description	7
2.2. Product Specification Subjective to this Report	7
2.3. Operation Frequency / Channel List	8
2.4. Device Capabilities	8
2.5. Description of Test Software	10
2.6. Test Mode	10
2.7. Test Configuration	10
2.8. EMI Suppression Device(s)/Modifications	10
2.9. EUT Photo	10
2.10. Labeling Requirements	10
2.11. Calculation with all conversion and correction factors used	10
2.12. Model difference descriptions	11
3. DESCRIPTION OF TEST	12
3.1. Evaluation Procedure	12
3.2. AC Line Conducted Emissions	12
3.3. Radiated Emissions	13
4. ANTENNA REQUIREMENTS	14
5. TEST EQUIPMENT CALIBRATION DATE	15
6. MEASUREMENT UNCERTAINTY	17
7. TEST RESULT	18
7.1. Summary	18
7.2. 6dB Bandwidth Measurement	19
7.2.1. Test Limit	19
7.2.2. Test Procedure used	19
7.2.3. Test Setting	19
7.2.4. Test Setup	19
7.2.5. Test Result	20

7.3.	Output Power Measurement	24
7.3.1.	Test Limit	24
7.3.2.	Test Procedure Used	24
7.3.3.	Test Setting	24
7.3.4.	Test Setup	24
7.3.5.	Test Result	25
7.4.	Power Spectral Density Measurement	26
7.4.1.	Test Limit	26
7.4.2.	Test Procedure Used	26
7.4.3.	Test Setting	26
7.4.4.	Test Setup	27
7.4.5.	Test Result	28
7.5.	Conducted Band Edge and Out-of-Band Emissions	32
7.5.1.	Test Limit	32
7.5.2.	Test Procedure Used	32
7.5.3.	Test Setting	32
7.5.4.	Test Setup	32
7.5.5.	Test Result	33
7.6.	Radiated Spurious Emission Measurement	47
7.6.1.	Test Limit	47
7.6.2.	Test Procedure Used	47
7.6.3.	Test Setting	47
7.6.4.	Test Setup	49
7.6.5.	Test Result	51
7.7.	Radiated Restricted Band Edge Measurement	66
7.7.1.	Test Limit	66
7.7.2.	Test Procedure Used	67
7.7.3.	Test Setting	67
7.7.4.	Test Setup	68
7.7.5.	Test Result	69
7.8.	AC Conducted Emissions Measurement	79
7.8.1.	Test Limit	79
7.8.2.	Test Setup	79
7.8.3.	Test Result	80
8.	CONCLUSION	82

§2.1033 General Information

Applicant:	Lumi United Technology Co., Ltd
Applicant Address:	B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen, China
Manufacturer:	Lumi United Technology Co., Ltd
Manufacturer Address:	B1, Chongwen Park, Nanshan iPark, Liuxian Avenue, Taoyuan Residential District, Nanshan District, Shenzhen, China
Test Site:	Fanguang Inspection & Testing Co., Ltd.
LAB ID:	CN5037
Test Site Address:	No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China
FCC Rule Part(s):	Part 15 Subpart C (15.247)
FCC ID:	2AKIT-DLD06
Test Device Serial No.:	S/N.: / ☐ Production ☒ Pre-Production ☐ Engineering
FCC Classification:	Digital Transmission System (DTS)

1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. Fangguang Test Location

These measurement tests were performed at the Fangguang Inspection and testing Co.,LTD located at No.8 Ningyun Rd., Xinwu District Wuxi, Jiangsu 214000 China. The detailed description of the measurement facility was found to be in compliance with the requirements of ANSI C63.10-2013.

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	Smart Lock U400
Model Name:	DL-D06E
Additional Model:	DL-D06D, DL-D16E, DL-D16D, DL-D17D, DL-D15D
Model difference descriptions:	Refer to section 2.12
Trade Name:	Aqara
Input Voltage Range:	DC 7.3V by battery
Bluetooth Version:	5.0
Hardware Version:	V1.0.0
Software Version:	3.0.1.7
EUT sample number:	S20250623263901-1-1, S20250623263901-1-2, S20250623263901-1-3
Note:	This information is provided by the Customer and its authenticity is the responsibility of the Customer.

2.2. Product Specification Subjective to this Report

Bluetooth Frequency	2402~2480MHz
Bluetooth Version	5.0
Type of modulation	GFSK
Antenna Type:	PCB printed antenna with 1.0dBi (Max.)
Antenna Gain:	1.0dBi
Battery:	Model: BAT-X01D, Rated capacity: 4880mAh, nominal voltage: 7.3V $\approx$, Rated energy: 35.63Wh, charging input: 5V $\approx$ 2A(Type-C), limited charge voltage: 8.4V $\approx$
Channel space:	2MHz
Temperature Range:	-18°C ~ +55°C
Note:	The EUT antenna gain is provided by the applicant. This report is made solely on the basis of such data and/or information. We accept no responsibility for the authenticity and completeness of the above data and information and the validity of the results and/or conclusions. After evaluated the difference descriptions of the models, the test model is DL-D06E & DL-D06D, for model DL-D06D the Radiated Spurious Emission the worst case mode had been tested.

2.3. Operation Frequency / Channel List

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

EUT was tested with Channel 0, 19 and 39.

2.4. Device Capabilities

This device contains the following capabilities: Bluetooth

Note: The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 10MHz, VBW = 10MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are 100%.

Environment: 25.3°C/59%RH/101.0kPa


Voltage: DC 7.3V

Tested By: Chuang Li


Date: 2025-02-12

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	DC [%]	T [s]
BLE_1M	Ant1	2402	50	50	100	/
BLE_2M	Ant1	2402	50	50	100	/

BLE_1M_2402MHz

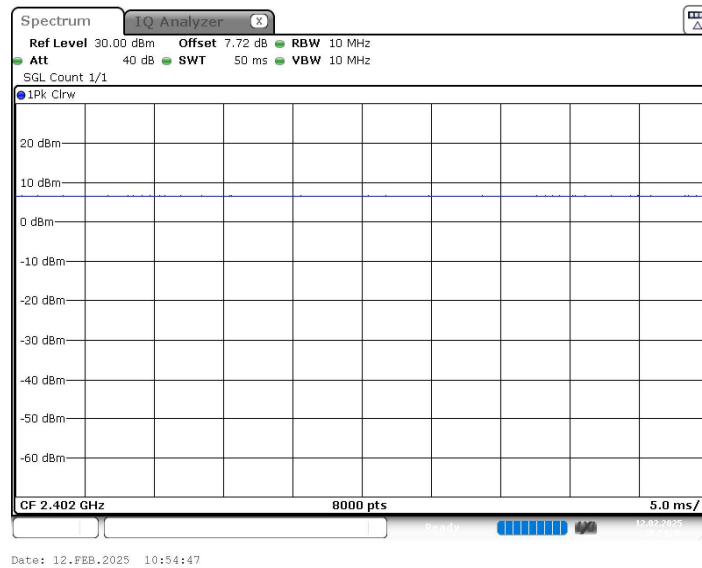

BLE_2M_2402MHz

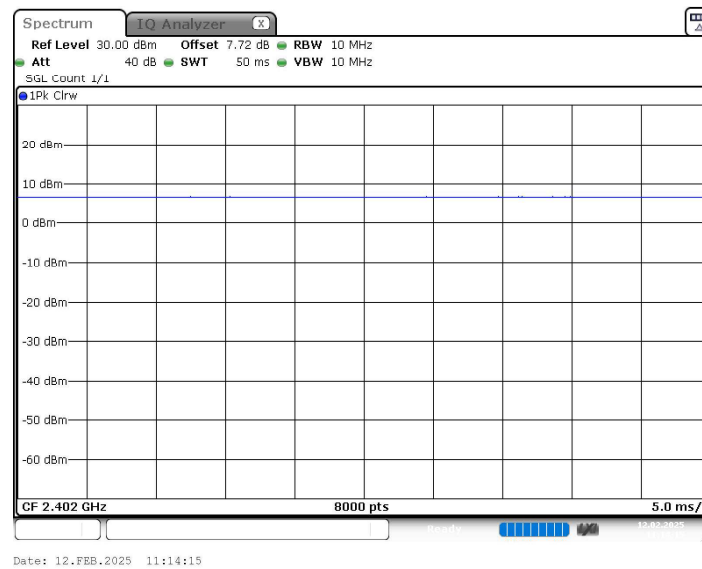

2.5. Description of Test Software

Test software:

Software version	Test level
QCOM V_1.0	60

2.6. Test Mode

Test Mode	Mode 1: Transmit by BLE
-----------	-------------------------

2.7. Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

2.8. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.9. EUT Photo

The EUT external photo, internal photo and test setup photo, please refer to the plots in the S202506232639E-EUT photo.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase.

However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

2.11. Calculation with all conversion and correction factors used

For AC Line Conducted Emissions Test:

Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

For Radiated Emissions Below 1GHz Test:

Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

For Radiated Emissions Above 1GHz Test:

Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

2.12. Model difference descriptions

Smart Lock U400	Version 1	Version 2	Version 3	Version 4	Version 5	Version 6
Model	DL-D06E	DL-D16E	DL-D06D	DL-D16D	DL-D17D	DL-D15D
Color	Black	Silver	Black	Silver	Shadow Black	Satin Nickel
Finishing	Matte (Spray Coating)		Matte (Spray Coating)		Matte (Electroplating + Brushed)	
Package content	Li-ion Battery × 1		Li-ion Battery × 1 + Aqara Hub M100 × 1		Li-ion Battery × 2	
External Panel						
Shape	Curved		Flat		Flat	
Main Body Material	Aluminium		Aluminium		Zinc	
Gliding Plate Material	Aluminium		Zinc		Zinc	
Keypad Material	PC + PET		PMMA		PMMA	
Internal Panel						
Main Body Material	Plastic					
Knob	Aluminium		Aluminium		Zinc	

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. The turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-25GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- Use a unique coupling to the intentional radiator.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	FWXGJC-2016-181	1 year	2026/07/08
Two-Line V-Network	R&S	ENV 216	FWXGJC-2016-182	1 year	2026/07/09
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2026/08/24

Radiated Emission

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Loop Antenna	Schwarzbeck	FMZB 1519B	FWXGJC-2018-015	3 year	2026/06/12
Bi-Log Antenna	R&S	VULB 9168	FWXGJC-2024-055	1 year	2026/06/21
Broadband Horn Antenna	R&S	HF907	FWXGJC-2016-267-07	1 year	2026/06/21
Broadband Horn Antenna	Schwarzbeck	BBHA9170	FWXGJC-2018-016	3 year	2026/06/21
EMI Receiver	R&S	ESR26	FWXGJC-2016-267-01	1 year	2026/07/16
Pre-Amplifier	Tonscend	TAP0118048	FWXGJC-2024-056	1 year	2026/06/21
Pre-Amplifier	R&S	EMC184055 SE	FWXGJC-2018-018	3 year	2026/07/16
Hygrothermograph	Mittel	HTC-1	FWXDA-2016-387	1 year	2026/08/24
Anechoic Chamber	SAEMC	FSAC318	FGZZ-2024-035	3 year	2027/06/02

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Keysight	N9010B	FWXGJC-2018-010	1 year	2026/07/16
RF Control Unit	Toncend	JS0806-2	FWXGJC-2018-013	1 year	2026/07/16
Thermohygrometer	Yuhuaze	HTC-1	FWXDA-2016-385	1 year	2026/08/24
Spectrum Analyzer	R&S	FSV30	1321.3008K30-104381-rH	1 year	2025/09/22
Pulse power sensor	Anritsu	MA2411B	1126150	1 year	2025/12/07
Power meter	Anritsu	ML2495A	1204003	1 year	2025/12/07

Auxiliary Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Filter	Toncend	ZBSF6	07247867	1 year	2026/07/16
Filter	Toncend	ZHPF6	07233297	1 year	2026/07/16
Attenuator	Toncend	10dB	/	1 year	2026/07/16
RF Cable	Toncend	T-1	/	1 year	2026/07/16

Test Software

Test Software	Manufacturer	Version	Asset No.	Function
JS32	Tonscend	V5.0.0	FWXWA-2019-004	RE
EMI Test Software	R&S	9.26.00	/	Conducted Emission
RF Test Software	Tonscend	3.3.10	/	Conducted Test