

March 9th, 2026

Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda
Rua Hungria, 888
8th floor
São Paulo, Brazil
01455-000

Dear Nic Holmes,

Enclosed is the EMC test report for compliance testing of Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda, HID Amico Facial Reader, tested to the requirements of:

- Title 47 of the CFR, Part 15.225, Subpart C for Certification as an Intentional Radiator.
- RSS-210: Issue 11, License-Exempt Radio Apparatus: Category 1 Equipment

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if we can be of further service to you, please feel free to contact me.

Sincerely,

A handwritten signature in blue ink that reads "Nancy LaBrecque".

Nancy LaBrecque
Documentation Department
Eurofins Electrical and Electronic Testing NA, Inc.

Reference: WIRA136963-FCC-IC-HF-R1

Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. While use of the A2LA logo in this report reflects Eurofins accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.



**13.56MHz RFID
Test Report**

for the

**Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda
HID Amico Facial Reader (Model: VL70LF)**

Tested under
the FCC Certification Rules
contained in
15.225 Subpart C and
RSS-210: Issue 11
for Intentional Radiators



Veer Patel, EMC/Wireless Engineer
Electromagnetic Compatibility Lab



Nancy LaBrecque
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.



Matthew Hinojosa
EMC Manager, Austin Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	October 7, 2025	Initial Issue.
1	March 9th, 2026	TCB Reviewer Comments

Table of Contents

I.	Executive Summary	6
A.	Purpose of Test	6
B.	Executive Summary	6
II.	Equipment Configuration	7
A.	Overview.....	7
B.	References.....	8
C.	Test Site	9
D.	Measurement Uncertainty	9
E.	Equipment Configuration.....	10
F.	Support Equipment	11
G.	Mode of Operation.....	12
H.	Modifications.....	12
	a) Modifications to EUT.....	12
	b) Modifications to Test Standard.....	12
I.	Disposition of EUT	12
	§ 15.203 Antenna Requirement	13
	§ 15.207(a) Conducted Emissions Limits.....	14
	RSS-GEN (8.8) AC Power-Line Conducted Emissions Limits.....	15
	20 dB Occupied Bandwidth.....	19
	RSS-GEN (6.6) Occupied Bandwidth	20
	§ 15.225(a) Spurious Emission Limits, within the band 13.553 – 13.567 MHz.....	22
	RSS-210 (B.6.b) Spurious Emission Limits, within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz.....	22
	§ 15.225(e) Frequency Stability	30

List of Tables

Table 1. Executive Summary	6
Table 2. EUT Summary Table.....	7
Table 3. References	8
Table 4. Uncertainty Calculations Summary.....	9
Table 5. Support Equipment.....	11
Table 6. Ports and Cabling Information	11
Table 7. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	14
Table 8. AC Power Line Conducted Emissions Limits	15
Table 9. Conducted Emissions, 15.207(a), Phase, Test Results	17
Table 10. Conducted Emissions, 15.207(a), Neutral, Test Results	18
Table 11. Occupied Bandwidth Test Results.....	20
Table 12. Test Equipment List	32

List of Figures

Figure 1. Block Diagram of Test Configuration.....	10
Figure 2. CEV Test Setup.....	16
Figure 3. 20 dB Bandwidth and 99% Bandwidth Test Setup	20
Figure 4: Radiated Emissions (Below 30MHz), Test Setup	24
Figure 5. Radiated Emissions (Above 30MHz), Test Setup.....	24
Figure 6. Worst Case In-Band Field Strength	25
Figure 7. Worst Case Field Strength Below 30MHz.....	25
Figure 8. Worst Case Field Strength Above 30MHz.....	26
Figure 9. In-Band Emission Mask (Coplanar Loop)	27
Figure 10. In-Band Emission Mask (Coaxial Loop)	27
Figure 11. Out of Band Emissions Below 30MHz (Coplanar Loop)	28
Figure 12. Out of Band Emissions Below 30MHz (Coaxial Loop).....	28
Figure 13. Out of Band Emissions Above 30MHz (Vertical and Horizontal Polarity)	29
Figure 15. Temperature Stability Test Setup.....	30
Figure 16. Frequency Stability Test Results.....	31

Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda HID Amico Facial Reader, with the requirements of Part 15, §15.225 and RSS-210 Issue 11, Annex B, B.6. All references are to the most current version of Title 47 of the Code of Federal Regulations and RSS-210 in effect. The following data is presented in support of the Certification of the HID Amico Facial Reader. Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the HID Amico Facial Reader, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.225 and RSS-210, in accordance with Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda, under purchase order number HID026847. All tests were conducted using measurement procedures ANSI C63.4-2014 and ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024.

FCC Reference	ISED Reference	Description	Compliance
Part 15 §15.203	---	Antenna Requirement	Compliant
Part 15 §15.207(a)	RSS-Gen (8.8)	Conducted Emission Limits	Compliant
Part 15 §15.215	---	20dB Occupied Bandwidth	Compliant
---	RSS-Gen (6.7)	99% Occupied Bandwidth	Compliant
Part 15 §15.225(a)	RSS-210 (B.6.a.i)	Field Strength emissions within the band 13.553 – 13.567 MHz	Compliant
Part 15 §15.225(b)	RSS-210 (B.6.a.ii)	Field Strength emissions within the band 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	Compliant
Part 15 §15.225(c)	RSS-210 (B.6.a.iii)	Field Strength emissions within the band 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	Compliant
Part 15 §15.225(d)	RSS-210 (B.6.a.iv)	Outside-Band Field Strength emissions per 15.209 - 13.110 – 14.010 MHz	Compliant
Part 15 §15.225(e)	RSS-210 (B.6.b)	Frequency Tolerance of the Carrier	Compliant

Table 1. Executive Summary

Equipment Configuration

A. Overview

Eurofins E&E North America was contracted by Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda to perform testing on the HID Amico Facial Reader.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda HID Amico Facial Reader.

The results obtained relate only to the item(s) tested.

Product Name:	HID Amico Facial Reader	
Model(s) Tested:	VL70LF	
Model(s) Covered:	VL70LF	
EUT Specifications:	Primary Power: 12VDC via AC / DC Power Adapter	
	Type of Modulation(s):	ASK
	Equipment Code:	DXX
	Maximum field Strength:	47.27dBuV/m
	Antenna Type:	loop
	EUT Frequency Ranges:	13.56MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Bryan Taylor, Veer Patel and An Dang	
Report Date:	March 9th, 2026	

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-210 Issue 11	Licence-Exempt Radio Apparatus: Category I Equipment
ANSI C63.4:2014	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2017	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024.	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

All testing was performed at Eurofins E&E North America, 13501 McCallen Pass, Austin, TX 78753. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

ISED Lab Info:

CAB Identifier: US0004

Company Number: 2043D

FCC Lab Info:

Designation Number: US1127

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

Correlation between semi-anechoic chamber and OATS:

Two calibrated Loop antennas were used on an OATS. One antenna was driven by a signal generator with a known power. The receive antenna was initially placed 1m away from the transmit antenna. The two antennas were placed parallel to each other. The receive antenna was in turn connected to a calibrated spectrum analyzer. The emissions were swept from 9 kHz to 30 MHz. The receive antenna was then rotated 90 degrees and measurements re-taken. Additional measurements were taken when the receive antenna was placed at 3meters.

This same setup was taken to inside the semi-anechoic chamber and the measurements repeated.

The data was used to correlate the semi-anechoic chamber and OATS.

D. Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	±4.52 Hz	2	95%
RF Power Conducted Emissions	±2.97 dB	2	95%
RF Power Radiated Emissions	±2.95 dB	2	95%
Radiated Emissions, (30 MHz – 1 GHz)	±2.95	2	95%
Radiated Emissions, (1 GHz – 18 GHz)	±3.54	2	95%
Conducted Emission Voltage	±2.97	2	95%

Table 4. Uncertainty Calculations Summary

E. Description of Test Sample

The HID Amico Facial Recognition Reader is an access control reader employing facial recognition technology, as well as RFID and Bluetooth technologies.

The VL70LF has an LF, HF and a BLE radio on board enables the use of traditional RFID access control as well as mobile access through cell phone BLE and the HID Mobile Access App.

The VL70LF allows a user that is enrolled to access a door through the means of facial recognition (by looking into the cameras on the screen) or presenting an RFID credential, in the form of a fob, card or mobile device.

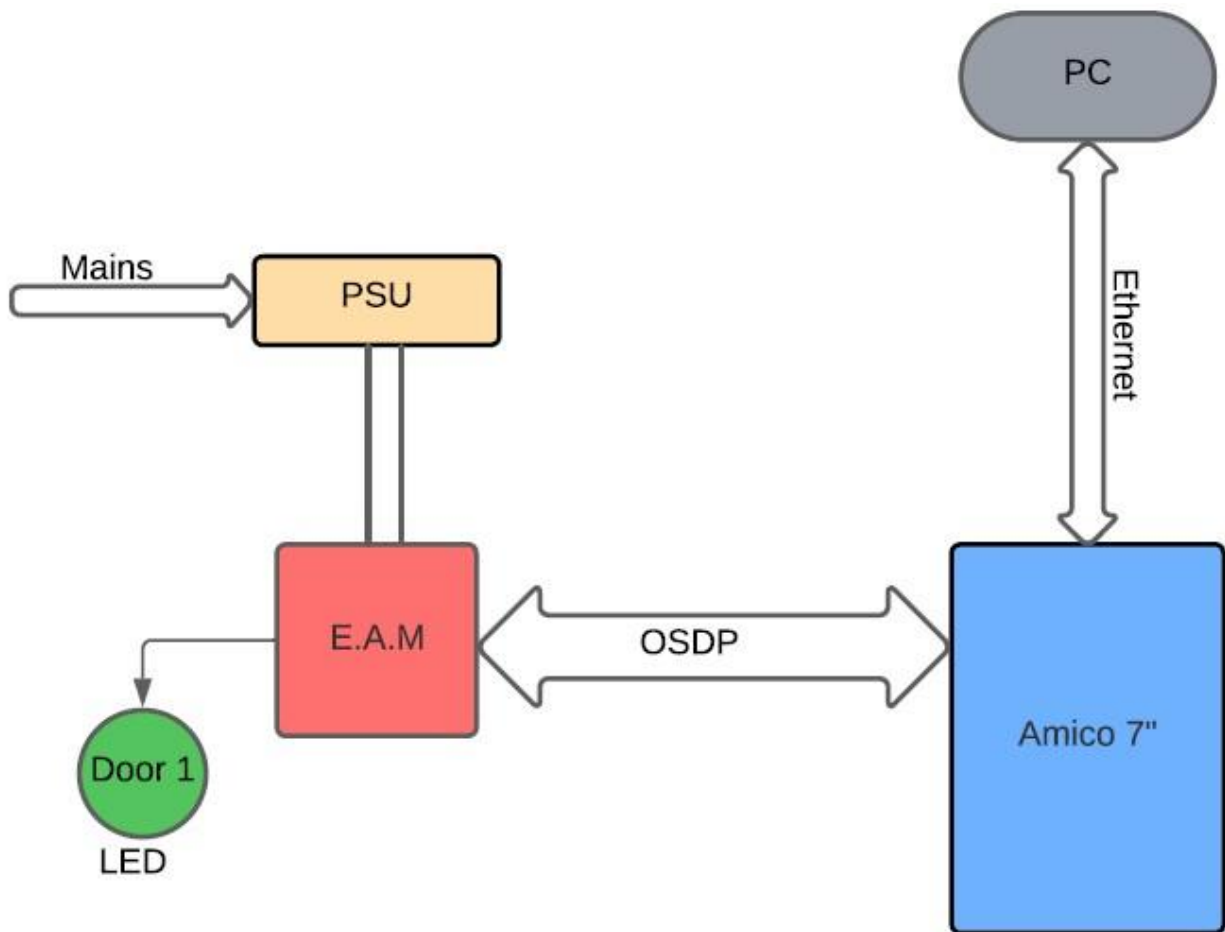


Figure 1. Block Diagram of Test Configuration

F. Equipment Configuration

The EUT was set up as outlined in Figure 1 above. A 13.56MHz RFID credential was placed in front of the HID Amico Facial Reader which was configured to allow continuous reading of the enrolled 13.56MHz credential.

G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name/Description	Manufacturer	Model Number	Customer Supplied Calibration Data
	Smart Phone	Motorola	Moto E7	N/A
	Smart Phone	Samsung	Galaxy A03	N/A
	Laptop	Asus	M509D	N/A
	Power Supply	XP Power	VEC65US12	N/A

Table 5. Support Equipment

H. Ports and Cabling Information

Ref. Id	Port Name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
	LAN	Ethernet cable for web interface		3 meters	100	Yes	PC
	DC/RS485	Power and data		3 meters	1219	Yes	Extended Access Module/Door controller
	USB	NONE - for configuration only		N/A	N/A	No	

Table 6. Ports and Cabling Information

I. Mode of Operation

A 13.56MHz RFID credential was placed in front of the HID Amico Facial Reader which was configured to read enrolled 13.56MHz credentials continuously when presented.

J. Modifications**a) Modifications to EUT**

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Controlid Industria e Comercio de Hardware e Servicos De Tecnologia Ltda upon completion of testing.

Antenna Requirements

§ 15.203 Antenna Requirement

Test Requirement:

§ 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results:

The HID Amico Facial Reader as evaluated, was compliant as the antennas were permanently attached.

Test Engineer(s):

Bryan Taylor

Test Date(s):

7/28/2025

Conducted Emissions

§ 15.207(a) Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

Table 7. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Note: *Decreases with the logarithm of the frequency.

RSS-GEN (8.8) AC Power-Line Conducted Emissions Limits

Test Requirement(s): **RSS-GEN (8.8):** Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in the below figure, as measured using a 50 μ H / 50 Ω line impedance stabilization network (LISN). This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in the below figure shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15-0.5	66 to 56	56 to 46 ¹
0.5-5	56	46
5-30	60	50

Table 8. AC Power Line Conducted Emissions Limits

Note: *Decreases with the logarithm of the frequency.

Test Procedure: The EUT was placed on a 0.8 m-high non-conducting table above a ground plane. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.10 "Procedures for Compliance Testing of Unlicensed Wireless Devices"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMI receiver.

Test Results: The HID Amico Facial Reader was compliant with this requirement. Testing was performed on the AC input to an AC to DC power supply that was feeding the 12VDC to the HID Amico Facial Reader.

Test Engineer(s): An Dang

Test Date(s): 7/28/2025

Conducted Emissions Voltage Test Setup


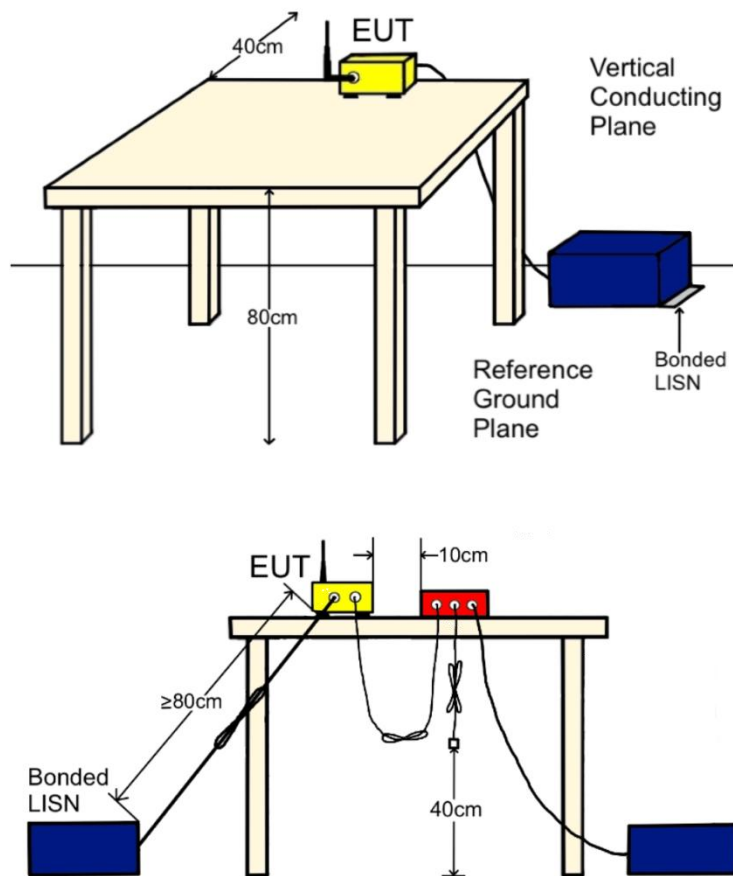


Figure 2. CEV Test Setup


15.207(a) Conducted Emissions Test Results

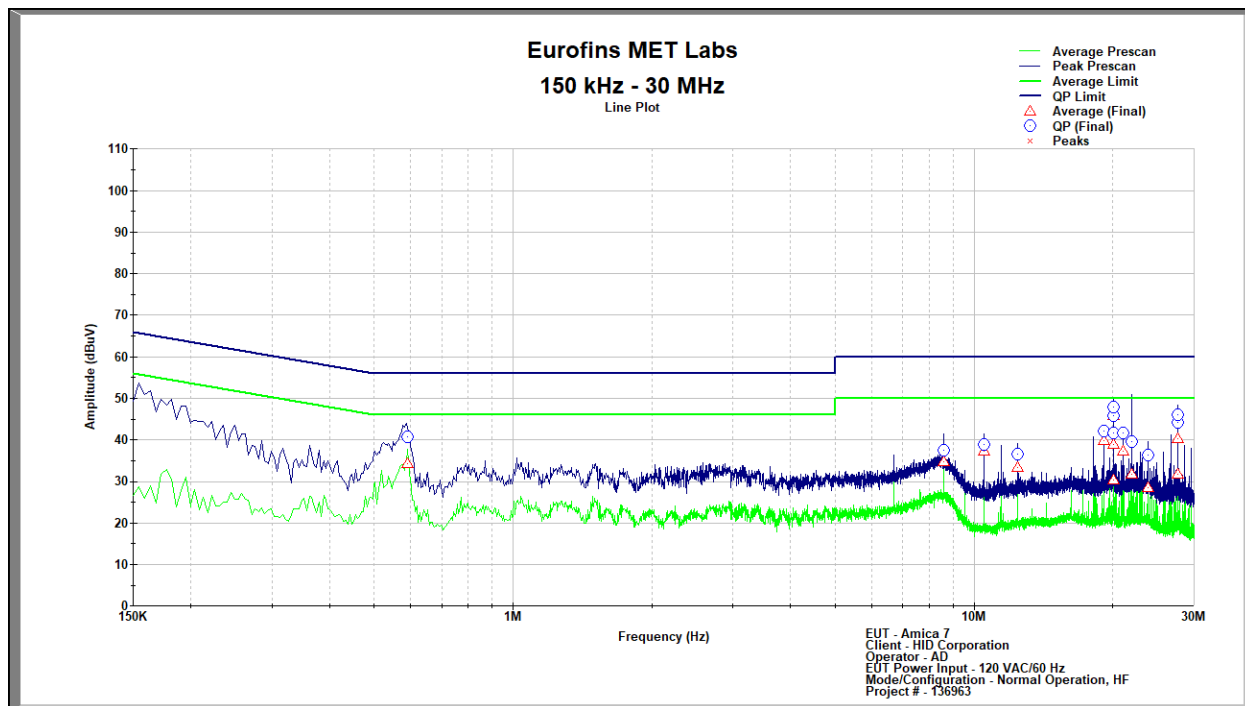

Conducted Emissions, 15.207(a), Phase

Frequency (MHz)	Quasi-Peak (dBμV)	Quasi-Peak Limit (dBμV)	Quasi-Peak Margin (dB)	Average (dBμV)	Average Limit (dBμV)	Average Margin (dB)
0.591	40.678	56.000	15.322	34.233	46.000	11.767
8.600	37.439	60.000	22.561	34.727	50.000	15.273
10.509	38.927	60.000	21.073	37.205	50.000	12.795
12.418	36.532	60.000	23.468	33.433	50.000	16.567
19.110	42.218	60.000	17.782	39.751	50.000	10.249
20.058	41.683	60.000	18.317	30.241	50.000	19.759
20.063	45.900	60.000	14.100	38.938	50.000	11.062
20.067	47.908	60.000	12.092	45.763	50.000	4.237
21.020	41.740	60.000	18.260	37.342	50.000	12.658
21.972	39.530	60.000	20.470	31.697	50.000	18.303
23.884	36.336	60.000	23.664	28.460	50.000	21.540
27.703	44.138	60.000	15.862	31.773	50.000	18.227
27.708	46.053	60.000	13.947	40.231	50.000	9.769

Table 9. Conducted Emissions, 15.207(a), Phase, Test Results

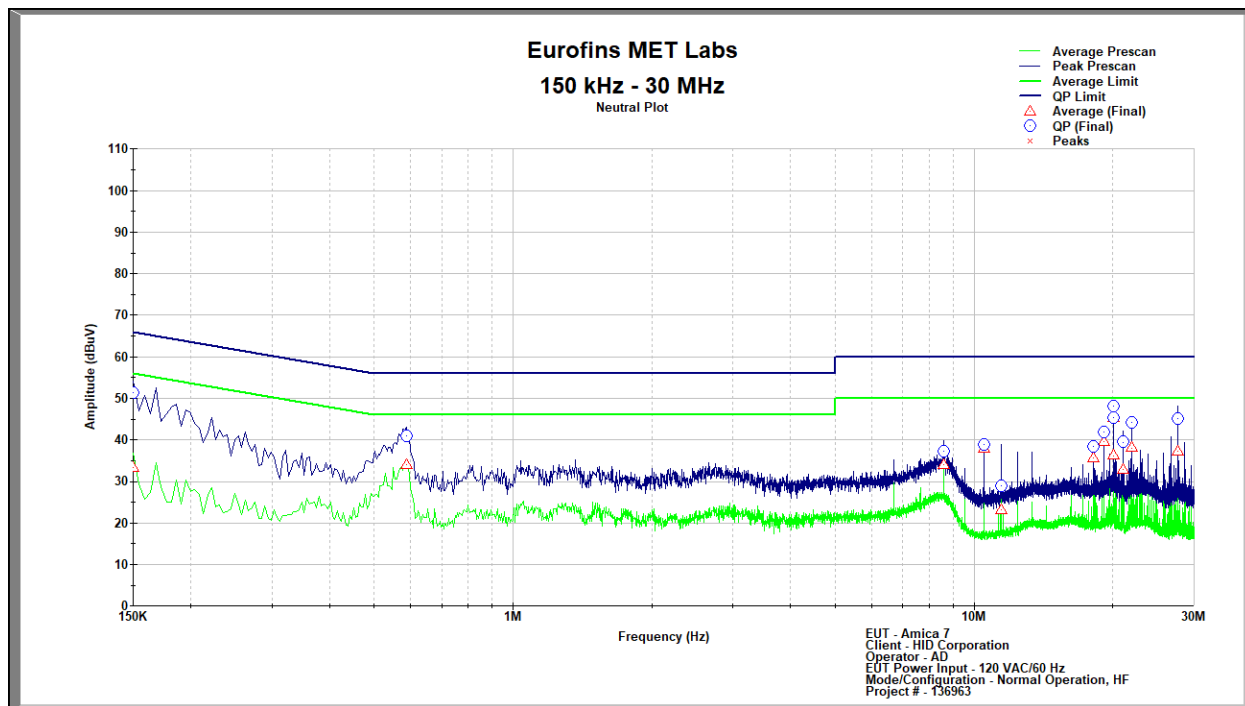

Conducted Emissions, 15.207(a), Neutral

Frequency (MHz)	Quasi-Peak (dBμV)	Quasi-Peak Limit (dBμV)	Quasi-Peak Margin (dB)	Average (dBμV)	Average Limit (dBμV)	Average Margin (dB)
0.150	51.421	66.000	14.579	33.349	56.000	22.651
0.587	40.921	56.000	15.079	33.960	46.000	12.040
8.600	37.295	60.000	22.705	33.986	50.000	16.014
10.514	38.879	60.000	21.121	37.941	50.000	12.059
11.460	28.851	60.000	31.149	23.069	50.000	26.931
18.160	38.361	60.000	21.639	35.608	50.000	14.392
19.113	41.872	60.000	18.128	39.525	50.000	10.475
20.067	48.161	60.000	11.839	45.370	50.000	4.630
20.072	45.294	60.000	14.706	36.230	50.000	13.770
21.026	39.474	60.000	20.526	32.856	50.000	17.144
21.977	44.085	60.000	15.915	38.080	50.000	11.920
27.708	45.202	60.000	14.798	37.242	50.000	12.758

Table 10. Conducted Emissions, 15.207(a), Neutral, Test Results

Occupied Bandwidth Measurements

§ 15.215(c) 20 dB Occupied Bandwidth

Test Requirement(s):	§ 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Test Procedure:	The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer. Per ANSI C63.10: 2020 the RBW should be between 1% and 5% of the occupied bandwidth.
Test Results:	The HID Amico Facial Reader was compliant with this requirement. The 20dB Bandwidth is shown on the plots on the following pages.
Test Engineer(s):	Veer Patel
Test Date(s):	7/28/2025

RSS-GEN (6.7) 99% Occupied Bandwidth

Test Requirements: The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

Test Procedure: The EUT was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer. Per ANSI C63.10: 2020 the RBW should be between 1% and 5% of the occupied bandwidth.

Test Results The HID Amico Facial Reader was compliant with this requirement. The 99% Bandwidth is shown on the plots on the following pages.

Test Engineer(s): Veer Patel

Test Date(s): 7/28/2025


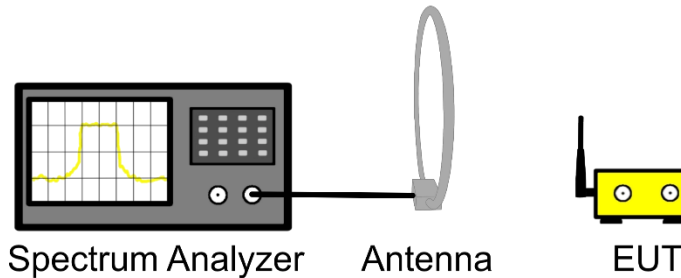


Figure 3. 20 dB Bandwidth and 99% Bandwidth Test Setup

Center Frequency (MHz)	20 dB Bandwidth	99% Bandwidth
13.56MHz	63.68Hz	246.02Hz

Table 11. Occupied Bandwidth Test Results

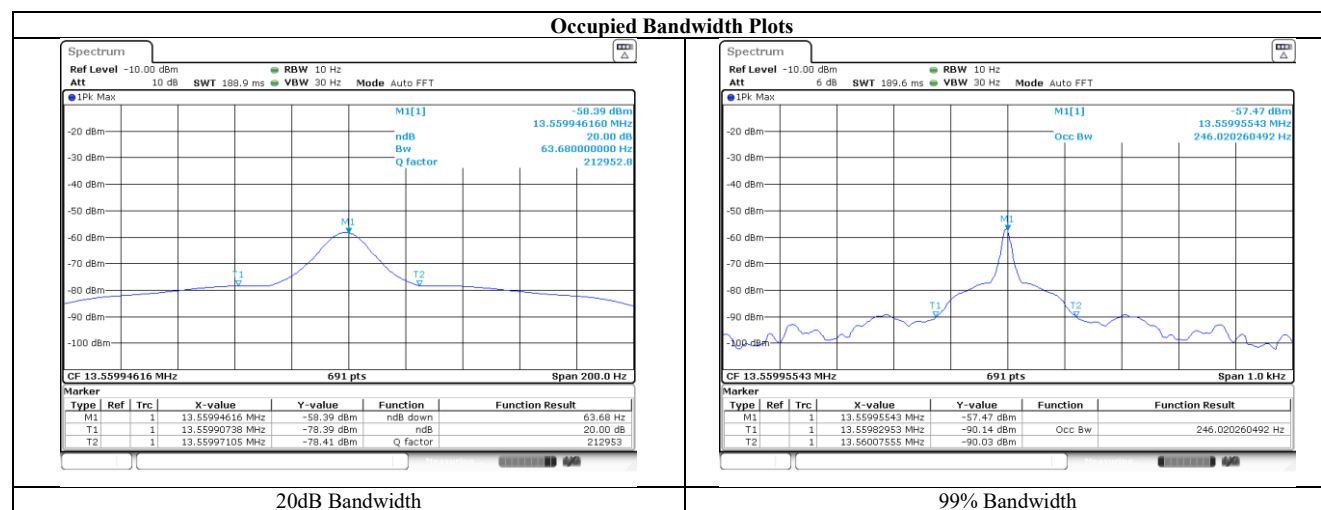

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.225(a-d) Field Strength of Radiated Emissions

- Test Requirement(s):** **15.225 (a)** The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.
- 15.225 (b)** Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- 15.225 (c)** Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- 15.225 (d)** The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

RSS-210 (B.6.a(ii - iv)) Field Strength of Radiated Emissions

- Test Requirement(s):** **RSS-210 (B.6.a(i))** The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15.848 mV/m (84 dBμV/m) at 30 meters.
- RSS-210 (B.6.a(ii))** Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 μV/m (50.5 dBμV/m) at 30 meters.
- RSS-210 (B.6.a(iii))** Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 μV/m (40.5 dBμV/m) at 30 meters.
- RSS-210 (B.6.a(iv))** The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in RSS-GEN Section 8.9.

Test Procedure:

The EUT was set to transmit and placed on a 0.8 m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.10: 2020 were used. For measurements below 30 MHz a loop antenna placed 3m away from the unit was used. For measurements above 30 MHz a biconalog antenna placed 10 m away from the unit was used. Measurements below 30 MHz were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. Measurements above 30 MHz were conducted with the biconalog antenna in the vertical and horizontal polarizations. A peak detector was used to perform a pre-scan from 9 kHz to 10 times the fundamental frequency. Spurious emissions within 20 dB of the applicable limit were measured using a quasi-peak detector and recorded in the subsequent section. Peak emissions that were observed over the applicable limit were determined to be digital emissions subject to the requirements of FCC Part 15 Subpart B and ICES-003 subsection 6.2 for Class A devices.

The measurements were made at 3 m with the loop antenna (below 30MHz). They were then extrapolated to 30m or 300 m using the following correction factors which were applied to the limit.

$$40\log(30/3) = 40 \text{ dB}$$
$$40\log(300/3) = 80 \text{ dB}$$

The measurements made at 10 m with the biconilog antenna (above 30MHz) were then extrapolated to the 3m using the following correction factor.

$$20\log(10/3) = +10.46 \text{ dB}$$

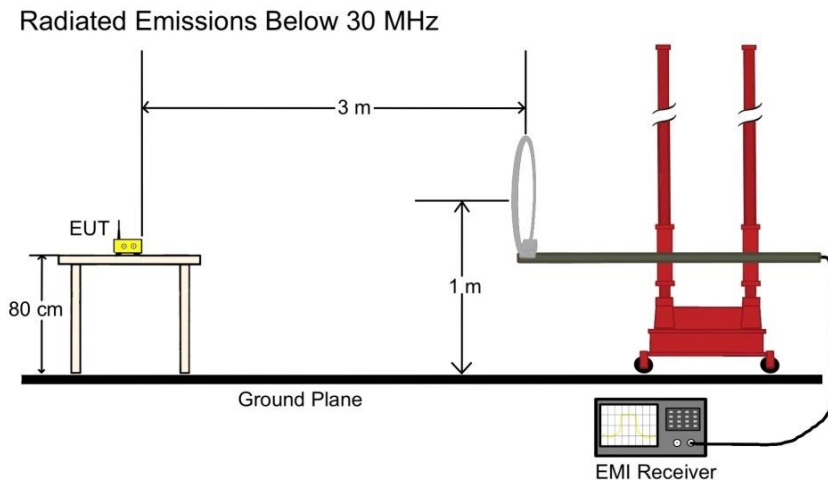


Figure 4: Radiated Emissions (Below 30MHz), Test Setup

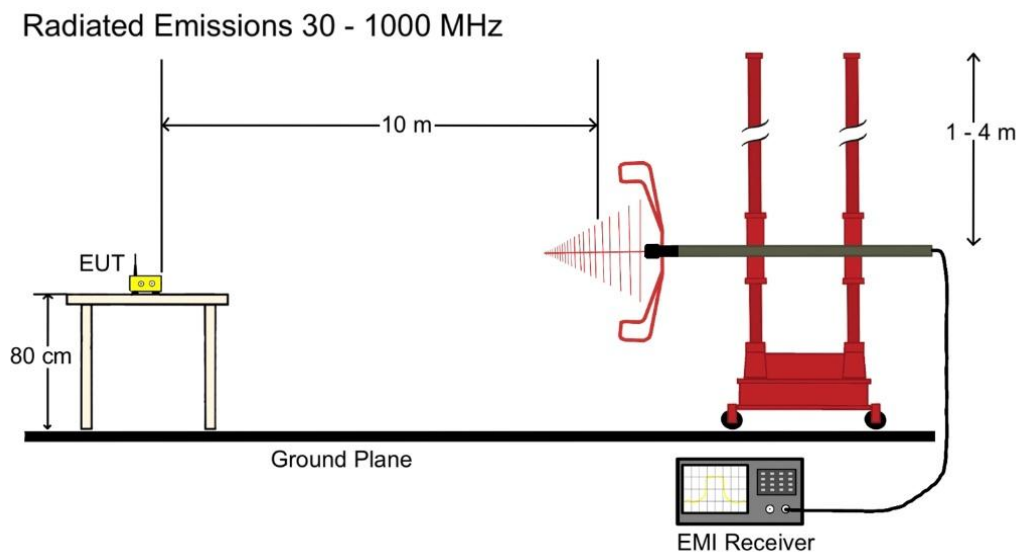


Figure 5. Radiated Emissions (Above 30MHz), Test Setup

Test Results: The HID Amico Facial Reader was compliant with the requirements of §15.225(a - d) and RSS-210 RSS-210 (B.6.a(i, ii, iii, and iv)).

Test Engineer(s): Bryan Taylor, Veer Patel

Test Date(s): 7/28/2025 – 8/6/2025

Radiated Field Strength Test Results

Frequency [MHz]	Peak Level [dBμV/m] ¹	Limit [dBμV/m]	Margin [dB]	Correction [dB] ²	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
13.326	18.17	80.50	62.33	10.62	V	-0.1	1.00	9.000	Pass
13.349	27.87	80.50	52.63	10.62	H	360.1	1.00	9.000	Pass
13.439	17.22	90.50	73.28	10.61	V	-0.1	1.00	9.000	Pass
13.457	28.77	90.50	61.73	10.61	H	360.1	1.00	9.000	Pass
13.560	46.54	124.00	77.46	10.61	H	274	1.00	9.000	Pass
13.560	47.27	124.00	76.73	10.61	V	200.6	1.00	9.000	Pass
13.632	19.17	90.50	71.33	10.60	V	-0.1	1.00	9.000	Pass
13.668	24.19	90.50	66.31	10.60	H	360.1	1.00	9.000	Pass
13.745	18.92	80.50	61.58	10.60	V	-0.1	1.00	9.000	Pass
13.772	24.52	80.50	55.98	10.60	H	360.1	1.00	9.000	Pass

Figure 6. Worst Case In-Band Field Strength

Frequency [MHz]	Peak Level [dBμV/m] ¹	Limit [dBμV/m]	Margin [dB]	Correction [dB] ²	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
0.029	58.73	118.46	59.73	13.93	H	359.6	1.00	0.200	Pass
0.032	58.42	117.41	58.99	13.55	H	359.6	1.00	0.200	Pass
0.061	55.06	111.87	56.81	11.78	H	351.1	1.00	0.200	Pass
12.422	21.28	69.50	48.22	10.70	H	216.3	1.00	9.000	Pass
12.422	23.65	69.50	45.85	10.70	V	307.6	1.00	9.000	Pass
13.560	41.07	69.50	28.43	10.61	H	282.4	1.00	9.000	Pass
13.560	42.77	69.50	26.73	10.61	V	184.7	1.00	9.000	Pass

Figure 7. Worst Case Field Strength Below 30MHz

¹ This corrected level includes the factor shown in the “correction” column. The corrected level = Raw Reading + Correction Factor. The raw reading is not shown in the table above.

² This correction factor includes cable loss in dB, preamplifier gain in dB, and an electric field antenna factor in (dB/m).

Frequency [MHz]	QPK Level [dBμV/m] ¹	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB] ²	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]	Result
112.830	17.38	43.52	26.14	-7.54	V	87.1	1.30	120.000	Pass
127.080	20.99	43.52	22.53	-6.56	V	134.9	0.99	120.000	Pass
128.010	20.03	43.52	23.49	-6.35	H	93.4	3.99	120.000	Pass
132.810	21.55	43.52	21.97	-6.74	V	135.1	1.00	120.000	Pass
133.770	20.08	43.52	23.44	-6.71	V	213.2	1.49	120.000	Pass
333.360	13.32	46.02	32.70	-4.69	H	70.2	1.49	120.000	Pass
405.030	25.81	46.02	20.21	-2.71	H	194.8	1.72	120.000	Pass

Figure 8. Worst Case Field Strength Above 30MHz

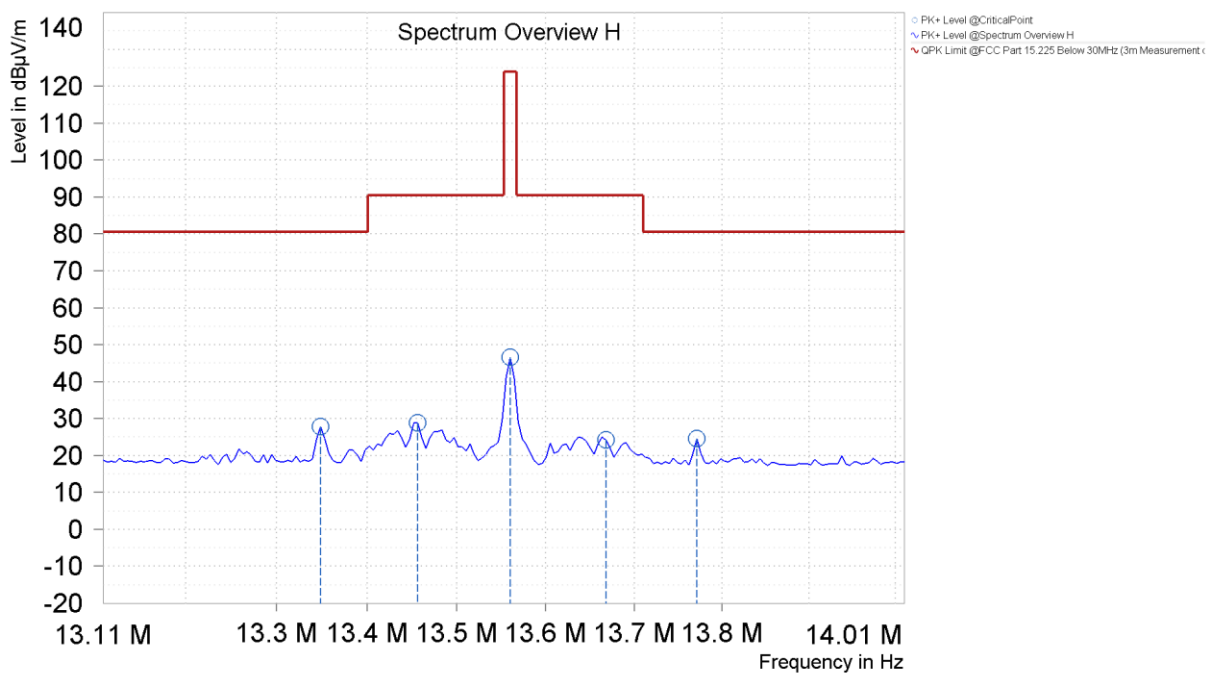


Figure 9. In-Band Emission Mask (Coplanar Loop)

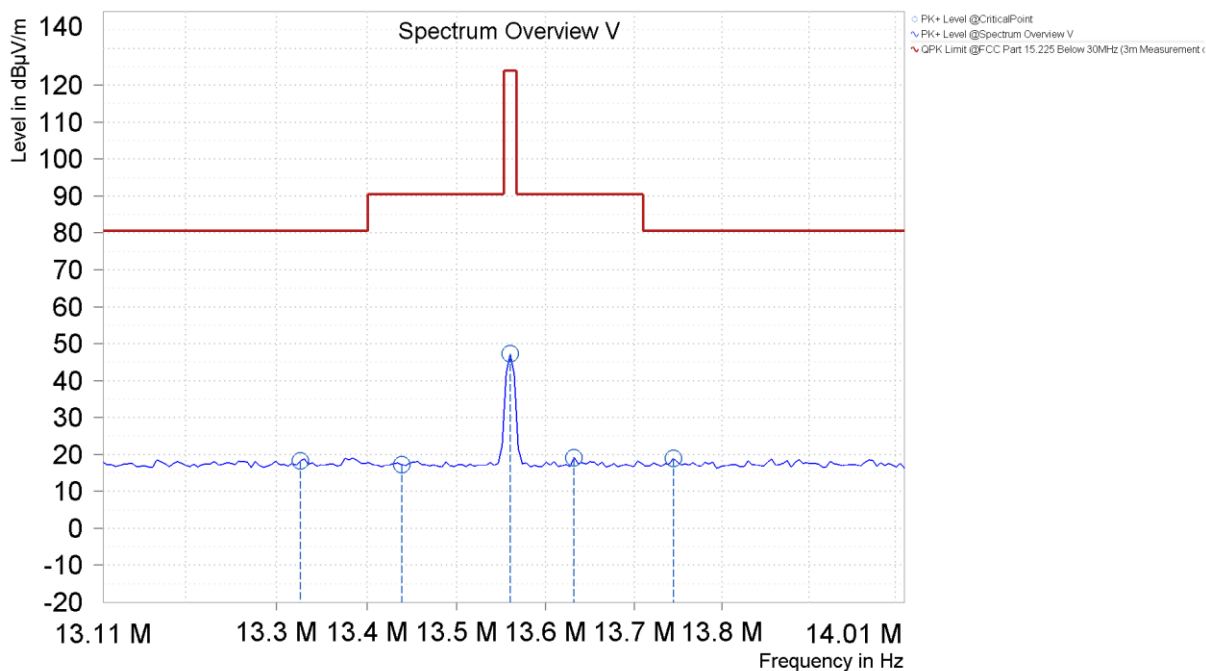


Figure 10. In-Band Emission Mask (Coaxial Loop)

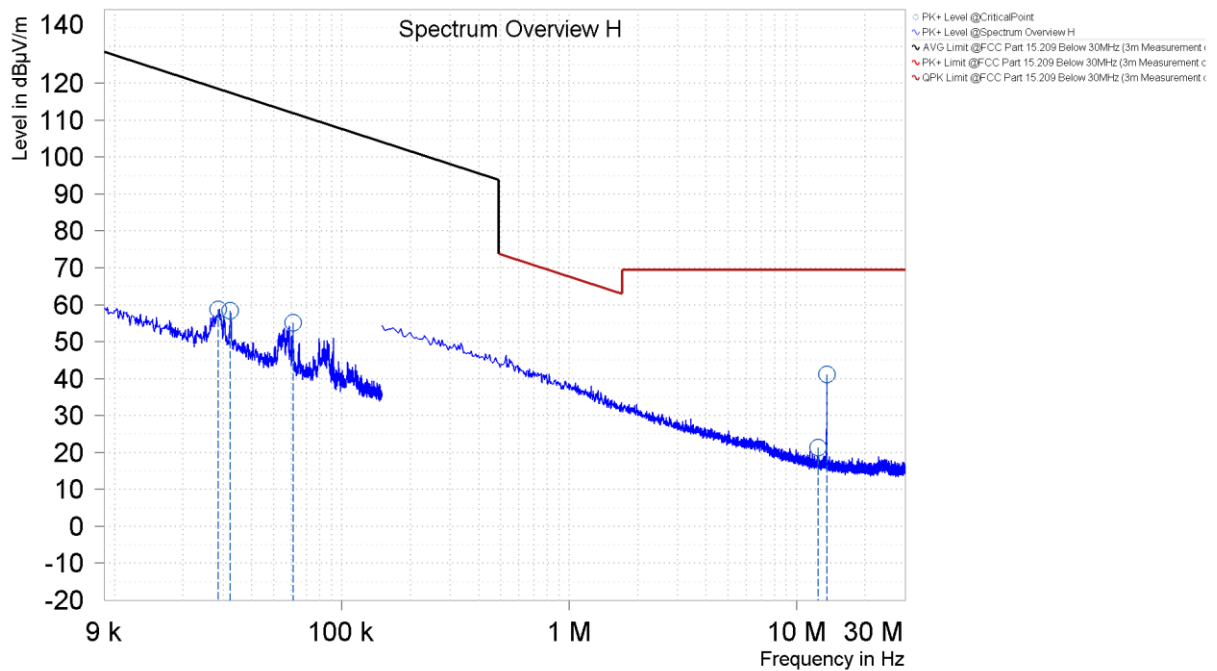


Figure 11. Out of Band Emissions Below 30MHz (Coplanar Loop)

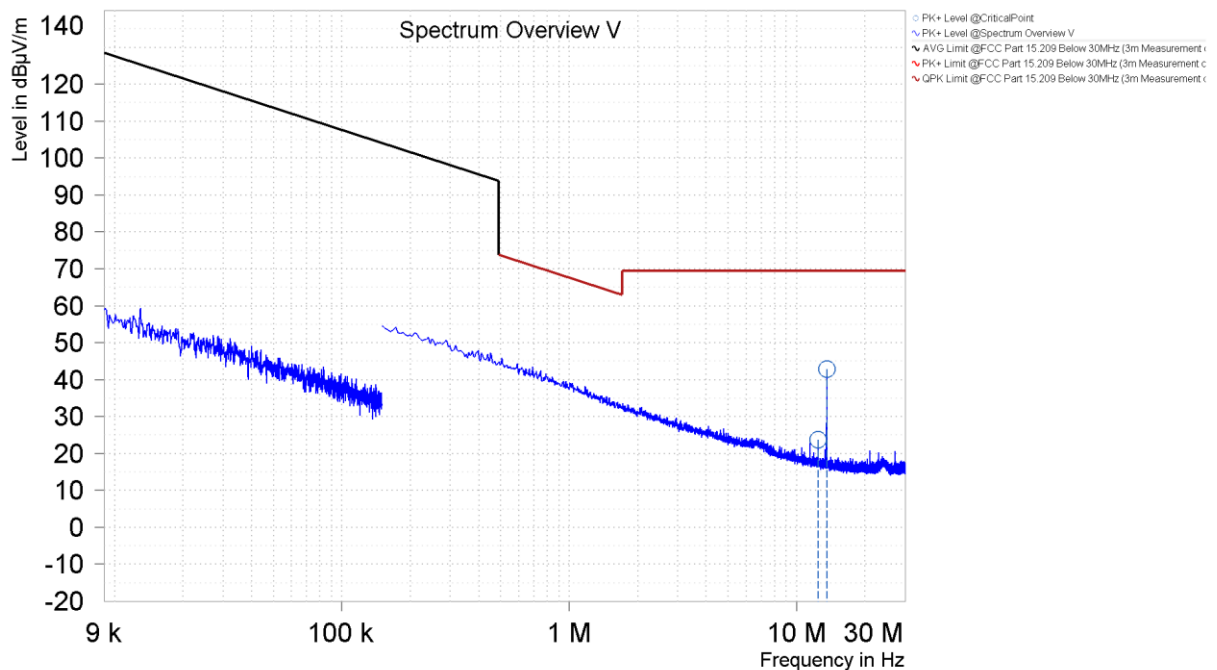


Figure 12. Out of Band Emissions Below 30MHz (Coaxial Loop)

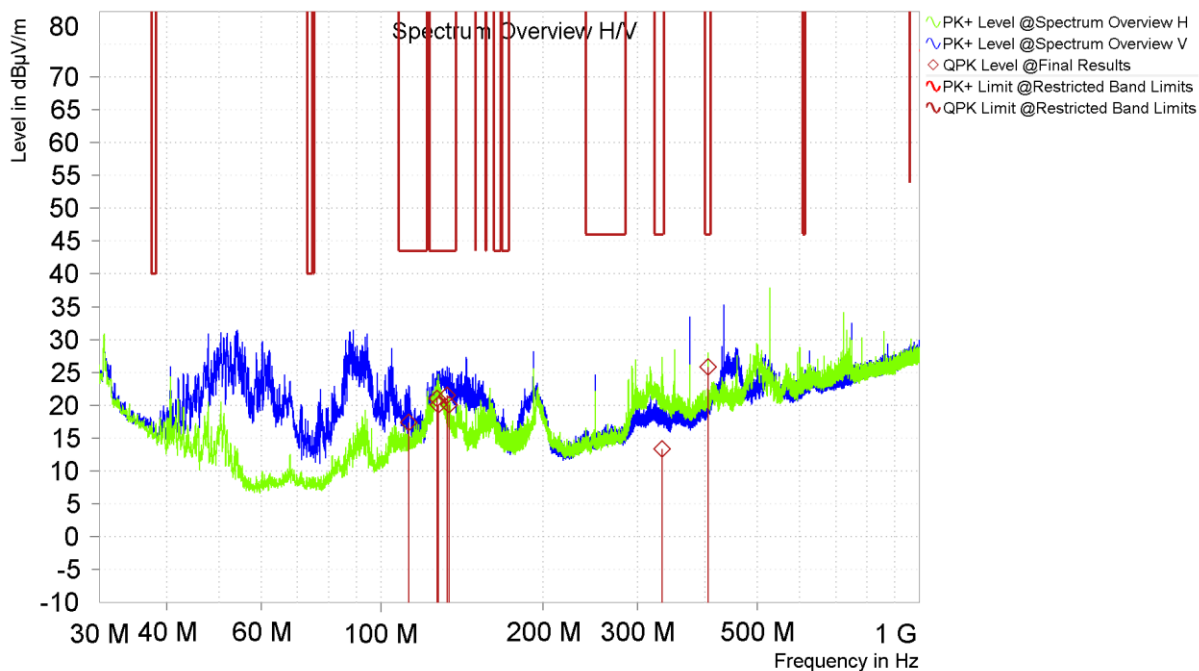


Figure 13. Out of Band Emissions Above 30MHz (Vertical and Horizontal Polarity)

Electromagnetic Compatibility Criteria for Intentional Radiators

Frequency Stability

Test Requirement(s): **15.225(e)** The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

RSS-210 (B.6.b) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

Test Procedure: Measurements are in accordance with section 6.8 of ANSI C63.10. The EUT was placed in the Environmental Chamber and allowed to reach desired temperature. A spectrum analyzer was connected to a magnetic field loop antenna and used to measure the frequency drift via a radiated path measurement. The EUT was set to transmit in the operating frequency range. Frequency drift was investigated for the extreme temperatures and nominal temperature, until the unit is stabilized then recorded the reading in tabular format with the temperature range of -20° to 50°C. The frequency stability tests were performed with the use of a DC power supply powering the product.

Test Results: The HID Amico Facial Reader was compliant with Part 15.225 (e) and RSS-210 (B.6.b) requirement(s) of this section.

Test Engineer(s): Veer Patel

Test Date(s): 8/5/2025

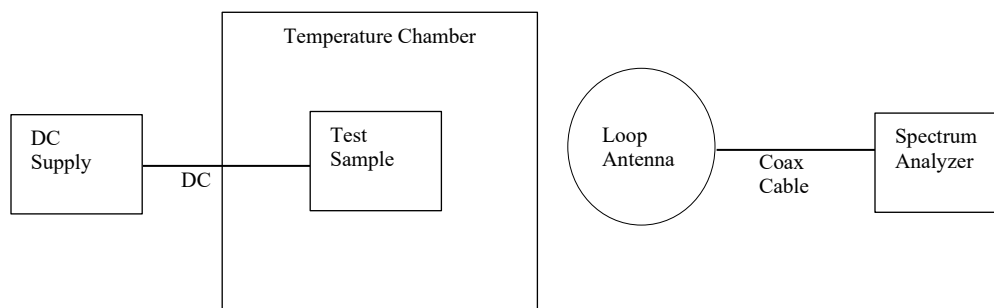


Figure 14. Temperature Stability Test Setup

Operating
Frequency: 13,560,000 Hz
Reference Voltage: 120 VAC
Deviation Limit: 0.01 %

Voltage %	Voltage (VAC)	Temp (°C)	Measured Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	Limit (%)
100%	120	-30	13,559,962	-38	-0.0003	0.01
100%	120	-20	13,559,997	-3	0.0000	0.01
100%	120	-10	13,560,011	11	0.0001	0.01
100%	120	0	13,560,002	2	0.0000	0.01
100%	120	10	13,559,979	-21	-0.0002	0.01
100%	120	20	13,559,905	-95	-0.0007	0.01
100%	120	30	13,559,924	-76	-0.0006	0.01
100%	120	40	13,559,907	-93	-0.0007	0.01
100%	120	50	13,559,904	-96	-0.0007	0.01
115%	138	20	13,559,982	-18	-0.0001	0.01
85%	102	20	13,559,985	-15	-0.0001	0.01

Figure 15. Frequency Stability Test Results

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

MET Asset #	Description	Manufacturer	Model	Last Cal Date	Cal Due Date
1A1234	FSV Signal Analyzer	Rohde & Schwarz	FSV 40	03/13/2025	03/13/2026
1A1250	EMI Test Receiver	Rohde & Schwarz	ESW44	03/28/2025	03/28/2026
1A1176	Active Loop Antenna (9KHz-30MHz)	ETS-Lindgren	6502	08/22/2024	08/22/2026
1A1050	Bi-Log Antenna	Schaffner	CBL-6112D	03/05/2024	03/05/2026
1A1065	EMI Test Receiver	Rohde & Schwarz	ESCI	08/20/2024	08/20/2025
1A1177	Pulse Limiter	Rohde & Schwarz	ESH3Z2	12/11/2024	12/11/2025
1A1149	DC Milli-Ohm Meter	GW Instek	GOM-802	10/15/2024	10/15/2025
3A3377	Thermohygrometer with barometer	Omega	Q68706	03/31/2025	03/31/2026
1A1257	True-RMS Multimeter	Fluke	179	02/07/2025	02/07/2026
1A1123	LISN	TESEQ	NNB 51	12/11/2024	12/11/2025
1A1225	Environmental Chamber	Espec	EXP-2H/New	05/16/2025	05/16/2026
1A1099	Generator	Com-Power	CGO-51000	See Note	
1A1044	Generator	Com-Power	CG-520	See Note	
1A1073	Multi Device Controller	ETS	2090	See Note	
1A1074	System Controller	Panasonic	WV-CU101	See Note	
1A1080	Multi-Device	ETS	2090	See Note	
1A1180	Preamplifier	Miteq	AMF-7D-01001800-22-10P	See Note	

Table 12. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

End of Report