


Test Time: 2016-12-12 15:13:48

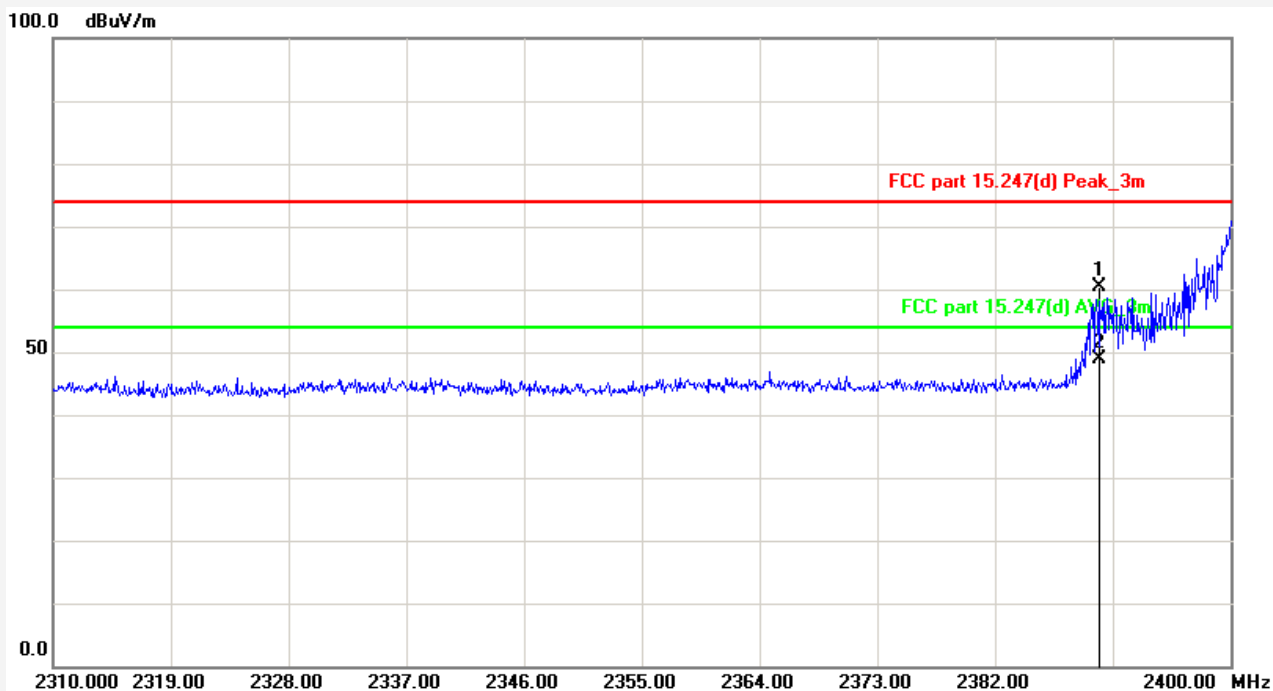

Report No.: PA6528D

Test Standard: FCC part 15.247(d) Peak\_3m

Test item: Radiation Emission

Applicant: SUPERSONIC

Product: PORTABLE BLUETOOTH SPEAKER

Model No.: PA6528D

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: DC 12V

Test Engineer: Sance

Test Mode: TX


Remark: 8DPSK -Hopping

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2390.000        | 8.09          | 52.18          | 60.27          | 74.00          | -13.73      | peak     |             |                | P   |        |
| 2   | 2390.000        | 8.09          | 40.87          | 48.96          | 54.00          | -5.04       | AVG      |             |                | P   |        |

Note: Level=Reading+Factor.

Margin=Limit-Level.

Test Time: 2016-12-12 15:19:49

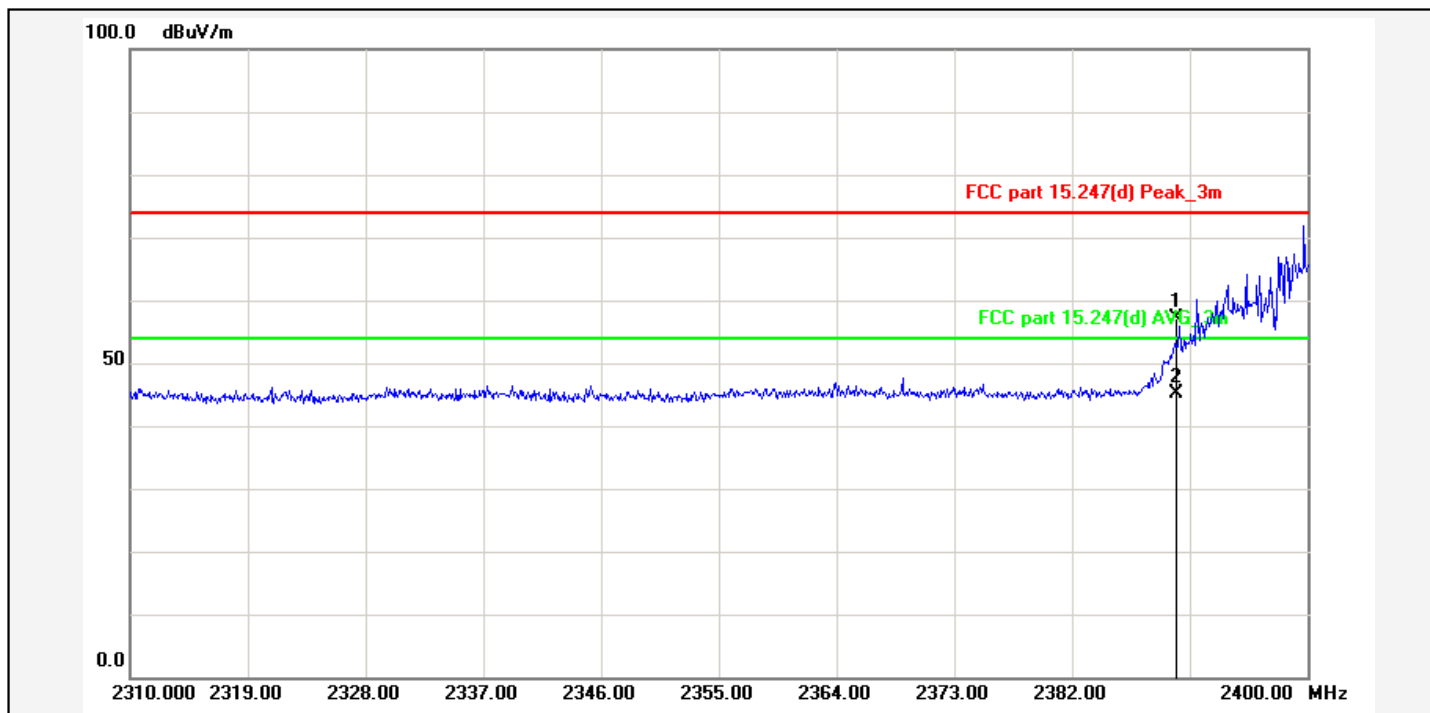

Report No.: PA6528D

Test Standard: FCC part 15.247(d) Peak\_3m

Test item: Radiation Emission

Applicant: SUPERSONIC

Product: PORTABLE BLUETOOTH SPEAKER

Model No.: PA6528D

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: DC 12V

Test Engineer: Sance

Test Mode: TX


Remark: 8DPSK -Hopping

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2390.000        | 8.09          | 49.14          | 57.23          | 74.00          | -16.77      | peak     |             |                | P   |        |
| 2   | 2390.000        | 8.09          | 37.10          | 45.19          | 54.00          | -8.81       | AVG      |             |                | P   |        |

Note: Level=Reading+Factor.

Margin=Limit-Level.

Test Time: 2016-12-12 15:26:27

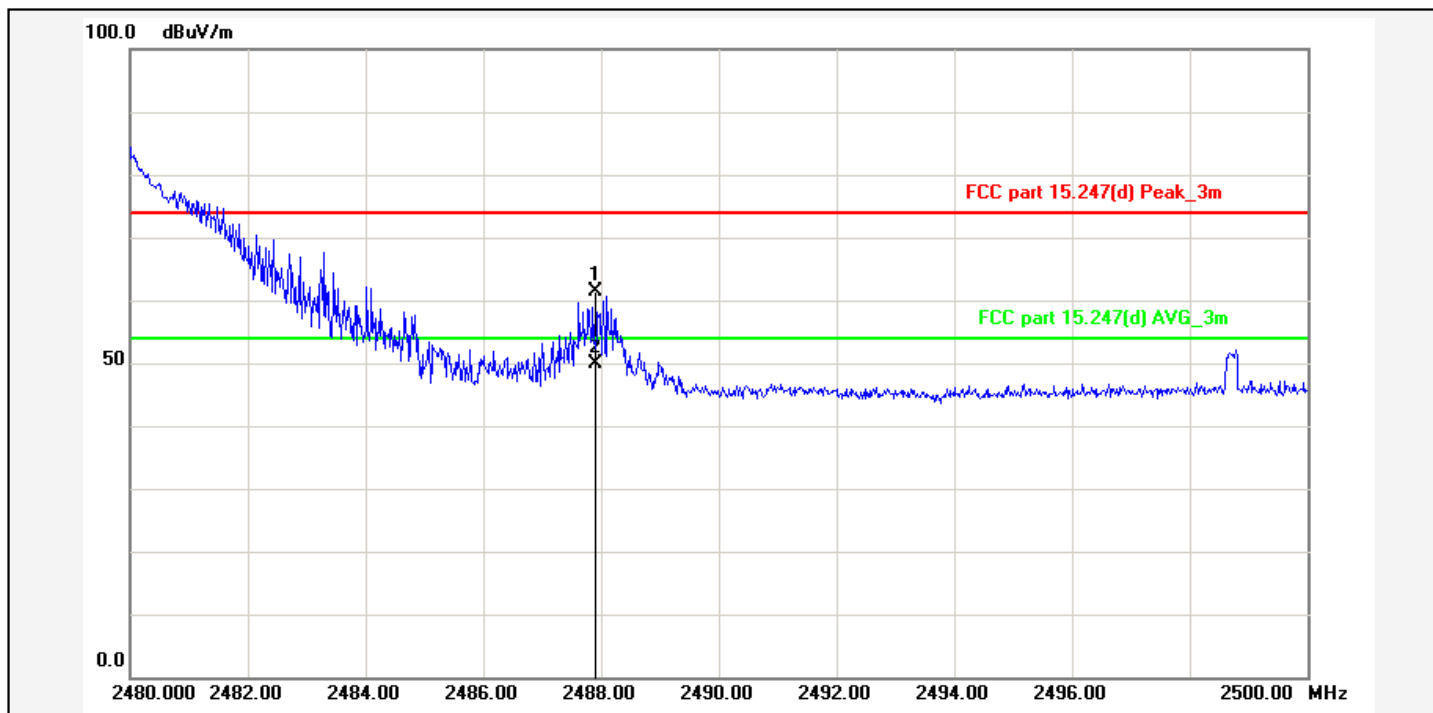

Report No.: PA6528D

Test Standard: FCC part 15.247(d) Peak\_3m

Test item: Radiation Emission

Applicant: SUPERSONIC

Product: PORTABLE BLUETOOTH SPEAKER

Model No.: PA6528D

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: DC 12V

Test Engineer: Sance

Test Mode: TX


Remark: 8DPSK -Hopping

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2487.900        | 8.36          | 52.93          | 61.29          | 74.00          | -12.71      | peak     |             |                | P   |        |
| 2   | 2487.900        | 8.36          | 41.49          | 49.85          | 54.00          | -4.15       | AVG      |             |                | P   |        |

Note: Level=Reading+Factor.

Margin=Limit-Level.

Test Time: 2016-12-12 15:31:21

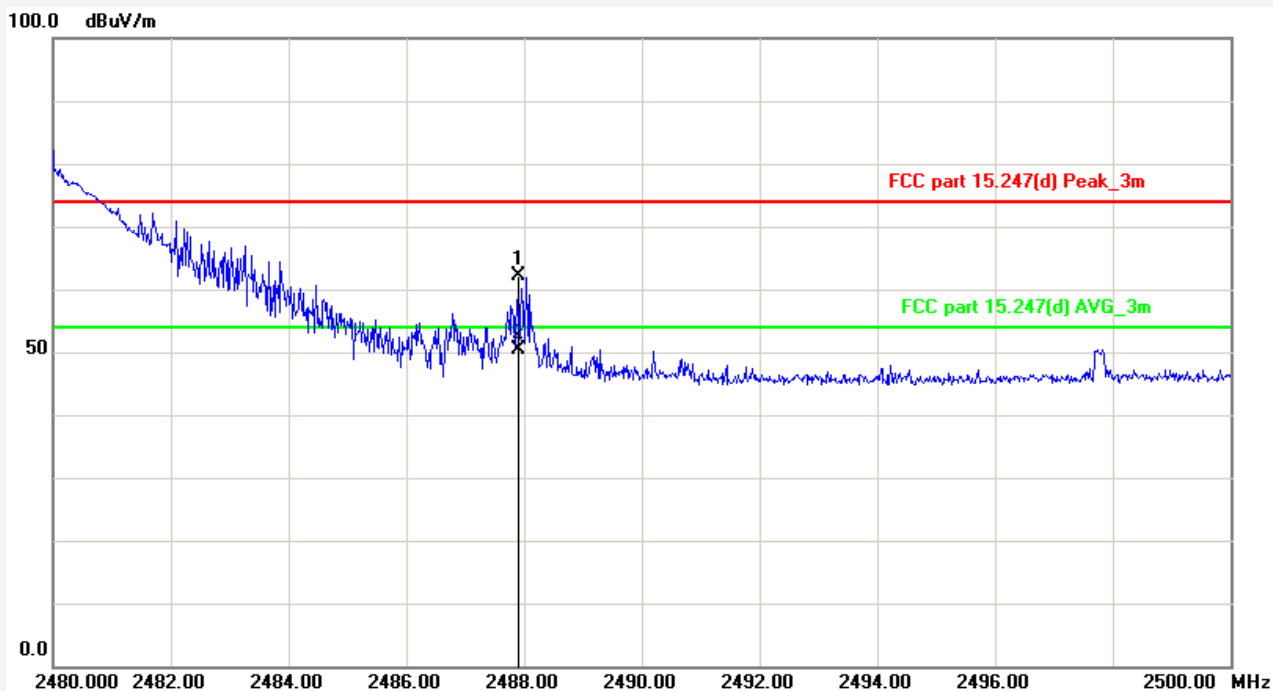

Report No.: PA6528D

Test Standard: FCC part 15.247(d) Peak\_3m

Test item: Radiation Emission

Applicant: SUPERSONIC

Product: PORTABLE BLUETOOTH SPEAKER

Model No.: PA6528D

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 22(C) / 54 %

Power Rating: DC 12V

Test Engineer: Sance

Test Mode: TX

Remark: 8DPSK -Hopping

| No. | Frequency (MHz) | Factor (dB/m) | Reading (dBuV) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F | Remark |
|-----|-----------------|---------------|----------------|----------------|----------------|-------------|----------|-------------|----------------|-----|--------|
| 1   | 2487.900        | 8.36          | 53.81          | 62.17          | 74.00          | -11.83      | peak     |             |                | P   |        |
| 2   | 2487.900        | 8.36          | 41.98          | 50.34          | 54.00          | -3.66       | AVG      |             |                | P   |        |

Note: Level=Reading+Factor.

Margin=Limit-Level.