




[APPROVAL SHEET]



품명 : NKC-8

Nice Korea Components

[APPROVAL SHEET]

Product	NKC- 8	
Model		
Designed by	Checked by	Approved by
		
/	/	/

2025. 04. 17

- Contents -

•표지	1p
•목차	3p
1. Revision History	4p
2. Features & Applications	5p
3. Electrical Specifications	6p
4. Measurements Method & Conditions	10p
5. Antenna Pattern	11p
6. Marking View	11p
7. Reflow Profile	12p
8. Environmental Tests	13p
9. Packaging	14p
10. Usage and Cautions	14p

1. Revision History

product	NKC- 8	Model	
---------	--------	-------	--

[illegible]

2. Features & Applications

2.1 Features

This ceramic chip antenna is applied to 2.4G ISM band applications, i.e. Bluetooth. Zigbee, Wireless LAN, etc...

형 태	Bulk Ceramic	
재 질	유 전 체	Al ₂ O ₃ (Alumina)
	전 극	은(Ag)
크 기 (mm)	L = 9.8+/- 0.1	
	W = 2.8+/- 0.1	
	T = 1.8+/- 0.1	
Weight	180 mg	

3. Electrical Specifications

3- 1.

- * All item are measured in room temperature (24~ 25 'C).
- * All item are measured at customer set condition.

No.	Items	Typical Data
1	Frequency (MHz)	2400 ~ 2500
2	VSWR	3 : 1
3	Total Gain [dBi]	0.01 / - 6.65
4	Impedance	50 ohm
5	Polarization	Linear

3- 2. ANT condition & matching


시정수

C28 : DNI


L4 : 1.5nH

C25 : 1pF

3- 3. VSWR (S11)

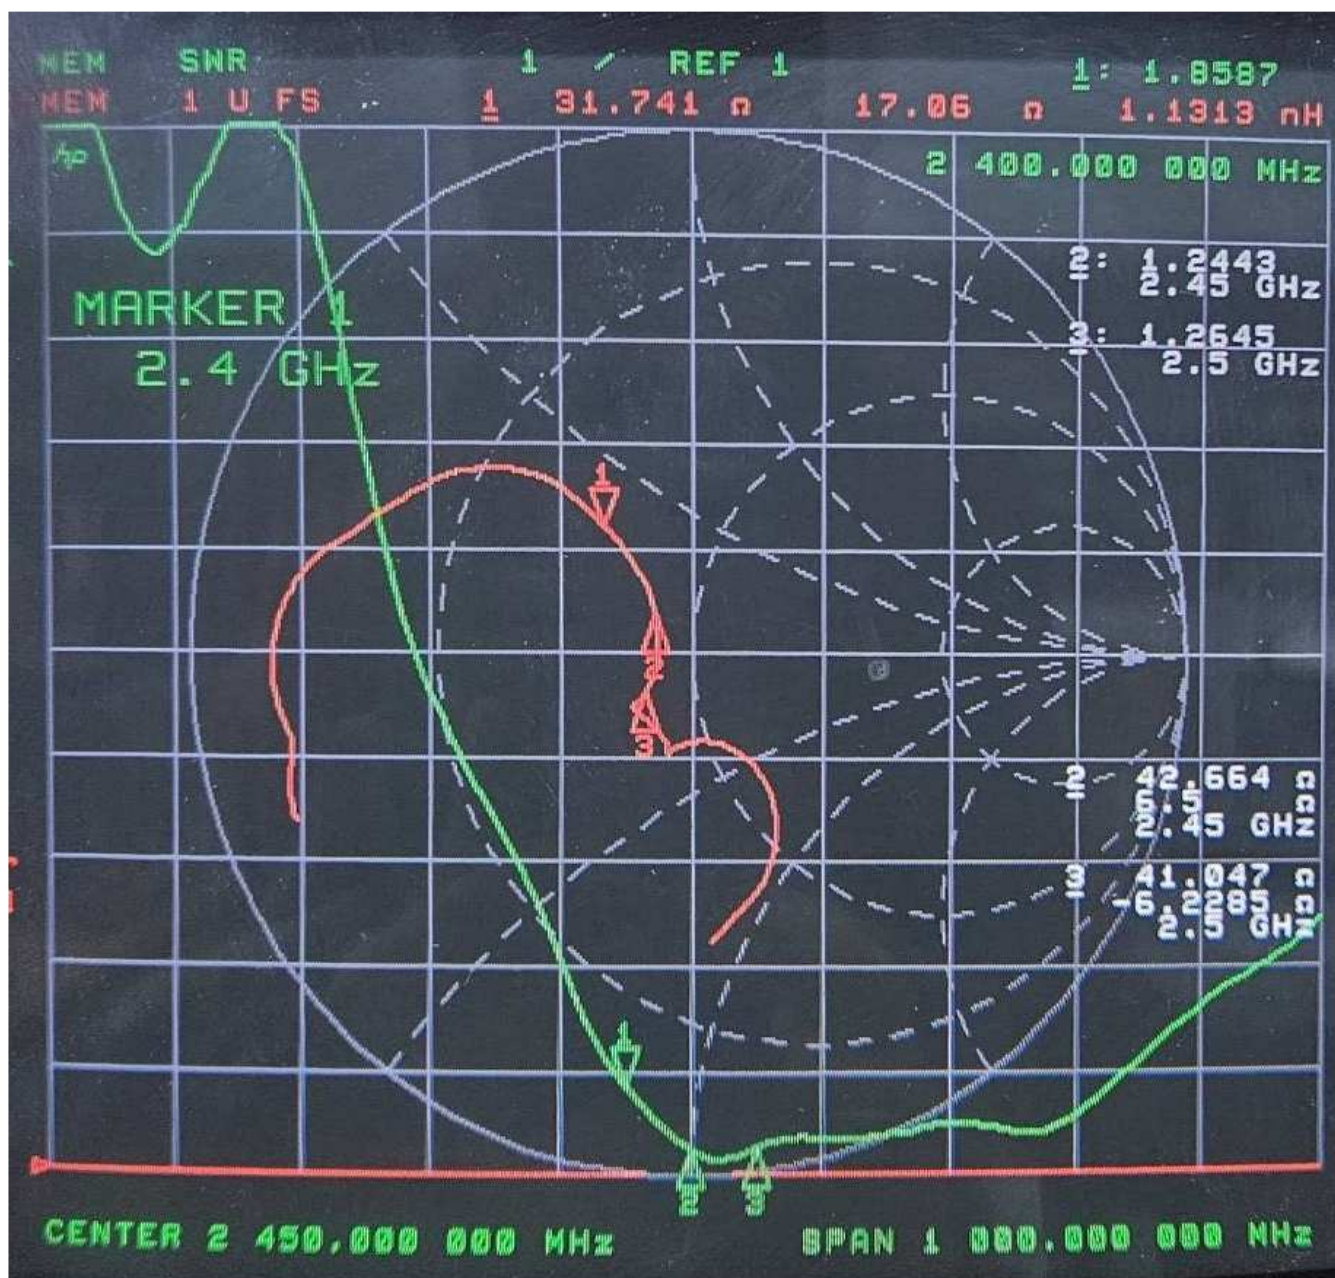

3- 4. Radiation Patterns (BT 부분)

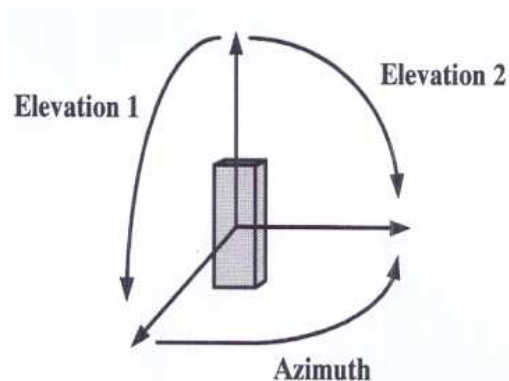

Theta	Vertical Field of measured plane
Phi	Horizontal Field of measured plane


이득[dBi] (Co- Pola)	Azimuth	Phi	Peak	- 1.95
			Avg	- 9.22
	Elevation	Theta	Peak	0.01
			Avg	- 6.65

(V)				(H)			
Avg.[dBi]	Peak[dBi]	θ [deg]	BW[deg]	Avg.[dBi]	Peak[dBi]	θ [deg]	BW[deg]
-8.17	-1.33	100.00	60.52	-11.14	-4.46	-180.00	999.00
-7.52	-0.64	105.00	50.76	-10.53	-3.18	-180.00	999.00
-6.65	0.01	105.00	52.67	-9.22	-1.95	-180.00	999.00

4. Measurements Method & Conditions

The measurement of antenna performance is measurement of gain, radiation pattern using ORBIT/FR apparatus in Anechoic chamber and measurement of VSWR using Network analyzer.


4- 1. The measurement of Frequency and VSWR

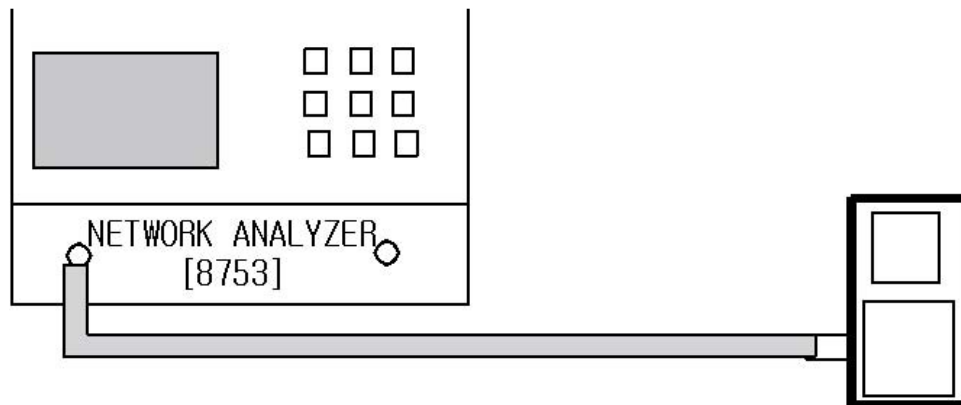

[Measurement Method]

1. As seen the above, network analyzer is set up for S11 measurement.
2. The measurement frequency range is to set up from 2 GHz to 3 GHz.
3. Perform S11 one port full calibration.
4. Measure the VSWR of three points of Bluetooth frequency range such as 2.4 GHz, 2.45 GHz, and 2.5 GHz.

4- 2. The measurement of Gain & Radiation Patterns

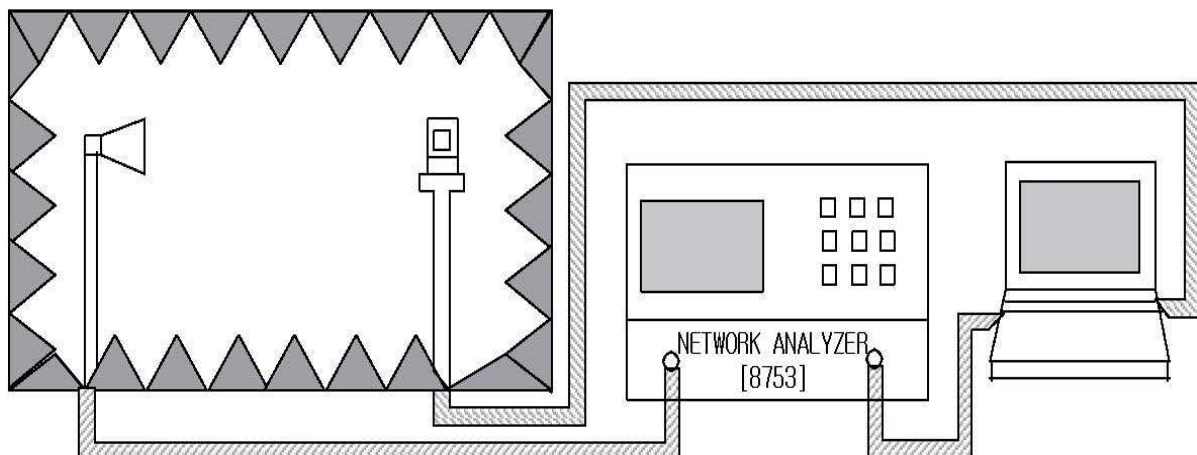

5. Ag pattern



TOP



S1



BOT



S2

6. Marking View




Only TOP part

6- 1. 마킹 종류

* RF용 검정 잉크 사용

7. Reflow Profile (생산처 협의)

7- 1. Standard reflow condition(Pb- free)

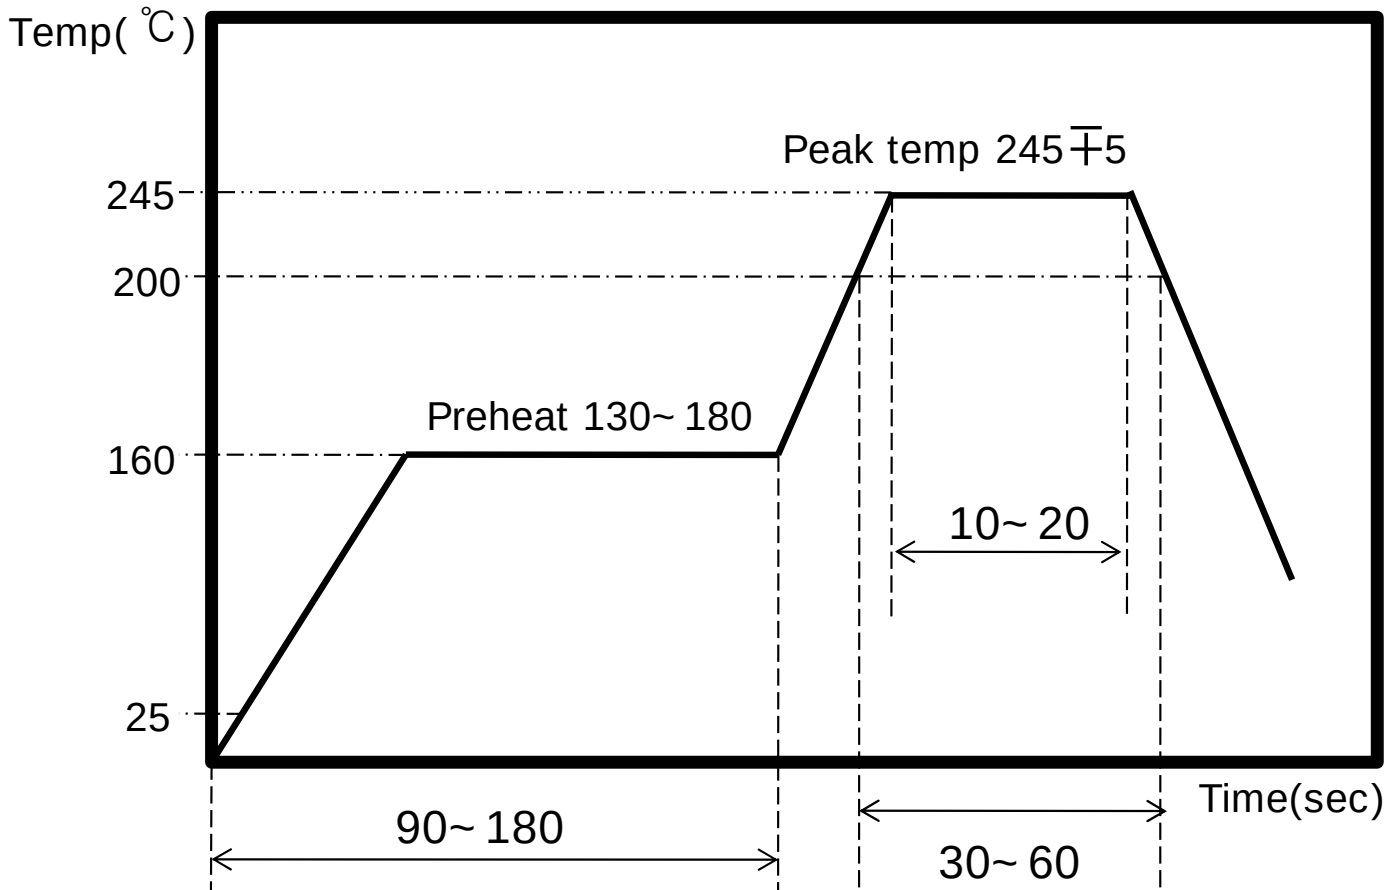


SMD 업체 현황에 따라 peak temp 및 시간은 변경 될 수 있으므로 협의를 요함

7- 2. 수동 납땜 (인두기)을 할 경우(Pb- free)

인두 온도 : 340 'C / 시간 : 각 단 max 3 sec

8. Environmental Tests

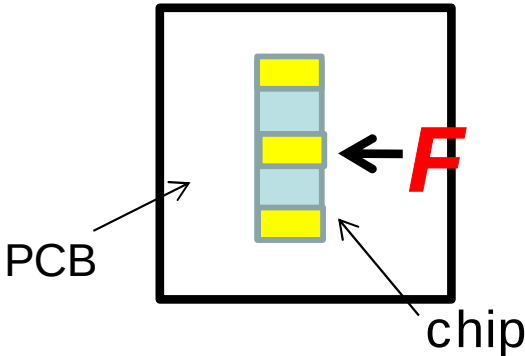No.	ITEM	TEST COND	TEST REQU
1	High Temperature Resistance	1. Temp: $+125 \pm 5^{\circ}\text{C}$ 2. Time: $1000 \pm 24\text{hrs}$ 3. Measure Fc after left for 24hrs min. at room temp	1. Within electric spec(VSWR) 2. No visual damage
2	Low Temperature Resistance	1. Temp: $-40 \pm 5^{\circ}\text{C}$ 2. Time: $1000 \pm 24\text{hrs}$ 3. Measure Fc after left for 48hrs min. at room temp	1. Within electric spec(VSWR) 2. No visual damage
3	Thermal Shock	1. 1cycle/step1:- $40 \pm 3^{\circ}\text{C}$,30min step2: $+125 \pm 3^{\circ}\text{C}$,30min 2. Number of cycle:30 3. Measure after left for 48hrs min. at room temp	1. Within electric spec(VSWR) 2. No visual damage
4	Humidity	1. Humidity:85%RH 2. Temp: $+85 \pm 3^{\circ}\text{C}$ 3. Time: $1000 \pm 24\text{hrs}$ 4. Measure Fc after left for 48hrs min. at room temp	1. Within electric spec(VSWR) 2. No visual damage
5	Adhesive strength of termination	1. Applied force on SMD chip till detached point from PCB. 	1. No mechanical damage by forces applied on the right 2. Strength(F)>3kgf

