

FCC REPORT

Applicant: SNAKEBYTE ASIA Ltd.

Address of Applicant: Unit 907-908, 9th/F, Lu Plaza 2 Wing Yip Street, Kwun Tong, Hong Kong

Manufacturer/Factory: LiteStar Electronics Technology Co.,Ltd.

Address of Manufacturer/Factory: Xingchen Science & Technology Park,Lianbi Road, Wulian Industry Area Fenggang Town, Dongguan, China

Equipment Under Test (EUT)

Product Name: Dongle

Model No.: SB909733R, SBU909739R, SB910845R, SBU910841R, SB910852R, SBU910858R, SB910869R, SBU910865R, SB910876R, SBU910872R, SB910883R, SBU910889R, SB910890R, SBU910896R, SB910906R, SBU910902R, SB910913R, SBU910919R, SB910920R, BU910926R, SB910937R, SBU910933R

FCC ID: 2AKMJ-SB909733R

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.249:2016

Date of sample receipt: January 06, 2017


Date of Test: January 06-16, 2017

Date of report issued: January 17, 2017

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	January 17, 2017	Original

Prepared By:

Yang. Liu

Date:

January 17, 2017

Project Engineer

Check By:

Andy. Wu

Date:

January 17, 2017

Reviewer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA.....	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 RADIATED EMISSION METHOD.....	13
7.3.1 Field Strength of The Fundamental Signal	15
7.3.2 Spurious emissions.....	16
7.3.3 Bandedge emissions.....	20
7.4 20dB OCCUPY BANDWIDTH	21
8 TEST SETUP PHOTO	23
9 EUT CONSTRUCTIONAL DETAILS	25

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Field strength of the fundamental signal	15.249 (a)	Pass
Spurious emissions	15.249 (a) (d)/15.209	Pass
Band edge	15.249 (d)/15.205	Pass
20dB Occupied Bandwidth	15.215 (c)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.10: 2013 and ANSI C63.4: 2014.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of $k=2$ and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Dongle
Model No.:	SB909733R, SBU909739R, SB910845R, SBU910841R, SB910852R, SBU910858R, SB910869R, SBU910865R, SB910876R, SBU910872R, SB910883R, SBU910889R, SB910890R, SBU910896R, SB910906R, SBU910902R, SB910913R, SBU910919R, SB910920R, BU910926R, SB910937R, SBU910933R
Test Model:	SB909733R
Remark:	<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is the model name for commercial purpose.</i>
Operation Frequency:	2405MHz~2475MHz
Channel numbers:	71
Channel separation:	1MHz
Modulation type:	GFSK
Antenna Type:	PCB antenna
Antenna gain:	0 dBi(declare by Applicant)
Power supply:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	19	2423MHz	37	2441MHz	55	2459MHz
2	2406MHz	20	2424MHz	38	2442MHz	56	2460MHz
3	2407MHz	21	2425MHz	39	2443MHz	57	2461MHz
4	2408MHz	22	2426MHz	40	2444MHz	58	2462MHz
5	2409MHz	23	2427MHz	41	2445MHz	59	2463MHz
6	2410MHz	24	2428MHz	42	2446MHz	60	2464MHz
7	2411MHz	24	2429MHz	43	2447MHz	61	2465MHz
8	2412MHz	26	2430MHz	44	2448MHz	62	2466MHz
9	2413MHz	27	2431MHz	45	2449MHz	63	2467MHz
10	2414MHz	28	2432MHz	46	2450MHz	61	2468MHz
11	2415MHz	29	2433MHz	47	2451MHz	65	2469MHz
12	2416MHz	30	2434MHz	48	2452MHz	66	2470MHz
13	2417MHz	31	2435MHz	49	2453MHz	67	2471MHz
14	2418MHz	32	2436MHz	50	2454MHz	68	2472MHz
15	2419MHz	33	2437MHz	51	2455MHz	69	2473MHz
16	2420MHz	34	2438MHz	52	2456MHz	70	2474MHz
17	2421MHz	35	2439MHz	53	2457MHz	71	2475MHz
18	2422MHz	36	2440MHz	54	2458MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2475MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

Axis	X	Y	Z
Field Strength(dBuV/m)	87.21	89.09	88.01

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number
APPLE	PC Host	MacBook Pro	C1MN99ERDTY3

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017
17	Power Meter	Anritsu	ML2495A	GTS540	June 29 2016	June 28 2017
18	Power Sensor	Anritsu	MA2411B	GTS541	June 29 2016	June 28 2017

Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017
5	Coaxial Cable	GTS	N/A	GTS227	June. 29 2016	June. 28 2017
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017

7 Test results and Measurement Data

7.1 Antenna requirement


Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is pcb antenna, the best case gain of the antenna is 0dBi 	

7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.10:2013			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto			
Limit:	Frequency range (MHz)	Limit (dBuV)		
		Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*
		0.5-5	56	46
		5-30	60	50
* Decreases with the logarithm of the frequency.				
Test setup:	Reference Plane Test table/Insulation plane <i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m			
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			


Measurement data:

Line:

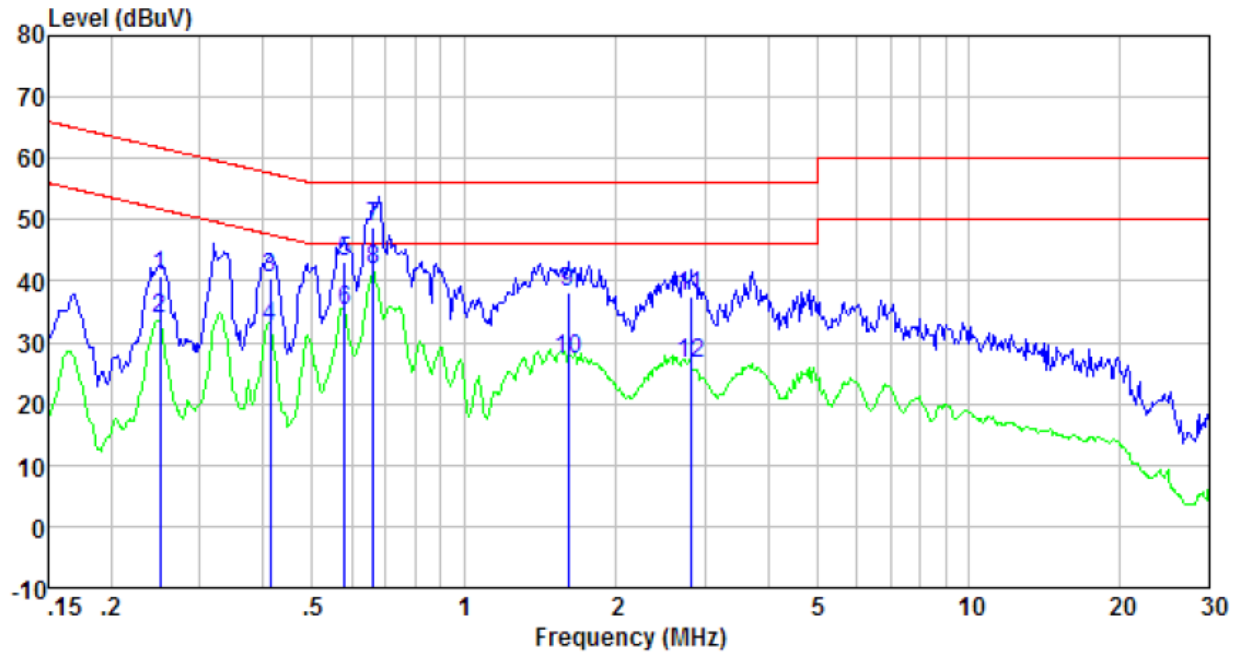

Freq MHz	Reading level dBuV	IIISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.249	40.32	0.44	0.11	40.87	61.78	-20.91	QP
0.249	33.22	0.44	0.11	33.77	51.78	-18.01	Average
0.413	40.07	0.41	0.11	40.59	57.59	-17.00	QP
0.413	32.15	0.41	0.11	32.67	47.59	-14.92	Average
0.579	42.69	0.32	0.12	43.13	56.00	-12.87	QP
0.579	34.63	0.32	0.12	35.07	46.00	-10.93	Average
0.661	48.44	0.29	0.13	48.86	56.00	-7.14	QP
0.661	41.51	0.29	0.13	41.93	46.00	-4.07	Average
1.610	37.94	0.21	0.14	38.29	56.00	-17.71	QP
1.610	26.89	0.21	0.14	27.24	46.00	-18.76	Average
2.809	37.02	0.20	0.15	37.37	56.00	-18.63	QP
2.809	26.19	0.20	0.15	26.54	46.00	-19.46	Average

Neutral:

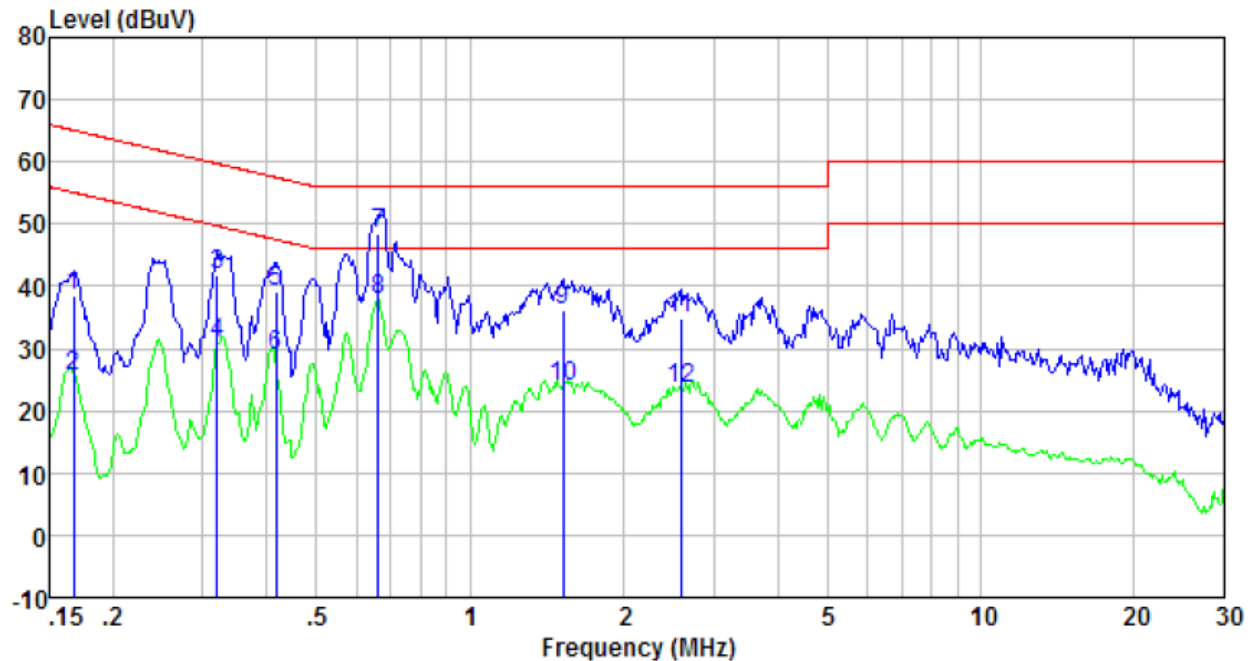



Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.168	37.99	0.41	0.12	38.52	65.08	-26.56	QP
0.168	25.01	0.41	0.12	25.54	55.08	-29.54	Average
0.320	41.32	0.42	0.10	41.84	59.71	-17.87	QP
0.320	30.25	0.42	0.10	30.77	49.71	-18.94	Average
0.417	38.63	0.39	0.11	39.13	57.51	-18.38	QP
0.417	28.39	0.39	0.11	28.89	47.51	-18.62	Average
0.661	48.21	0.25	0.13	48.59	56.00	-7.41	QP
0.661	37.31	0.25	0.13	37.69	46.00	-8.31	Average
1.519	35.89	0.20	0.14	36.23	56.00	-19.77	QP
1.519	23.66	0.20	0.14	24.00	46.00	-22.00	Average
2.581	34.62	0.20	0.15	34.97	56.00	-21.03	QP
2.581	23.03	0.20	0.15	23.38	46.00	-22.62	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Radiated Emission Method

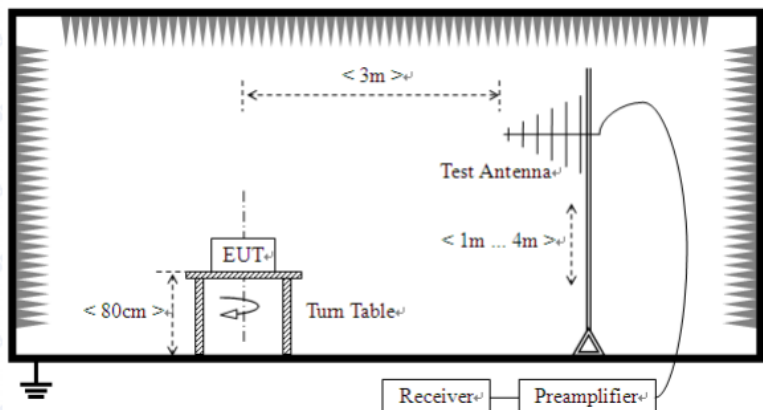Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit: (Field strength of the fundamental signal)	Frequency		Limit (dBuV/m @3m)		Remark
	2400MHz-2483.5MHz		94.00		Average Value
Limit: (Spurious Emissions)	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.00		Quasi-peak Value
	88MHz-216MHz		43.50		Quasi-peak Value
	216MHz-960MHz		46.00		Quasi-peak Value
	960MHz-1GHz		54.00		Quasi-peak Value
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Limit: (band edge)	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.				
Test setup:	Below 1GHz				
					
	Above 1GHz				

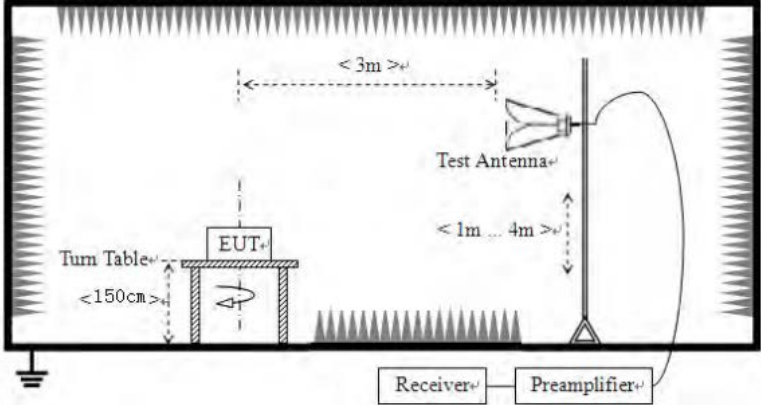	
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

7.3.1 Field Strength of The Fundamental Signal

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2405.00	89.81	27.58	5.39	34.01	88.77	114.00	-25.23	Vertical
2405.00	84.90	27.58	5.39	34.01	83.86	114.00	-30.14	Horizontal
2440.00	90.14	27.48	5.43	33.96	89.09	114.00	-24.91	Vertical
2440.00	84.26	27.48	5.43	33.96	83.21	114.00	-30.79	Horizontal
2475.00	89.21	27.52	5.47	33.92	88.28	114.00	-25.72	Vertical
2475.00	83.57	27.52	5.47	33.92	82.64	114.00	-31.36	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2405.00	80.20	27.58	5.39	34.01	79.16	94.00	-14.84	Vertical
2405.00	75.21	27.58	5.39	34.01	74.17	94.00	-19.83	Horizontal
2440.00	80.14	27.48	5.43	33.96	79.09	94.00	-14.91	Vertical
2440.00	73.65	27.48	5.43	33.96	72.60	94.00	-21.40	Horizontal
2475.00	79.39	27.52	5.47	33.92	78.46	94.00	-15.54	Vertical
2475.00	73.80	27.52	5.47	33.92	72.87	94.00	-21.13	Horizontal

NOTE:RBW 3MHz VBW 3MHz Peak detector is for PK value , RMS detector is for AV value

7.3.2 Spurious emissions

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
38.62	43.95	15.25	0.65	30.05	29.80	40.00	-10.20	Vertical
62.43	41.06	13.77	0.88	29.90	25.81	40.00	-14.19	Vertical
163.18	49.17	10.77	1.65	29.34	32.25	43.50	-11.25	Vertical
218.31	39.93	13.13	1.95	29.38	25.63	46.00	-20.37	Vertical
327.89	44.30	15.66	2.51	29.84	32.63	46.00	-13.37	Vertical
798.98	36.47	22.06	4.45	29.20	33.78	46.00	-12.22	Vertical
41.13	38.53	15.57	0.67	30.04	24.73	40.00	-15.27	Horizontal
62.43	41.40	13.77	0.88	29.90	26.15	40.00	-13.85	Horizontal
162.04	53.12	10.72	1.64	29.35	36.13	43.50	-7.37	Horizontal
218.31	43.18	13.13	1.95	29.38	28.88	46.00	-17.12	Horizontal
327.89	37.50	15.66	2.51	29.84	25.83	46.00	-20.17	Horizontal
410.38	34.21	17.26	2.91	29.48	24.90	46.00	-21.10	Horizontal

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	37.32	31.78	8.60	32.09	45.61	74.00	-28.39	Vertical
7215.00	31.84	36.15	11.66	31.99	47.66	74.00	-26.34	Vertical
9620.00	31.48	38.01	14.14	31.60	52.03	74.00	-21.97	Vertical
12025.00	*					74.00		Vertical
14430.00	*					74.00		Vertical
4810.00	41.60	31.78	8.60	32.09	49.89	74.00	-24.11	Horizontal
7215.00	33.59	36.15	11.66	31.99	49.41	74.00	-24.59	Horizontal
9620.00	30.90	38.01	14.14	31.60	51.45	74.00	-22.55	Horizontal
12025.00	*					74.00		Horizontal
14430.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	26.13	31.78	8.60	32.09	34.42	54.00	-19.58	Vertical
7215.00	20.52	36.15	11.66	31.99	36.34	54.00	-17.66	Vertical
9620.00	19.60	38.01	14.14	31.60	40.15	54.00	-13.85	Vertical
12025.00	*					54.00		Vertical
14430.00	*					54.00		Vertical
4810.00	30.36	31.78	8.60	32.09	38.65	54.00	-15.35	Horizontal
7215.00	22.70	36.15	11.66	31.99	38.52	54.00	-15.48	Horizontal
9620.00	19.33	38.01	14.14	31.60	39.88	54.00	-14.12	Horizontal
12025.00	*					54.00		Horizontal
14430.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	37.04	31.85	8.67	32.12	45.44	74.00	-28.56	Vertical
7320.00	31.65	36.37	11.72	31.89	47.85	74.00	-26.15	Vertical
9760.00	31.31	38.35	14.25	31.62	52.29	74.00	-21.71	Vertical
12200.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4880.00	41.27	31.85	8.67	32.12	49.67	74.00	-24.33	Horizontal
7320.00	33.38	36.37	11.72	31.89	49.58	74.00	-24.42	Horizontal
9760.00	30.71	38.35	14.25	31.62	51.69	74.00	-22.31	Horizontal
12200.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880.00	25.91	31.85	8.67	32.12	34.31	54.00	-19.69	Vertical
7320.00	20.38	36.37	11.72	31.89	36.58	54.00	-17.42	Vertical
9760.00	19.47	38.35	14.25	31.62	40.45	54.00	-13.55	Vertical
12200.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4880.00	30.11	31.85	8.67	32.12	38.51	54.00	-15.49	Horizontal
7320.00	22.53	36.37	11.72	31.89	38.73	54.00	-15.27	Horizontal
9760.00	19.18	38.35	14.25	31.62	40.16	54.00	-13.84	Horizontal
12200.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”*, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4950.00	35.84	31.93	8.73	32.16	44.34	74.00	-29.66	Vertical
7425.00	30.86	36.59	11.79	31.78	47.46	74.00	-26.54	Vertical
9900.00	30.60	38.81	14.38	31.88	51.91	74.00	-22.09	Vertical
12375.00	*					74.00		Vertical
14850.00	*					74.00		Vertical
4950.00	39.83	31.93	8.73	32.16	48.33	74.00	-25.67	Horizontal
7425.00	32.49	36.59	11.79	31.78	49.09	74.00	-24.91	Horizontal
9900.00	29.89	38.81	14.38	31.88	51.20	74.00	-22.80	Horizontal
12375.00	*					74.00		Horizontal
14850.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4950.00	24.97	31.93	8.73	32.16	33.47	54.00	-20.53	Vertical
7425.00	19.74	36.59	11.79	31.78	36.34	54.00	-17.66	Vertical
9900.00	18.90	38.81	14.38	31.88	40.21	54.00	-13.79	Vertical
12375.00	*					54.00		Vertical
14850.00	*					54.00		Vertical
4950.00	29.05	31.93	8.73	32.16	37.55	54.00	-16.45	Horizontal
7425.00	21.82	36.59	11.79	31.78	38.42	54.00	-15.58	Horizontal
9900.00	18.52	38.81	14.38	31.88	39.83	54.00	-14.17	Horizontal
12375.00	*					54.00		Horizontal
14850.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.3.3 Bandedge emissions

All of the restriction bands were tested, and only the data of worst case was exhibited.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.87	27.59	5.38	30.18	40.66	74.00	-33.34	Horizontal
2400.00	53.94	27.58	5.39	30.18	56.73	74.00	-17.27	Horizontal
2390.00	37.94	27.59	5.38	30.18	40.73	74.00	-33.27	Vertical
2400.00	55.44	27.58	5.39	30.18	58.23	74.00	-15.77	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	29.55	27.59	5.38	30.18	32.34	54.00	-21.66	Horizontal
2400.00	40.49	27.58	5.39	30.18	43.28	54.00	-10.72	Horizontal
2390.00	29.14	27.59	5.38	30.18	31.93	54.00	-22.07	Vertical
2400.00	41.66	27.58	5.39	30.18	44.45	54.00	-9.55	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	39.37	27.53	5.47	29.93	42.44	74.00	-31.56	Horizontal
2500.00	39.50	27.55	5.49	29.93	42.61	74.00	-31.39	Horizontal
2483.50	39.38	27.53	5.47	29.93	42.45	74.00	-31.55	Vertical
2500.00	40.02	27.55	5.49	29.93	43.13	74.00	-30.87	Vertical


Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	32.32	27.53	5.47	29.93	35.39	54.00	-18.61	Horizontal
2500.00	31.04	27.55	5.49	29.93	34.15	54.00	-19.85	Horizontal
2483.50	33.11	27.53	5.47	29.93	36.18	54.00	-17.82	Vertical
2500.00	30.54	27.55	5.49	29.93	33.65	54.00	-20.35	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

7.4 20dB Occupy Bandwidth

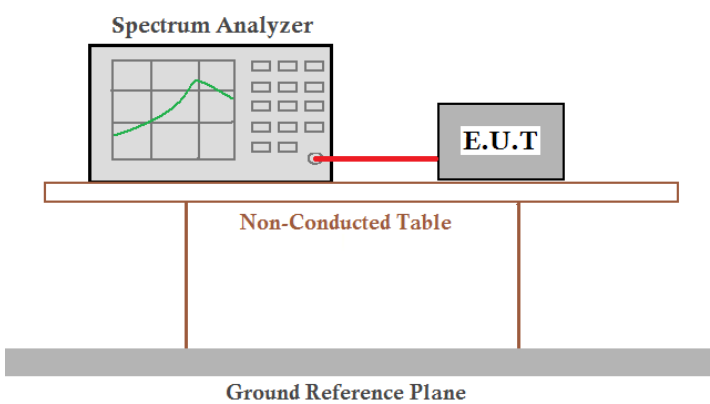Test Requirement:	FCC Part15 C Section 15.249/15.215
Test Method:	ANSI C63.10:2013
Limit:	Operation Frequency range 2400MHz~2483.5MHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	20dB bandwidth(MHz)	Result
Lowest	2.053	Pass
Middle	2.088	Pass
Highest	2.072	Pass


Test plot as follows:



Lowest channel

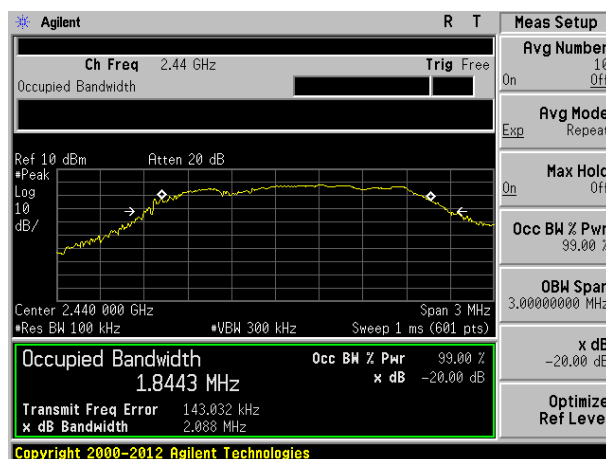

Middle channel

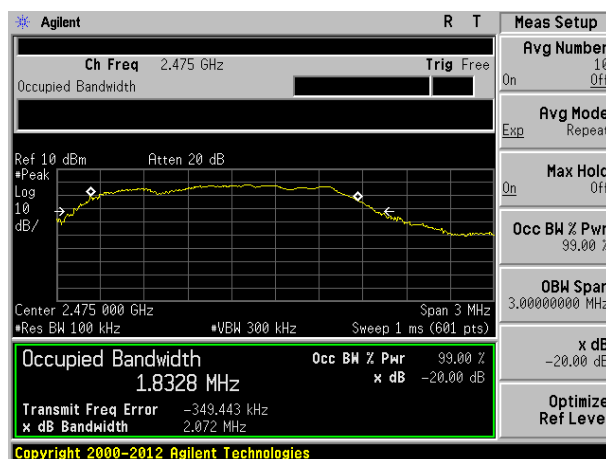

Highest channel

8 Test Setup Photo


Radiated Emission




Conducted Emission



9 EUT Constructional Details

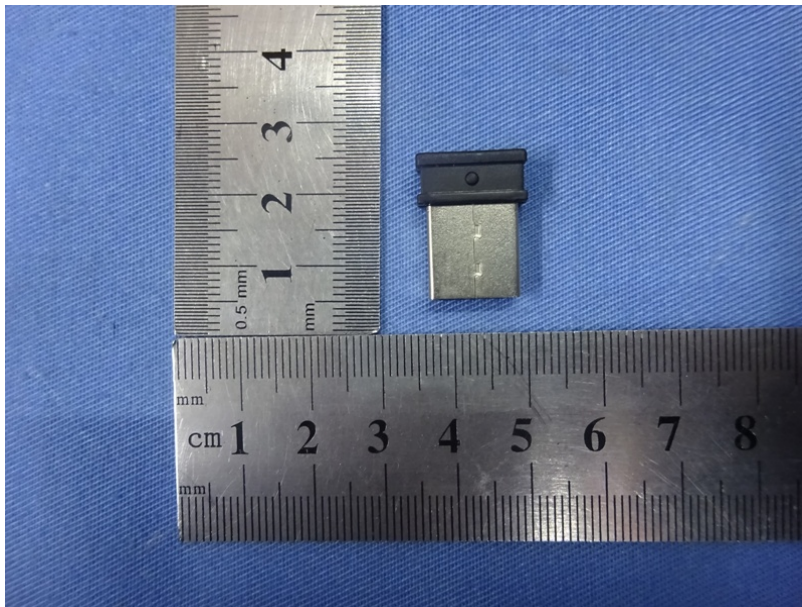

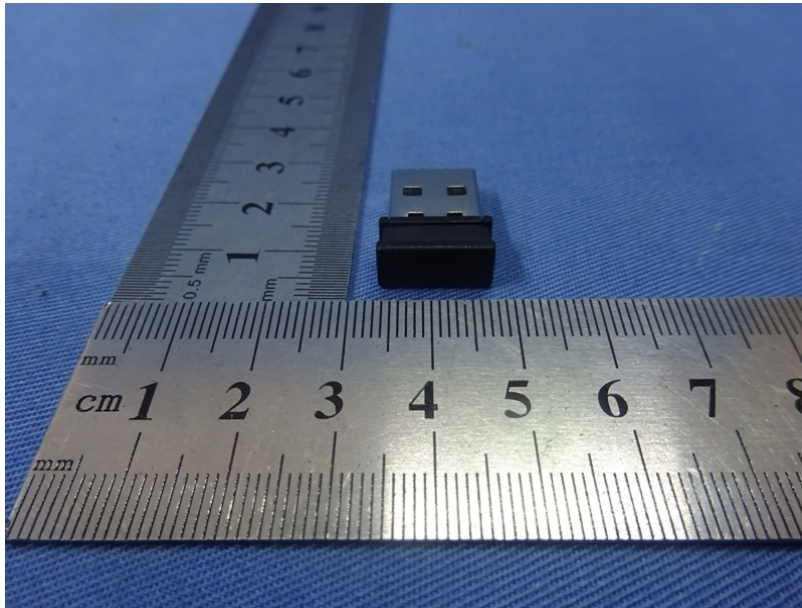



----- End -----