TCT 通测检测
TESTING CENTRE TECHNOLOGY

TEST REPORT

FCC ID: 2AKO9SF66

Product: FM Transmitter

Model No.: SF66

Additional Model No.: SF55, SF500BT, SF600BT, SF700BT, SF800BT, SF900BT, SF1000BT

Trade Mark: N/A

Report No.: TCT161202E007

Issued Date: Dec. 15, 2016

Issued for:

LEED IMPORTS, INC

140 SOUTH ANDERSON STREET LOS ANGELES, CA, 90033 U.S.A.

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: *This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab. This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.*

TABLE OF CONTENTS

1. Test Certification 3
2. Test Result Summary 4
3. EUT Description 5
4. Genera Information 6
4.1. Test Environment and Mode 6
4.2. Description of Support Units 6
5. Facilities and Accreditations 7
5.1. Facilities 7
5.2. Location 7
5.3. Measurement Uncertainty 7
6. Test Results and Measurement Data 8
6.1. Antenna Requirement 8
6.2. Conducted Emission 9
6.3. Radiated Emission Measurement 10
6.4. Occupied Bandwidth 15
Appendix A: Photographs of Test Setup
Appendix B: Photographs of EUT

1. Test Certification

Product:	FM Transmitter
Model No.:	SF66
Additional Model No.:	SF55, SF500BT, SF600BT, SF700BT, SF800BT, SF900BT, SF1000BT
Applicant:	LEED IMPORTS, INC
Address:	140 SOUTH ANDERSON STREET LOS ANGELES, CA, 90033 U.S.A.
Manufacturer:	SAGE HUMAN ELECTRONICS INTERNATIONAL CO., LTD.
Address:	4F., A Building, Rongli Industrial Park, No.2 Guiyuan Rd., Guihua Community, Guanlan Town, Longhua New Dist., Shenzhen, China
Date of Test:	Dec. 03 – Dec. 13, 2016
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.239

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:	Jin Wang	***Date:***	***Dec. 14, 2016***
	Jin Wang		
Reviewed By:	Joe Zhou	***Date:***	***Dec. 15, 2016***
	Joe Zhou		
Approved By:	Tomsin	***Date:***	***Dec. 15, 2016***
	Tomsin		

2. Test Result Summary

Requirement	CFR 47 Section IC Paragraph	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	N/A
Field strength of the fundamental signal	§15.239 (b)	PASS
Spurious emissions	§15.239 (b) (c)/ §15.209	PASS
Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. PASS: Test item meets the requirement.

2. Fail: Test item does not meet the requirement.

3. N/A: Test case does not apply to the test object.

4. The test result judgment is decided by the limit of test standard.

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com

3. EUT Description

Product Name:	FM Transmitter
Model :	SF66
Additional Model:	SF55, SF500BT, SF600BT, SF700BT, SF800BT, SF900BT, SF1000BT
Trade Mark:	**N/A**
Operation Frequency:	88.1MHz – 107.9MHz
Channel Separation:	100 kHz
Number of Channel:	199CH(See NOTE 2)
Modulation Technology:	FM
Antenna Type:	PCB Antenna
Antenna Gain:	2.0dBi
Power Supply:	DC 12-24V
Remark:	All models above are identical in interior structure, electrical circuits and components, and just model names are different for the marketing requirement.

Operation Frequency Each of Channel

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	88.1 MHz	99	97.9 MHz	197	107.7 MHz
2	88.2 MHz	100	98.0 MHz	198	107.8 MHz
3	88.3 MHz	101	98.1 MHz	199	107.9 MHz
--	--	--	--		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	88.1 MHz
The middle channel	98.0 MHz
The Highest channel	107.9 MHz

Hotline: 400-6611-140 Tel: 86-755-27673339 Fax: 86-755-27673332 http://www.tct-lab.com

4. Genera Information

4.1. Test Environment and Mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID/DOC	Trade Name
U Disk	v145w	/	DOC	*hp*
Maintenance Free Battery	95D31R	/	/	REMARKABLE

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331
  Shenzhen Tongce Testing Lab
  The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.
- IC - Registration No.: 10668A-1
  The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing
- CNAS - Registration No.: CNAS L6165
  Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen TCT Testing Technology Co., Ltd.
Address: 1F, Building 1, Yibaolai Industrial Par Qiaotou Village, Fuyong Town Shenzhen, China

5.3. Measurement Uncertainty

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	±2.56dB
2	RF power, conducted	±0.12dB
3	Spurious emissions, conducted	±0.11dB
4	All emissions, radiated(<1G)	±3.92dB
5	All emissions, radiated(>1G)	±4.28dB
6	Temperature	±0.1°C
7	Humidity	±1.0%

6. Test Results and Measurement Data

6.1. Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna:	
The FM antenna is a PCB antenna which permanently attached, and the best case gain of the antenna is 2.0dBi.	

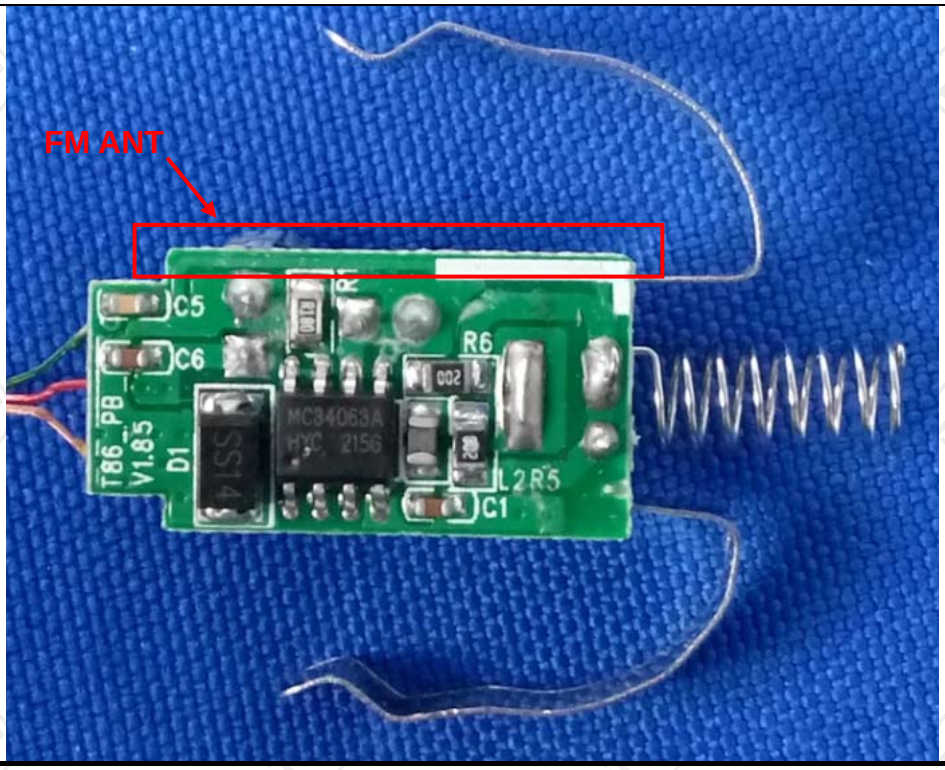

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Frequency Range:	150 kHz to 30 MHz
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto
Limits:	Frequency range (MHz) / Limit (dBuV): Quasi-peak / Average 0.15-0.5: 66 to 56* / 56 to 46* 0.5-5: 56 / 46 5-30: 60 / 50
Test Setup:	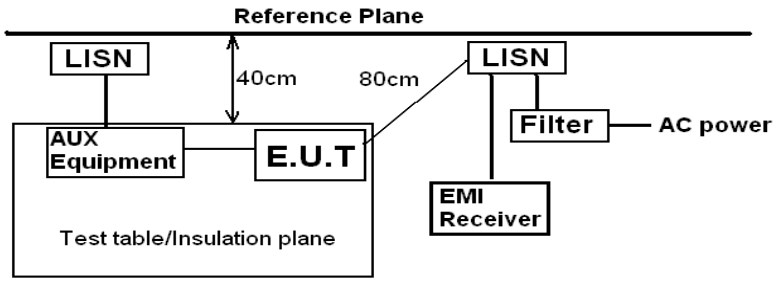 *Remark:* *E.U.T: Equipment Under Test* *LISN: Line Impedence Stabilization Network* *Test table height=0.8m*
Test Mode:	Refer to section 4.1 for details
Test Procedure:	1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
Test Result:	The EUT is powered by car's power DC 12V, So not applicable.

6.3. Radiated Emission Measurement

6.3.1. Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.209</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10: 2013</td></tr>
<tr><td>Frequency Range:</td><td>9 kHz to 1 GHz</td></tr>
<tr><td>Measurement Distance:</td><td>3 m</td></tr>
<tr><td>Antenna Polarization:</td><td>Horizontal & Vertical</td></tr>
<tr><td>Receiver Setup:</td><td><table>
<tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr>
<tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>150kHz-30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr>
</table></td></tr>
<tr><td>Limit(Field strength of the fundamental signal):</td><td><table>
<tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr>
<tr><td rowspan="2">88-108MHz</td><td>48</td><td>Average Value</td></tr>
<tr><td>68</td><td>Peak Value</td></tr>
</table>Note: Fcc part15.239 (b) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.</td></tr>
<tr><td>Limit(Spurious Emissions):</td><td><table>
<tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr>
<tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr>
<tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr>
<tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr>
<tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr>
</table></td></tr>
<tr><td>Limit (band edge) :</td><td>Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.</td></tr>
<tr><td>Test Procedure:</td><td>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber in below 1GHz, 1.5m above the ground in above 1GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and</td></tr>
</table>

	vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test setup:	For radiated emissions below 30MHz 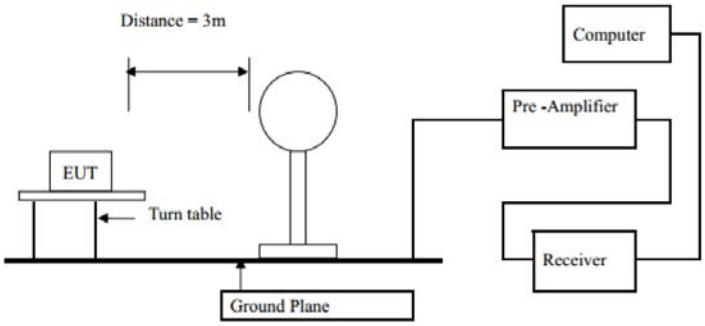 30MHz to 1GHz 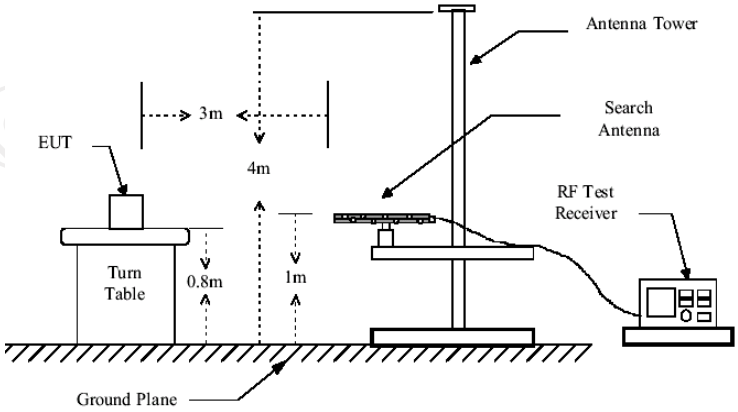
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

6.3.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
ESPI Test Receiver	ROHDE&SCHWARZ	ESVD	100008	Aug. 11, 2017
Spectrum Analyzer	ROHDE&SCHWARZ	FSEM	848597/001	Aug. 11, 2017
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Aug. 11, 2017
Pre-amplifier	HP	8447D	2727A05017	Aug. 11, 2017
Loop antenna	ZHINAN	ZN30900A	12024	Aug. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	340	Aug. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Aug. 13, 2017
Coax cable (9kHz-40GHz)	TCT	N/A	N/A	Aug. 12, 2017
Coax cable (9kHz-40GHz)	TCT	N/A	N/A	Aug. 12, 2017
Coax cable (9kHz-40GHz)	TCT	N/A	N/A	Aug. 12, 2017
Coax cable (9kHz-40GHz)	TCT	N/A	N/A	Aug. 12, 2017
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.3.3. Test Data

Field Strength of Fundamental

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
88.1	22.59(AV)	H	48	-25.41
88.1	27.31(PK)	H	68	-40.69
88.1	32.68(AV)	V	48	-15.32
88.1	37.73(PK)	V	68	-30.27

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
98.0	27.30(AV)	H	48	-20.70
98.0	30.56(PK)	H	68	-37.44
98.0	33.20(AV)	V	48	-14.80
98.0	36.66(PK)	V	68	-31.34

Frequency (MHz)	Emission PK/AV (dBuV/m)	Horizontal /Vertical	Limits PK/AV (dBuV/m)	Margin (dB)
107.9	32.56(AV)	H	48	-15.44
107.9	35.66(PK)	H	68	-32.34
107.9	33.56(AV)	V	48	-14.44
107.9	39.67(PK)	V	68	-28.33

Spurious Emissions

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: *1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor*

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Frequency Range (30MHz-1GHz)

88.1 MHz

Frequency (MHz)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Detector	Direction(H/V)
121.25	35.07	43.5	QP	H
358.64	40.26	46.00	QP	H
482.21	42.74	46.00	QP	H
46.84	34.96	40.00	QP	V
420.45	40.78	46.00	QP	V
452.76	42.24	46.00	QP	V

98.0 MHz

Frequency (MHz)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Detector	Direction(H/V)
121.95	32.41	43.5	QP	H
362.36	35.59	46.00	QP	H
480.74	40.78	46.00	QP	H
49.47	30.47	40.00	QP	V
422.53	38.01	46.00	QP	V
452.41	41.33	46.00	QP	V

107.9 MHz

Frequency (MHz)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Detector	Direction(H/V)
120.61	33.53	43.5	QP	H
360.98	39.62	46.00	QP	H
481.51	44.60	46.00	QP	H
48.04	34.96	40.00	QP	V
421.33	38.24	46.00	QP	V
452.01	42.78	46.00	QP	V

Note *: 1) QP= Quasi-peak*
2) Emission Level = Reading Level + Antenna Factor + Cable Loss.

6.4. Occupied Bandwidth

6.4.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	200kHz
Test Procedure:	1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW⩾1% of the 20 dB bandwidth; VBW⩾RBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	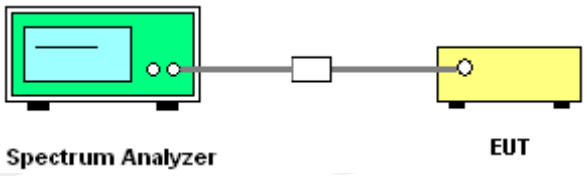
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

6.4.2. Test Instruments

RF Test Room				
Equipment	**Manufacturer**	**Model**	**Serial Number**	**Calibration Due**
Spectrum Analyzer	R&S	FSU	200054	Aug. 11, 2017

Note: *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

6.4.3. Test data

Test Channel	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
Lowest	42.31	200	PASS
Middle	42.63	200	PASS
Highest	42.47	200	PASS

Test plots as follows:

Lowest channel

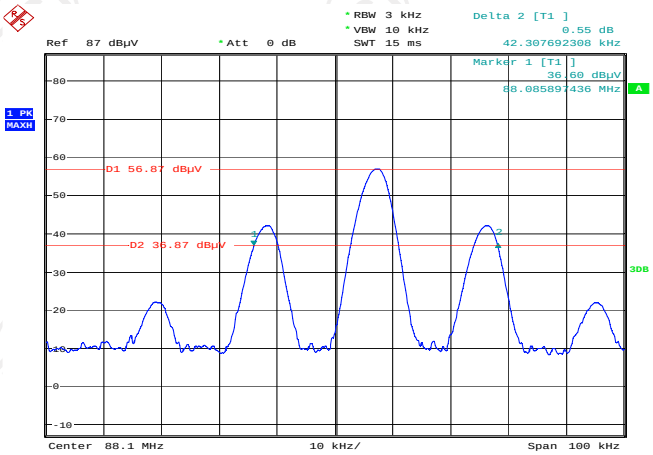

Date: 9.DEC.2016 17:06:01

Middle channel

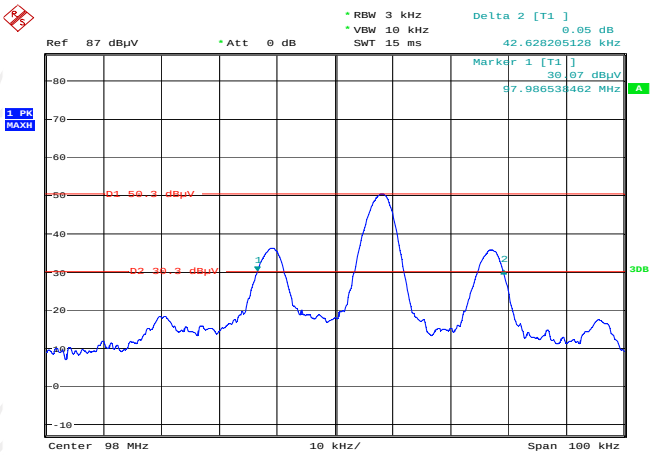

Date: 9.DEC.2016 17:28:46

Highest channel

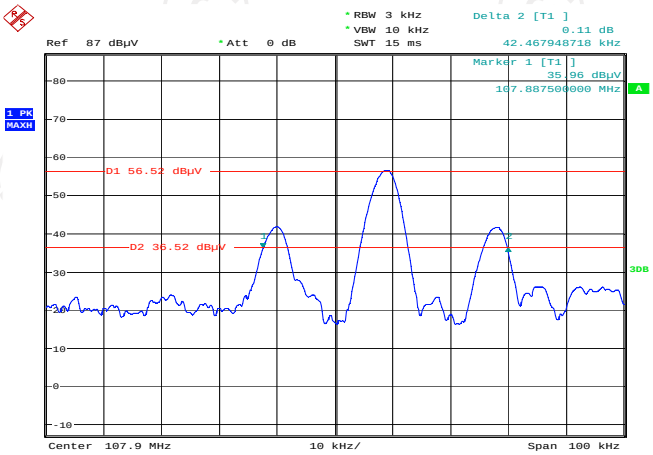

Date: 9.DEC.2016 16:59:02

Appendix A: Photographs of Test Setup

Product: FM Transmitter
Model: SF66
Radiated Emission

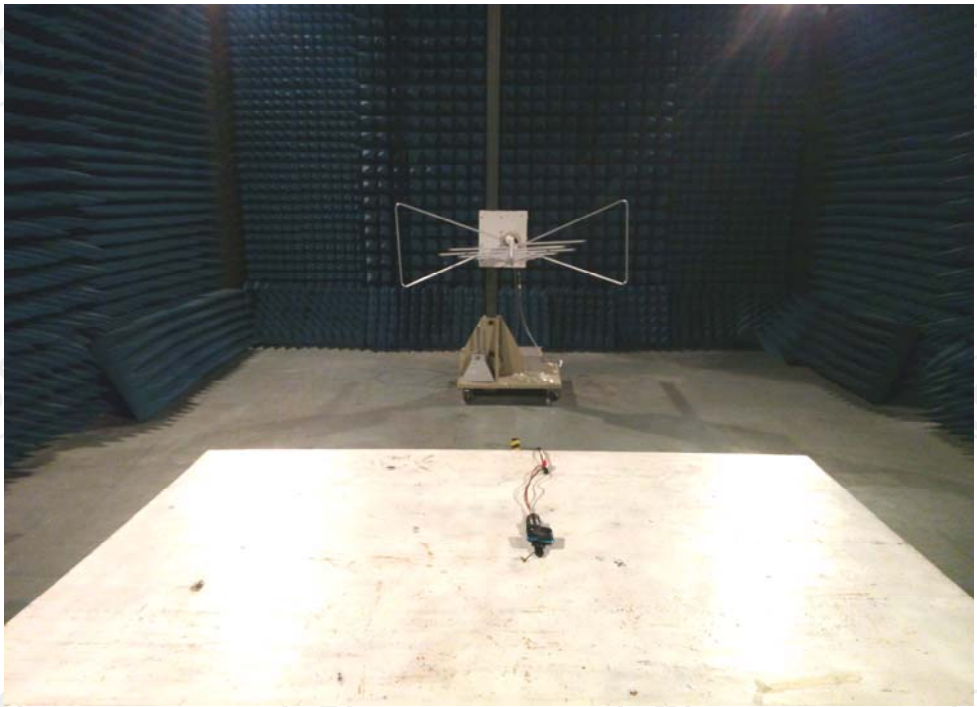

Appendix B: Photographs of EUT
Product: FM Transmitter
Model: SF66
External Photos

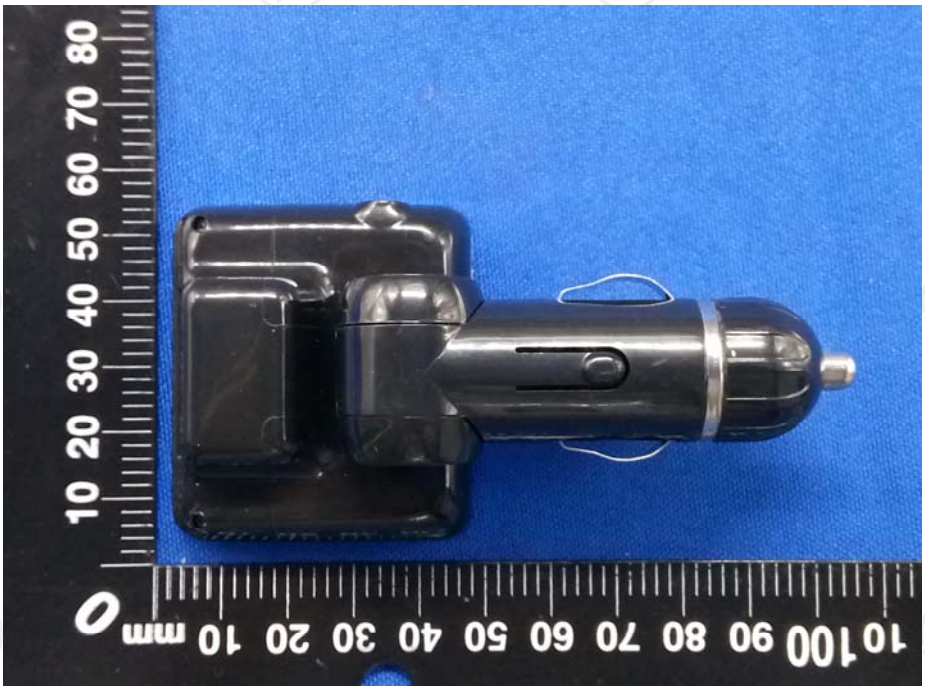

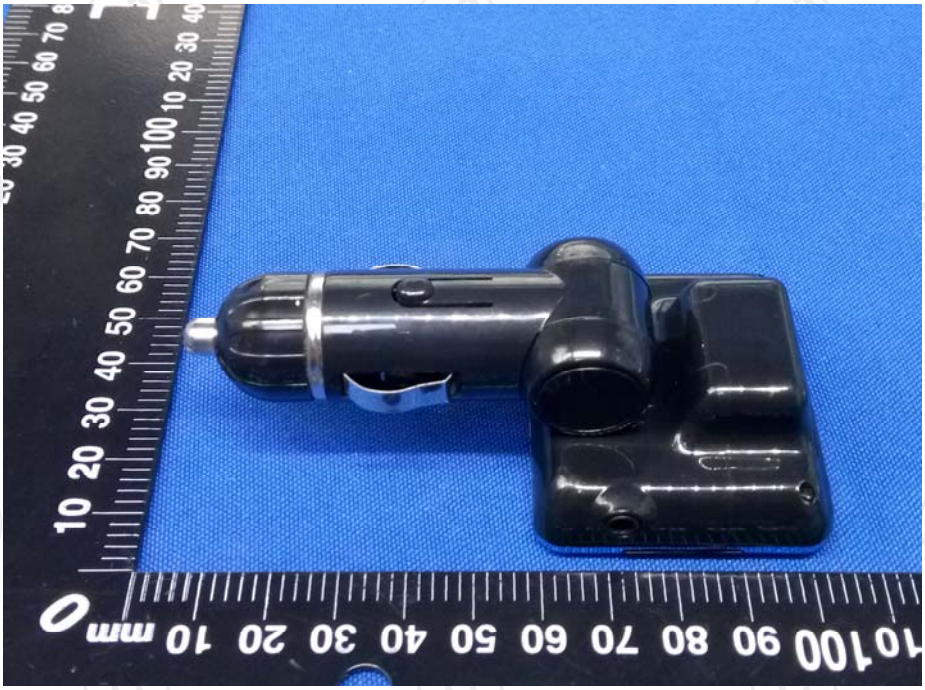

Product: FM Transmitter
Model: SF66
Internal Photos

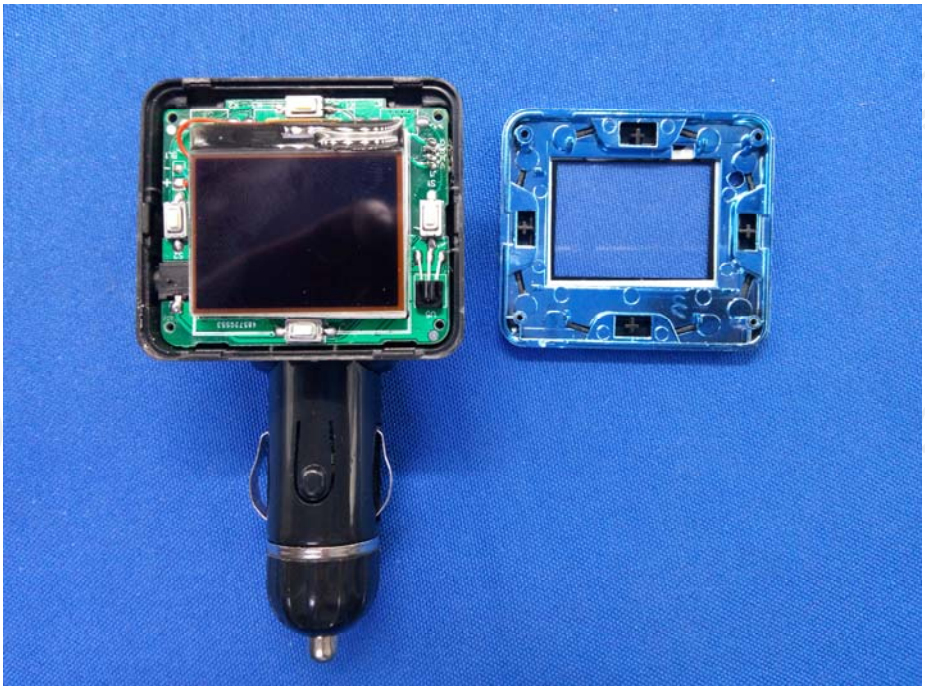

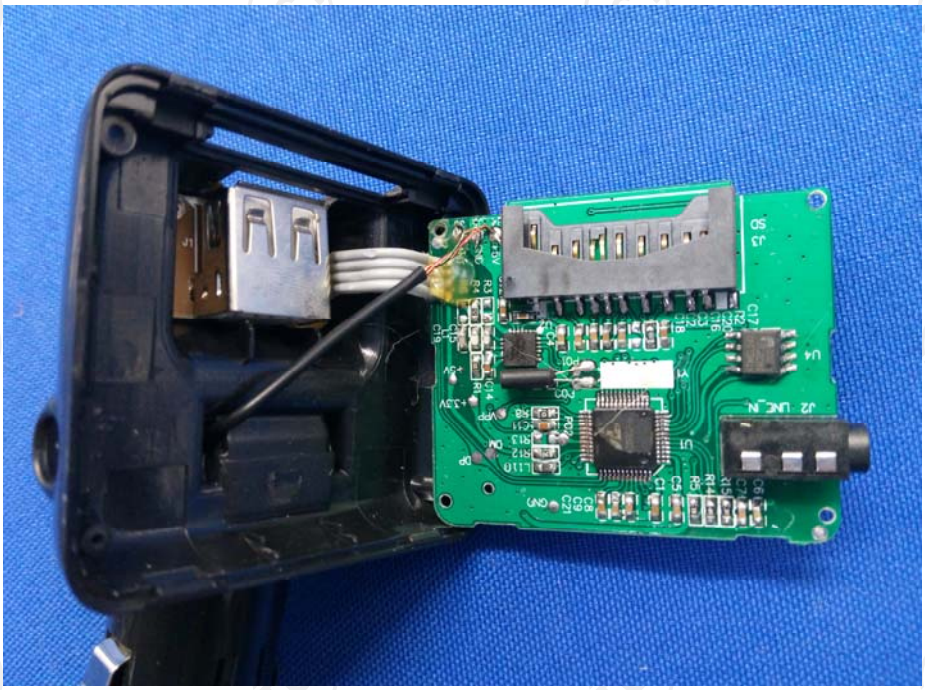

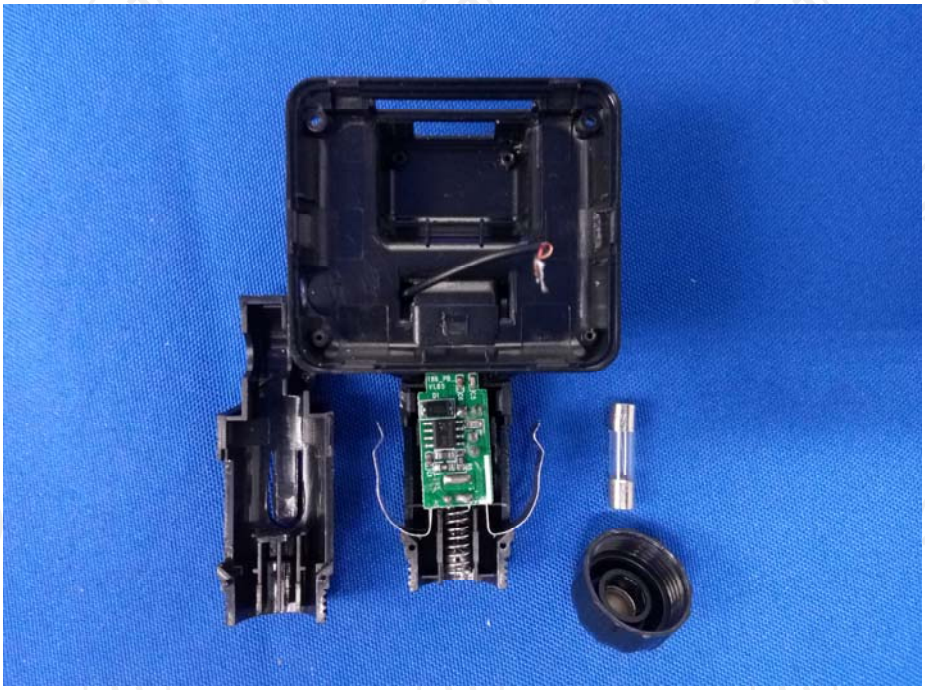

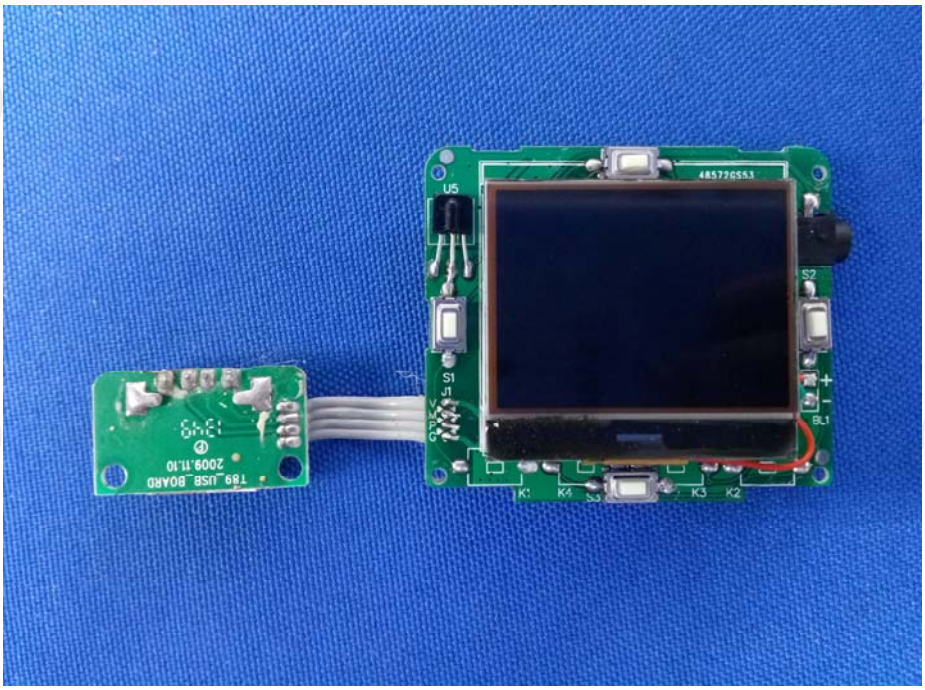
U5
S2
S1
BL1
K1
K4
K3
K2
T89_USB_BOARD
2009.11.10

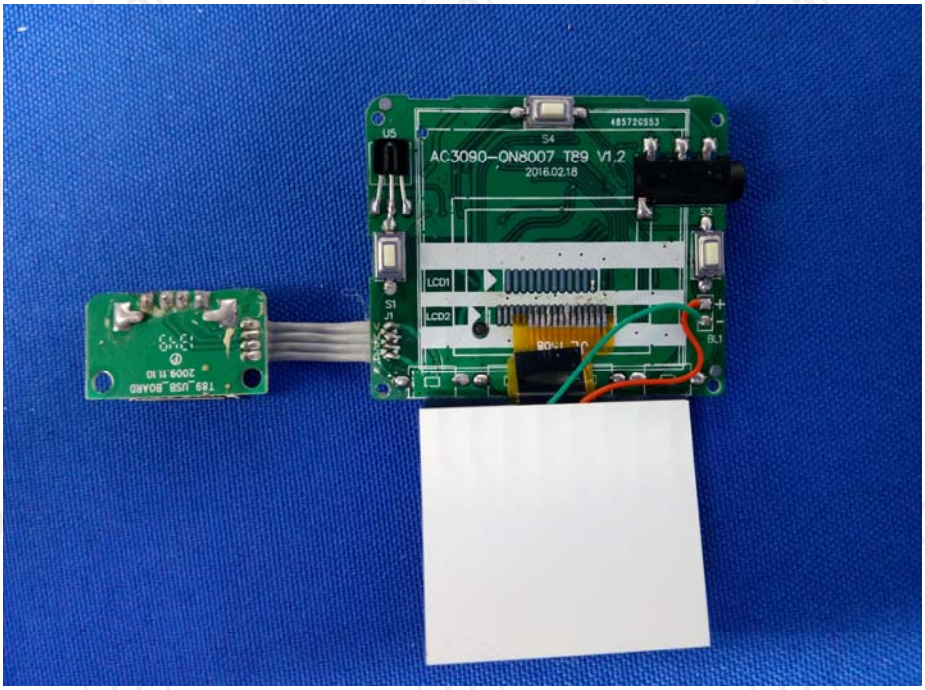
AC3090-QN8007 T89 V1.2
2016.02.18
LCD1
LCD2

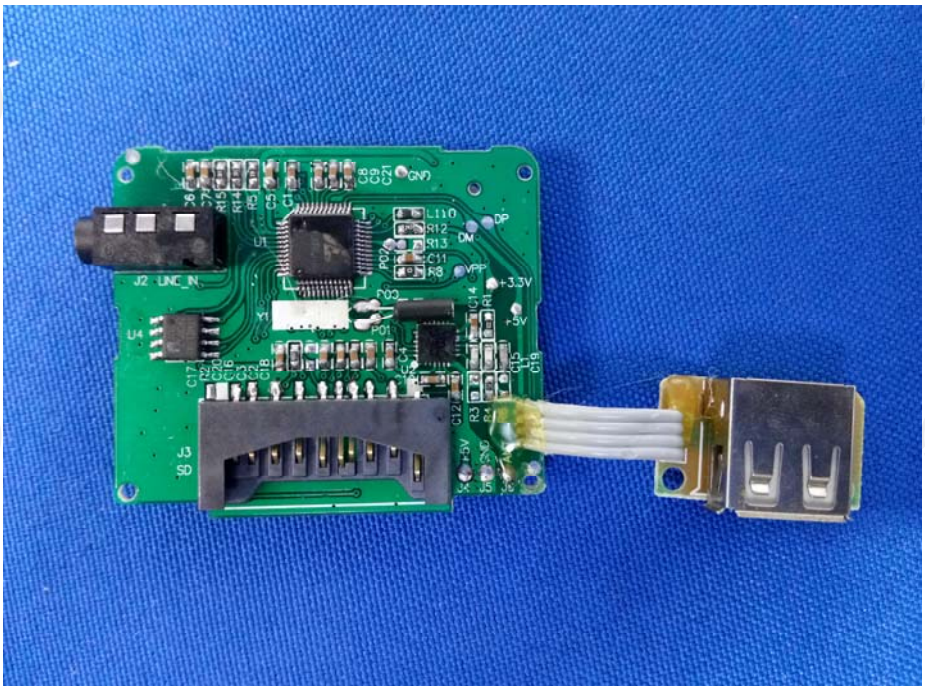
J2 UNC_IN
J3
SD

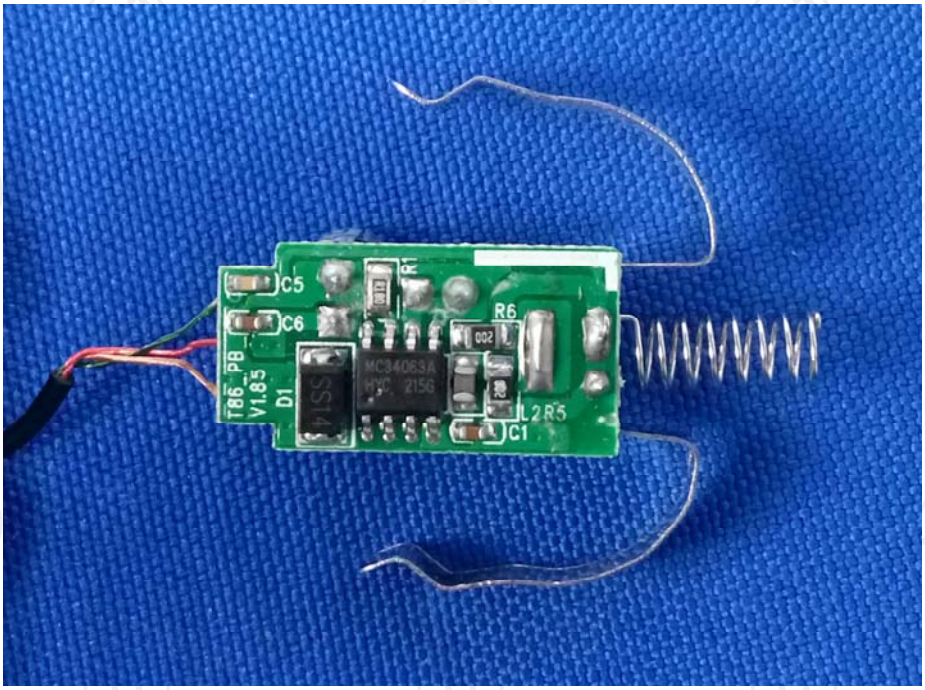

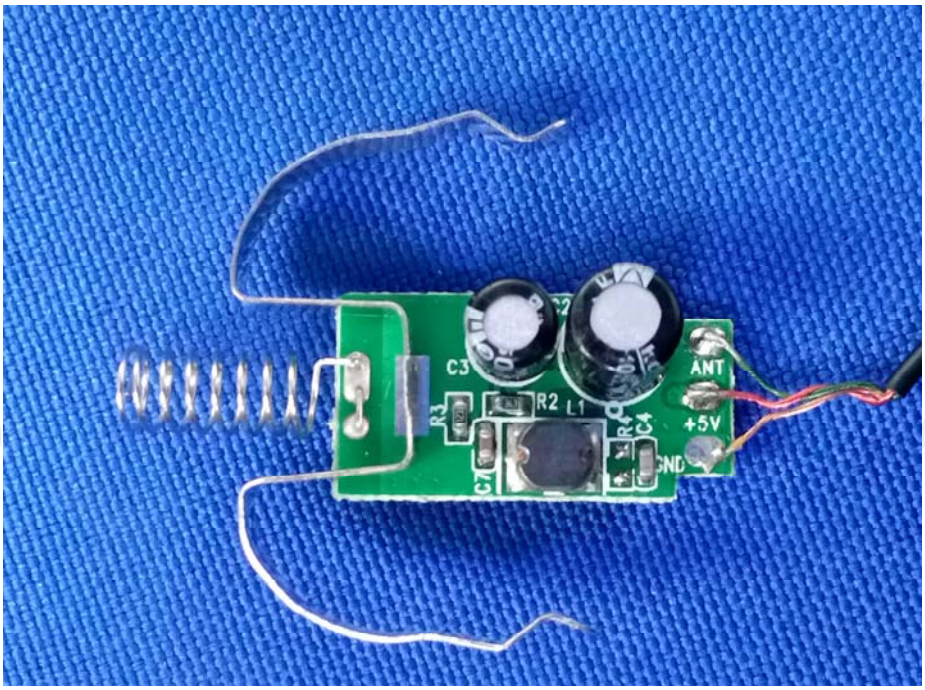

********END OF REPORT********