



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,  
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM161201140605  
Page: 1 of 91

## TEST REPORT

**Application No.:** SZEM1612011406CR  
**Applicant:** Zhejiang Fousine Science & Technology Co., Ltd.  
**Address of Applicant:** 198 ChangYuan Rd, Yuyao, Zhejiang Prvn., China  
**Manufacturer:** Zhejiang Fousine Science & Technology Co., Ltd.  
**Address of Manufacturer:** 198 ChangYuan Rd, Yuyao, Zhejiang Prvn., China  
**Factory:** Zhejiang Fousine Science & Technology Co., Ltd.  
**Address of Factory:** 198 ChangYuan Rd, Yuyao, Zhejiang Prvn., China  
**Equipment Under Test (EUT):**  
**EUT Name:** BLUETOOTH HEADPHONE  
**Model No.:** BWA17AV003-1  
**Trade Mark:** Blackweb  
**FCC ID:** 2AKP3-BWA17AV003-1  
**Standards:** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2017-01-04  
**Date of Test:** 2017-01-10 to 2017-01-21  
**Date of Issue:** 2017-02-23

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <b>Pass*</b> |
|----------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above. This report supersedes our previous report SZEM161201140602, issued on 2017-01-25, which is hereby deemed null and void



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605  
Page: 2 of 91

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2017-02-23 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |                                                                                     |  |            |
|--------------------------|-------------------------------------------------------------------------------------|--|------------|
| Authorized for issue by: |                                                                                     |  |            |
| Tested By                |    |  | 2017-01-21 |
|                          | Peter Geng /Project Engineer                                                        |  | Date       |
| Checked By               |  |  | 2017-02-23 |
|                          | Eric Fu /Reviewer                                                                   |  | Date       |



## 2 Test Summary

| Radio Spectrum Technical Requirement                                                     |                                  |        |                                                |        |
|------------------------------------------------------------------------------------------|----------------------------------|--------|------------------------------------------------|--------|
| Item                                                                                     | Standard                         | Method | Requirement                                    | Result |
| Antenna Requirement                                                                      | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.203 & 15.247(c)   | Pass   |
| Other requirements<br>Frequency Hopping<br>Spread Spectrum<br>System Hopping<br>Sequence | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h) | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                        |                                           |        |
|-------------------------------------------------------|----------------------------------|----------------------------------------|-------------------------------------------|--------|
| Item                                                  | Standard                         | Method                                 | Requirement                               | Result |
| Conducted Disturbance at AC Power Line (150kHz-30MHz) | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2         | 47 CFR Part 15, Subpart C 15.207          | Pass   |
| 20dB Bandwidth                                        | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.7       | 47 CFR Part 15, Subpart C 15.247(a)(1)    | Pass   |
| Conducted Peak Output Power                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.5       | 47 CFR Part 15, Subpart C 15.247(b)(1)    | Pass   |
| Carrier Frequencies Separation                        | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.2       | 47 CFR Part 15, Subpart C 15.247a(1)      | Pass   |
| Hopping Channel Number                                | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.3       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Dwell Time                                            | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.4       | 47 CFR Part 15, Subpart C 15.247a(1)(iii) | Pass   |
| Conducted Spurious Emissions                          | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.8       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Radiated Spurious Emissions                           | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.4,6.5,6.6 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Emissions which fall in the restricted bands | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.10.5      | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Conducted Band Edges Measurement                      | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 7.8.6       | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |



### 3 Contents

|                                                                                        | Page      |
|----------------------------------------------------------------------------------------|-----------|
| <b>1 COVER PAGE .....</b>                                                              | <b>1</b>  |
| <b>2 TEST SUMMARY .....</b>                                                            | <b>3</b>  |
| <b>3 CONTENTS .....</b>                                                                | <b>4</b>  |
| <b>4 GENERAL INFORMATION .....</b>                                                     | <b>6</b>  |
| 4.1 DETAILS OF E.U.T. ....                                                             | 6         |
| 4.2 DESCRIPTION OF SUPPORT UNITS .....                                                 | 6         |
| 4.3 MEASUREMENT UNCERTAINTY .....                                                      | 7         |
| 4.4 STANDARDS APPLICABLE FOR TESTING.....                                              | 8         |
| 4.5 TEST LOCATION.....                                                                 | 9         |
| 4.6 TEST FACILITY .....                                                                | 9         |
| 4.7 DEVIATION FROM STANDARDS .....                                                     | 9         |
| 4.8 ABNORMALITIES FROM STANDARD CONDITIONS.....                                        | 9         |
| <b>5 EQUIPMENT LIST.....</b>                                                           | <b>10</b> |
| <b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....</b>                                    | <b>11</b> |
| 6.1 ANTENNA REQUIREMENT .....                                                          | 11        |
| 6.1.1 Test Requirement:.....                                                           | 11        |
| 6.1.2 Conclusion.....                                                                  | 11        |
| 6.2 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM HOPPING SEQUENCE ..... | 12        |
| 6.2.1 Test Requirement:.....                                                           | 12        |
| 6.2.2 Conclusion.....                                                                  | 12        |
| <b>7 RADIO SPECTRUM MATTER TEST RESULTS .....</b>                                      | <b>14</b> |
| 7.1 CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz) .....                         | 14        |
| 7.1.1 E.U.T. Operation.....                                                            | 14        |
| 7.1.2 Test Setup Diagram .....                                                         | 14        |
| 7.1.3 Measurement Data.....                                                            | 15        |
| 7.2 20dB BANDWIDTH .....                                                               | 18        |
| 7.2.1 E.U.T. Operation.....                                                            | 18        |
| 7.2.2 Test Setup Diagram .....                                                         | 18        |
| 7.2.3 Measurement Data.....                                                            | 18        |
| 7.3 CONDUCTED PEAK OUTPUT POWER .....                                                  | 19        |
| 7.3.1 E.U.T. Operation.....                                                            | 20        |
| 7.3.2 Test Setup Diagram .....                                                         | 20        |
| 7.3.3 Measurement Data.....                                                            | 20        |
| 7.4 CARRIER FREQUENCIES SEPARATION .....                                               | 21        |
| 7.4.1 E.U.T. Operation.....                                                            | 21        |
| 7.4.2 Test Setup Diagram .....                                                         | 21        |
| 7.4.3 Measurement Data.....                                                            | 21        |
| 7.5 HOPPING CHANNEL NUMBER .....                                                       | 22        |
| 7.5.1 E.U.T. Operation.....                                                            | 23        |
| 7.5.2 Test Setup Diagram .....                                                         | 23        |
| 7.5.3 Measurement Data.....                                                            | 23        |
| 7.6 DWELL TIME.....                                                                    | 24        |
| 7.6.1 E.U.T. Operation.....                                                            | 24        |
| 7.6.2 Test Setup Diagram .....                                                         | 24        |
| 7.6.3 Measurement Data.....                                                            | 24        |
| 7.7 CONDUCTED SPURIOUS EMISSIONS.....                                                  | 25        |
| 7.7.1 E.U.T. Operation.....                                                            | 25        |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM161201140605

Page: 5 of 91

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| 7.7.2    | Test Setup Diagram .....                                    | 25        |
| 7.7.3    | Measurement Data .....                                      | 25        |
| 7.8      | RADIATED SPURIOUS EMISSIONS .....                           | 26        |
| 7.8.1    | E.U.T. Operation .....                                      | 27        |
| 7.8.2    | Test Setup Diagram .....                                    | 27        |
| 7.8.3    | Test procedure .....                                        | 28        |
| 7.8.4    | Measurement Data .....                                      | 28        |
| 7.9      | RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS ..... | 29        |
| 7.9.1    | E.U.T. Operation .....                                      | 29        |
| 7.9.2    | Test Setup Diagram .....                                    | 29        |
| 7.9.3    | Test procedure .....                                        | 30        |
| 7.9.4    | Measurement Data .....                                      | 30        |
| 7.10     | CONDUCTED BAND EDGES MEASUREMENT .....                      | 31        |
| 7.10.1   | E.U.T. Operation .....                                      | 31        |
| 7.10.2   | Test Setup Diagram .....                                    | 31        |
| 7.10.3   | Measurement Data .....                                      | 31        |
| <b>8</b> | <b>PHOTOGRAPHS .....</b>                                    | <b>32</b> |
| 8.1      | CONDUCTED EMISSION .....                                    | 32        |
| 8.2      | RADIATED DISTURBANCE(30MHZ-1GHZ) TEST SETUP .....           | 32        |
| 8.3      | RADIATED DISTURBANCE(ABOVE 1GHZ) TEST SETUP .....           | 33        |
| 8.4      | EUT CONSTRUCTIONAL DETAILS .....                            | 33        |
| <b>9</b> | <b>APPENDIX .....</b>                                       | <b>34</b> |
| 9.1      | APPENDIX 15.247 .....                                       | 34-91     |



## 4 General Information

### 4.1 Details of E.U.T.

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| Power Supply:        | DC 3.7V 250 mAh rechargeable battery which charged by AC adapter |
| Product Name:        | BW BLUETOOTH HEADPHONE                                           |
| Model No.:           | BWA17AV003-1                                                     |
| Trade Mark:          | Blackweb                                                         |
| Operation Frequency: | 2402MHz~2480MHz                                                  |
| Modulation Type:     | GFSK, $\pi/4$ DQPSK, 8DPSK                                       |
| Number of Channel:   | 79                                                               |
| Antenna Type         | Integral                                                         |
| Antenna Gain         | 1.2dBi                                                           |
| Bluetooth Version    | V4.2                                                             |

### 4.2 Description of Support Units

| Description     | Manufacturer | Model No.      | Serial No.      |
|-----------------|--------------|----------------|-----------------|
| Adapter         | Apple        | A1357 W010A051 | REF. No.SEA0500 |
| Micro USB Cable | PHILIPS      | SWR2101        | REF. No.SEA0700 |



### 4.3 Measurement Uncertainty

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | 7.25 x 10 <sup>-8</sup> |
| 2   | Timeout                         | 2s                      |
| 3   | Duty cycle                      | 0.37%                   |
| 4   | Occupied Bandwidth              | 3%                      |
| 5   | RF conducted power              | 0.75dB                  |
| 6   | RF power density                | 2.84dB                  |
| 7   | Conducted Spurious emissions    | 0.75dB                  |
| 8   | RF Radiated power               | 4.5dB (below 1GHz)      |
|     |                                 | 4.8dB (above 1GHz)      |
| 9   | Radiated Spurious emission test | 4.5dB (30MHz-1GHz)      |
|     |                                 | 4.8dB (1GHz-18GHz)      |
| 10  | Temperature test                | 1 °C                    |
| 11  | Humidity test                   | 3%                      |
| 12  | Supply voltages                 | 1.5%                    |
| 13  | Time                            | 3%                      |



#### 4.4 Standards Applicable for Testing

Table 1 : Tests Carried Out Under 47 CFR Part 15, Subpart C 15.247

| Item                                                                         | Status |
|------------------------------------------------------------------------------|--------|
| Conducted Disturbance at AC Power Line(150kHz-30MHz)                         | √      |
| 20dB Bandwidth                                                               | √      |
| Conducted Peak Output Power                                                  | √      |
| Carrier Frequencies Separation                                               | √      |
| Hopping Channel Number                                                       | √      |
| Dwell Time                                                                   | √      |
| Minimum 6dB Bandwidth                                                        | ×      |
| Power Spectrum Density                                                       | ×      |
| Conducted Spurious Emissions                                                 | √      |
| Radiated Spurious Emissions                                                  | √      |
| Radiated Emissions which fall in the restricted bands                        | √      |
| Conducted Band Edges Measurement                                             | √      |
| Antenna Requirement                                                          | √      |
| Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence | √      |

× Indicates that the test is not applicable  
√ Indicates that the test is applicable



#### **4.5 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

#### **4.6 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

#### **4.7 Deviation from Standards**

None

#### **4.8 Abnormalities from Standard Conditions**

None



## 5 Equipment List

| Conducted Disturbance at AC Power Line(150kHz-30MHz) |                  |          |              |            |              |
|------------------------------------------------------|------------------|----------|--------------|------------|--------------|
| Equipment                                            | Manufacturer     | Model No | Inventory No | Cal Date   | Cal Due Date |
| Shielding Room                                       | ZhongYu Electron | GB-88    | SEM001-06    | 2016-05-13 | 2017-05-13   |
| LISN                                                 | Rohde & Schwarz  | ENV216   | SEM007-01    | 2016-10-09 | 2017-10-09   |
| LISN                                                 | ETS-LINDGREN     | 3816/2   | SEM007-02    | 2016-04-25 | 2017-04-25   |

| RF conducted tests items |                 |          |              |            |              |
|--------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment                | Manufacturer    | Model No | Inventory No | Cal Date   | Cal Due Date |
| DC Power Supply          | ZhaoXin         | RXN-305D | SEM011-02    | 2016-10-09 | 2017-10-09   |
| Spectrum Analyzer        | Rohde & Schwarz | FSP      | SEM004-06    | 2016-10-09 | 2017-10-09   |
| Signal Generator         | Rohde & Schwarz | SML03    | SEM006-02    | 2016-04-25 | 2017-04-25   |
| Power Meter              | Rohde & Schwarz | NRVS     | SEM014-02    | 2016-10-09 | 2017-10-09   |

| Radiated Disturbance(30MHz-1GHz)      |                         |          |              |            |              |
|---------------------------------------|-------------------------|----------|--------------|------------|--------------|
| Equipment                             | Manufacturer            | Model No | Inventory No | Cal Date   | Cal Due Date |
| 10m Semi-Anechoic Chamber             | SAEMC                   | FSAC1018 | SEM001-03    | 2016-05-13 | 2017-05-13   |
| EMI Test Receiver<br>(9k-3GHz)        | Rohde & Schwarz         | ESR      | SEM004-03    | 2016-04-25 | 2017-04-25   |
| Trilog-Broadband<br>Antenna(30M-1GHz) | Schwarzbeck             | VULB9168 | SEM003-18    | 2016-06-29 | 2019-06-29   |
| Pre-amplifier                         | Sonoma Instrument<br>Co | 310N     | SEM005-03    | 2016-07-06 | 2017-07-06   |

| General used equipment             |                                                 |          |              |            |              |
|------------------------------------|-------------------------------------------------|----------|--------------|------------|--------------|
| Equipment                          | Manufacturer                                    | Model No | Inventory No | Cal Date   | Cal Due Date |
| Humidity/ Temperature<br>Indicator | Shanghai<br>Meteorological<br>Industry Factory  | ZJ1-2B   | SEM002-03    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature<br>Indicator | Shanghai<br>Meteorological<br>Industry Factory  | ZJ1-2B   | SEM002-04    | 2016-10-12 | 2017-10-12   |
| Humidity/ Temperature<br>Indicator | Mingle                                          | N/A      | SEM002-08    | 2016-10-12 | 2017-10-12   |
| Barometer                          | Changchun<br>Meteorological<br>Industry Factory | DYM3     | SEM002-01    | 2016-05-18 | 2017-05-18   |

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247


#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

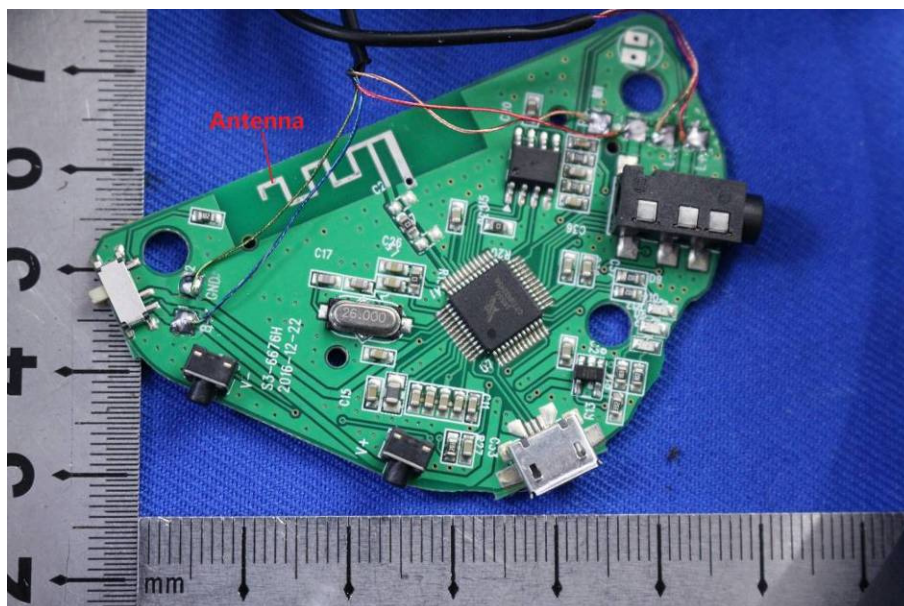

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.2dBi.



## 6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

### 6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

### 6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):


According to Technical Specification, the pseudorandom sequence may be generated

Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage


outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

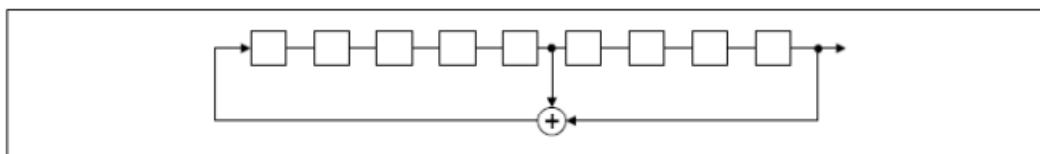

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

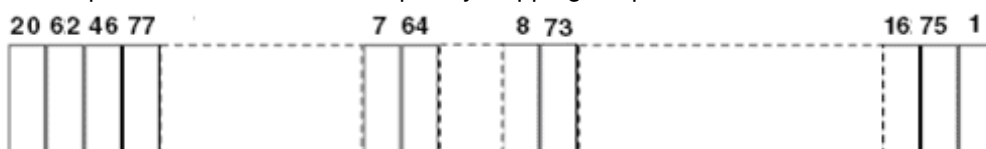



Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Disturbance at AC Power Line(150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 6.2  
Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) |           |
|----------------------------|-----------------------|-----------|
|                            | Quasi-peak            | Average   |
| 0.15-0.5                   | 66 to 56*             | 56 to 46* |
| 0.5-5                      | 56                    | 46        |
| 5-30                       | 60                    | 50        |

\*Decreases with the logarithm of the frequency.

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.


Charge + Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case.

Charge + Transmitting mode

Only the worst case is recorded in the report.

#### 7.1.2 Test Setup Diagram

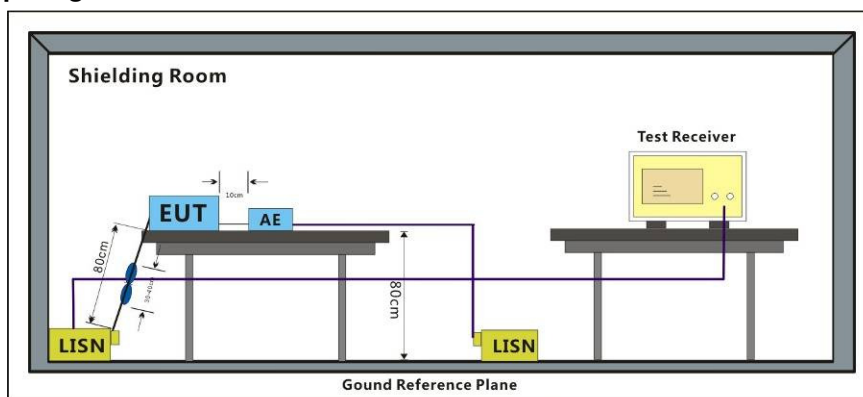



### **7.1.3 Measurement Data**


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605  
Page: 16 of 91

Mode:b:Charging+Tx mode;Line:Neutral Line

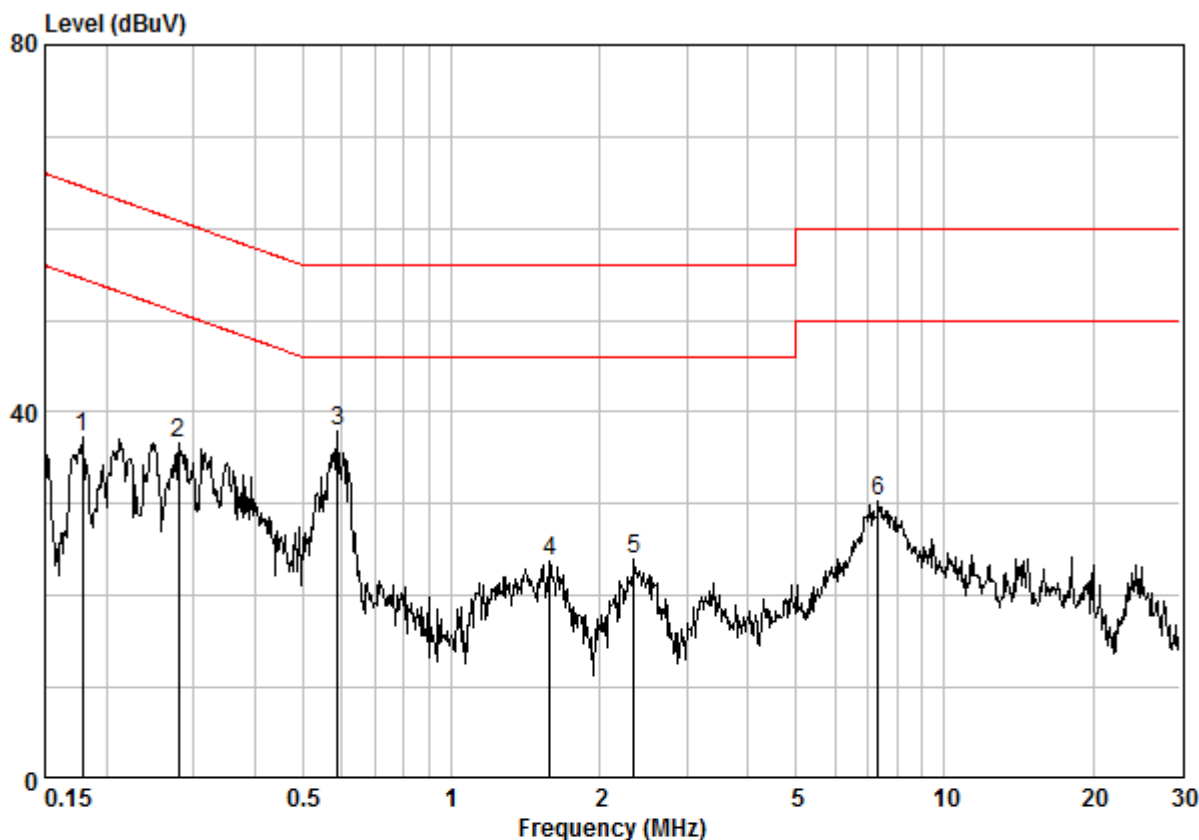

Site : Shielding Room  
Condition : CE NEUTRAL  
Job No. : 11406CR  
Test Mode : b


|     | Freq    | Cable Loss | LISN Factor | Read Level | Limit | Over  |              |
|-----|---------|------------|-------------|------------|-------|-------|--------------|
|     | MHz     | dB         | dB          | dBuV       | dBuV  | dBuV  | Limit Remark |
| 1   | 0.17866 | 0.02       | 9.61        | 27.61      | 37.23 | 54.55 | -17.31 Peak  |
| 2   | 0.28029 | 0.02       | 9.62        | 27.03      | 36.67 | 50.81 | -14.14 Peak  |
| 3 @ | 0.58851 | 0.02       | 9.63        | 28.27      | 37.92 | 46.00 | -8.08 Peak   |
| 4   | 1.585   | 0.03       | 9.64        | 14.08      | 23.75 | 46.00 | -22.25 Peak  |
| 5   | 2.346   | 0.03       | 9.67        | 14.20      | 23.89 | 46.00 | -22.11 Peak  |
| 6   | 7.329   | 0.09       | 9.75        | 20.47      | 30.30 | 50.00 | -19.70 Peak  |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605  
Page: 17 of 91

Mode:b:Charging+ Tx mode ;Line:Live Line

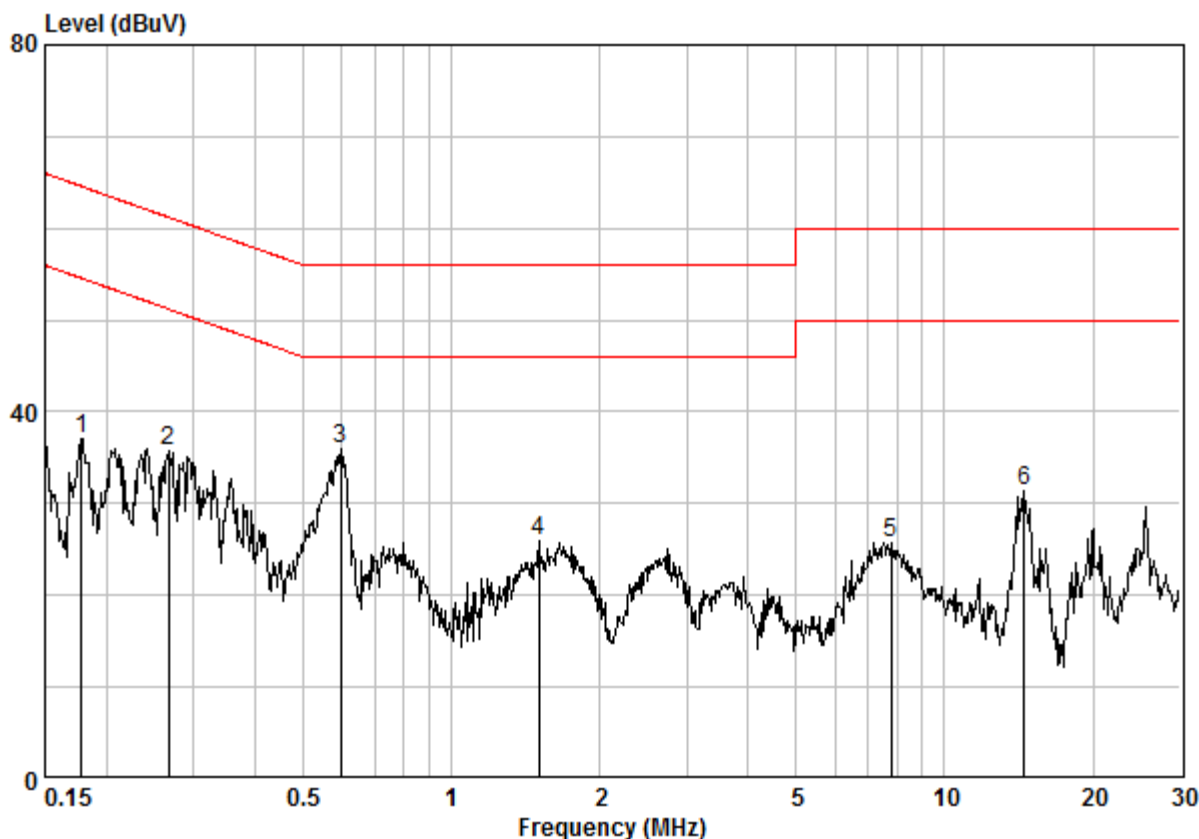

Site : Shielding Room  
Condition : CE LINE  
Job No. : 11406CR  
Test Mode : b

|   | Freq    | Cable Loss | LISN Factor | Read Level | Limit Line | Over Limit | Remark |
|---|---------|------------|-------------|------------|------------|------------|--------|
|   | MHz     | dB         | dB          | dBuV       | dBuV       | dB         |        |
| 1 | 0.17772 | 0.02       | 9.60        | 27.38      | 54.59      | -17.59     | Peak   |
| 2 | 0.26724 | 0.02       | 9.60        | 26.21      | 51.20      | -15.37     | Peak   |
| 3 | 0.59794 | 0.02       | 9.61        | 26.23      | 46.00      | -10.14     | Peak   |
| 4 | 1.503   | 0.03       | 9.58        | 16.25      | 46.00      | -20.14     | Peak   |
| 5 | 7.810   | 0.10       | 9.69        | 16.04      | 50.00      | -24.18     | Peak   |
| 6 | 14.517  | 0.16       | 9.76        | 21.58      | 50.00      | -18.51     | Peak   |

## 7.2 20dB Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.7

### 7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type.  
Transmitting mode, Charge + Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.  
Charge + Transmitting mode is the worst case  
Only the worst case is reported

### 7.2.2 Test Setup Diagram

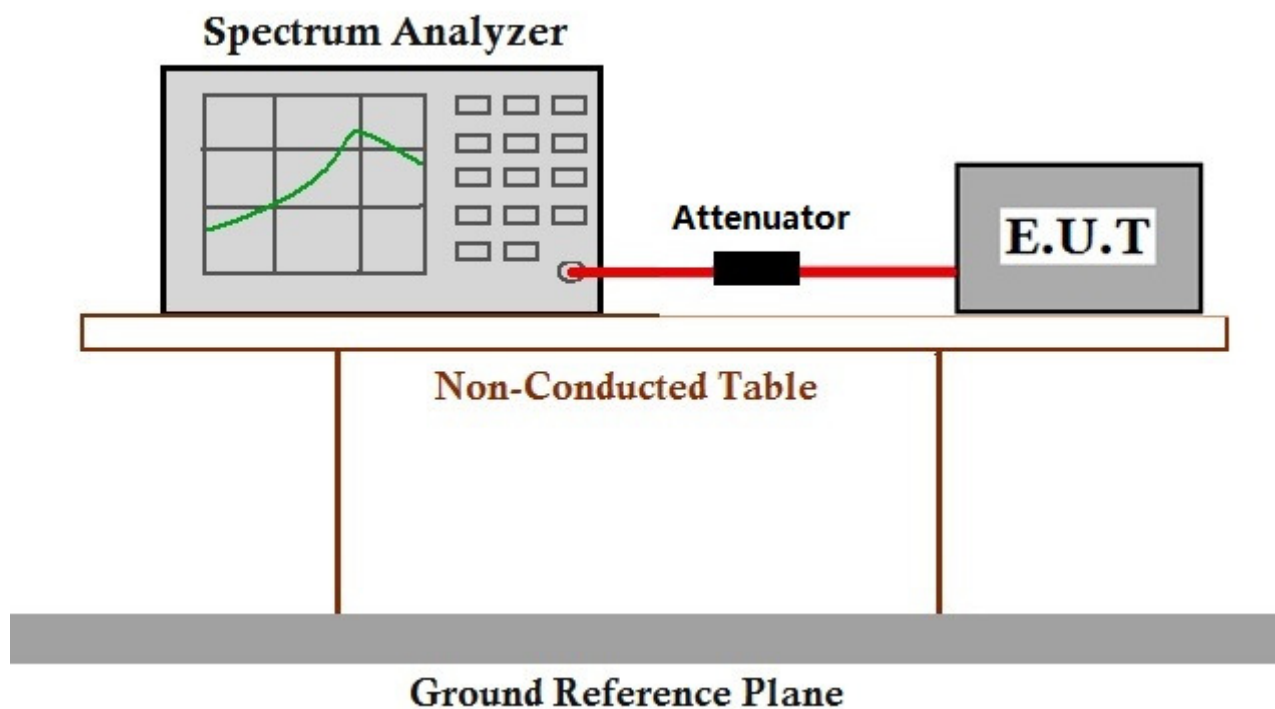

### 7.2.3 Measurement Data

The detailed test data see: Appendix 15.247



### 7.3 Conducted Peak Output Power

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.5  
Limit:

| Frequency range(MHz) | Output power of the intentional radiator(watt)         |
|----------------------|--------------------------------------------------------|
| 902-928              | 1 for $\geq 50$ hopping channels                       |
|                      | 0.25 for $< 50$ hopping channels                       |
|                      | 1 for digital modulation                               |
| 2400-2483.5          | 1 for $\geq 75$ non-overlapping hopping channels       |
|                      | 0.125 for all other frequency hopping systems          |
|                      | 1 for digital modulation                               |
| 5725-5850            | 1 for frequency hopping systems and digital modulation |

### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar


Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type.  
 Transmitting mode, Charge + Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

Charge + Transmitting mode is the worst case

Only the worst case is reported.

### 7.3.2 Test Setup Diagram

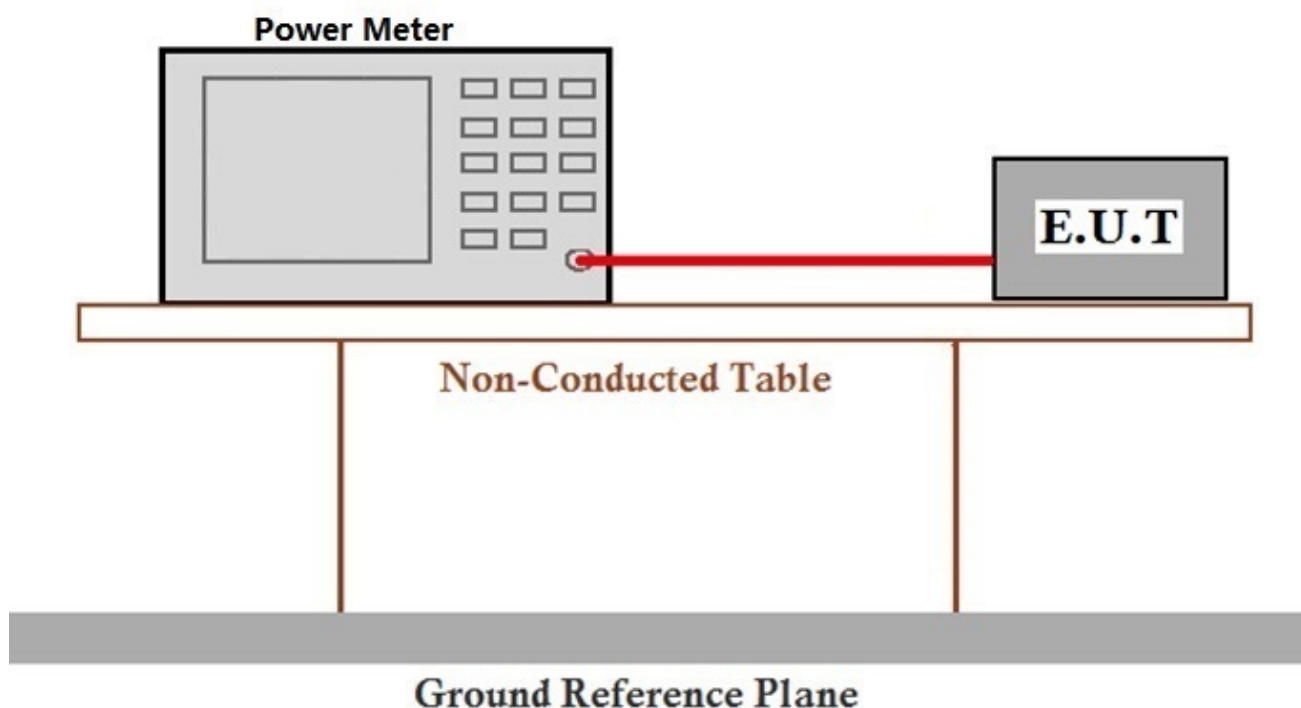

### 7.3.3 Measurement Data

The detailed test data see: Appendix 15.247

## 7.4 Carrier Frequencies Separation

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.2  
Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Hopping transmitting with all kind of modulation and all kind of data type.  
Transmitting mode , Charge + Transmitting mode

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.  
Charge + Transmitting mode is the worst case  
Only the worst case is reported

### 7.4.2 Test Setup Diagram

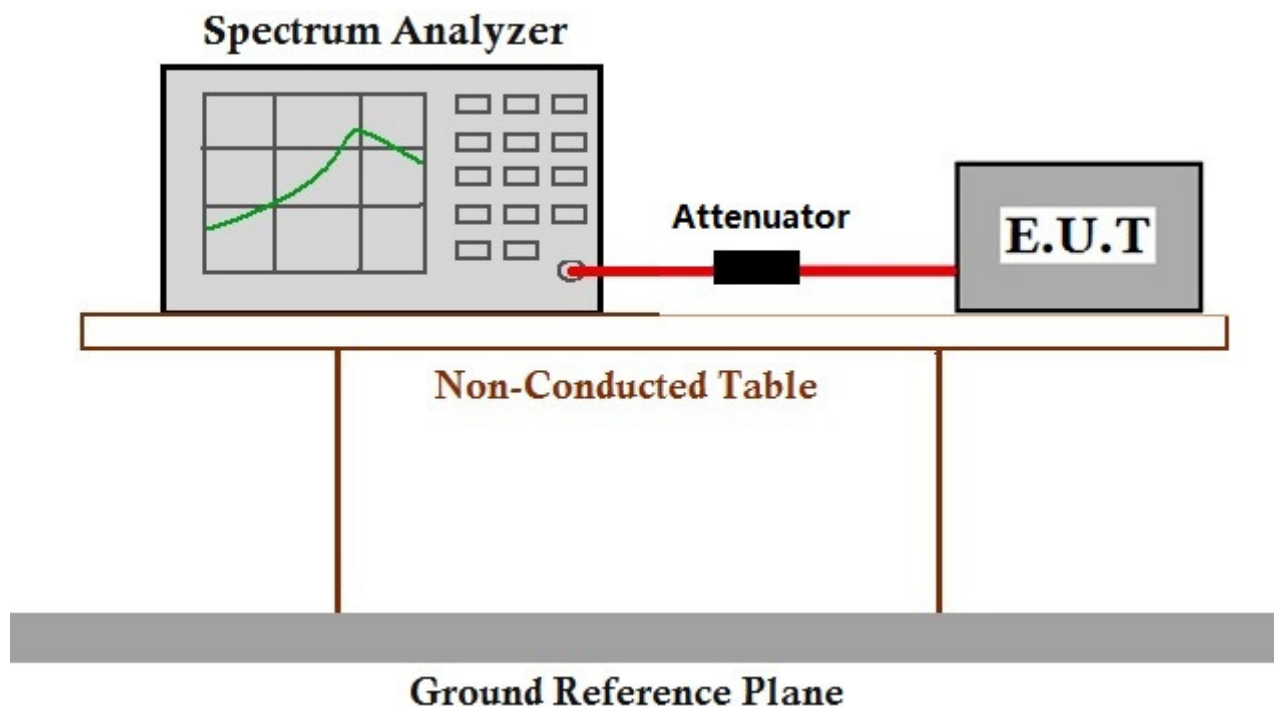

### 7.4.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.5 Hopping Channel Number

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

| Frequency range(MHz) | Channel Number(minimum)       |
|----------------------|-------------------------------|
| 902-928              | 50 for 20dB bandwidth <250kHz |
|                      | 25 for 20dB bandwidth ≥250kHz |
| 2400-2483.5          | 15                            |
| 5725-5850            | 75                            |

### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar


Exploratory Test Mode: Hopping transmitting with all kind of modulation  
 Transmitting mode, Charge + Transmitting mode

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

Charge + Transmitting mode is the worst case

Only the worst case is reported

### 7.5.2 Test Setup Diagram

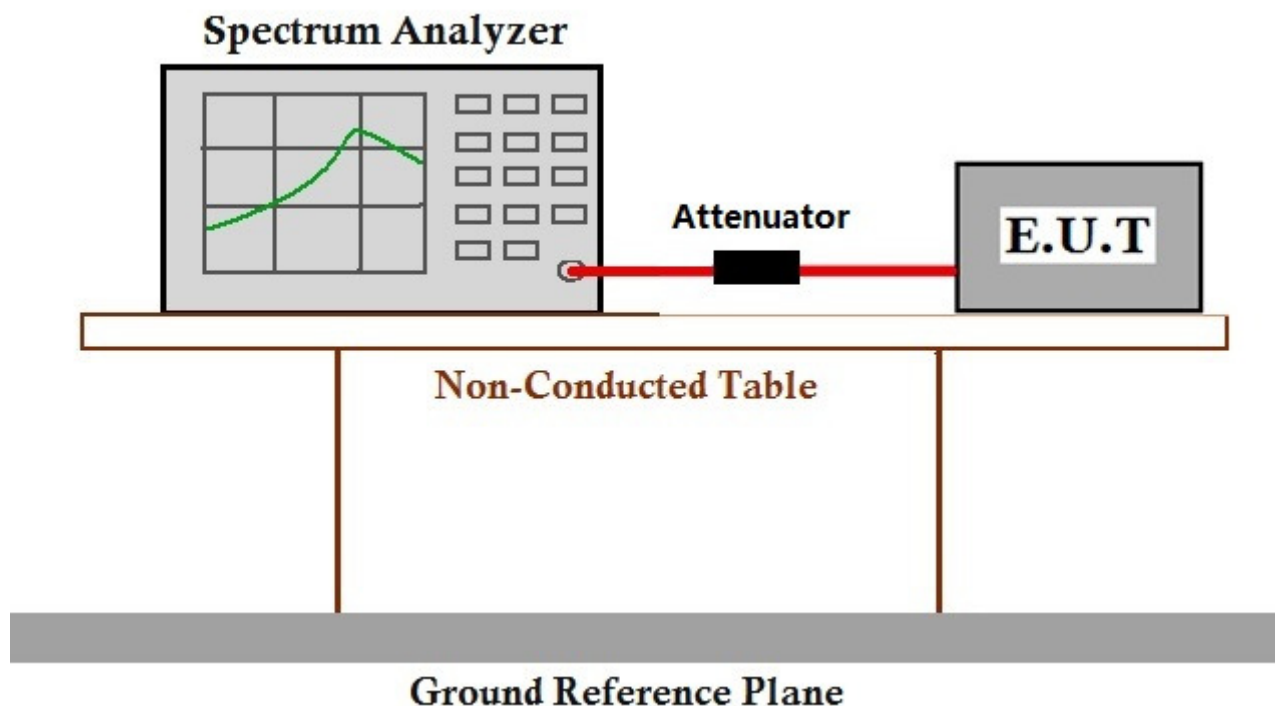

### 7.5.3 Measurement Data

The detailed test data see: Appendix 15.247

## 7.6 Dwell Time

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.4  
Limit:

| Frequency(MHz) | Limit                                           |
|----------------|-------------------------------------------------|
| 902-928        | 0.4S within a 20S period(20dB bandwidth<250kHz) |
|                | 0.4S within a 10S period(20dB bandwidth≥250kHz) |
| 2400-2483.5    | 0.4S within a period of 0.4S                    |
| 5725-5850      | 0.4S within a 30S period                        |

### 7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Hopping transmitting with all kind of modulation and all kind of data type.  
Transmitting mode, Charge + Transmitting mode

Final Test Mode: Charge + Transmitting mode is the worst case  
Only the worst case is reported

### 7.6.2 Test Setup Diagram

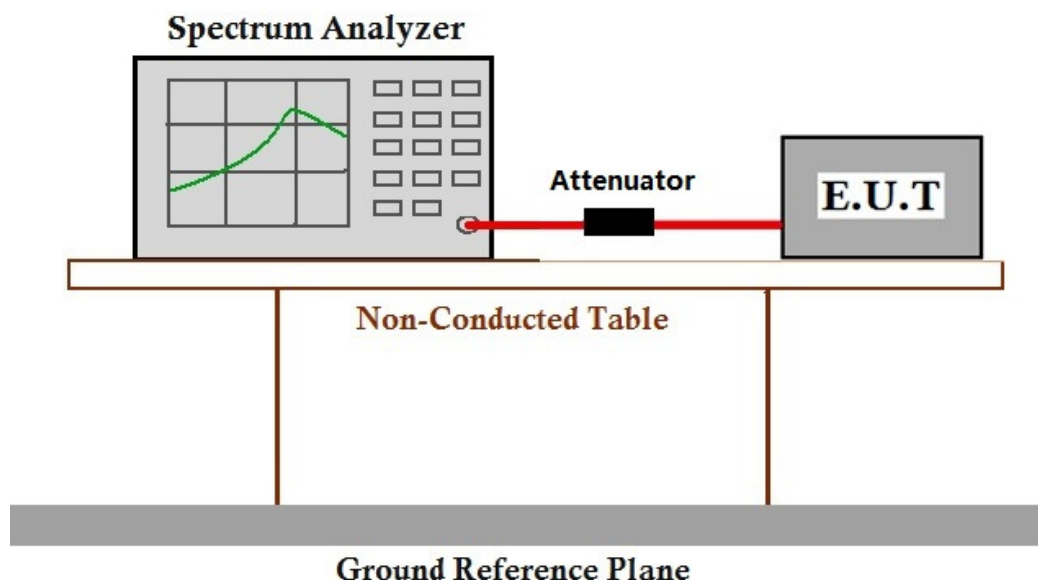

### 7.6.3 Measurement Data

The detailed test data see: Appendix 15.247

## 7.7 Conducted Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.8  
Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C      Humidity: 56 % RH      Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting with all kind of modulation and all kind of data type  
Transmitting mode, Charge + Transmitting mode

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.  
Charge + Transmitting mode is the worst case  
Only the worst case is reported

### 7.7.2 Test Setup Diagram

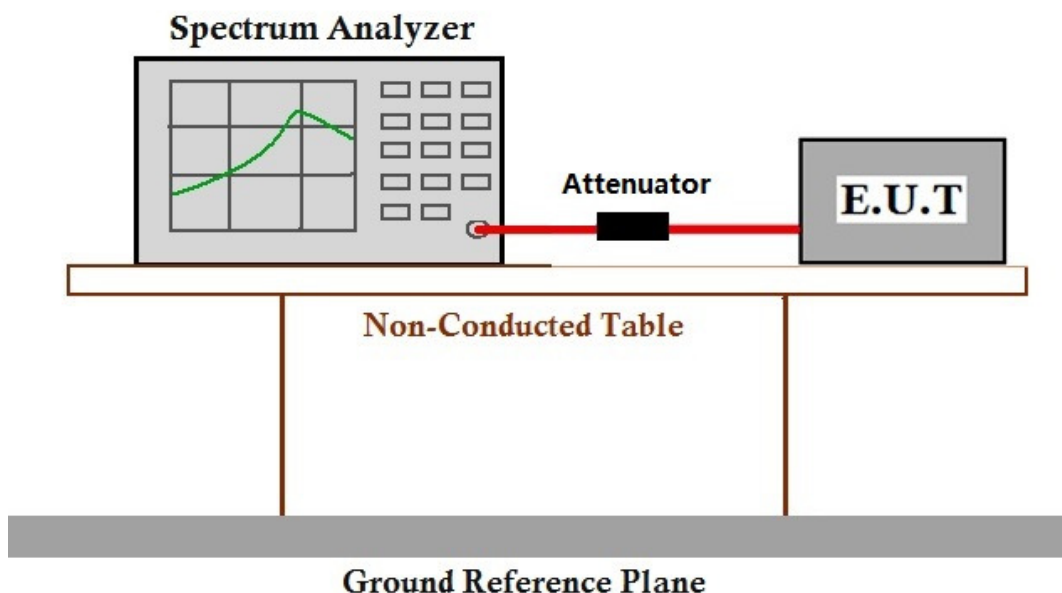

### 7.7.3 Measurement Data

The detailed test data see: Appendix 15.247



## 7.8 Radiated Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6  
Measurement Distance: 10m  
Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type

Transmitting mode, Charge + Transmitting mode.




Final Test Mode: Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.

Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case

For below 1GHz part, through pre-scan, the worst case is the lowest channel.

Only the worst case is recorded in the report.

### 7.8.2 Test Setup Diagram

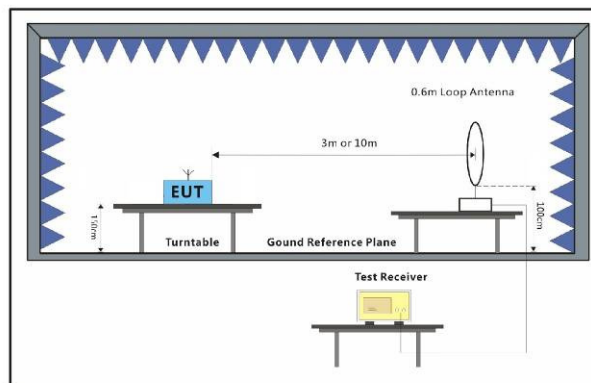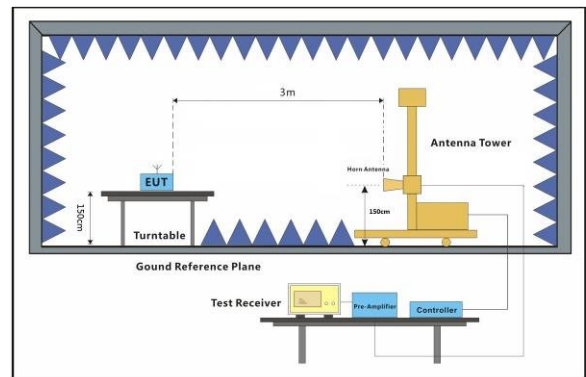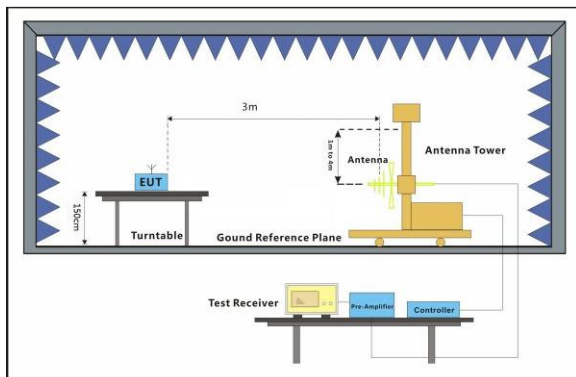



### **7.8.3 Test procedure**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

### **7.8.4 Measurement Data**

The detailed test data see: Appendix 15.247

## 7.9 Radiated Emissions which fall in the restricted bands

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 6.10.5

### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Non-hopping transmitting mode with all kind of modulation and all kind of data type




Transmitting mode, Charge + Transmitting mode.

Final Test Mode: Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.

Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case

Only the worst case is recorded in the report.

### 7.9.2 Test Setup Diagram

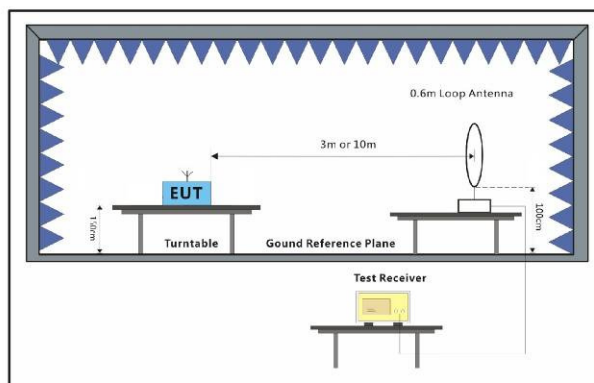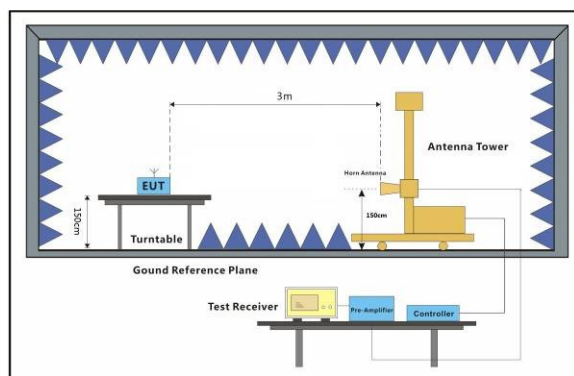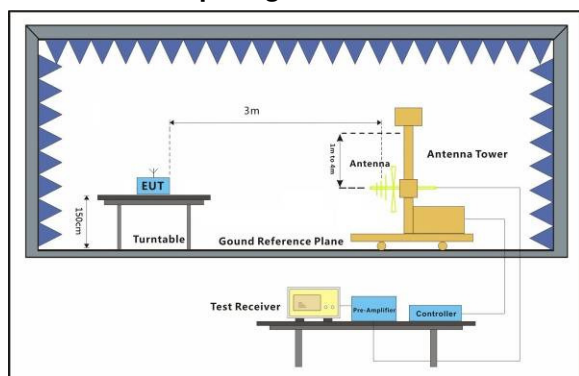



### **7.9.3 Test procedure**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 and 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel (2402MHz), the middle channel (2441MHz), the Highest channel (2480MHz)
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

### **7.9.4 Measurement Data**

The detailed test data see: Appendix 15.247

## 7.10 Conducted Band Edges Measurement

Test Requirement: 47 CFR Part 15, Subpart C 15.247  
Test Method: ANSI C63.10 (2013) Section 7.8.6

### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Exploratory Test Mode: Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type


Transmitting mode, Charge + Transmitting mode

Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of  $\pi/4$ DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.

Charge + Transmitting mode is the worst case

Only the worst case is reported

### 7.10.2 Test Setup Diagram

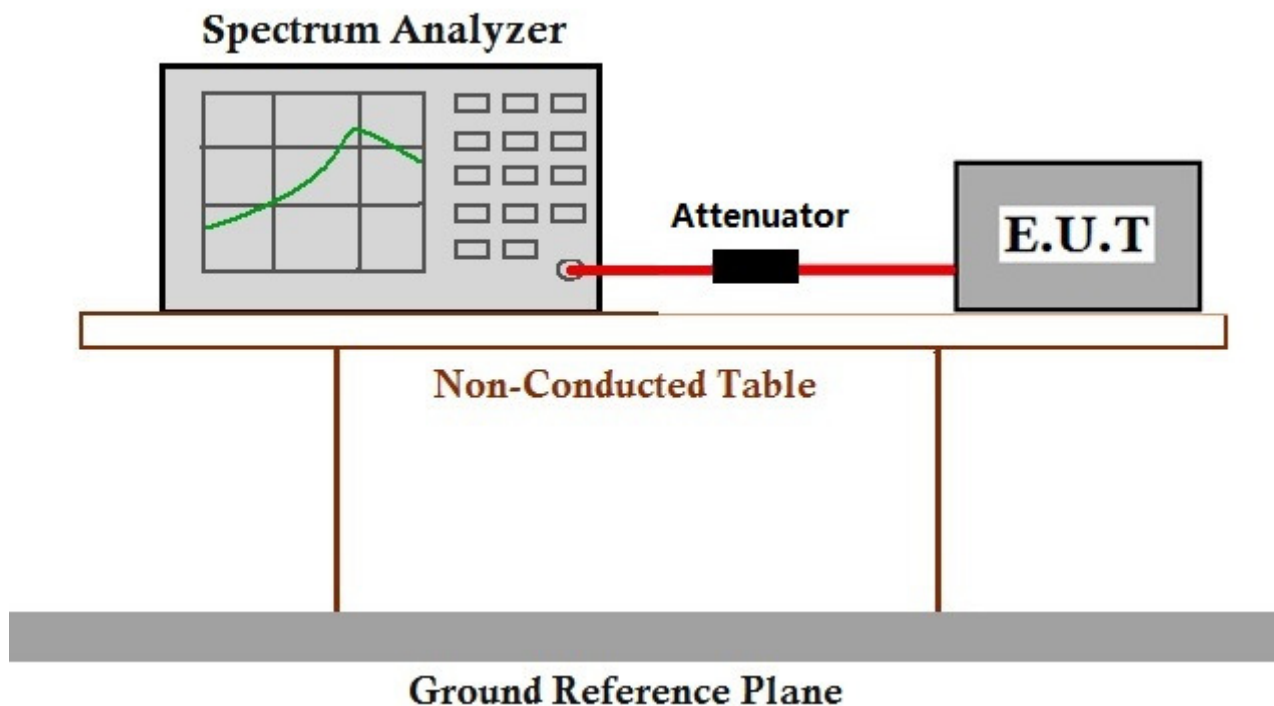


### 7.10.3 Measurement Data


The detailed test data see: Appendix 15.247

## 8 Photographs


### 8.1 Conducted Emission

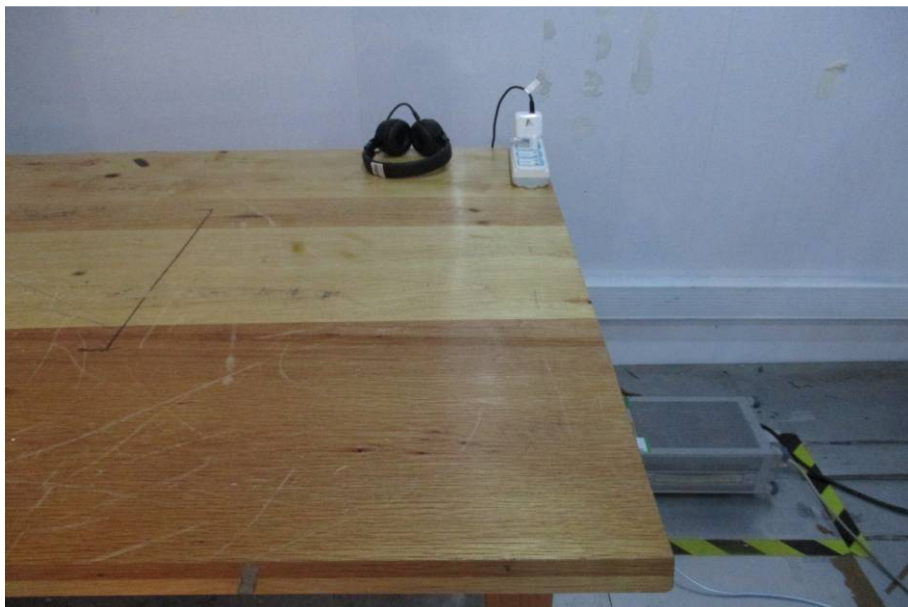

### 8.2 Radiated Disturbance(30MHz-1GHz) Test Setup

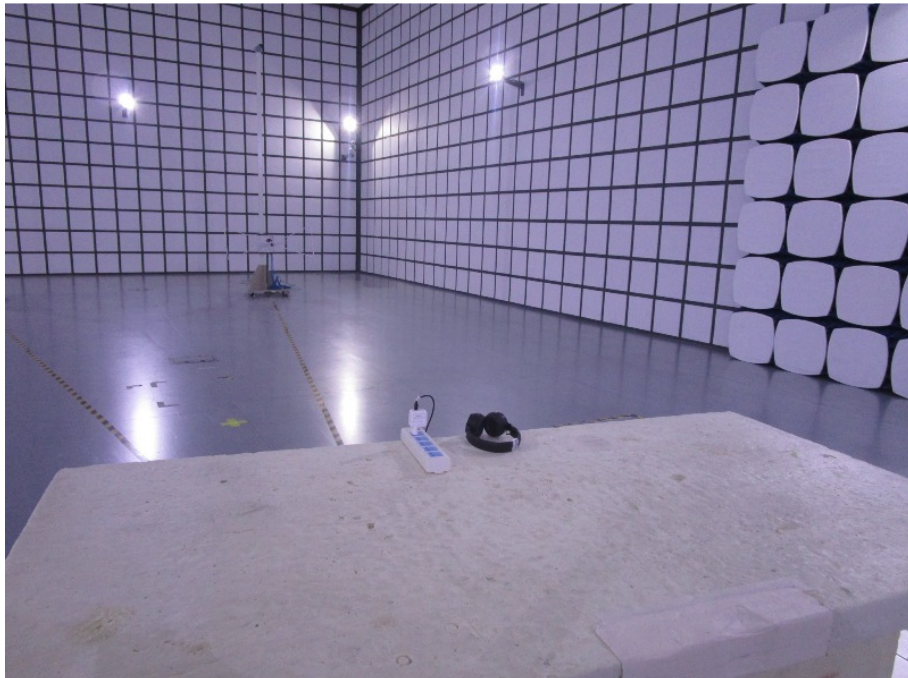

### 8.3 Radiated Disturbance(above 1GHz) Test Setup

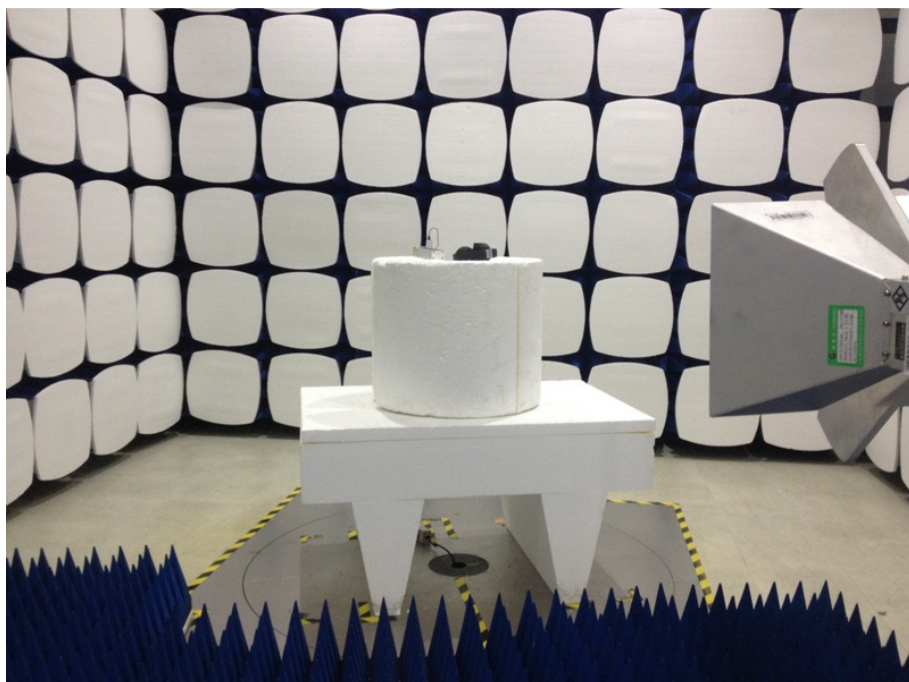

### 8.4 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1612011406CR.



## 9 Appendix

### 9.1 Appendix 15.247


#### 1.20 dB Bandwidth

| Test Mode | Test Channel | EBW[MHz] | Limit | Verdict |
|-----------|--------------|----------|-------|---------|
| DH5       | 2402         | 1.126    | ---   | PASS    |
| DH5       | 2441         | 1.126    | ---   | PASS    |
| DH5       | 2480         | 1.132    | ---   | PASS    |
| 2DH5      | 2402         | 1.402    | ---   | PASS    |
| 2DH5      | 2441         | 1.412    | ---   | PASS    |
| 2DH5      | 2480         | 1.402    | ---   | PASS    |
| 3DH5      | 2402         | 1.430    | ---   | PASS    |
| 3DH5      | 2441         | 1.436    | ---   | PASS    |
| 3DH5      | 2480         | 1.442    | ---   | PASS    |





TEST PLOT


20 dB Bandwidth\_DH5\_2402

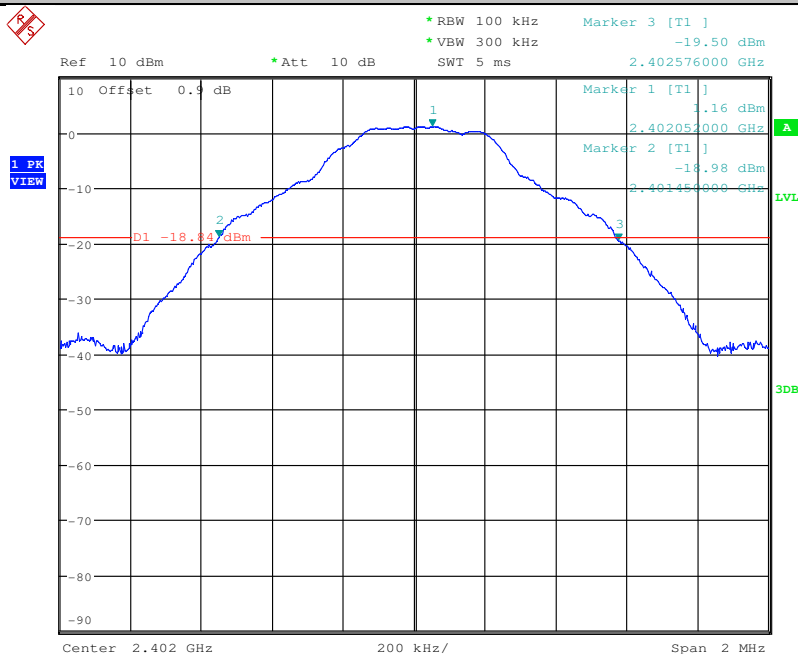



20 dB Bandwidth\_DH5\_2441

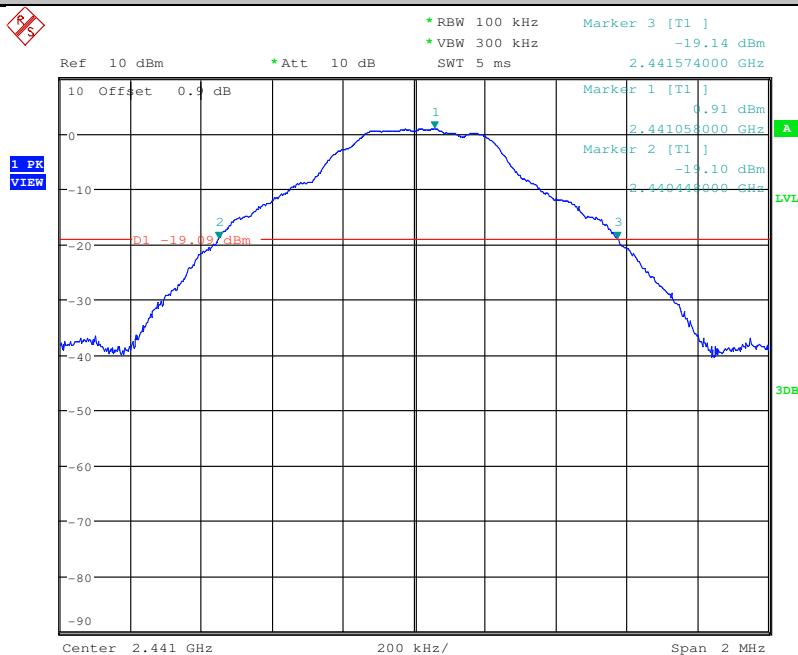

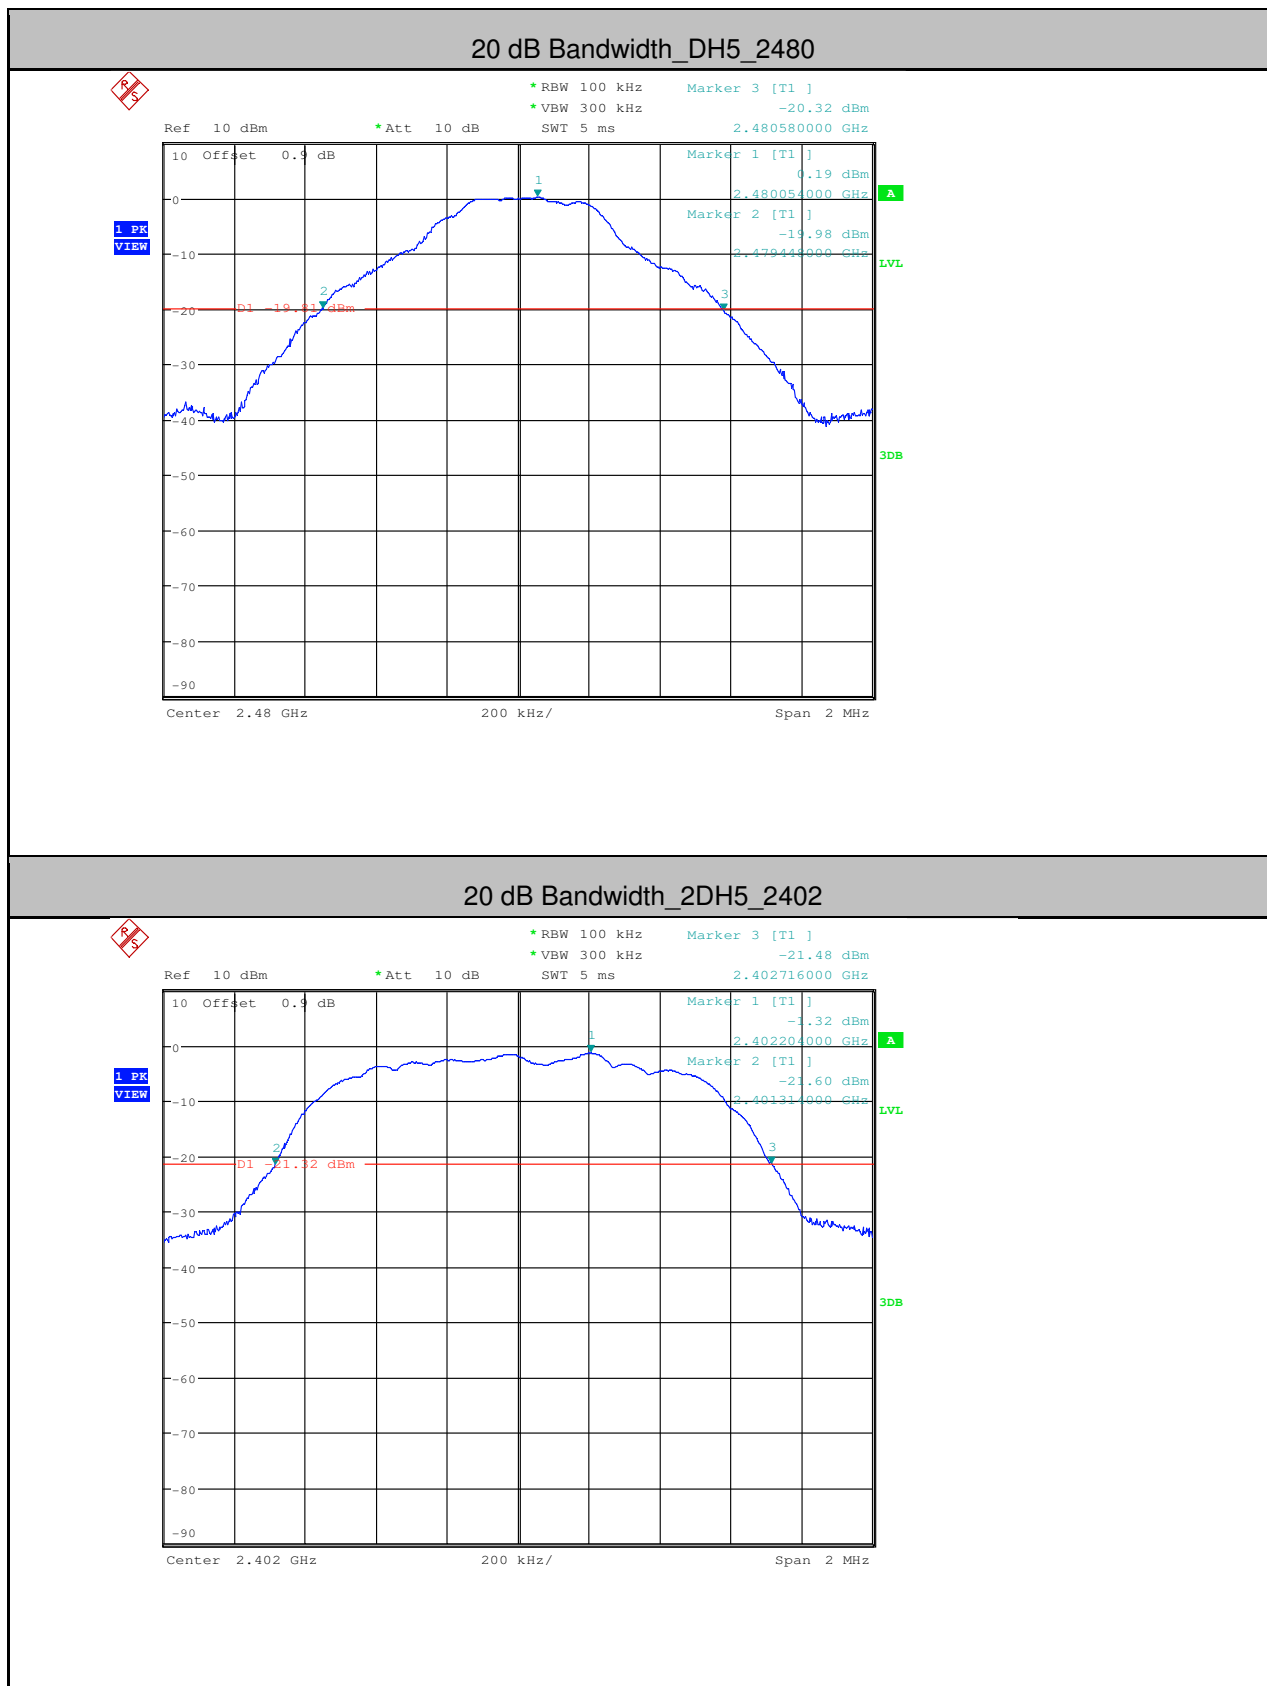

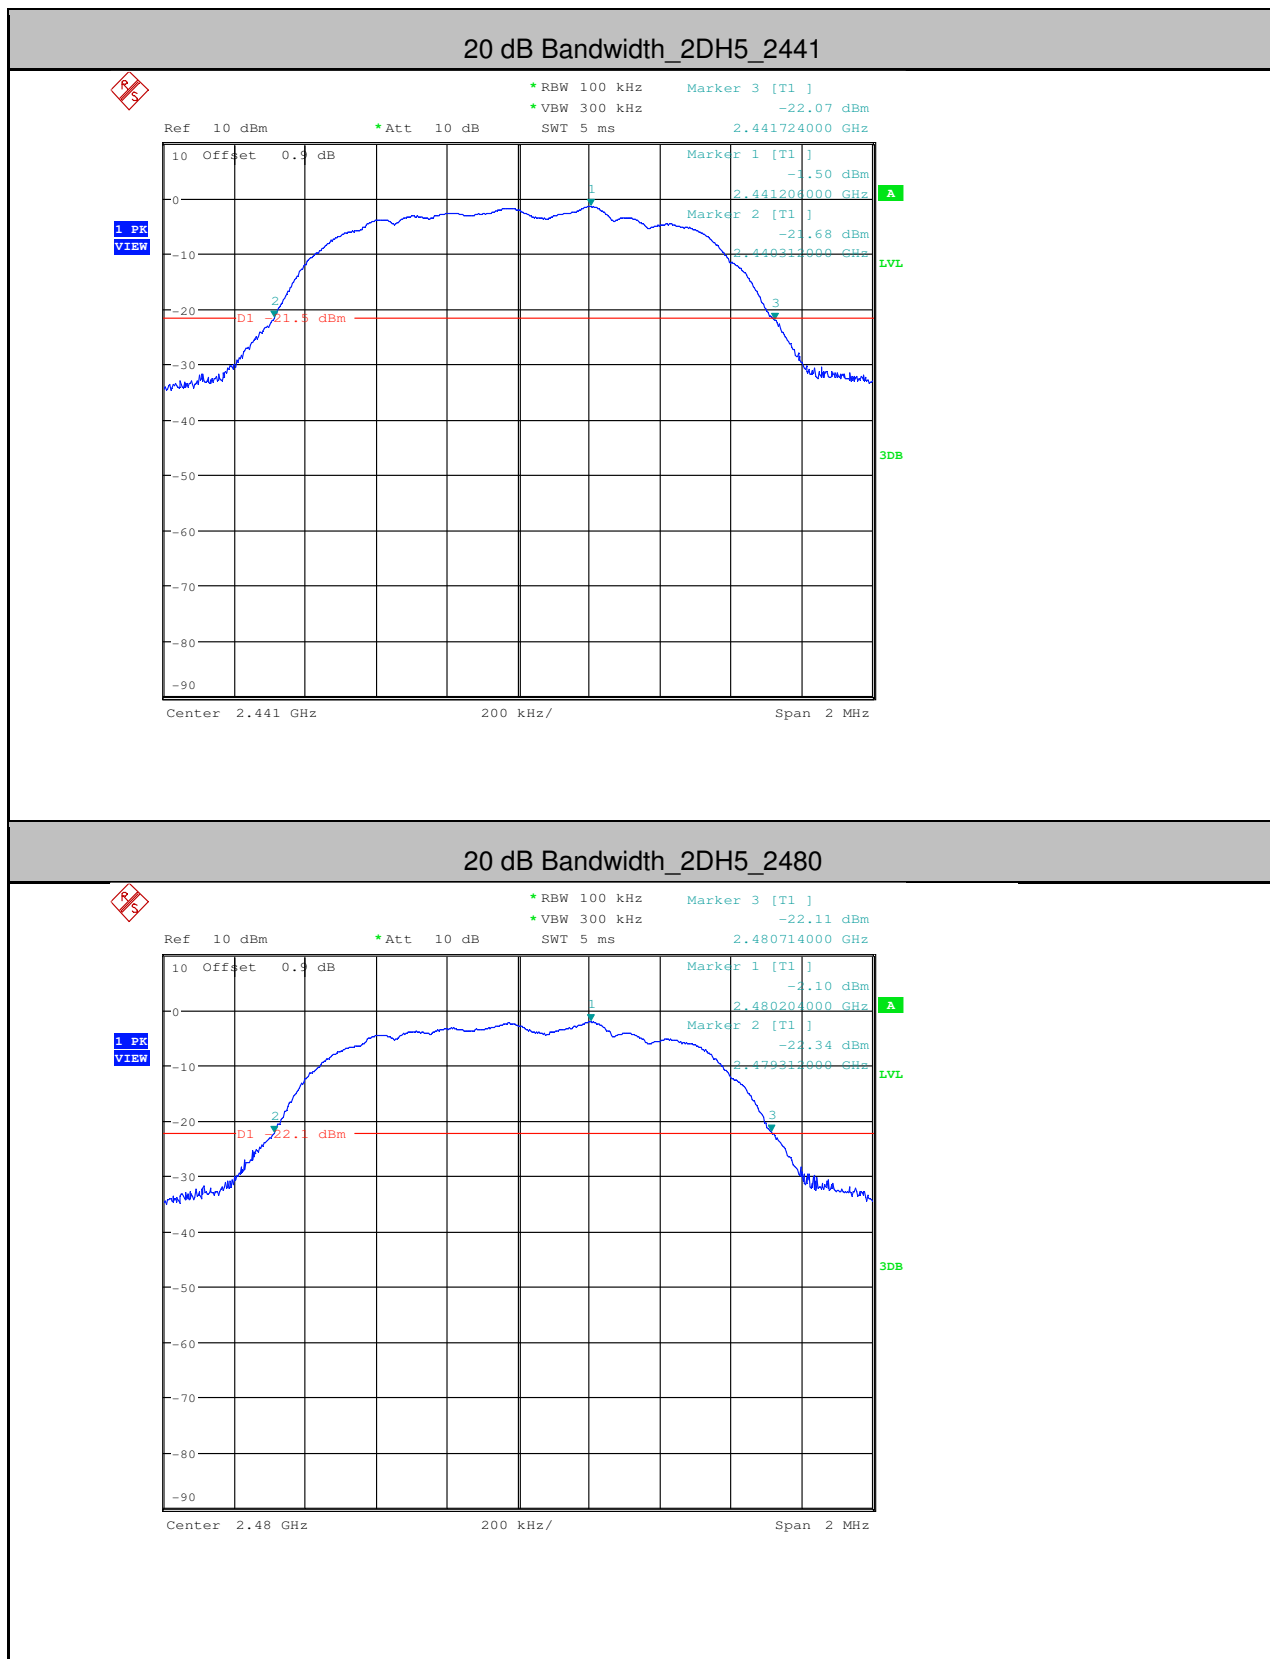

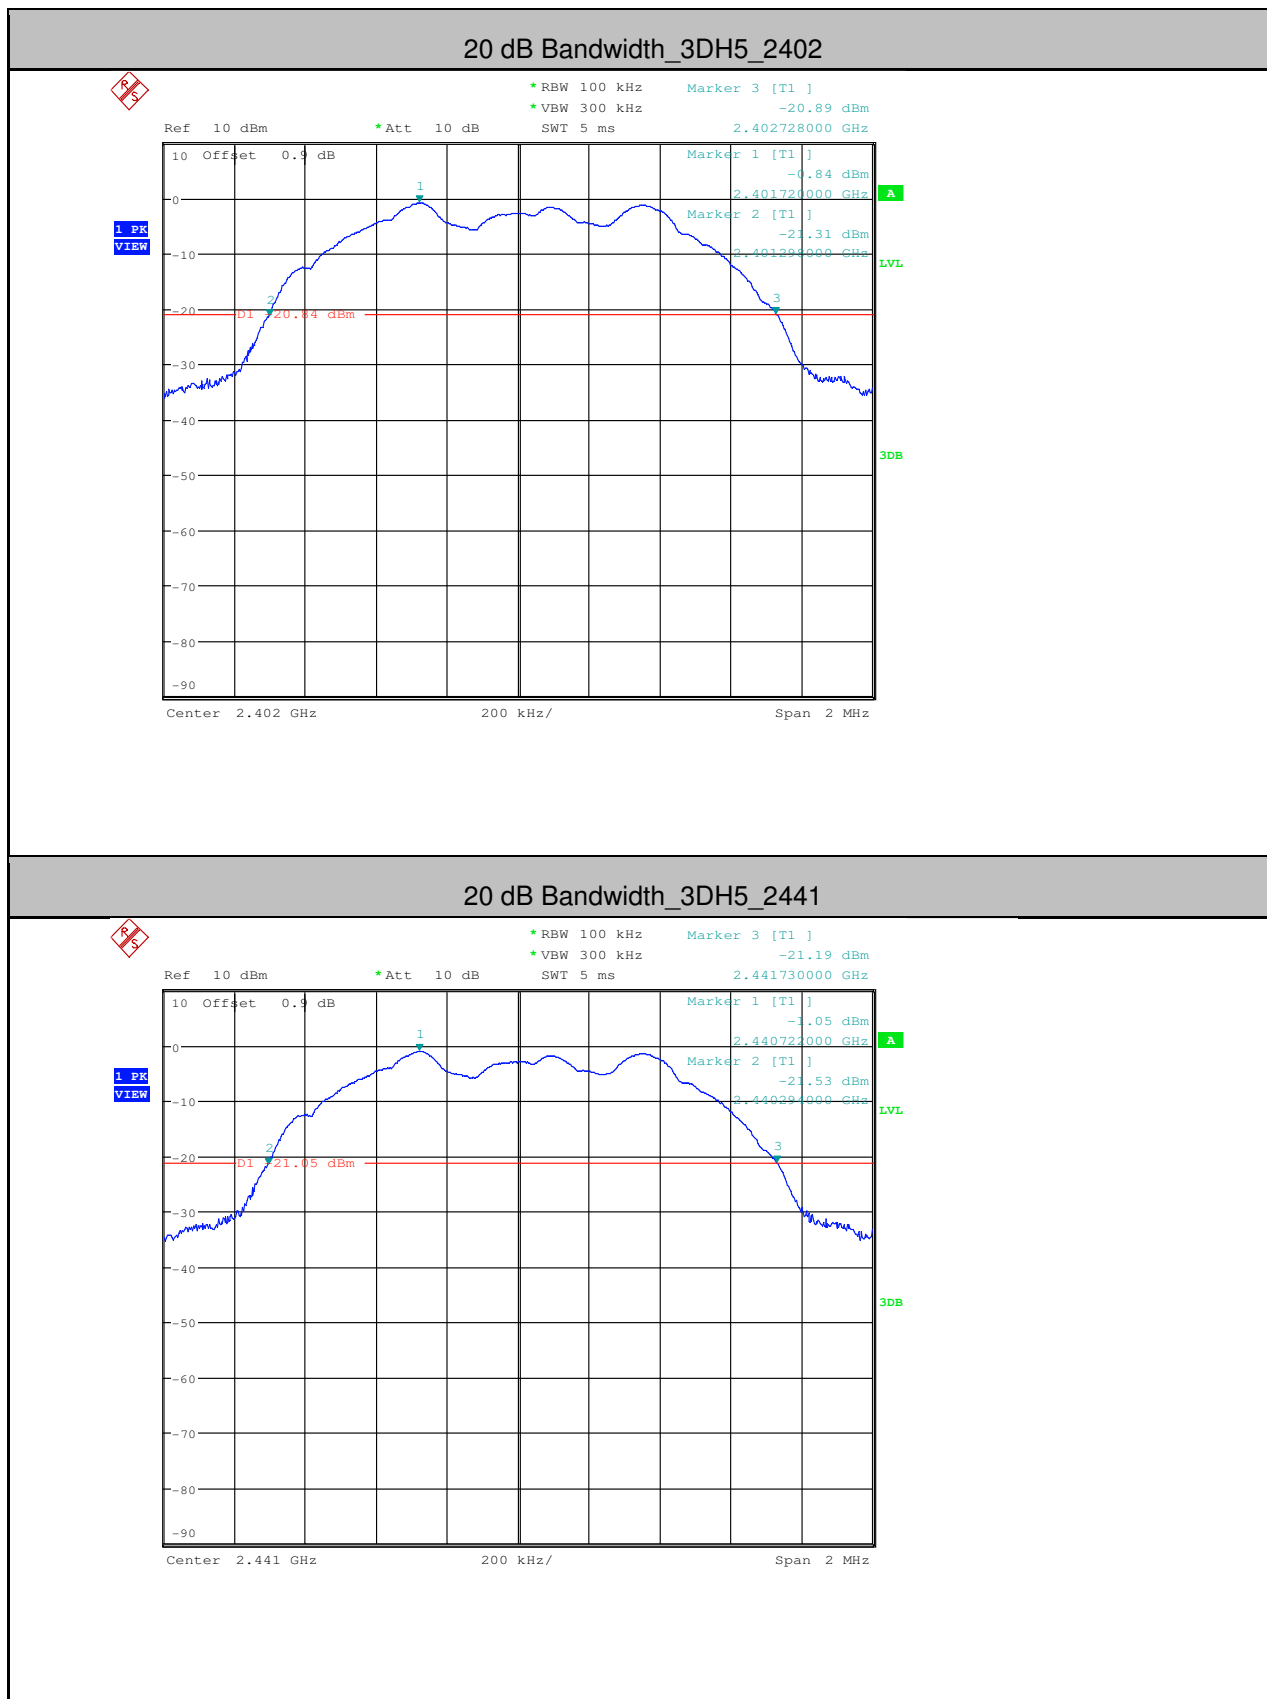


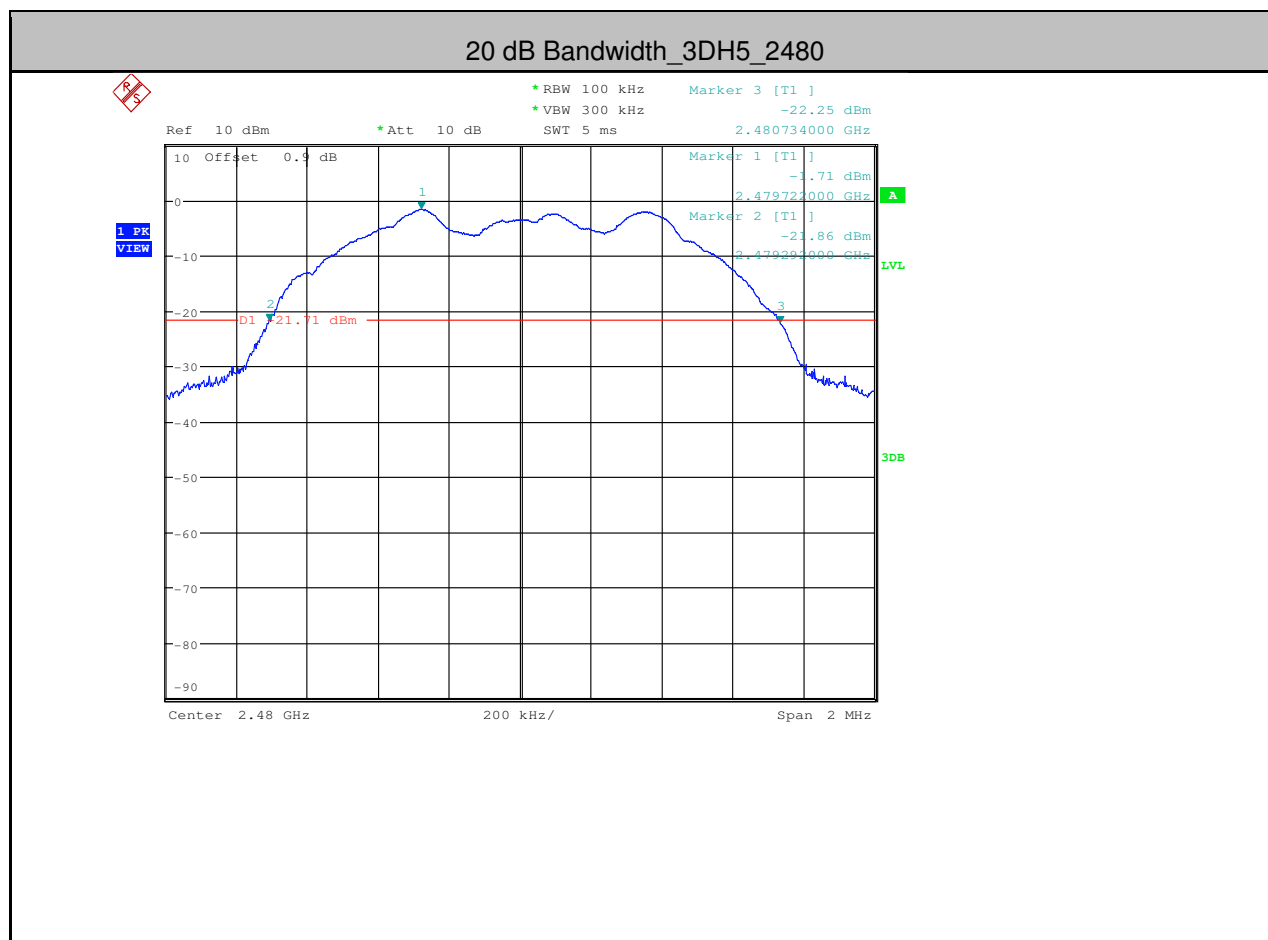




## 2. Conducted Peak Output Power

| Test Mode | Test Channel | Power[dBm] | Limit[dBm]       | Verdict |
|-----------|--------------|------------|------------------|---------|
| DH5       | 2402         | 2.68       | <20.97dBm(125mW) | PASS    |
| DH5       | 2441         | 2.39       | <20.97dBm(125mW) | PASS    |
| DH5       | 2480         | 1.65       | <20.97dBm(125mW) | PASS    |
| 2DH5      | 2402         | 4.03       | <20.97dBm(125mW) | PASS    |
| 2DH5      | 2441         | 3.71       | <20.97dBm(125mW) | PASS    |
| 2DH5      | 2480         | 2.96       | <20.97dBm(125mW) | PASS    |
| 3DH5      | 2402         | 4.23       | <20.97dBm(125mW) | PASS    |
| 3DH5      | 2441         | 3.95       | <20.97dBm(125mW) | PASS    |
| 3DH5      | 2480         | 3.19       | <20.97dBm(125mW) | PASS    |

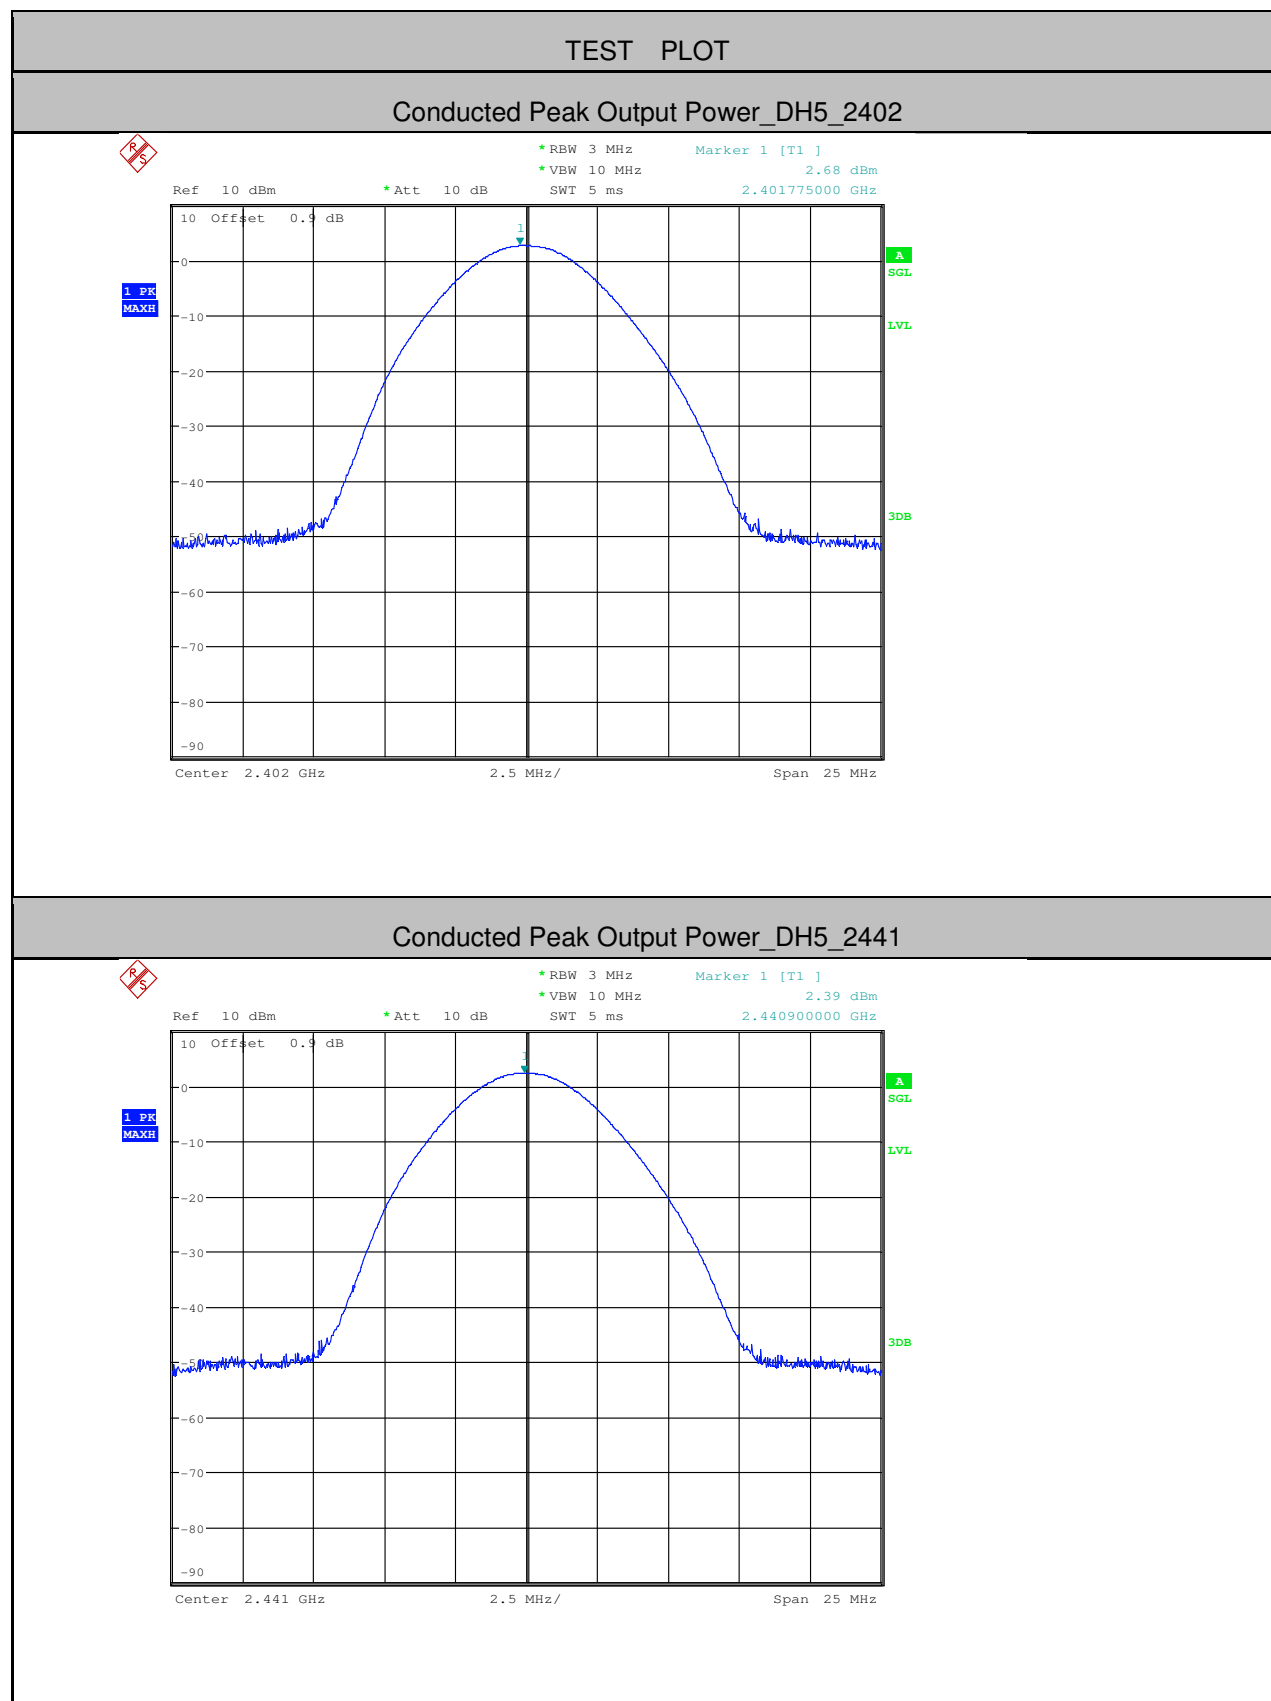




Conducted Peak Output Power\_DH5\_2480

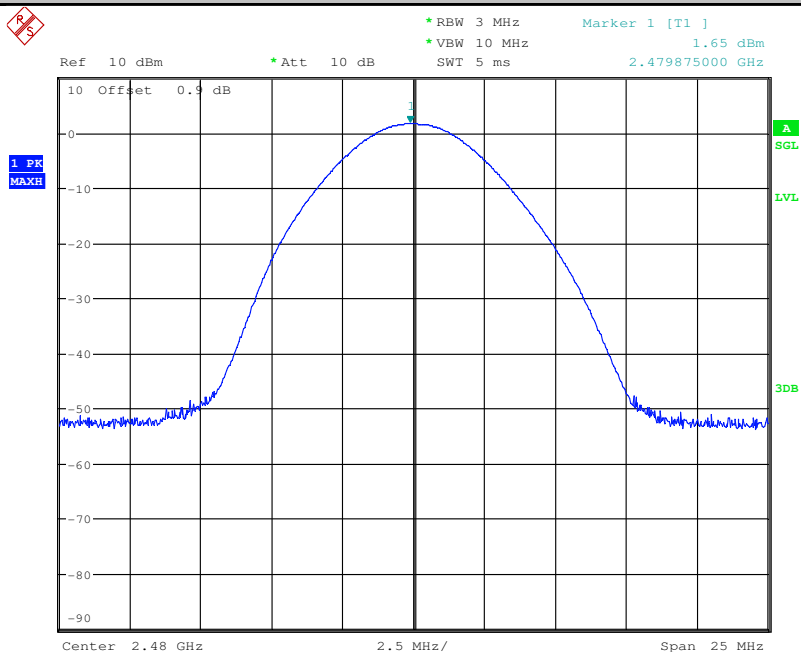


Conducted Peak Output Power\_2DH5\_2402

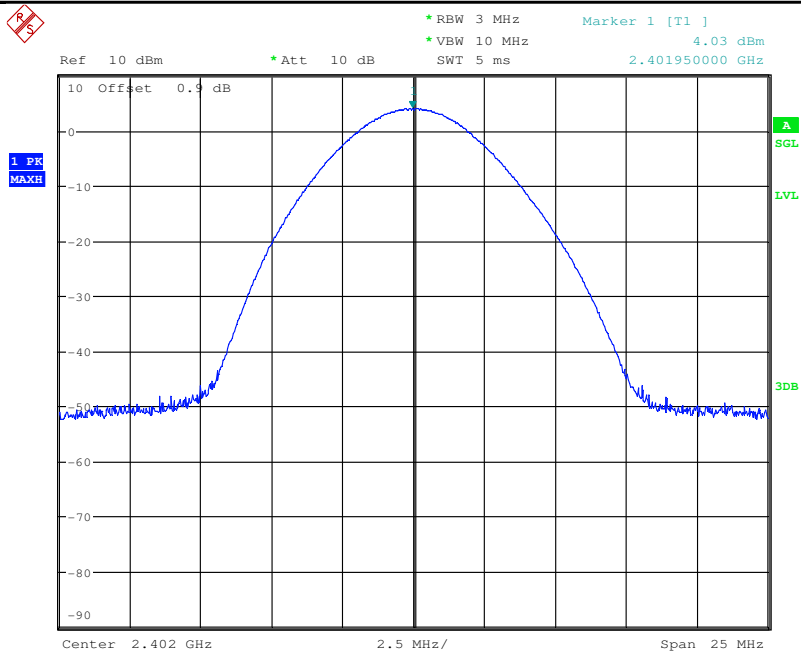




Conducted Peak Output Power\_2DH5\_2441

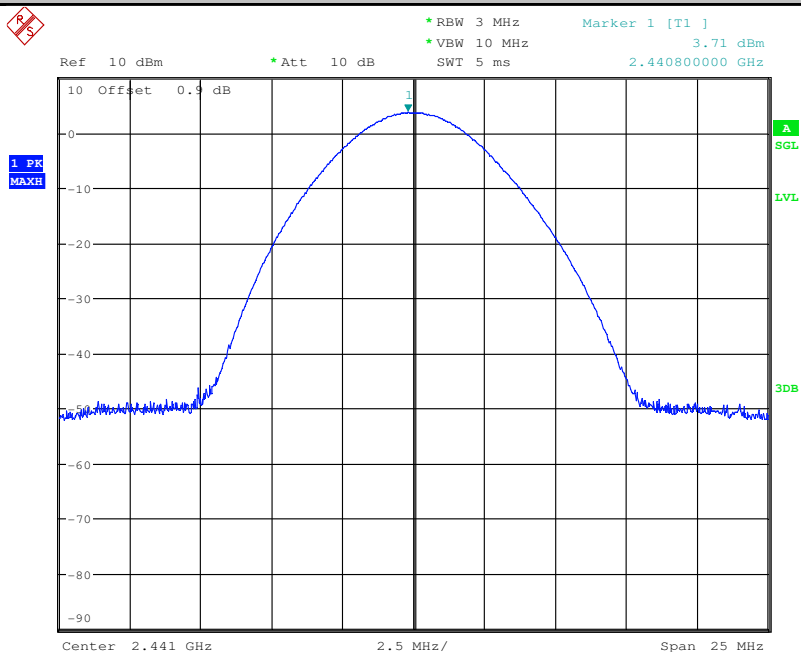


Conducted Peak Output Power\_2DH5\_2480

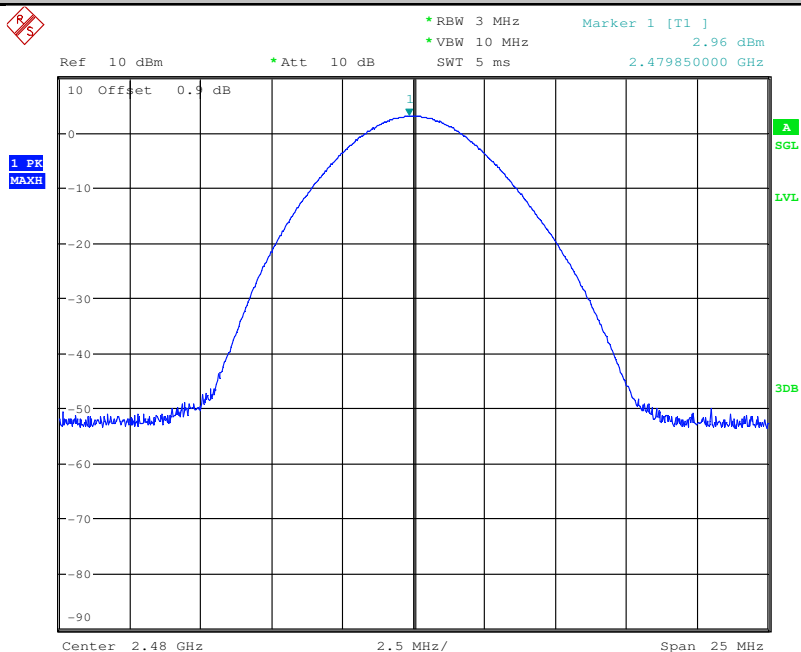





Conducted Peak Output Power\_3DH5\_2402

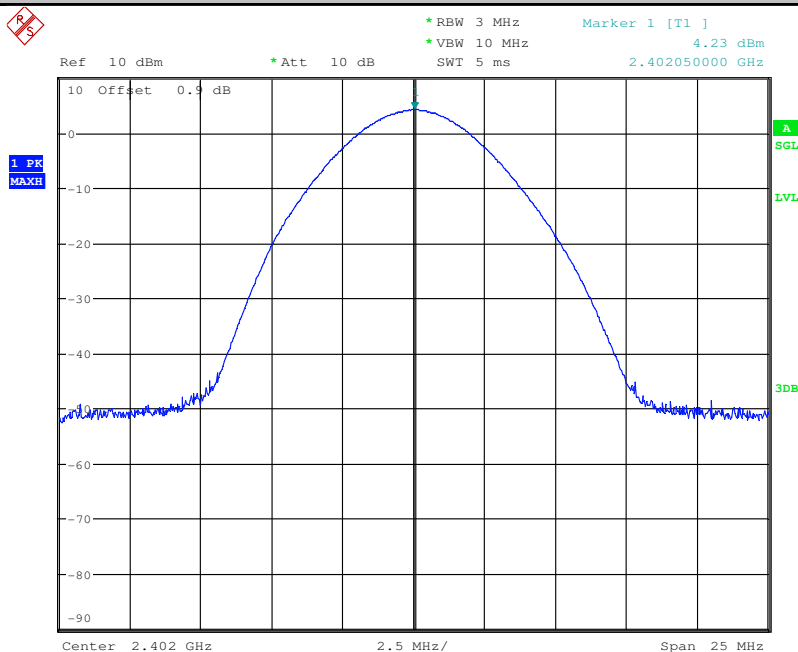

Conducted Peak Output Power\_3DH5\_2441

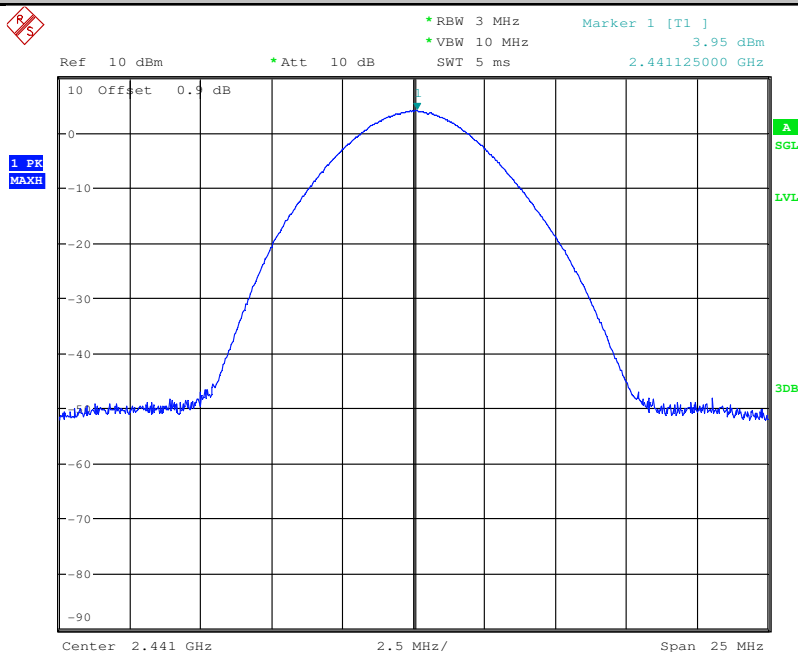

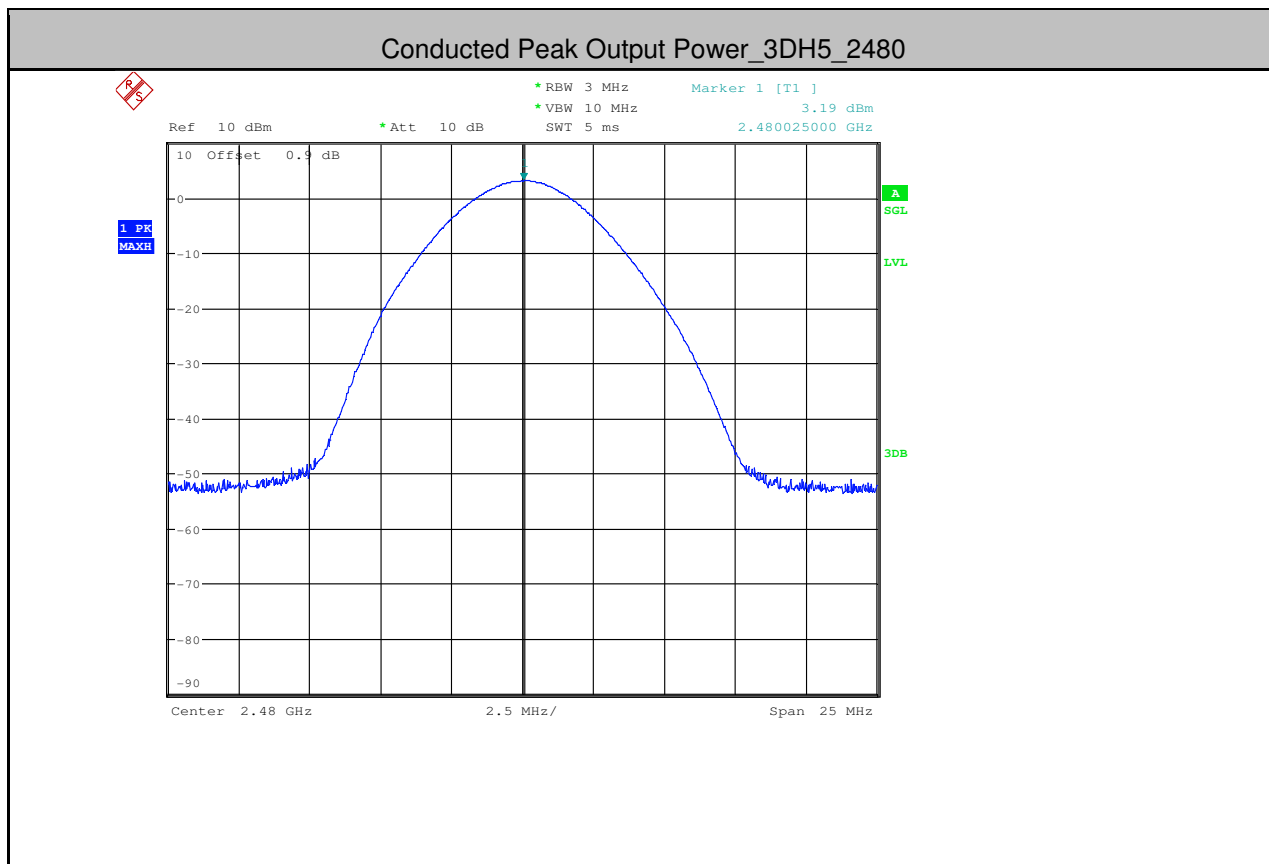





### 3.Carrier Frequency Separation

| Test Mode | Test Channel | Result[MHz] | Verdict |
|-----------|--------------|-------------|---------|
| DH5       | 2441         | 1.014       | PASS    |
| 2DH5      | 2441         | 1.017       | PASS    |
| 3DH5      | 2441         | 0.999       | PASS    |

*Note: According to 20dB bandwidth*

| Test Mode | 20dB bandwidth (kHz)<br>(worse case) | Limit (kHz)<br>(Carrier Frequencies Separation) |
|-----------|--------------------------------------|-------------------------------------------------|
| DH5       | 1132                                 | 754.67                                          |
| 2DH5      | 1412                                 | 941.33                                          |
| 3DH5      | 1442                                 | 961.33                                          |

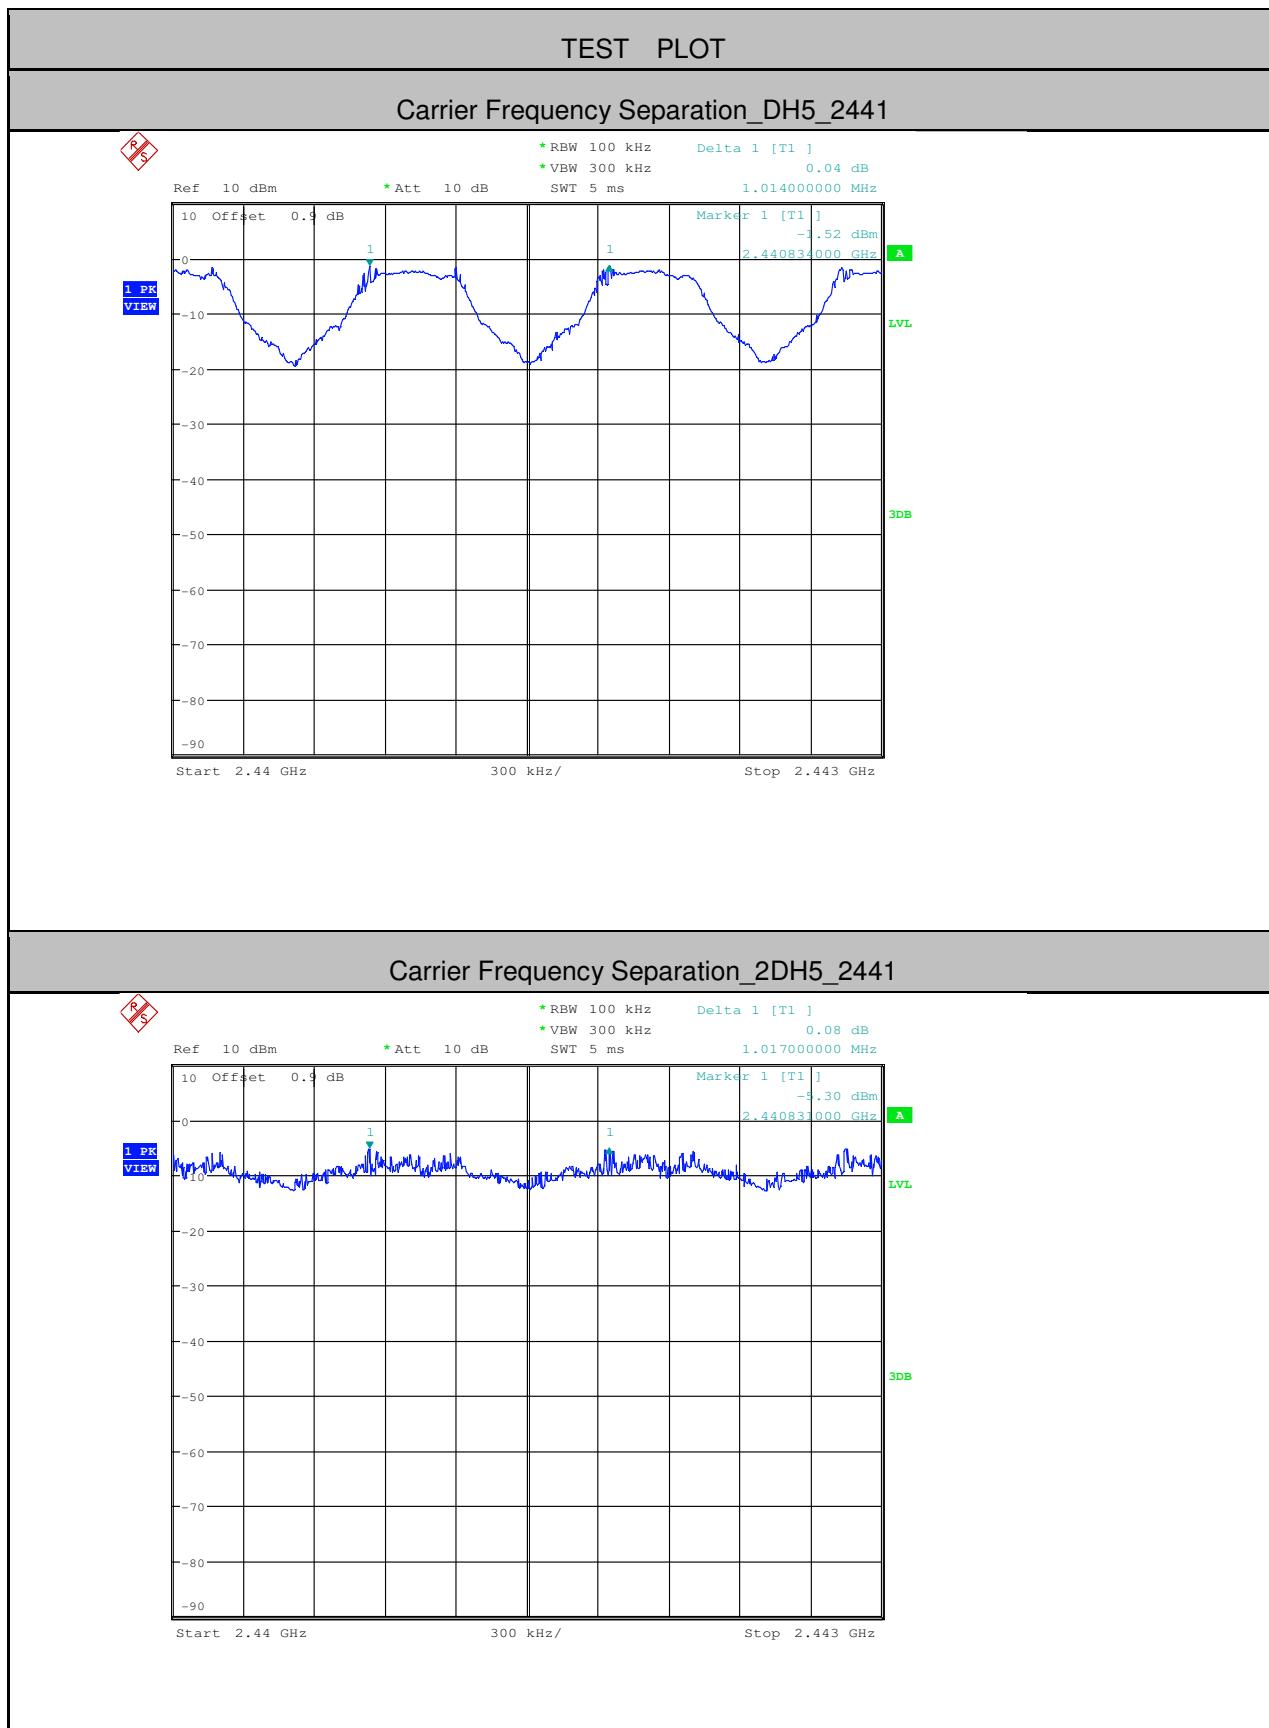

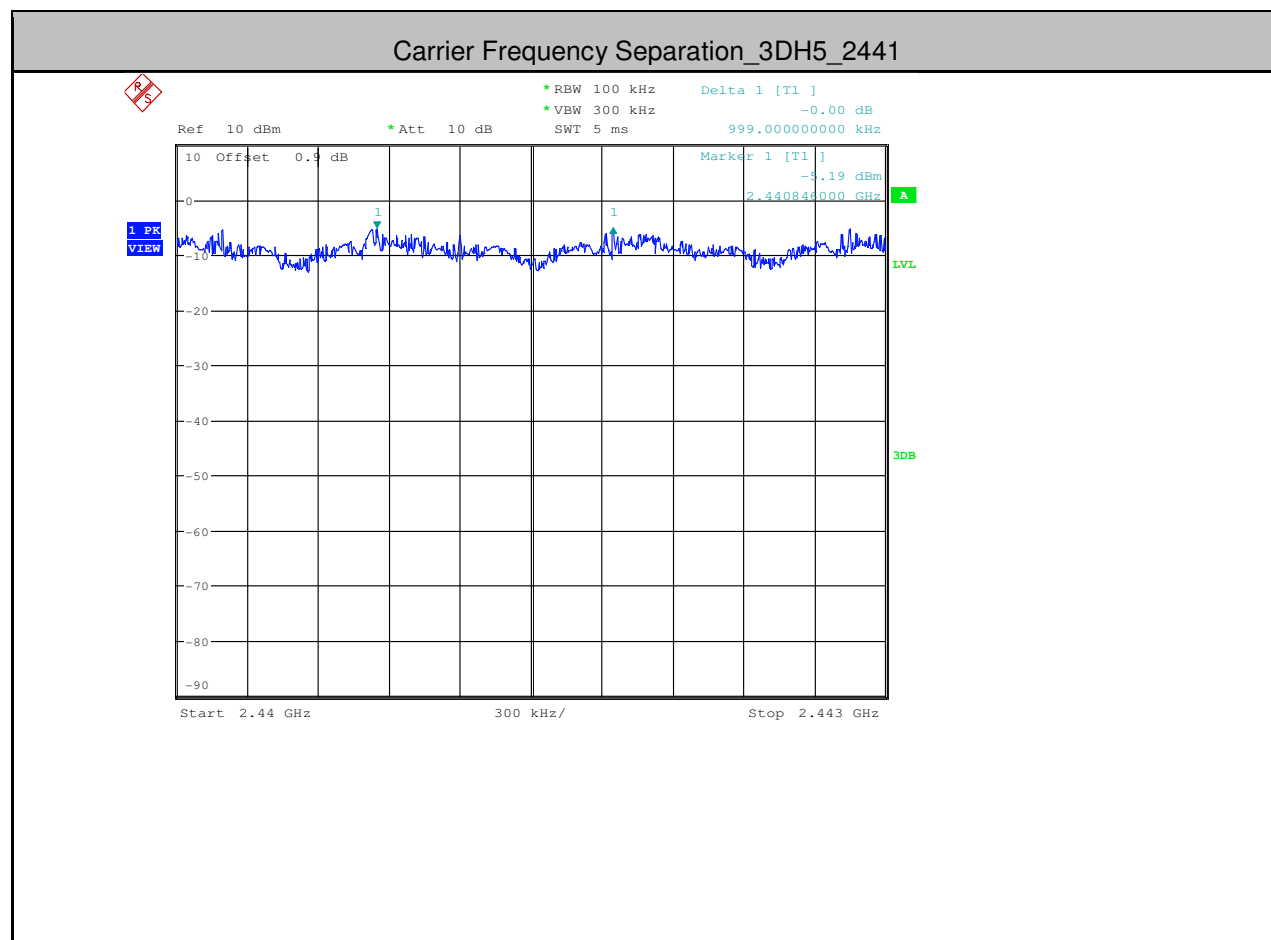




# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM161201140605


Page: 49 of 91


## 4.Dwell Time


| Test Mode | Test Channel | Burst<br>Width[ms/hop/ch] | Total<br>Hops[hop*ch] | Dwell<br>Time[ms] | Limit[ms] | Verdict |
|-----------|--------------|---------------------------|-----------------------|-------------------|-----------|---------|
| DH1       | 2402         | 0.39                      | 320                   | 0.125             | <0.4      | PASS    |
| DH3       | 2402         | 1.65                      | 160                   | 0.264             | <0.4      | PASS    |
| DH5       | 2402         | 2.89                      | 70                    | 0.202             | <0.4      | PASS    |
| 2DH1      | 2402         | 0.4                       | 320                   | 0.128             | <0.4      | PASS    |
| 2DH3      | 2402         | 1.66                      | 170                   | 0.282             | <0.4      | PASS    |
| 2DH5      | 2402         | 2.9                       | 120                   | 0.348             | <0.4      | PASS    |
| 3DH1      | 2402         | 0.4                       | 310                   | 0.124             | <0.4      | PASS    |
| 3DH3      | 2402         | 1.66                      | 150                   | 0.249             | <0.4      | PASS    |
| 3DH5      | 2402         | 2.9                       | 110                   | 0.319             | <0.4      | PASS    |

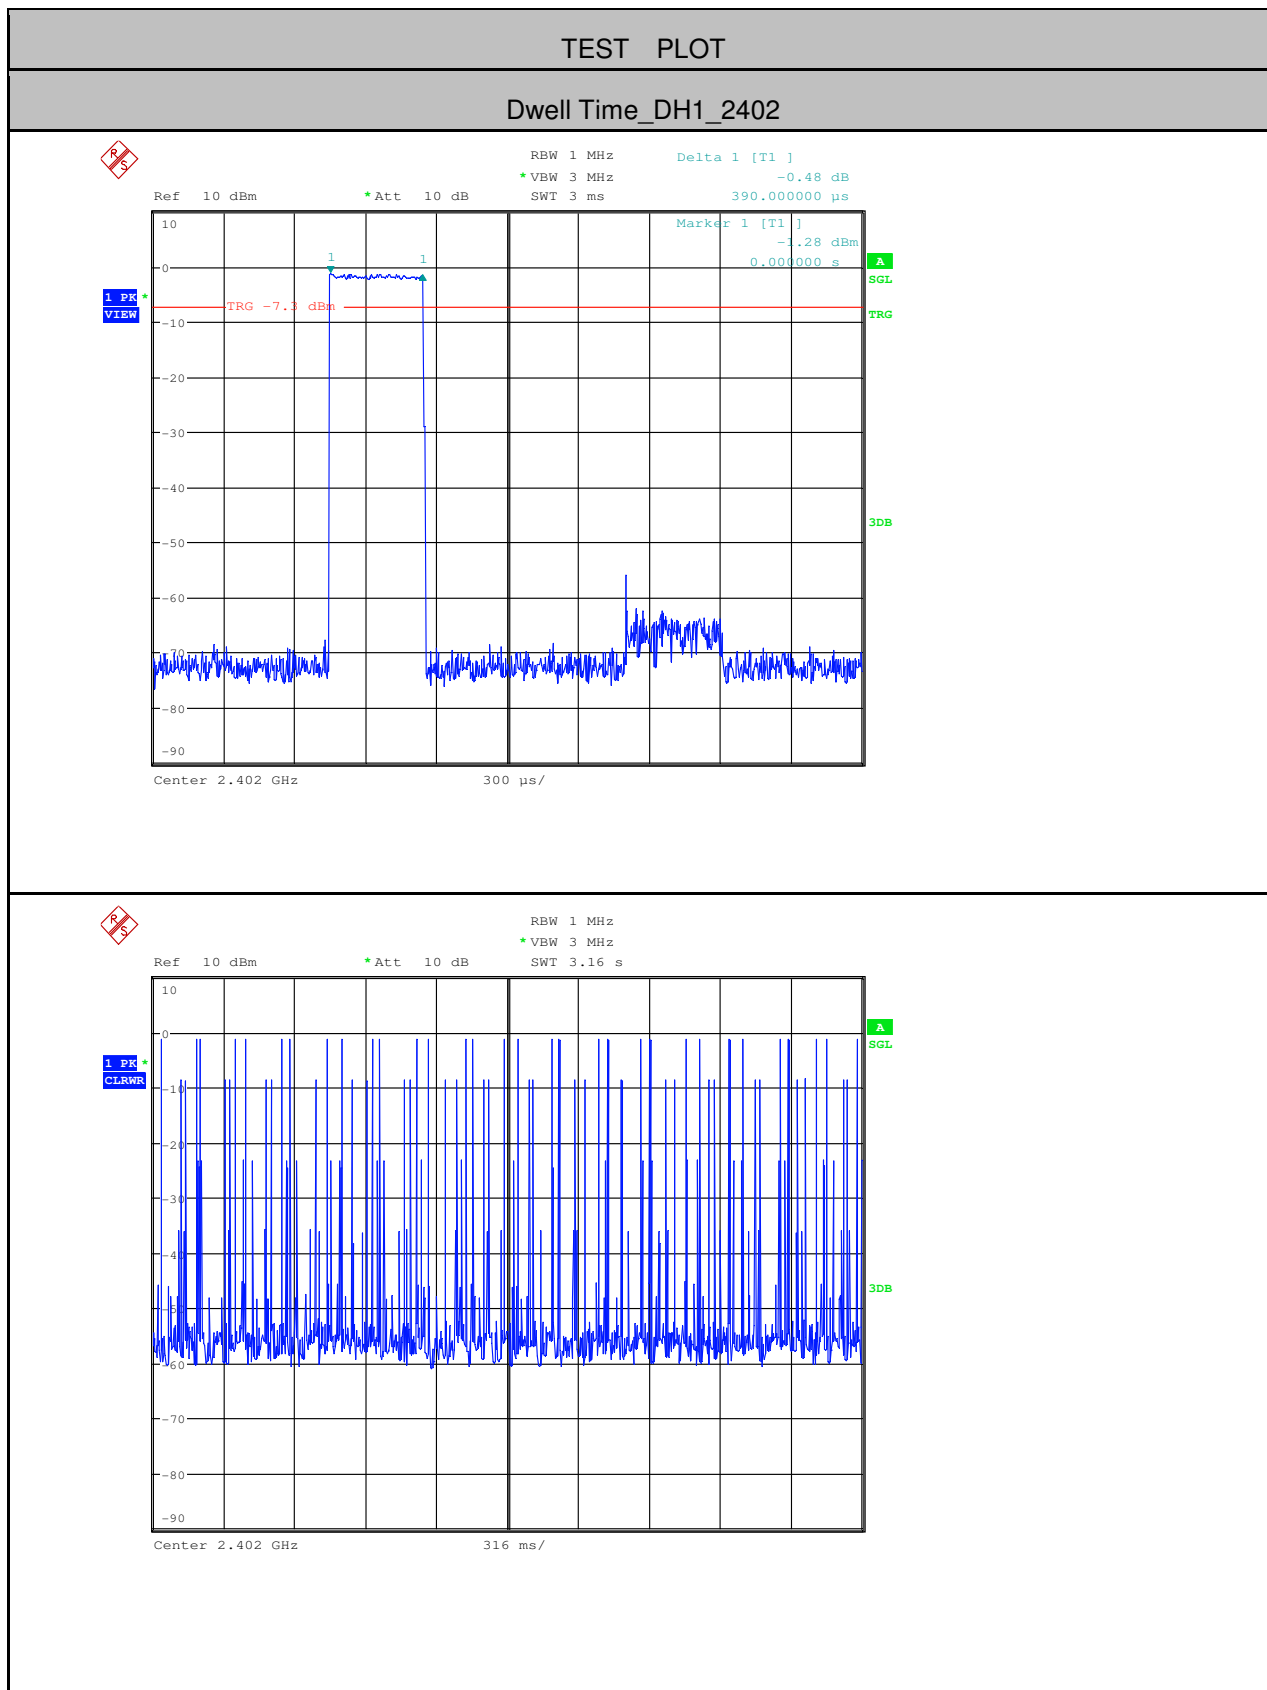


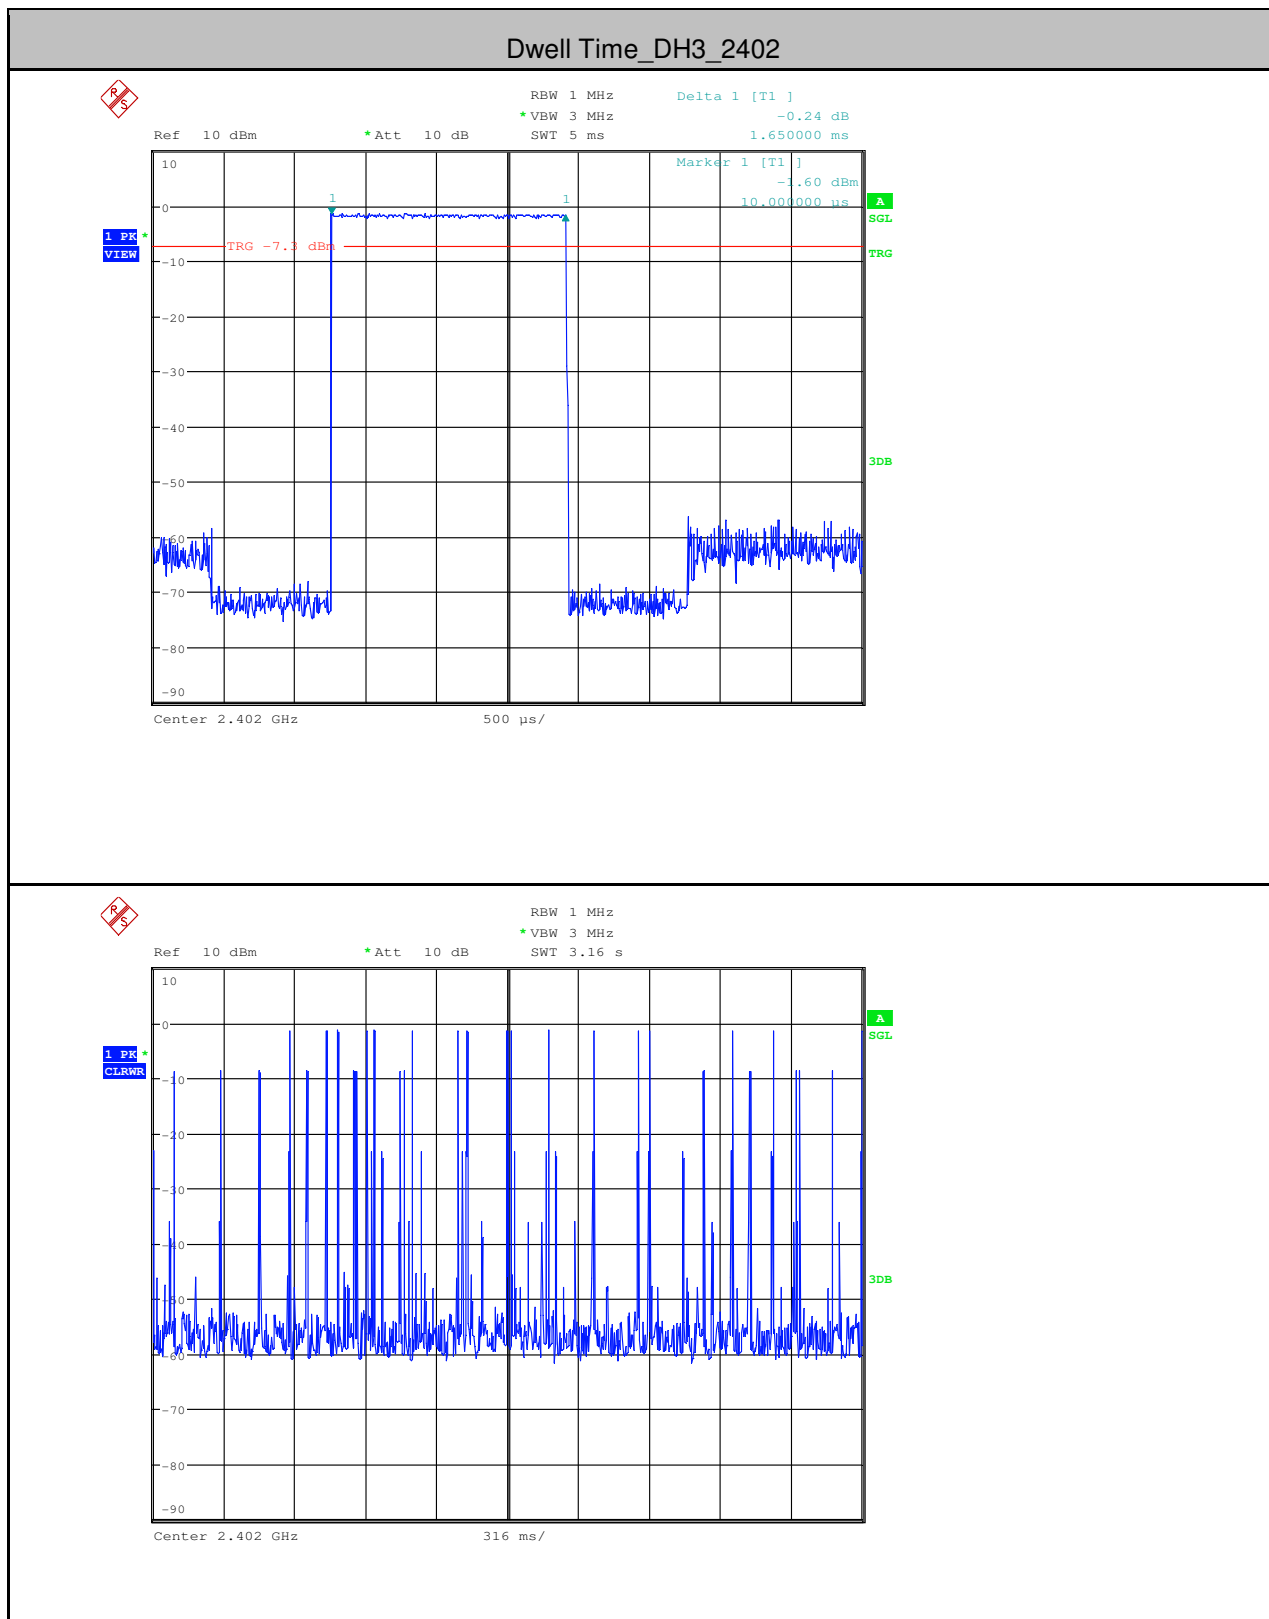


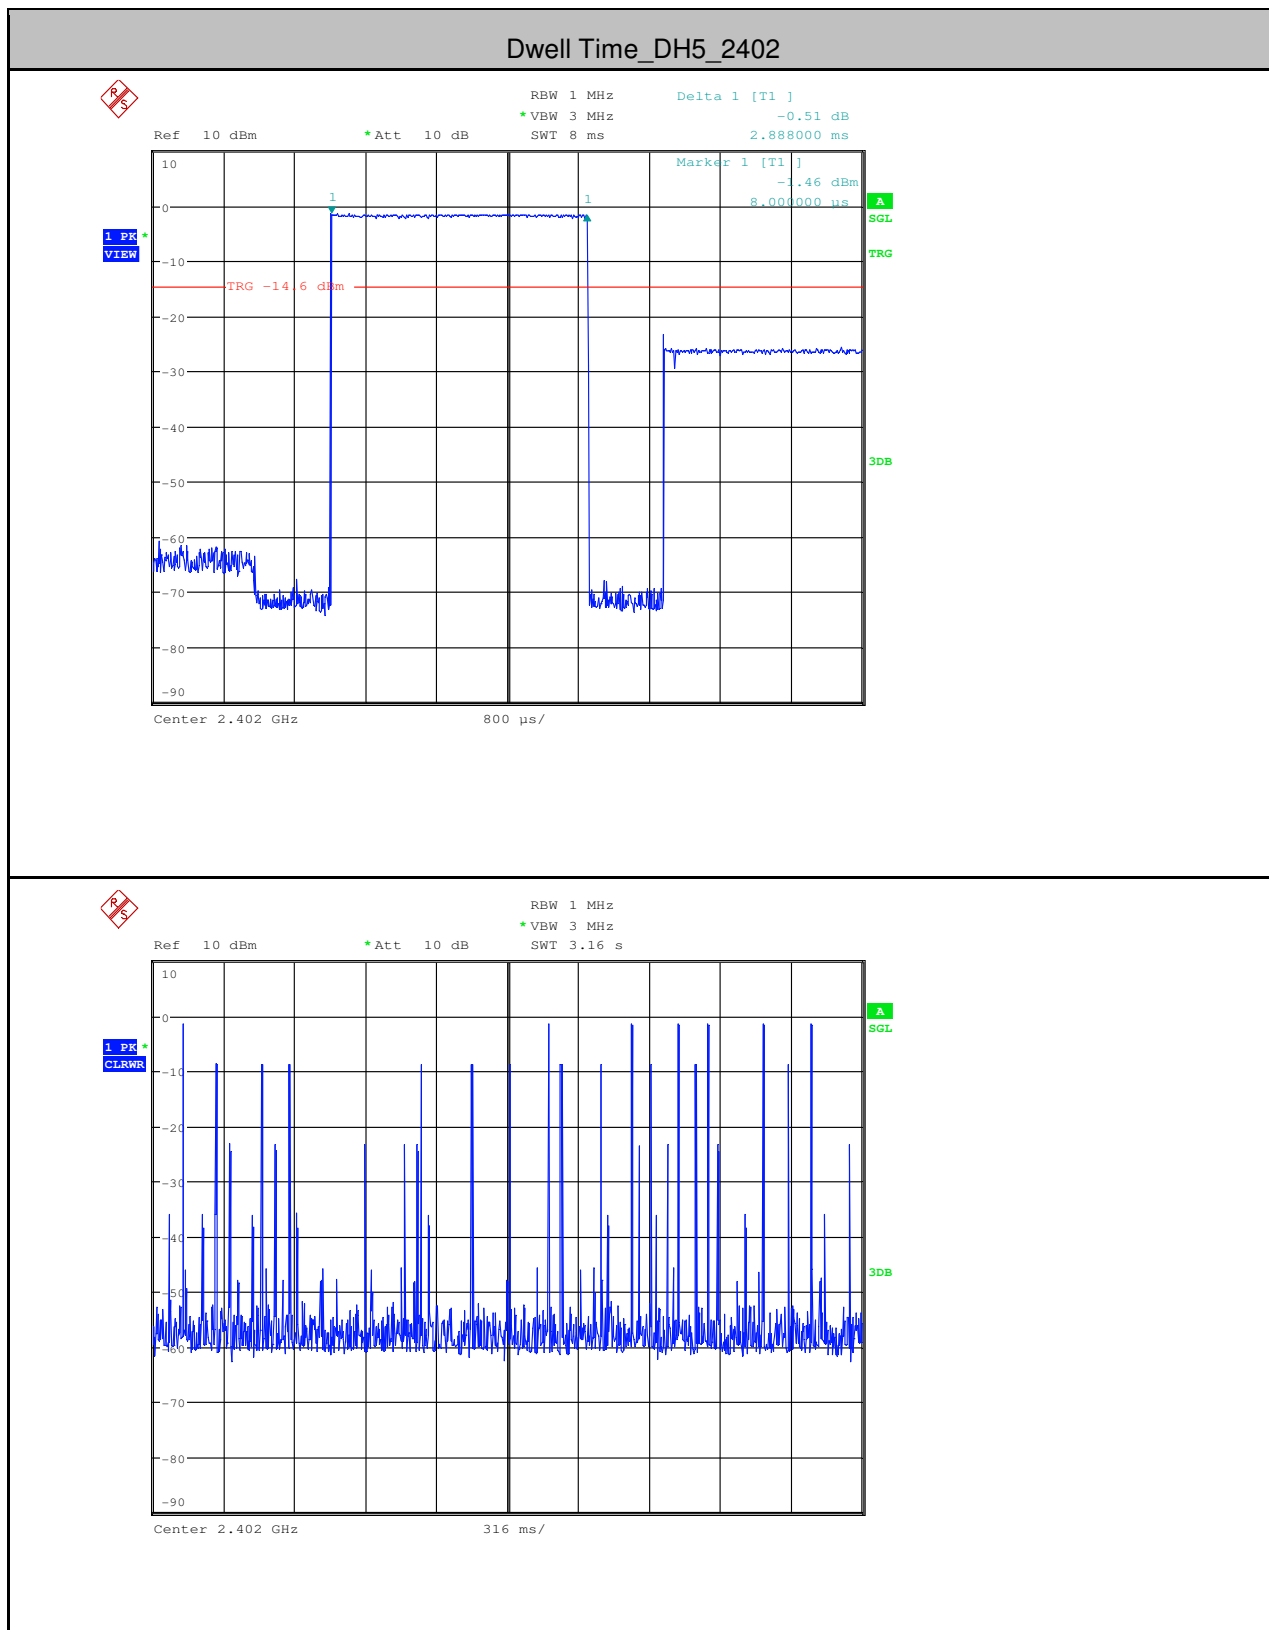

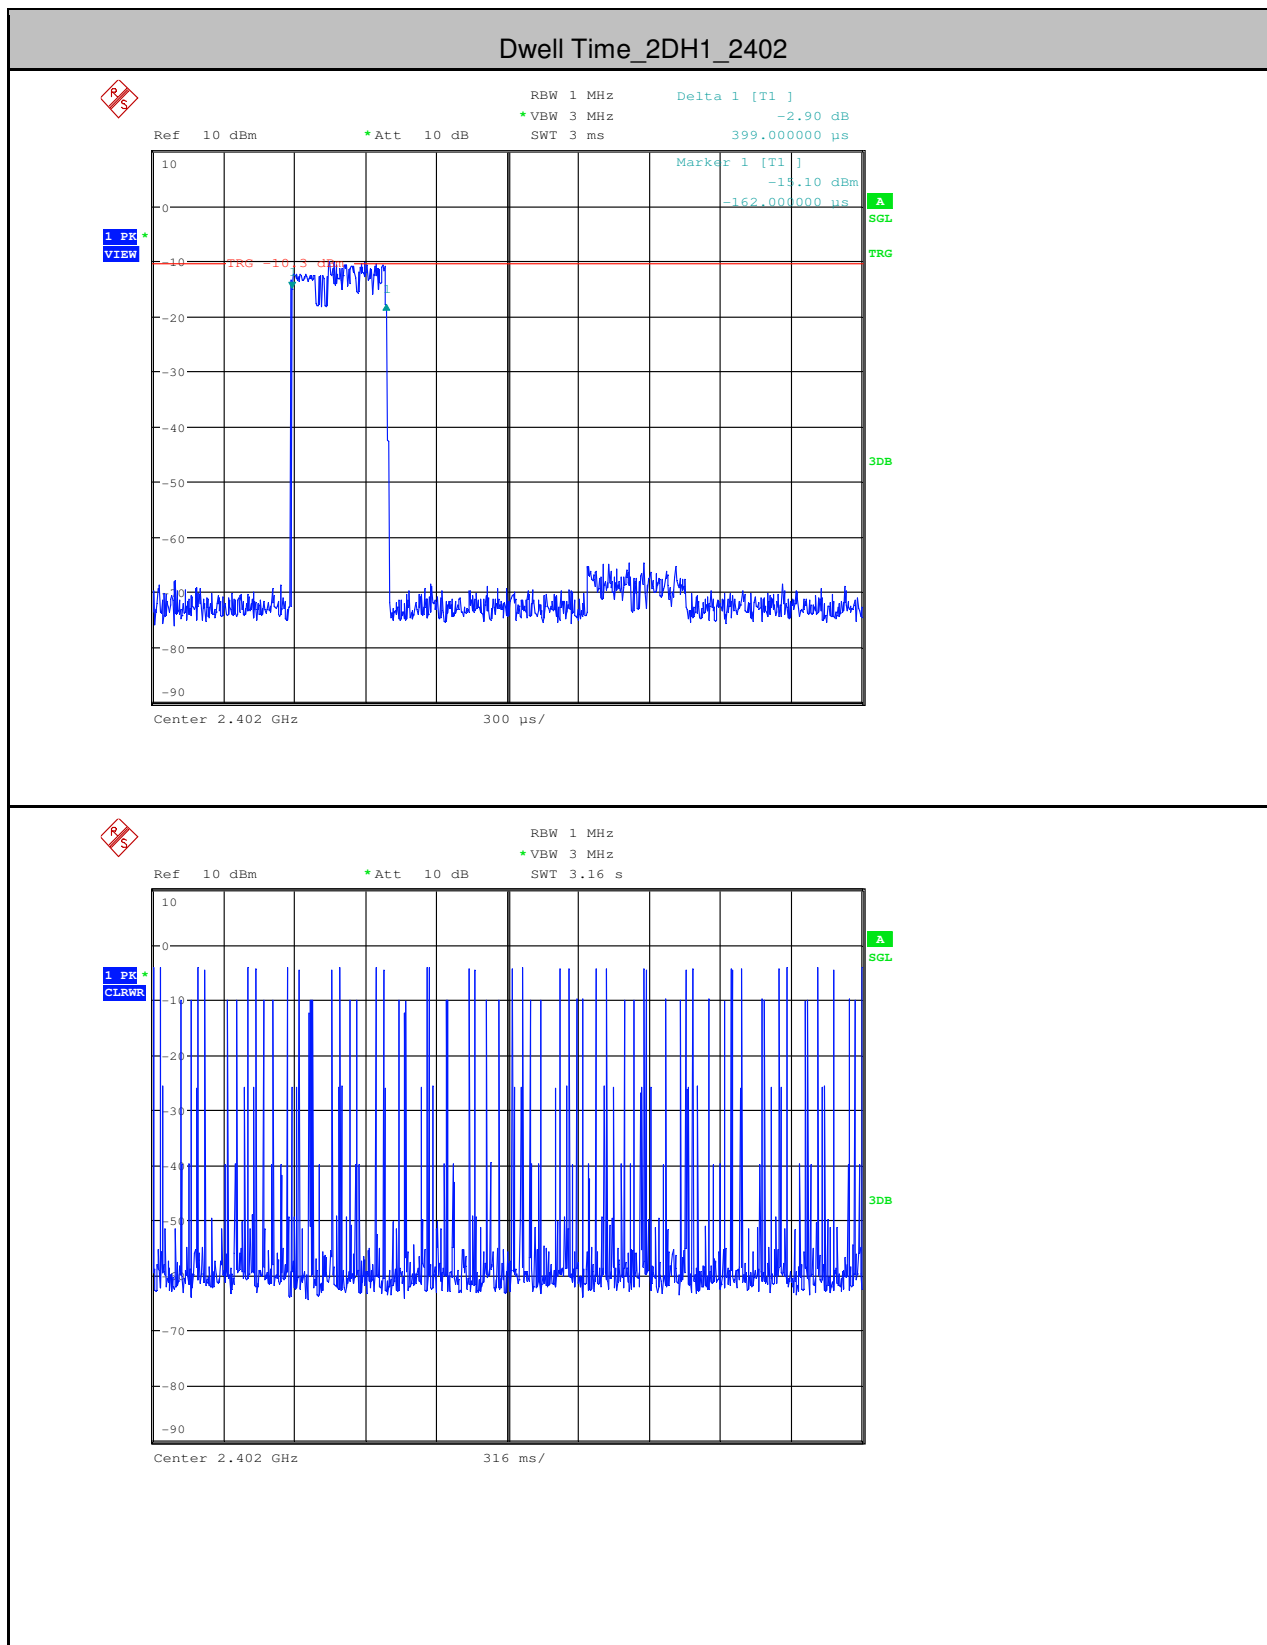

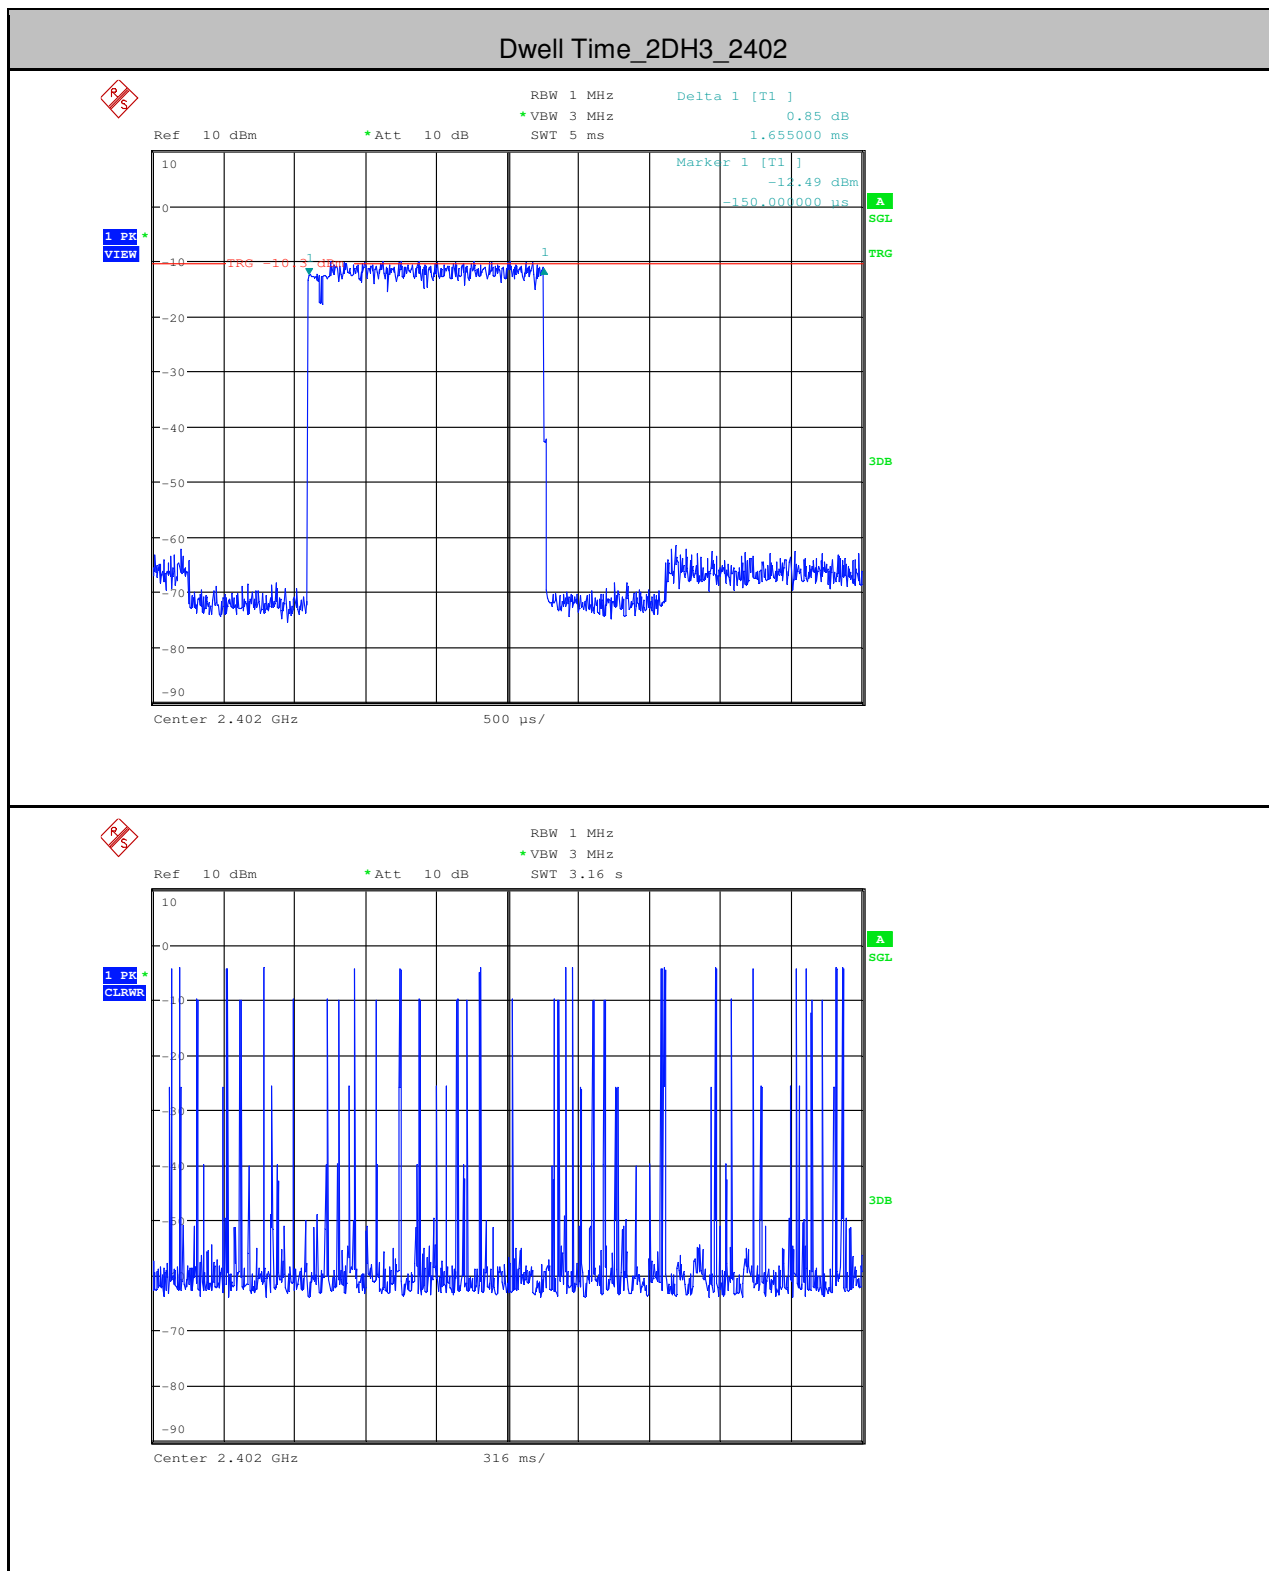

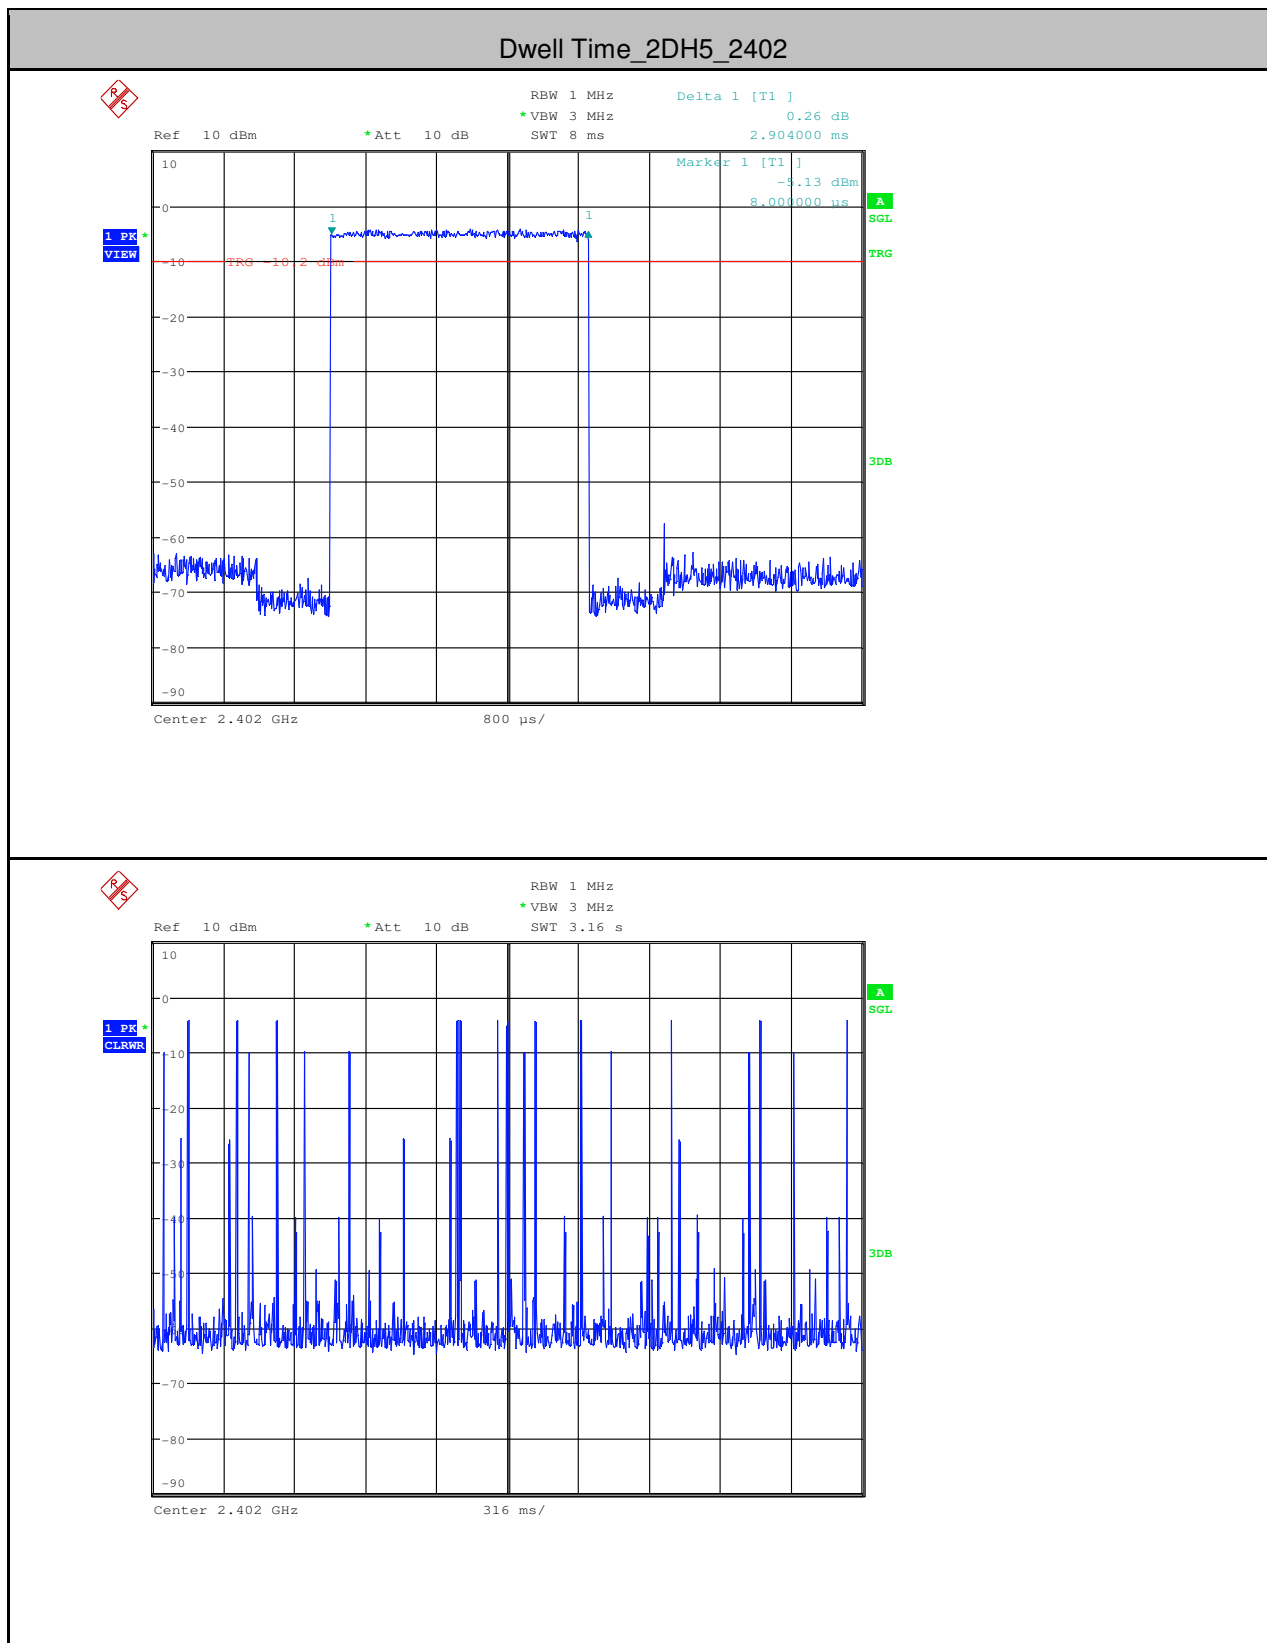


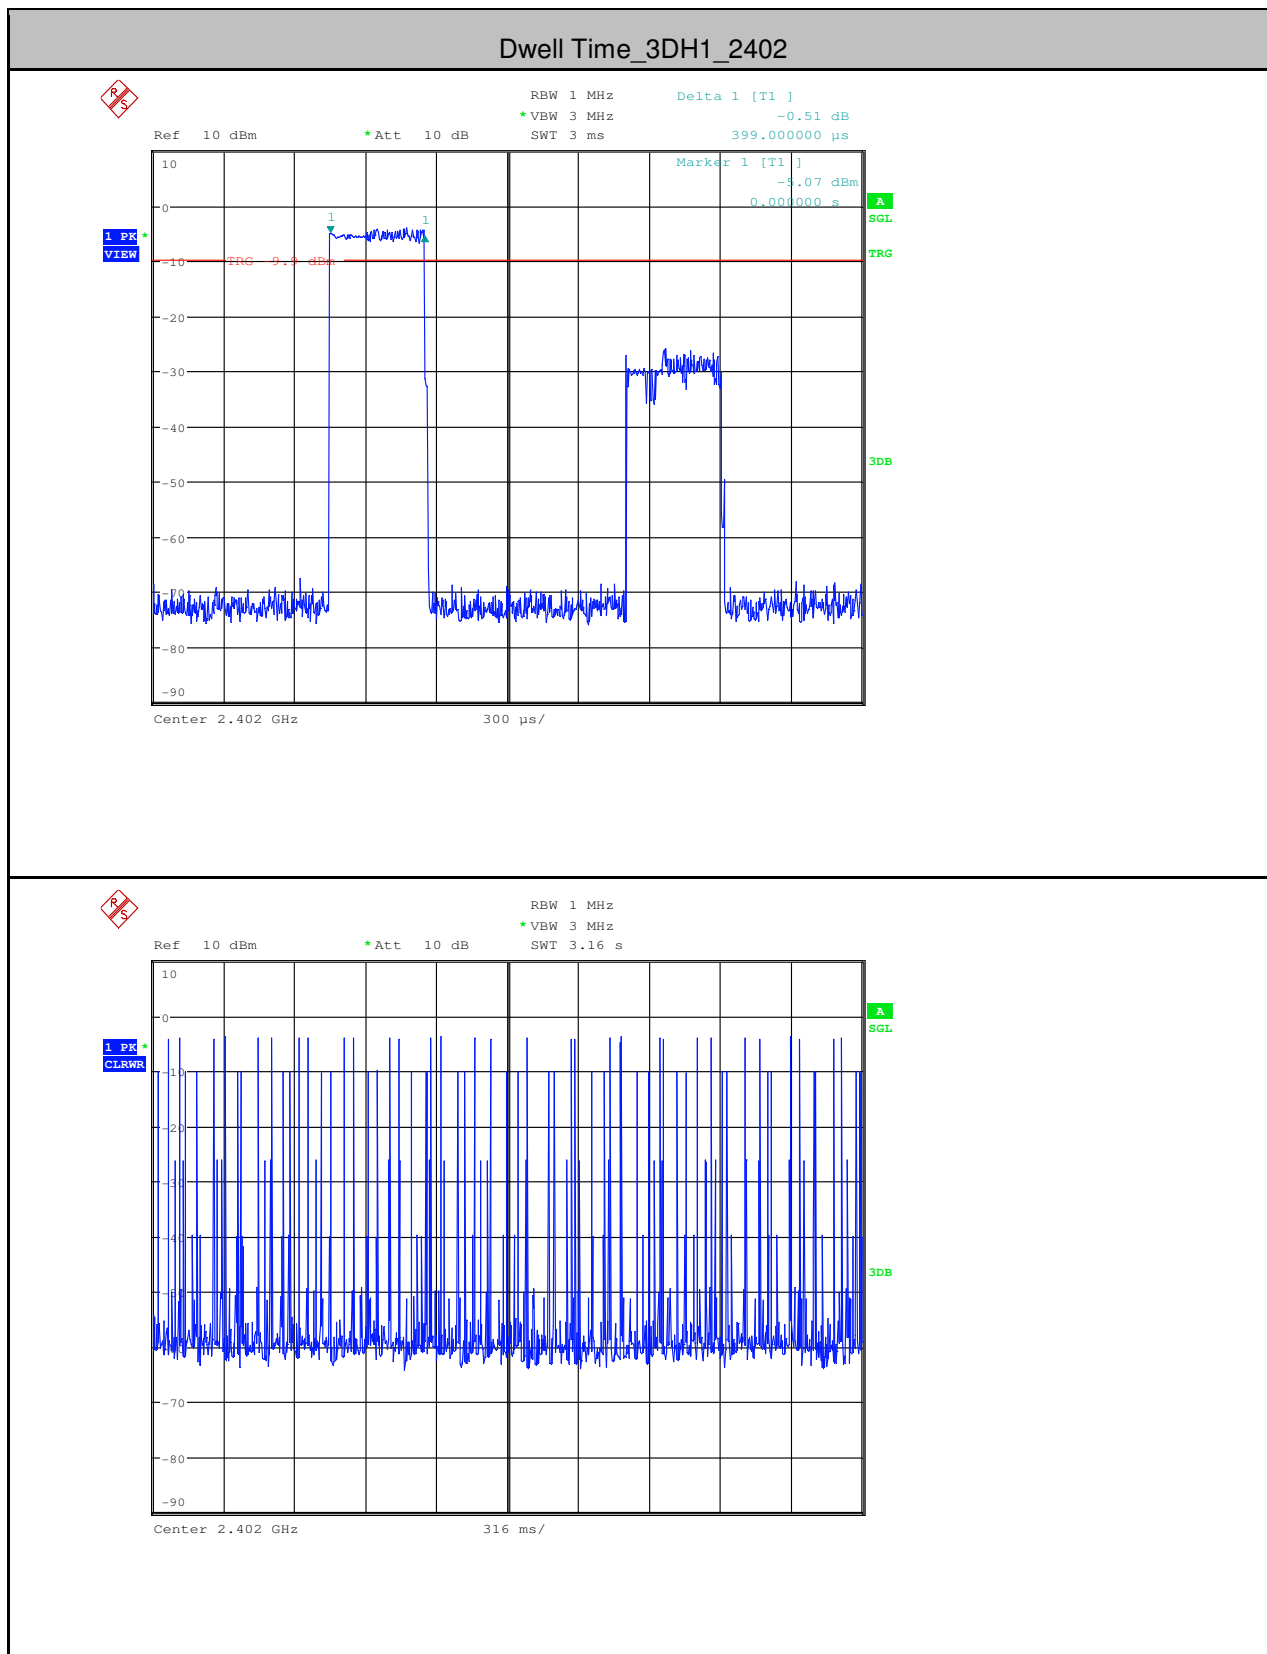




# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM161201140605  
Page: 57 of 91

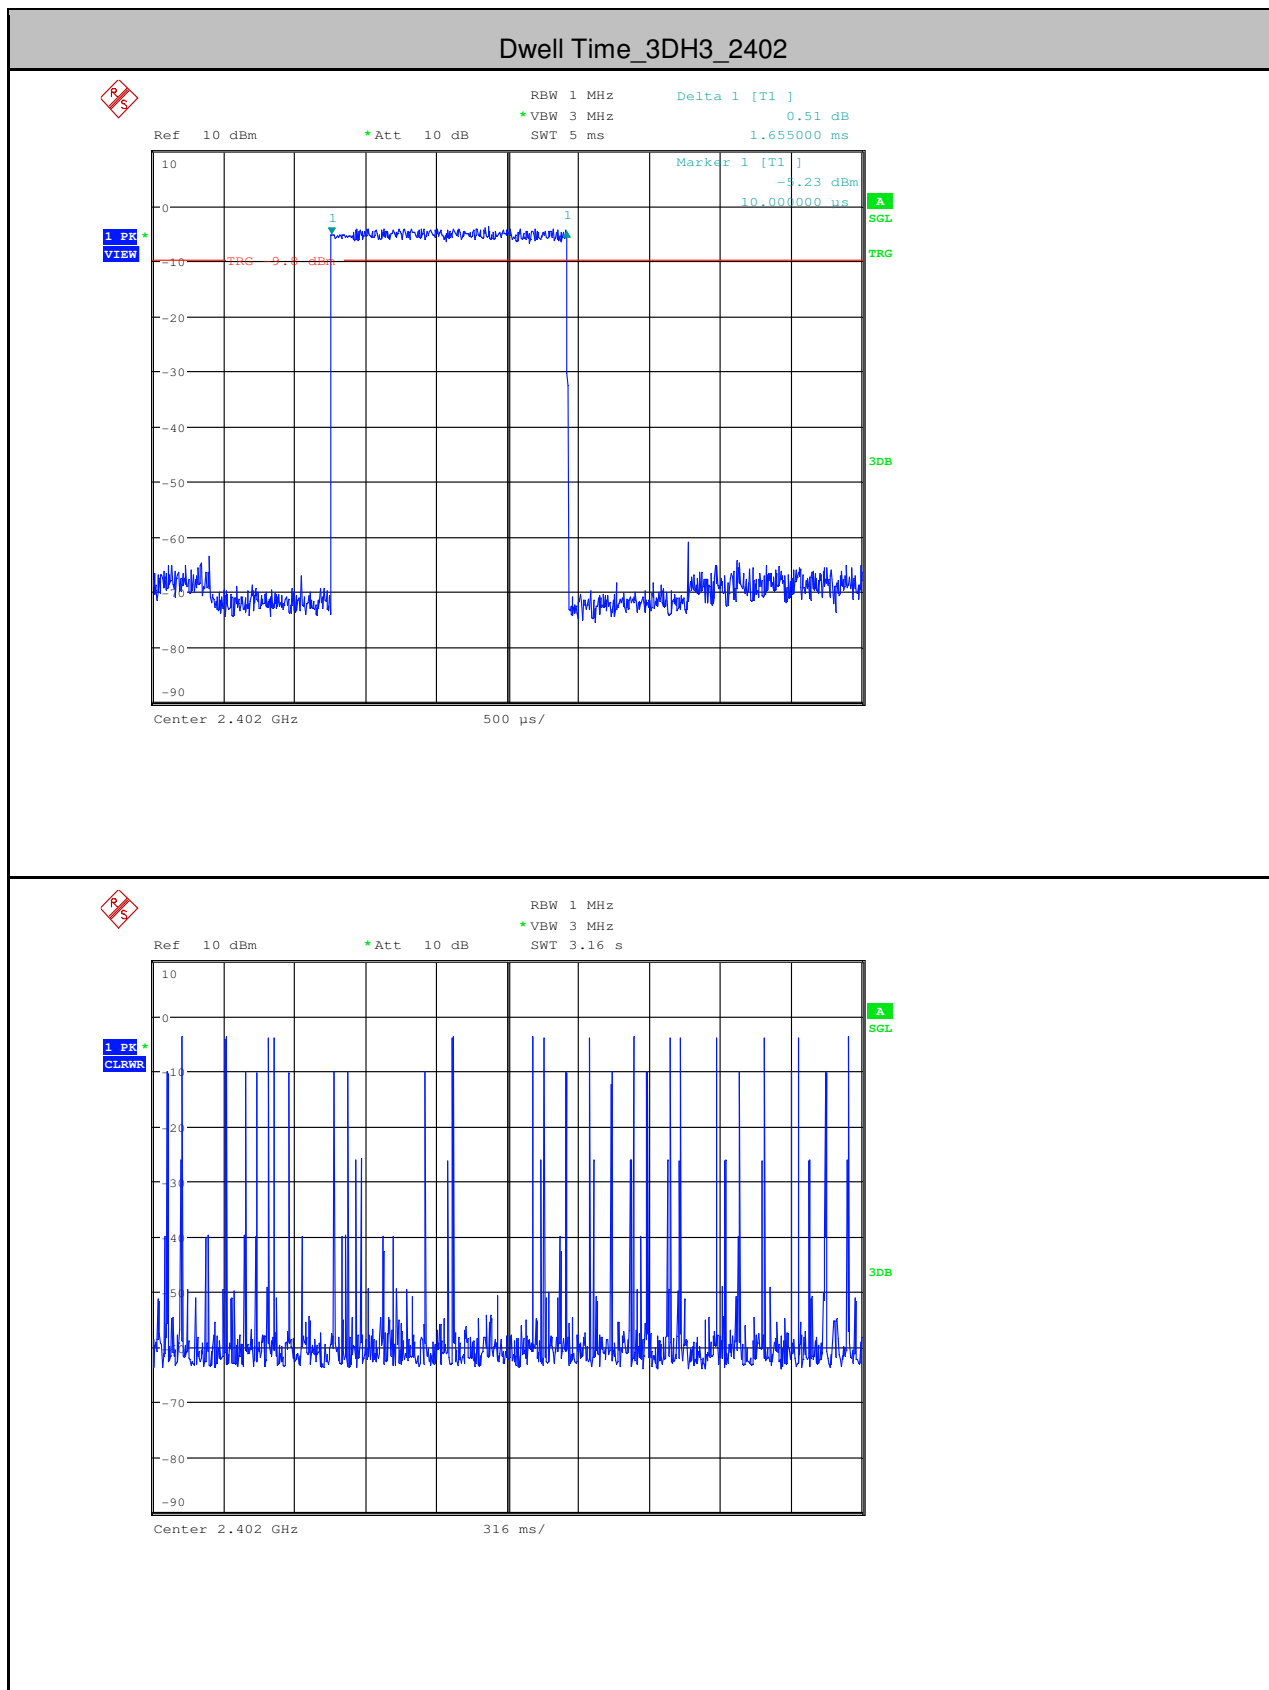


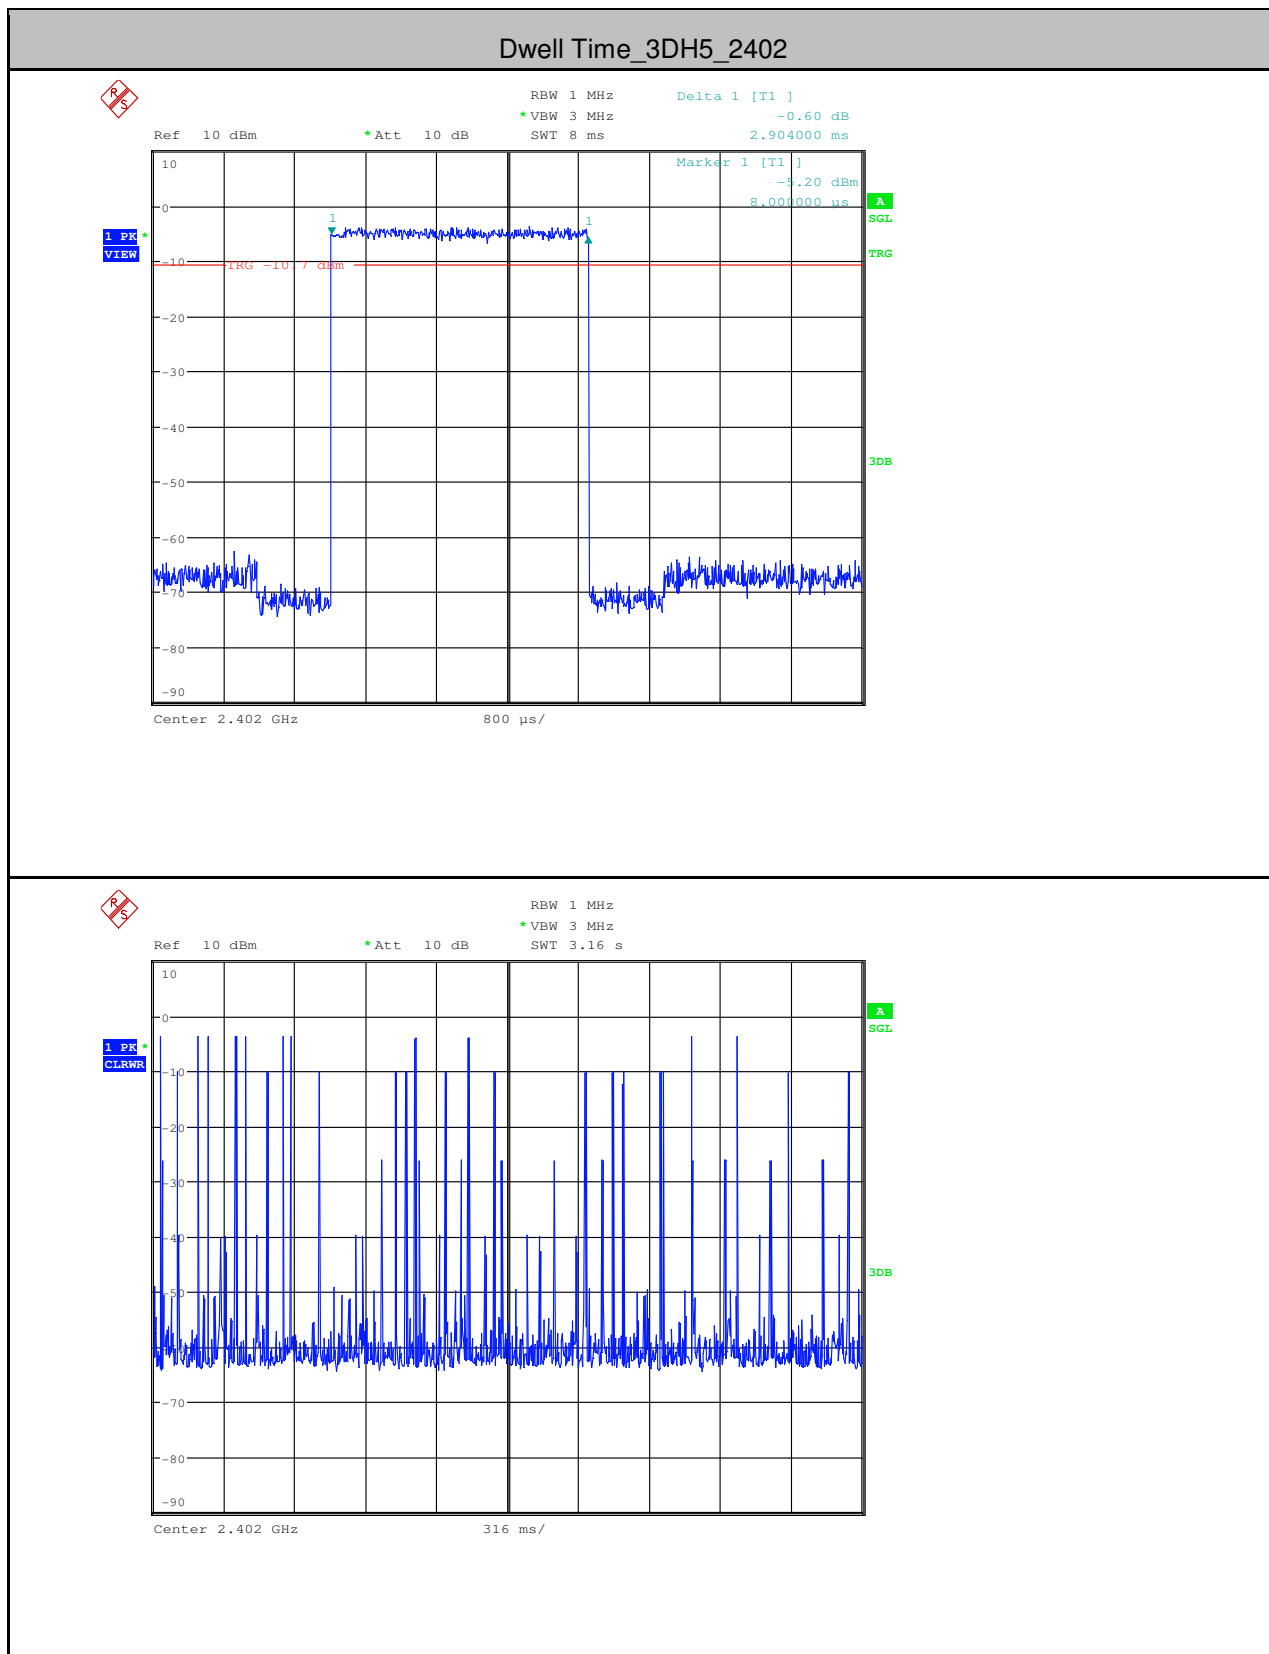




## 6.Hopping Channel Number

| Test Mode | Test Channel | Number of Hopping Channel[N] | Limit[N] | Verdict |
|-----------|--------------|------------------------------|----------|---------|
| DH5       | 2402         | 79                           | >=15     | PASS    |
| 2DH5      | 2402         | 79                           | >=15     | PASS    |
| 3DH5      | 2402         | 79                           | >=15     | PASS    |

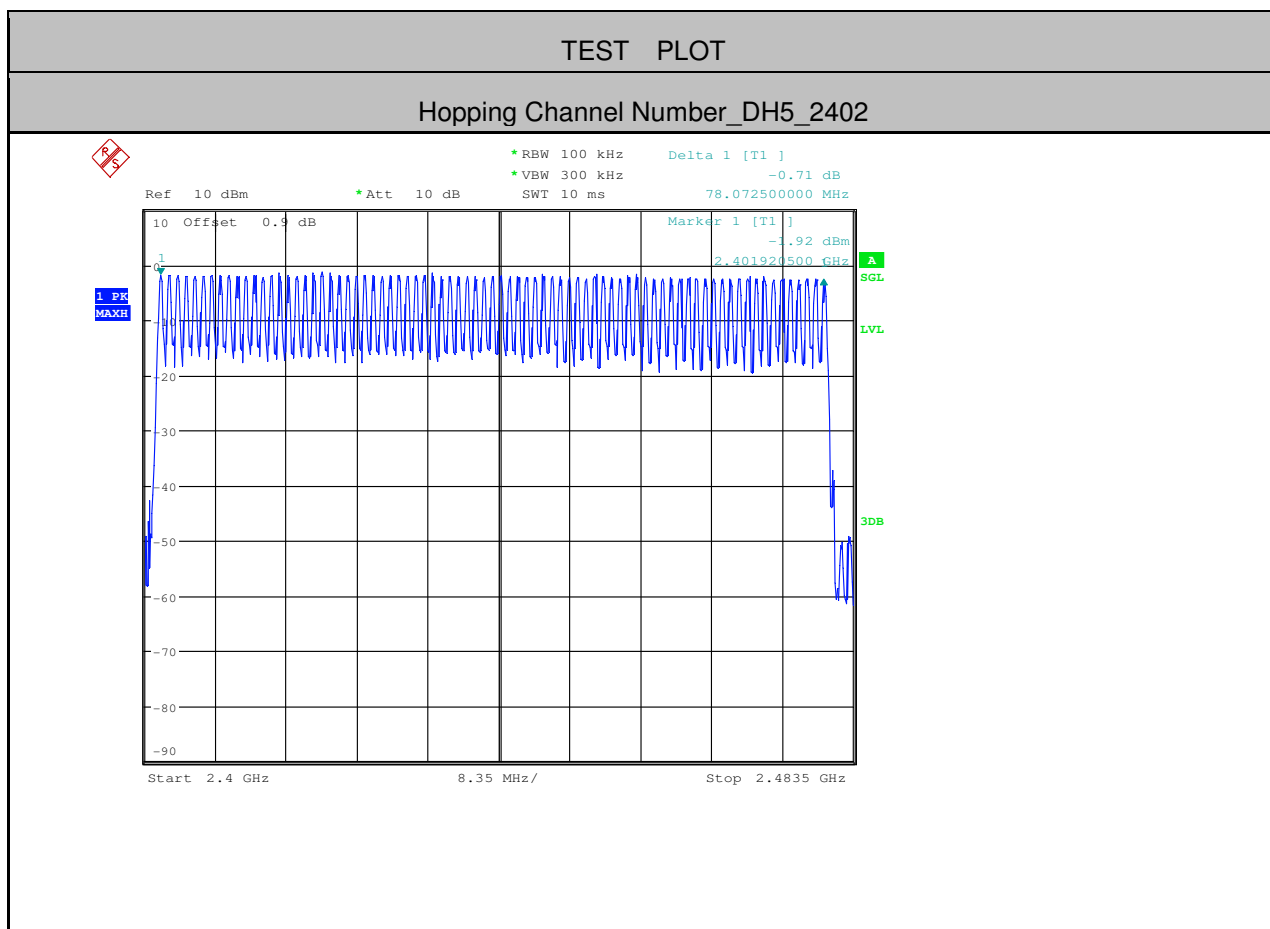

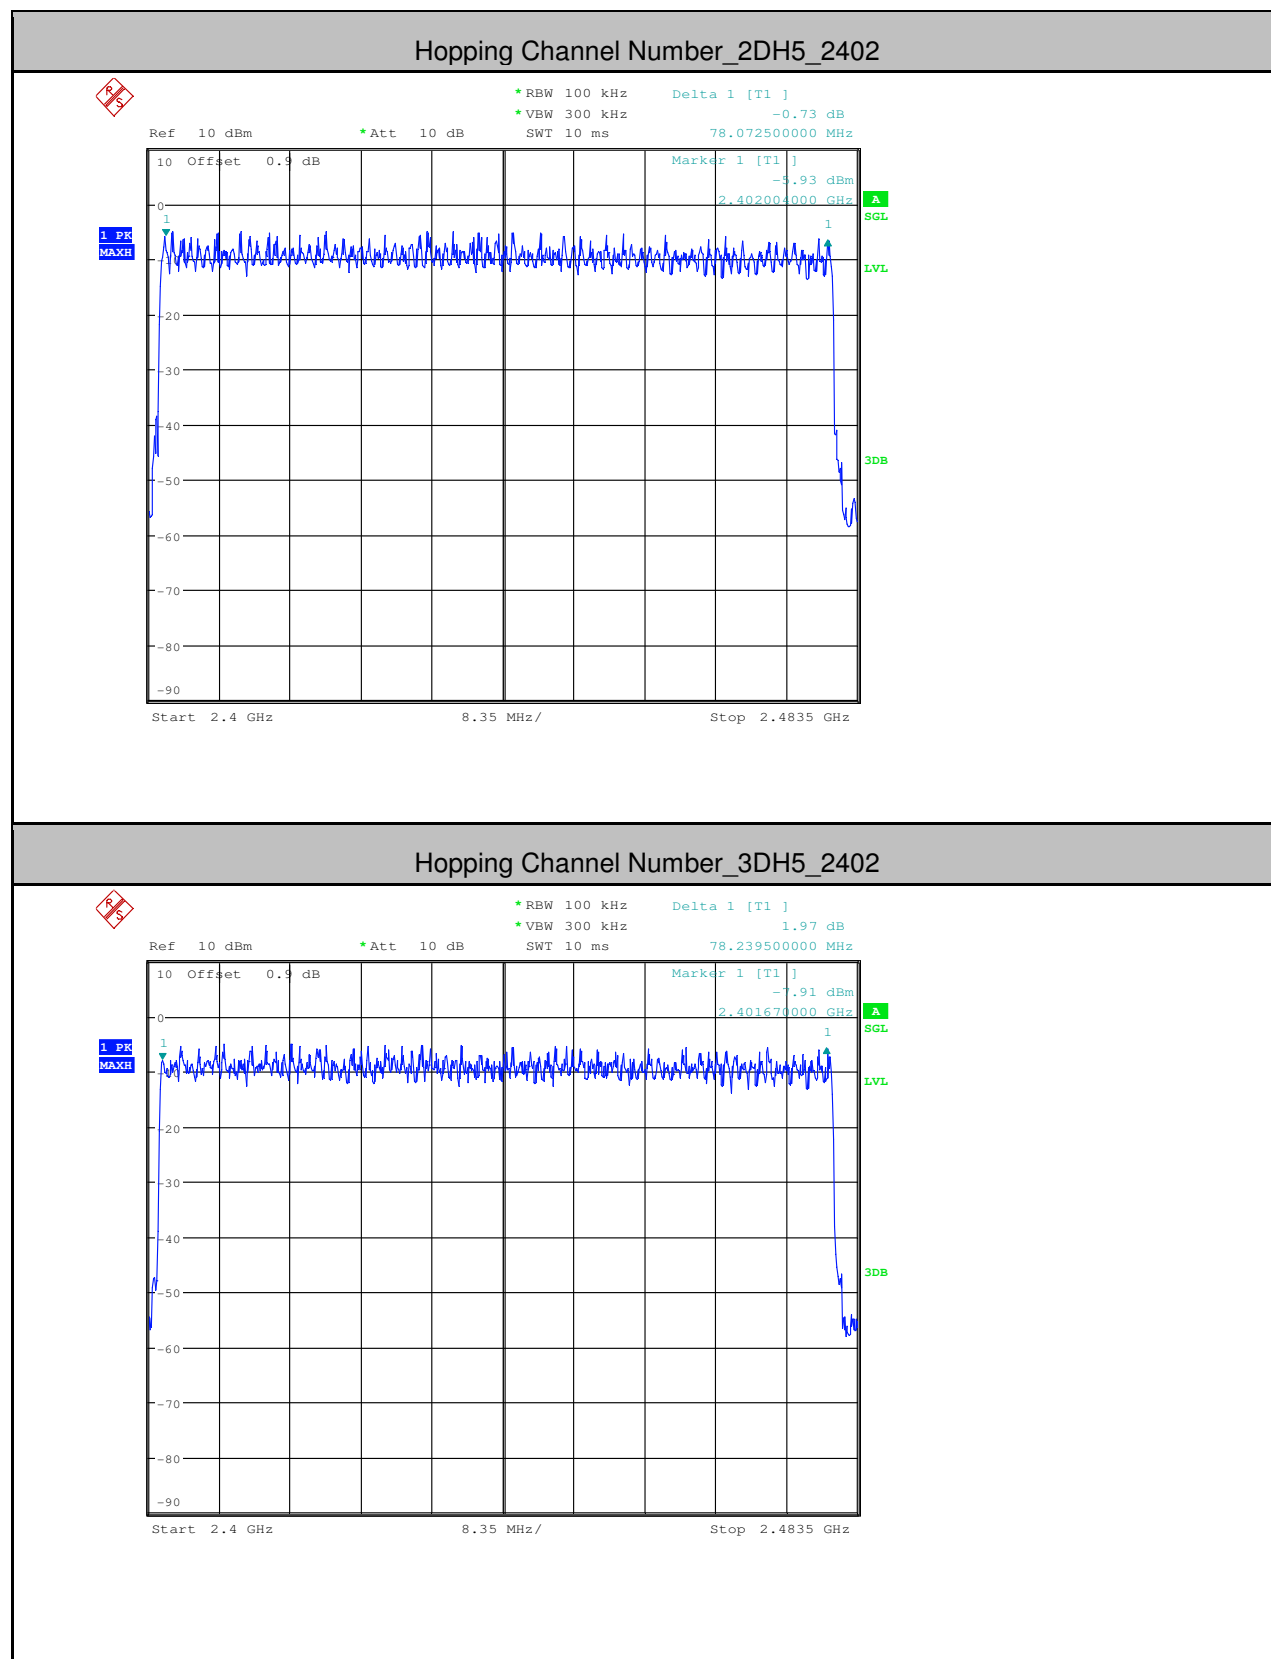




## 5. Band-edge for RF Conducted Emissions

| Test Mode | Test Channel | Hopping | Carrier Power[dBm] | Max. Spurious Level [dBm] | Limit[dBm] | Verdict |
|-----------|--------------|---------|--------------------|---------------------------|------------|---------|
| DH5       | 2402         | Off     | 1.590              | -44.969                   | <-18.41    | PASS    |
| DH5       | 2480         | Off     | 0.110              | -60.998                   | <-19.89    | PASS    |
| 2DH5      | 2402         | Off     | -1.020             | -47.814                   | <-21.02    | PASS    |
| 2DH5      | 2480         | Off     | -2.300             | -61.979                   | <-22.3     | PASS    |
| 3DH5      | 2402         | Off     | -0.900             | -47.303                   | <-20.9     | PASS    |
| 3DH5      | 2480         | Off     | -1.820             | -62.376                   | <-21.82    | PASS    |
| DH5       | 2402         | On      | -1.850             | -47.862                   | <-21.85    | PASS    |
| DH5       | 2480         | On      | -2.780             | -49.609                   | <-22.78    | PASS    |
| 2DH5      | 2402         | On      | -6.930             | -51.272                   | <-26.93    | PASS    |
| 2DH5      | 2480         | On      | -7.230             | -54.152                   | <-27.23    | PASS    |
| 3DH5      | 2402         | On      | -6.460             | -51.101                   | <-26.46    | PASS    |
| 3DH5      | 2480         | On      | -6.040             | -53.436                   | <-26.04    | PASS    |




TEST PLOT

Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping Off

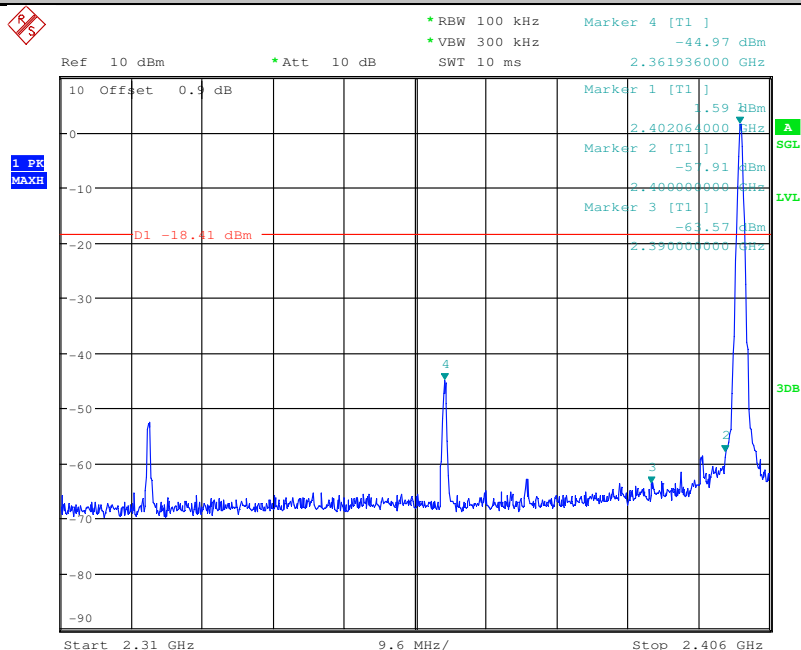


Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping Off

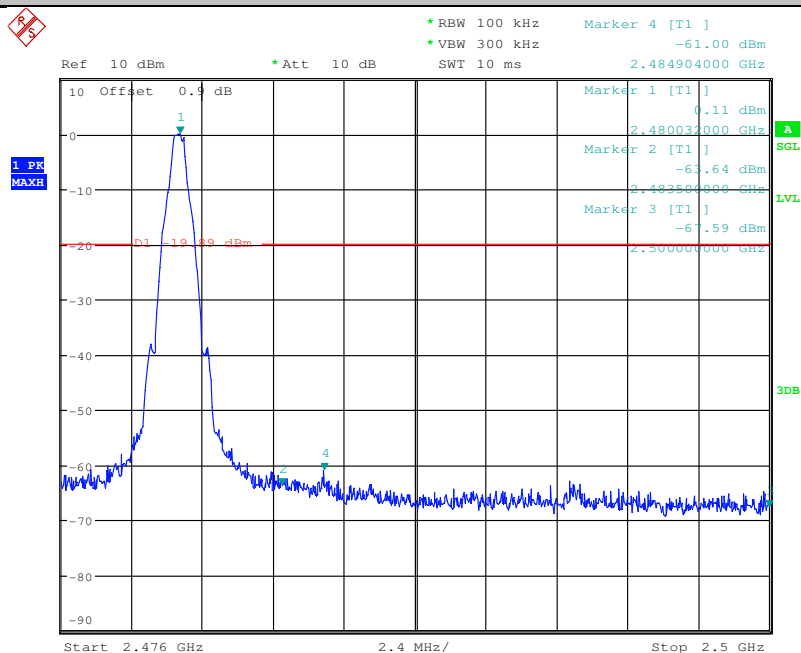




Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping Off

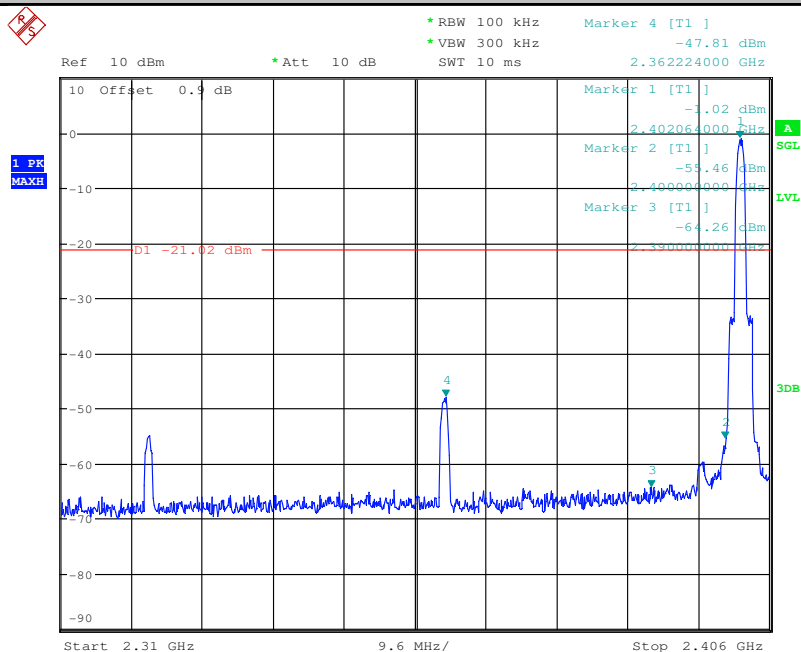


Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping Off

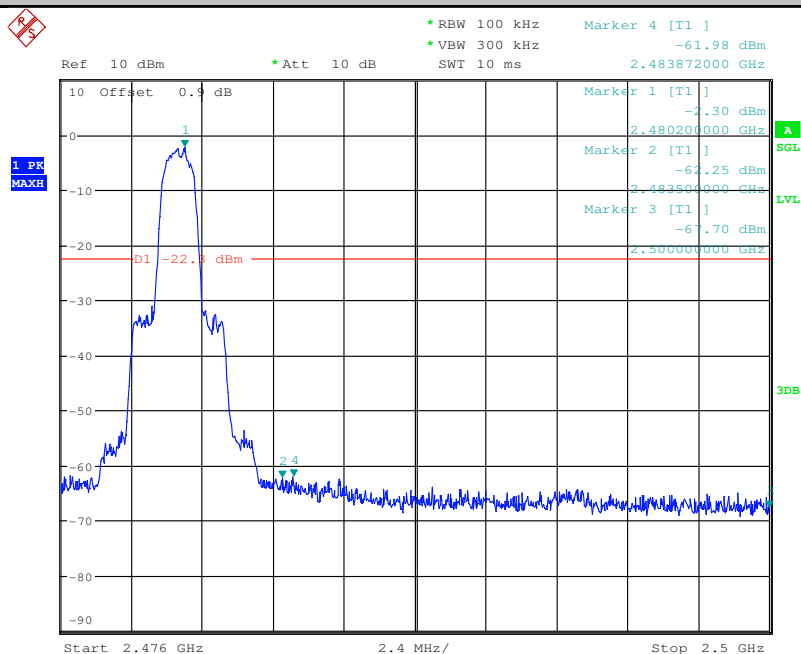




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping Off

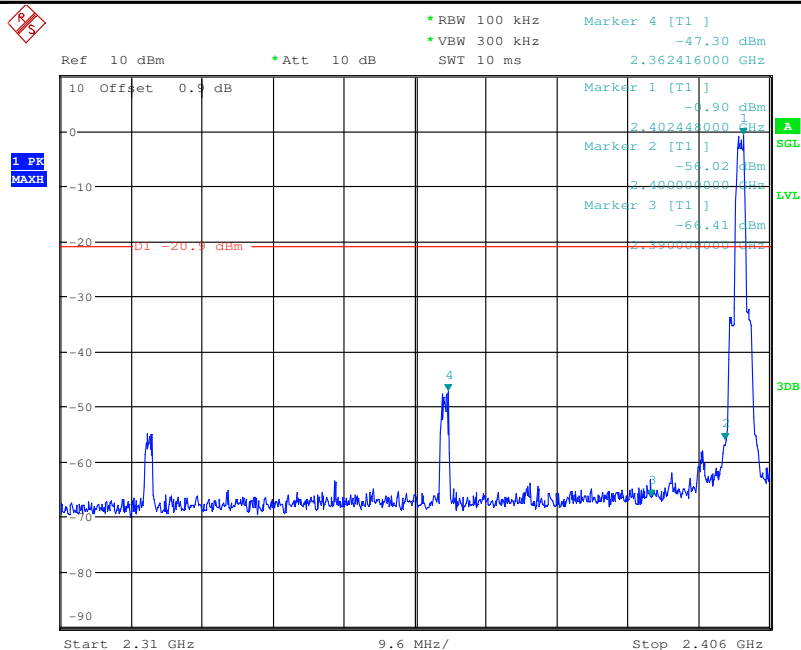


Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping Off

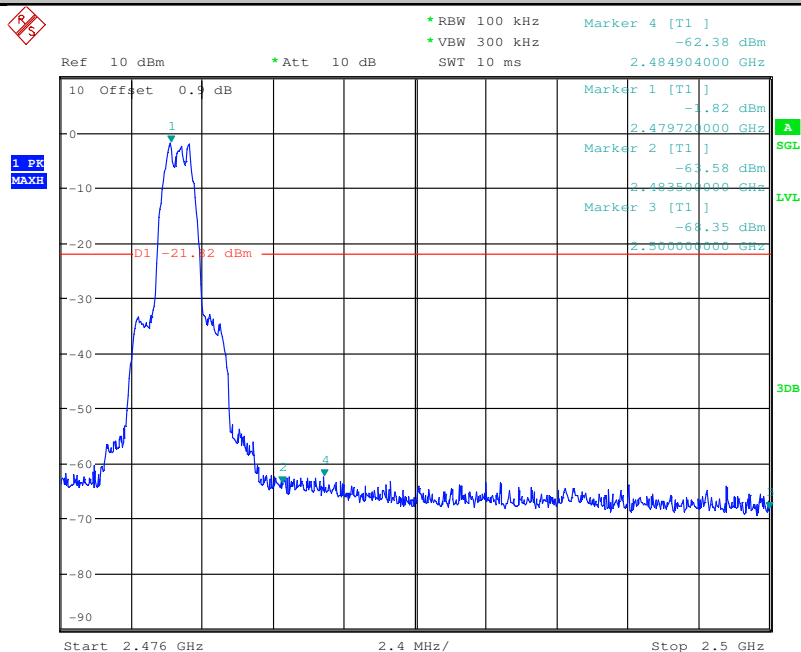




Band-edge for RF Conducted Emissions\_DH5\_2402\_Hopping On

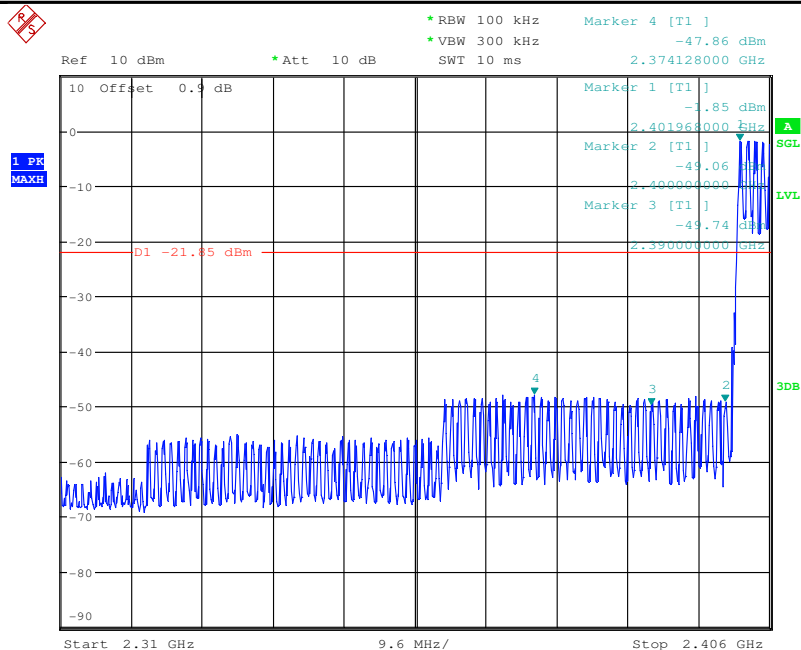


Band-edge for RF Conducted Emissions\_DH5\_2480\_Hopping On

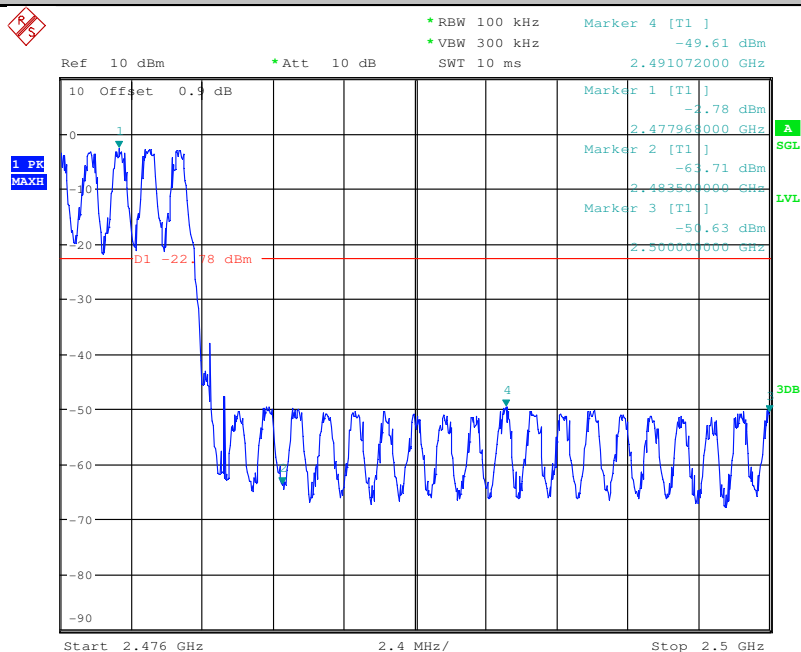




Band-edge for RF Conducted Emissions\_2DH5\_2402\_Hopping On

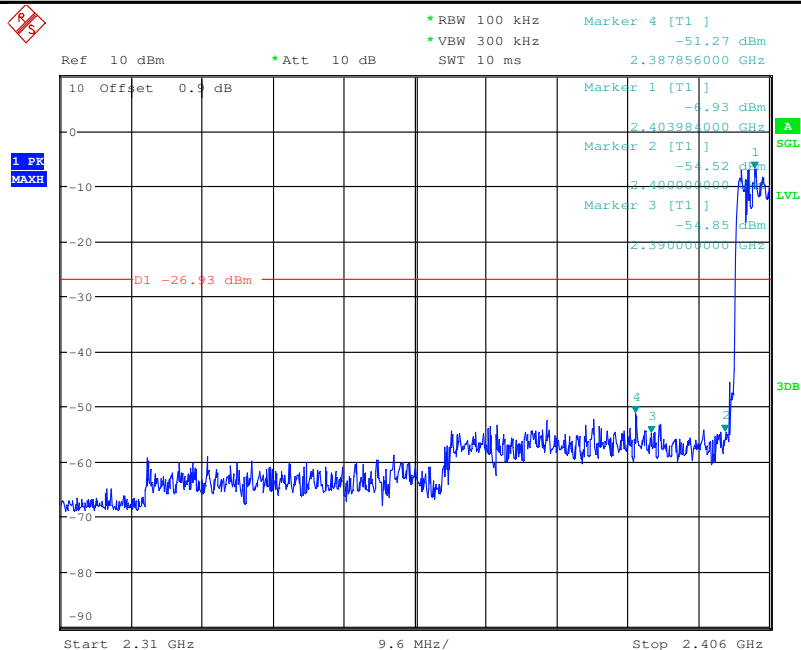


Band-edge for RF Conducted Emissions\_2DH5\_2480\_Hopping On

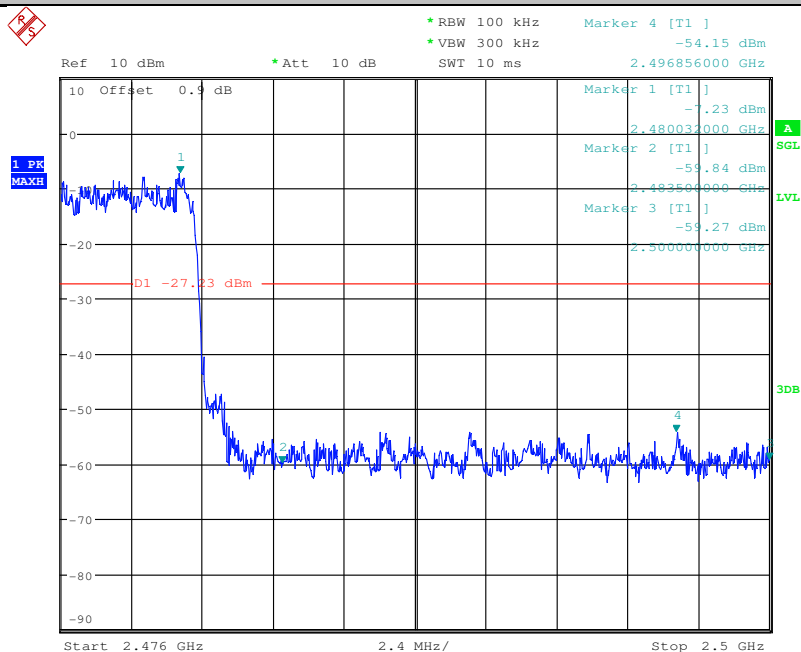




Band-edge for RF Conducted Emissions\_3DH5\_2402\_Hopping On

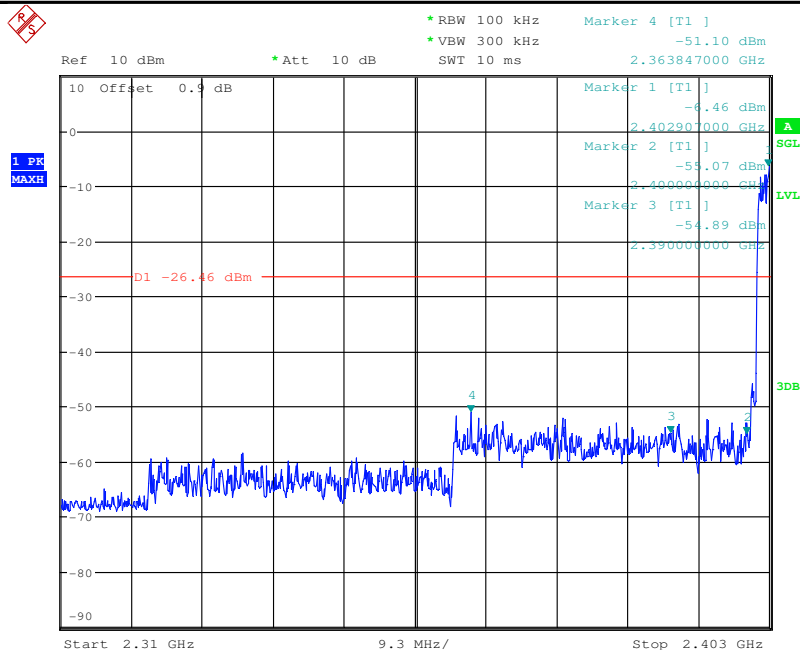


Band-edge for RF Conducted Emissions\_3DH5\_2480\_Hopping On

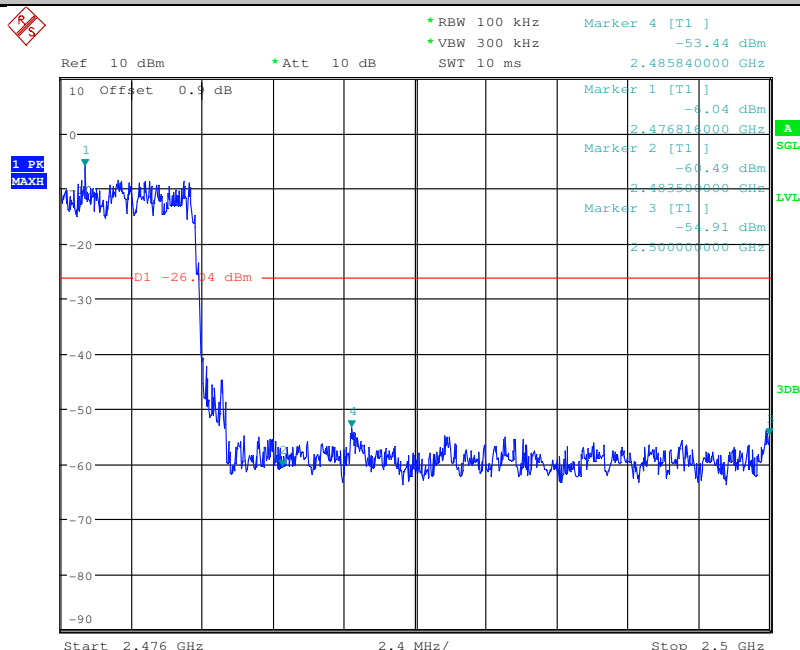



## 6.RF Conducted Spurious Emissions


| Test Mode | Test Channel | StartFre [MHz] | StopFre [MHz] | RBW [kHz] | VBW [kHz] | Pref[dBm] | Max. Level [dBm] | Limit [dBm] | Verdict |
|-----------|--------------|----------------|---------------|-----------|-----------|-----------|------------------|-------------|---------|
| DH5       | 2402         | 30             | 10000         | 1000      | 3000      | 1.71      | -47.990          | <-18.29     | PASS    |
| DH5       | 2402         | 10000          | 25000         | 1000      | 3000      | 1.71      | -64.490          | <-18.29     | PASS    |
| DH5       | 2441         | 30             | 10000         | 1000      | 3000      | 1.46      | -49.110          | <-18.54     | PASS    |
| DH5       | 2441         | 10000          | 25000         | 1000      | 3000      | 1.46      | -65.450          | <-18.54     | PASS    |
| DH5       | 2480         | 30             | 10000         | 1000      | 3000      | 0.71      | -49.870          | <-19.29     | PASS    |
| DH5       | 2480         | 10000          | 25000         | 1000      | 3000      | 0.71      | -64.670          | <-19.29     | PASS    |
| 2DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -1.04     | -46.240          | <-21.04     | PASS    |
| 2DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -1.04     | -65.370          | <-21.04     | PASS    |
| 2DH5      | 2441         | 30             | 10000         | 1000      | 3000      | -1.21     | -47.500          | <-21.21     | PASS    |
| 2DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | -1.21     | -64.310          | <-21.21     | PASS    |
| 2DH5      | 2480         | 30             | 10000         | 1000      | 3000      | -1.78     | -48.090          | <-21.78     | PASS    |
| 2DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | -1.78     | -64.200          | <-21.78     | PASS    |
| 3DH5      | 2402         | 30             | 10000         | 1000      | 3000      | -0.83     | -46.570          | <-20.83     | PASS    |
| 3DH5      | 2402         | 10000          | 25000         | 1000      | 3000      | -0.83     | -64.800          | <-20.83     | PASS    |
| 3DH5      | 2441         | 30             | 10000         | 1000      | 3000      | -1.13     | -46.750          | <-21.13     | PASS    |
| 3DH5      | 2441         | 10000          | 25000         | 1000      | 3000      | -1.13     | -65.210          | <-21.13     | PASS    |
| 3DH5      | 2480         | 30             | 10000         | 1000      | 3000      | -1.75     | -47.490          | <-21.75     | PASS    |
| 3DH5      | 2480         | 10000          | 25000         | 1000      | 3000      | -1.75     | -64.830          | <-21.75     | PASS    |

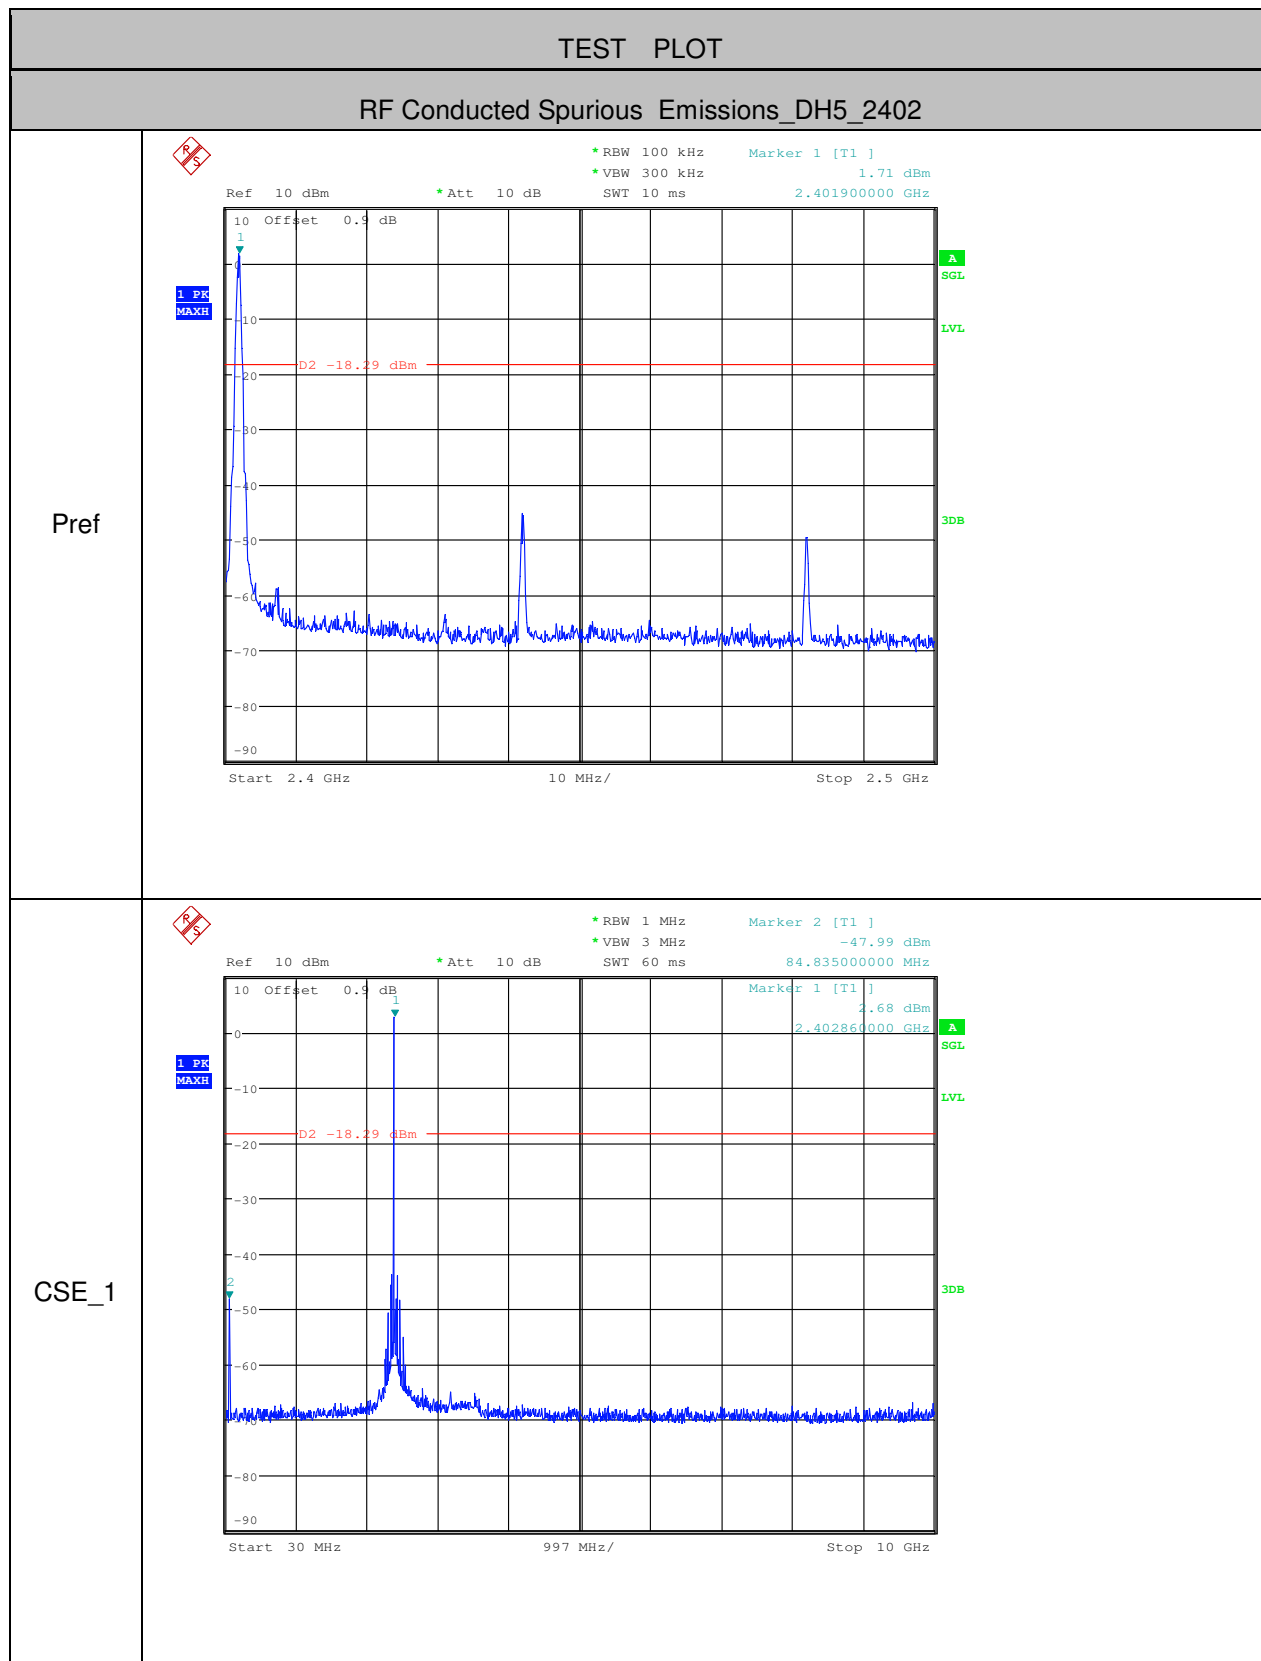






SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch


Report No.: SZEM161201140605  
Page: 70 of 91

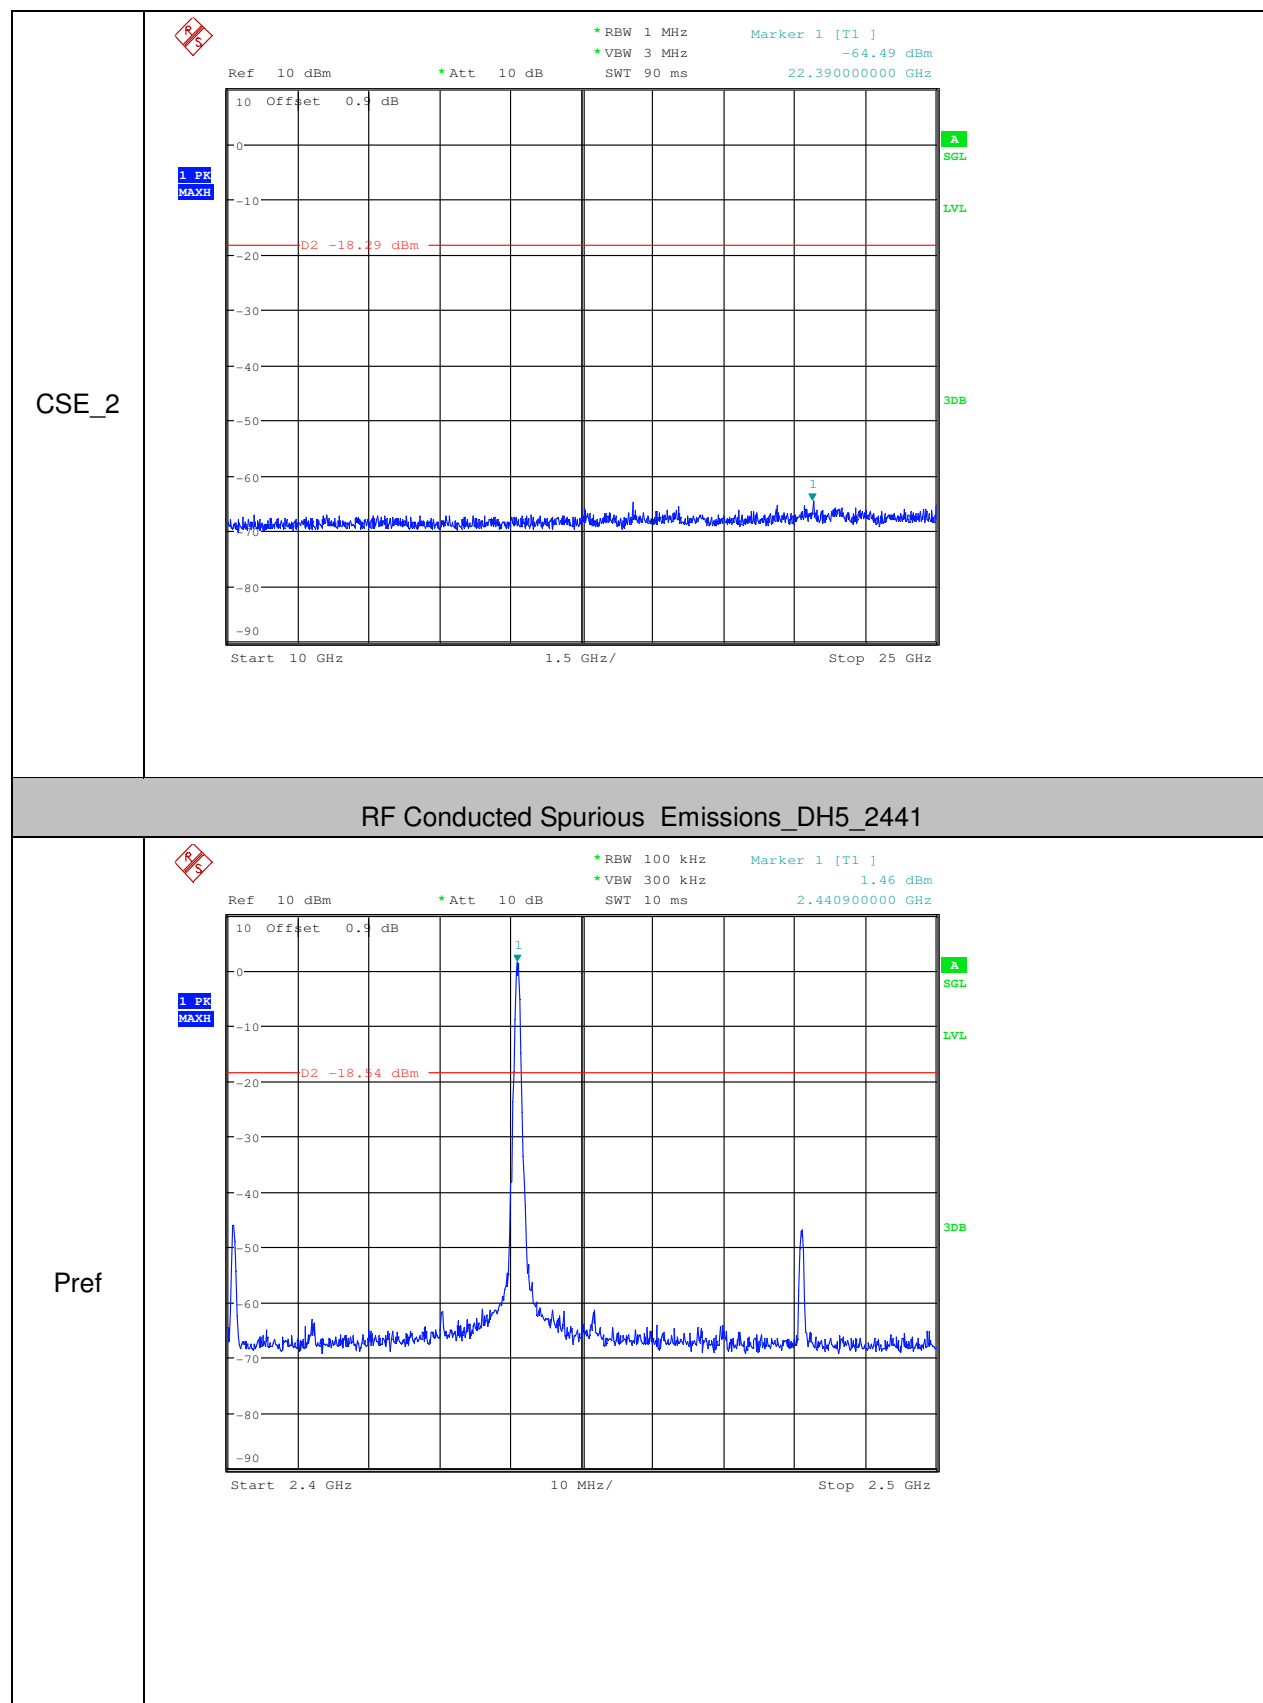


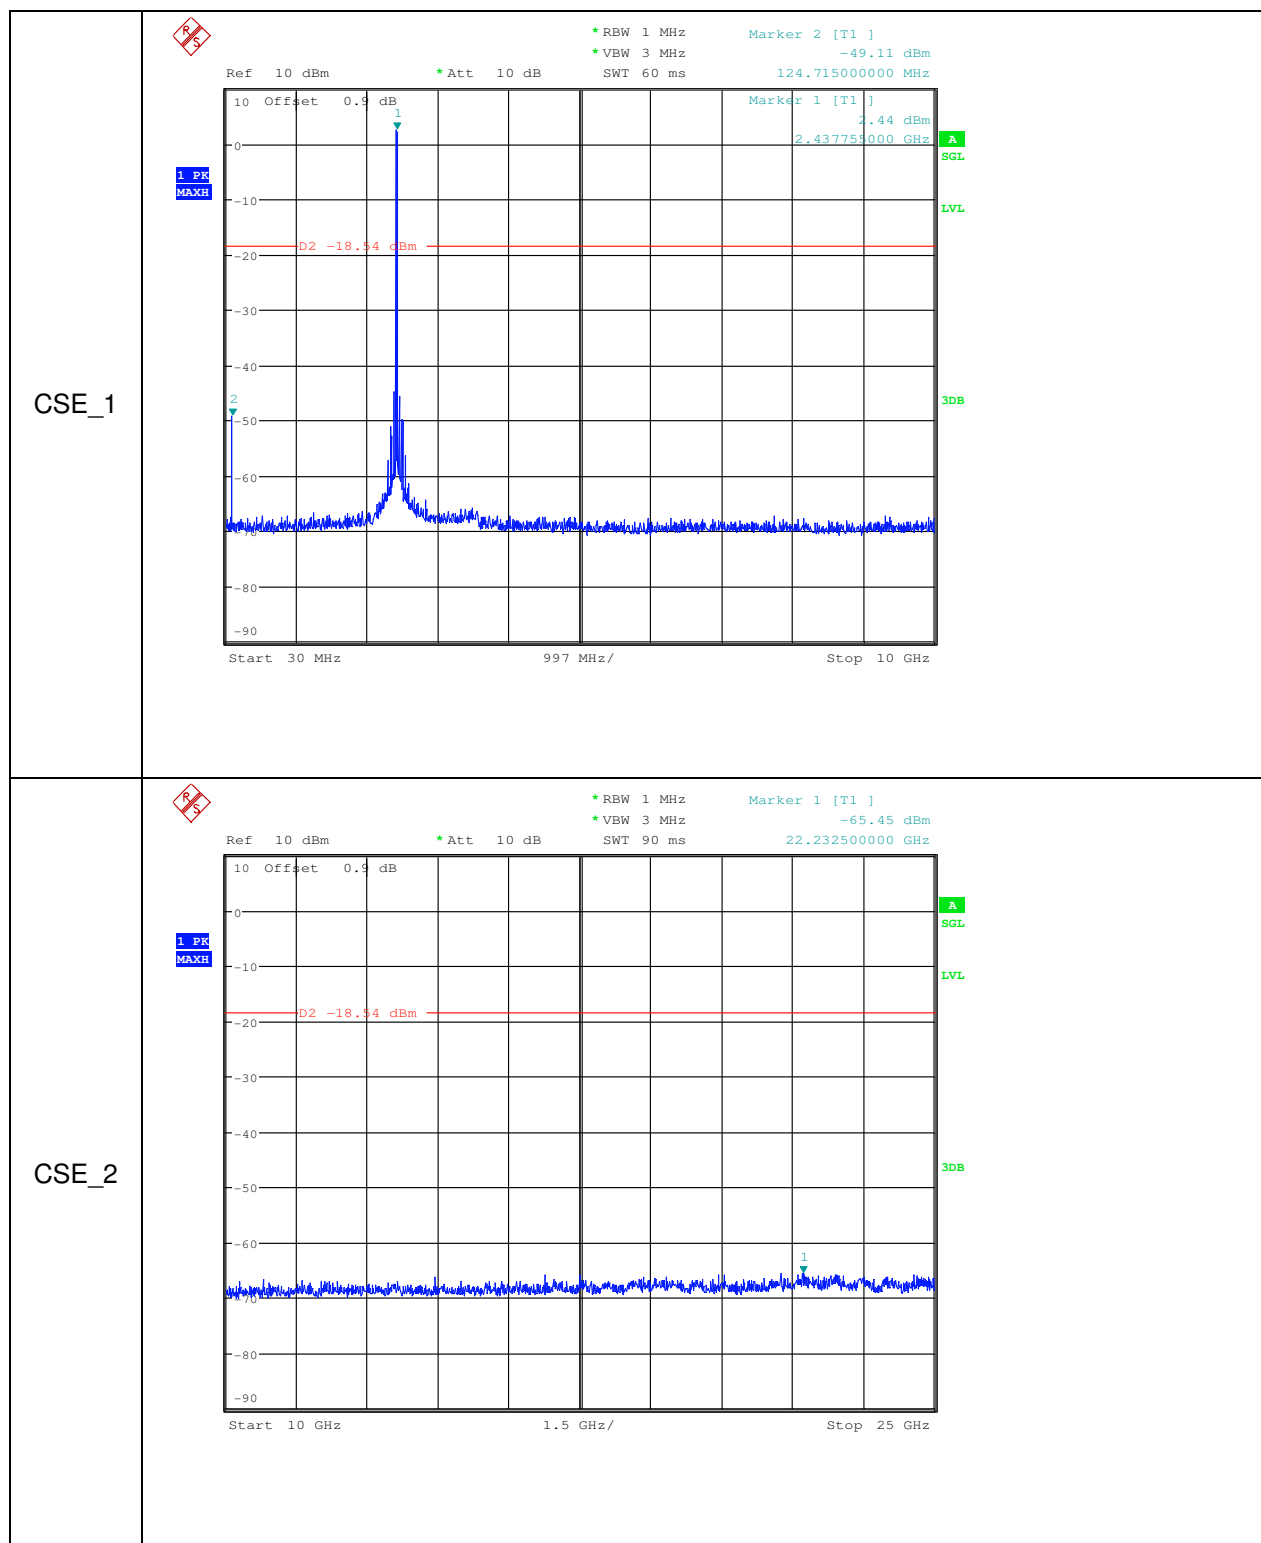


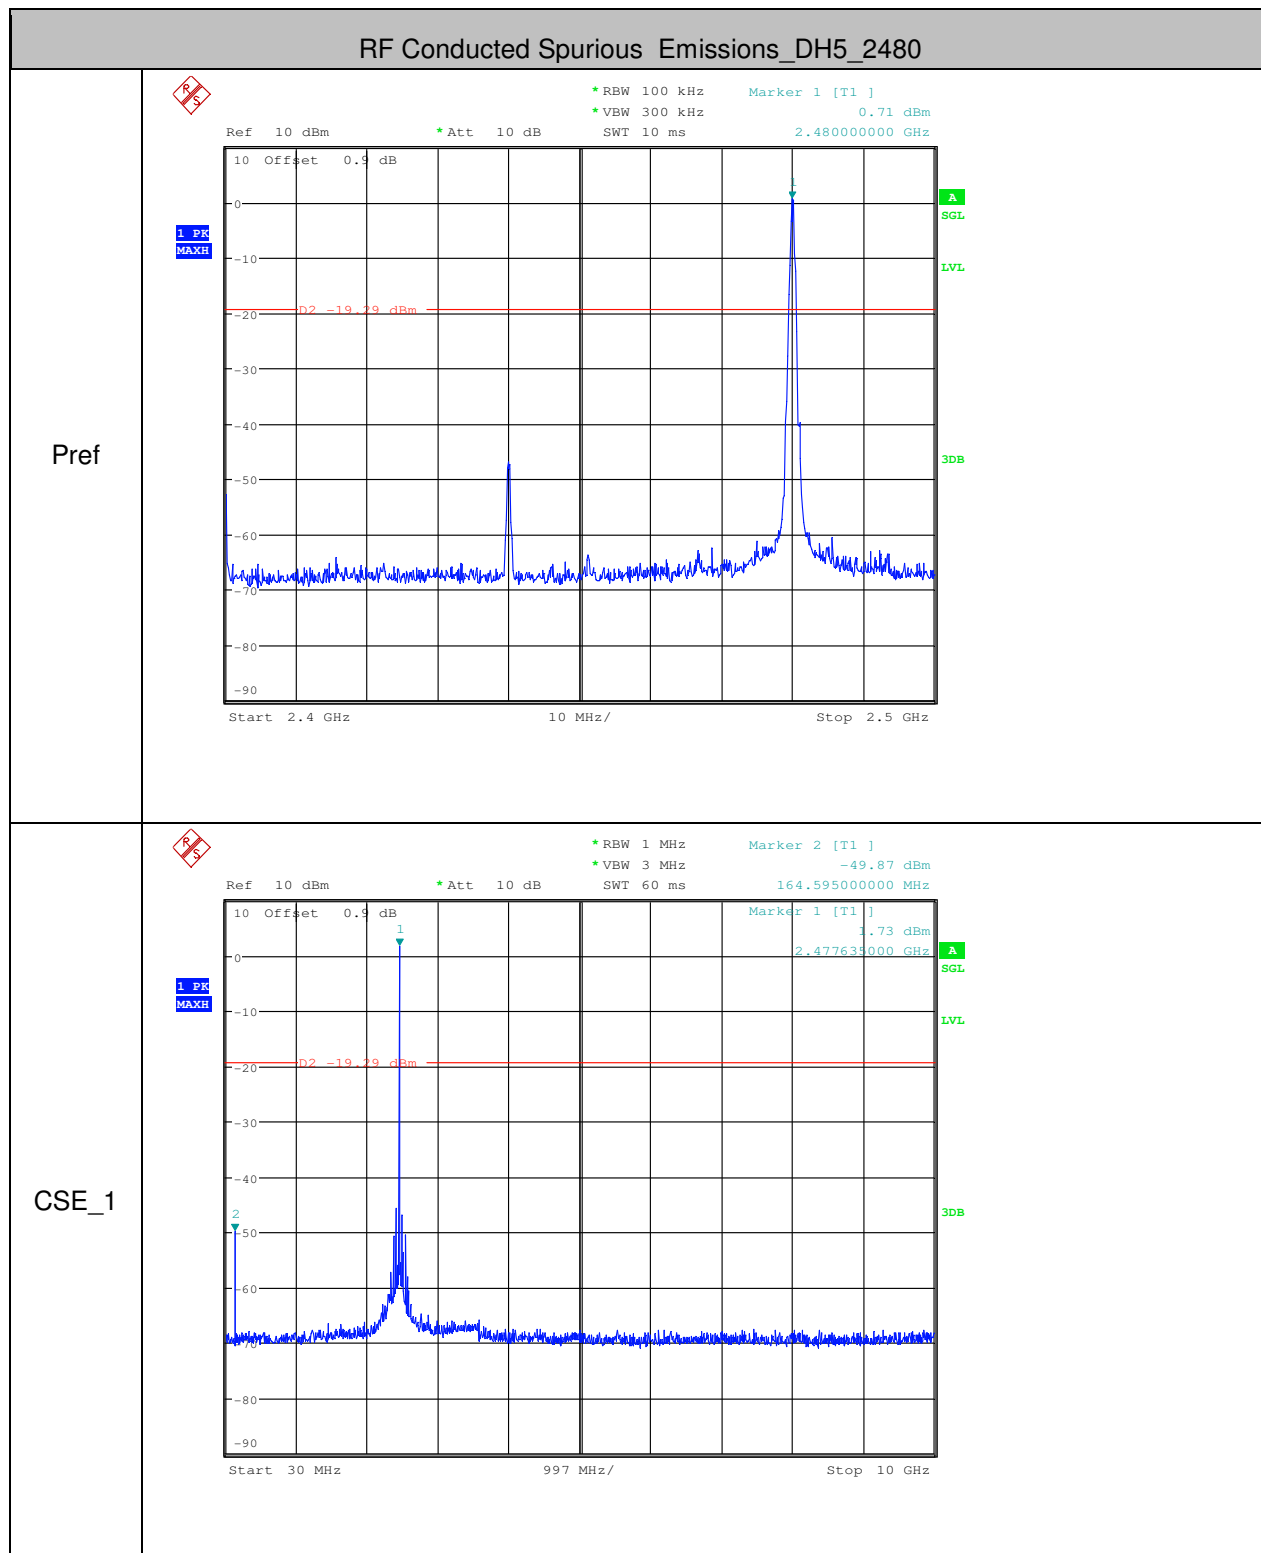

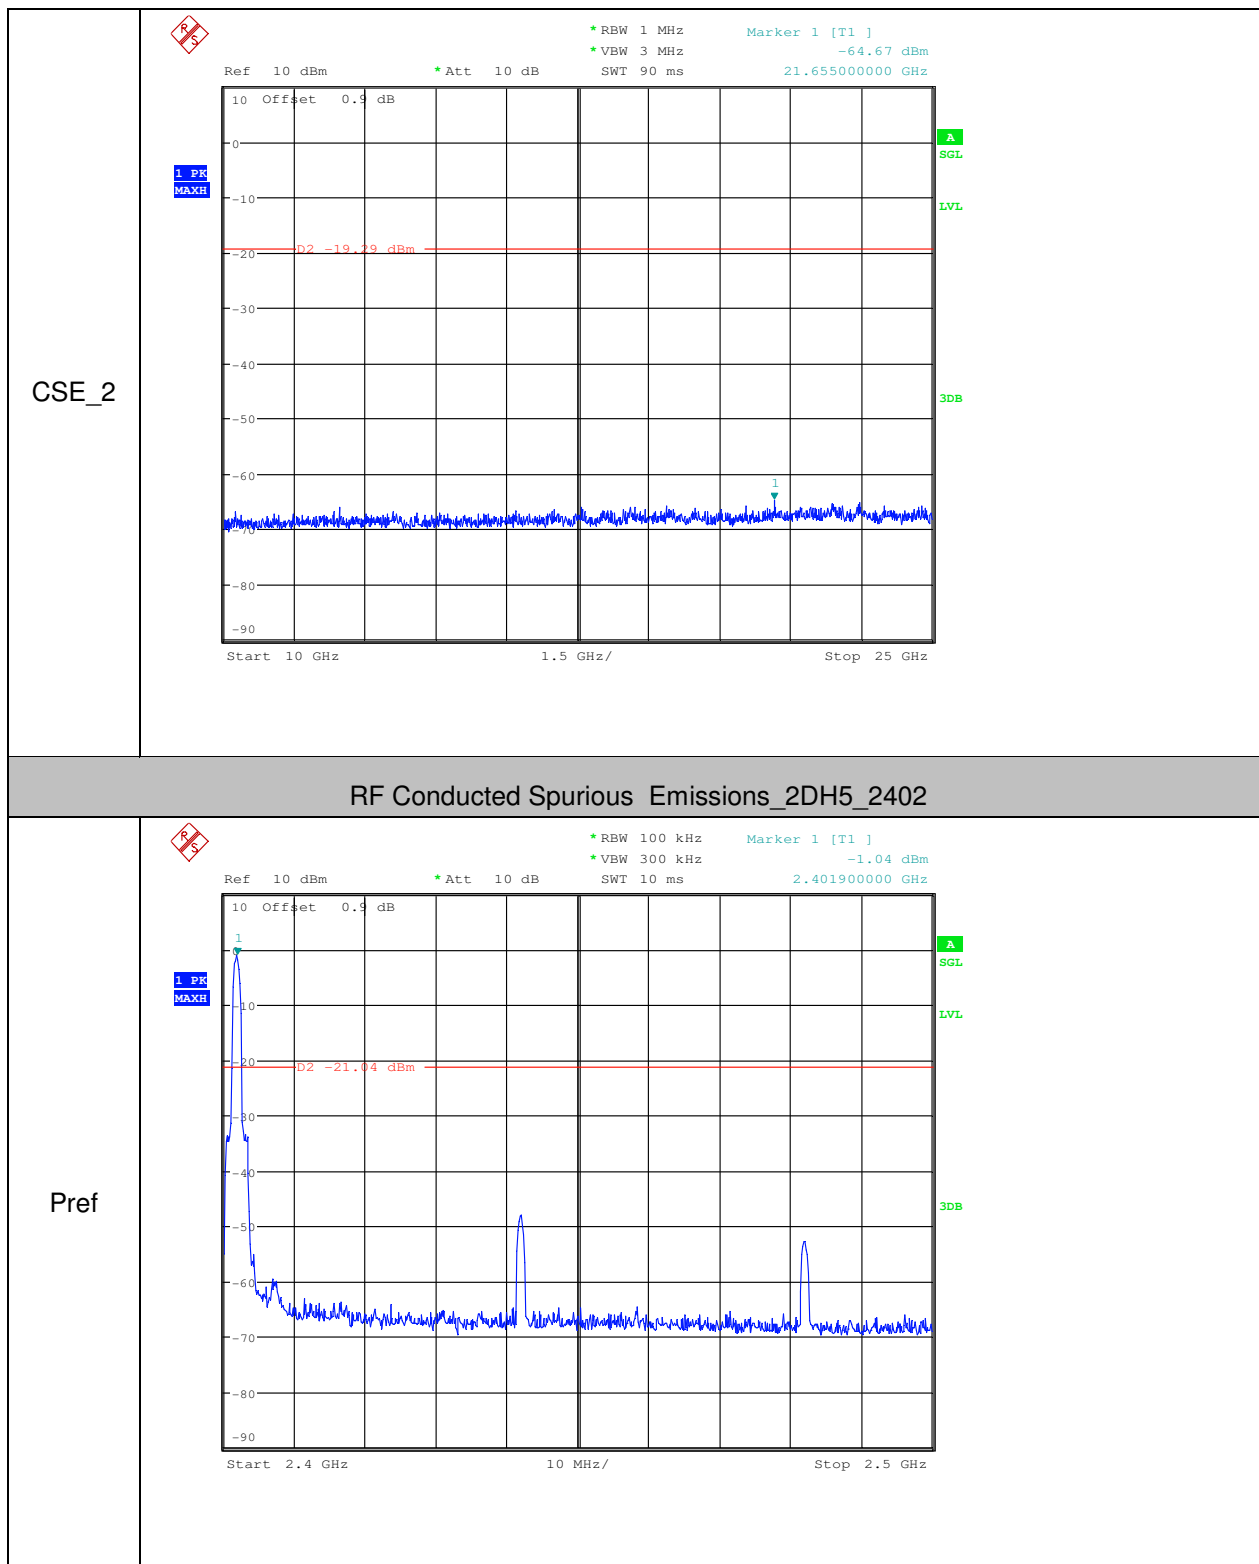

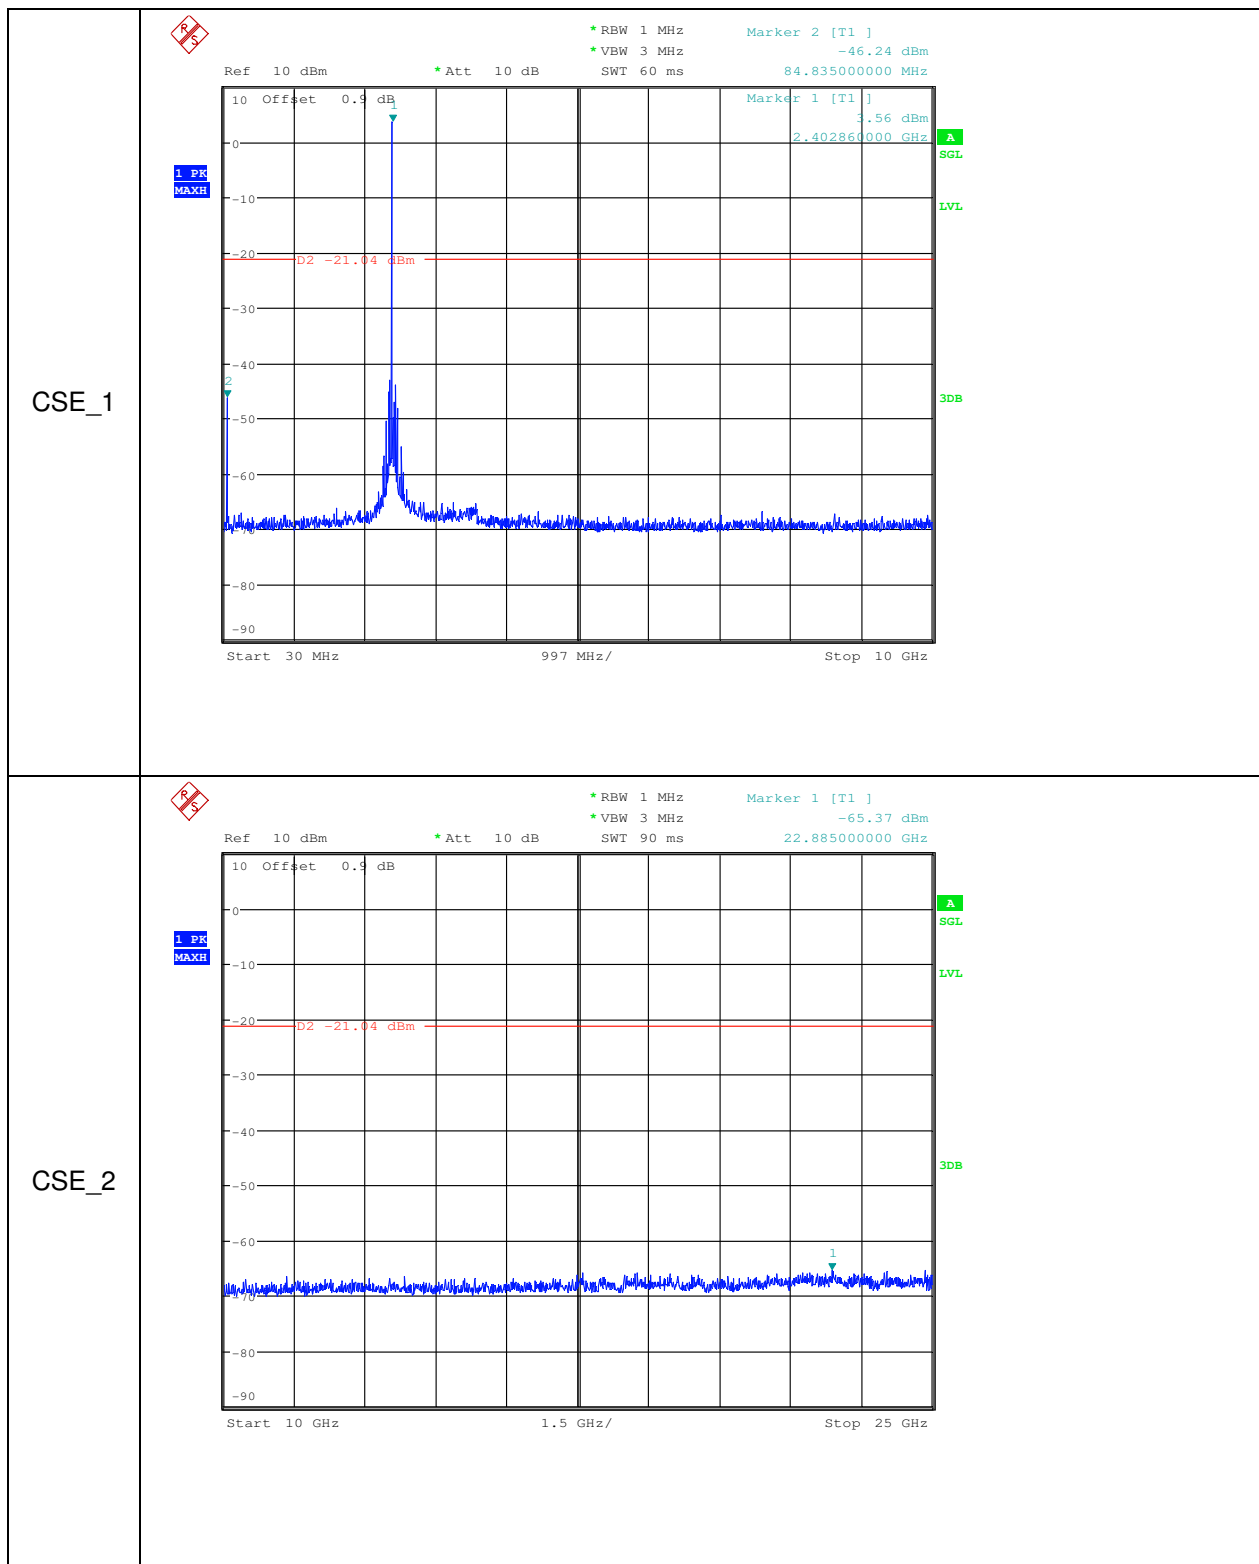

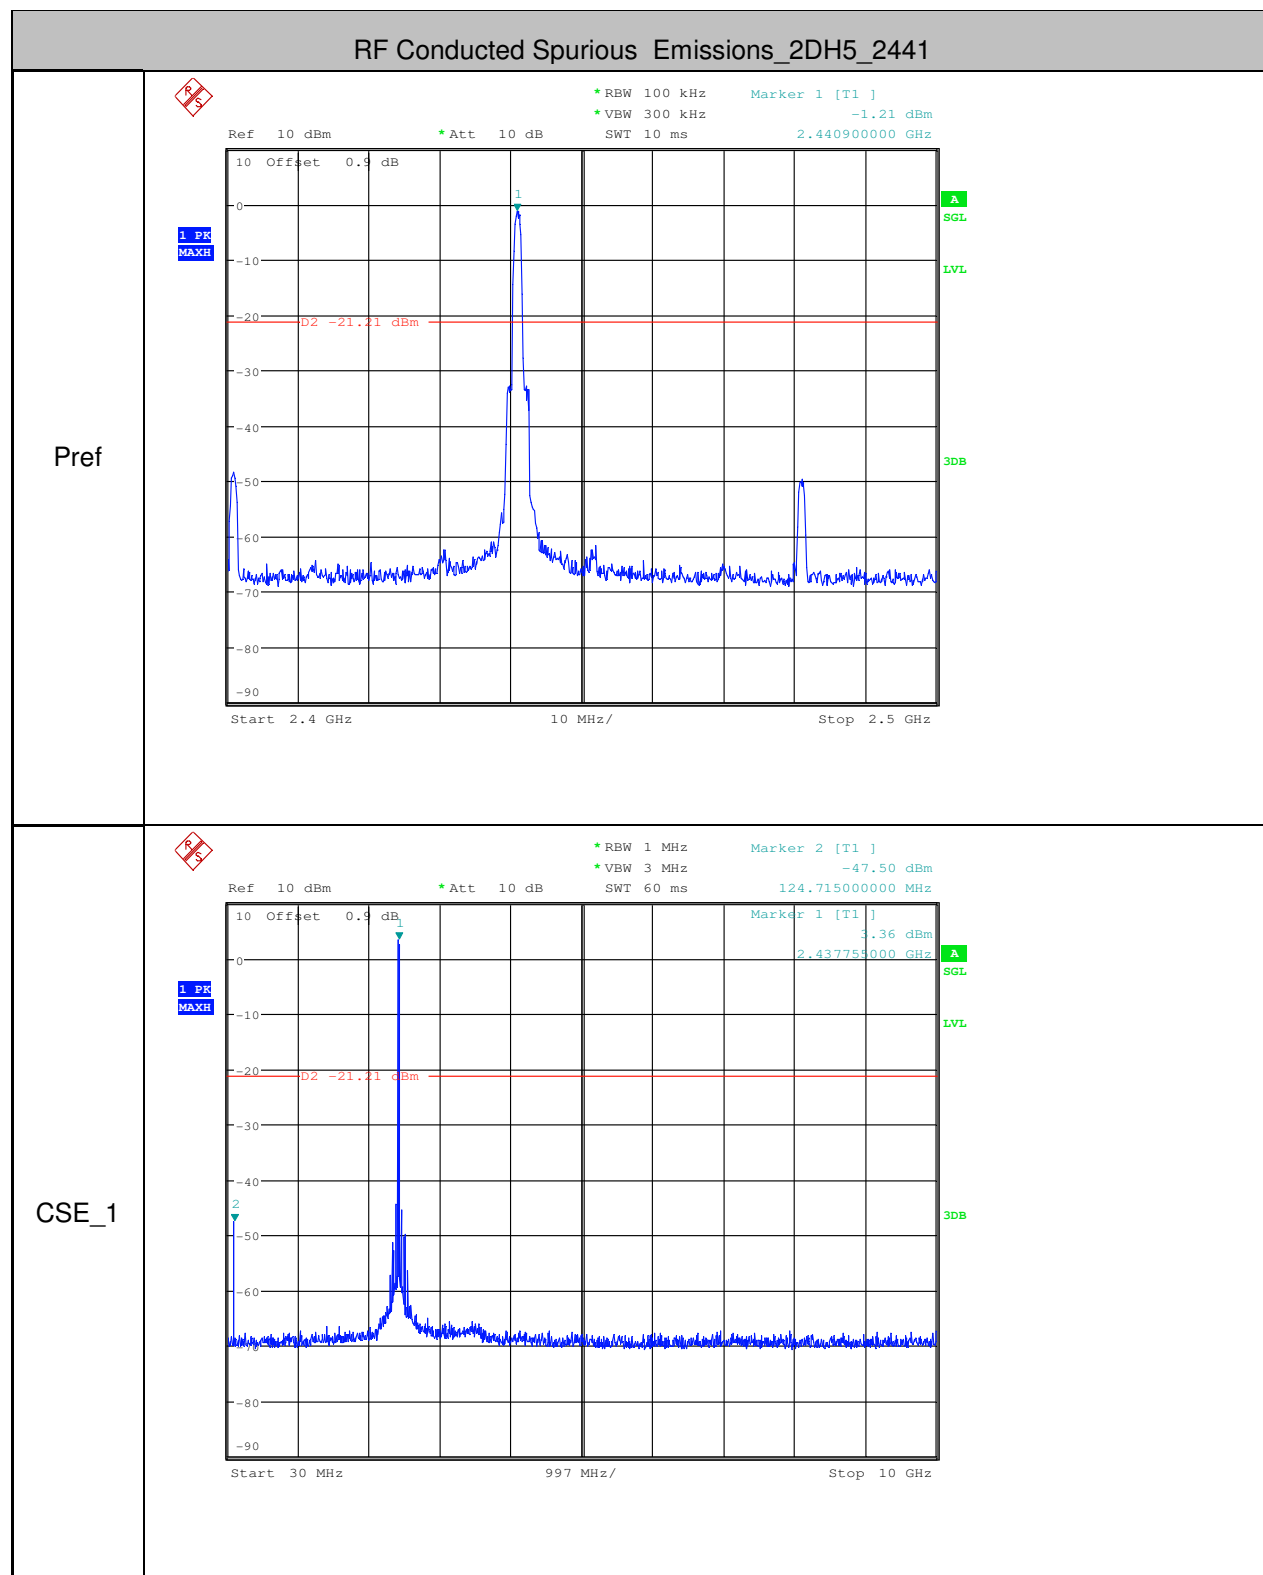


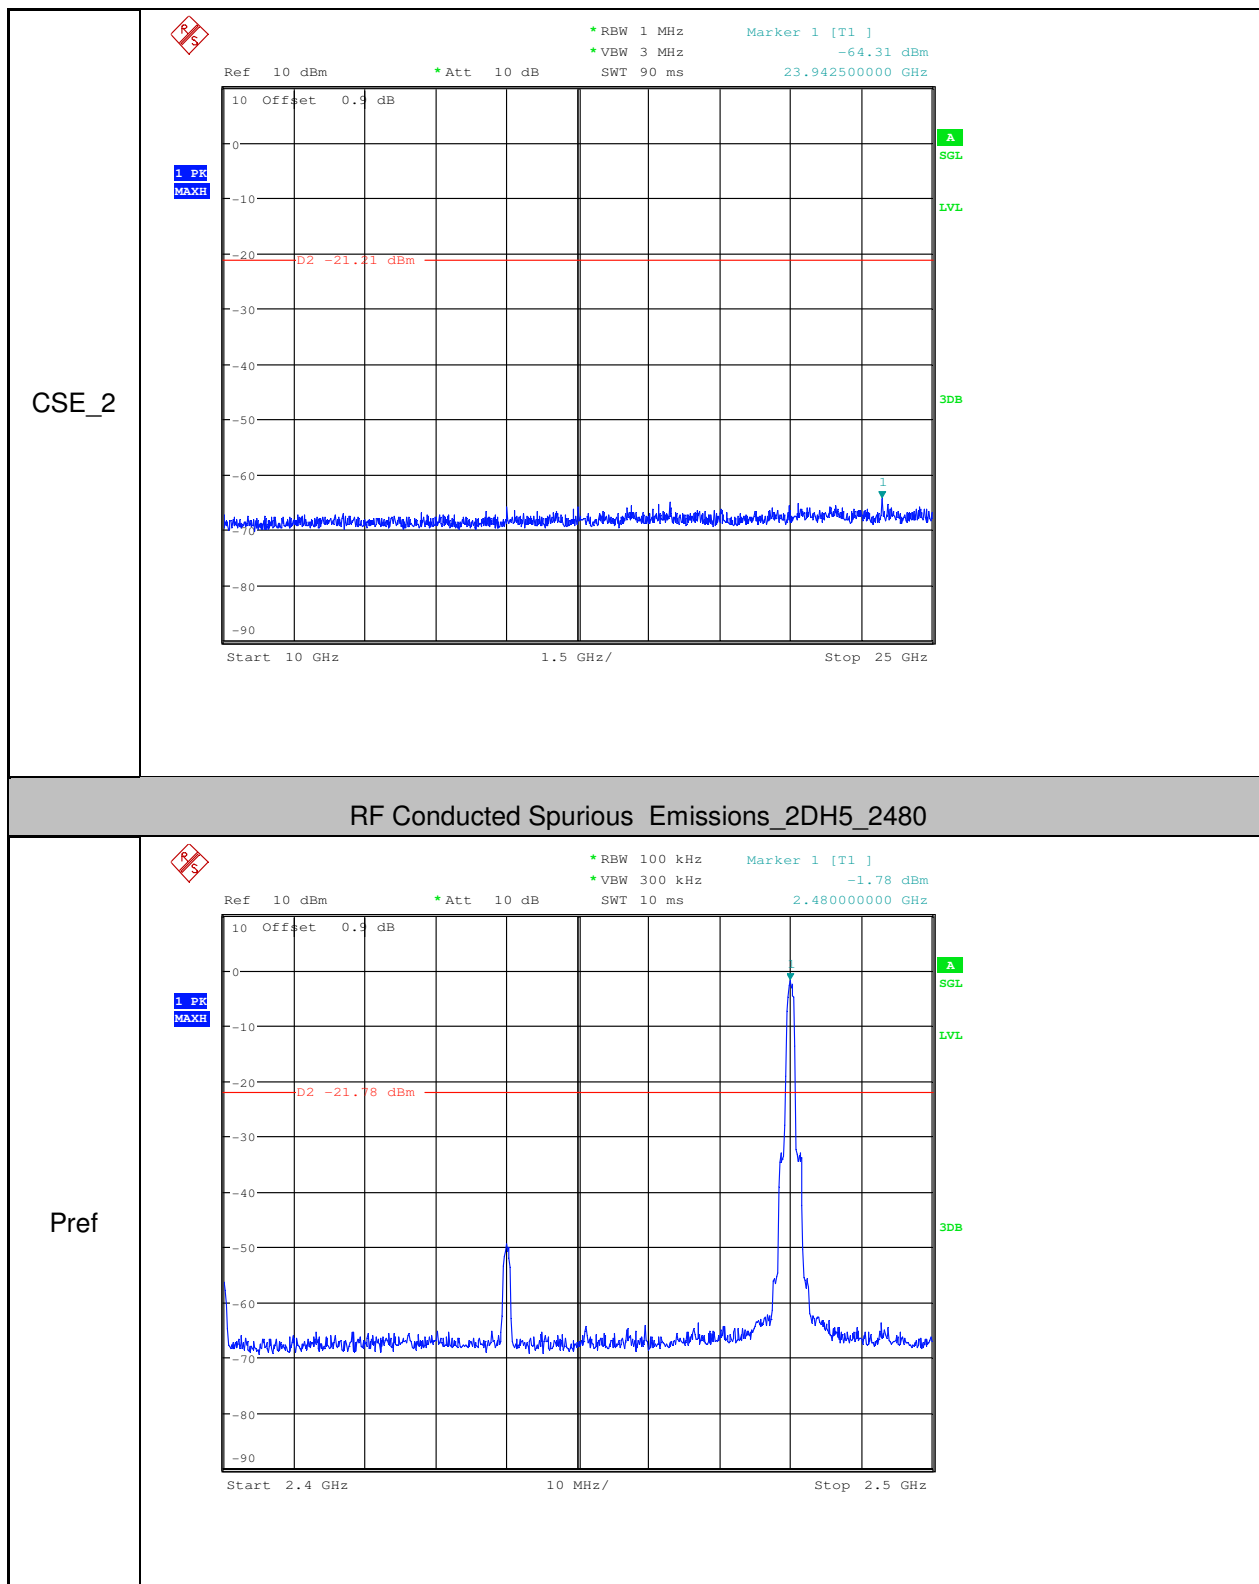






# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM161201140605  
Page: 77 of 91

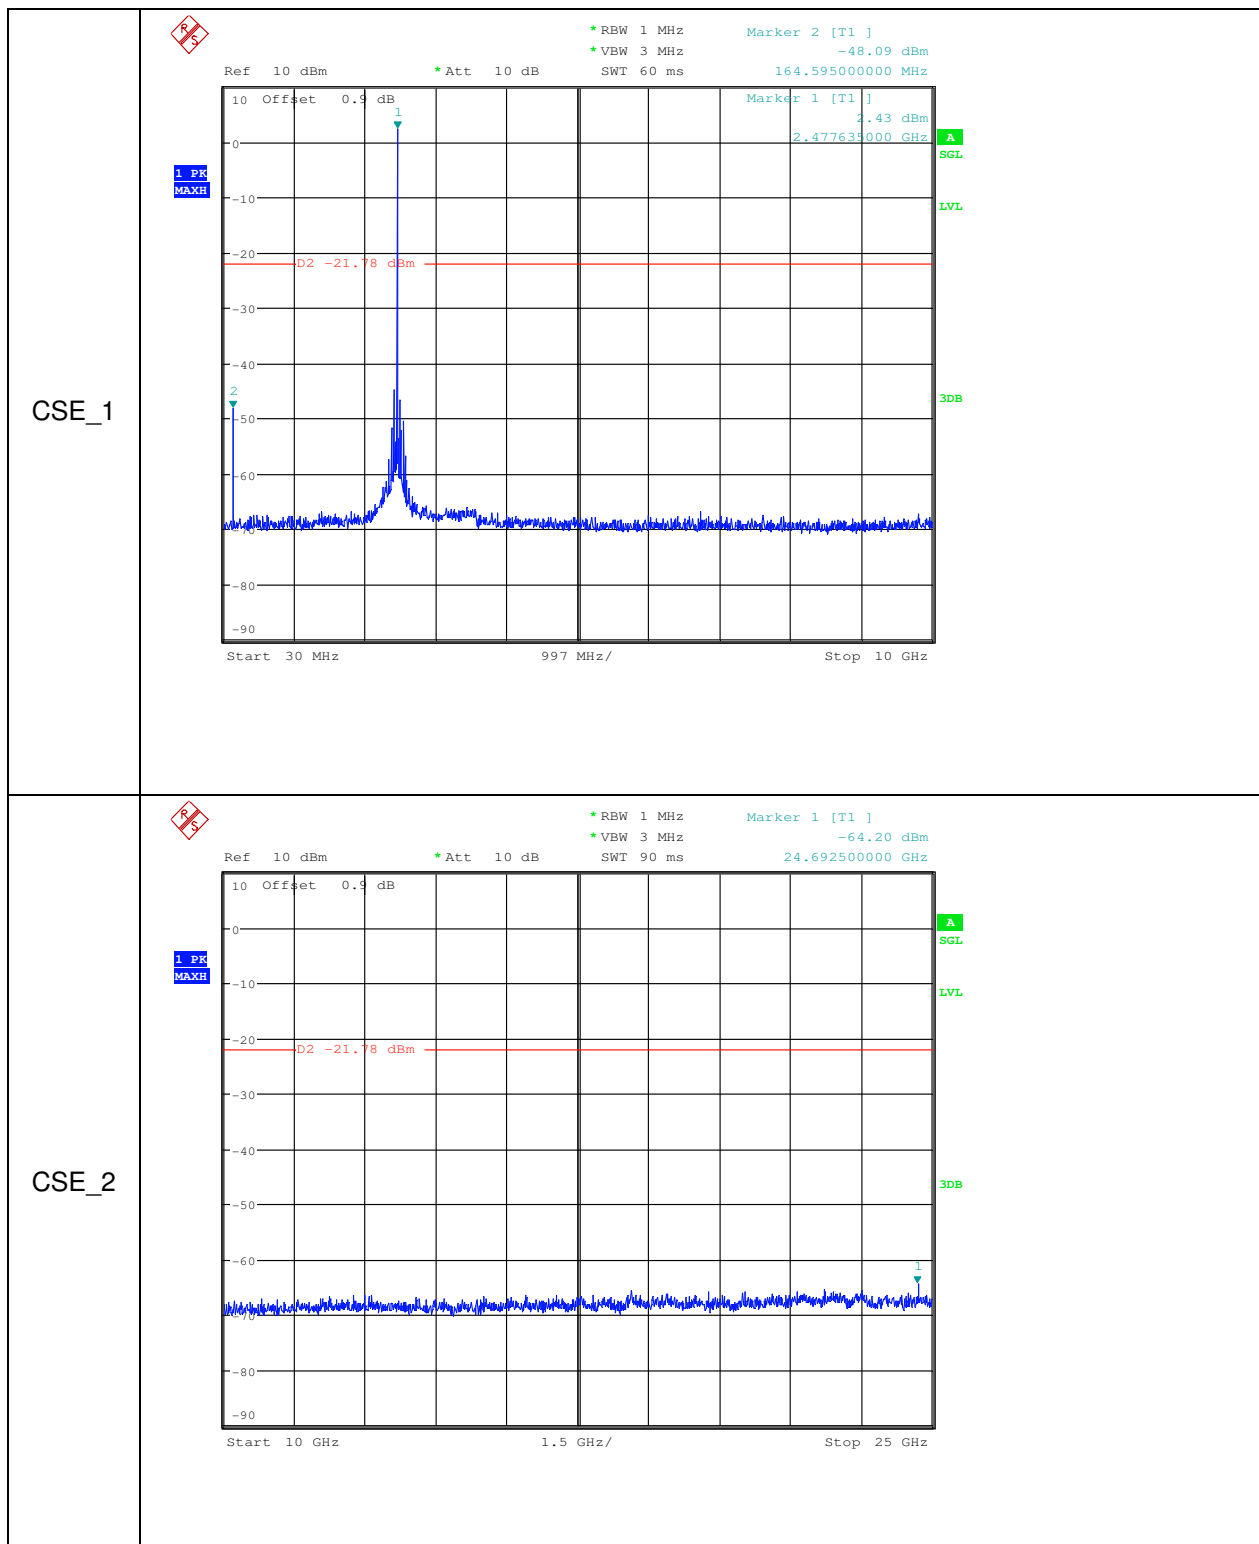

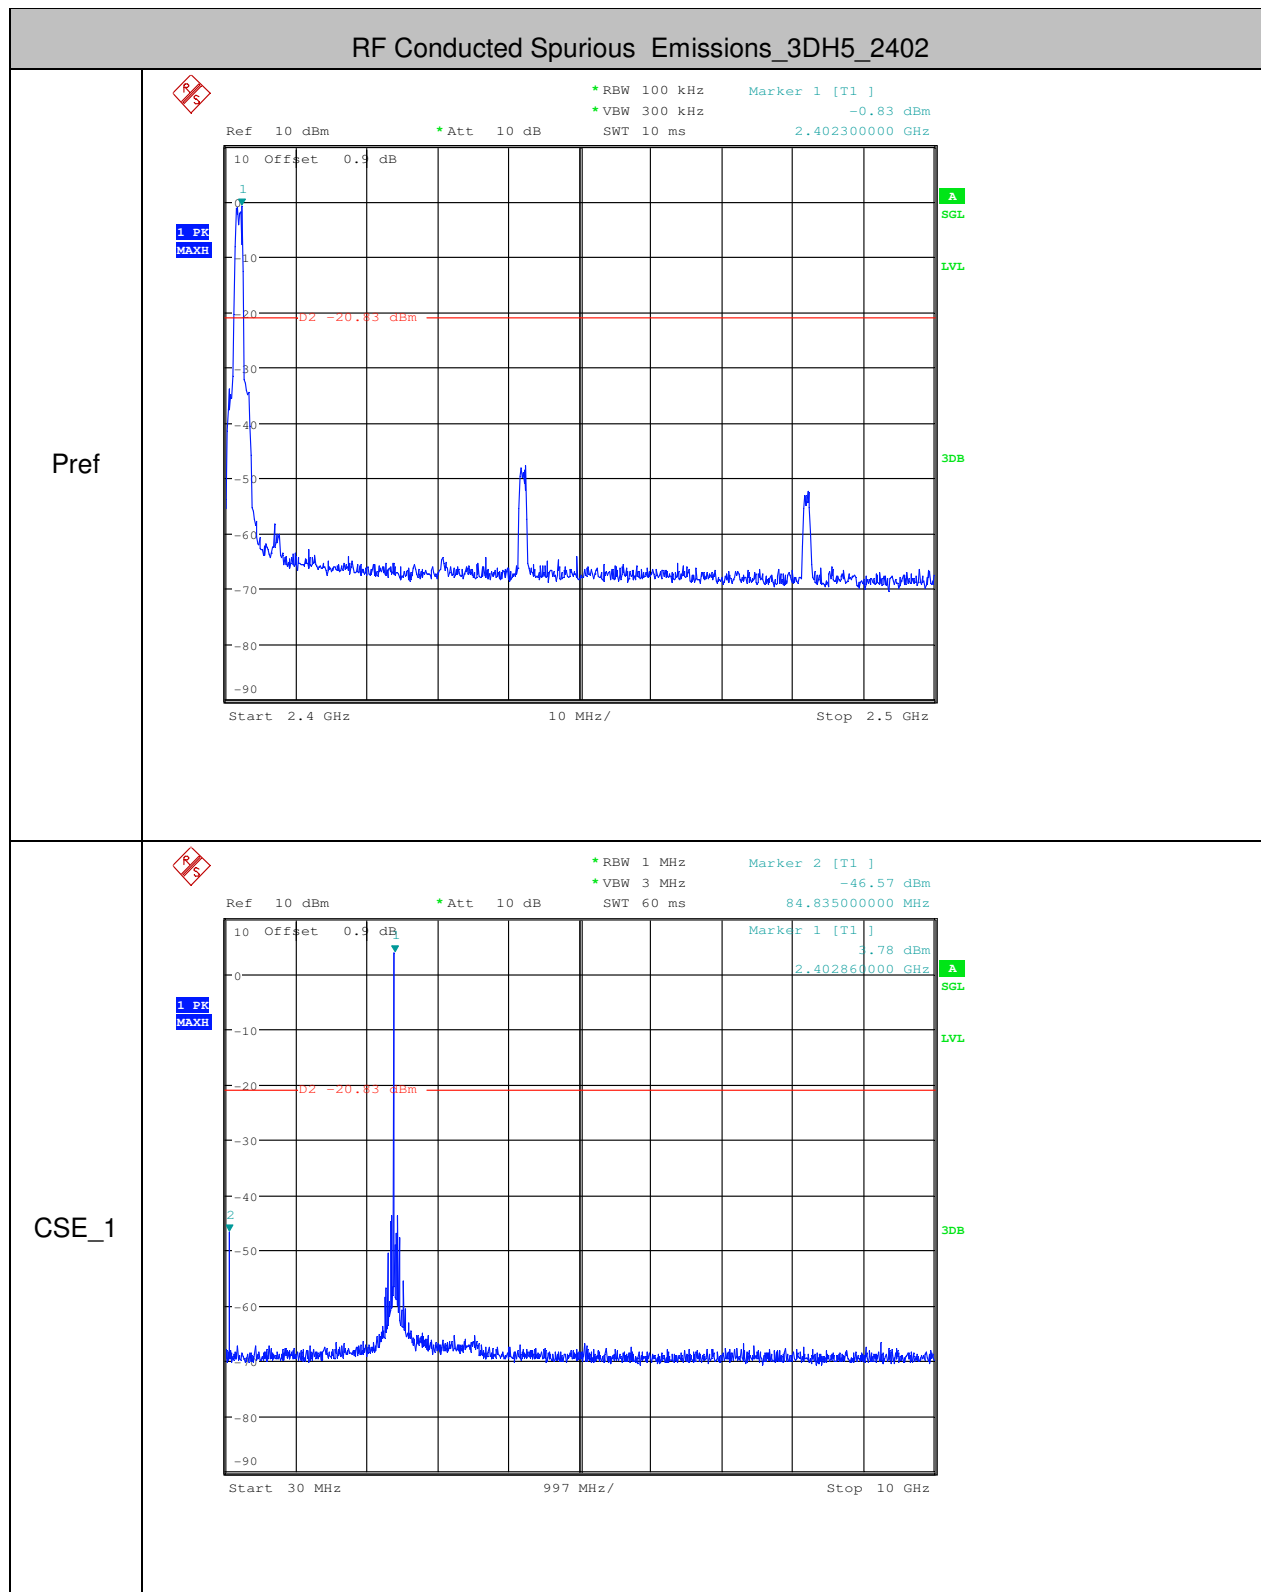

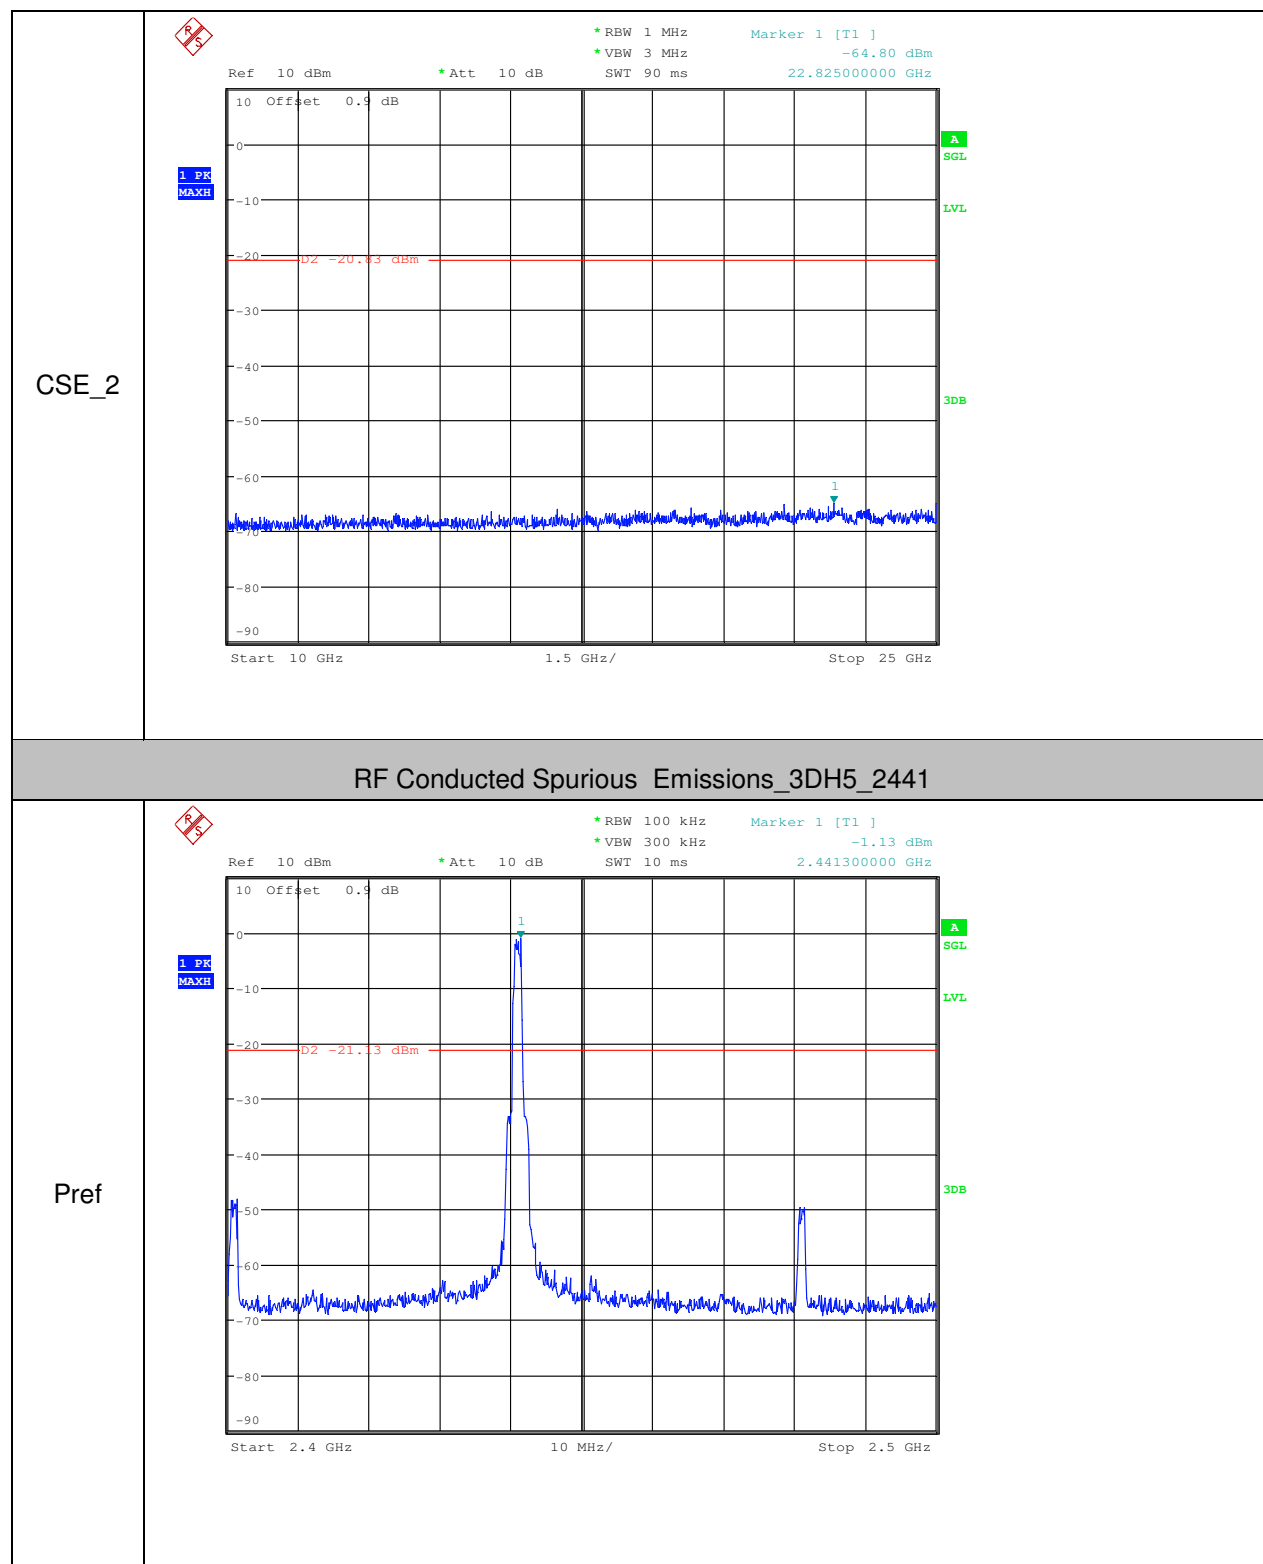

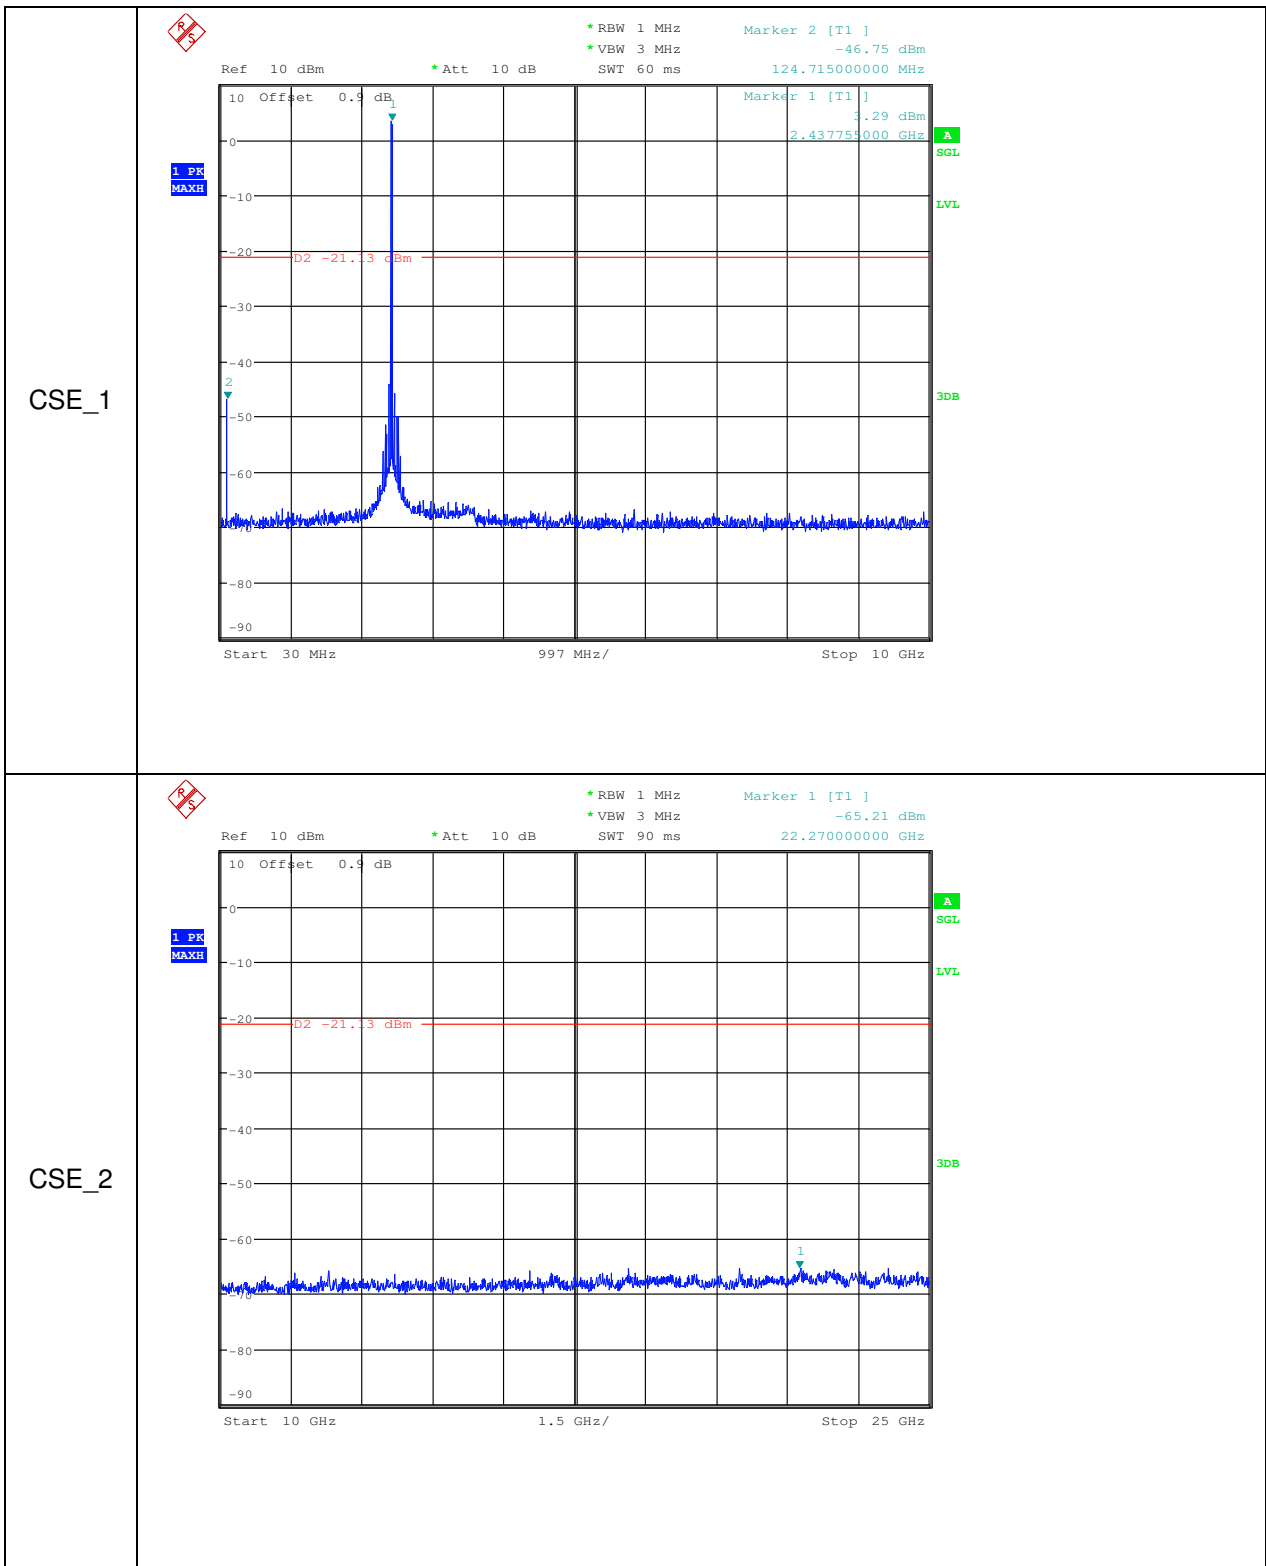


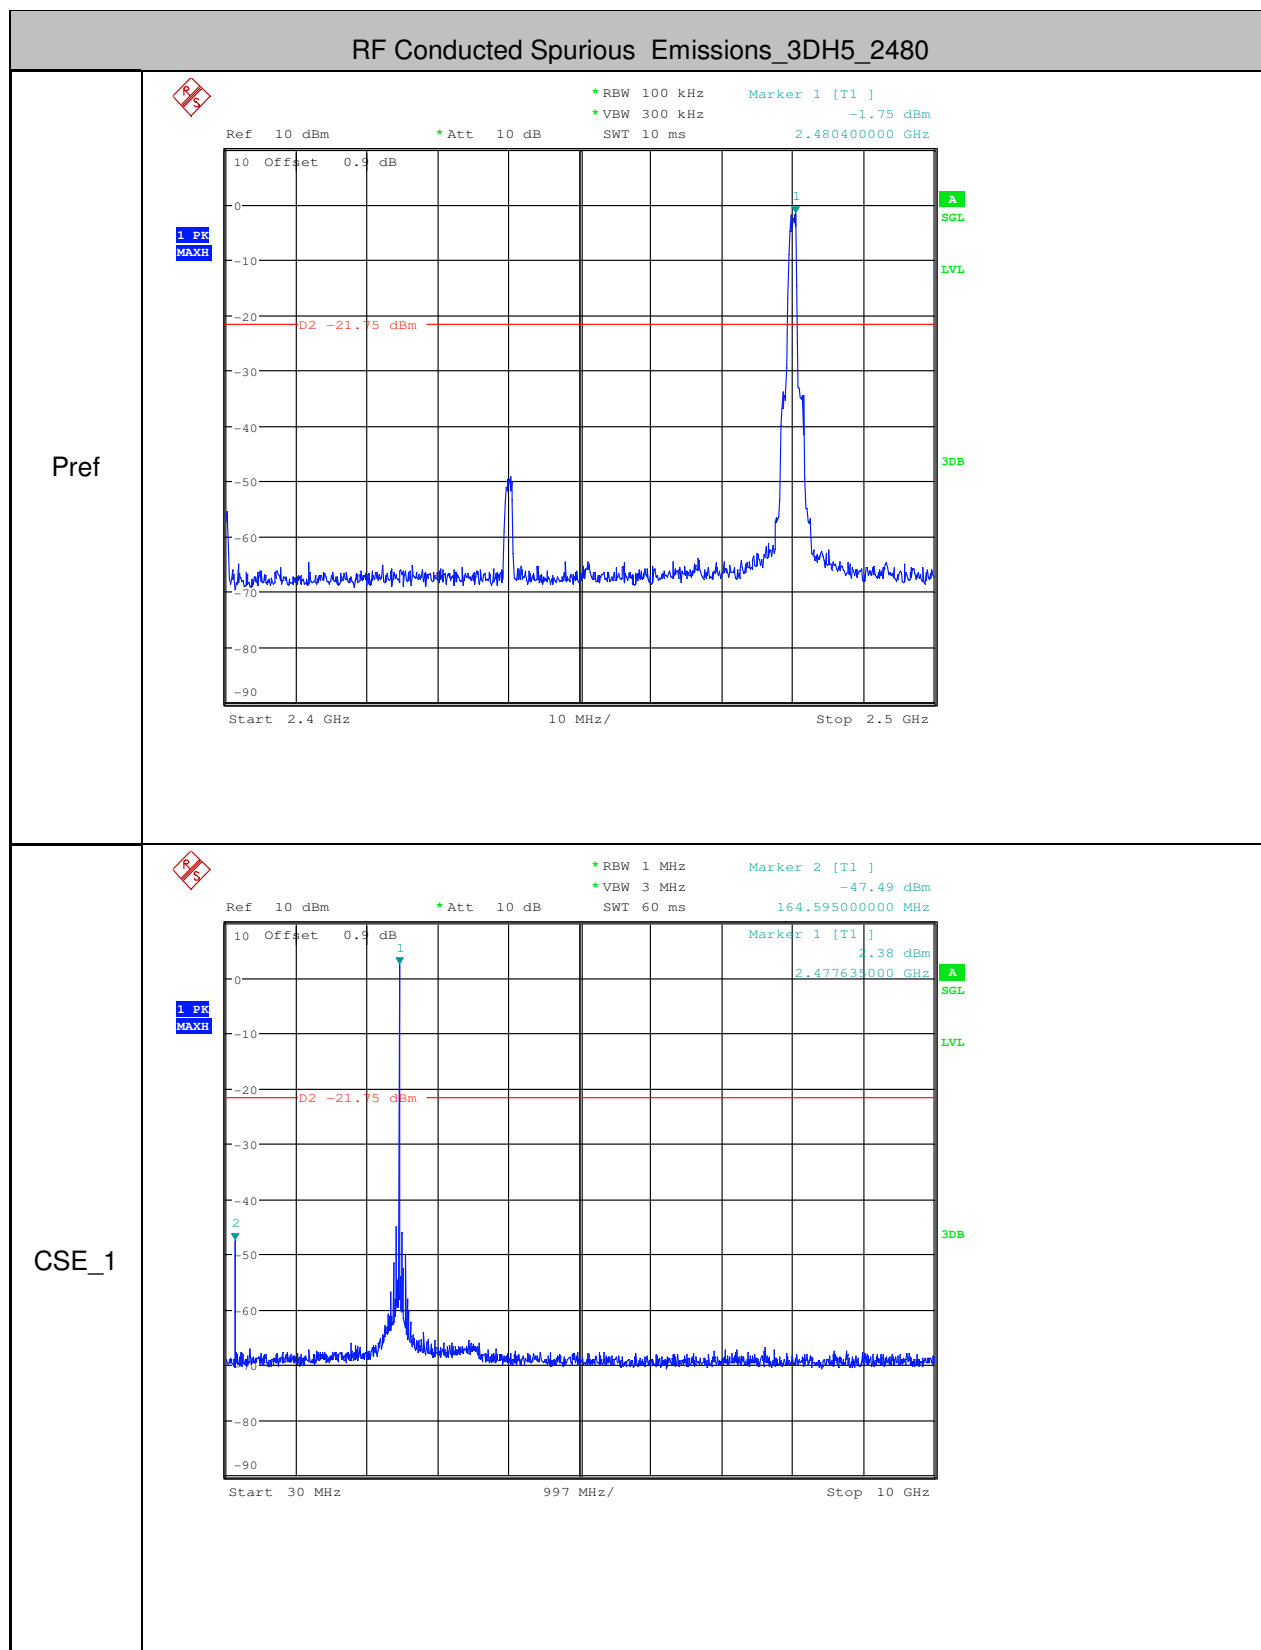



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605  
Page: 82 of 91

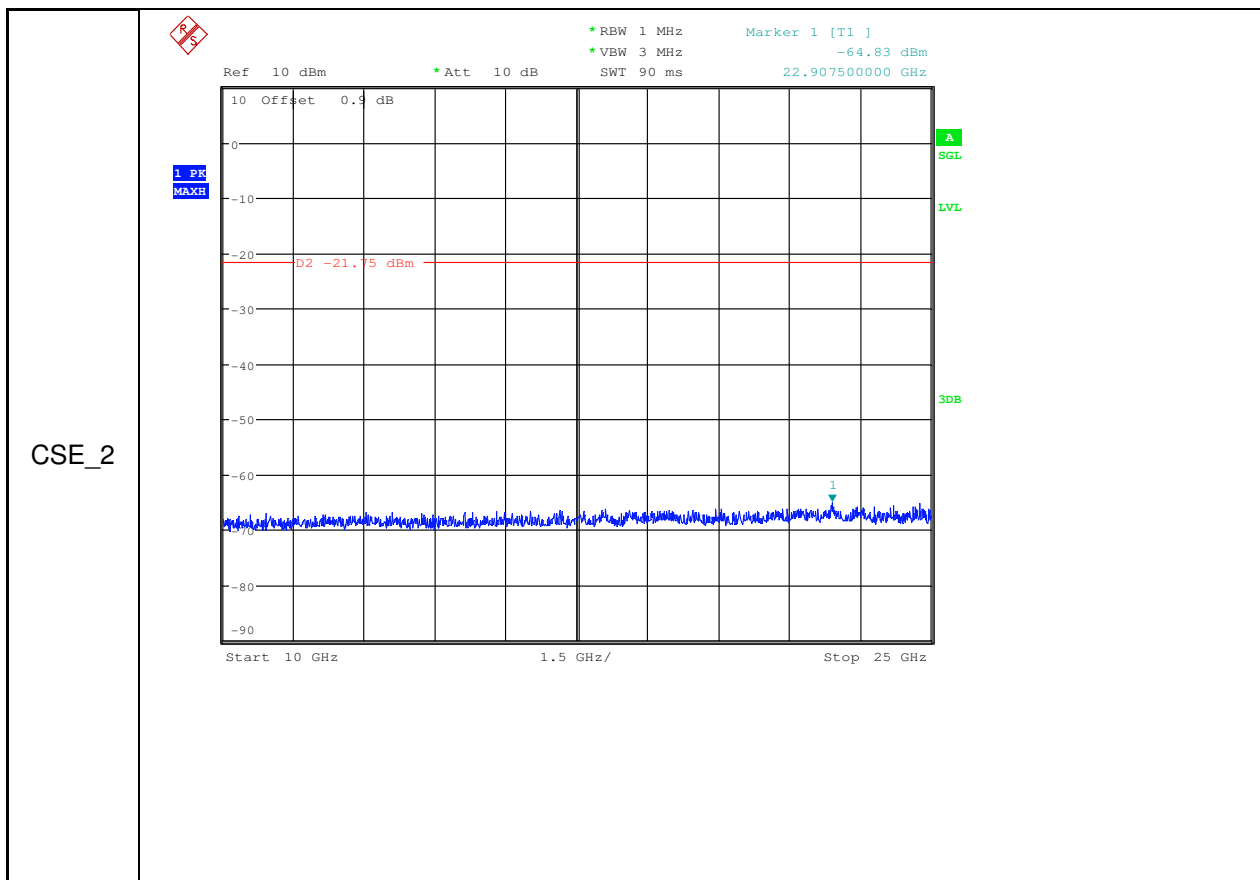




## 7. Radiated Spurious Emissions

For below 1GHz:

Mode:b:Charging+Tx mode;Polarization: Horizontal

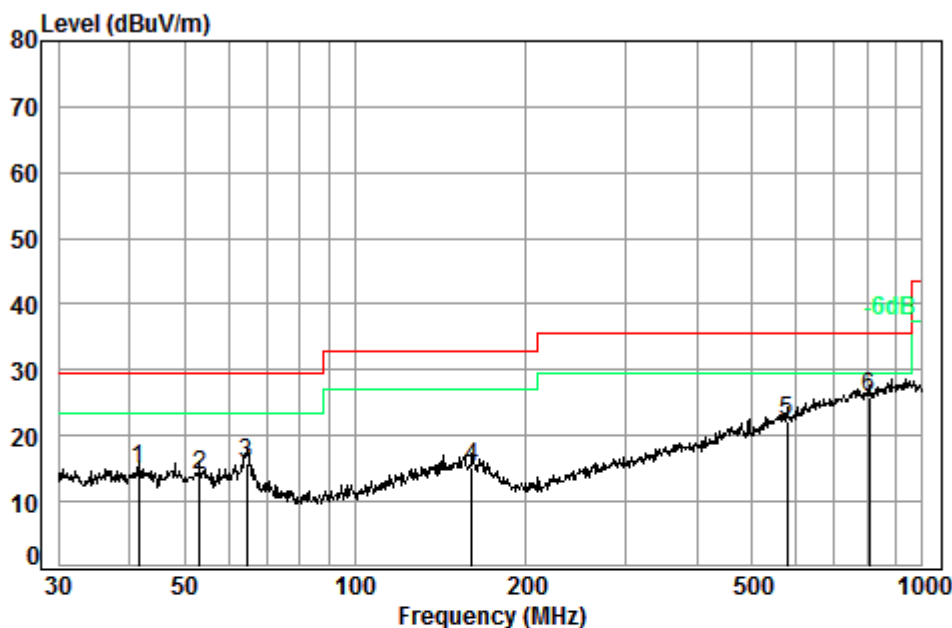

Condition: 10m HORIZONTAL

Job No. : 11406CR

Test Mode: b


|      | Freq   | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit Line | Over Limit |
|------|--------|------------|------------|---------------------|------------|--------|------------|------------|
|      | MHz    | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m     | dB         |
| 1    | 41.57  | 6.80       | 13.18      | 32.99               | 28.04      | 15.03  | 29.50      | -14.47     |
| 2    | 53.13  | 6.96       | 12.52      | 32.98               | 27.58      | 14.08  | 29.50      | -15.42     |
| 3    | 64.43  | 7.00       | 11.11      | 32.93               | 30.68      | 15.86  | 29.50      | -13.64     |
| 4    | 160.91 | 7.50       | 13.30      | 32.73               | 27.20      | 15.27  | 33.00      | -17.73     |
| 5    | 576.64 | 8.84       | 18.22      | 32.60               | 27.90      | 22.36  | 35.60      | -13.24     |
| 6 pp | 804.60 | 9.30       | 21.26      | 32.60               | 27.84      | 25.80  | 35.60      | -9.80      |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605  
Page: 84 of 91

Mode:b: Charging+Tx mode;Polarization: Vertical

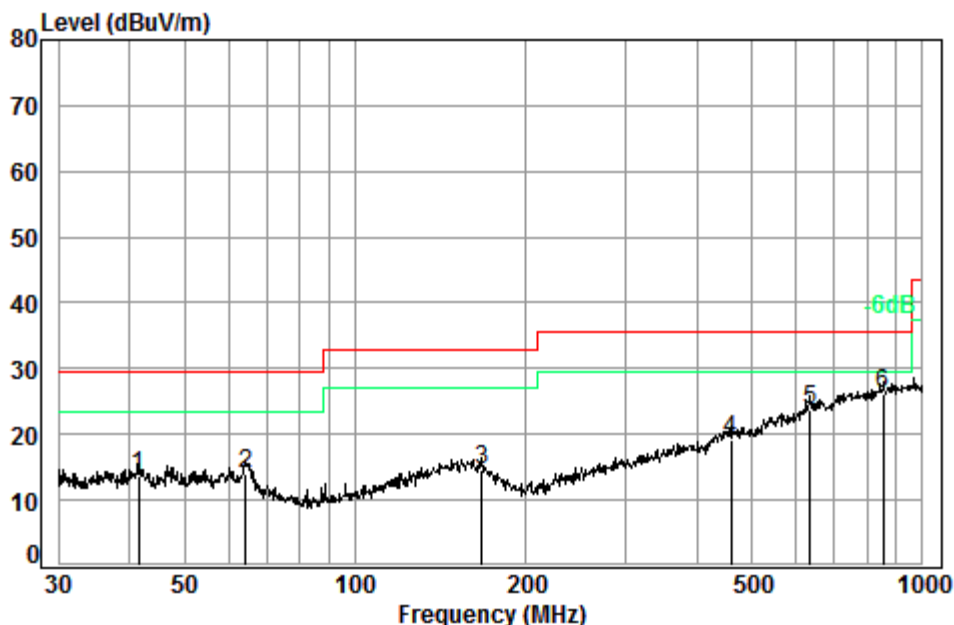

Condition: 10m VERTICAL

Job No. : 11406CR

Test Mode: b

|      | Freq   | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |
|------|--------|-------|--------|--------|-------|--------|--------|--------|
|      | MHz    | Loss  | Factor | Factor | Level | Level  | Line   | Limit  |
|      | MHz    | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |
| 1    | 41.57  | 6.80  | 13.18  | 32.99  | 26.55 | 13.54  | 29.50  | -15.96 |
| 2    | 64.21  | 7.00  | 11.15  | 32.93  | 28.62 | 13.84  | 29.50  | -15.66 |
| 3    | 167.24 | 7.50  | 12.68  | 32.73  | 27.09 | 14.54  | 33.00  | -18.46 |
| 4    | 460.73 | 8.45  | 16.30  | 32.60  | 27.14 | 19.29  | 35.60  | -16.31 |
| 5    | 633.91 | 8.99  | 19.33  | 32.60  | 28.15 | 23.87  | 35.60  | -11.73 |
| 6 pp | 854.02 | 9.37  | 21.65  | 32.54  | 27.63 | 26.11  | 35.60  | -9.49  |



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM161201140605

Page: 85 of 91

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

$L_3$ : Level @ 3m distance. Unit:  $\mu\text{V/m}$ ;

$L_{10}$ : Level @ 10m distance. Unit:  $\mu\text{V/m}$ ;

$D_3$ : 3m distance. Unit: m

$D_{10}$ : 10m distance. Unit: m

The level at 3m test distance is below:

| Frequency (MHz) | Level @ 10m (dBuV/m) | Level @ 10m ( $\mu\text{V/m}$ ) | Level @ 3m ( $\mu\text{V/m}$ ) | Level @ 3m (dBuV/m) | Limit @ 3m (dBuV/m) | Margin (dB) | Ant. Polarization |
|-----------------|----------------------|---------------------------------|--------------------------------|---------------------|---------------------|-------------|-------------------|
| 41.57           | 13.54                | 4.75                            | 15.84                          | 24.00               | 40.00               | -16.00      | V                 |
| 64.21           | 13.84                | 4.92                            | 16.40                          | 24.30               | 40.00               | -15.70      | V                 |
| 167.24          | 14.54                | 5.33                            | 17.78                          | 25.00               | 43.50               | -18.50      | V                 |
| 460.73          | 19.29                | 9.22                            | 30.72                          | 29.75               | 46.00               | -16.25      | V                 |
| 633.91          | 23.87                | 15.61                           | 52.04                          | 34.33               | 46.00               | -11.67      | V                 |
| 854.02          | 26.11                | 20.21                           | 67.36                          | 36.57               | 46.00               | -9.43       | V                 |
| 41.57           | 15.03                | 5.64                            | 18.81                          | 25.49               | 40.00               | -14.51      | H                 |
| 53.13           | 14.08                | 5.06                            | 16.86                          | 24.54               | 40.00               | -15.46      | H                 |
| 64.43           | 15.86                | 6.21                            | 20.70                          | 26.32               | 40.00               | -13.68      | H                 |
| 160.91          | 15.27                | 5.80                            | 19.34                          | 25.73               | 43.50               | -17.77      | H                 |
| 576.64          | 22.36                | 13.12                           | 43.74                          | 32.82               | 46.00               | -13.18      | H                 |
| 804.60          | 25.80                | 19.50                           | 64.99                          | 36.26               | 46.00               | -9.74       | H                 |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM161201140605

Page: 86 of 91

For above 1GHz:

| Test mode:      |                        | 8DPSK(3-DH1)    |                    | Test channel:     |                | Lowest              |                 | Remark:      | Peak |
|-----------------|------------------------|-----------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|------|
| Frequency (MHz) | Antenna factors (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |      |
| 3831.060        | 33.15                  | 7.75            | 38.62              | 45.07             | 47.35          | 74.00               | -26.65          | Vertical     |      |
| 4804.000        | 34.16                  | 8.87            | 39.03              | 45.27             | 49.27          | 74.00               | -24.73          | Vertical     |      |
| 6095.816        | 34.78                  | 10.44           | 38.94              | 44.77             | 51.05          | 74.00               | -22.95          | Vertical     |      |
| 7206.000        | 36.42                  | 10.68           | 38.18              | 43.26             | 52.18          | 74.00               | -21.82          | Vertical     |      |
| 9608.000        | 37.52                  | 12.50           | 36.99              | 40.72             | 53.75          | 74.00               | -20.25          | Vertical     |      |
| 12208.390       | 38.73                  | 14.39           | 38.52              | 38.55             | 53.15          | 74.00               | -20.85          | Vertical     |      |
| 3858.877        | 33.22                  | 7.76            | 38.64              | 45.16             | 47.50          | 74.00               | -26.50          | Horizontal   |      |
| 4804.000        | 34.16                  | 8.87            | 39.03              | 45.27             | 49.27          | 74.00               | -24.73          | Horizontal   |      |
| 6338.673        | 34.97                  | 10.13           | 38.79              | 44.95             | 51.26          | 74.00               | -22.74          | Horizontal   |      |
| 7206.000        | 36.42                  | 10.68           | 38.18              | 42.68             | 51.60          | 74.00               | -22.40          | Horizontal   |      |
| 9608.000        | 37.52                  | 12.50           | 36.99              | 40.15             | 53.18          | 74.00               | -20.82          | Horizontal   |      |
| 12243.770       | 38.75                  | 14.36           | 38.55              | 38.12             | 52.68          | 74.00               | -21.32          | Horizontal   |      |

| Test mode:      |                        | 8DPSK(3-DH1)    |                 | Test channel:        |                         | Middle         |                 | Remark:      | Peak |
|-----------------|------------------------|-----------------|-----------------|----------------------|-------------------------|----------------|-----------------|--------------|------|
| Frequency (MHz) | Antenna factors (dB/m) | Cable Loss (dB) | Cable Loss (dB) | Reading Level (dBμV) | Emission Level (dBμV/m) | Limit (dBμV/m) | Over limit (dB) | Polarization |      |
| 3584.372        | 32.45                  | 7.66            | 38.51           | 44.66                | 46.26                   | 74.00          | -27.74          | Vertical     |      |
| 4882.000        | 34.30                  | 8.98            | 39.06           | 45.10                | 49.32                   | 74.00          | -24.68          | Vertical     |      |
| 6078.201        | 34.76                  | 10.46           | 38.95           | 44.38                | 50.65                   | 74.00          | -23.35          | Vertical     |      |
| 7323.000        | 36.37                  | 10.72           | 38.06           | 43.30                | 52.33                   | 74.00          | -21.67          | Vertical     |      |
| 9764.000        | 37.55                  | 12.58           | 36.91           | 40.41                | 53.63                   | 74.00          | -20.37          | Vertical     |      |
| 12261.500       | 38.76                  | 14.34           | 38.57           | 38.48                | 53.01                   | 74.00          | -20.99          | Vertical     |      |
| 3732.570        | 32.87                  | 7.72            | 38.58           | 45.24                | 47.25                   | 74.00          | -26.75          | Horizontal   |      |
| 4882.000        | 34.30                  | 8.98            | 39.06           | 46.47                | 50.69                   | 74.00          | -23.31          | Horizontal   |      |
| 6060.637        | 34.75                  | 10.48           | 38.96           | 44.66                | 50.93                   | 74.00          | -23.07          | Horizontal   |      |
| 7323.000        | 36.37                  | 10.72           | 38.06           | 43.68                | 52.71                   | 74.00          | -21.29          | Horizontal   |      |
| 9764.000        | 37.55                  | 12.58           | 36.91           | 40.40                | 53.62                   | 74.00          | -20.38          | Horizontal   |      |
| 12137.940       | 38.68                  | 14.45           | 38.44           | 37.66                | 52.35                   | 74.00          | -21.65          | Horizontal   |      |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM161201140605

Page: 87 of 91

| Test mode:         |                              | 8DPSK(3-DH1)          |                          | Test channel:              |                               | Highest           |                       | Remark:      |  | Peak |
|--------------------|------------------------------|-----------------------|--------------------------|----------------------------|-------------------------------|-------------------|-----------------------|--------------|--|------|
| Frequency<br>(MHz) | Antenna<br>factors<br>(dB/m) | Cable<br>Loss<br>(dB) | Preamp<br>factor<br>(dB) | Reading<br>Level<br>(dBμV) | Emission<br>Level<br>(dBμV/m) | Limit<br>(dBμV/m) | Over<br>limit<br>(dB) | Polarization |  |      |
| 3864.464           | 33.24                        | 7.76                  | 38.64                    | 44.52                      | 46.88                         | 74.00             | -27.12                | Vertical     |  |      |
| 4960.000           | 34.43                        | 9.09                  | 39.09                    | 45.59                      | 50.02                         | 74.00             | -23.98                | Vertical     |  |      |
| 5845.324           | 34.61                        | 10.13                 | 39.01                    | 45.53                      | 51.26                         | 74.00             | -22.74                | Vertical     |  |      |
| 7440.000           | 36.32                        | 10.77                 | 37.94                    | 42.70                      | 51.85                         | 74.00             | -22.15                | Vertical     |  |      |
| 9920.000           | 37.58                        | 12.67                 | 36.84                    | 40.32                      | 53.73                         | 74.00             | -20.27                | Vertical     |  |      |
| 12155.510          | 38.69                        | 14.43                 | 38.46                    | 38.85                      | 53.51                         | 74.00             | -20.49                | Vertical     |  |      |
| 3853.298           | 33.21                        | 7.76                  | 38.64                    | 44.86                      | 47.19                         | 74.00             | -26.81                | Horizontal   |  |      |
| 4960.000           | 34.43                        | 9.09                  | 39.09                    | 46.06                      | 50.49                         | 74.00             | -23.51                | Horizontal   |  |      |
| 6060.637           | 34.75                        | 10.48                 | 38.96                    | 44.35                      | 50.62                         | 74.00             | -23.38                | Horizontal   |  |      |
| 7440.000           | 36.32                        | 10.77                 | 37.94                    | 42.94                      | 52.09                         | 74.00             | -21.91                | Horizontal   |  |      |
| 9920.000           | 37.58                        | 12.67                 | 36.84                    | 39.87                      | 53.28                         | 74.00             | -20.72                | Horizontal   |  |      |
| 12494.320          | 38.90                        | 14.15                 | 38.80                    | 38.09                      | 52.34                         | 74.00             | -21.66                | Horizontal   |  |      |


**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



## 8. Restricted bands around fundamental frequency

|                  |              |               |        |         |      |          |
|------------------|--------------|---------------|--------|---------|------|----------|
| Worse case mode: | 8DPSK(3-DH5) | Test channel: | Lowest | Remark: | Peak | Vertical |
|------------------|--------------|---------------|--------|---------|------|----------|

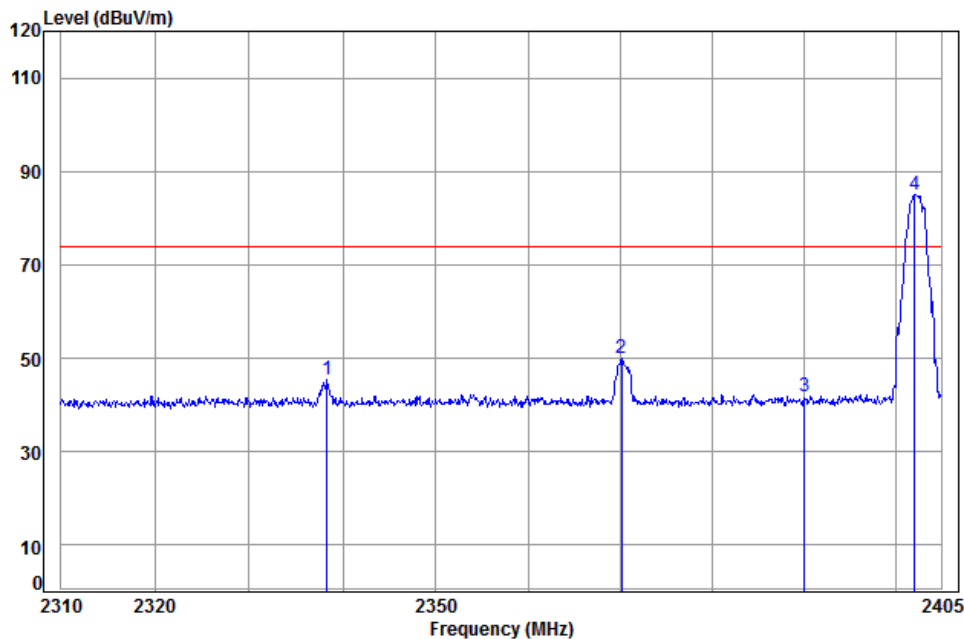

Condition: 3m Vertical

Job No: : 11406CR

Mode: : 2402 Band edge


|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Limit Level | Over Limit   |
|------|----------|------------|------------|---------------|------------|-------------|--------------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m      | dB           |
| 1    | 2338.288 | 5.30       | 28.92      | 38.14         | 49.45      | 45.53       | 74.00 -28.47 |
| 2    | 2370.072 | 5.32       | 29.02      | 38.14         | 53.74      | 49.94       | 74.00 -24.06 |
| 3    | 2390.000 | 5.34       | 29.08      | 38.14         | 45.60      | 41.88       | 74.00 -32.12 |
| 4 pp | 2402.094 | 5.35       | 29.11      | 38.15         | 88.58      | 84.89       | 74.00 10.89  |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605  
Page: 89 of 91

|                  |              |               |        |         |      |            |
|------------------|--------------|---------------|--------|---------|------|------------|
| Worse case mode: | 8DPSK(3-DH5) | Test channel: | Lowest | Remark: | Peak | Horizontal |
|------------------|--------------|---------------|--------|---------|------|------------|

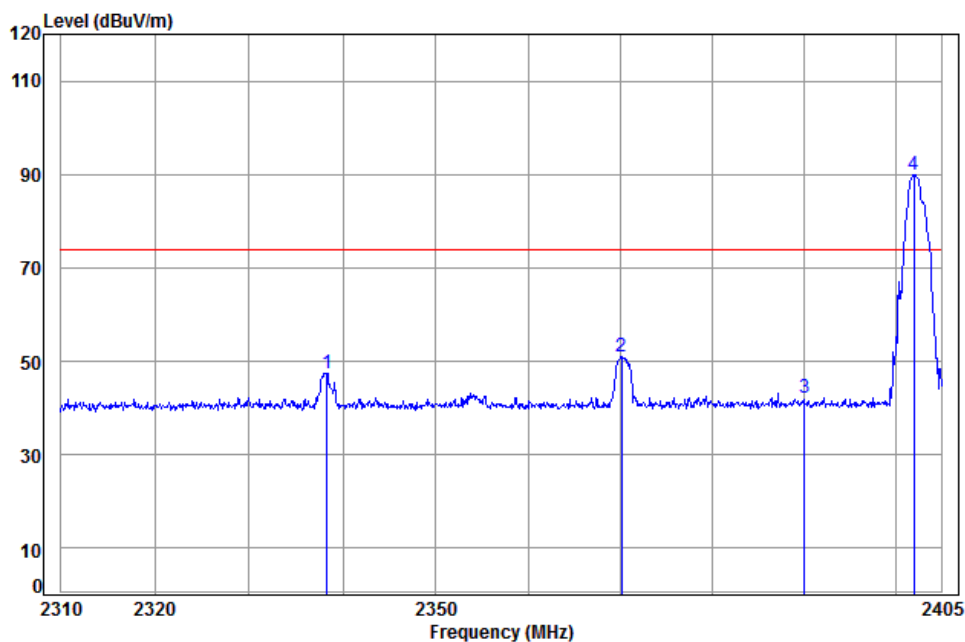

Condition: 3m Horizontal

Job No: : 11406CR

Mode: : 2402 Band edge


|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Limit Level | Over Limit |
|------|----------|------------|------------|---------------|------------|-------------|------------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m      | dB         |
| 1    | 2338.288 | 5.30       | 28.92      | 38.14         | 51.42      | 74.00       | -26.50     |
| 2    | 2370.072 | 5.32       | 29.02      | 38.14         | 54.88      | 74.00       | -22.92     |
| 3    | 2390.000 | 5.34       | 29.08      | 38.14         | 45.78      | 74.00       | -31.94     |
| 4 pp | 2401.997 | 5.35       | 29.11      | 38.15         | 93.53      | 74.00       | 15.84      |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605  
Page: 90 of 91

|                  |              |               |         |         |      |          |
|------------------|--------------|---------------|---------|---------|------|----------|
| Worse case mode: | 8DPSK(3-DH5) | Test channel: | Highest | Remark: | Peak | Vertical |
|------------------|--------------|---------------|---------|---------|------|----------|

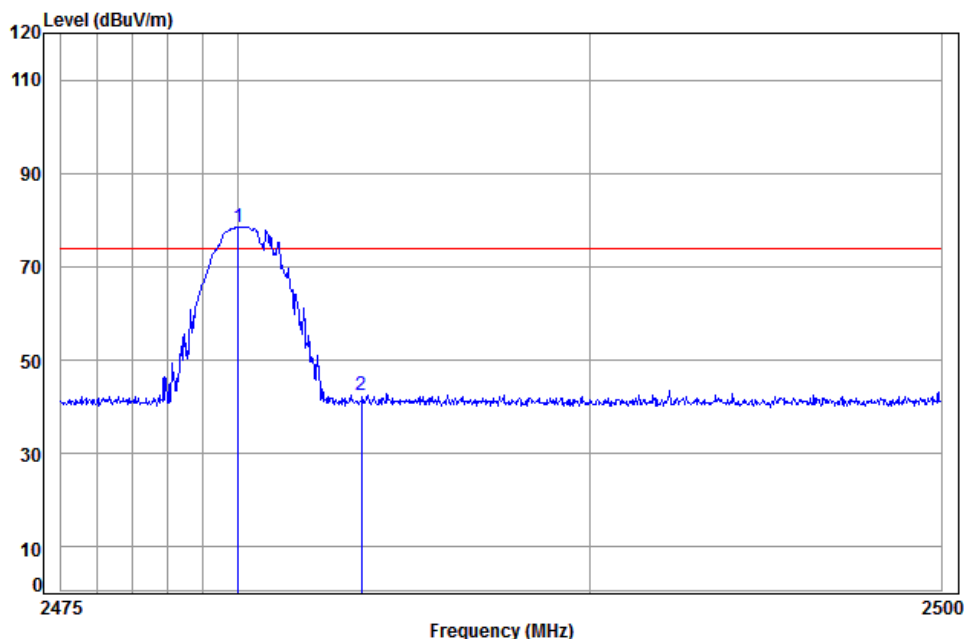

Condition: 3m Vertical

Job No: : 11406CR

Mode: : 2480 Band edge

|   |             | Cable | Ant    | Preamp | Read  | Limit  | Over         |
|---|-------------|-------|--------|--------|-------|--------|--------------|
|   | Freq        | Loss  | Factor | Factor | Level | Line   | Limit        |
|   | MHz         | dB    | dB/m   | dB     | dBuV  | dBuV/m | dB           |
| 1 | pp 2480.005 | 5.41  | 29.34  | 38.15  | 81.97 | 78.57  | 74.00 4.57   |
| 2 | 2483.500    | 5.41  | 29.35  | 38.15  | 45.97 | 42.58  | 74.00 -31.42 |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Report No.: SZEM161201140605

Page: 91 of 91

|                  |              |               |         |         |      |            |
|------------------|--------------|---------------|---------|---------|------|------------|
| Worse case mode: | 8DPSK(3-DH5) | Test channel: | Highest | Remark: | Peak | Horizontal |
|------------------|--------------|---------------|---------|---------|------|------------|

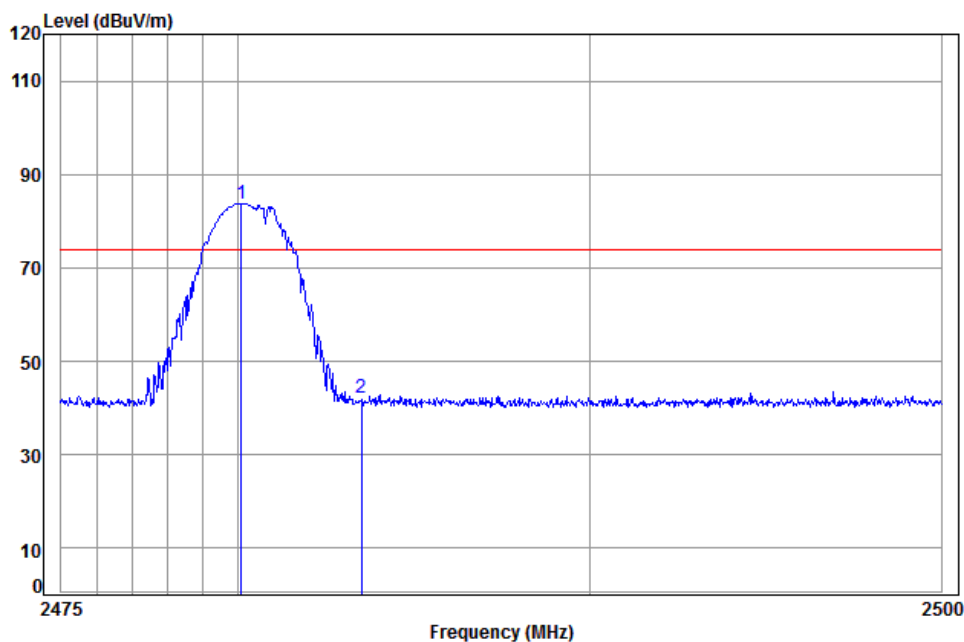

Condition: 3m Horizontal

Job No: : 11406CR

Mode: : 2480 Band edge

|      | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Limit Level | Over Limit   |
|------|----------|------------|------------|---------------|------------|-------------|--------------|
|      | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m      | dB           |
| 1 pp | 2480.104 | 5.41       | 29.34      | 38.15         | 87.18      | 83.78       | 74.00 9.78   |
| 2    | 2483.500 | 5.41       | 29.35      | 38.15         | 45.69      | 42.30       | 74.00 -31.70 |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor