

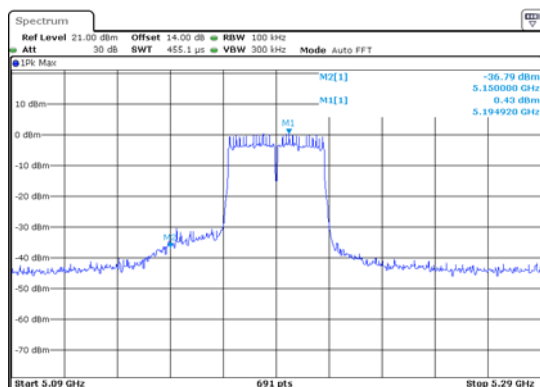
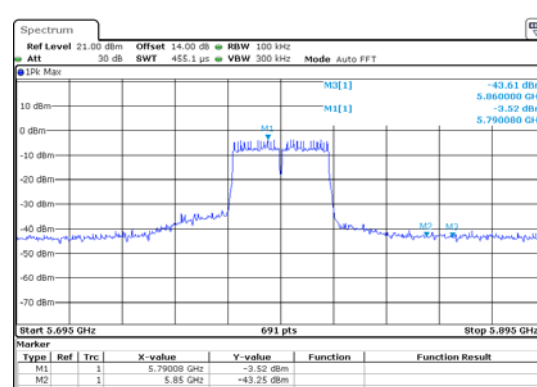
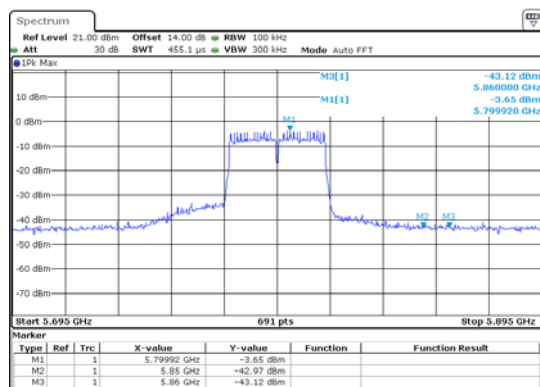
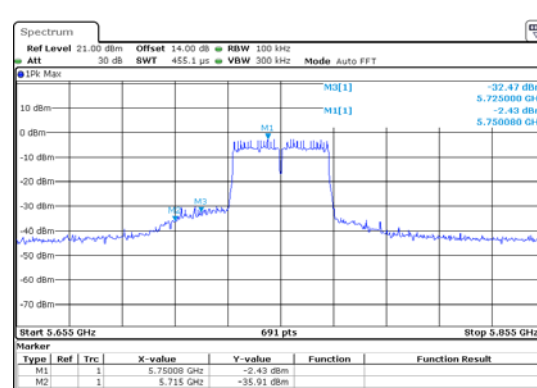
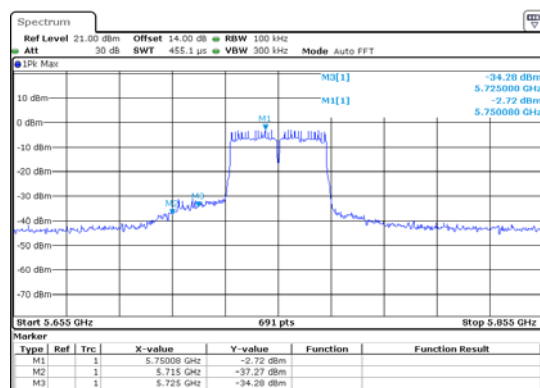
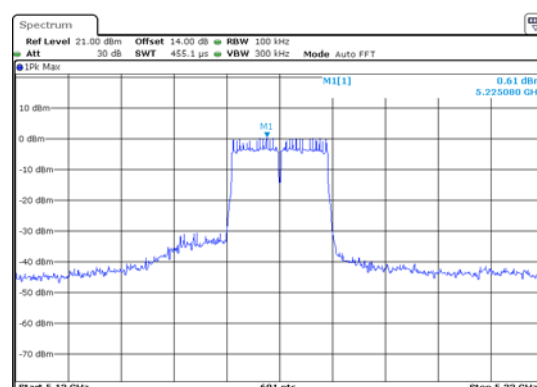



ANT 1(11AC40)

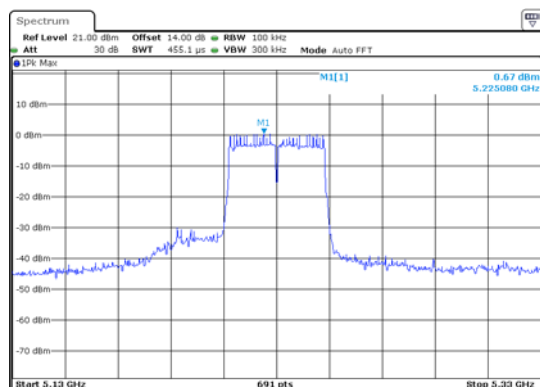




ANT 2(11AC40)

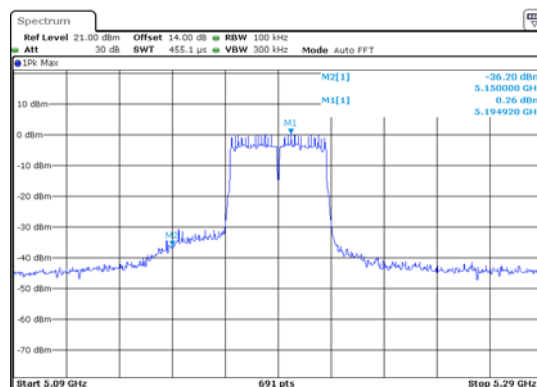

ANT 1(11AC80)

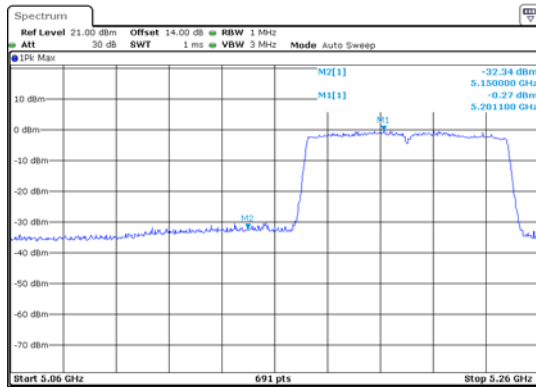

ANT 2(11AC80)

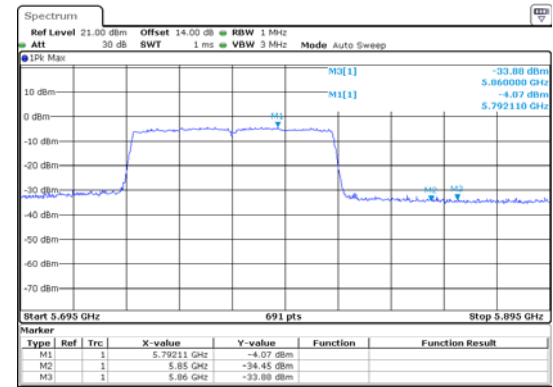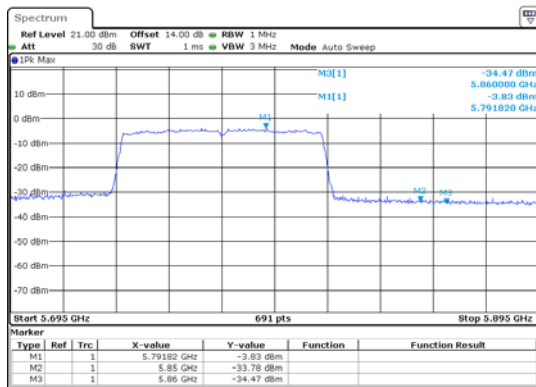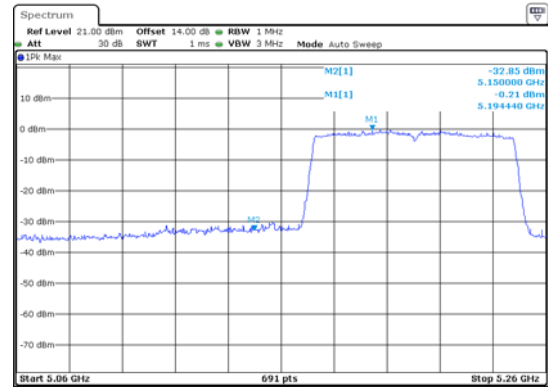

Radiated Band Edge Result

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$
3. Display the measurement of peak values.
4. The EUT is tested radiation emission at each test mode (802.11a/ac/n) in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots.
5. The average measurement was not performed when peak measured data under the limit of average detection.

Test mode: 802.11a TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2078

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5180MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 18:23:45

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

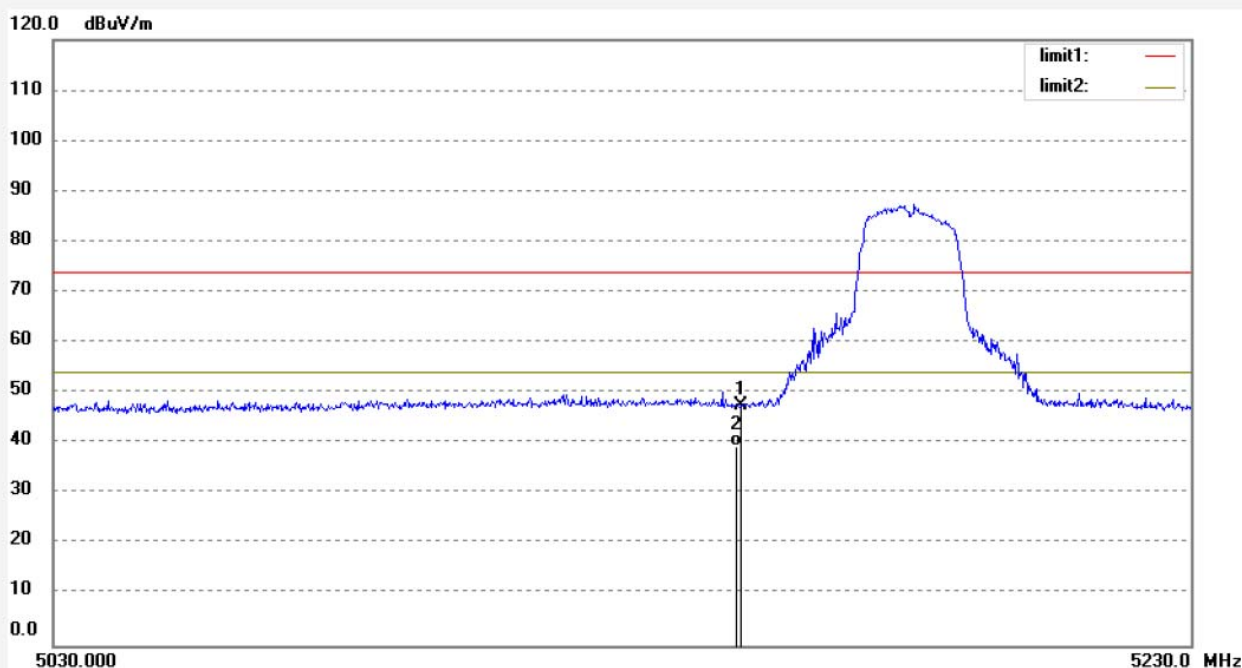

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.09	6.39	47.48	74.00	-26.52	peak	150	118	
2	5150.000	33.11	6.39	39.50	54.00	-14.50	AVG	150	130	

Job No.: star2018 #2077

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5180MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 18:22:50

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

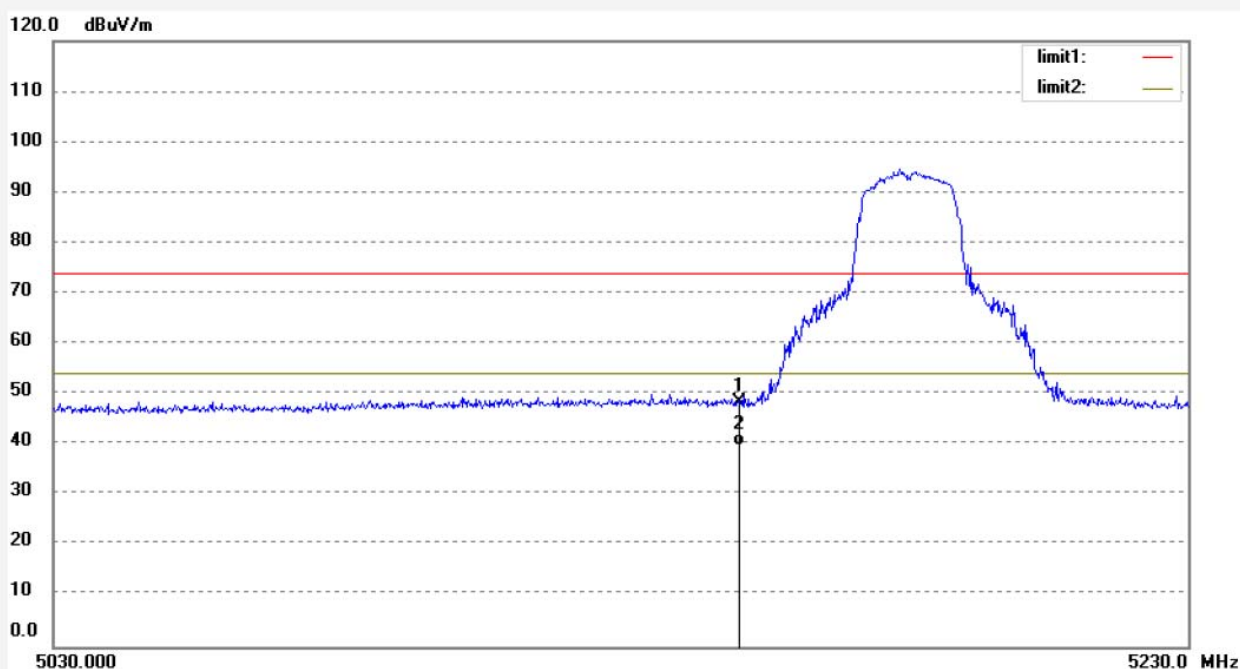

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.97	6.39	48.36	74.00	-25.64	peak	150	187	
2	5150.000	33.48	6.39	39.87	54.00	-14.13	AVG	150	118	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2079

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5240MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 18:25:47

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

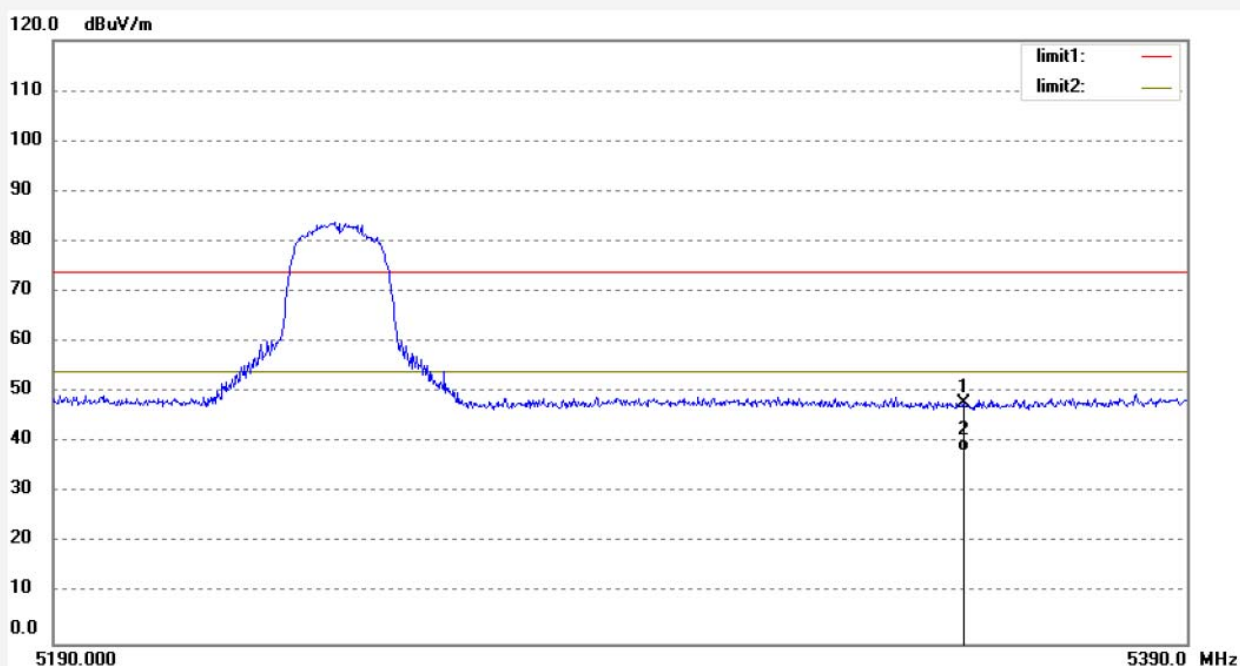

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.96	6.86	47.82	74.00	-26.18	peak	150	328	
2	5350.000	31.28	6.86	38.14	54.00	-15.86	AVG	150	330	

Job No.: star2018 #2080

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5240MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 18:26:40

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

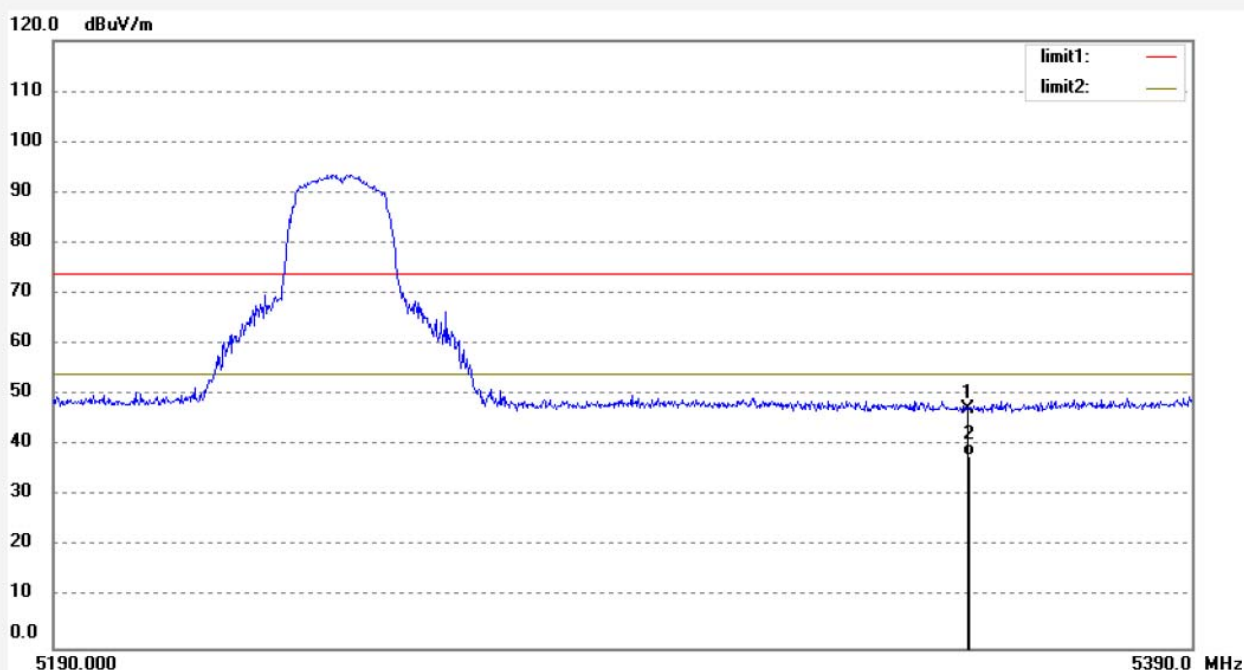

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.53	6.86	47.39	74.00	-26.61	peak	150	127	
2	5350.000	31.00	6.86	37.86	54.00	-16.14	AVG	150	130	

Job No.: star2018 #2090

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5745MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 18:38:56

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

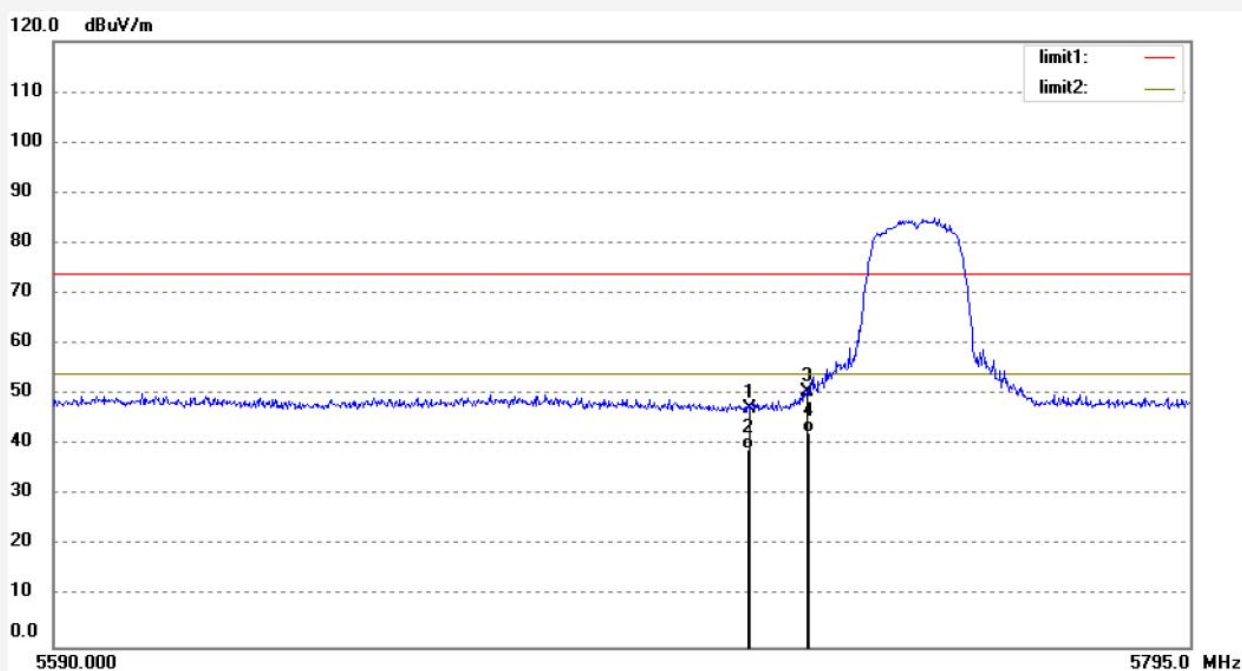

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	39.64	7.59	47.23	74.00	-26.77	peak	150	329	
2	5715.000	31.57	7.59	39.16	54.00	-14.84	AVG	150	330	
3	5725.000	42.96	7.65	50.61	74.00	-23.39	peak	150	137	
4	5725.000	34.69	7.65	42.34	54.00	-11.66	AVG	150	318	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2089

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5745MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 18:38:10

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

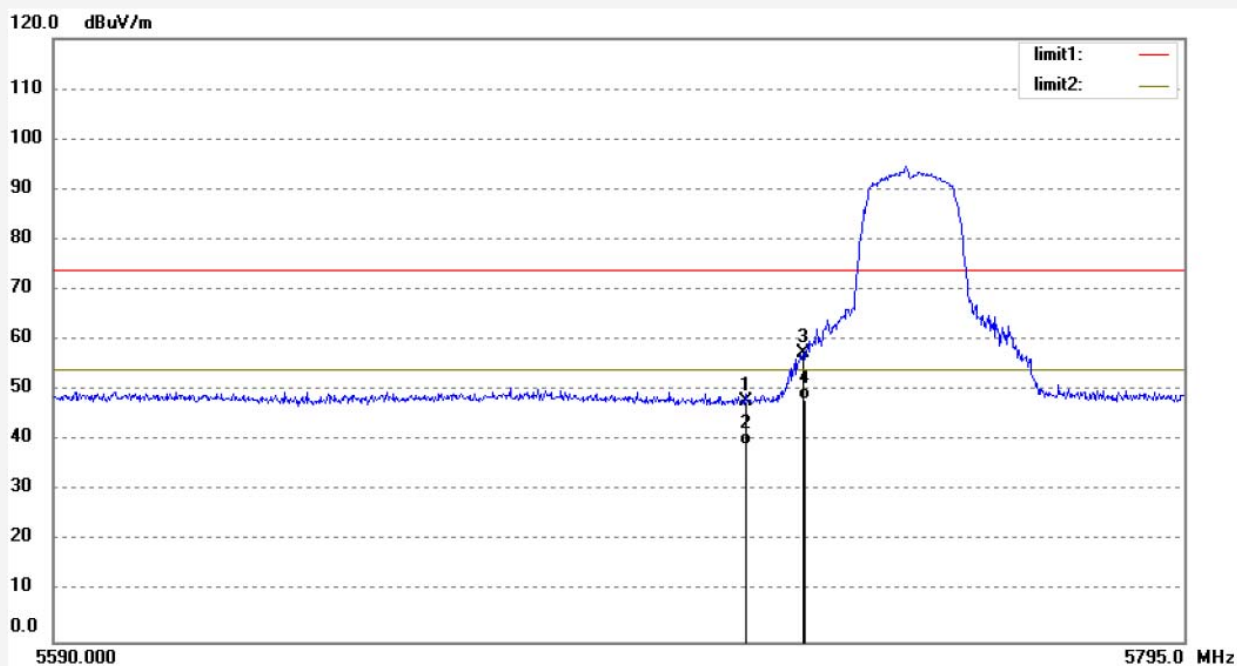

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	40.27	7.59	47.86	74.00	-26.14	peak	150	112	
2	5715.000	31.57	7.59	39.16	54.00	-14.84	AVG	150	103	
3	5725.000	49.75	7.65	57.40	74.00	-16.60	peak	150	130	
4	5725.000	40.59	7.65	48.24	54.00	-5.76	AVG	150	140	

Job No.: star2018 #2091

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5825MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 18:41:26

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

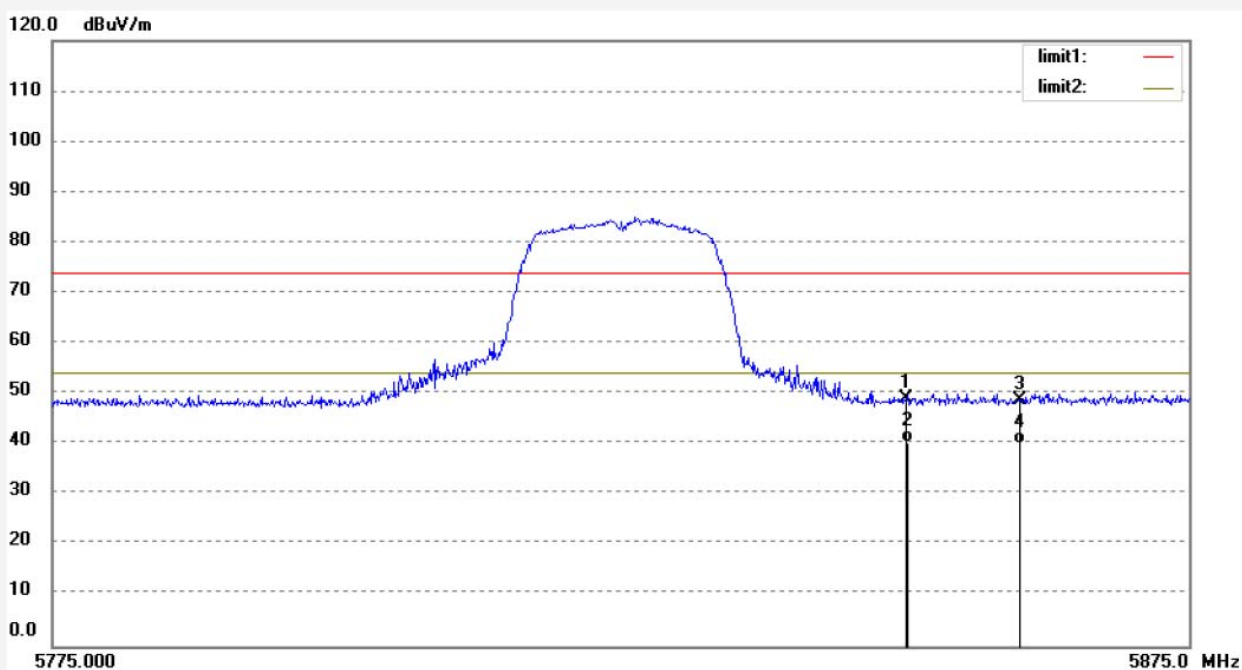

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	40.86	8.25	49.11	74.00	-24.89	peak	150	318	
2	5850.000	32.00	8.25	40.25	54.00	-13.75	AVG	150	312	
3	5860.000	40.60	8.28	48.88	74.00	-25.12	peak	150	327	
4	5860.000	31.67	8.28	39.95	54.00	-14.05	AVG	150	328	

Job No.: star2018 #2092

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5825MHz(802.11a)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 18:42:13

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

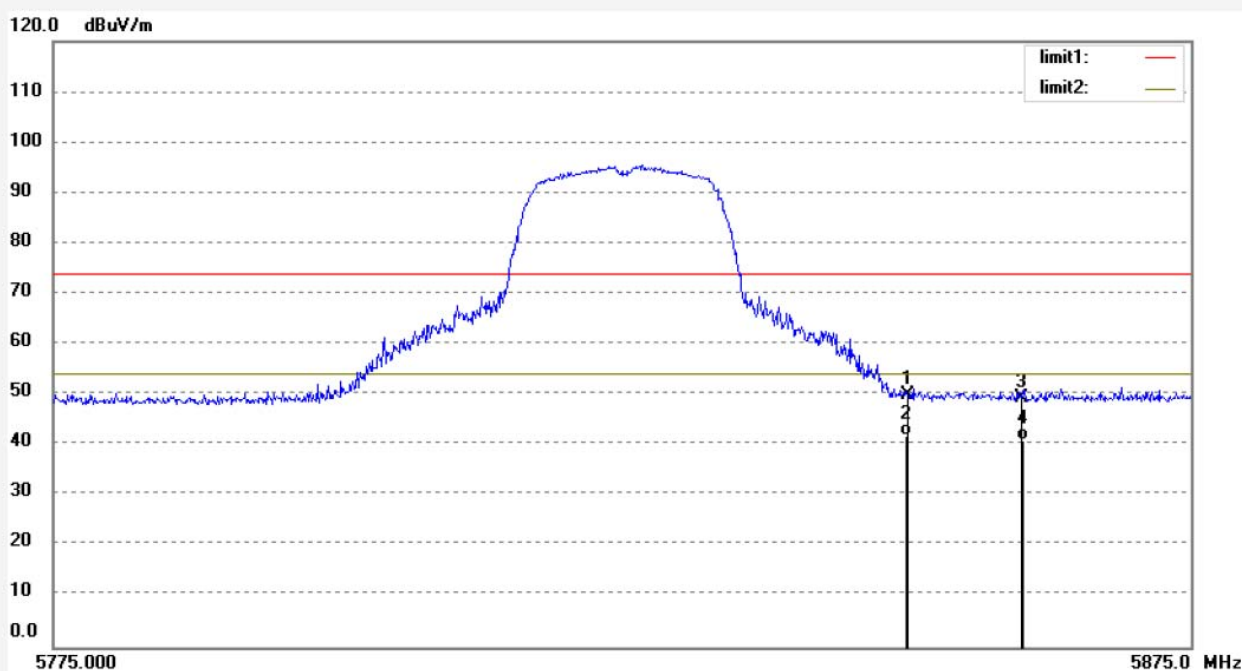

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	41.57	8.25	49.82	74.00	-24.18	peak	150	38	
2	5850.000	33.70	8.25	41.95	54.00	-12.05	AVG	150	40	
3	5860.000	41.20	8.28	49.48	74.00	-24.52	peak	150	328	
4	5860.000	32.64	8.28	40.92	54.00	-13.08	AVG	150	330	

Test mode: 802.11n20 TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2094
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: e-Screen ETX slot-in Android box
Mode: TX 5180MHz(802.11n)
Model: RK3399
Manufacturer: Legamaster International B.V.

Polarization: Horizontal
Power Source: DC 12V
Date: 2018/09/22
Time: 18:45:14
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20181650

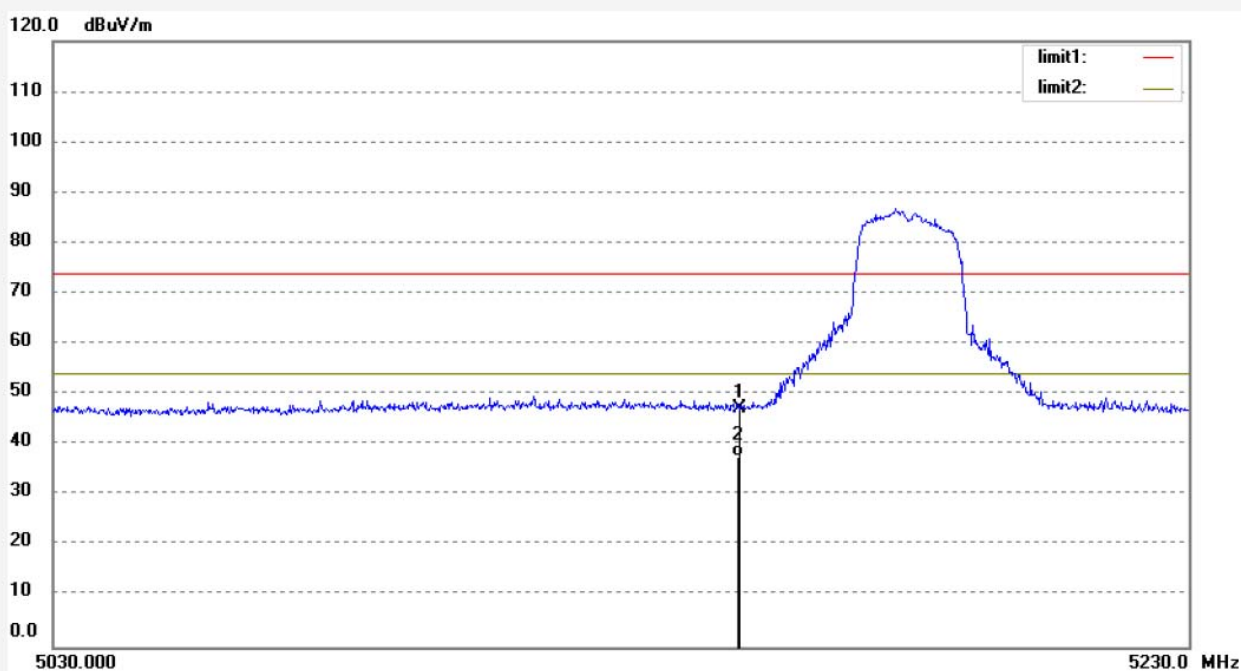

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	40.84	6.39	47.23	74.00	-26.77	peak	150	318	
2	5150.000	31.27	6.39	37.66	54.00	-16.34	AVG	150	320	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2093
Standard: FCC PK
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: e-Screen ETX slot-in Android box
Mode: TX 5180MHz(802.11n)
Model: RK3399
Manufacturer: Legamaster International B.V.

Polarization: Vertical
Power Source: DC 12V
Date: 2018/09/22
Time: 18:44:29
Engineer Signature: star
Distance: 3m

Note: Report No.:ATE20181650

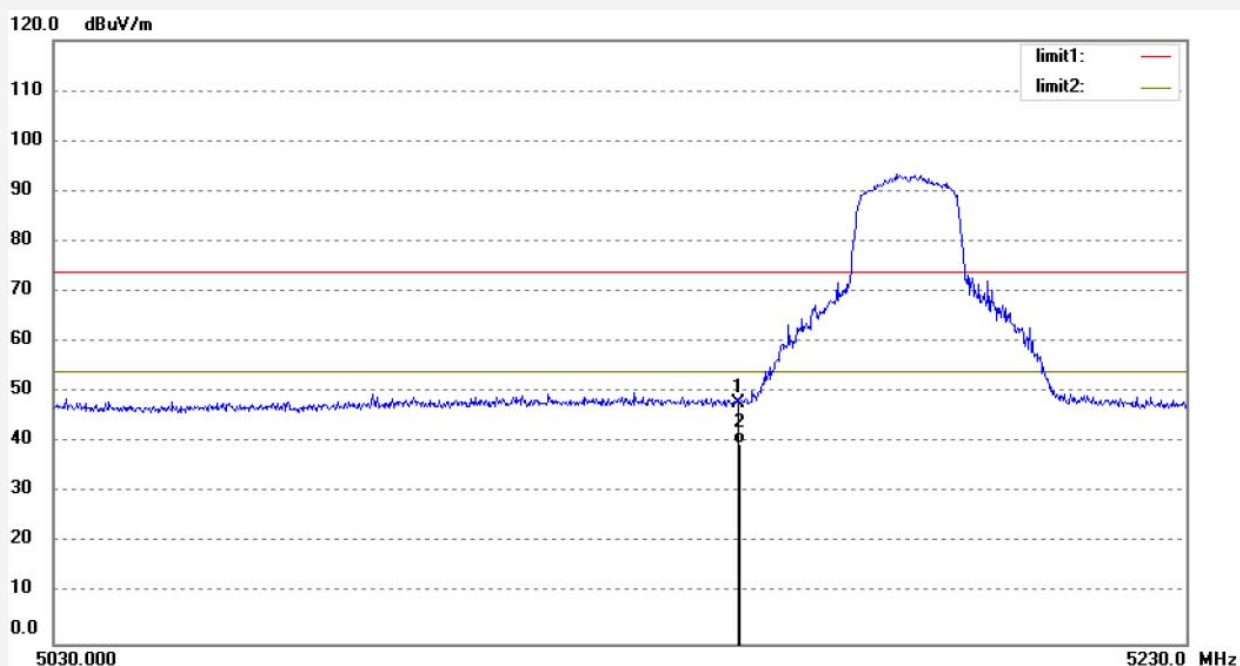

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.52	6.39	47.91	74.00	-26.09	peak	150	329	
2	5150.000	33.27	6.39	39.66	54.00	-14.34	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2095

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5240MHz(802.11n)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 18:46:44

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

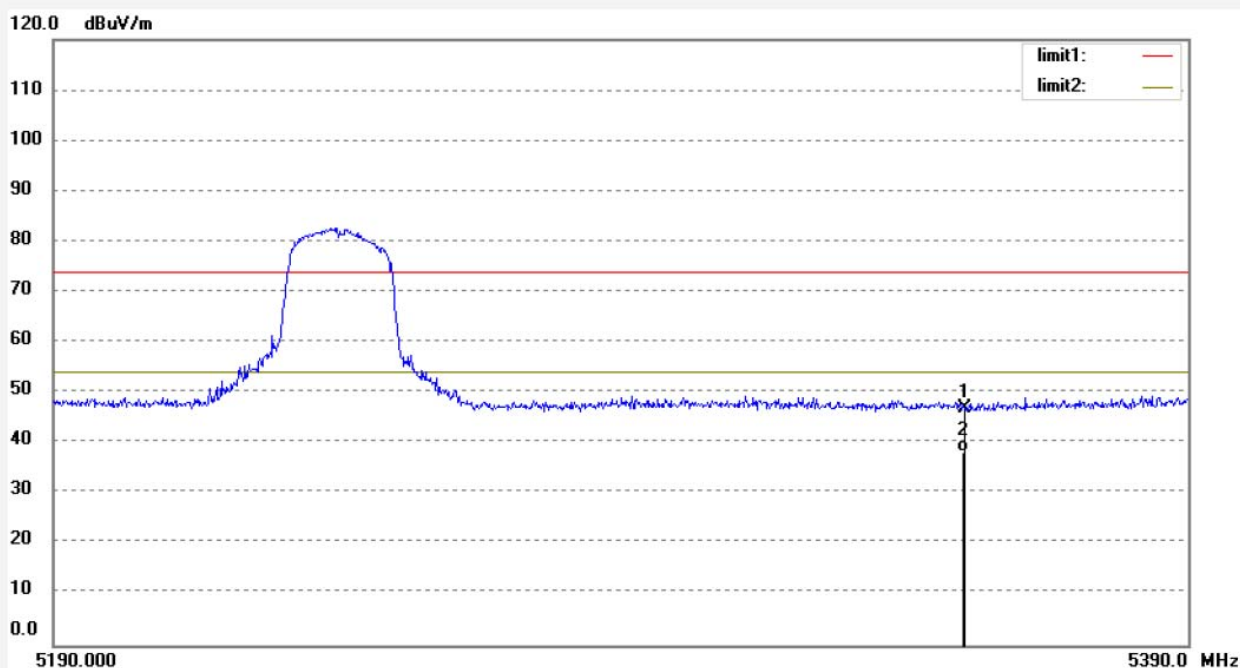

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.20	6.86	47.06	74.00	-26.94	peak	150	313	
2	5350.000	31.42	6.86	38.28	54.00	-15.72	AVG	150	328	

Job No.: star2018 #2096

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5240MHz(802.11n)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 18:47:37

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

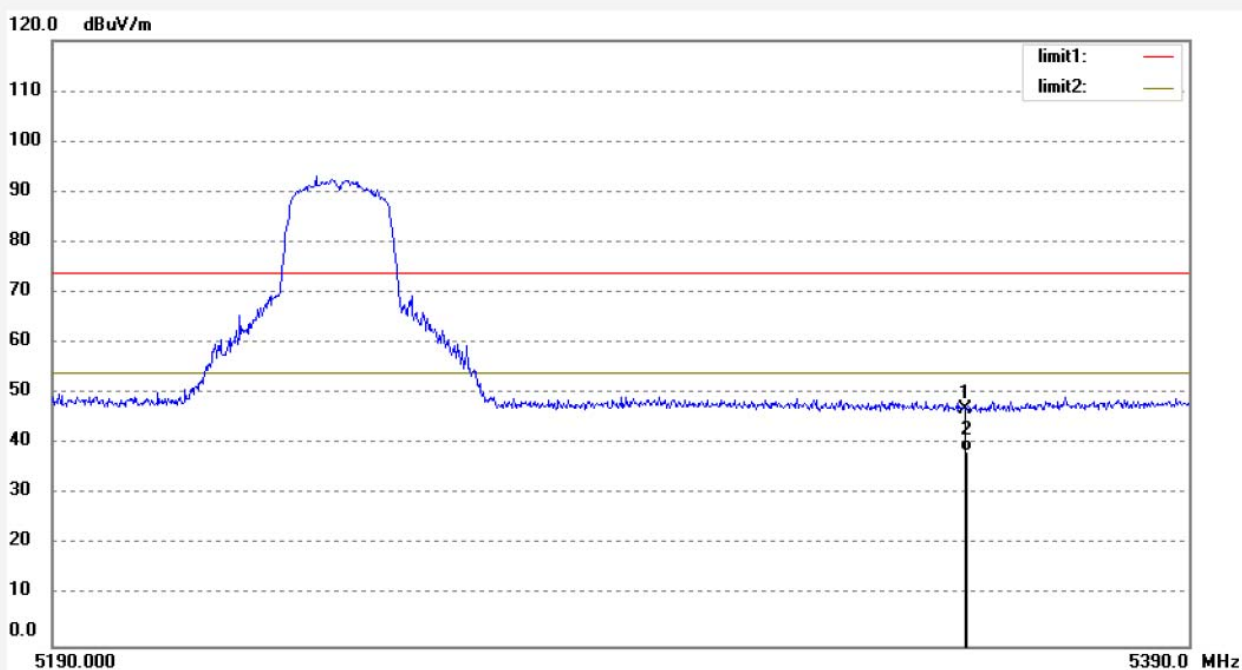

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.13	6.86	46.99	74.00	-27.01	peak	150	323	
2	5350.000	31.74	6.86	38.60	54.00	-15.40	AVG	150	330	

Job No.: star2018 #2106

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5745MHz(802.11n)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 18:59:41

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

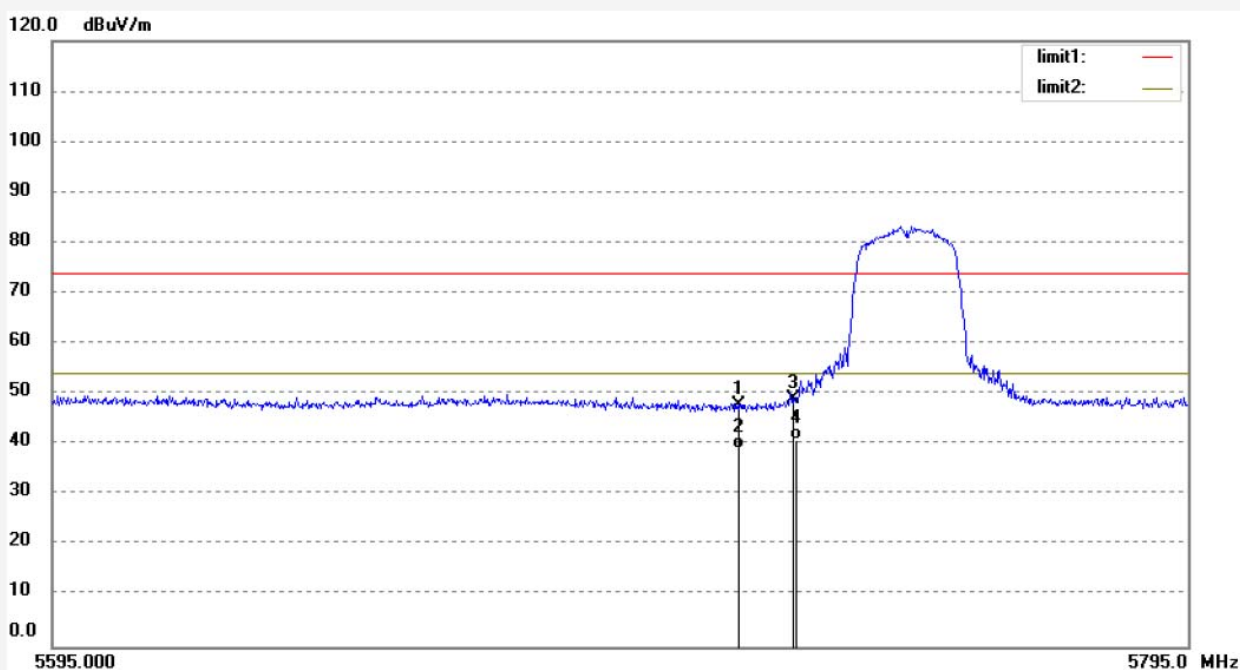

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	40.25	7.59	47.84	74.00	-26.16	peak	150	327	
2	5715.000	31.55	7.59	39.14	54.00	-14.86	AVG	150	326	
3	5725.000	41.31	7.65	48.96	74.00	-25.04	peak	150	330	
4	5725.000	33.41	7.65	41.06	54.00	-12.94	AVG	150	331	

Job No.: star2018 #2105

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5745MHz(802.11n)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 18:58:57

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

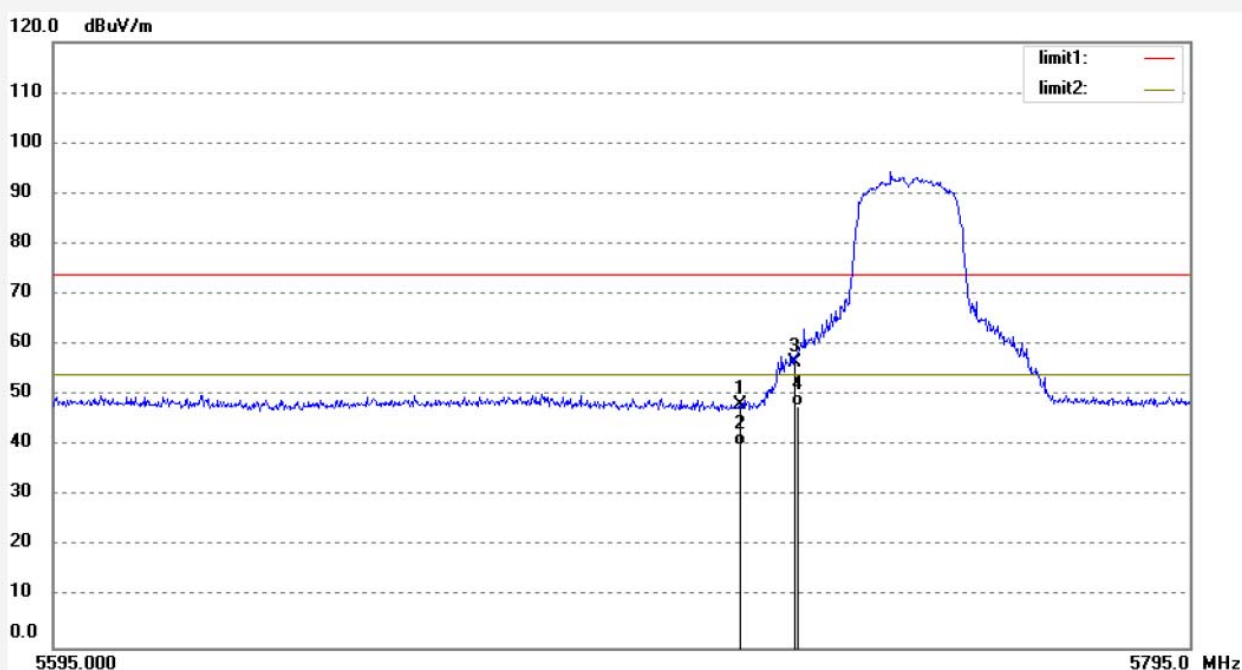

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	40.67	7.59	48.26	74.00	-25.74	peak	150	278	
2	5715.000	32.41	7.59	40.00	54.00	-14.00	AVG	150	327	
3	5725.000	48.99	7.65	56.64	74.00	-17.36	peak	150	329	
4	5725.000	40.06	7.65	47.71	54.00	-6.29	AVG	150	327	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2107

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5825MHz(802.11n)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 19:01:24

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

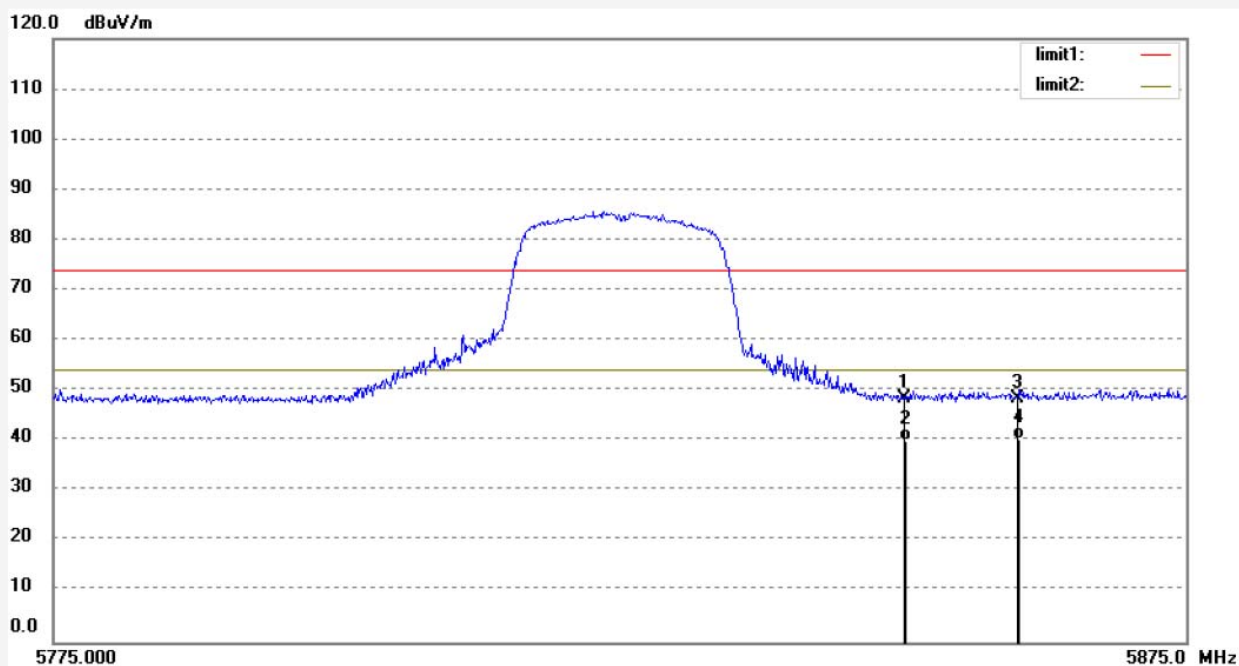

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	40.34	8.25	48.59	74.00	-25.41	peak	150	328	
2	5850.000	31.84	8.25	40.09	54.00	-13.91	AVG	150	330	
3	5860.000	40.26	8.28	48.54	74.00	-25.46	peak	150	312	
4	5860.000	32.00	8.28	40.28	54.00	-13.72	AVG	150	329	

Job No.: star2018 #2108

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5825MHz(802.11n)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 19:02:08

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

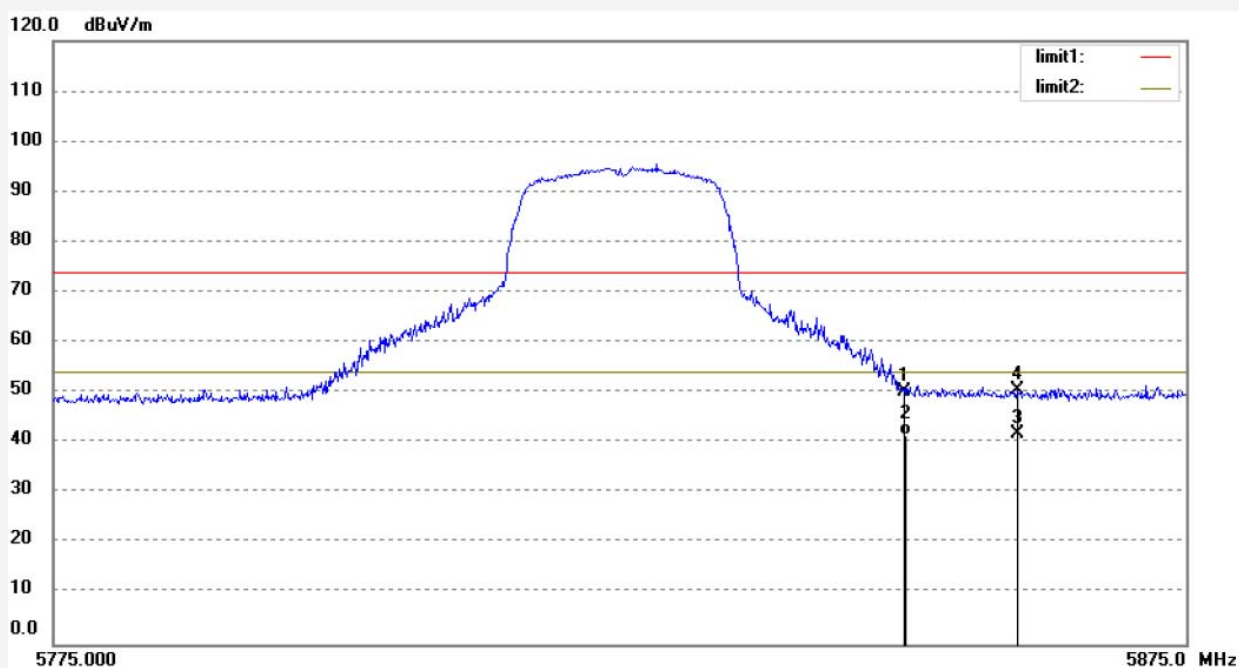

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	42.09	8.25	50.34	74.00	-23.66	peak	150	321	
2	5850.000	33.41	8.25	41.66	54.00	-12.34	AVG	150	320	
3	5860.000	33.57	8.28	41.85	74.00	-32.15	peak	150	128	
4	5860.000	42.17	8.28	50.45	74.00	-23.55	AVG	150	130	

Test mode: 802.11ac 20MHz TX Frequency: 5180MHz, 5240MHz, 5745MHz, 5825MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2110

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5180MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 19:04:57

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

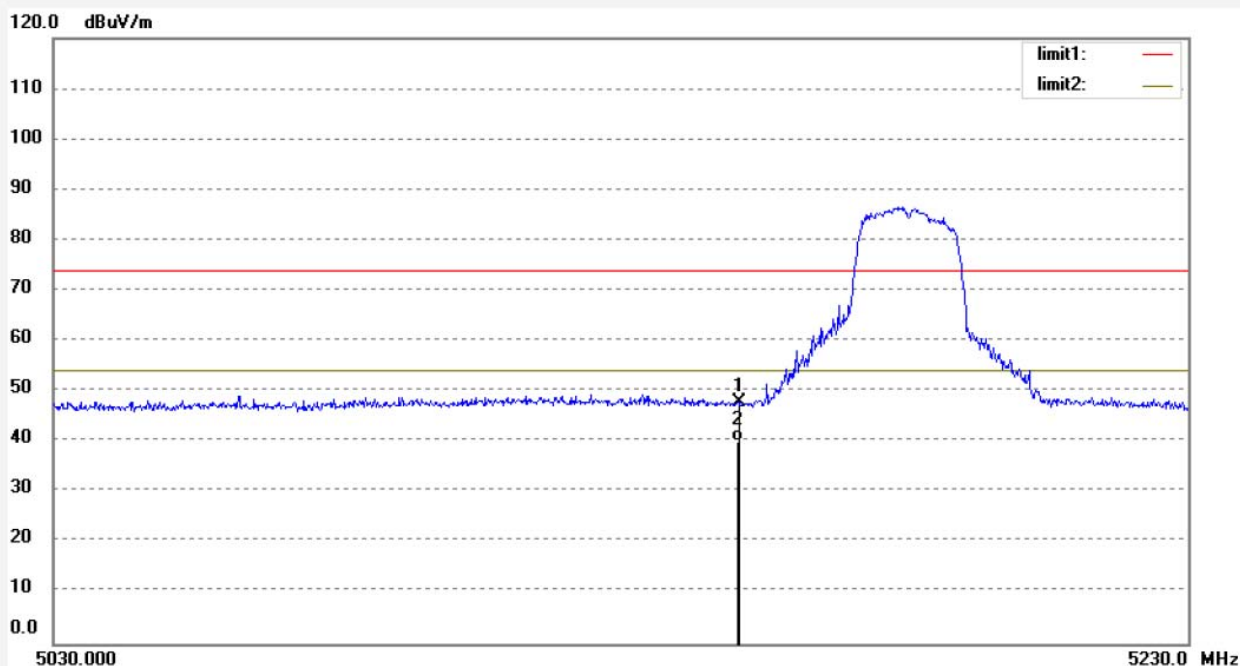

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	41.35	6.39	47.74	74.00	-26.26	peak	150	328	
2	5150.000	33.73	6.39	40.12	54.00	-13.88	AVG	150	330	

Job No.: star2018 #2109

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5180MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 19:04:06

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

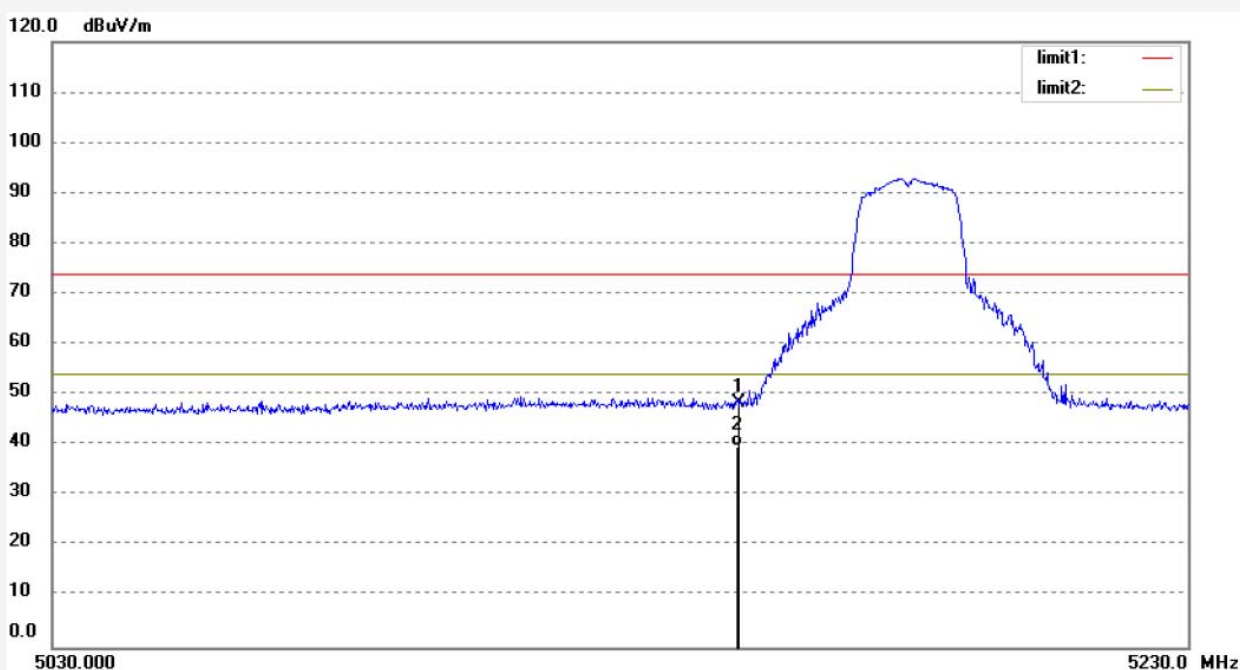

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	42.05	6.39	48.44	74.00	-25.56	peak	150	184	
2	5150.000	33.43	6.39	39.82	54.00	-14.18	AVG	150	187	

Job No.: star2018 #2111

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5240MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 19:06:33

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

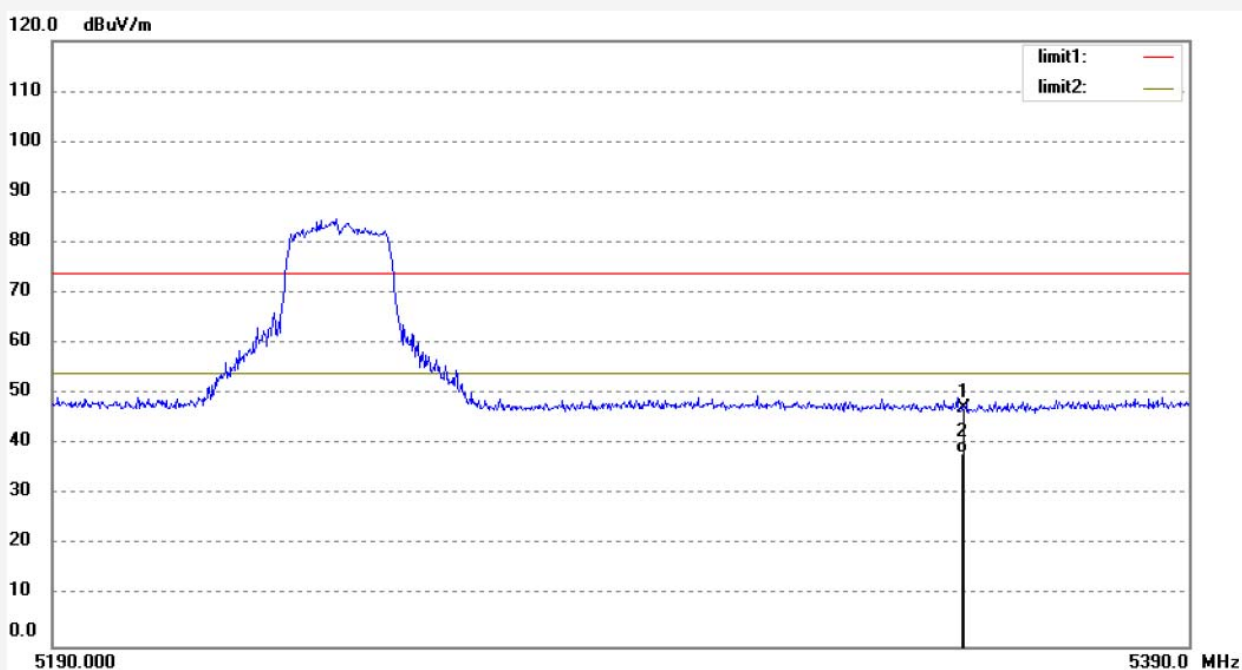

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.26	6.86	47.12	74.00	-26.88	peak	150	329	
2	5350.000	31.46	6.86	38.32	54.00	-15.68	AVG	150	330	

Job No.: star2018 #2112

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5240MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 19:07:08

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

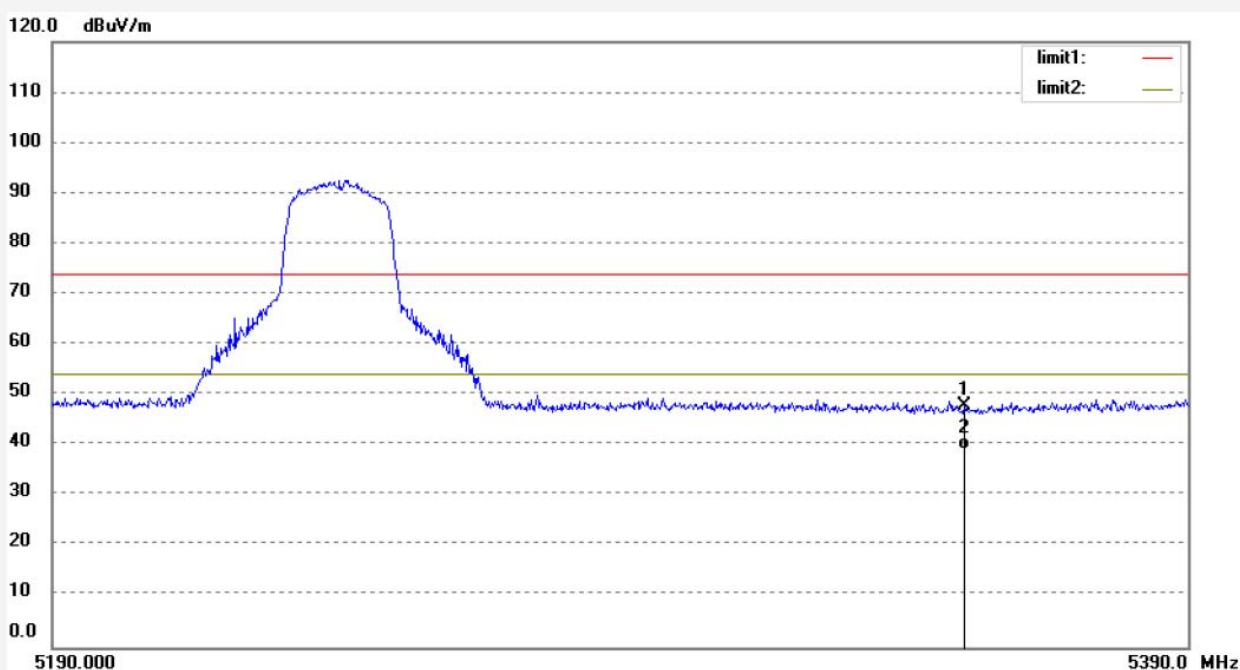

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5350.000	40.97	6.86	47.83	74.00	-26.17	peak	150	328	
2	5350.000	32.41	6.86	39.27	54.00	-14.73	AVG	150	330	

Job No.: star2018 #2122

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5745MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 19:19:45

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

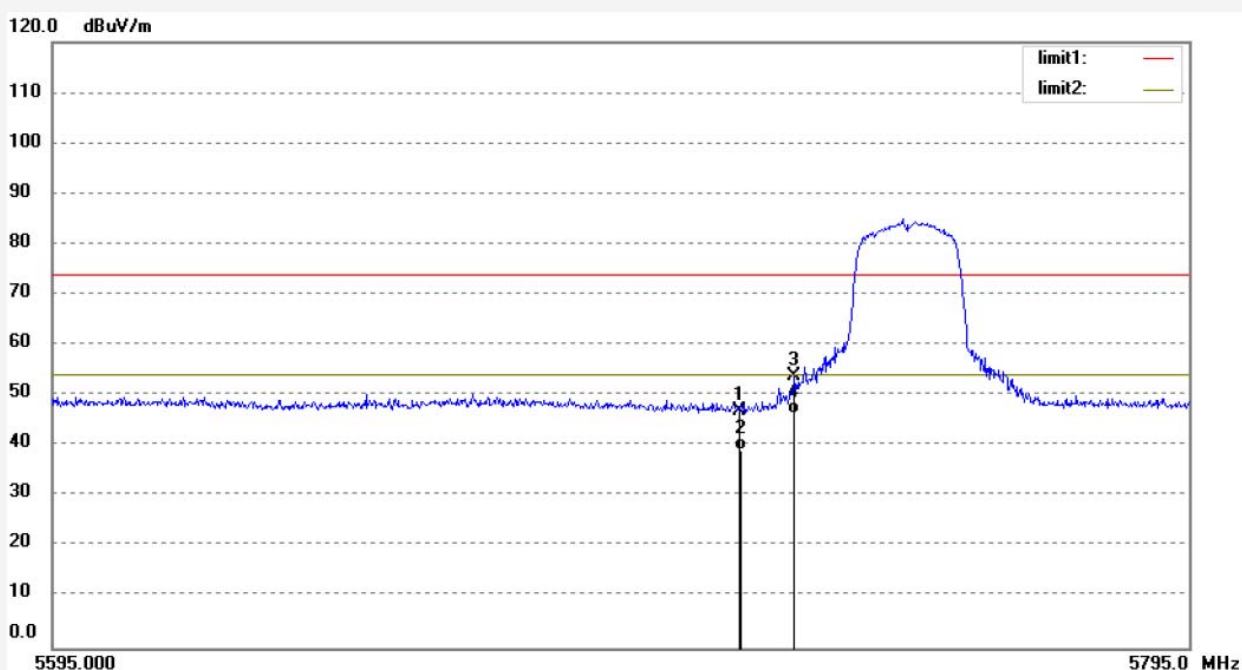

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	39.36	7.59	46.95	74.00	-27.05	peak	150	38	
2	5715.000	31.47	7.59	39.06	54.00	-14.94	AVG	150	30	
3	5725.000	46.10	7.65	53.75	74.00	-20.25	peak	150	328	
4	5725.000	38.62	7.65	46.27	54.00	-7.73	AVG	150	330	

Job No.: star2018 #2121

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5745MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 19:18:53

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

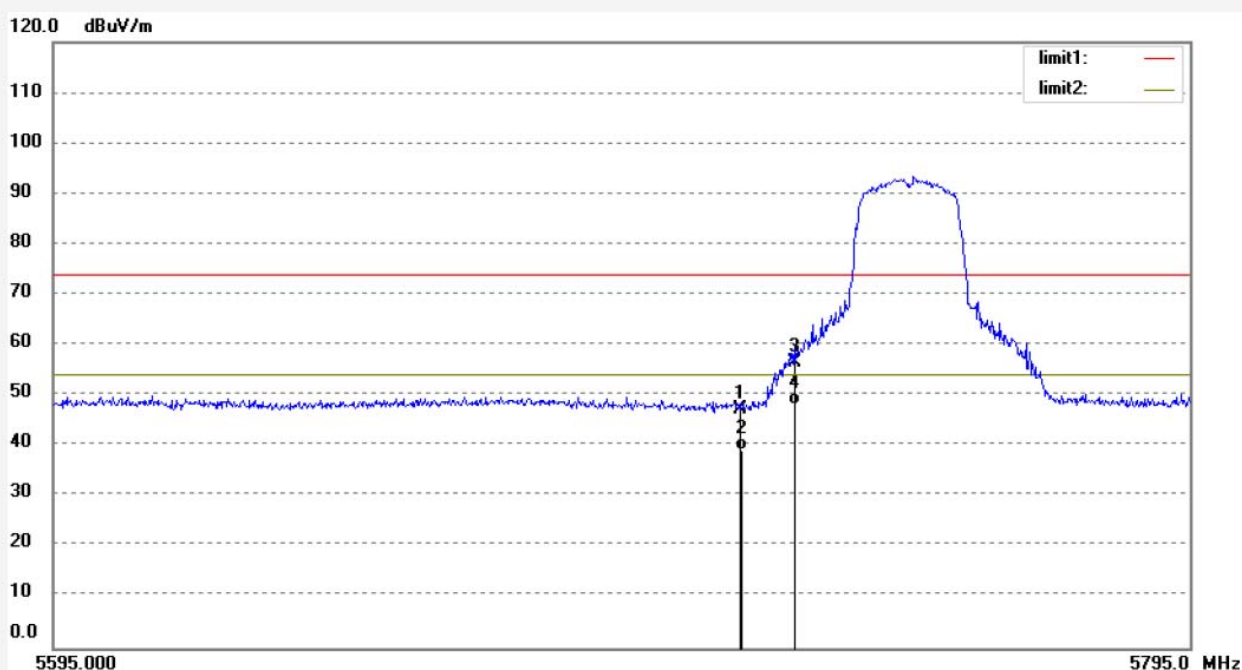

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5715.000	39.61	7.59	47.20	74.00	-26.80	peak	150	218	
2	5715.000	31.47	7.59	39.06	54.00	-14.94	AVG	150	220	
3	5725.000	48.80	7.65	56.45	74.00	-17.55	peak	150	327	
4	5725.000	40.56	7.65	48.21	54.00	-5.79	AVG	150	330	

Job No.: star2018 #2123

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5825MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 19:21:18

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

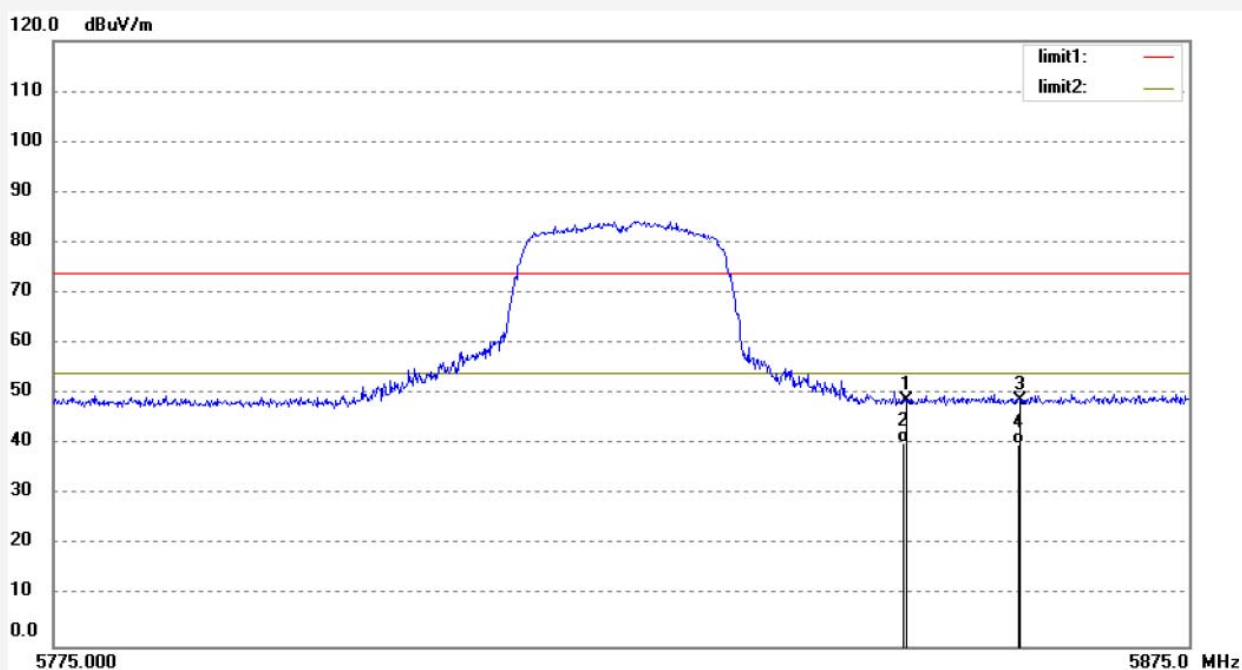

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	40.38	8.25	48.63	74.00	-25.37	peak	150	189	
2	5850.000	32.07	8.25	40.32	54.00	-13.68	AVG	150	190	
3	5860.000	40.40	8.28	48.68	74.00	-25.32	peak	150	329	
4	5860.000	31.65	8.28	39.93	54.00	-14.07	AVG	150	330	



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2124

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5825MHz(802.11ac)

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Vertical

Power Source: DC 12V


Date: 2018/09/22

Time: 19:22:01

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

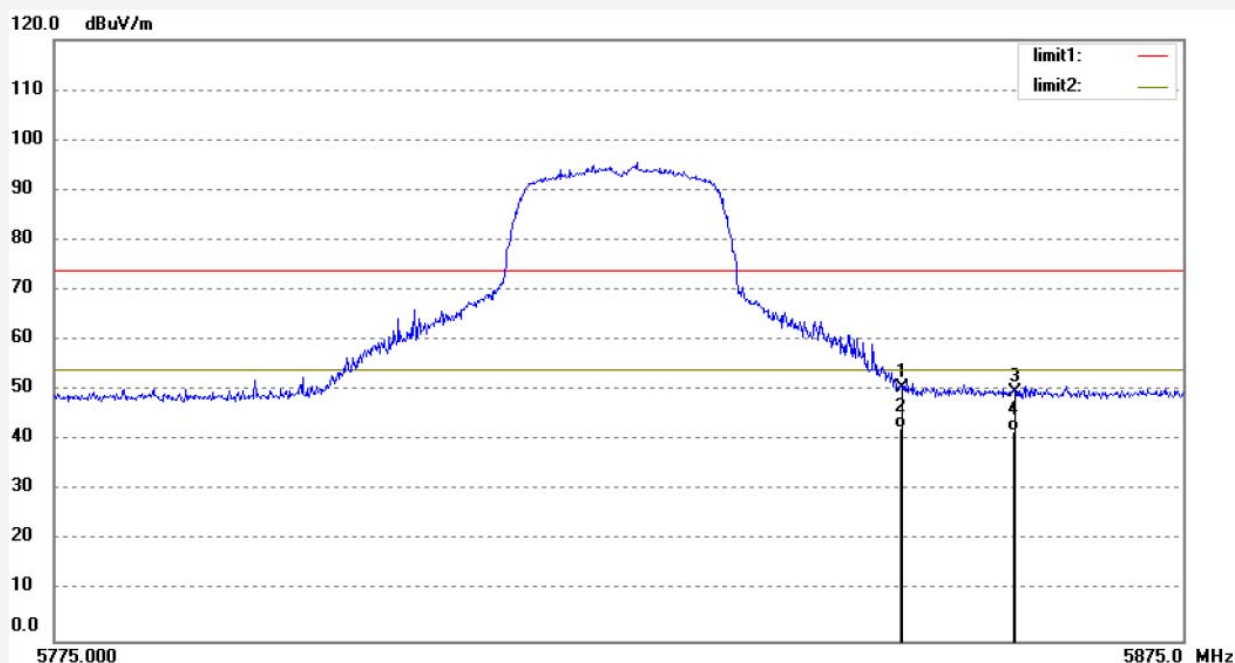

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5850.000	42.21	8.25	50.46	74.00	-23.54	peak	150	322	
2	5850.000	34.07	8.25	42.32	54.00	-11.68	AVG	150	320	
3	5860.000	41.23	8.28	49.51	74.00	-24.49	peak	150	310	
4	5860.000	33.69	8.28	41.97	54.00	-12.03	AVG	150	311	

Test mode: 802.11N 40MHz TX Frequency: 5190MHz, 5230MHz, 5755MHz, 5795MHz

The EUT is tested Radiated Band Edge at each test mode in three axes. Besides, We have tested the single antenna transmit mode and the dual antenna emission mode. The worst emissions are reflected in the following plots



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: star2018 #2126

Standard: FCC PK

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: e-Screen ETX slot-in Android box

Mode: TX 5190MHz(802.11n)40MHz

Model: RK3399

Manufacturer: Legamaster International B.V.

Polarization: Horizontal

Power Source: DC 12V


Date: 2018/09/22

Time: 19:25:20

Engineer Signature: star

Distance: 3m

Note: Report No.:ATE20181650

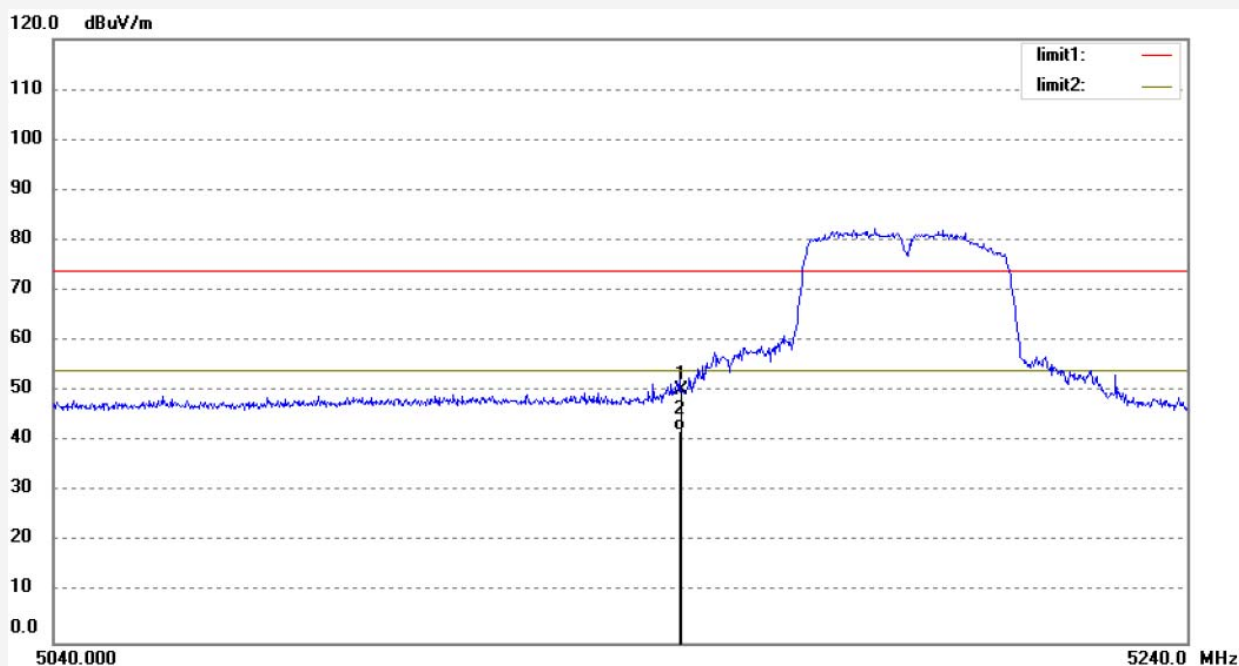

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5150.000	43.93	6.39	50.32	74.00	-23.68	peak	150	157	
2	5150.000	35.67	6.39	42.06	54.00	-11.94	AVG	150	160	