

Testing Tomorrow's Technology

**CFR 47 FCC Part 2, Subpart J, and FCC Part 90, Subpart I
Certification for Private Land Mobile Radio Services,
Part 90.219 Use of signal boosters
and
ANSI/TIA-603-E (2016), Equipment Measurement and Performance
Standards
And
Innovation, Science and Economic Development Canada, RSS-131,
Spectrum Management and Telecommunications Radio Standards
Specification, Zone Enhancers,
Clause 6 Equipment Standard specifications for zone enhancers
working with equipment certified under RSS-119**


For the

**Safe-Com Wireless
Model: SAFE-1001**

**FCC ID: 2AKSM-SAFE3
IC: 22303-SAFE3**

**UST Project No: 19-0244
August 6, 2019**

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

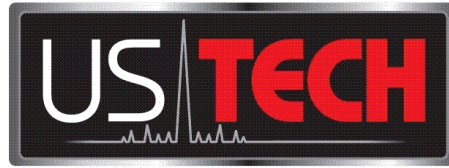

Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US Tech (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Consulting Engineer/President


Date: August 6, 2019



TESTING
NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of U.S. Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

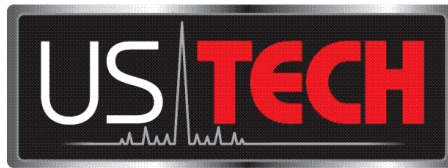

Testing Tomorrow's Technology

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one): Original grant X
Class II change

Reevaluation

Equipment type: Part 90.219 Amplifier/Signal Booster (Class B)

Applicant /Manufacturer Name and Address:

Safe-Com Wireless
21 Longview Drive
Holmdel, NJ 07733
USA

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717
Fax Number: (770) 740-1508

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information	13
1.1	Product Description.....	13
1.2	Related Submittal(s)/Grant(s)	13
1.3	Summary of Tests.....	14
2	Test and Measurements	15
2.1	Configuration of Tested System.....	15
2.2	Characterization of Tested System	15
2.3	Test Facility.....	15
2.4	Test Equipment.....	15
2.5	Modifications to Equipment under Test (EUT)	15
2.6	Noise (FCC Section 90.219(e)(2) and RSS-131, 6.4)	19
2.7	Retransmitted Signals (FCC Section 90.219(e)(4) and RSS-131, 6.6)	19
2.8	Emission Mask Definitions (FCC Section 2.1049, 90.219(e)(4iii), 90.210, RSS-131, 6.5, RSS-119, 5.8)	20
2.8.1	Emission Mask B (FCC Part 90.210, 2.1051, RSS-119, 5.8).....	20
2.8.2	Emission Mask D (FCC Part 90.210, 2.1051, RSS-119, 5.8).....	20
2.8.3	Emission Mask E (FCC Part 90.210, 2.1051, RSS-119, 5.8).....	21
2.8.4	Emission Mask I (FCC Part 90.210, 2.1051, RSS-119, 5.8)	21
2.9	RF Power Output (FCC Section 2.1046, 90.219(e)(1), RSS-131, 6.2).....	22
2.10	Output Power Plots	23
2.11	Emission Mask and Retransmitted Signal Measurements	38
2.11.1	VHF Channels	38
2.11.2	UHF Channels	65
2.11.3	700 MHz Channels	110
2.11.4	800 MHz Channel	167
2.12	Spurious Emissions (FCC Section 90.219(d)(e)(3) and RSS-131, 6.5)	187
2.12.1	Radiated Spurious Emissions Measurement	187
2.12.2	Conducted Spurious Emissions Measurement (90.219(e)(4), RSS-131, 6.5)	248
2.13	AGC Threshold (KDB 935210 D05 v01r03 4.2)	297
2.13.1	Measuring AGC threshold.....	297
2.14	Out-of-band Rejection (KDB 935210 D05 v01r03 4.3)	298
2.14.1	Out-of-band Rejection measurement.....	298
2.15	Measurement Uncertainty	305
2.15.1	Radiated Spurious Emissions Measurement Uncertainty	305
2.15.2	Conducted Radio Emissions Measurement uncertainty	305
3	Conclusions.....	306
3.1	Test Outcome	306

List of Figures

<u>Figure</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration.....	16
Figure 2.	150 MHz Output Power Plot.....	23
Figure 3.	162 MHz Output Power Plot.....	24
Figure 4.	174 MHz Output Power Plot.....	25
Figure 5.	407 MHz Output Power Plot.....	26
Figure 6.	421 MHz Output Power Plot.....	27
Figure 7.	480 MHz Output Power Plot.....	28
Figure 8.	512 MHz Output Power Plot.....	29
Figure 9.	758 MHz Output Power Plot.....	30
Figure 10.	763 MHz Output Power Plot.....	30
Figure 11.	768 MHz Output Power Plot.....	31
Figure 12.	769 MHz Output Power Plot.....	31
Figure 13.	775 MHz Output Power Plot.....	32
Figure 14.	788 MHz Output Power Plot.....	32
Figure 15.	798 MHz Output Power Plot.....	33
Figure 16.	799 MHz Output Power Plot.....	33
Figure 17.	805 MHz Output Power Plot.....	34
Figure 18.	806 MHz Output Power Plot.....	34
Figure 19.	815 MHz Output Power Plot.....	35
Figure 20.	824 MHz Output Power Plot.....	35
Figure 21.	851 MHz Output Power Plot.....	36
Figure 22.	860 MHz Output Power Plot.....	36
Figure 23.	869 MHz Output Power Plot.....	37
Figure 24.	Input 150 MHz @ 6.25 kHz	38
Figure 25.	150 MHz @ 6.25 kHz, Mask E	39
Figure 26.	150 MHz@ 6.25 kHz + 3.0 dB, Mask E.....	40
Figure 27.	Input 150 MHz @ 12.5 kHz	41
Figure 28.	150 MHz @ 12.5 kHz, Mask D	42
Figure 29.	150 MHz @ 12.5 kHz + 3.0 dB, Mask D.....	43
Figure 30.	Input 150 MHz @ 25 kHz	44
Figure 31.	150 MHz @ 25 kHz, Mask B	45
Figure 32.	150 MHz @ 25 kHz + 3.0 dB, Mask B	46
Figure 33.	Input 162 MHz @ 6.25 kHz	47
Figure 34.	162 MHz @ 6.25 kHz, Mask E	48
Figure 35.	162 MHz @ 6.25 kHz + 3.0 dB, Mask E.....	49
Figure 36.	Input 162 MHz @ 12.5 kHz	50
Figure 37.	162 MHz @ 12.5 kHz, Mask D	51
Figure 38.	162 MHz @ 12.5 kHz + 3.0 dB, Mask D.....	52
Figure 39.	Input 162 MHz @ 25 kHz	53
Figure 40.	162 MHz @ 25 kHz, Mask B	54
Figure 41.	162 MHz @ 25 kHz + 3.0 dB, Mask B	55
Figure 42.	Input 174 MHz @ 6.25 kHz	56

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

Figure 43. 174 MHz @ 6.25 kHz, Mask E	57
Figure 44. 174 MHz @ 6.25 kHz + 3.0 dB, Mask E.....	58
Figure 45. Input 174 MHz @ 12.5 kHz	59
Figure 46. 174 MHz @ 12.5 kHz, Mask D	60
Figure 47. 174 MHz @ 12.5 kHz + 3.0 dB, Mask D.....	61
Figure 48. Input 174 MHz @ 25 kHz	62
Figure 49. 174 MHz @ 25 kHz, Mask B	63
Figure 50. 174 MHz @ 25 kHz + 3.0 dB, Mask B.....	64
Figure 51. Input 407 MHz @ 6.25 kHz	65
Figure 52. 407 MHz @ 6.25 kHz, Mask B	66
Figure 53. 407 MHz @ 6.25 kHz + 3 dB, Mask B.....	67
Figure 54. Input 407 MHz @ 12.5 kHz	68
Figure 55. 407 MHz @ 12.5 kHz, Mask B	69
Figure 56. 407 MHz @ 12.5 kHz + 3.0 dB, Mask B.....	70
Figure 57. Input 407 MHz @ 25 kHz	71
Figure 58. 407 MHz @ 25 kHz, Mask B	72
Figure 59. 407 MHz @ 25 kHz + 3.0 dB, Mask B.....	73
Figure 60. Input 421 MHz @ 6.25 kHz	74
Figure 61. 421 MHz @ 6.25 kHz, Mask B	75
Figure 62. 421 MHz @ 6.25 kHz +3 dB, Mask B.....	76
Figure 63. 421 MHz @ 6.25 kHz, Mask E	77
Figure 64. 421 MHz @ 6.25 kHz +3 dB, Mask E.....	78
Figure 65. Input 421 MHz @ 12.5 kHz	79
Figure 66. 421 MHz @ 12.5 kHz, Mask B	80
Figure 67. 421 MHz @ 12.5 kHz + 3.0 dB, Mask B.....	81
Figure 68. 421 MHz @ 12.5 kHz, Mask D	82
Figure 69. 421 MHz @ 12.5 kHz, +3 dB, Mask D	83
Figure 70. Input 480 MHz @ 6.25 kHz	84
Figure 71. 480 MHz @ 6.25 kHz, Mask B	85
Figure 72. 480 MHz @ 6.25 kHz +3 dB, Mask B.....	86
Figure 73. 480 MHz @ 6.25 kHz, Mask E	87
Figure 74. 480 MHz @ 6.25 kHz +3 dB, Mask E.....	88
Figure 75. Input 480 MHz @ 12.5 kHz	89
Figure 76. 480 MHz @ 12.5 kHz, Mask B	90
Figure 77. 480 MHz @ 12.5 kHz + 3.0 dB, Mask B.....	91
Figure 78. 480 MHz @ 12.5 kHz, Mask D	92
Figure 79. 480 MHz @ 12.5 kHz +3 dB, Mask D	93
Figure 80. Input 480 MHz @ 25 kHz	94
Figure 81. 480 MHz @ 25 kHz, Mask B	95
Figure 82. 480 MHz @ 25 kHz + 3.0 dB, Mask B.....	96
Figure 83. Input 512 MHz @ 6.25 kHz	97
Figure 84. 512 MHz @ 6.25 kHz, Mask B	98
Figure 85. 512 MHz @ 6.25 kHz, +3 dB, Mask B.....	99
Figure 86. 512 MHz @ 6.25 kHz, Mask E	100
Figure 87. 512 MHz @ 6.25 kHz +3 dB, Mask E.....	101
Figure 88. Input 512 MHz @ 12.5 kHz	102

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

Figure 89. 512 MHz @ 12.5 kHz, Mask B	103
Figure 90. 512 MHz @ 12.5 kHz +3 dB, Mask B.....	104
Figure 91. 512 MHz @ 12.5 kHz, Mask D	105
Figure 92. 512 MHz @ 12.5 kHz + 3.0 dB, Mask D.....	106
Figure 93. Input 512 MHz @ 25 kHz	107
Figure 94. 512 MHz @ 25 kHz, Mask B	108
Figure 95. 512 MHz @ 25 kHz + 3.0, Mask B	109
Figure 96. Input 758 MHz @ 12.5 kHz	110
Figure 97. 758 MHz @ 12.5 kHz, Mask B	111
Figure 98. 758 MHz @ 12.5 kHz +3 dB, Mask B.....	112
Figure 99. Input 758 MHz @ 25 kHz	113
Figure 100. 758 MHz @ 25 kHz, Mask B	114
Figure 101. 758 MHz @ 25 kHz + 3 dB, Mask B.....	115
Figure 102. Input 763 MHz @ 12.5 kHz	116
Figure 103. 763 MHz @ 12.5 kHz, Mask B	117
Figure 104. 763 MHz @ 12.5 kHz +3.0 dB, Mask B.....	118
Figure 105. Input 763 MHz @ 25 kHz	119
Figure 106. 763 MHz @ 25 kHz, Mask B	120
Figure 107. 763 MHz @ 25 kHz +3.0 dB, Mask B.....	121
Figure 108. Input 768 MHz @ 12.5 kHz	122
Figure 109. 768 MHz @ 12.5 kHz, Mask B	123
Figure 110. 768 MHz @ 12.5 kHz +3.0 dB, Mask B.....	124
Figure 111. Input 768 MHz @ 25 kHz	125
Figure 112. 768 MHz @ 25 kHz, Mask B	126
Figure 113. 768 MHz @ 25 kHz +3.0 dB, Mask B.....	127
Figure 114. Input 769 MHz @ 12.5 kHz	128
Figure 115. 769 MHz @ 12.5 kHz, Mask B	129
Figure 116. 769 MHz @ 12.5 kHz +3.0 dB, Mask B.....	130
Figure 117. Input 769 MHz @ 25 kHz	131
Figure 118. 769 MHz @ 25 kHz, Mask B	132
Figure 119. 769 MHz @ 25 kHz +3.0 dB, Mask B.....	133
Figure 120. Input 775 MHz @ 12.5 kHz	134
Figure 121. 775 MHz @ 12.5 MHz, Mask B	135
Figure 122. 775 MHz @ 12.5 kHz +3.0 dB, Mask B.....	136
Figure 123. Input 775 MHz @ 25 kHz	137
Figure 124. 775 MHz @ 25 kHz, Mask B	138
Figure 125. 775 MHz @ 25 kHz +3.0 dB, Mask B.....	139
Figure 126. Input 788 MHz @ 6.25 kHz	140
Figure 127. 788 MHz @ 6.25 kHz, Mask B	141
Figure 128. 788 MHz @ 6.25 kHz +3 dB, Mask B.....	142
Figure 129. Input 788 MHz @ 12.5 kHz	143
Figure 130. 788 MHz @ 12.5 kHz, Mask B	144
Figure 131. 788 MHz @ 12.5 kHz + 3.0 dB, Mask B.....	145
Figure 132. Input 788 MHz @ 25 kHz	146
Figure 133. 788 MHz @ 25 kHz, Mask B	147
Figure 134. 788 MHz @ 25 kHz + 3.0 dB, Mask B.....	148

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

Figure 135. Input 798 MHz @ 12.5 kHz	149
Figure 136. 798 MHz @ 12.5 kHz, Mask B	150
Figure 137. 798 MHz @ 12.5 kHz + 3.0 dB, Mask B	151
Figure 138. Input 798 MHz @ 25 kHz	152
Figure 139. 798 MHz @ 25 kHz, Mask B	153
Figure 140. 798 MHz @ 25 kHz + 3.0 dB, Mask B	154
Figure 141. Input 799 MHz @ 12.5 kHz	155
Figure 142. 799 MHz @ 12.5 MHz, Mask B	156
Figure 143. 799 MHz @ 12.5 kHz + 3.0 dB, Mask B	157
Figure 144. Input 799 MHz @ 25 kHz	158
Figure 145. 799 MHz @ 25 kHz, Mask B	159
Figure 146. 799 MHz @ 25 kHz + 3.0 dB, Mask B	160
Figure 147. Input 805 MHz @ 12.5 kHz	161
Figure 148. 805 MHz @ 12.5 kHz, Mask B	162
Figure 149. 805 MHz @ 12.5 kHz + 3.0 dB, Mask B	163
Figure 150. Input 805 MHz @ 25 kHz	164
Figure 151. 805 MHz @ 25 kHz, Mask B	165
Figure 152. 805 MHz @ 25 kHz + 3.0 dB, Mask B	166
Figure 153. Input 806 MHz @ 12.5 kHz	167
Figure 154. 806 MHz @ 12.5 kHz, Mask B	168
Figure 155. 806 MHz @ 12.5 kHz + 3.0 dB, Mask B	169
Figure 156. Input 806 MHz @ 25 kHz	170
Figure 157. 806 MHz @ 25 kHz, Mask B	171
Figure 158. 806 MHz @ 25 kHz + 3.0 dB, Mask B	172
Figure 159. Input 815 MHz @ 12.5 kHz	173
Figure 160. 815 MHz @ 12.5 kHz, Mask B	174
Figure 161. 815 MHz @ 12.5 kHz + 3.0 dB, Mask B	175
Figure 162. 815 MHz @ 12.5 kHz, Mask D	176
Figure 163. 815 MHz @ 12.5 kHz + 3dB, Mask D	177
Figure 164. Input 815 MHz @ 25 kHz	178
Figure 165. 815 MHz @ 25 kHz, Mask B	179
Figure 166. 815 MHz @ 25 kHz +3.0 dB, Mask B	180
Figure 167. Input 824 MHz @ 12.5 kHz	181
Figure 168. 824 MHz @ 12.5 kHz, Mask B	182
Figure 169. 824 MHz @ 12.5 kHz + 3.0 dB, Mask B	183
Figure 170. Input 824 MHz @ 25 kHz	184
Figure 171. 824 MHz @ 25 kHz, Mask B	185
Figure 172. 824 MHz @ 25 kHz + 3.0 dB, Mask B	186
Figure 173. 162 MHz Horizontal, 30 – 200 MHz	188
Figure 174. 162 MHz Vertical, 30 - 200 MHz	189
Figure 175. 162 MHz Horizontal, 200 MHz - 1 GHz	190
Figure 176. 162 MHz Vertical, 200 MHz – 1 GHz	191
Figure 177. 162 MHz Horizontal, 1 – 2 GHz	192
Figure 178. 162 MHz Vertical, 1 - 2 GHz	193
Figure 179. 407 MHz Horizontal, 30 – 200 MHz	194
Figure 180. 407 MHz Vertical, 30 – 200 MHz	195

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

Figure 181. 407 MHz Horizontal, 200 MHz – 1 GHz	196
Figure 182. 407 MHz Vertical, 200 MHz – 1 GHz	197
Figure 183. 407 MHz Horizontal, 1 - 6 GHz	198
Figure 184. 407 MHz Vertical, 1 - 6 GHz.....	199
Figure 185. 421 MHz Horizontal, 30 - 200 MHz	200
Figure 186. 421 MHz Vertical, 30 - 200 MHz	201
Figure 187. 421 MHz Horizontal, 200 MHz - 1 GHz	202
Figure 188. 421 MHz Vertical, 200 MHz - 1 GHz	203
Figure 189. 421 MHz Horizontal, 1 – 6 GHz.....	204
Figure 190. 421 MHz Vertical, 1 – 6 GHz.....	205
Figure 191. 480 MHz Horizontal, 30 – 200 MHz	206
Figure 192. 480 MHz Vertical, 30 – 200 MHz.....	207
Figure 193. 480 MHz Horizontal, 200 MHz – 1 GHz	208
Figure 194. 480 MHz Vertical, 200 MHz – 1 GHz	209
Figure 195. 480 MHz Horizontal, 1 – 6 GHz.....	210
Figure 196. 480 MHz Vertical, 1 – 6 GHz.....	211
Figure 197. 512 MHz Horizontal, 30 - 200 MHz	212
Figure 198. 512 MHz Vertical, 30 - 200 MHz	213
Figure 199. 512 MHz Horizontal, 200 MHz – 1 GHz	214
Figure 200. 512 MHz Vertical, 200 MHz – 1 GHz	215
Figure 201. 512 MHz Horizontal, 1 – 6 GHz.....	216
Figure 202. 512 MHz Vertical, 1 – 6 GHz.....	217
Figure 203. 788 MHz Horizontal, 30 – 200 MHz	218
Figure 204. 788 MHz Vertical, 30 - 200 MHz	219
Figure 205. 788 MHz Horizontal, 200 MHz - 1 GHz	220
Figure 206. 788 MHz Vertical, 200 MHz - 1 GHz	221
Figure 207. 788 MHz Horizontal, 1 – 5 GHz.....	222
Figure 208. 788 MHz Vertical, 1 – 5 GHz.....	223
Figure 209. 798 MHz Horizontal, 30 – 200 MHz	224
Figure 210. 798 MHz Vertical, 30 – 200 MHz.....	225
Figure 211. 798 MHz Horizontal, 200 MHz – 1 GHz	226
Figure 212. 798 MHz Vertical, 200 MHz – 1 GHz	227
Figure 213. 798 MHz Horizontal, 1 – 5 GHz.....	228
Figure 214. 798 MHz Vertical, 1 – 5 GHz.....	229
Figure 215. 799 MHz Horizontal, 30 – 200 MHz	230
Figure 216. 799 MHz Vertical, 30 – 200 MHz.....	231
Figure 217. 799 MHz Horizontal, 200 MHz – 1 GHz	232
Figure 218. 799 MHz Vertical, 200 MHz – 1 GHz	233
Figure 219. 799 MHz Horizontal, 1 – 5 GHz.....	234
Figure 220. 799 MHz Vertical, 1 – 5 GHz.....	235
Figure 221. 805 MHz, Horizontal, 30 – 200 MHz	236
Figure 222. 805 MHz, Vertical, 30 – 200 MHz.....	237
Figure 223. 805 MHz, Horizontal, 200 MHz – 1 GHz	238
Figure 224. 805 MHz, Vertical, 200 MHz – 1 GHz	239
Figure 225. 805 MHz, Horizontal, 1 – 5 GHz.....	240
Figure 226. 805 MHz, Vertical, 1 – 5 GHz.....	241

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

Figure 227. 824 MHz Horizontal, 30 – 200 MHz	242
Figure 228. 824 MHz Vertical, 30 - 200 MHz	243
Figure 229. 824 MHz Horizontal 200 MHz - 1 GHz	244
Figure 230. 824 MHz Vertical, 200 MHz – 1 GHz	245
Figure 231. 824 MHz Horizontal, 1 – 5 GHz.....	246
Figure 232. 824 MHz Vertical, 1 – 5 GHz.....	247
Figure 233. 150 MHz below 1 GHz	248
Figure 234. 150 MHz, above 1 GHz	249
Figure 235. 162 MHz below 1 GHz	250
Figure 236. 162 MHz, above 1 GHz	251
Figure 237. 174 MHz below 1 GHz	252
Figure 238. 174 MHz, above 1 GHz	253
Figure 239. 407 MHz, below 1 GHz	254
Figure 240. 407 MHz, 1 – 6 GHz.....	255
Figure 241. 421 MHz, below 1 GHz	256
Figure 242. 421 MHz, 1 – 6 GHz.....	257
Figure 243. 480 MHz below 1 GHz	258
Figure 244. 480 MHz, 1 – 6 GHz.....	259
Figure 245. 512 MHz, below 1 GHz	260
Figure 246. 512 MHz, 1 – 6 GHz.....	261
Figure 247. 758 MHz below 1 GHz	262
Figure 248. 758 MHz, 1 – 2.9 GHz.....	263
Figure 249. 758 MHz, 2.9 - 10 GHz.....	264
Figure 250. 763 MHz below 1 GHz	265
Figure 251. 763 MHz, 1 – 2.9 GHz.....	266
Figure 252. 763 MHz, 2.9 - 10 GHz.....	267
Figure 253. 768 MHz below 1 GHz	268
Figure 254. 768 MHz, 1 GHz – 2.9 GHz.....	269
Figure 255. 768 MHz, 2.9 GHz – 10 GHz	270
Figure 256. 769 MHz below 1 GHz	271
Figure 257. 769 MHz, 1 GHz – 2.9 GHz.....	272
Figure 258. 769 MHz, 2.9 GHz – 10 GHz.....	273
Figure 259. 775 MHz, below 1 GHz	274
Figure 260. 775 MHz, 1 GHz – 2.9 GHz.....	275
Figure 261. 775 MHz, 2.9 GHz – 10 GHz.....	276
Figure 262. 788 MHz below 1 GHz	277
Figure 263. 788 MHz, 1 – 10 GHz.....	278
Figure 264. 798 MHz below 1 GHz	279
Figure 265. 798 MHz, 1 – 10 GHz.....	280
Figure 266. 799 MHz below 1 GHz	281
Figure 267. 799 MHz, 1 – 10 GHz.....	282
Figure 268. 805 MHz below 1 GHz	283
Figure 269. 805 MHz, 1 – 10 GHz.....	284
Figure 270. 806 MHz below 1 GHz	285
Figure 271. 806 MHz, 1 – 10 GHz.....	286
Figure 272. 815 MHz below 1 GHz	287

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

Figure 273. 815 MHz, 1 – 10 GHz.....	288
Figure 274. 824 MHz below 1 GHz	289
Figure 275. 824 MHz, 1 – 10 GHz.....	290
Figure 276. 851 MHz below 1 GHz	291
Figure 277. 851 MHz, 1 – 10 GHz.....	292
Figure 278. 860 MHz below 1 GHz	293
Figure 279. 860 MHz, 1 – 10 GHz.....	294
Figure 280. 869 MHz below 1 GHz	295
Figure 281. 869 MHz, 1 – 10 GHz.....	296
Figure 282. VHF Out of Band Rejection	298
Figure 283. UHF Out of Band Rejection.....	299
Figure 284. 700/800 MHz Out of band Rejection Plot 1	300
Figure 285. 700/800 MHz Out of band Rejection Plot 2	301
Figure 286. 700/800 MHz Out of Band Rejection Plot 3.....	302
Figure 287. 700/800 MHz Out of Band Rejection Plot 4.....	303
Figure 288. 700/800 MHz Out of Band Rejection Plot 5.....	304

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals	17
Table 2.	Test Instruments.....	18

1 General Information

1.1 Product Description

The Equipment under Test (EUT) is the Safe-Com Wireless model SAFE-1001. The EUT is a signal booster and extends the radio coverage in areas where the propagation losses prevent reliable communication. The amplifier is designed to be used with already approved DSA systems.

The EUT is designed to operate in the following bands:

For FCC Part 90.219

150.8-156.2475 MHz
157.1875-161.575 MHz
161.775-161.96 MHz
162.04-173.40 MHz
406.1-454.0 MHz
456.0-462.5375 MHz
467.74-512.0 MHz
758.0-775.0 MHz
788.0-805.0 MHz
806.0-849.0 MHz
851.0-869.0 MHz

For ISSED RSS-131

150.05-174.0 MHz
406.1-430.0MHz
450.0-470.0 MHz
768.0-776.0 MHz
798.0-806.0 MHz
806.0-821.0 MHz
851.0-866.0 MHz
866.0-869.0 MHz

1.2 Related Submittal(s)/Grant(s)

There are no related submittals or grants associated with this project.

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

1.3 Summary of Tests

The following tests were performed:

Part	Test Description	Verdict
90.219(e)(1), 90.205(j)	RF Output Power	Pass
90.219(e)(3)	Conducted Spurious	Pass
90.219(e)(3)	Radiated Spurious	Pass
90.219(e)(4)	Input Output	Pass
KDB 935210 D05 v01r03 4.2	AGC Threshold	Recorded
KDB 935210 D05 v01r03 4.3	Out of band rejection	Recorded
90.219(e)(2)	Noise Figure	N/A

2 Test and Measurements

2.1 Configuration of Tested System

A Block Diagram of the tested system is shown in Figure 1. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off or set to 3x the resolution bandwidth throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions.

2.2 Characterization of Tested System

The samples used for testing were received by US Tech on June 18, 2019 & July 15, 2019 in good condition.

2.3 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. All radiated measurements were performed at US Tech's 3 meter EMC chamber measurement facility. Additional test such as bench testing was also performed at US Tech's facility in Alpharetta GA. This site has been fully described and registered by the FCC under Registration Number US5301. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1. NVLAP code: 200162-0

2.4 Test Equipment

The test equipment used for this evaluation is listed in Table 2 below.

2.5 Modifications to Equipment under Test (EUT)

No modifications were made by US Tech to bring the EUT into compliance with the FCC limits for the transmitter portion of the EUT.

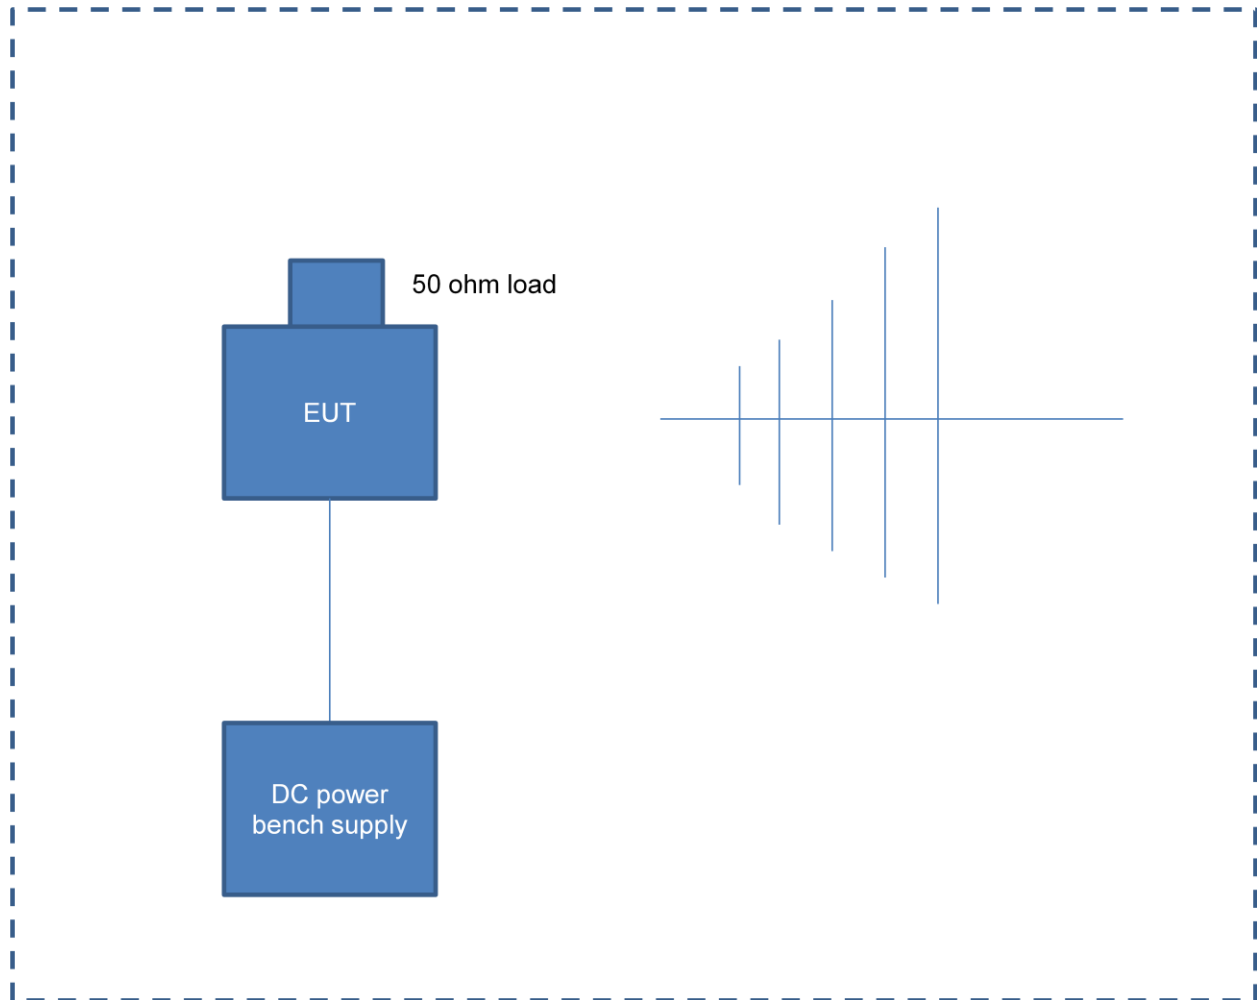


Figure 1. Block Diagram of Test Configuration

U.S. Tech Test Report:
 FCC ID:
 IC:
 Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 90 Certification
 2AKSM-SAFE3
 22303-SAFE3
 19-0244
 August 6, 2019
 Safe-Com Wireless
SAFE-1001

Table 1. EUT and Peripherals

EUT MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID/ IC ID	CABLES P/D
SAFE-1001 Series Power Amplifier Safe-Com	SAFE-1001	Engineering Sample	FCC ID: 2AKSM- SAFE3 IC: 22303-SAFE3	N/A
700/800 Mhz Safe-Com	SAFE-1001	Engineering Sample	--	--
UHF Safe-Com	SAFE-1001	Engineering Sample	--	--
VHF Safe-Com	SAFE-1001	Engineering Sample	--	--
Peripherals MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID/ IC ID	CABLES P/D
DC Bench Supply Tekpower	TP3005T	218311	None	1.5 m

U= Unshielded, S= Shielded, P= Power cable, D= Data cable

U.S. Tech Test Report:
 FCC ID:
 IC:
 Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 90 Certification
 2AKSM-SAFE3
 22303-SAFE3
 19-0244
 August 6, 2019
 Safe-Com Wireless
 SAFE-1001

Table 2. Test Instruments

EQUIPMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	8/17/2020
SPECTRUM ANALYZER	DSA815	RIGOL	DSA8A18030 0138	10/11/2019 2yr cal
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	10/25/2019 2yr cal
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT-PACKARD	1937A02980	5/07/2020
RF PREAMP > 1 GHz	8449B	HEWLETT PACKARD	3008A00480	4/08/2020
LOG PERIODIC	3146	EMCO	9305-3600	2/01/2021 2yr cal
BICONNICAL	3110B	EMCO	9306-1708	6/27/2021 2yr cal
HORN ANTENNA	3115	EMCO	9107-3723	11/28/2020 2yr cal
SIGNAL GENERATOR	MG3671B	Anritsu	M52073/ M53573/ M17473	Verified with E4407B
SIGNAL GENERATOR	HP8648B	HEWLETT-PACKARD	3642U01679	Verified with E4407B
LISN	9247-50-TS- 50-N	Solar Electronics	955824/ 955825	9/18/2019

Note: The calibration interval of the above test instruments is 12 months and all calibrations are traceable to NIST/USA.

2.6 Noise (FCC Section 90.219(e)(2) and RSS-131, 6.4)

The noise figure of a signal booster must not exceed 9 dB in either direction.

The EUT is designed for use with a DAS system; this test was deemed not applicable.

2.7 Retransmitted Signals (FCC Section 90.219(e)(4) and RSS-131, 6.6)

A signal booster must be designed such that all signals, when retransmitted meet the following requirements:

1. The signals are re-transmitted on the same channels as received. Minor departures from the exact provider or reference frequencies of the input signals are allowed provided that the re-transmitted signals meet the requirements of 90.213.

In this case the EUT is exempt from meeting these requirements.

2. There is no change in the occupied bandwidth of the retransmitted signals.

The EUT meets this requirement; see the plots in the following section which show the input signal compared to the retransmitted signal.

3. The retransmitted signals continue to meet the unwanted emissions limits of Part 90.210 applicable to the corresponding received signal.

The EUT meets this requirement; see the emissions mask test data presented in the next section.

2.8 Emission Mask Definitions (FCC Section 2.1049, 90.219(e)(4iii), 90.210, RSS-131, 6.5, RSS-119, 5.8)

The EUT is equipped with a low pass filter; therefore the emissions masks for equipment utilizing a low pass filter were applied.

2.8.1 Emission Mask B (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

2.8.2 Emission Mask D (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

2.8.3 Emission Mask E (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask E—6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3 \text{ kHz})$ or $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

2.8.4 Emission Mask I (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask I. For transmitters that are equipped with an audio low pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 6.8 kHz, but no more than 9.0 kHz: At least 25 dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 9.0 kHz, but no more than 15 kHz: At least 35 dB;
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 15 kHz: At least $43 + 10 \log (P)$ dB, or 70 dB, whichever is the lesser attenuation.

2.9 RF Power Output (FCC Section 2.1046, 90.219(e)(1), RSS-131, 6.2)

The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

The EUT was connected to a spectrum analyzer through a 20 dB power attenuator. All cables and attenuator losses were input into the spectrum analyzer as either a reference level offset or an external preamp gain correction to ensure that accurate readings were obtained.

A CW signal was utilized and transmitted through the EUT. The RF input signal was set at least 0.2 dB below the AGC threshold. The spectrum analyzer was set to the following settings: RBW= 100 kHz, Video= 3x RBW, Span of 1 MHz.

The output power levels are recorded below:

Band	Tuned Frequency	Measured Output power (dBm)	FCC max Output Power limit (5 Watt)	Margin (dB) From the output limit
VHF	*150.00 MHz	36.95	37 dBm	0.05
	*162.00 MHz	36.99	37 dBm	0.01
	**174.00 MHz	36.96	37 dBm	0.04
UHF	407.00 MHz	36.96	37 dBm	0.04
	421.00 MHz	36.98	37 dBm	0.02
	***480.00 MHz	36.96	37 dBm	0.04
	**512.00 MHz	36.95	37 dBm	0.05
700/800 MHz	**758.00 MHz	36.98	37 dBm	0.02
	***763.00 MHz	37.00	37 dBm	0.00
	768.00 MHz	37.00	37 dBm	0.00
	769.00 MHz	37.00	37 dBm	0.00
	775.00 MHz	36.98	37 dBm	0.02
	**788.00 MHz	36.99	37 dBm	0.01
	798.00 MHz	36.99	37 dBm	0.01
	799.00 MHz	36.99	37 dBm	0.01
	805.00 MHz	36.99	37 dBm	0.01
	806.00 MHz	36.99	37 dBm	0.01
	815.00 MHz	37.00	37 dBm	0.00
	824.00 MHz	37.00	37 dBm	0.00
	851.00 MHz	37.00	37 dBm	0.00
	860.00 MHz	36.73	37 dBm	0.27
	869.00 MHz	36.45	37 dBm	0.55

(*) = Frequencies were selected as the representative frequency to cover channels that are less than 1 MHz apart. For example 150 MHz was used to represent 150.05 MHz (ISED) and 150.80 MHz (FCC) however only the permitted frequency will be listed for each respective market.

(**)= Frequency selected because either ISED or FCC market permits this use.

(***)= selected as representative middle channel for FCC permitted operation.

2.10 Output Power Plots

Following are the Uplink Output Power Plots.

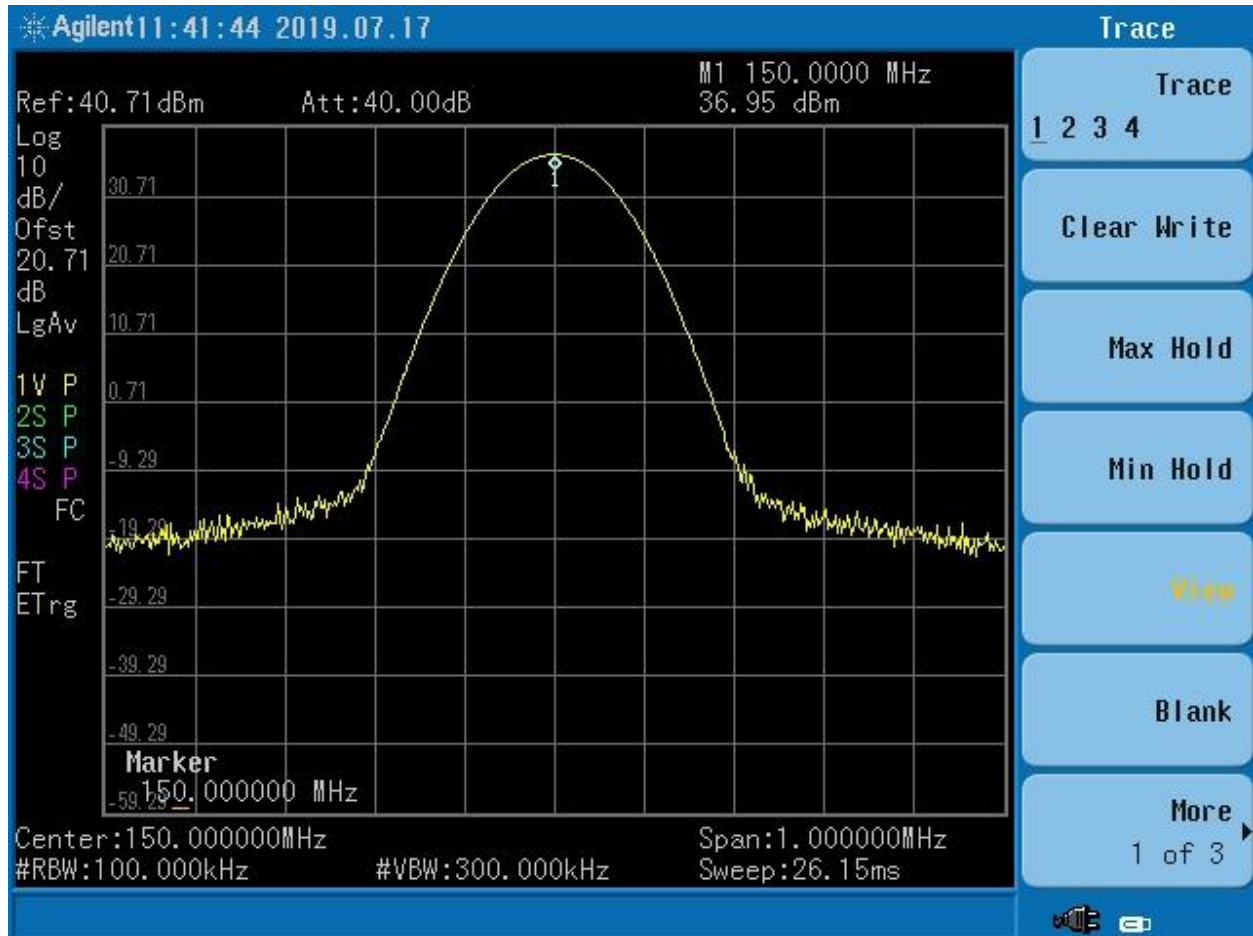


Figure 2. 150 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

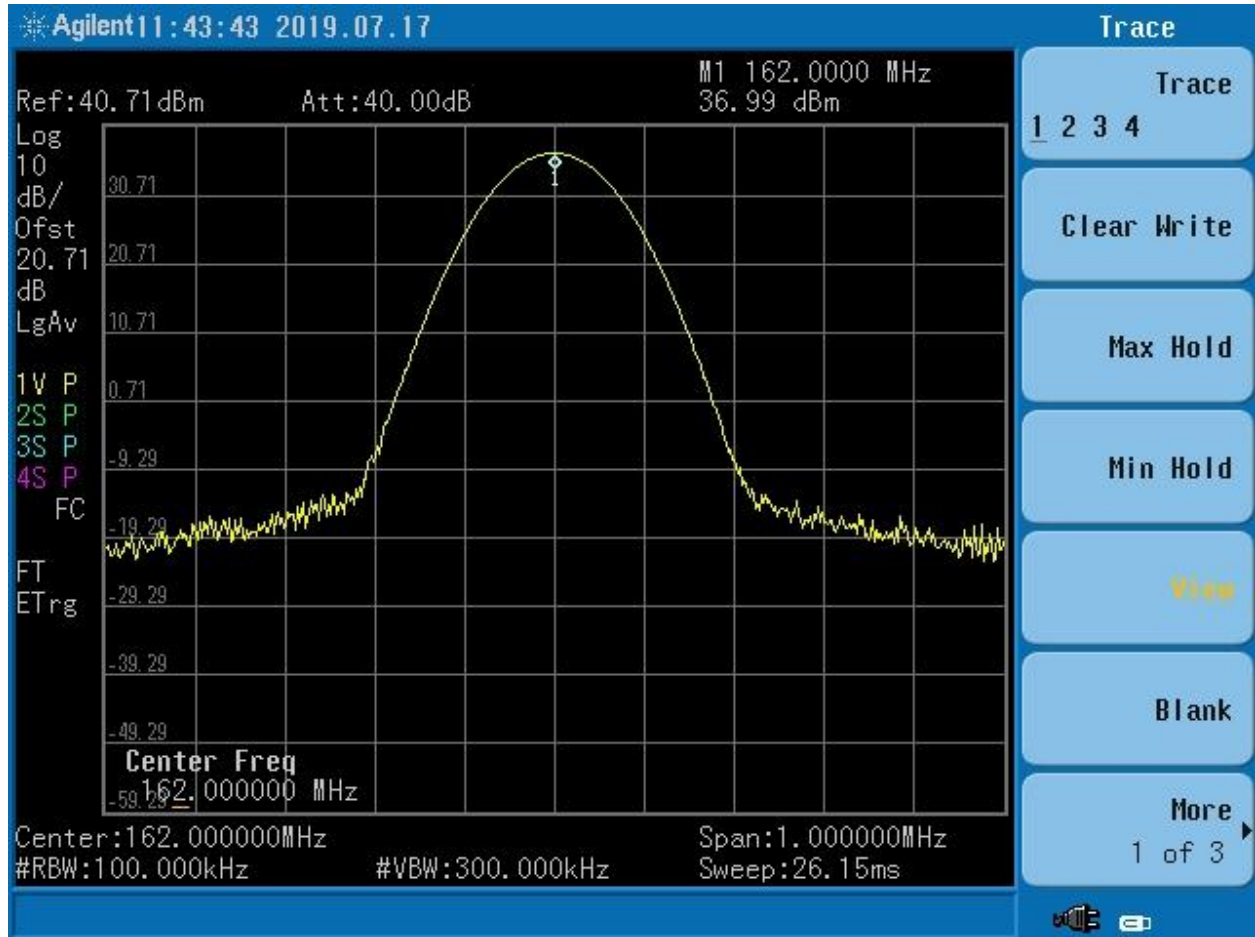


Figure 3. 162 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

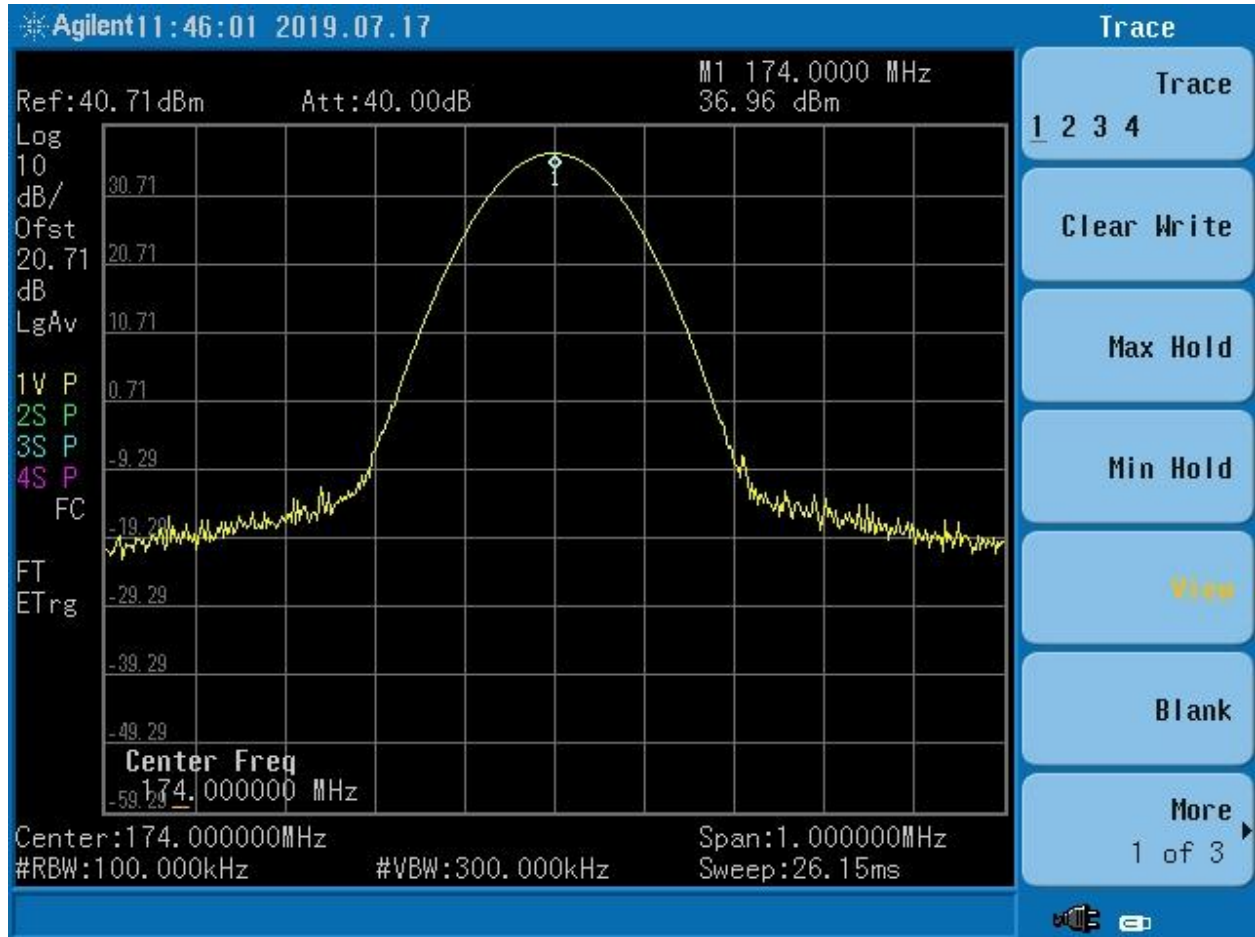


Figure 4. 174 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

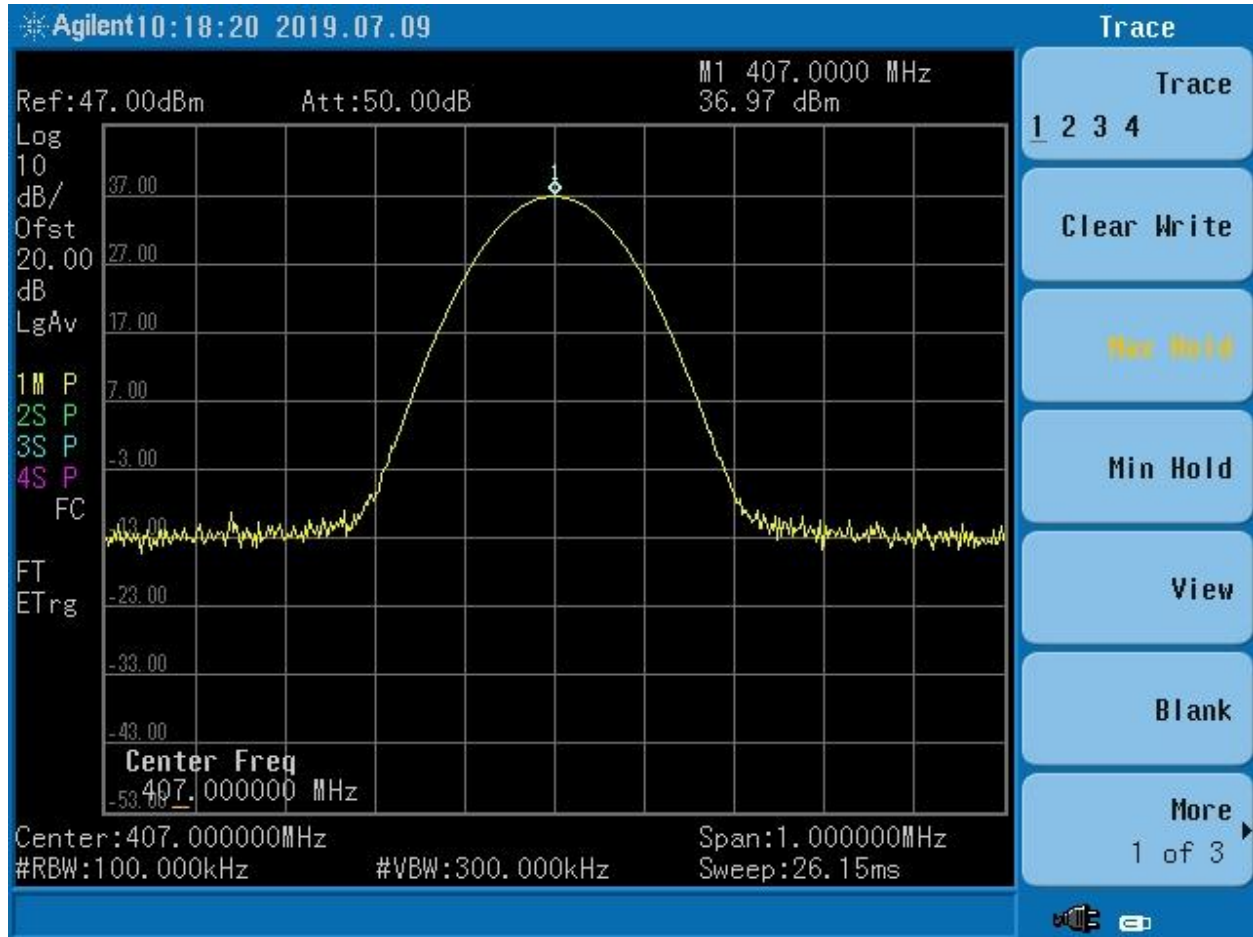


Figure 5. 407 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

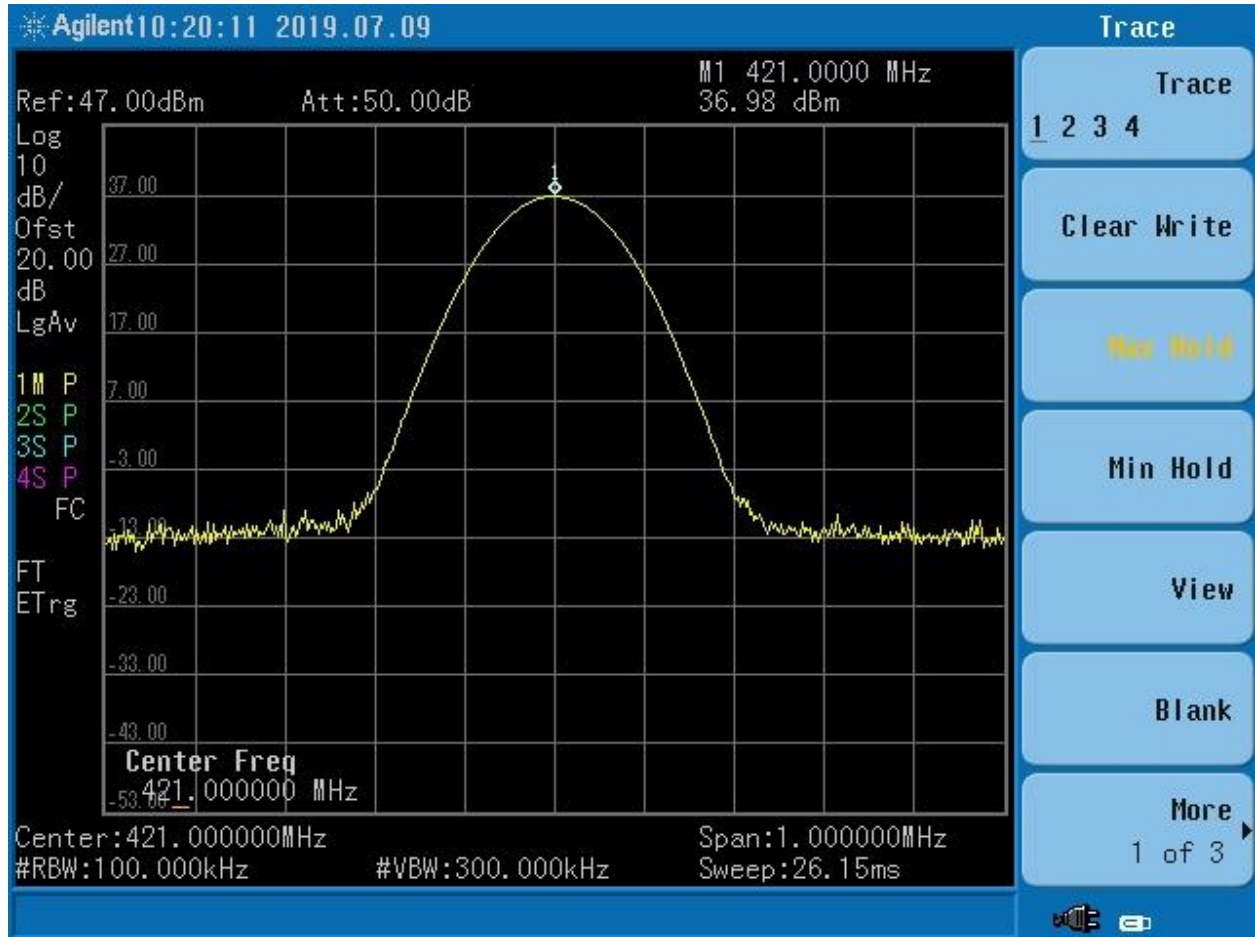


Figure 6. 421 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

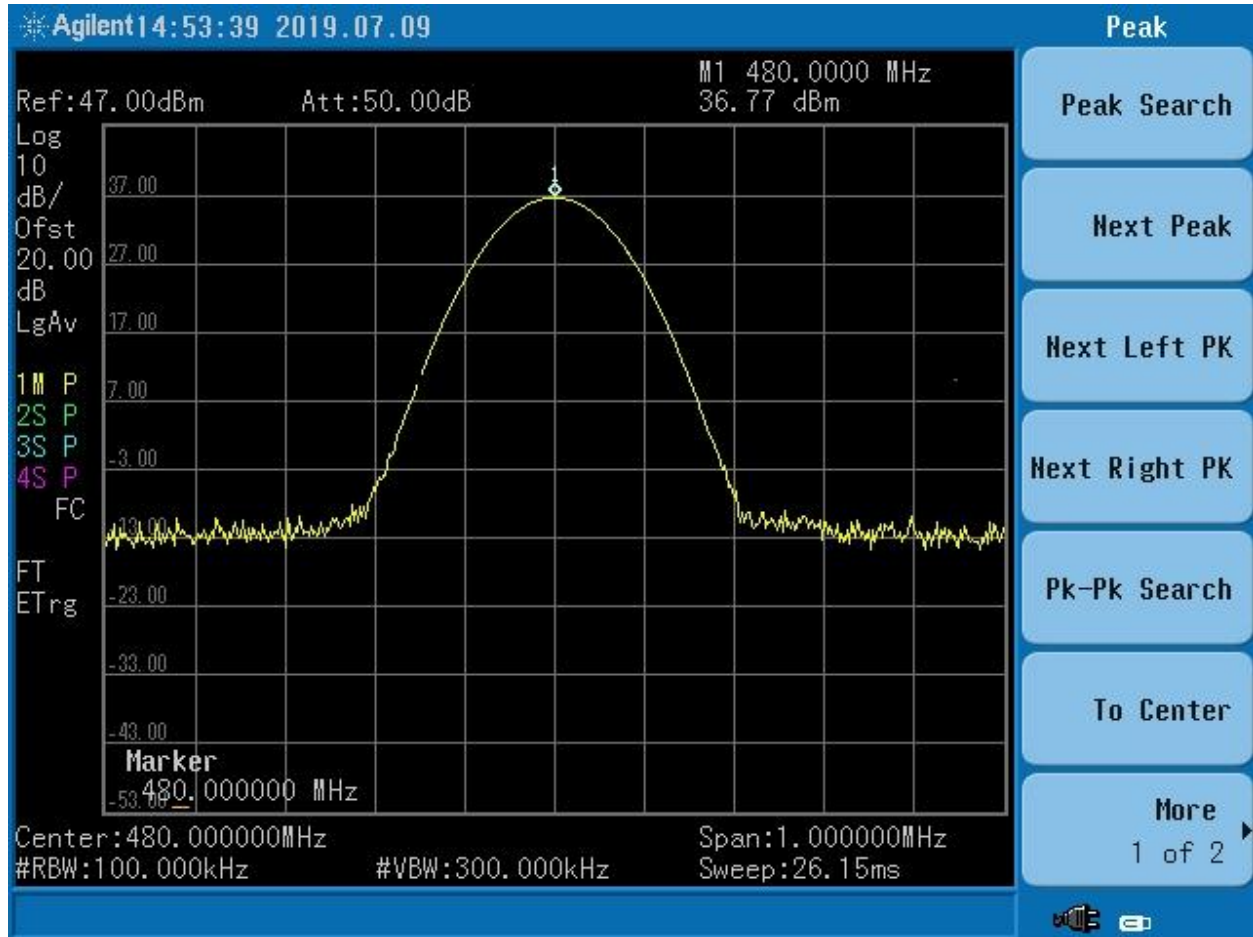


Figure 7. 480 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

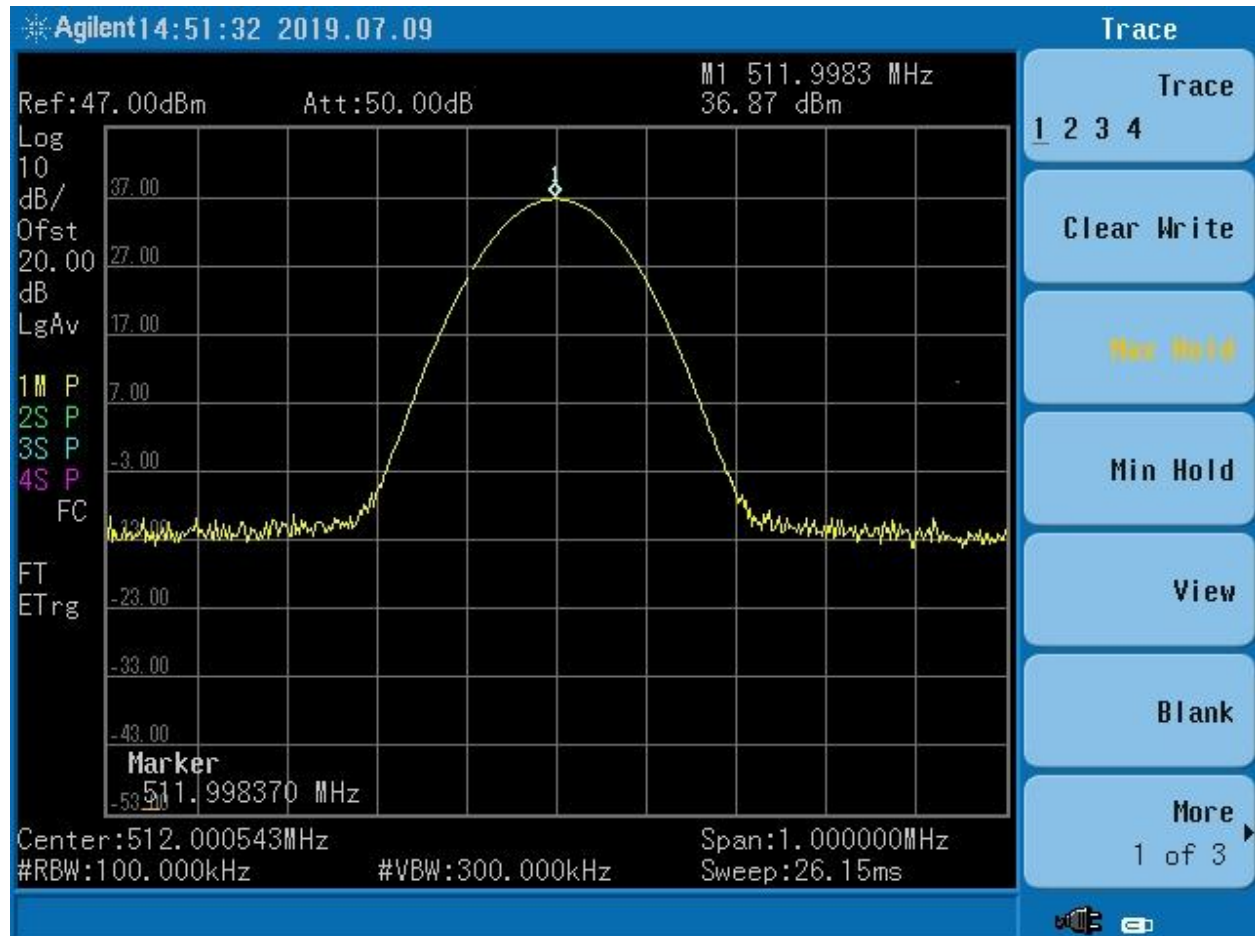


Figure 8. 512 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

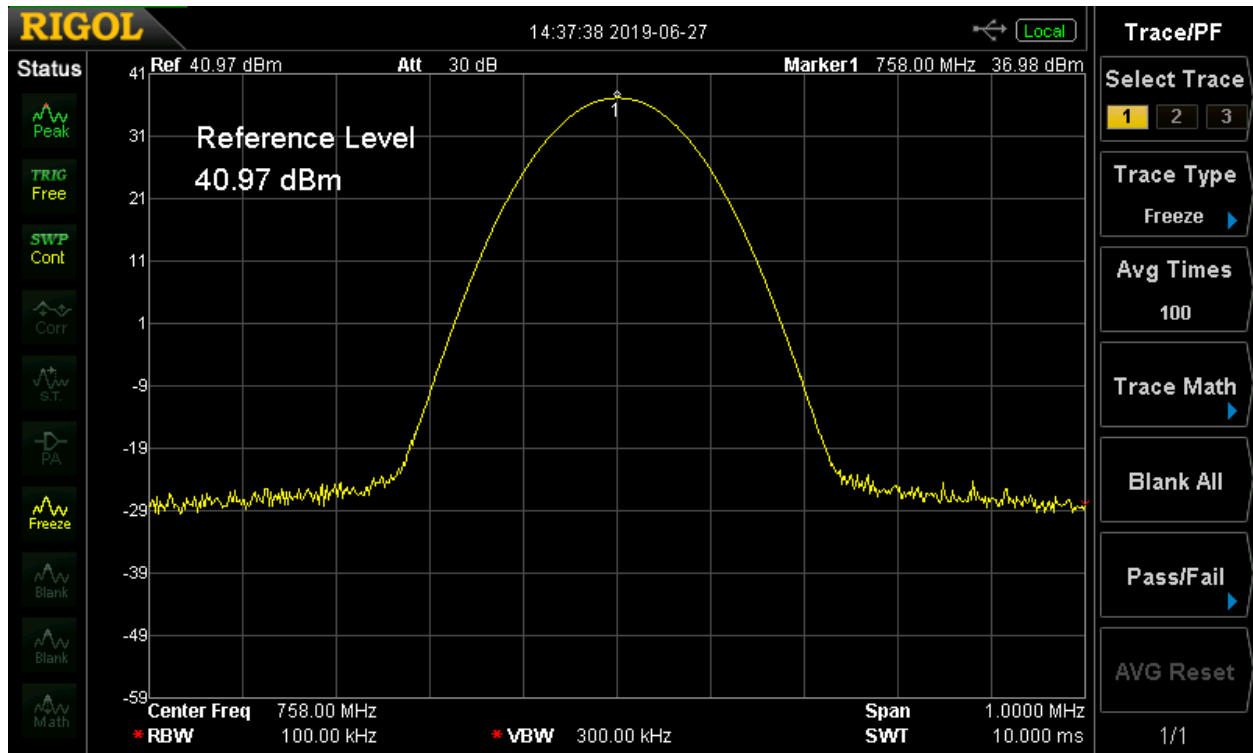


Figure 9. 758 MHz Output Power Plot

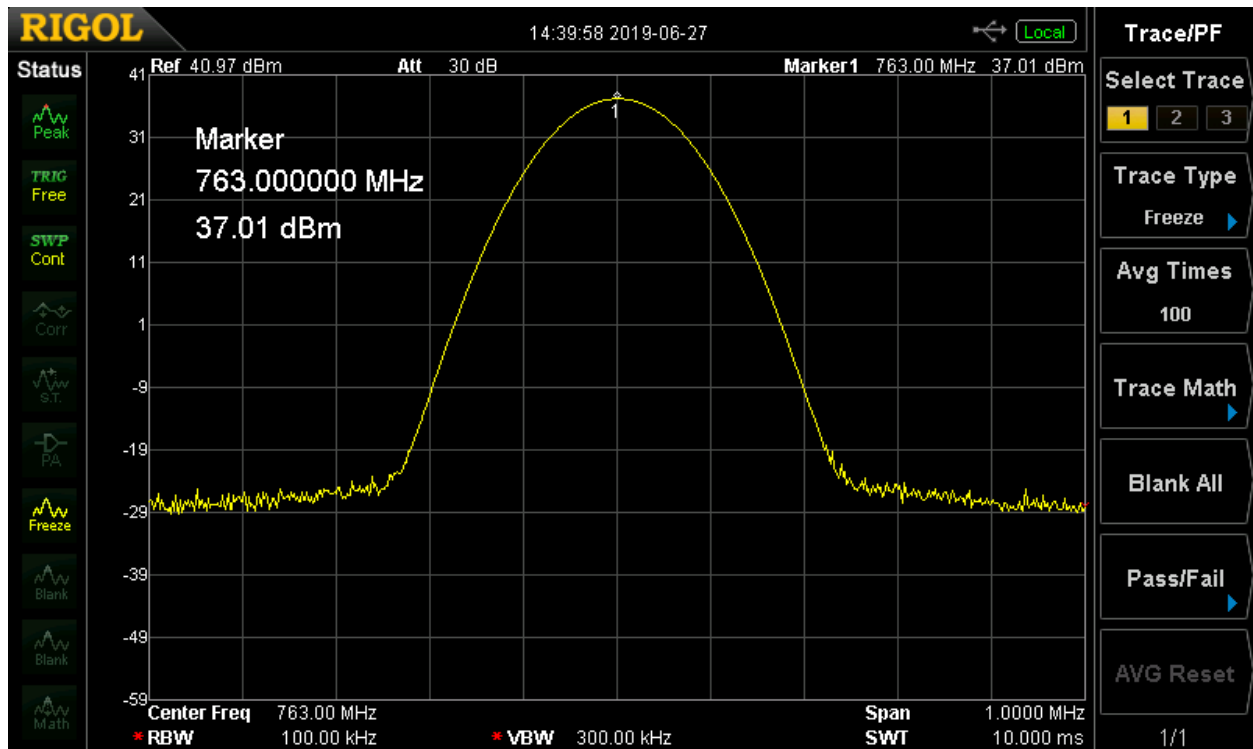


Figure 10. 763 MHz Output Power Plot

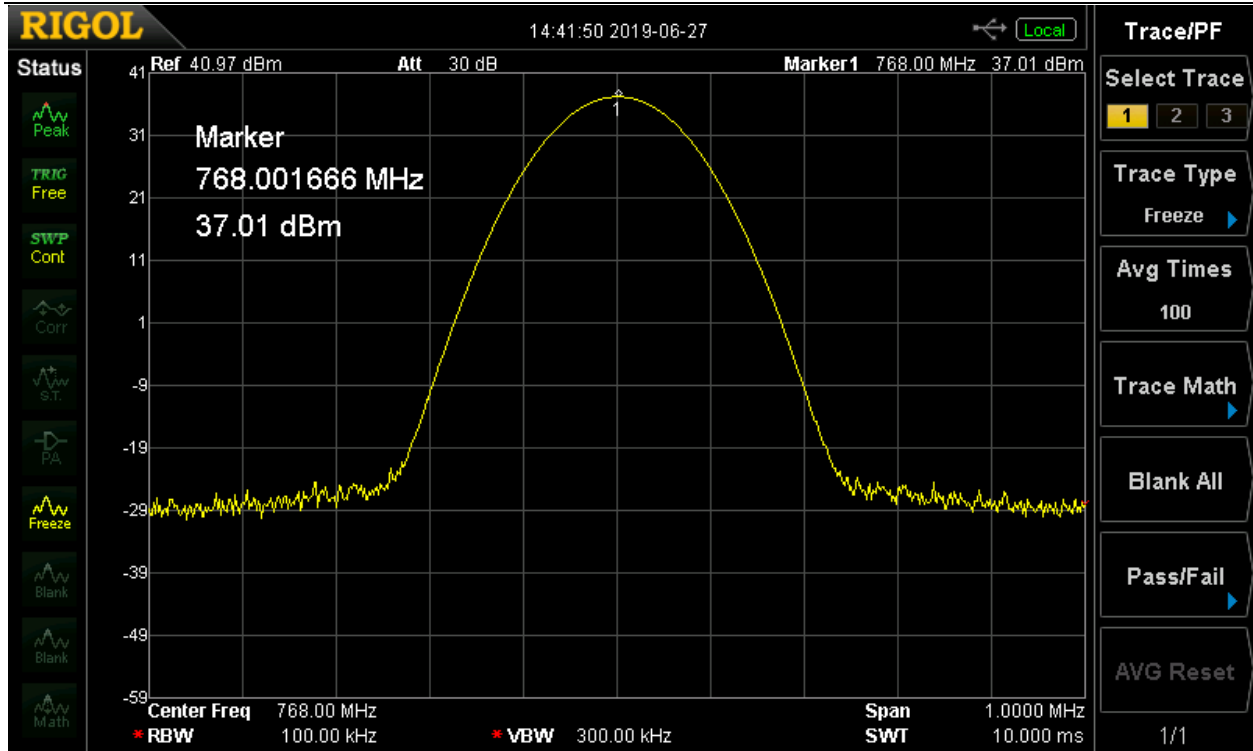


Figure 11. 768 MHz Output Power Plot

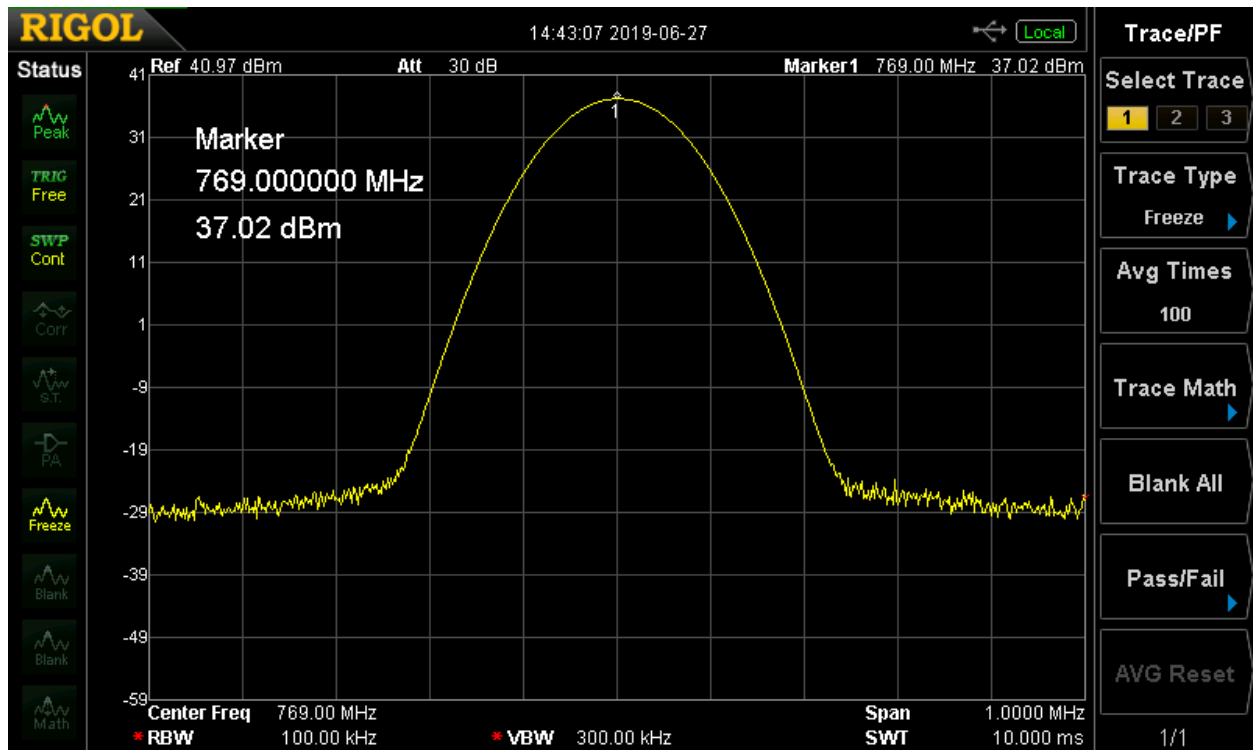


Figure 12. 769 MHz Output Power Plot

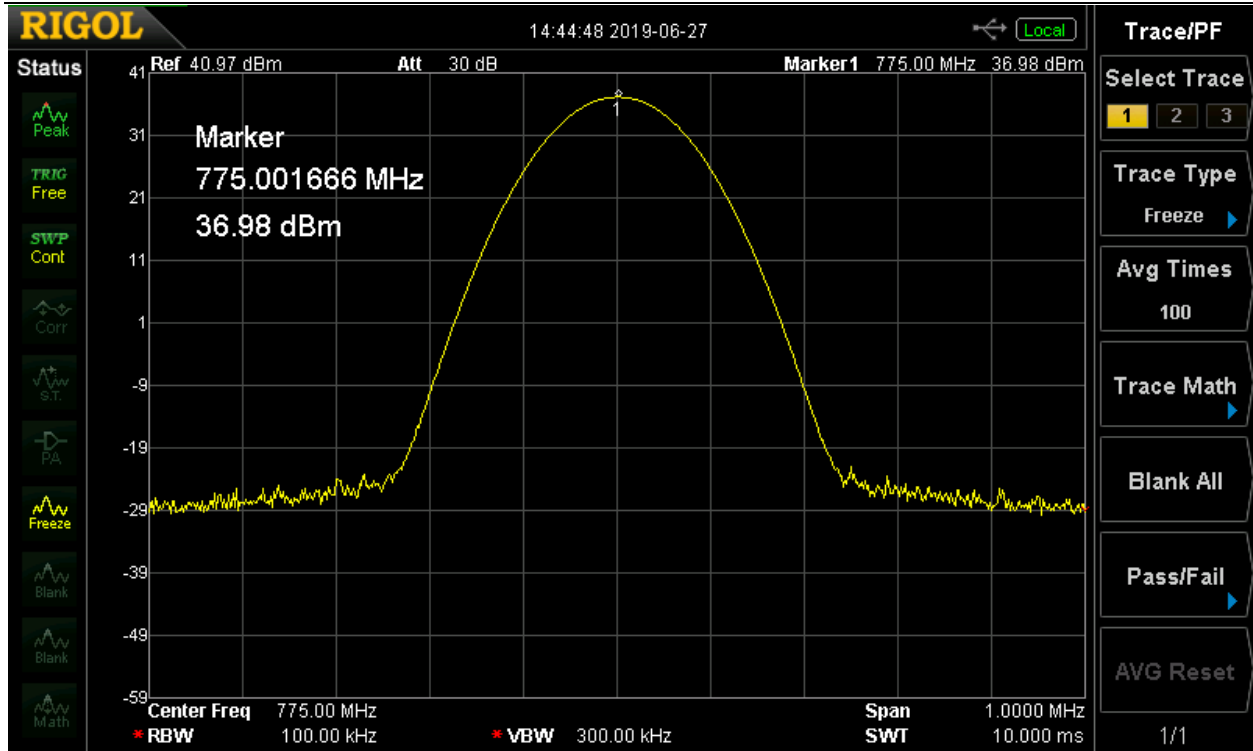


Figure 13. 775 MHz Output Power Plot

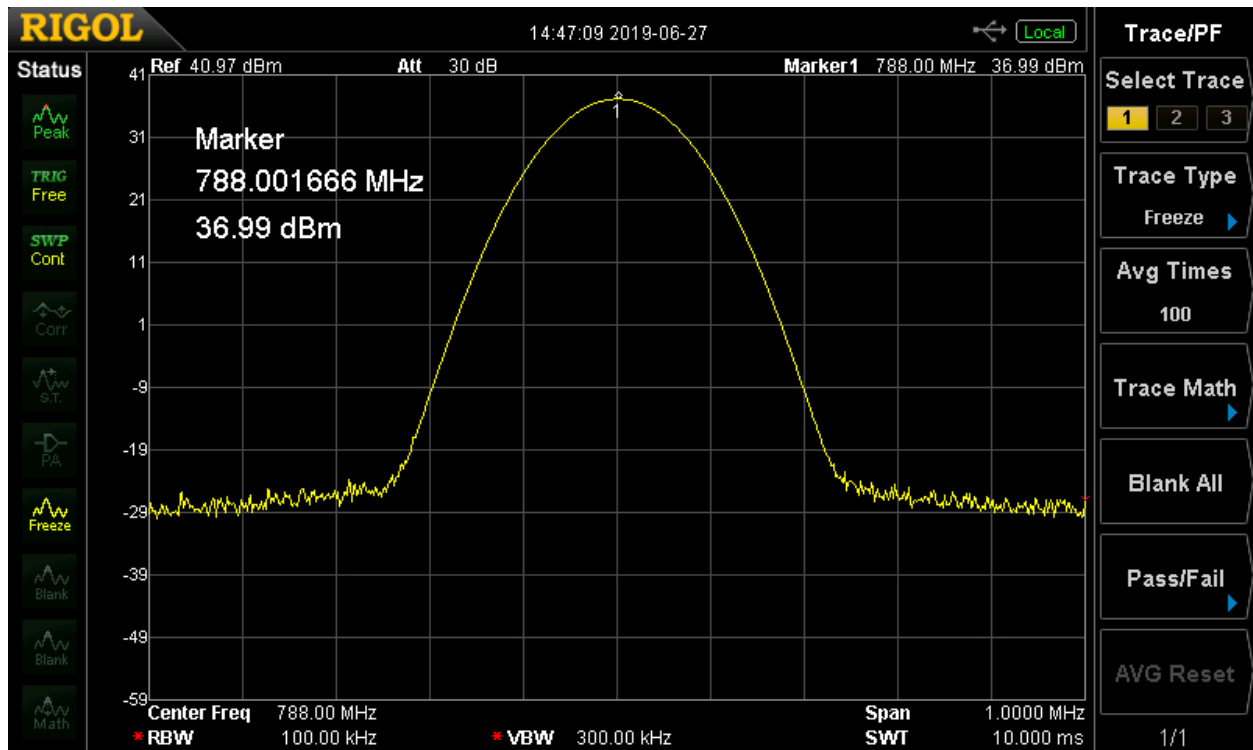


Figure 14. 788 MHz Output Power Plot

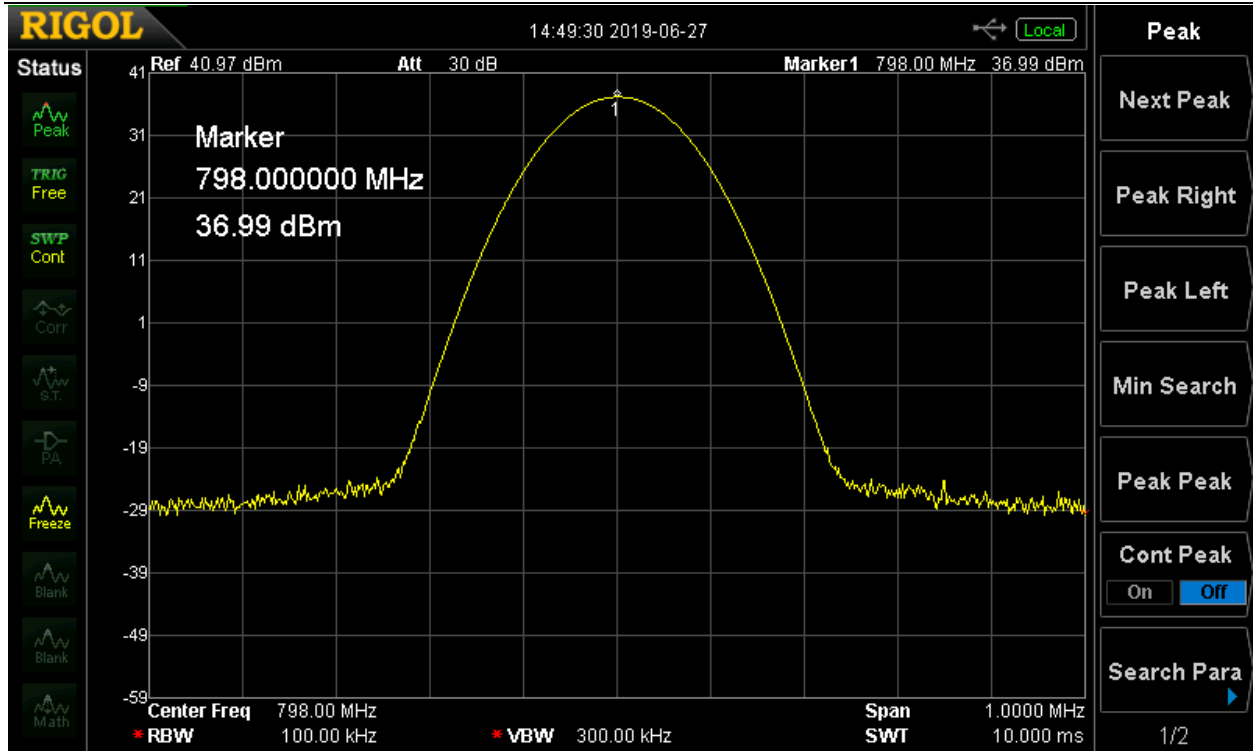


Figure 15. 798 MHz Output Power Plot

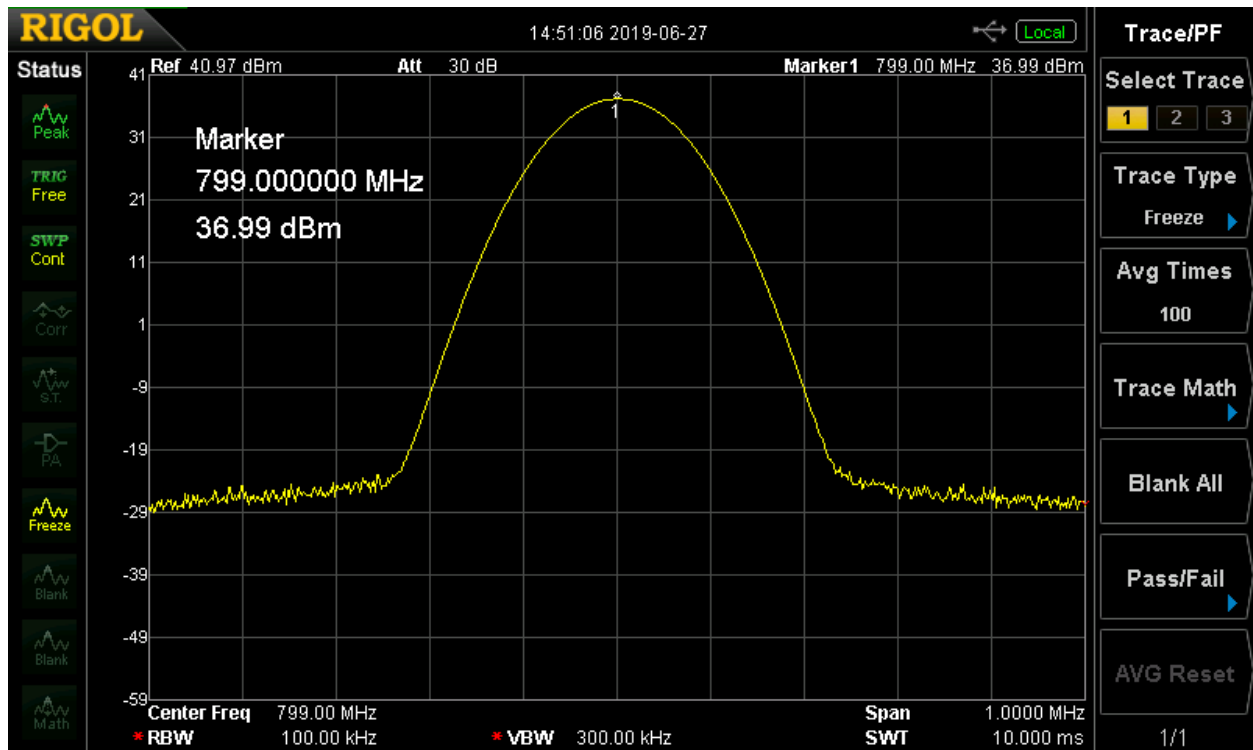


Figure 16. 799 MHz Output Power Plot

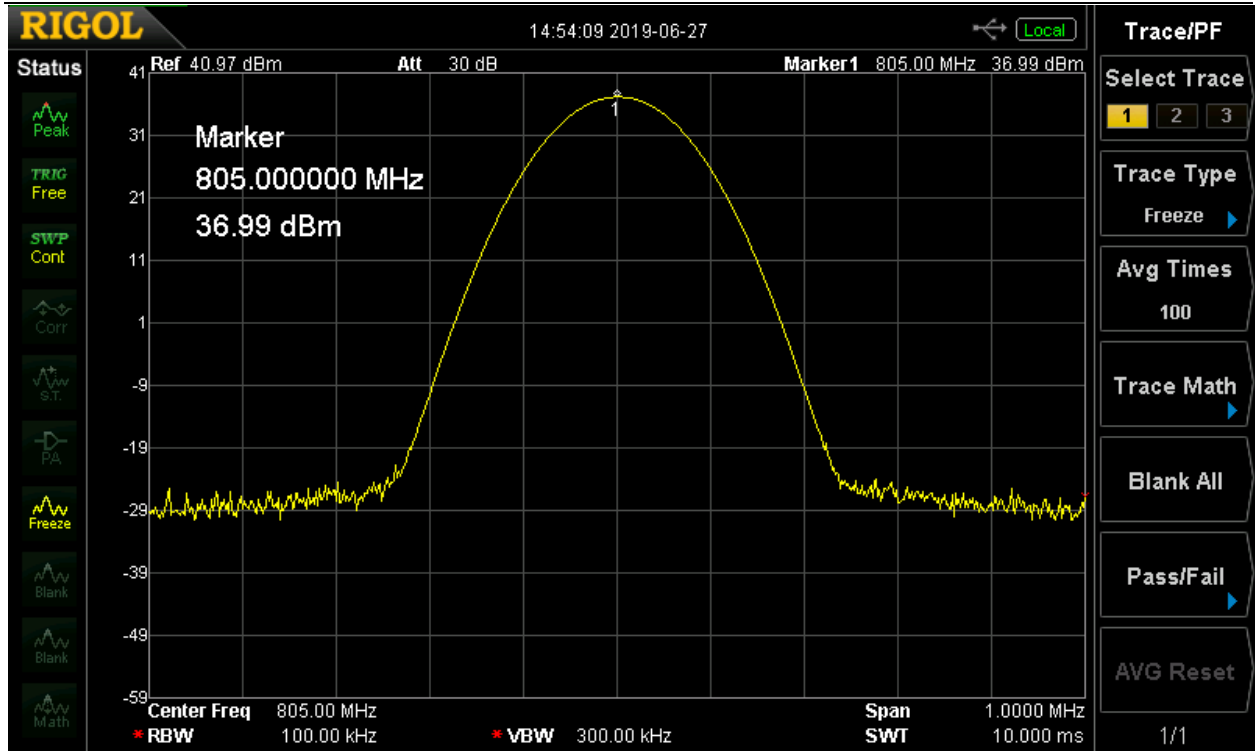


Figure 17. 805 MHz Output Power Plot

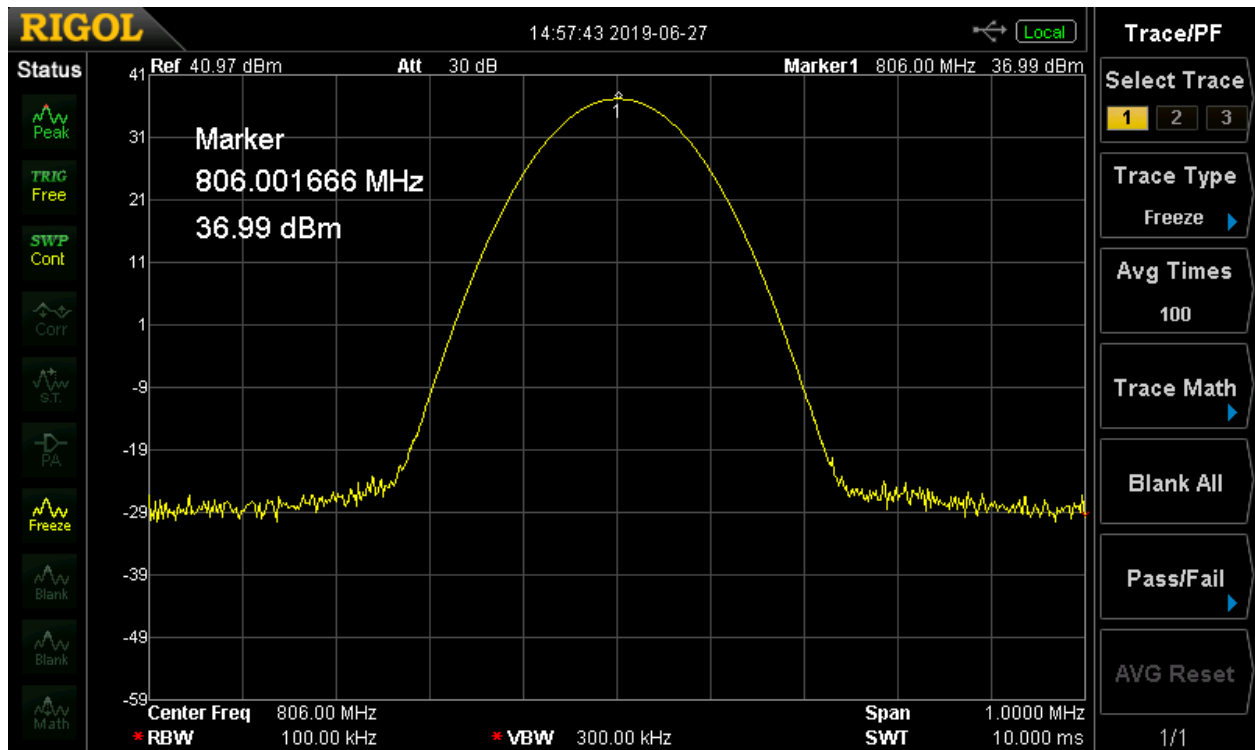


Figure 18. 806 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

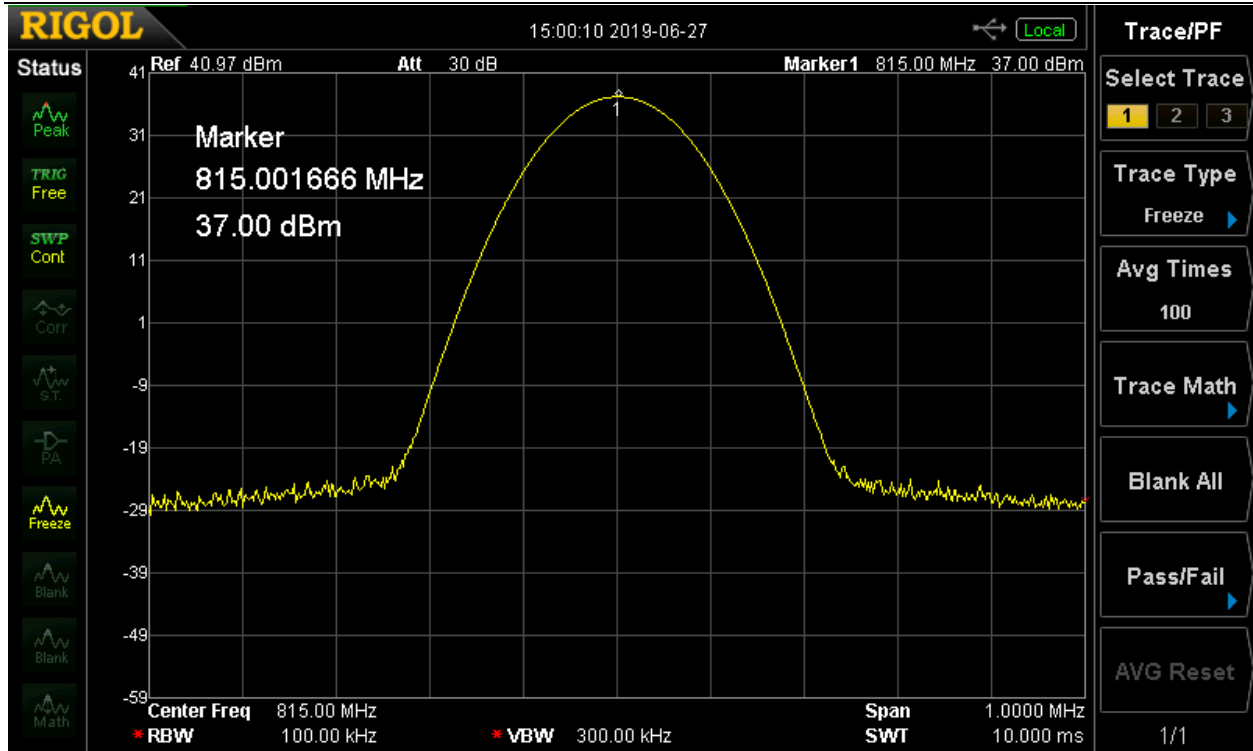


Figure 19. 815 MHz Output Power Plot

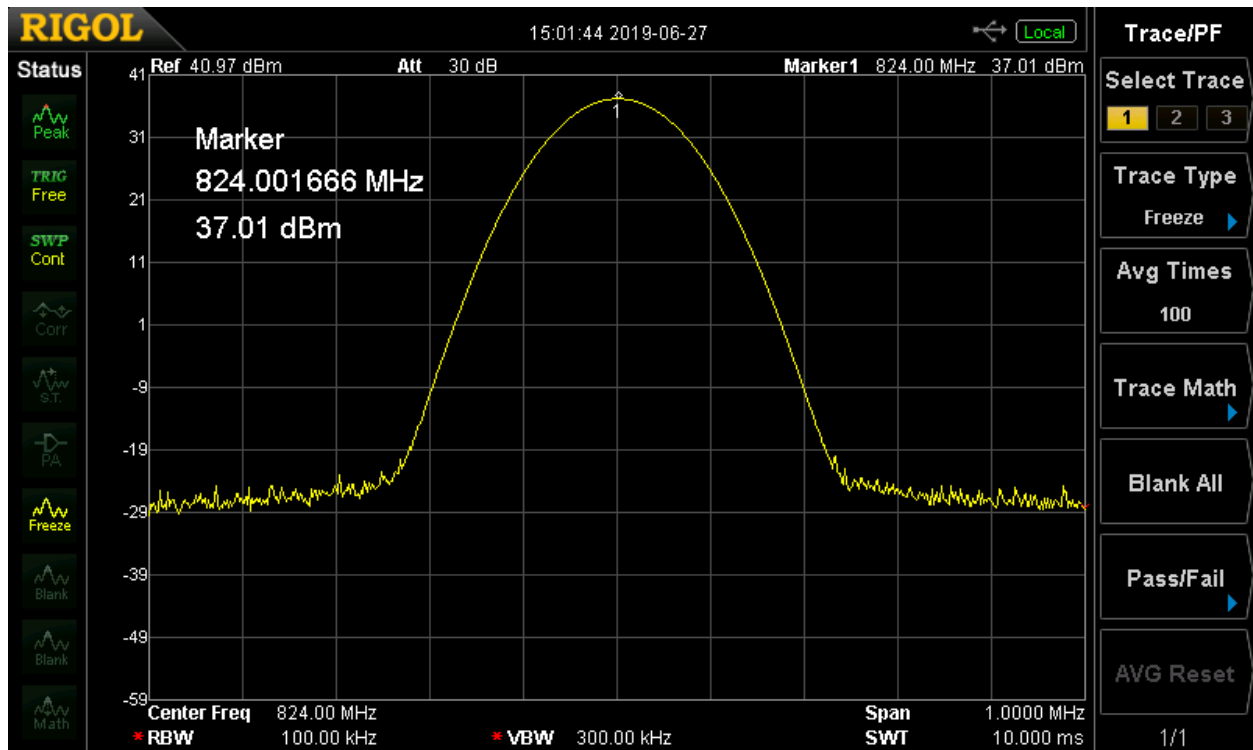


Figure 20. 824 MHz Output Power Plot

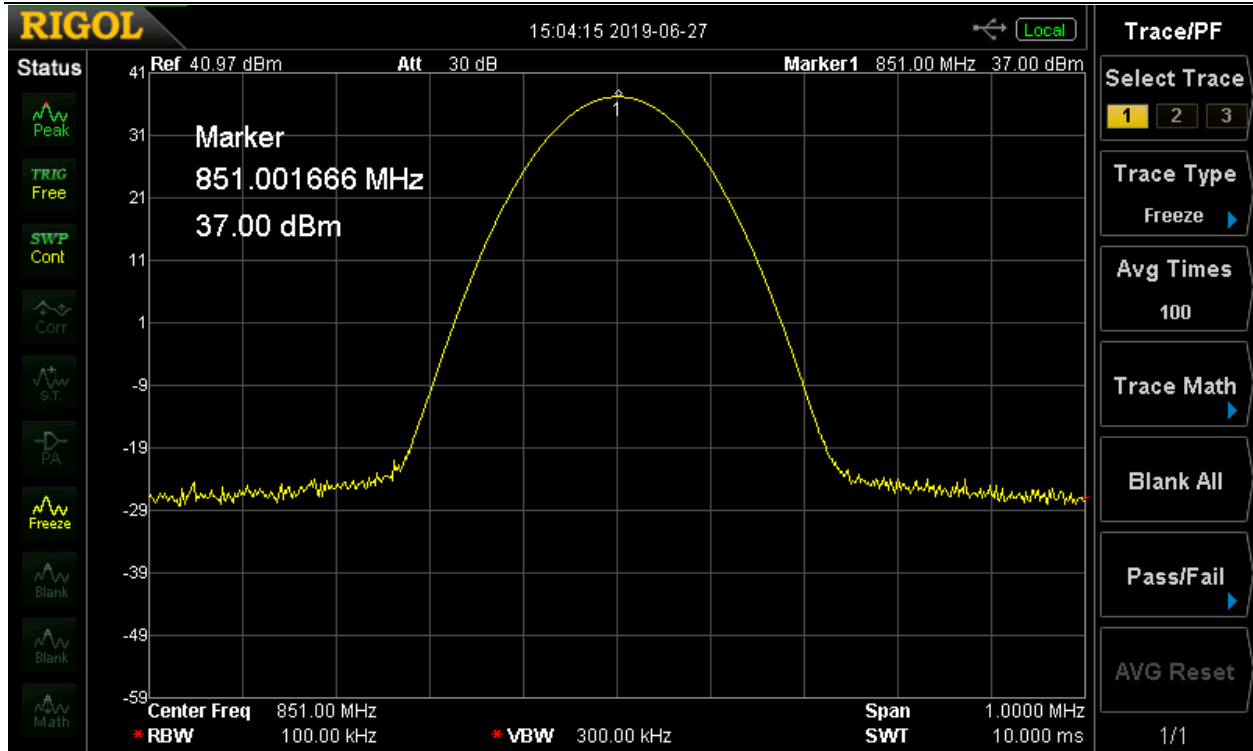


Figure 21. 851 MHz Output Power Plot

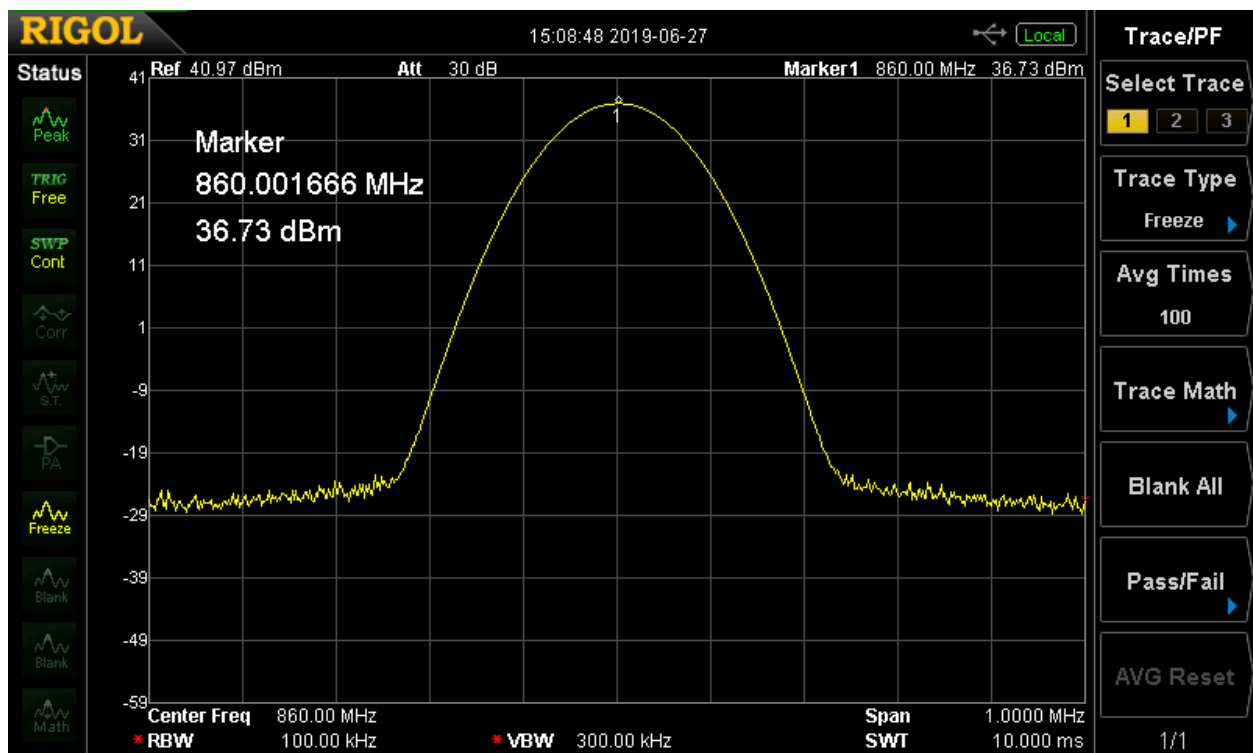


Figure 22. 860 MHz Output Power Plot

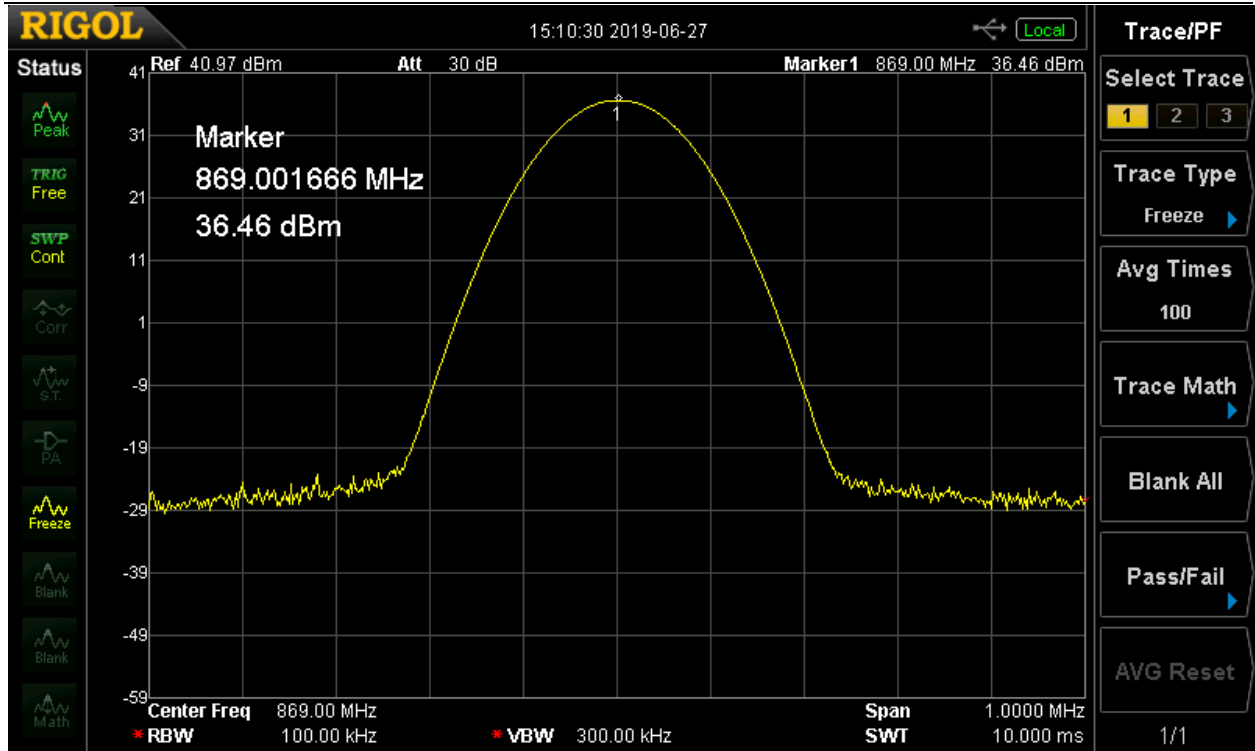


Figure 23. 869 MHz Output Power Plot

2.11 Emission Mask and Retransmitted Signal Measurements

The EUT was connected to a spectrum analyzer through a 20 dB attenuator. All cable and attenuator losses were input into the spectrum analyzer as a combination of reference level offset and/or external correction factor offset to ensure accurate readings were obtained. Measurements were collect to verify that the EUT meets the required emissions mask parameters as cited in section 2.10 of this test report. A reference level plot is provided to show that the retransmitted signal meets the parameters as cited in section 2.10 of this test report.

The Emissions Mask were measured with the RF input set to at least 0.2 dB below the AGC level and then at +3.0 dB above the AGC level per KDB 935210 D03 V04.

2.11.1 VHF Channels

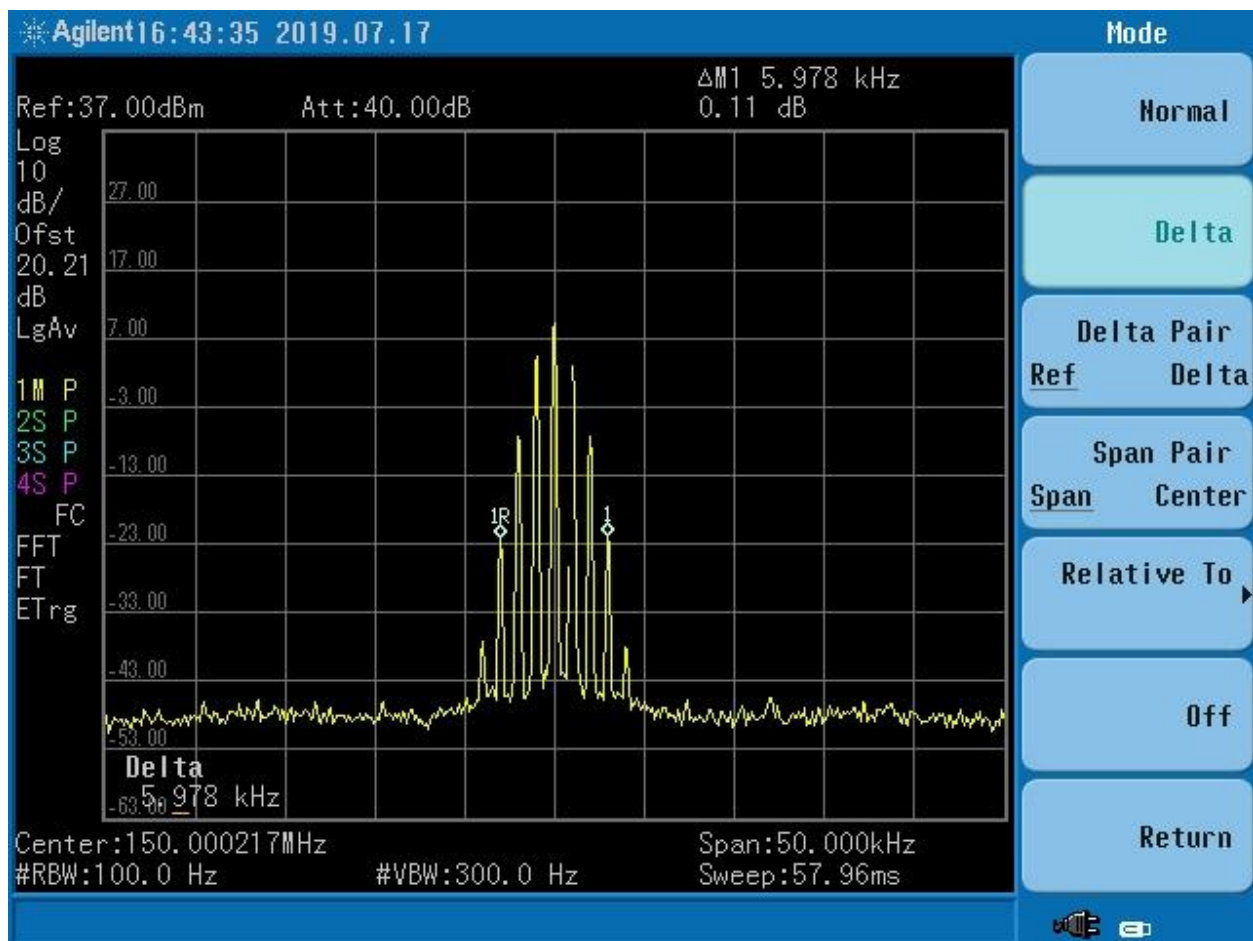


Figure 24. Input 150 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

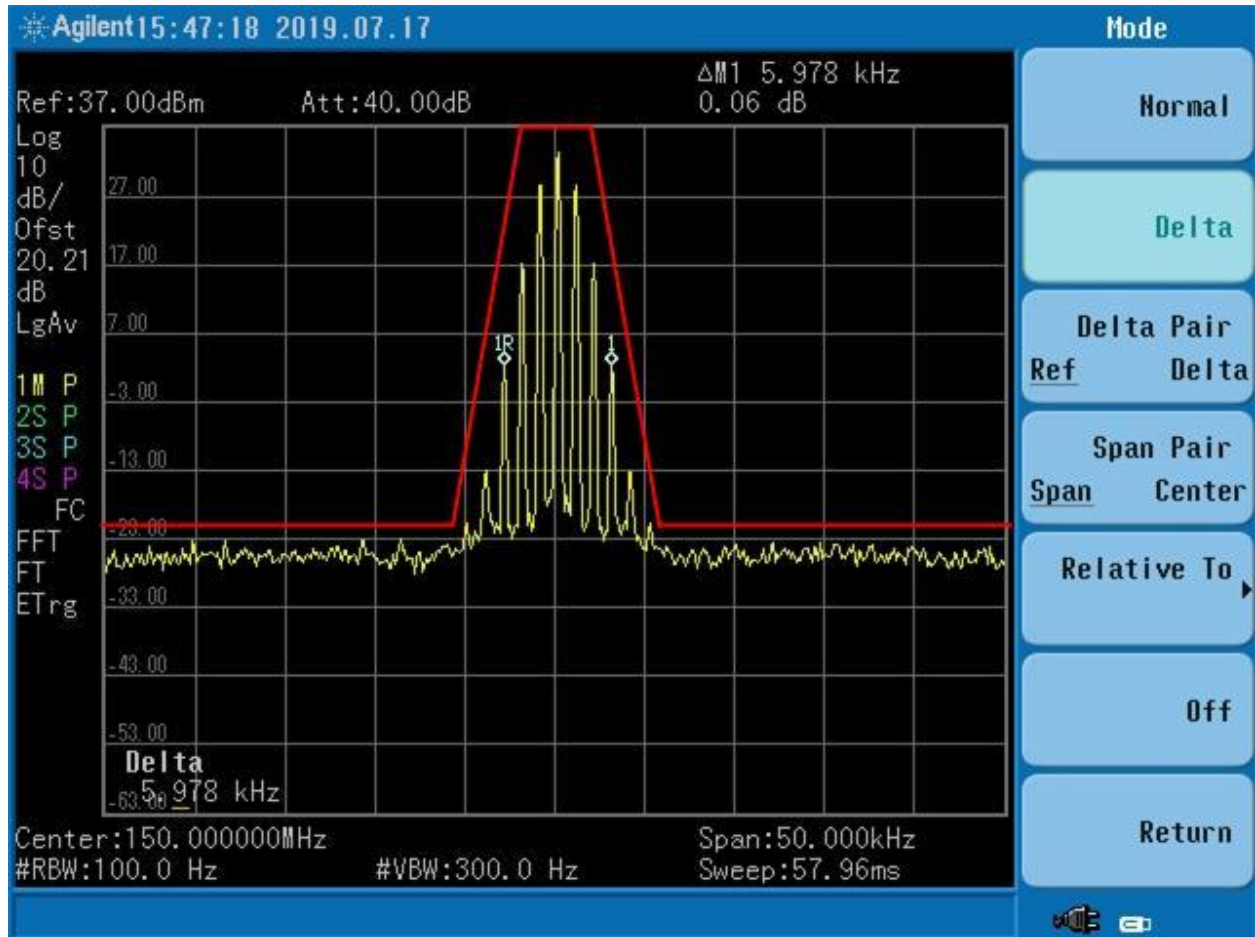


Figure 25. 150 MHz @ 6.25 kHz, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001


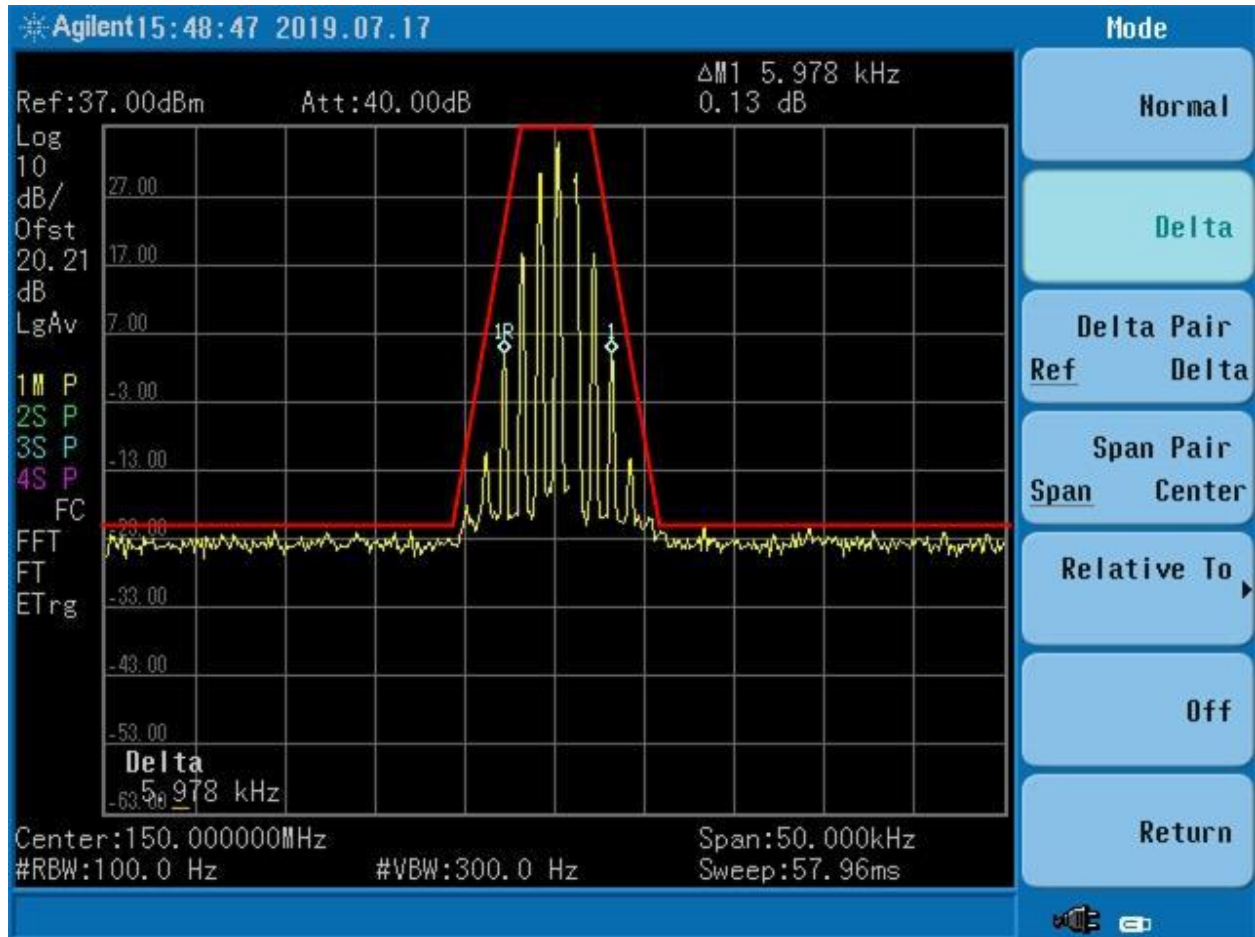


Figure 26. 150 MHz@ 6.25 kHz + 3.0 dB, Mask E

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

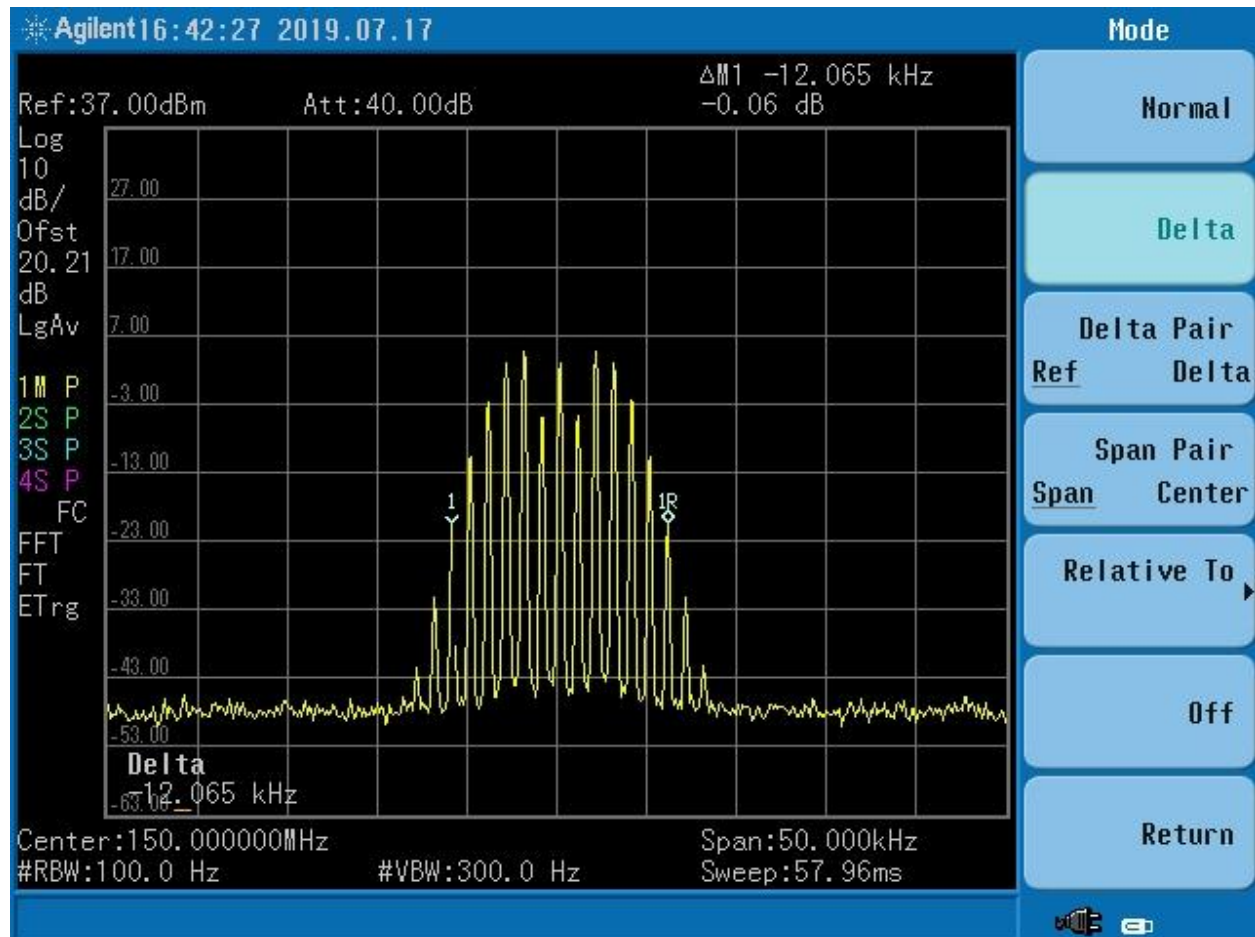

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

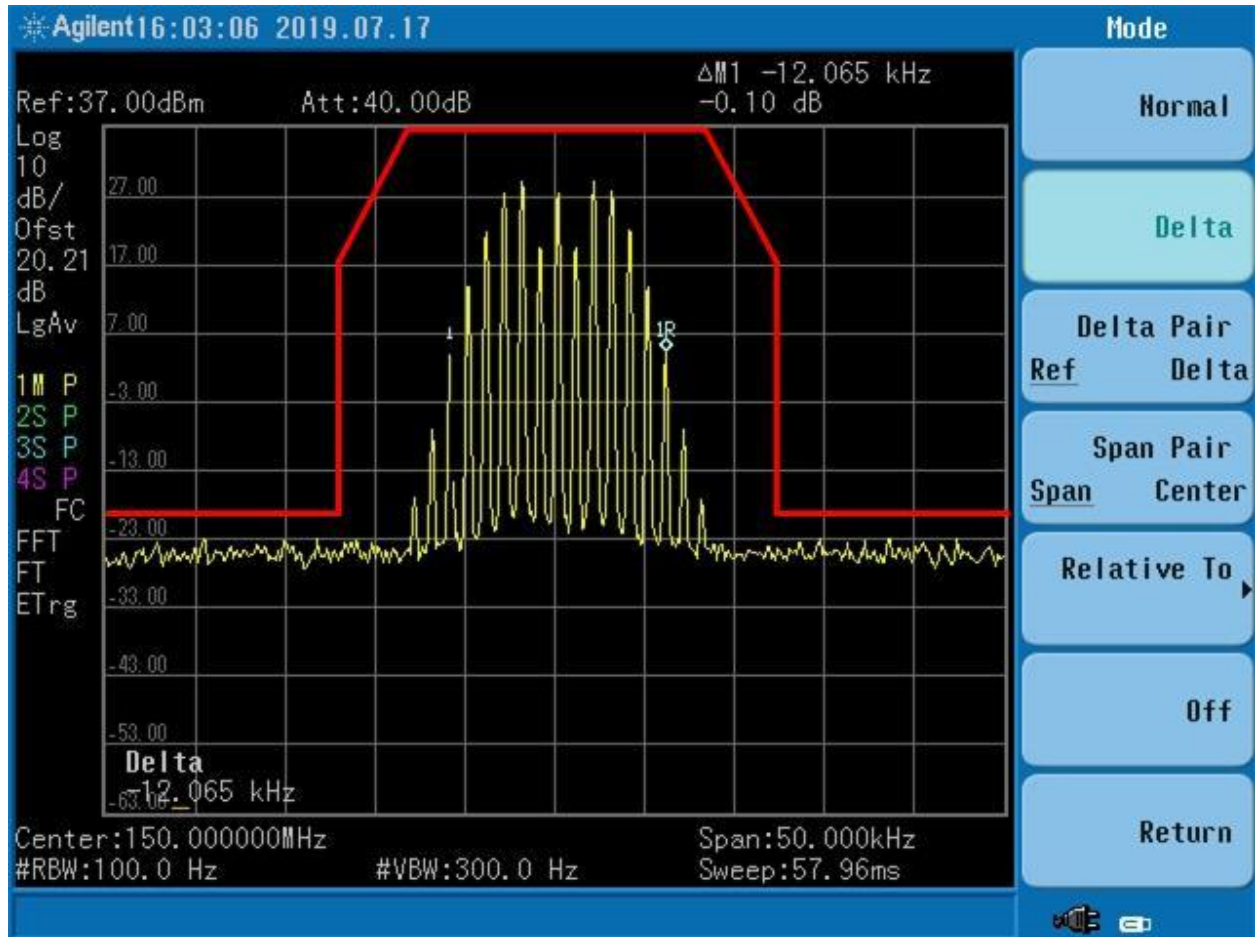


Figure 28. 150 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

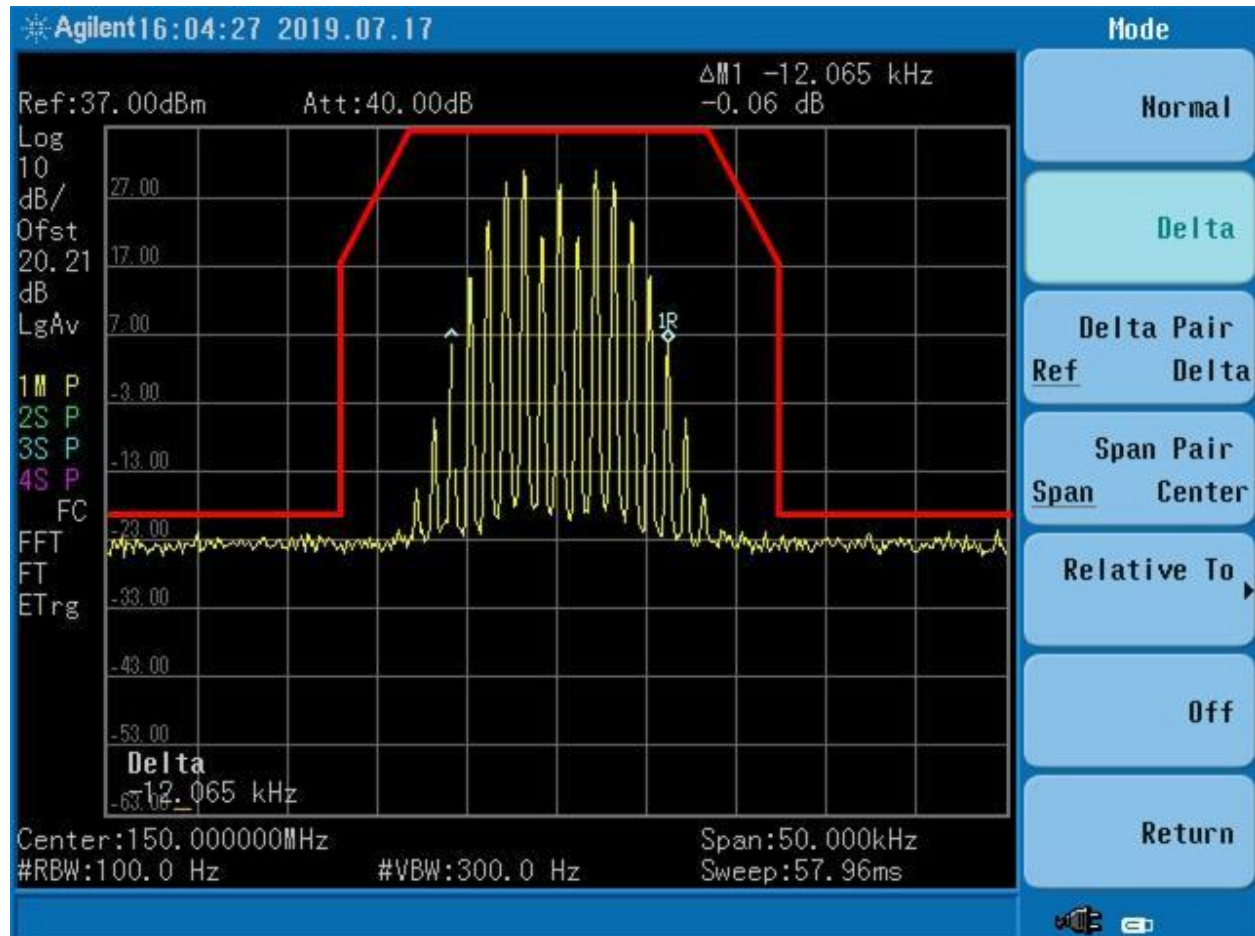


Figure 29. 150 MHz @ 12.5 kHz + 3.0 dB, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

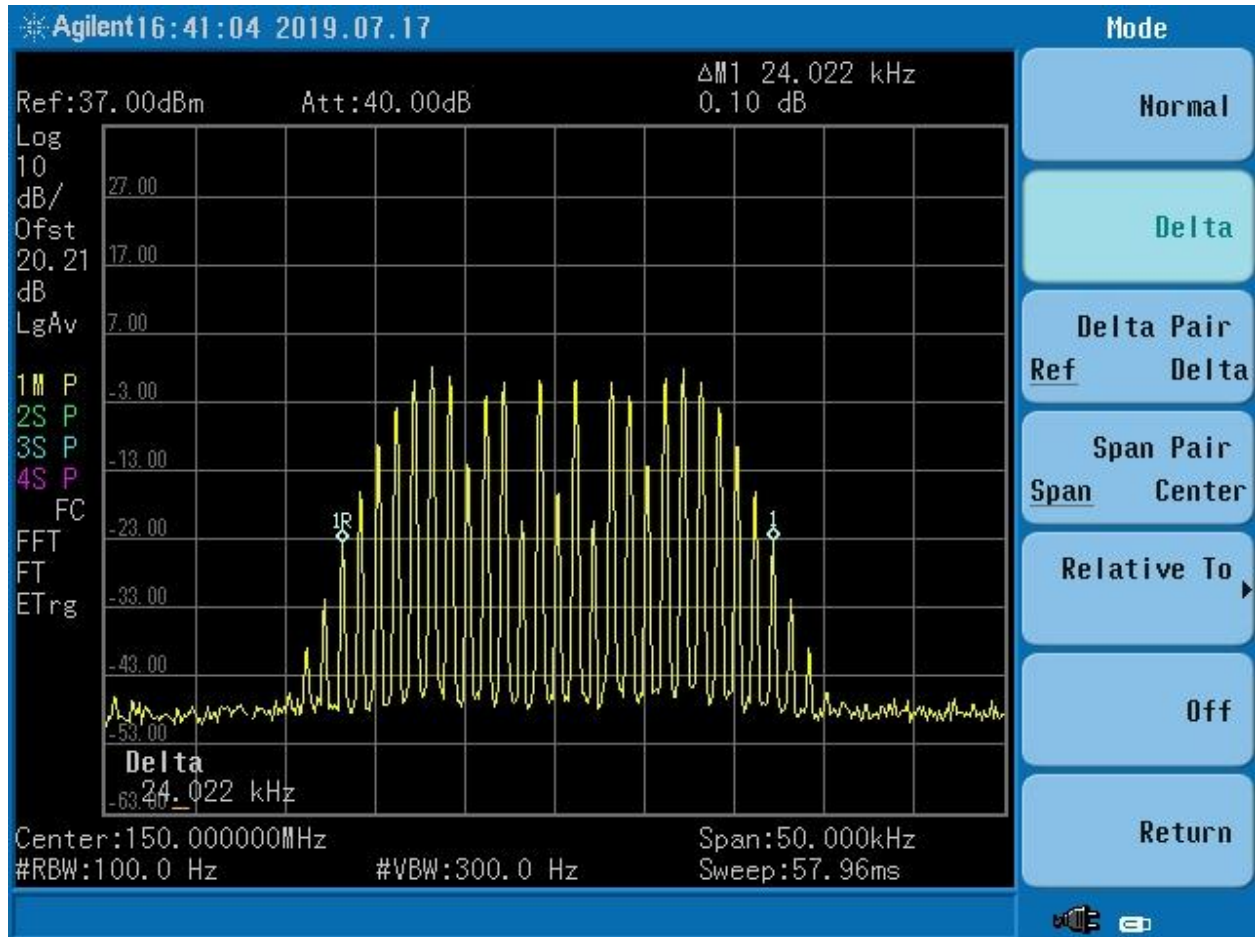


Figure 30. Input 150 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

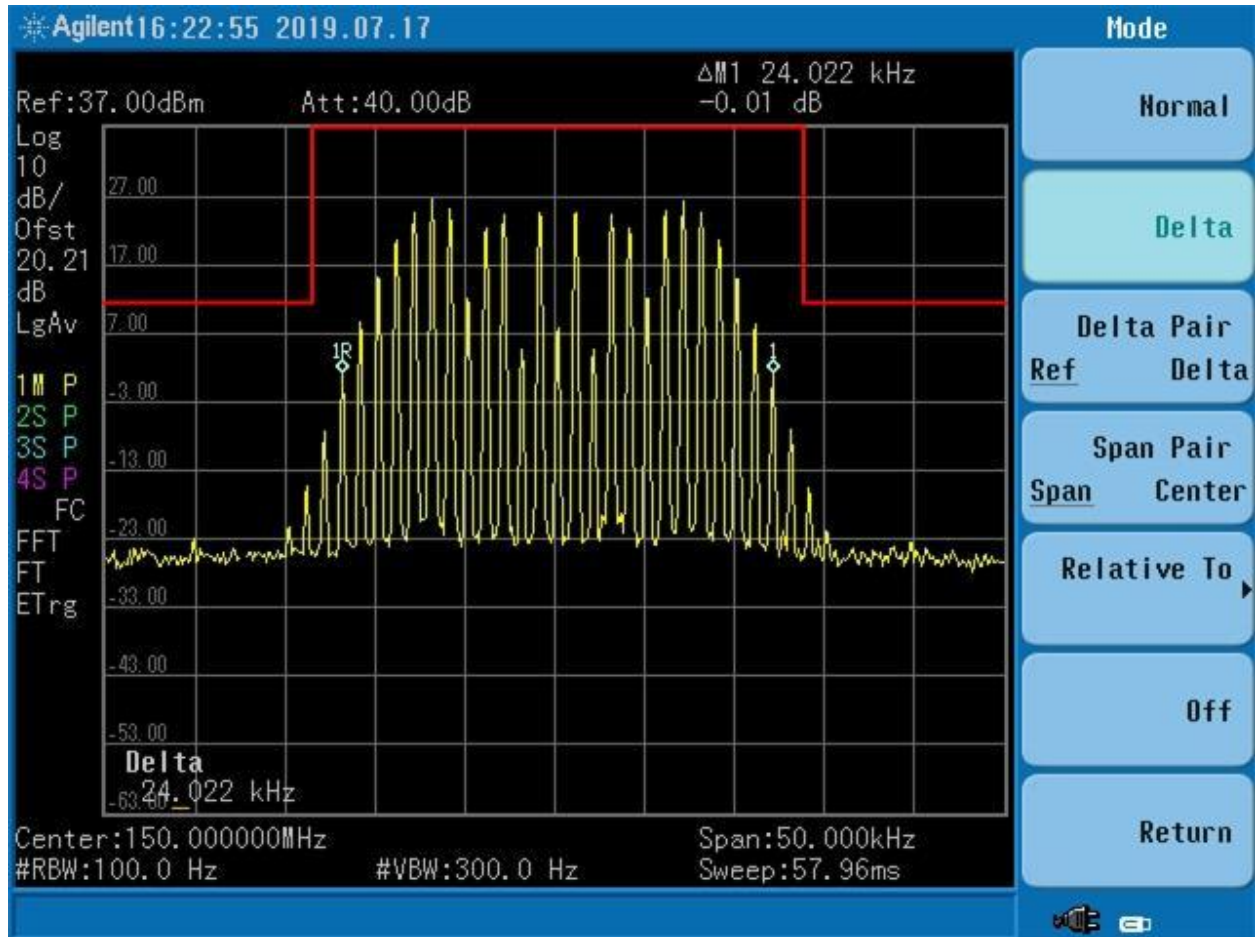


Figure 31. 150 MHz @ 25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

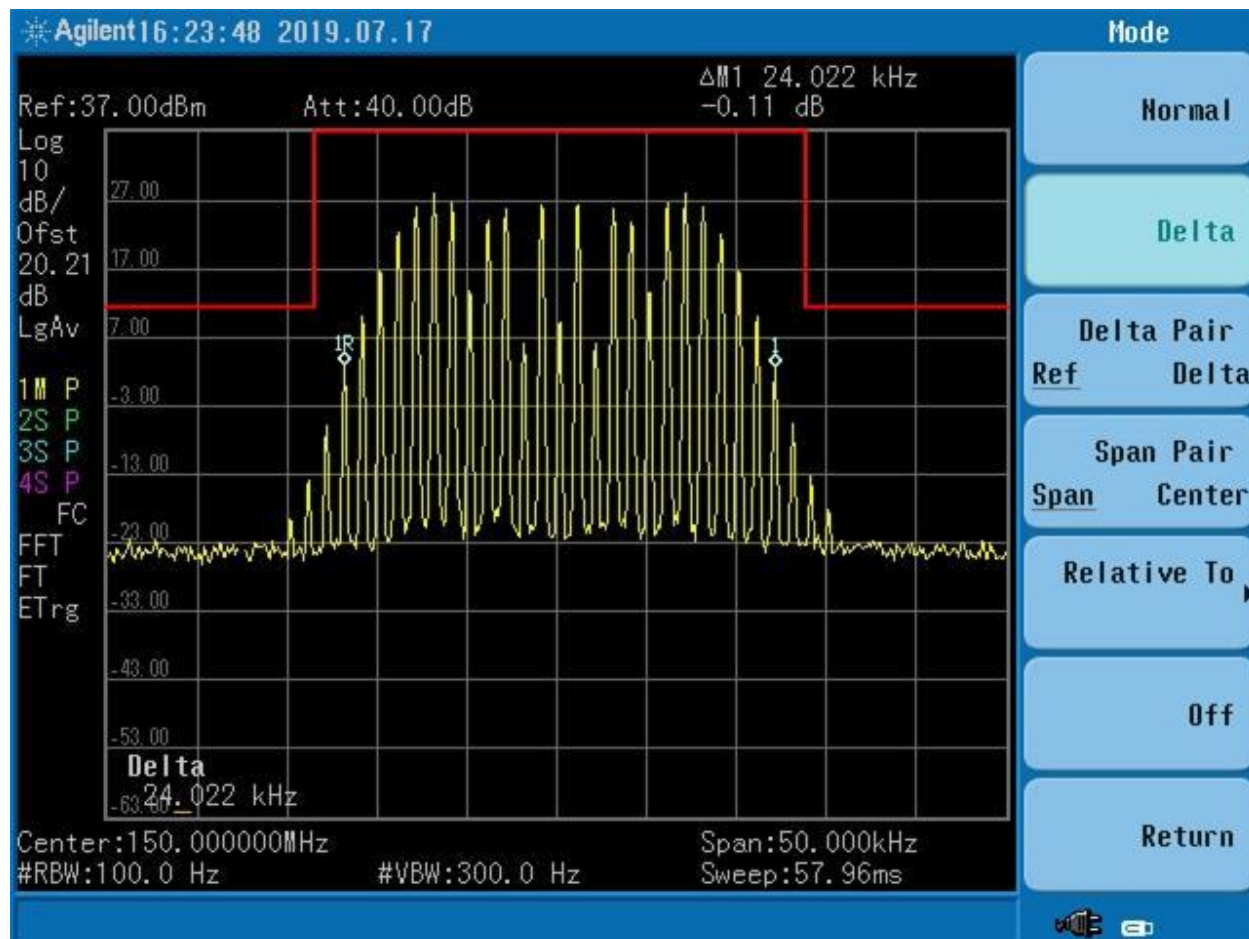


Figure 32. 150 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

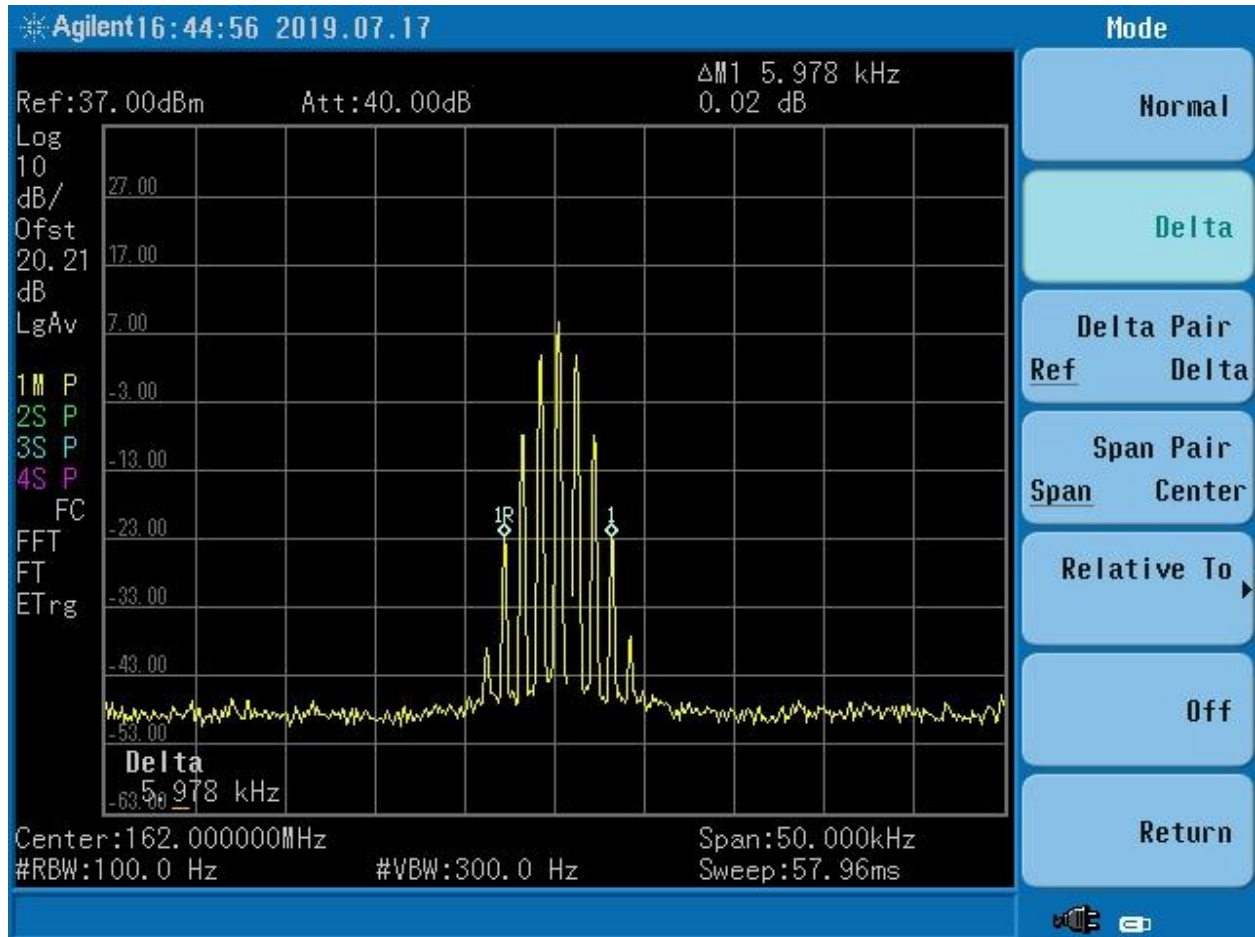


Figure 33. Input 162 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

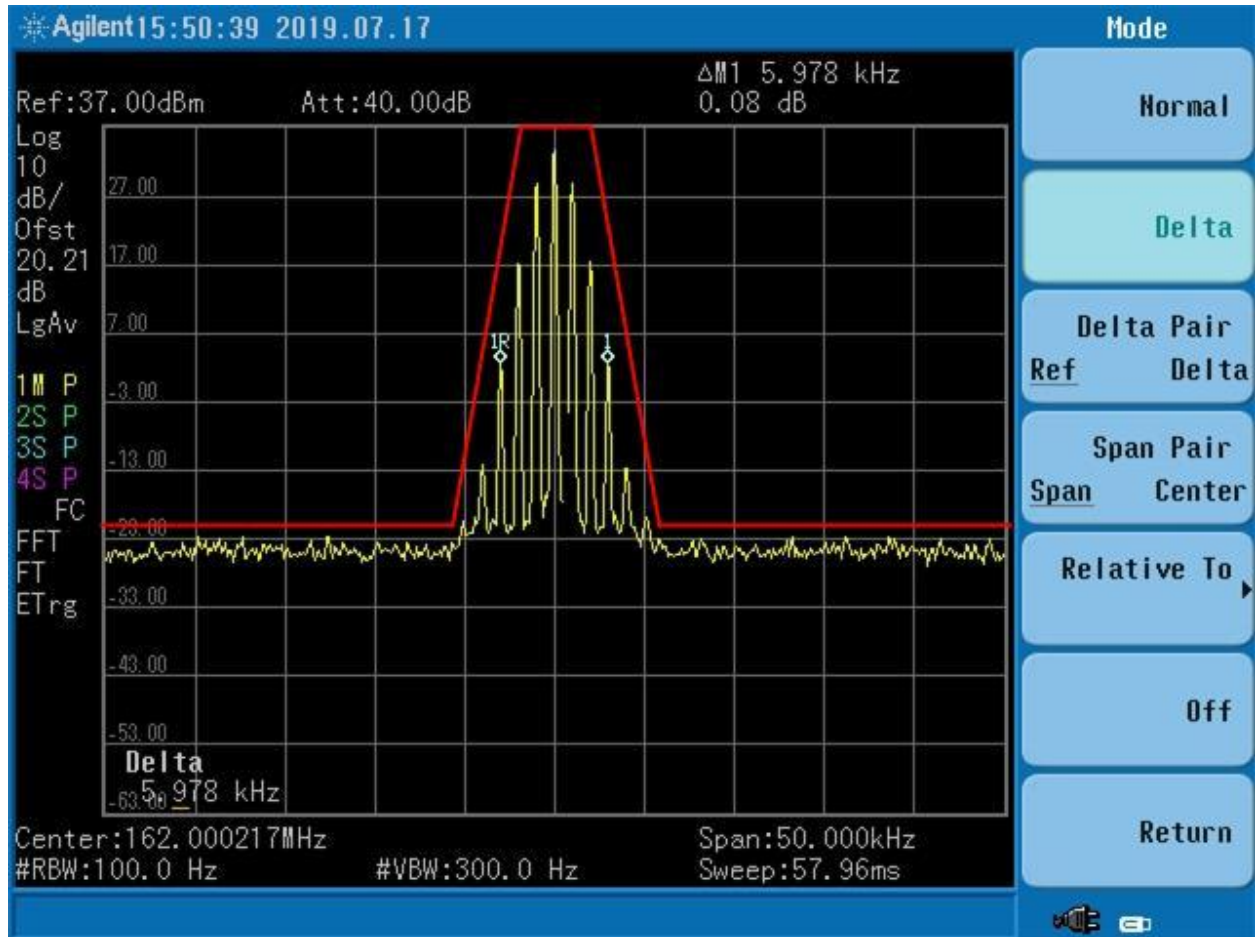


Figure 34. 162 MHz @ 6.25 kHz, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

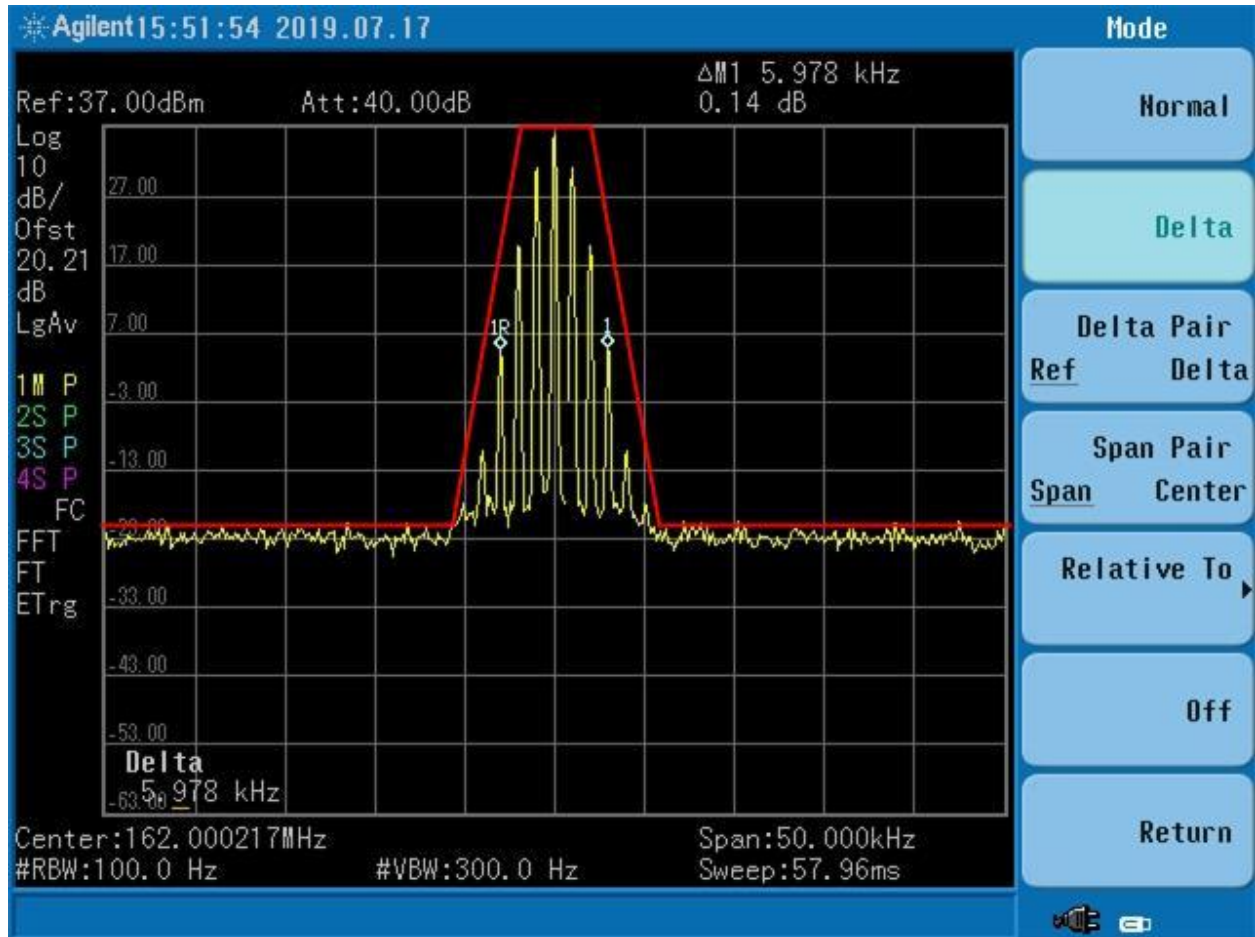


Figure 35. 162 MHz @ 6.25 kHz + 3.0 dB, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

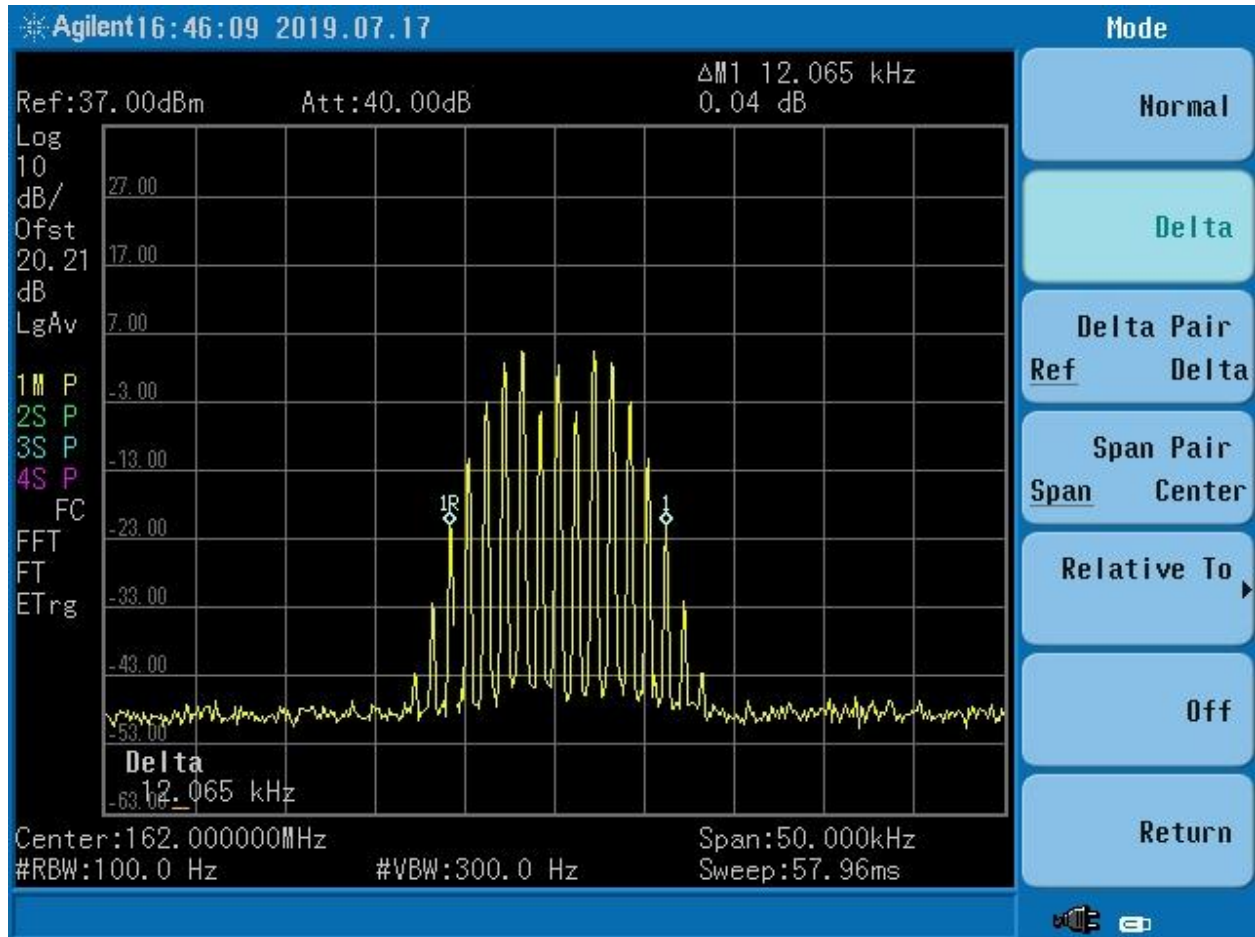


Figure 36. Input 162 MHz @ 12.5 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

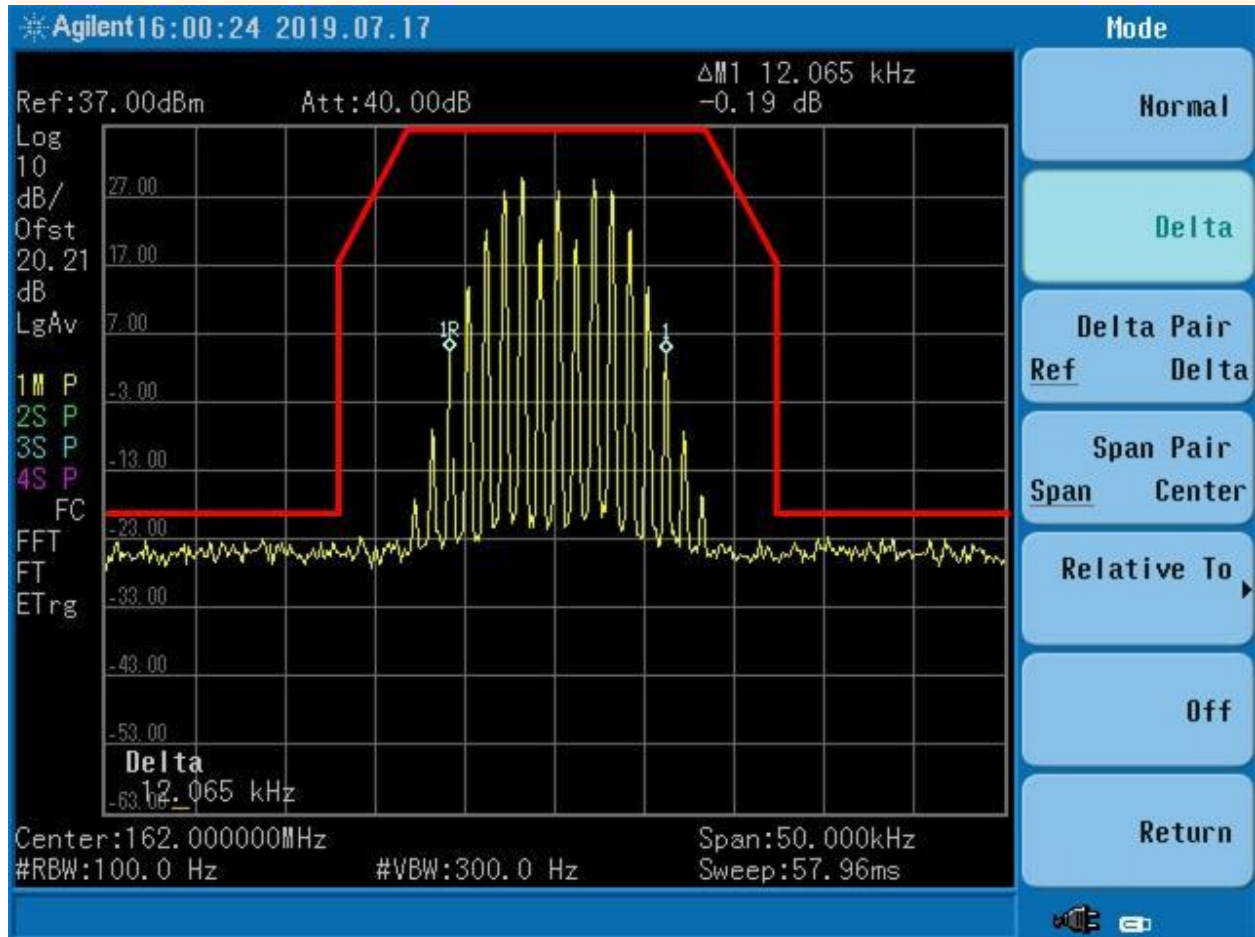


Figure 37. 162 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001


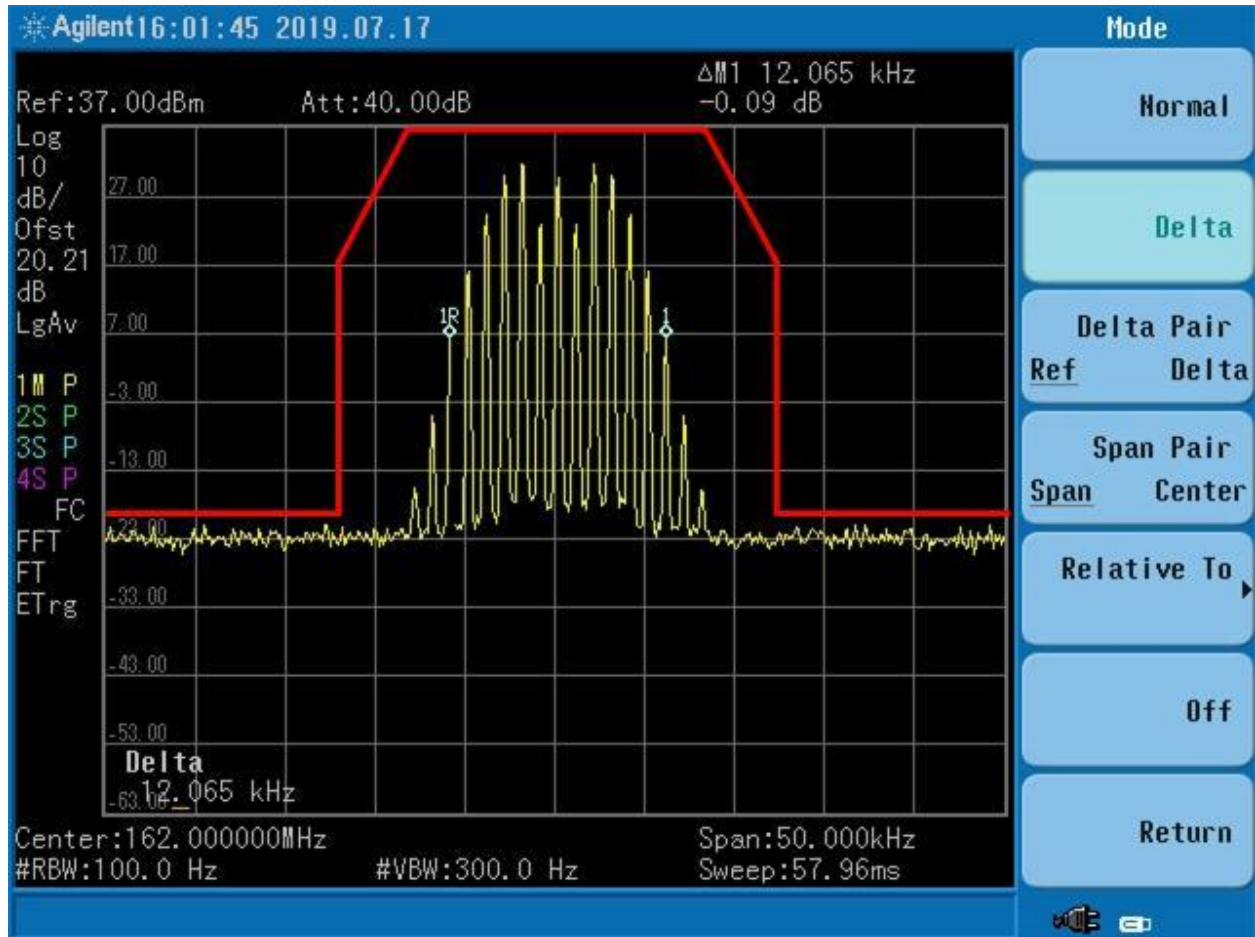


Figure 38. 162 MHz @ 12.5 kHz + 3.0 dB, Mask D

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

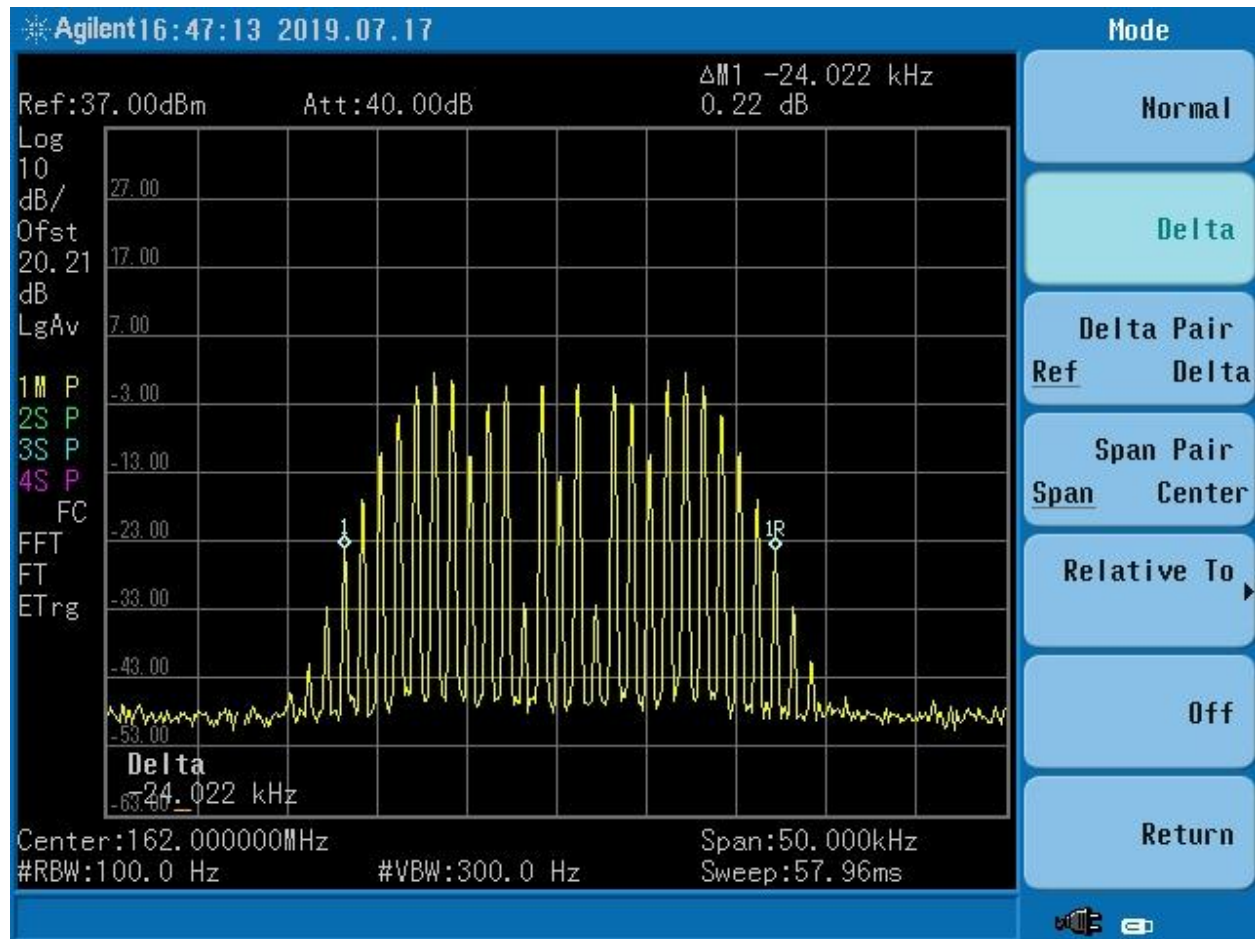

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

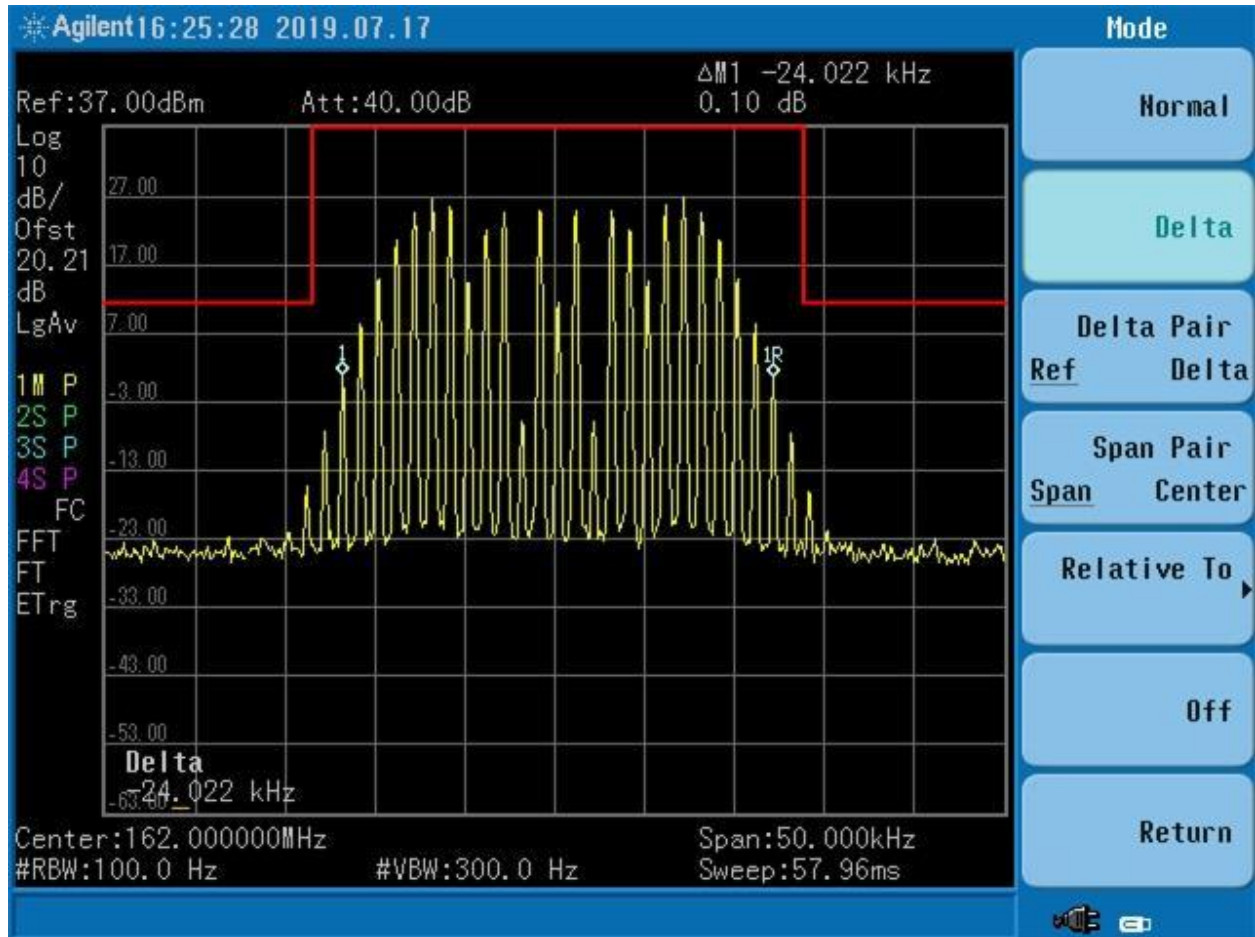


Figure 40. 162 MHz @ 25 kHz, Mask B

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001



U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

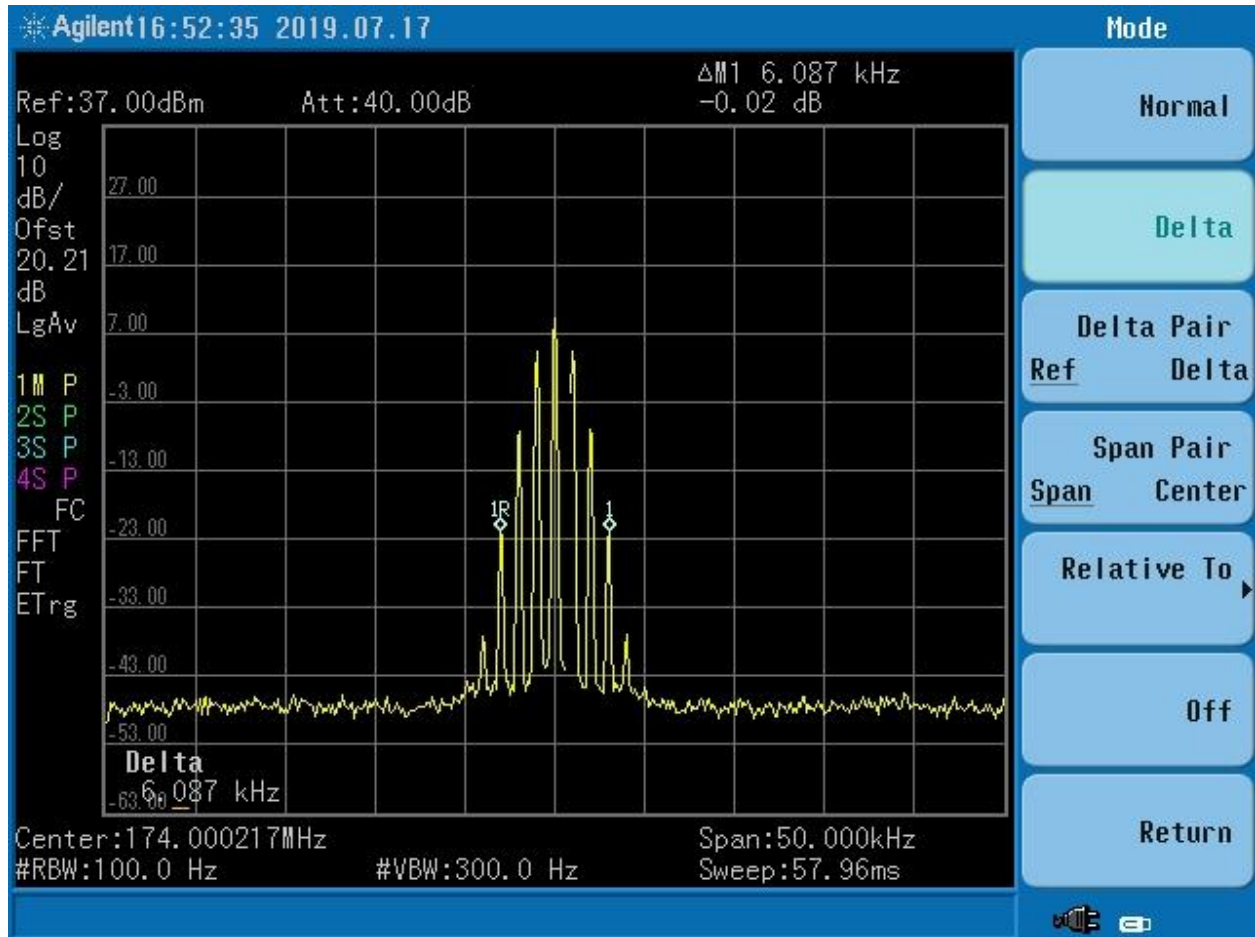


Figure 42. Input 174 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

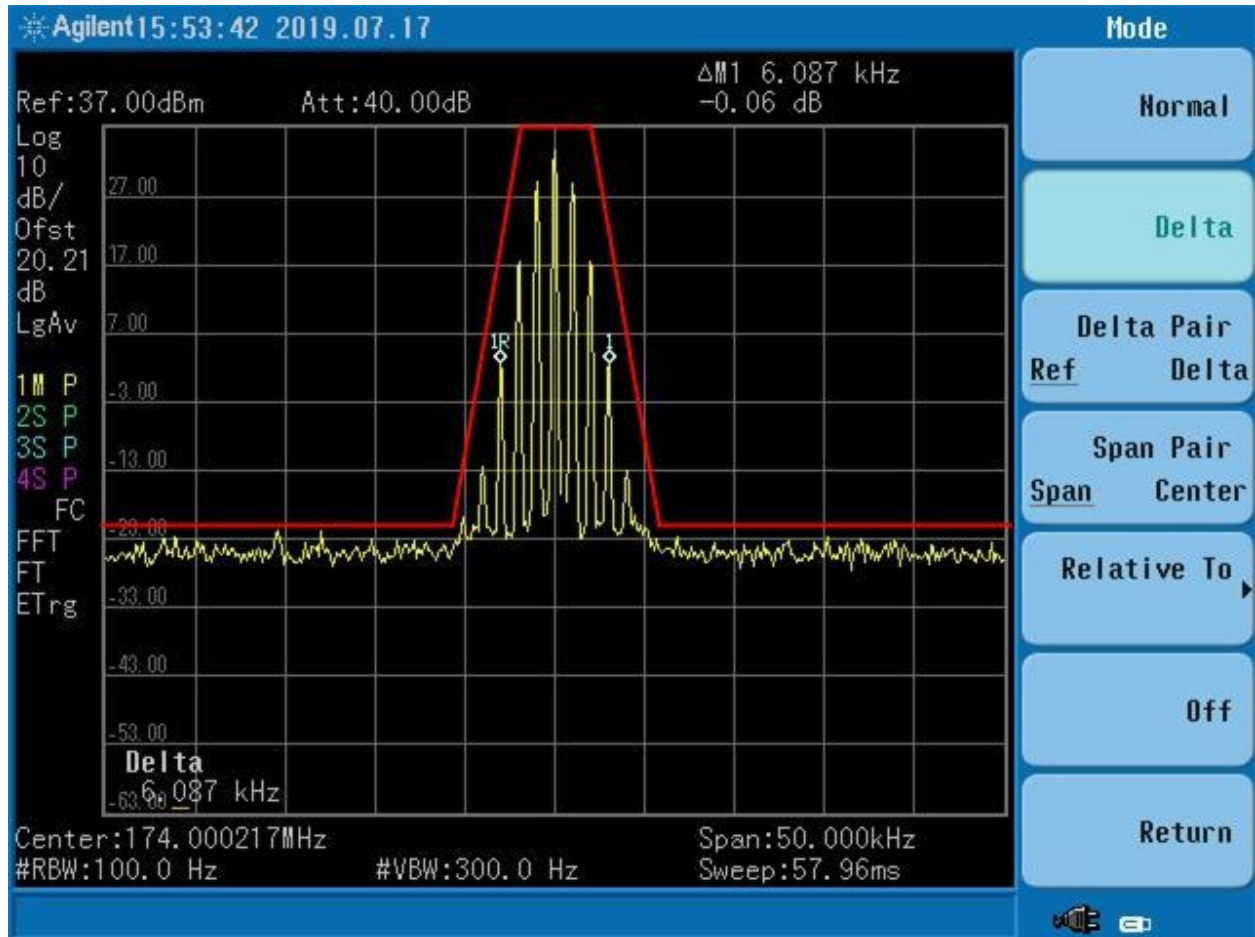


Figure 43. 174 MHz @ 6.25 kHz, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001


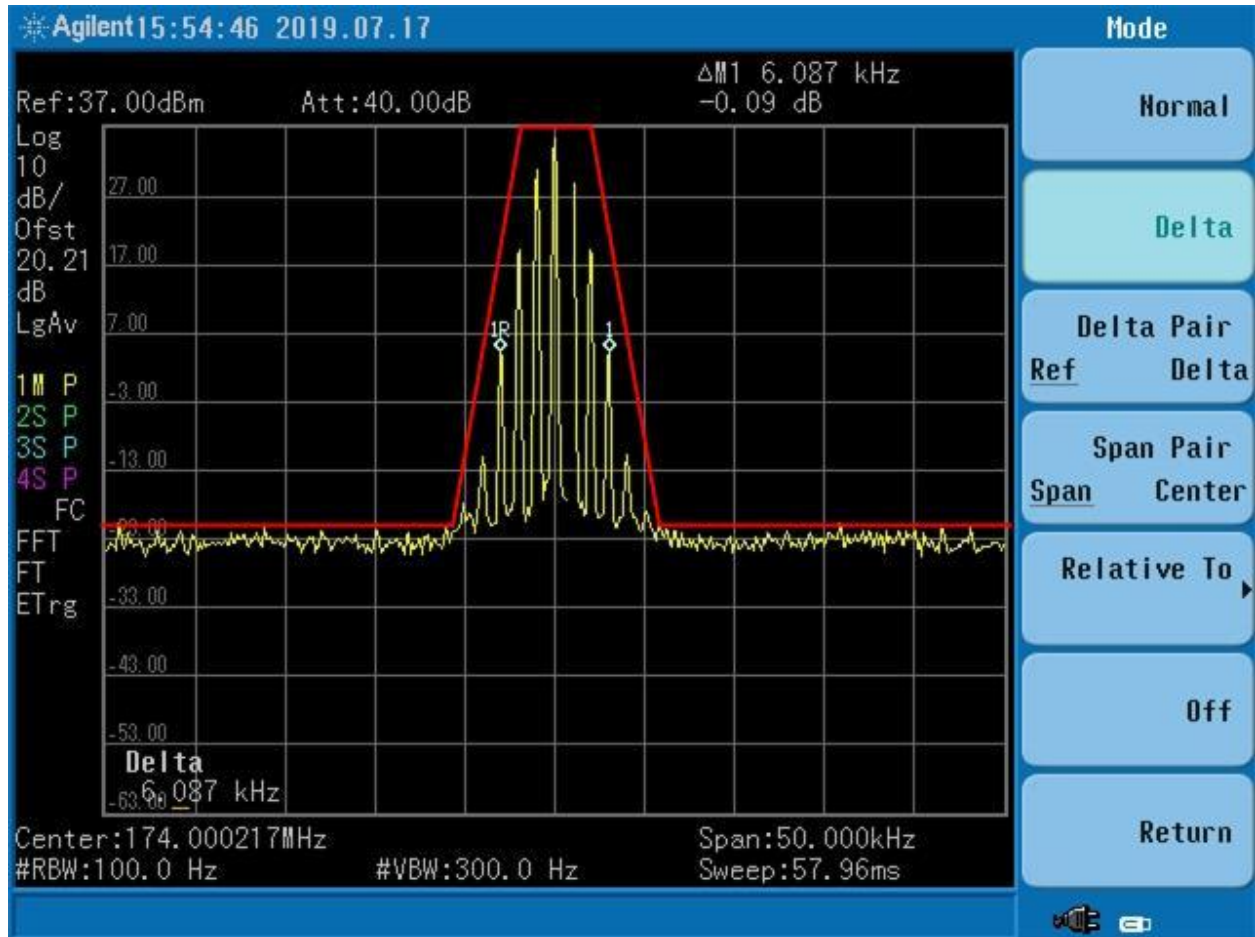


Figure 44. 174 MHz @ 6.25 kHz + 3.0 dB, Mask E

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

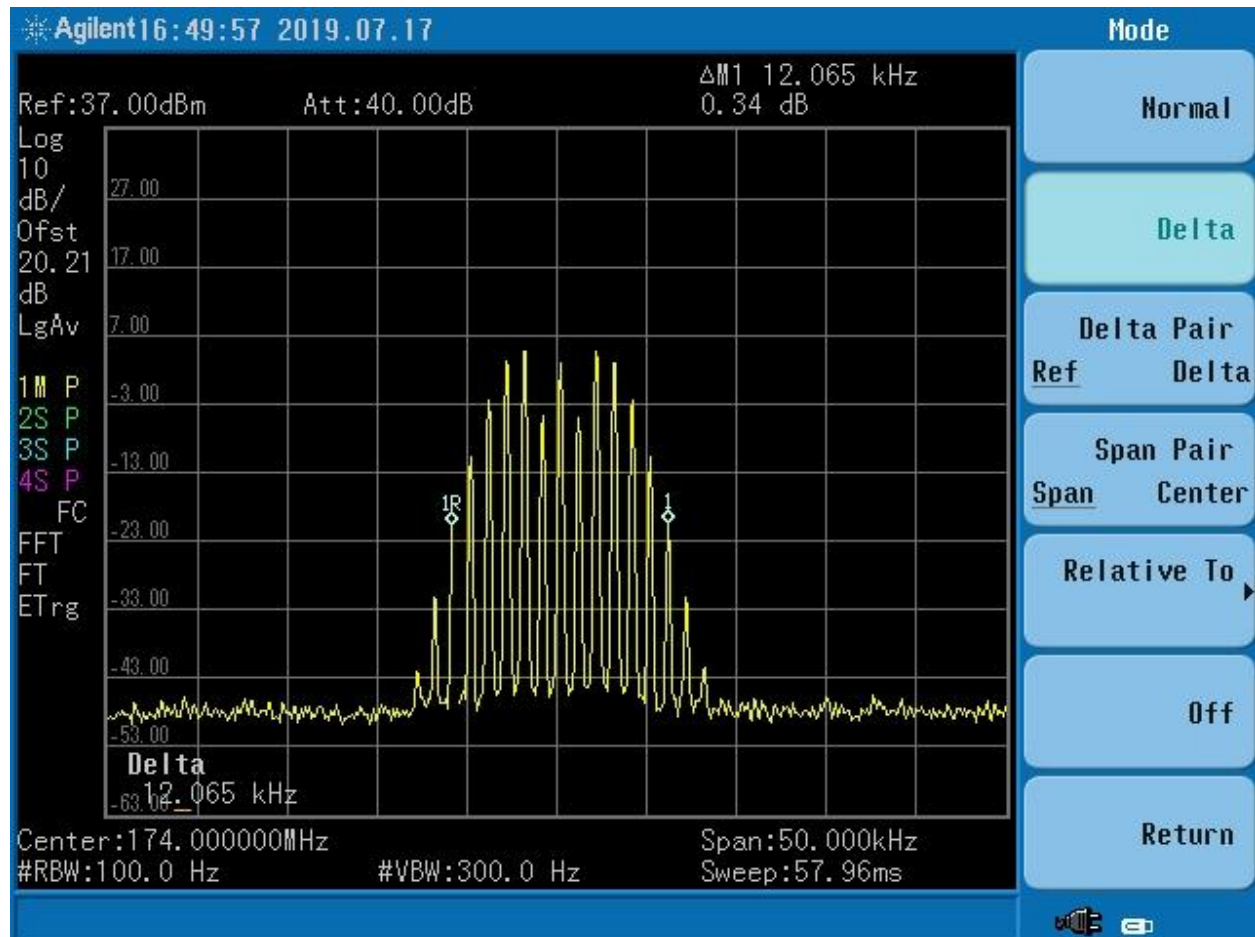

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

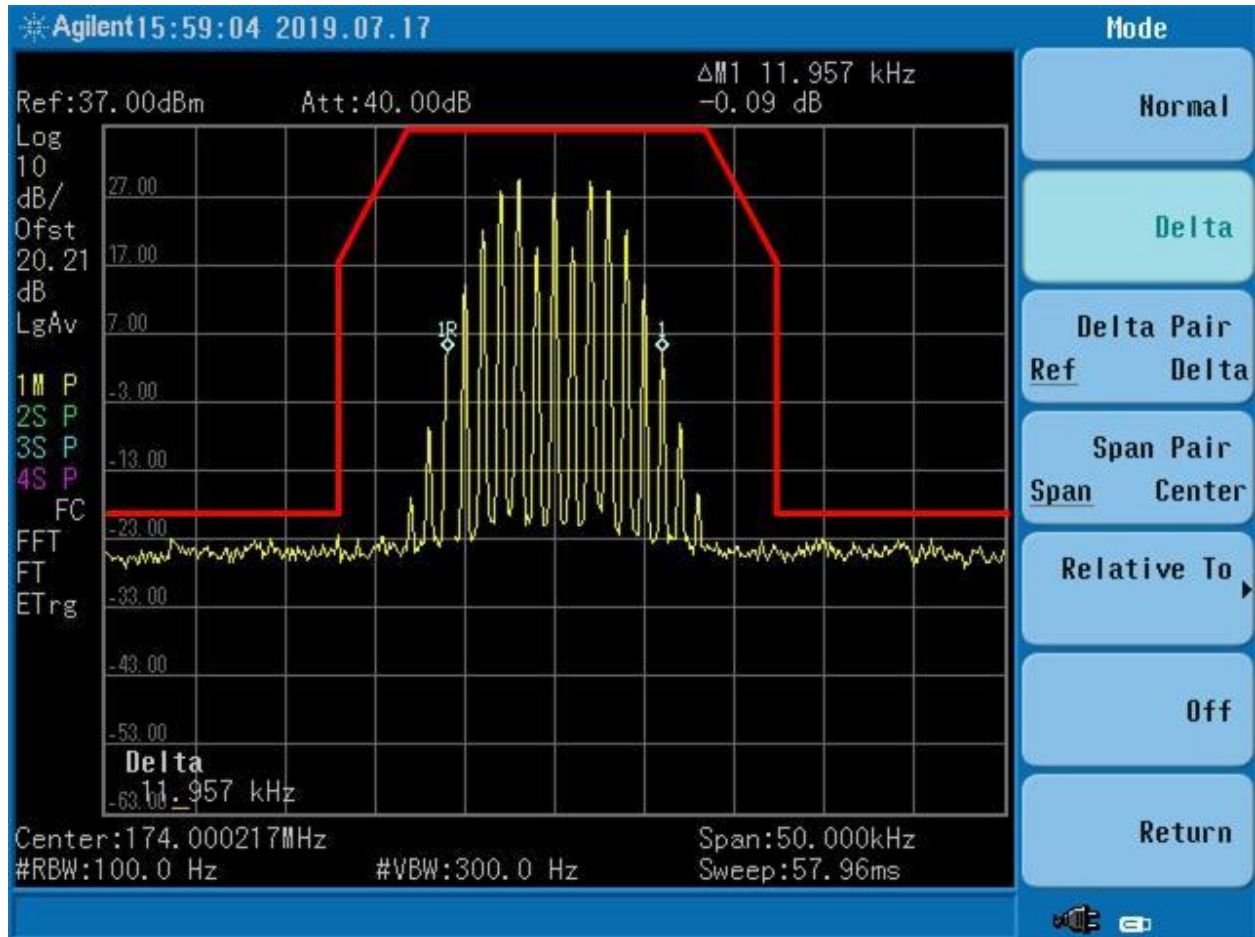


Figure 46. 174 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

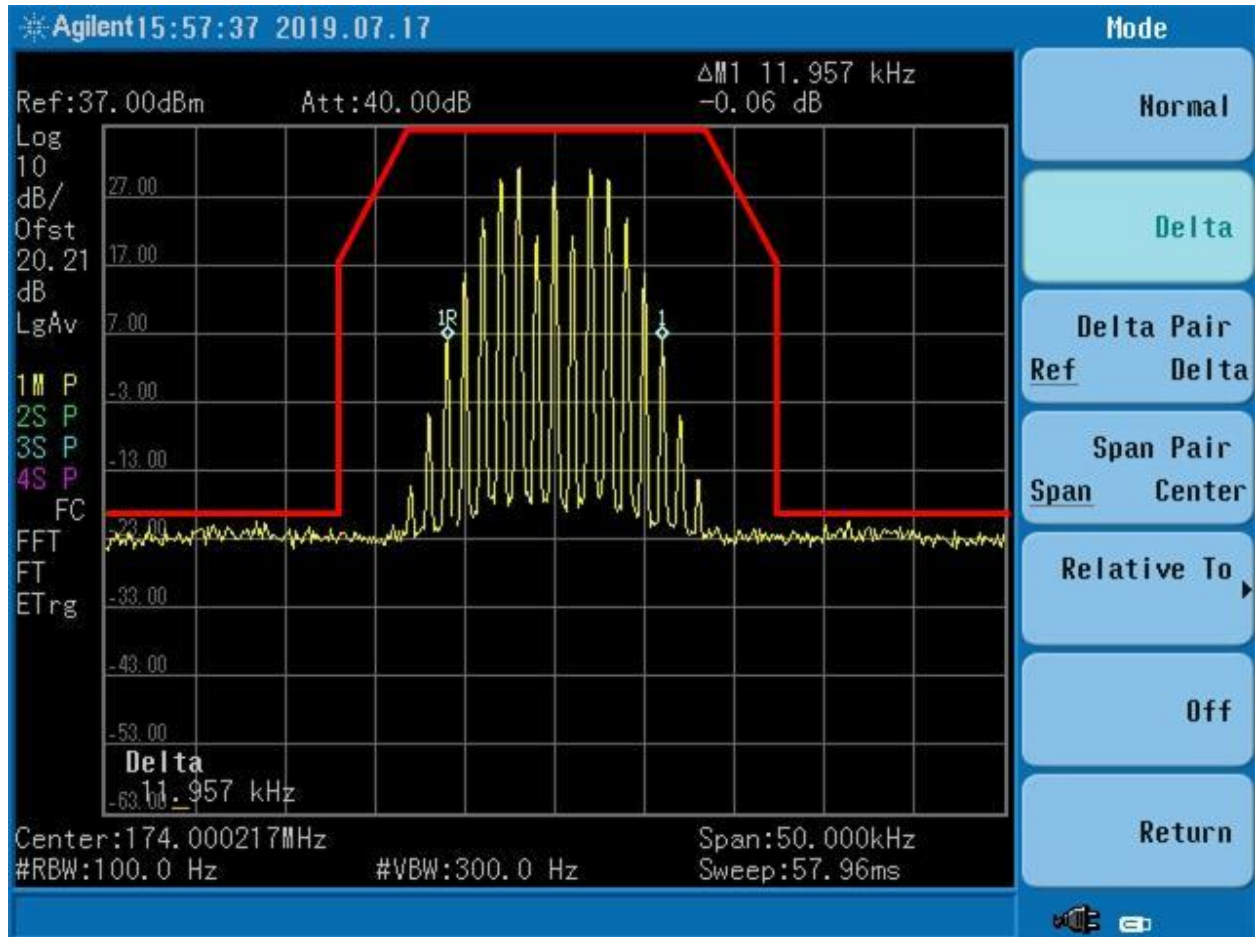


Figure 47. 174 MHz @ 12.5 kHz + 3.0 dB, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

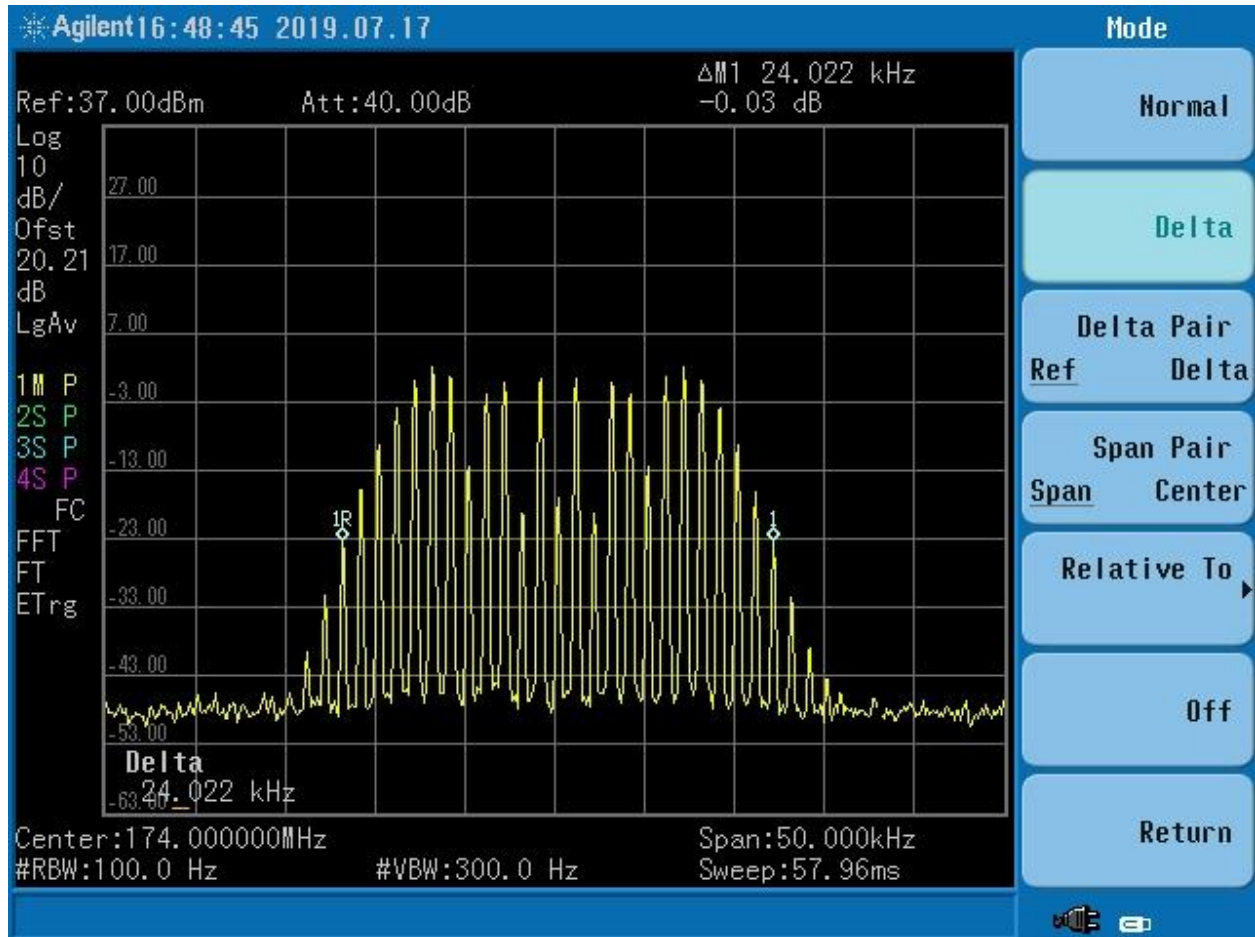


Figure 48. Input 174 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

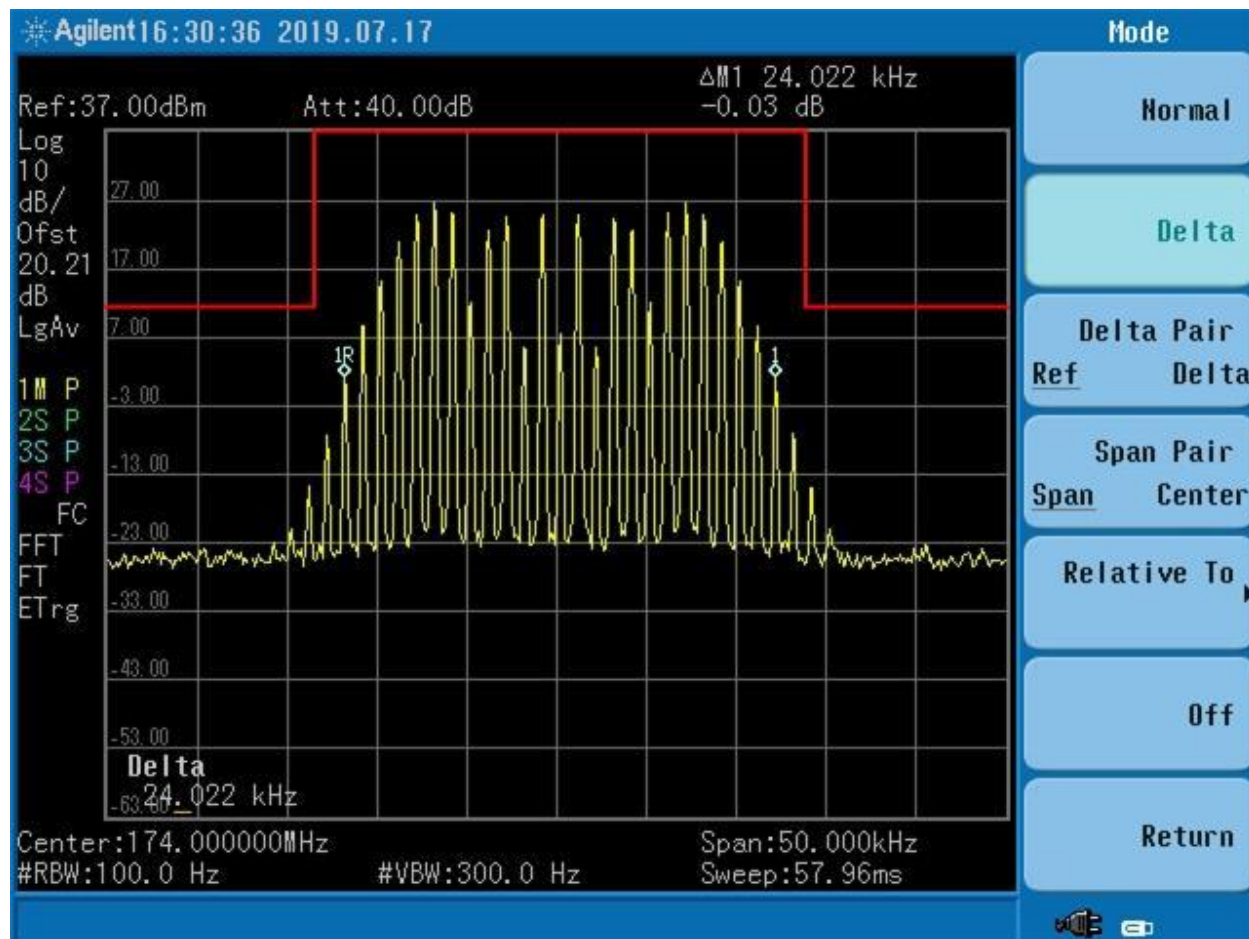


Figure 49. 174 MHz @ 25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

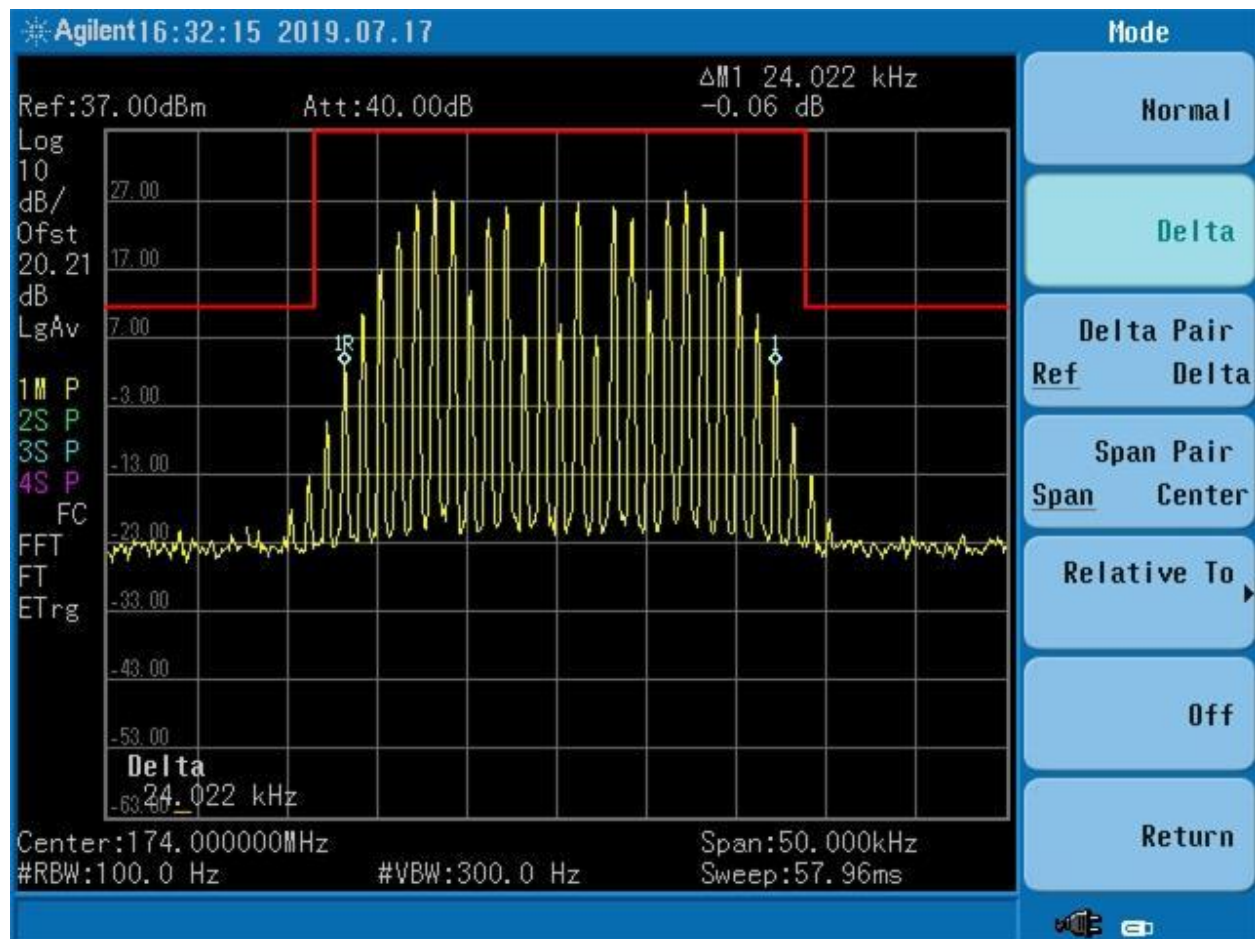


Figure 50. 174 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

2.11.2 UHF Channels

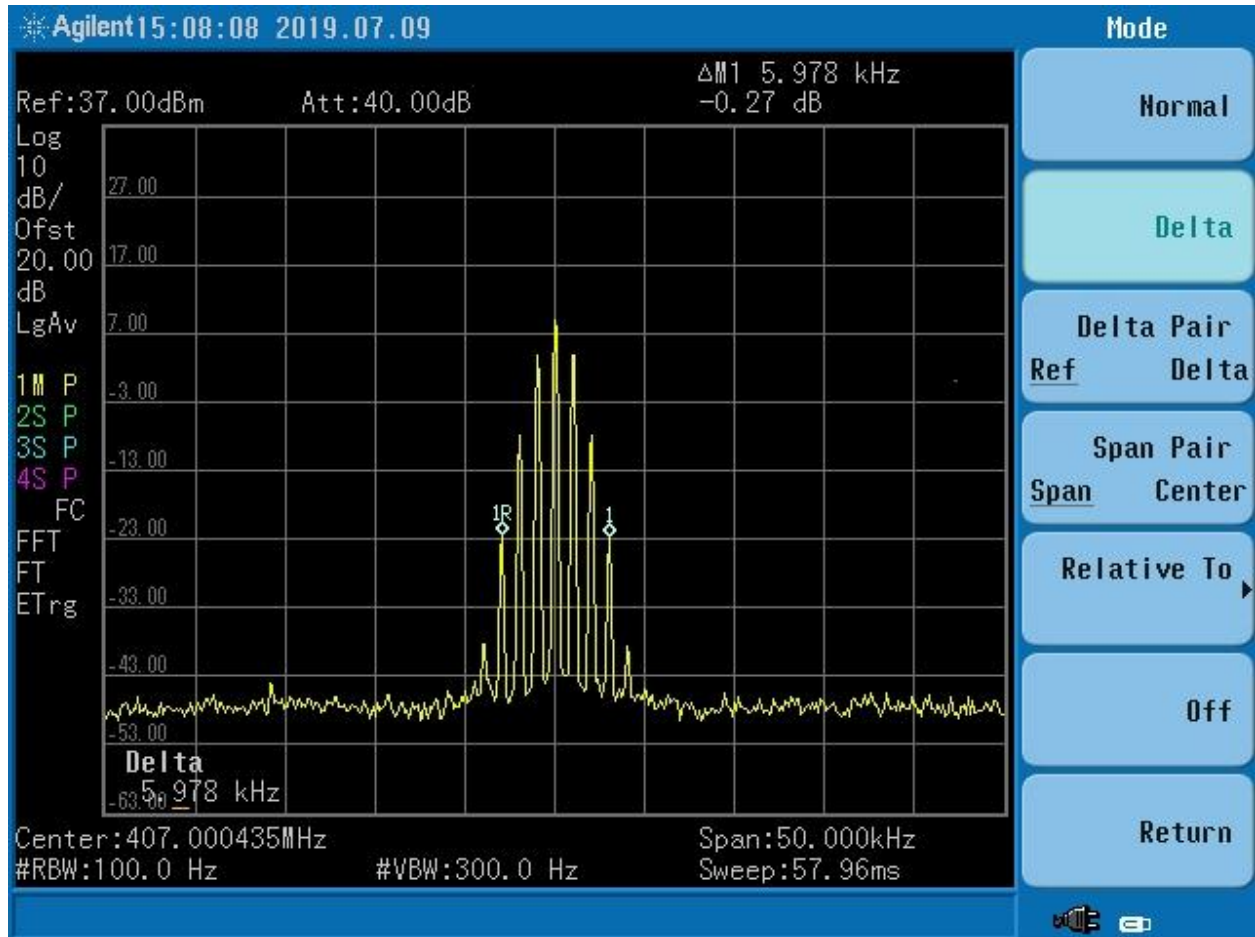


Figure 51. Input 407 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

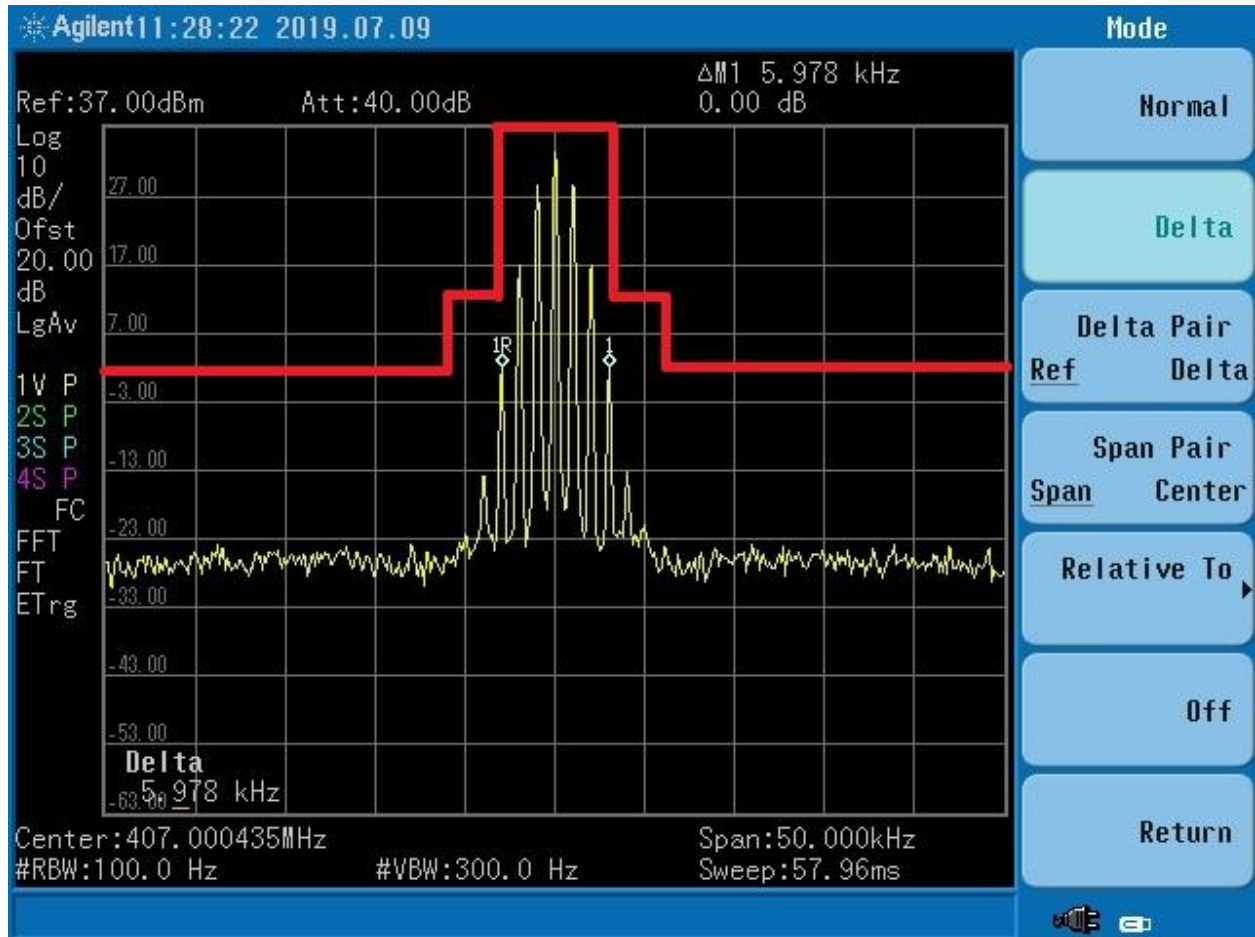


Figure 52. 407 MHz @ 6.25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

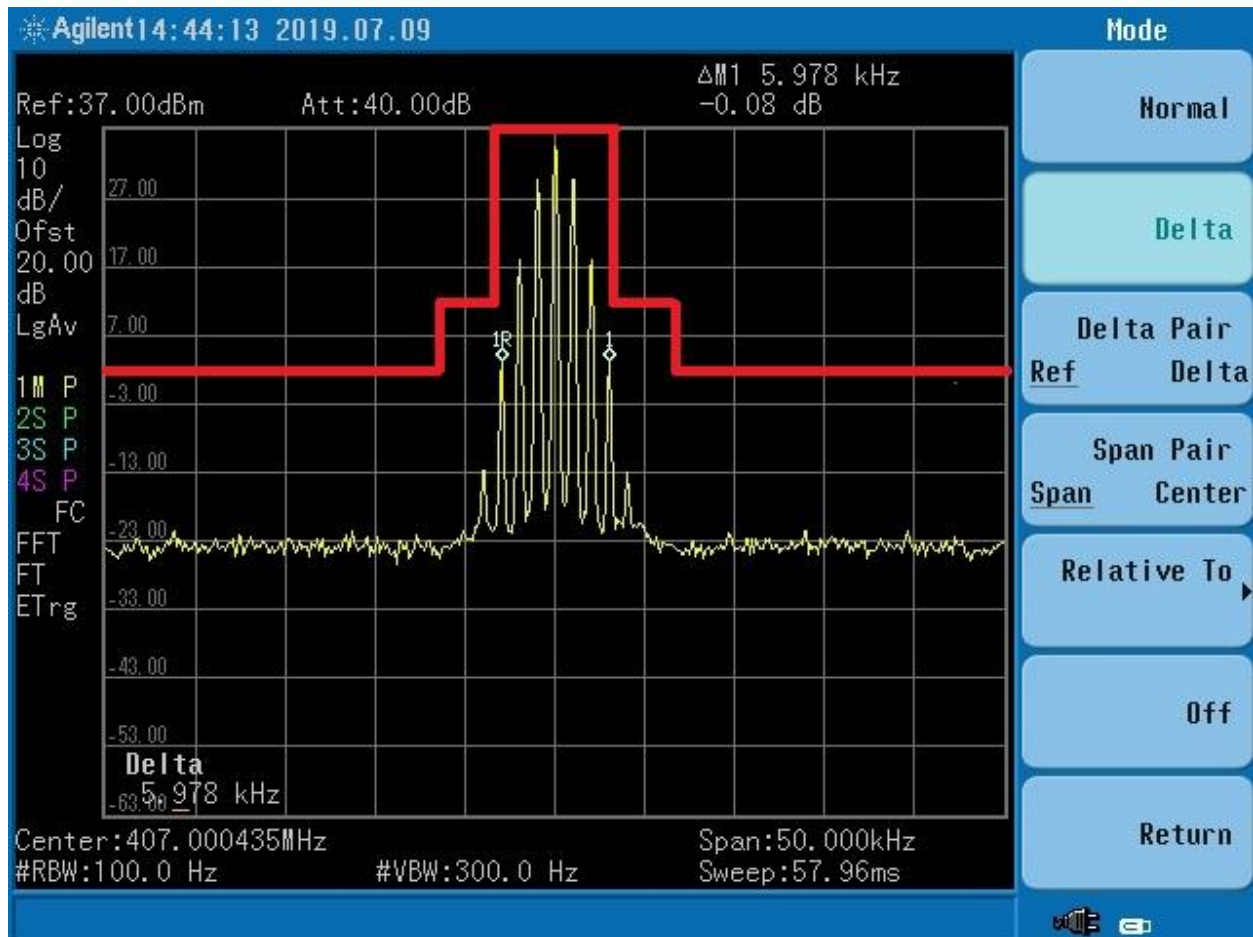


Figure 53. 407 MHz @ 6.25 kHz + 3 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

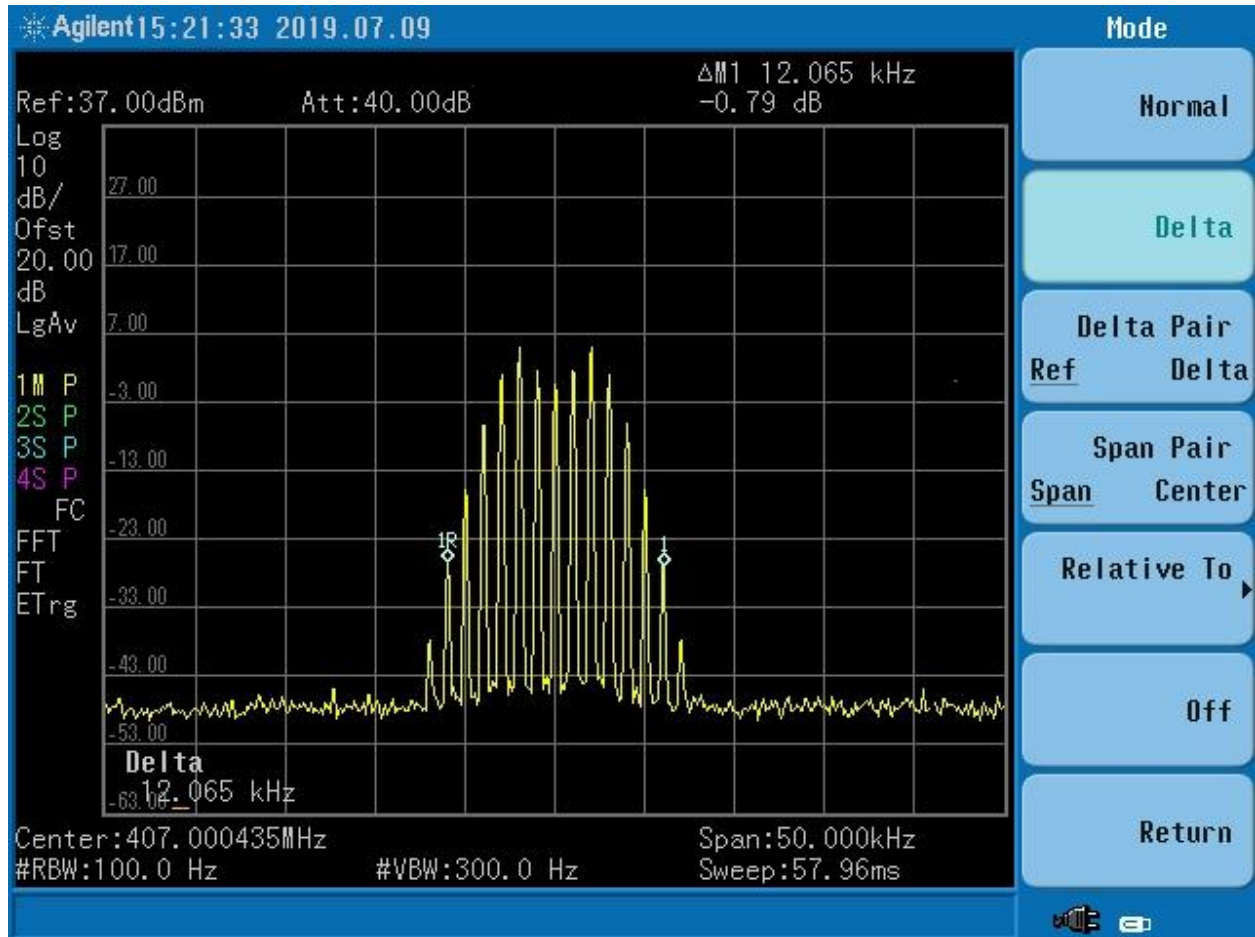


Figure 54. Input 407 MHz @ 12.5 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

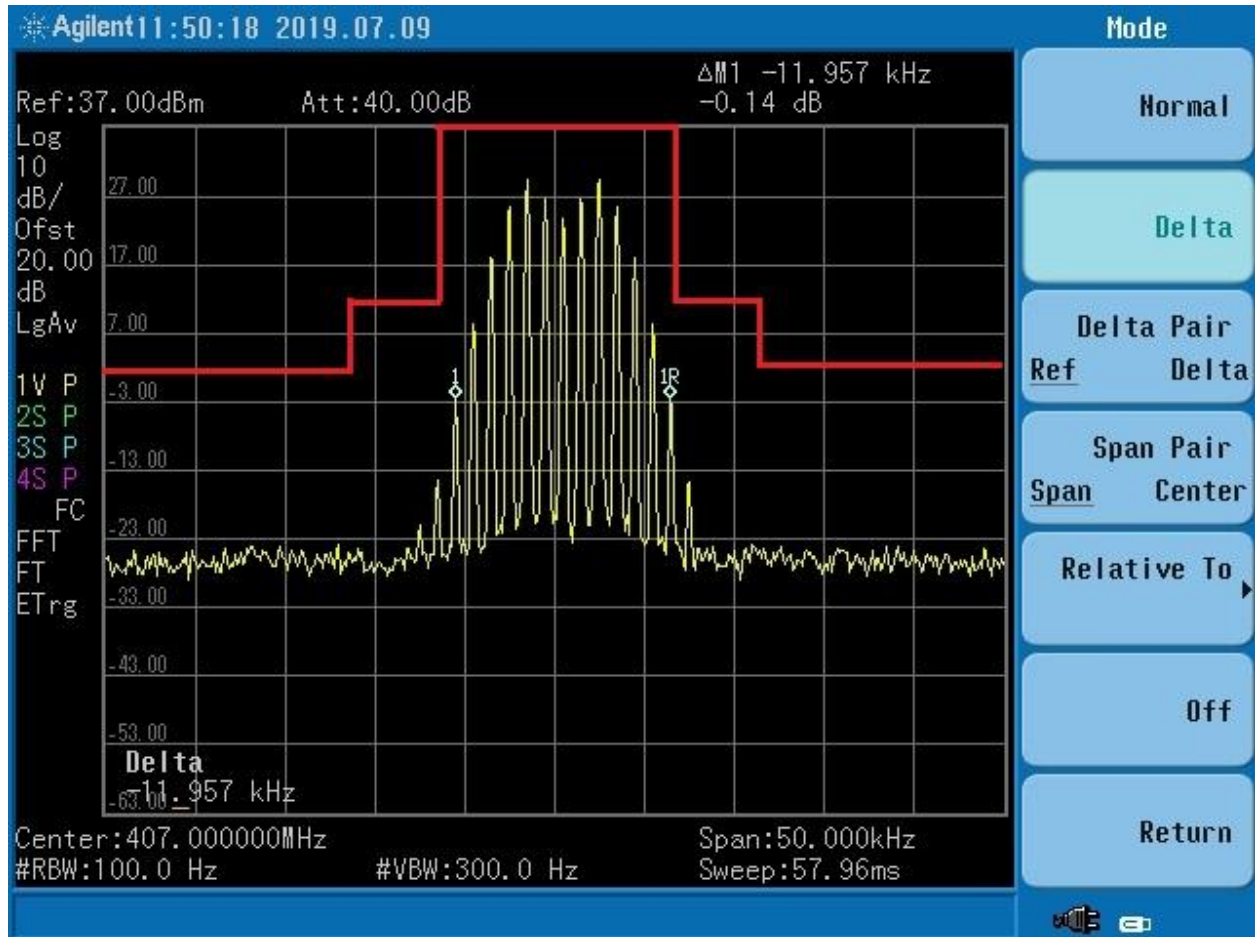


Figure 55. 407 MHz @ 12.5 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

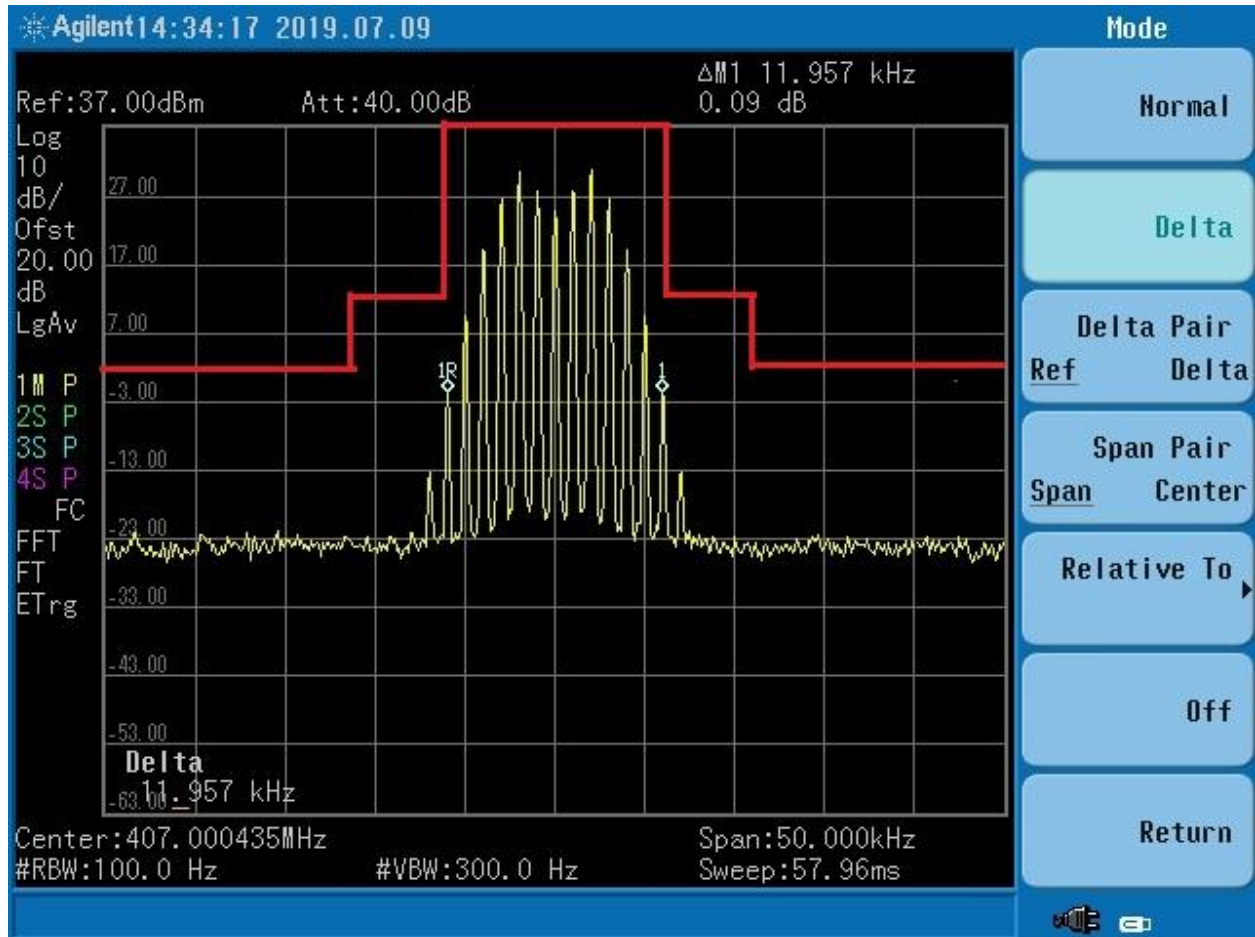


Figure 56. 407 MHz @ 12.5 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

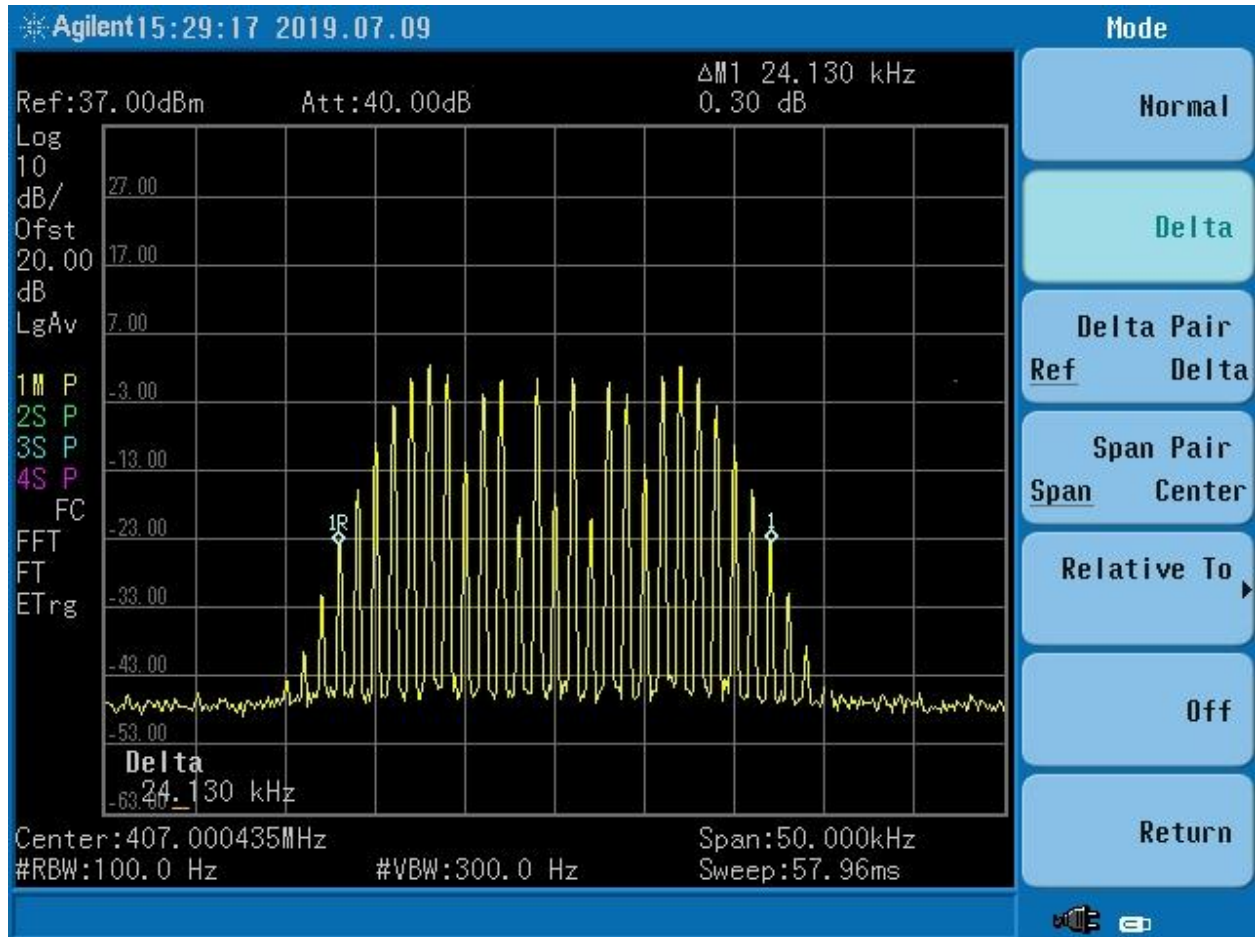


Figure 57. Input 407 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

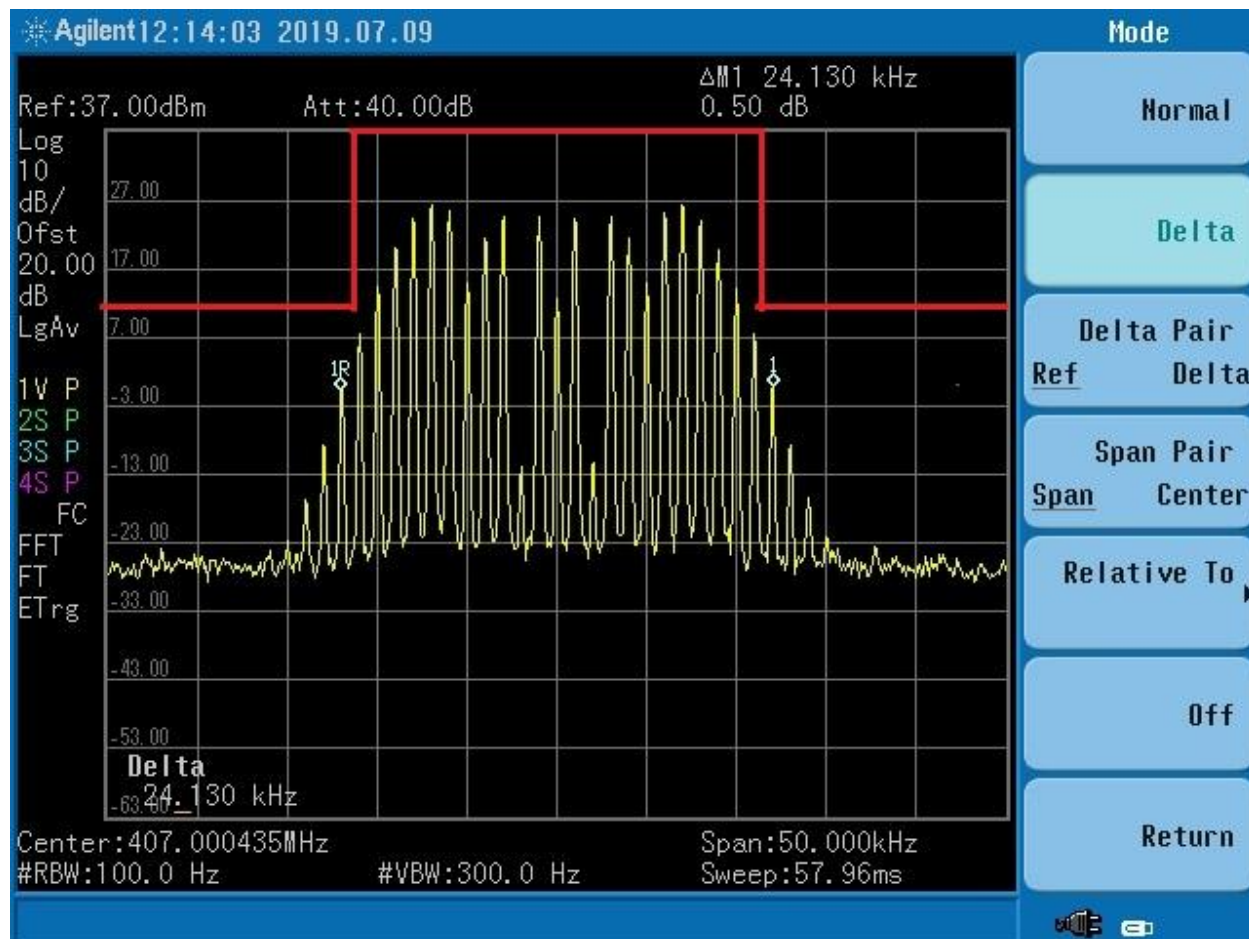


Figure 58. 407 MHz @ 25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

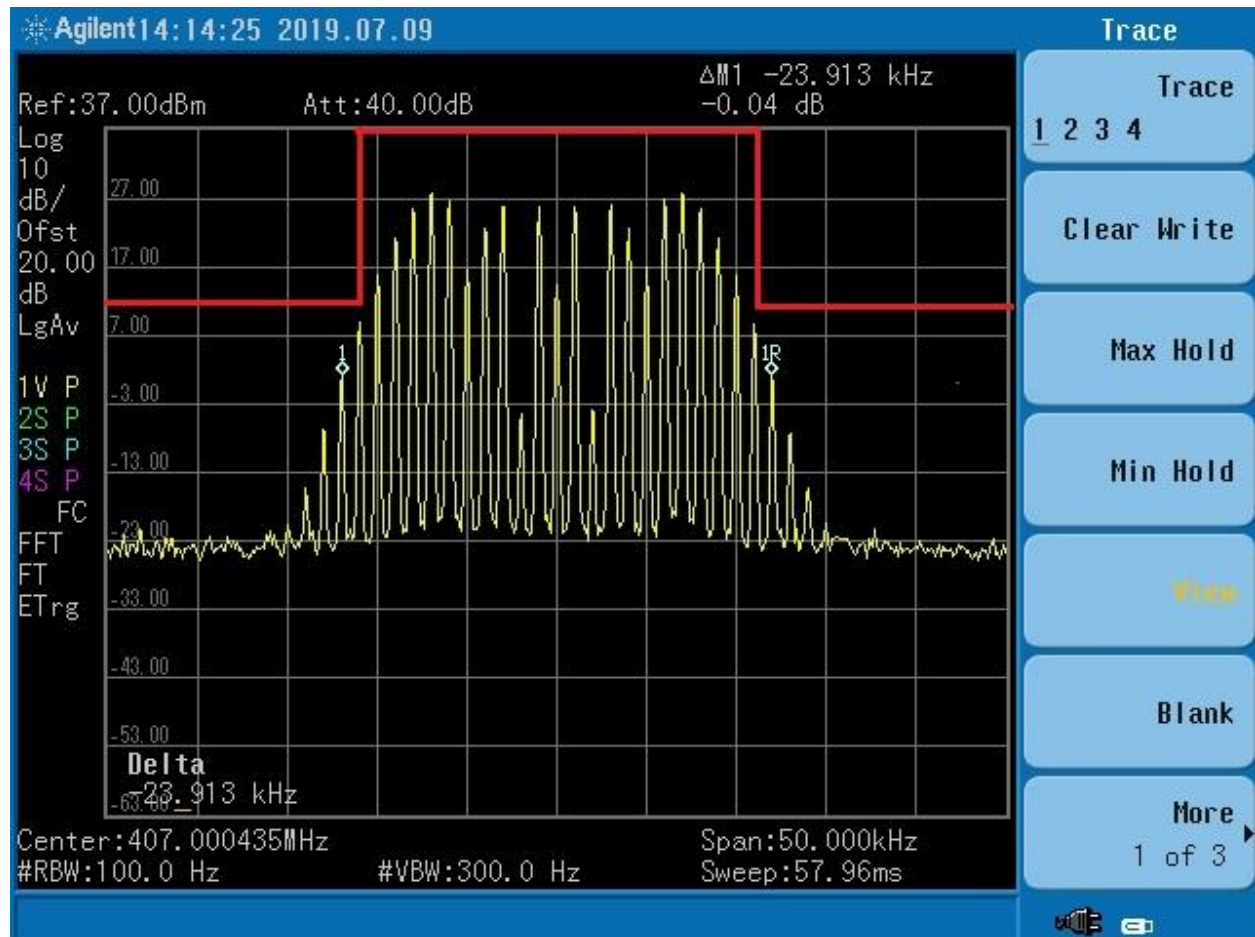


Figure 59. 407 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

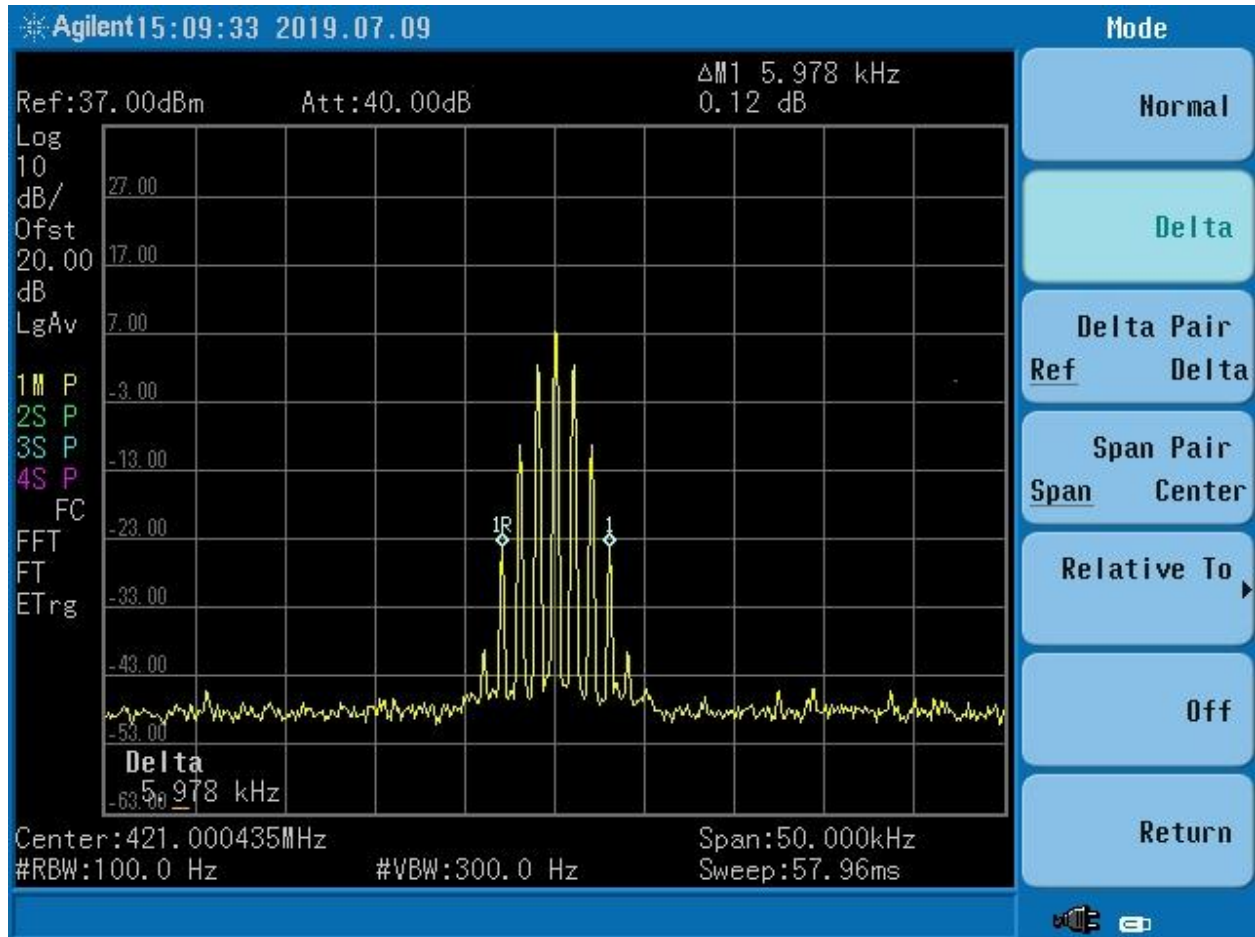


Figure 60. Input 421 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001


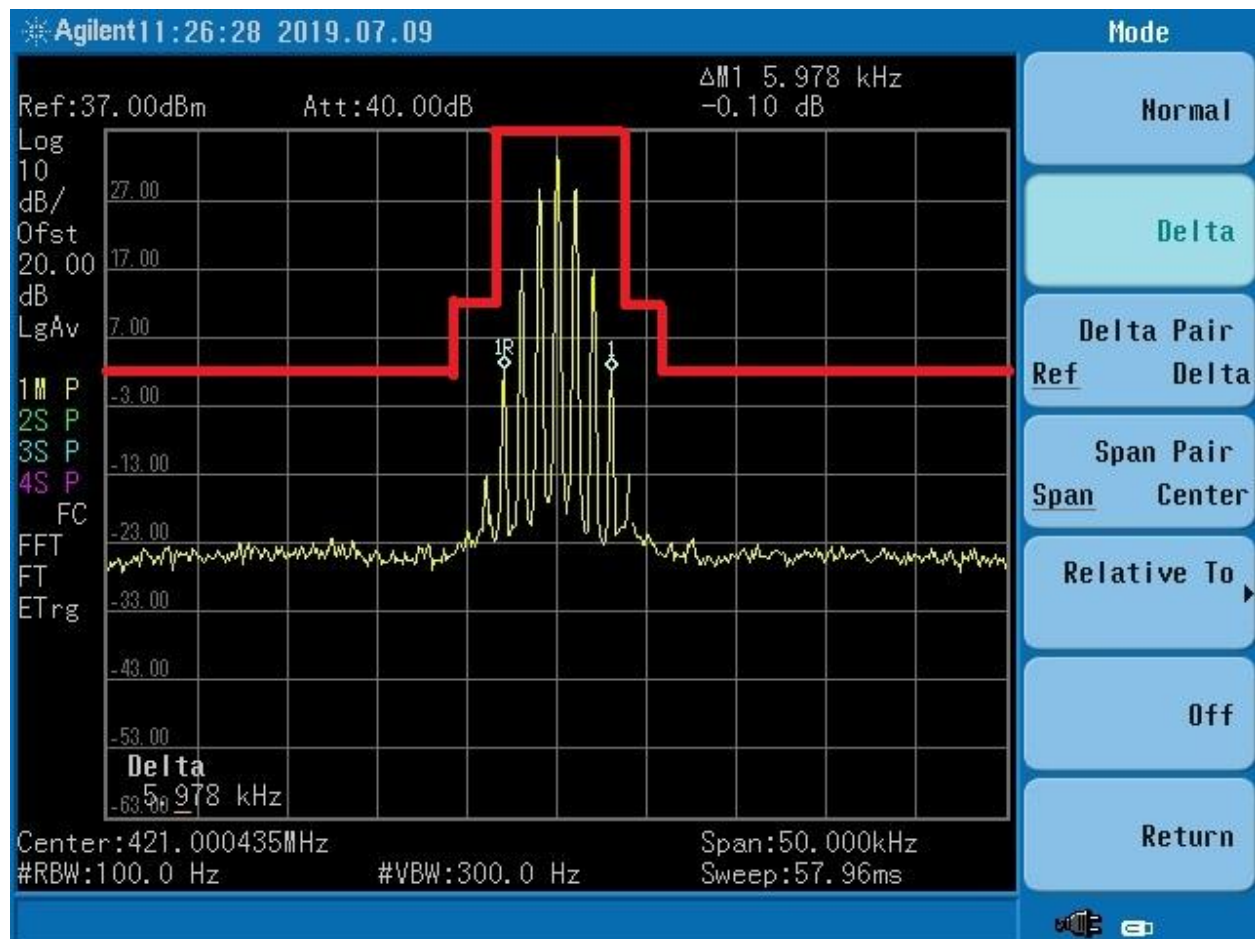


Figure 61. 421 MHz @ 6.25 kHz, Mask B

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

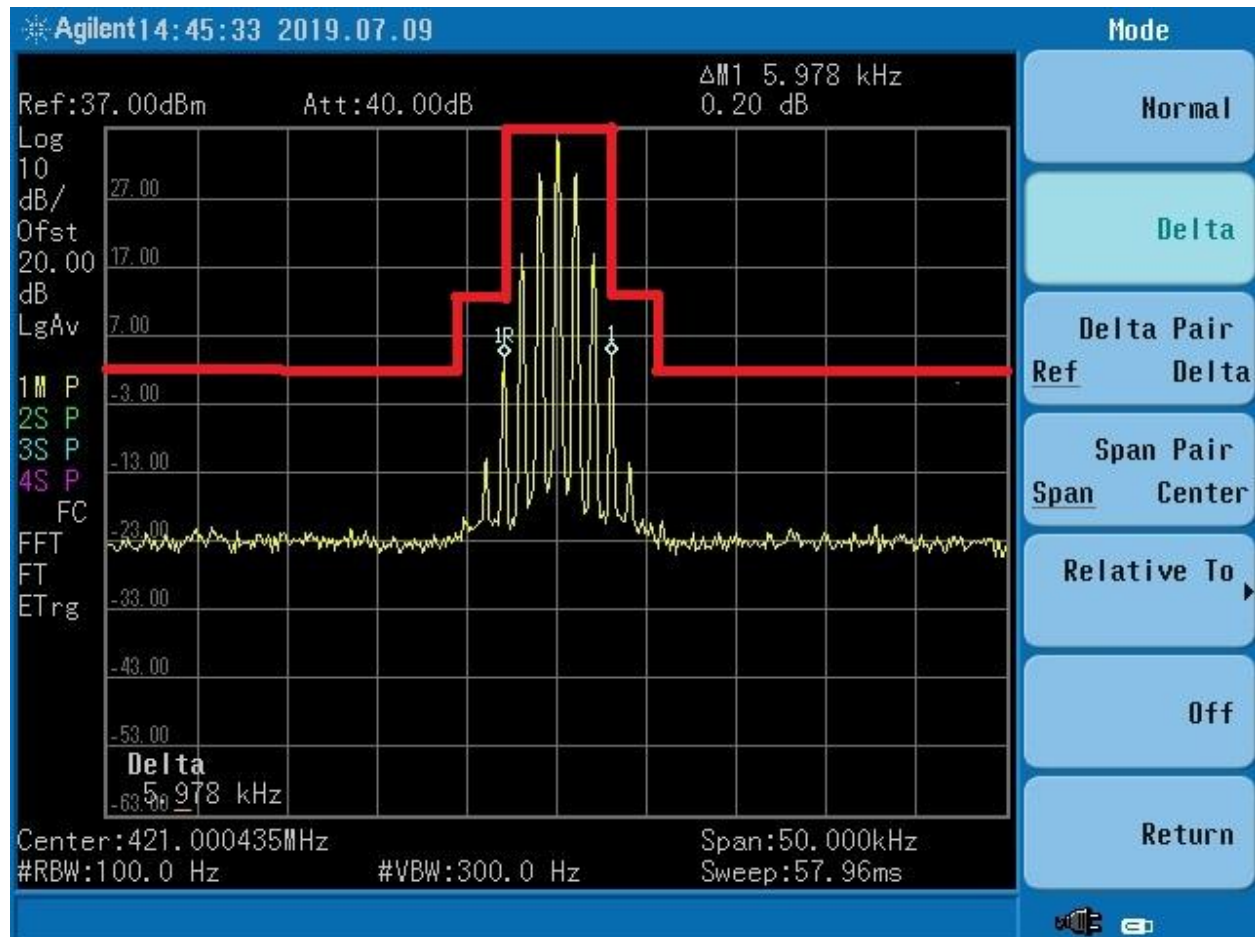

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

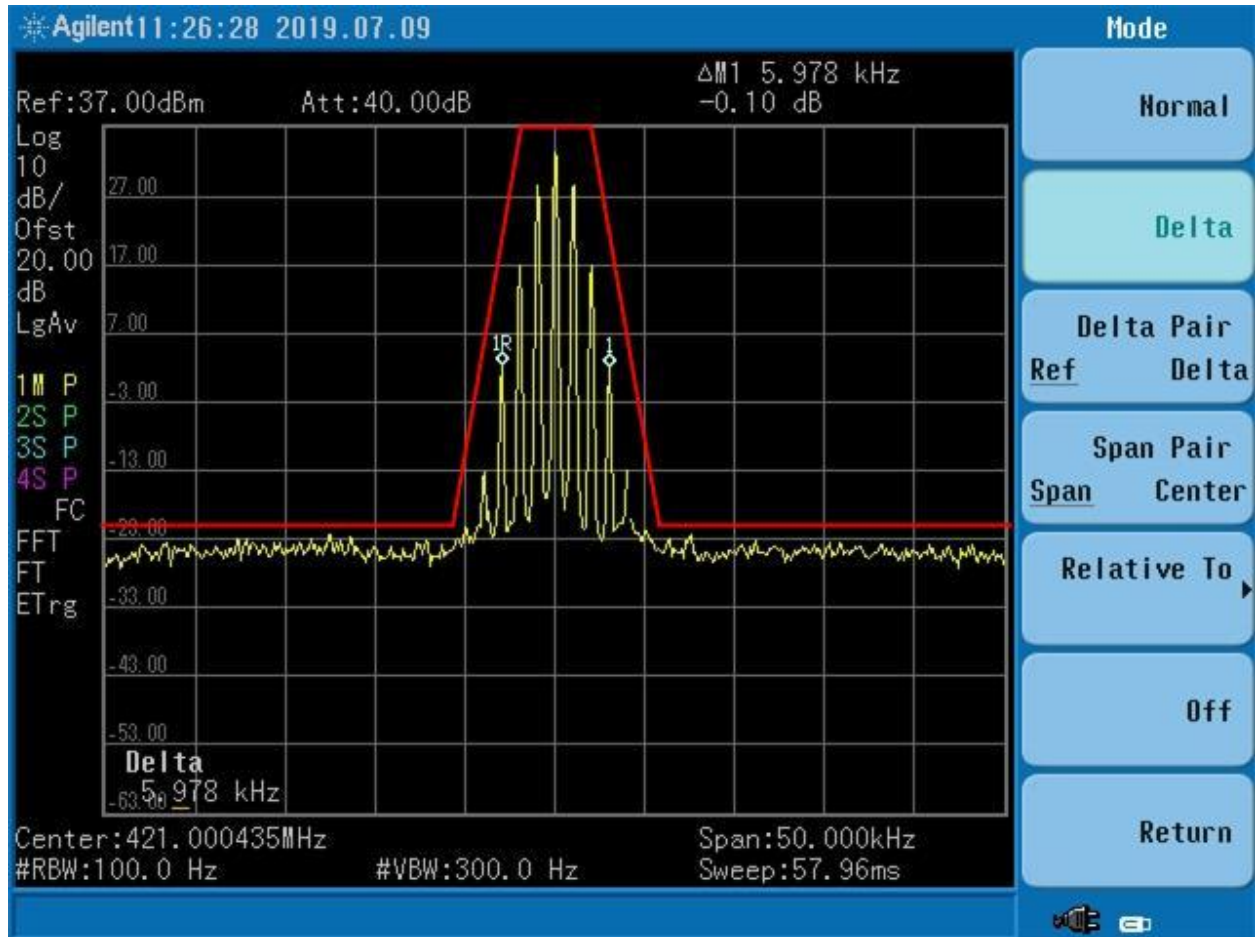


Figure 63. 421 MHz @ 6.25 kHz, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

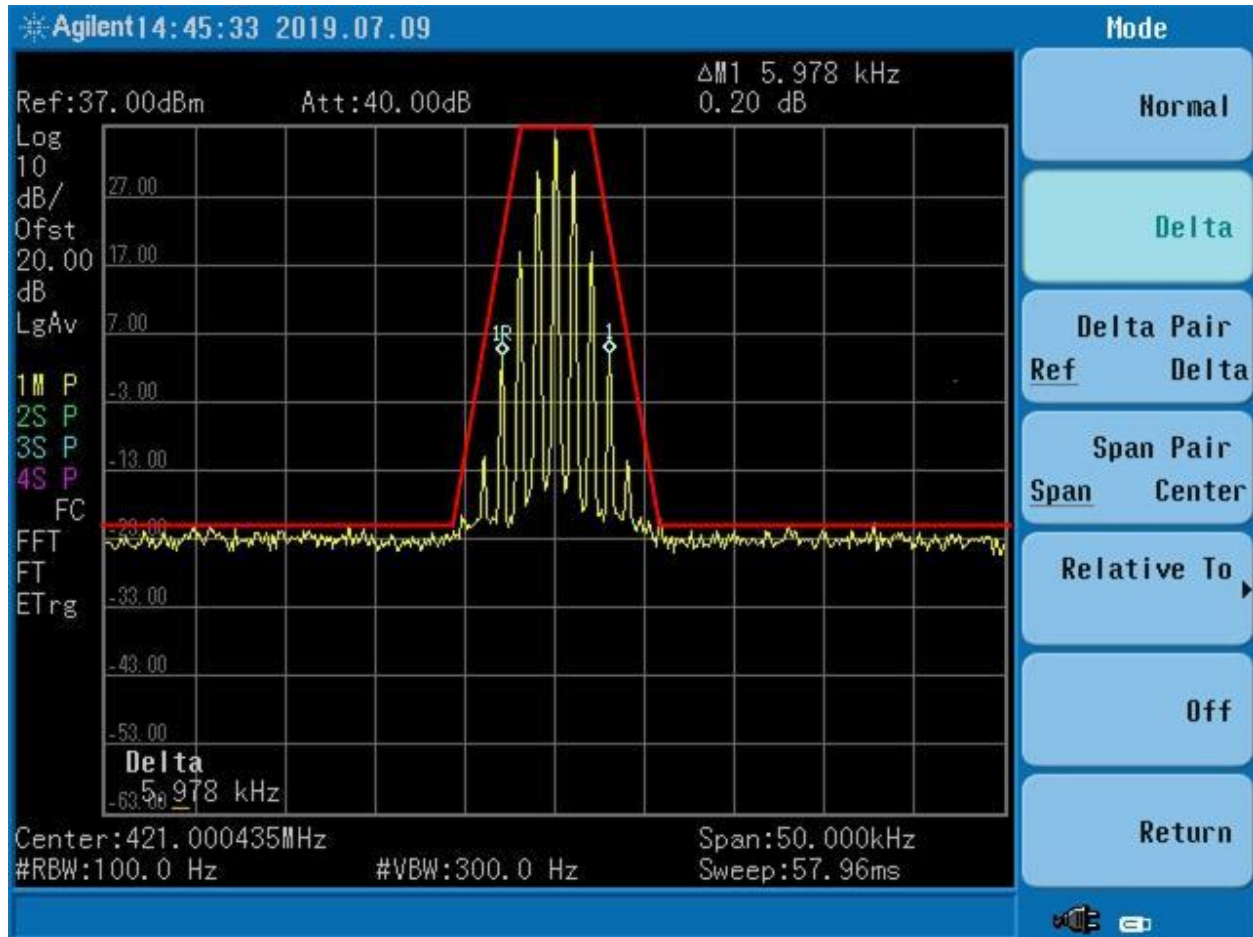


Figure 64. 421 MHz @ 6.25 kHz +3 dB, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

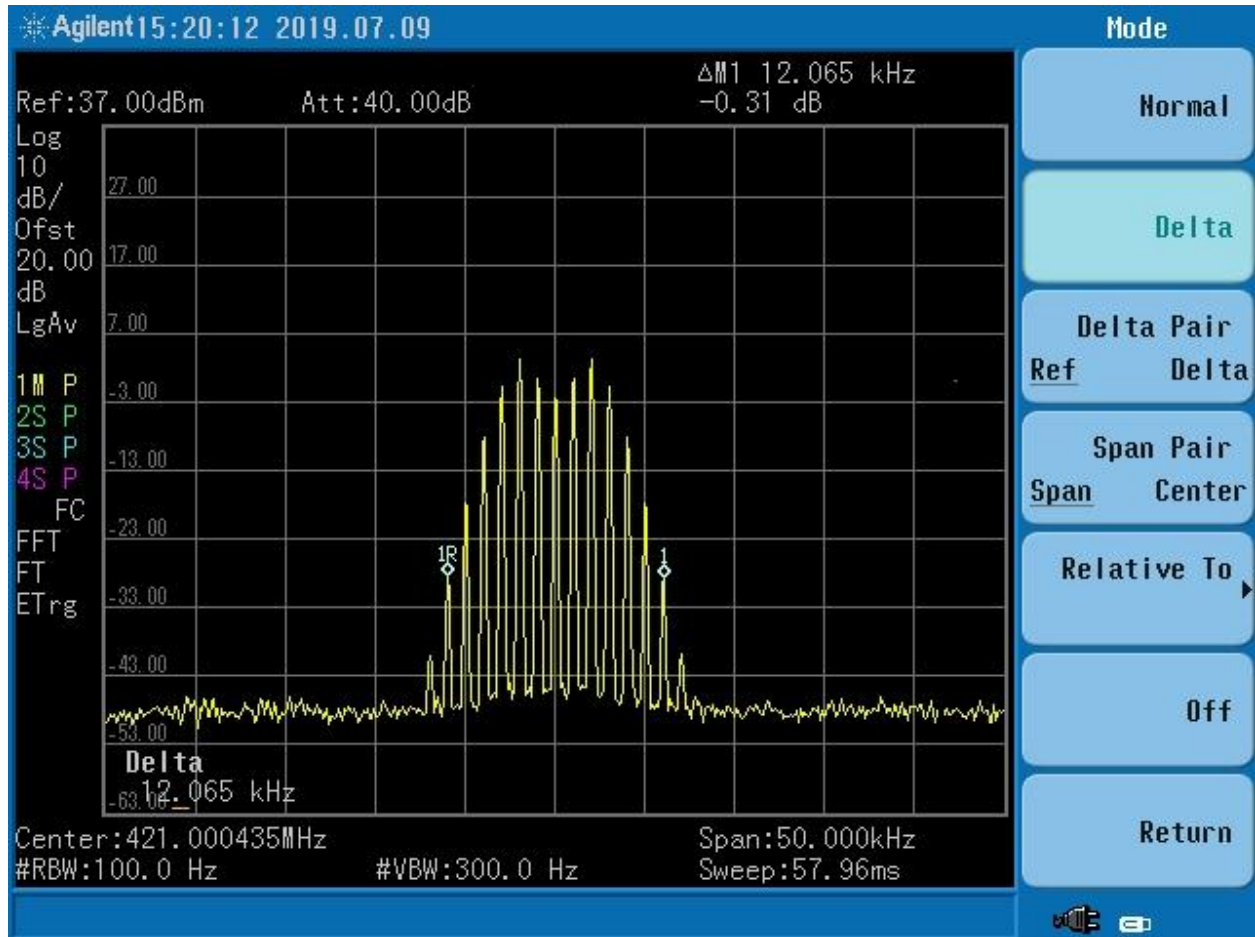


Figure 65. Input 421 MHz @ 12.5 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

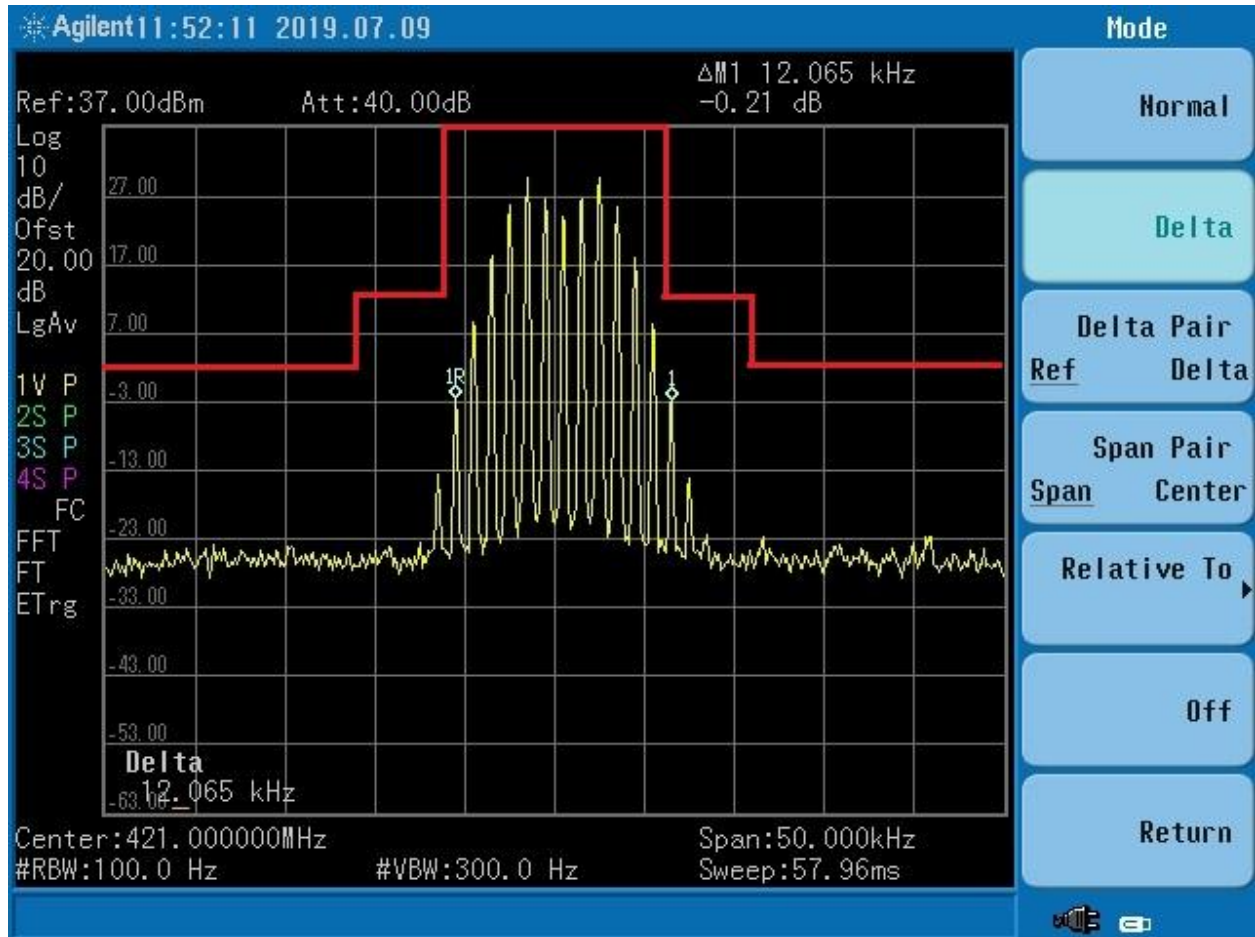


Figure 66. 421 MHz @ 12.5 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

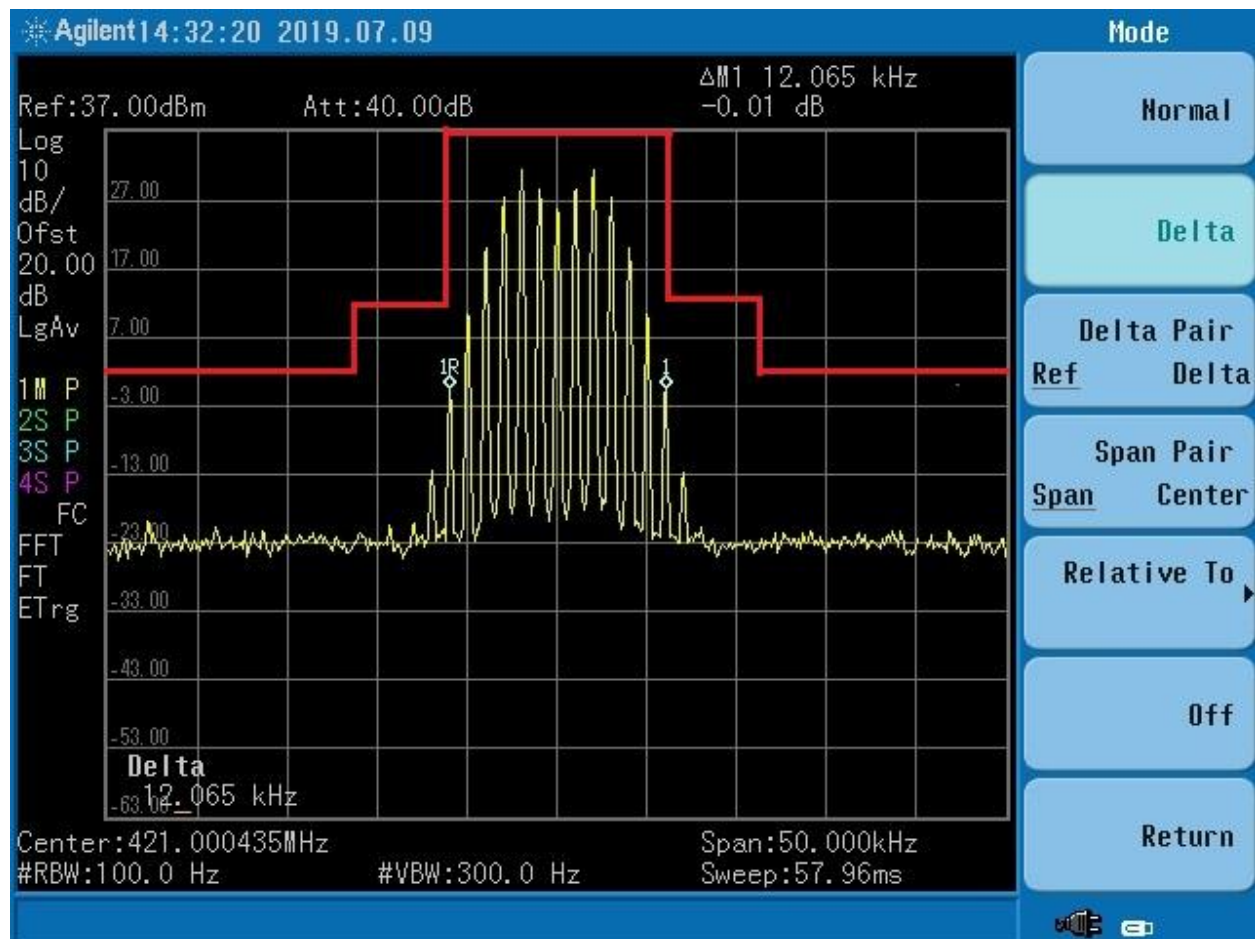


Figure 67. 421 MHz @ 12.5 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

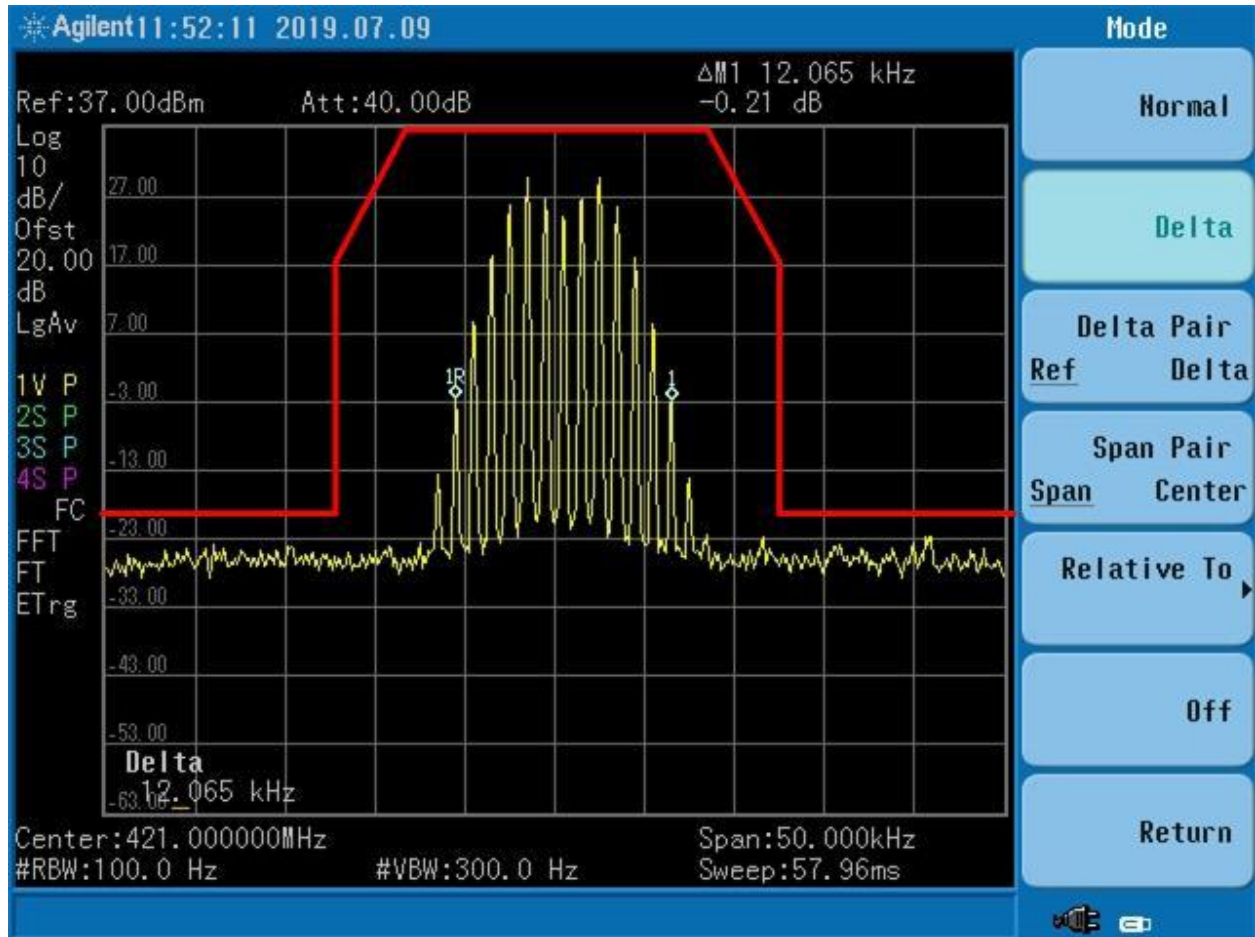


Figure 68. 421 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

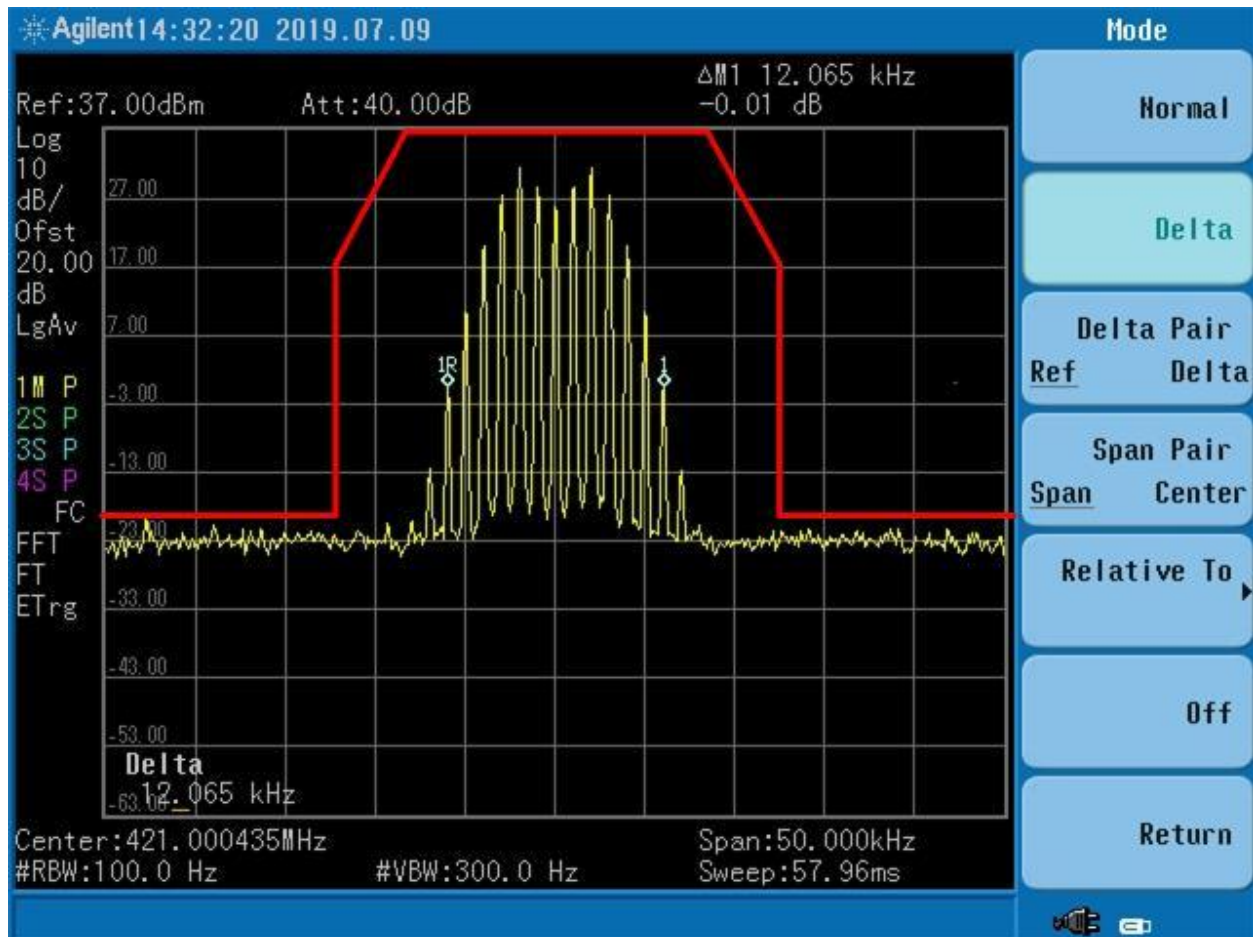


Figure 69. 421 MHz @ 12.5 kHz, +3 dB, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

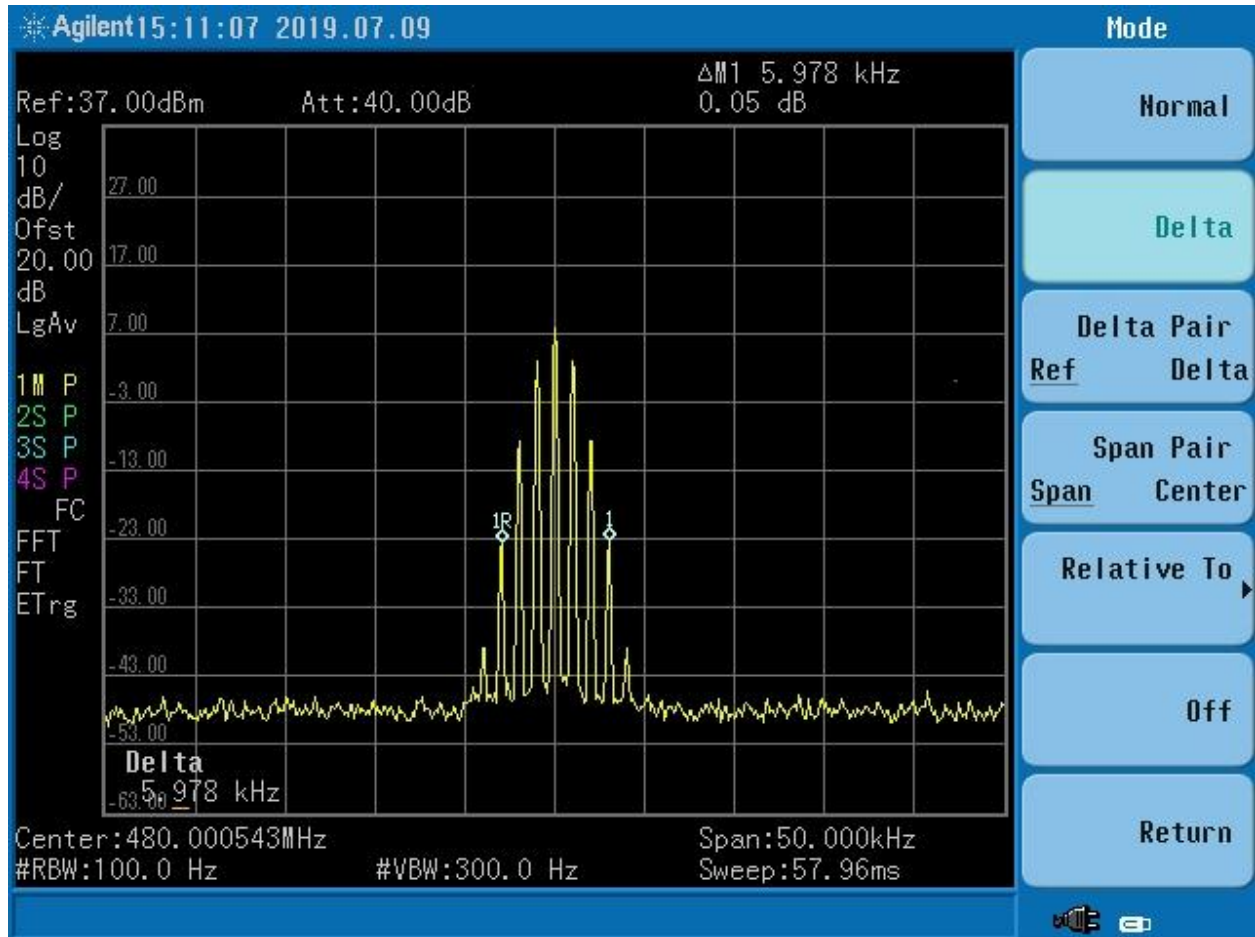


Figure 70. Input 480 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

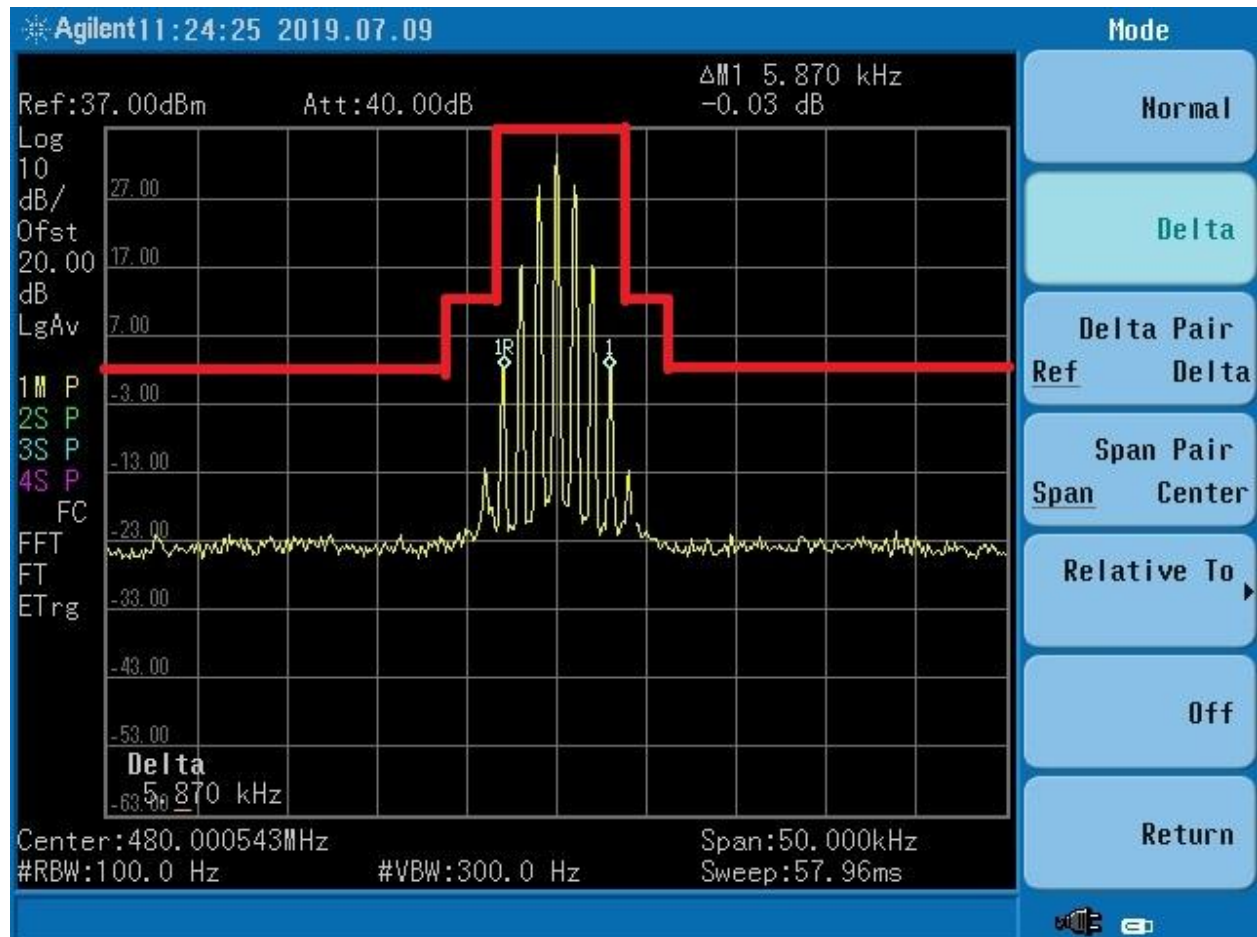


Figure 71. 480 MHz @ 6.25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

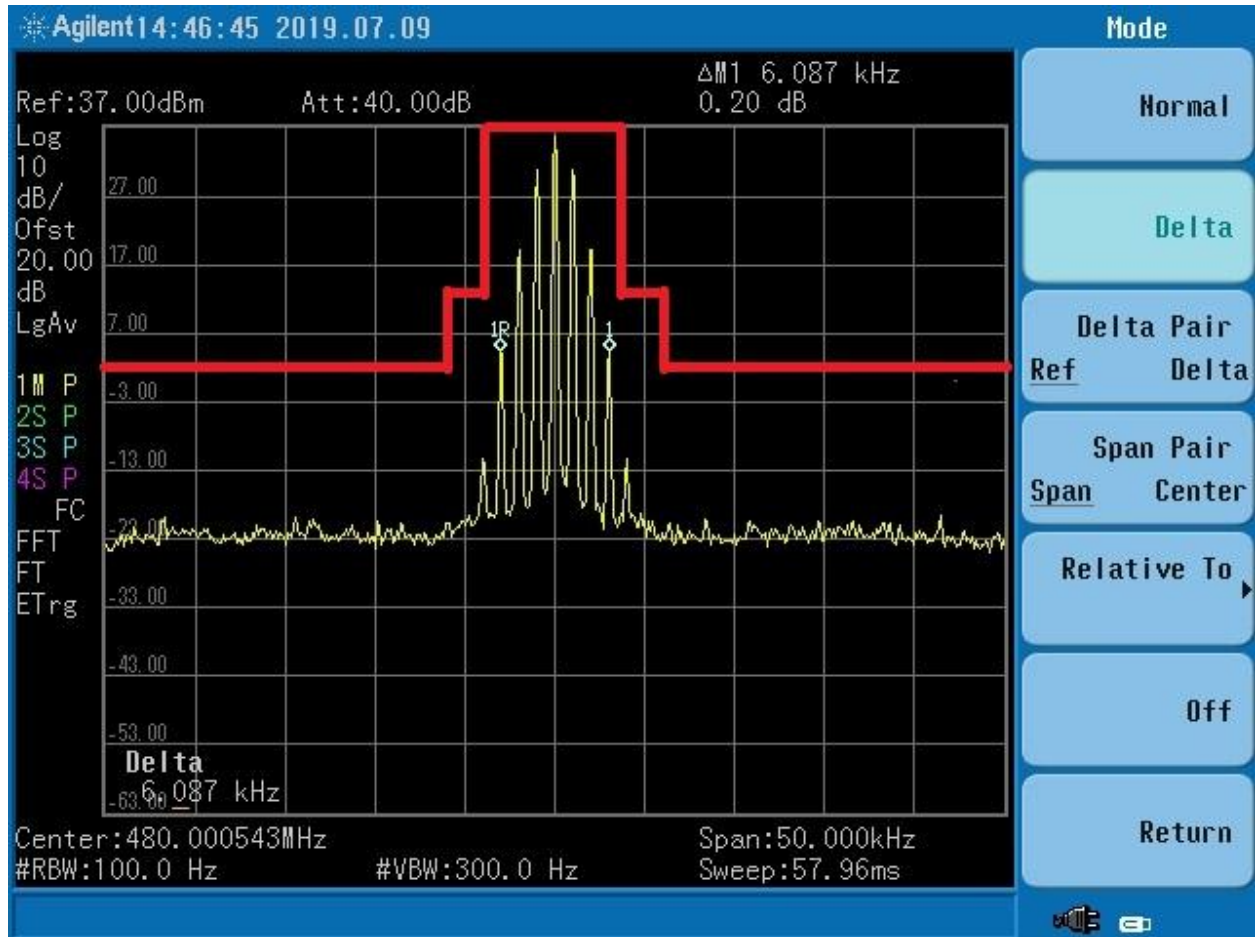


Figure 72. 480 MHz @ 6.25 kHz +3 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001


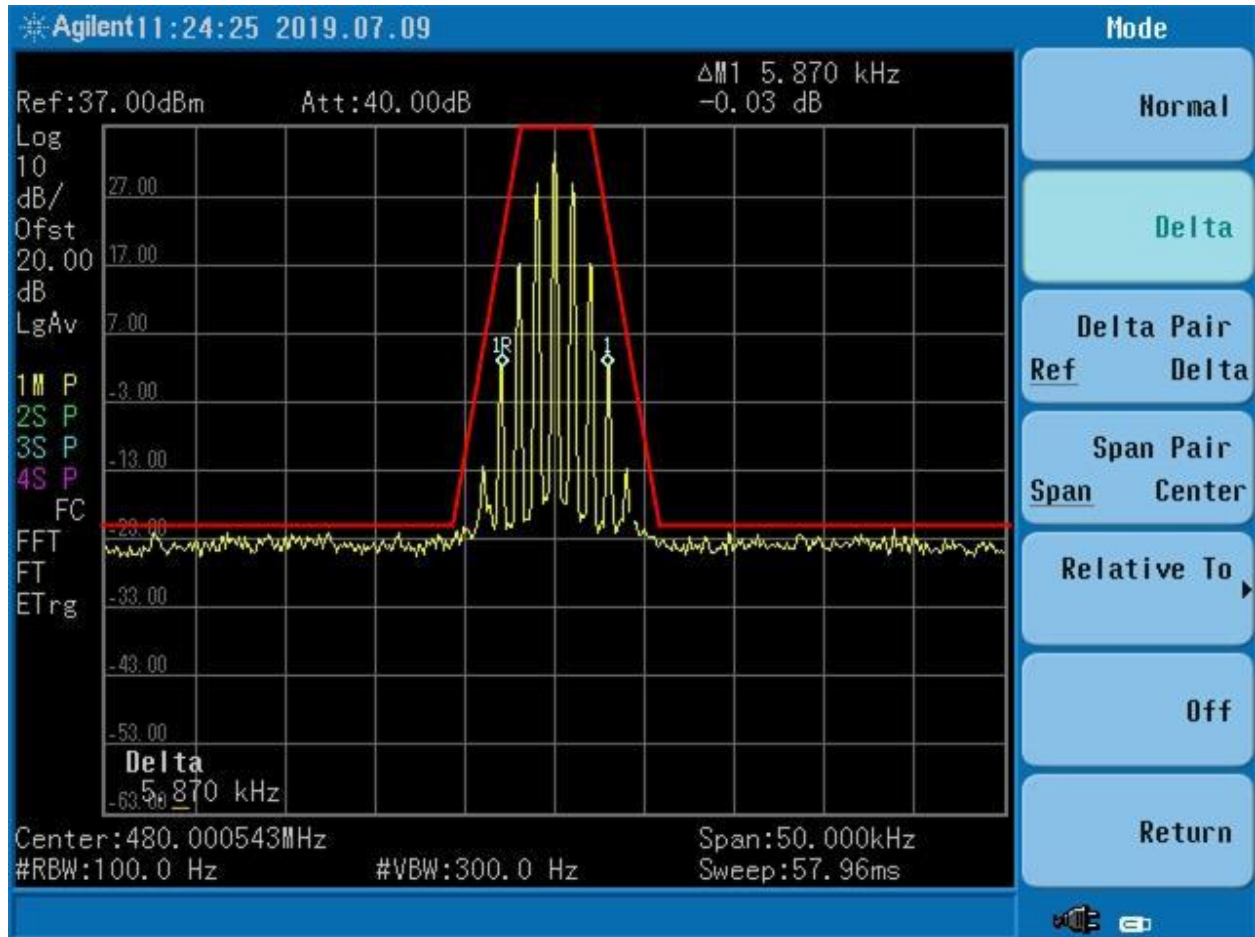


Figure 73. 480 MHz @ 6.25 kHz, Mask E

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001



U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

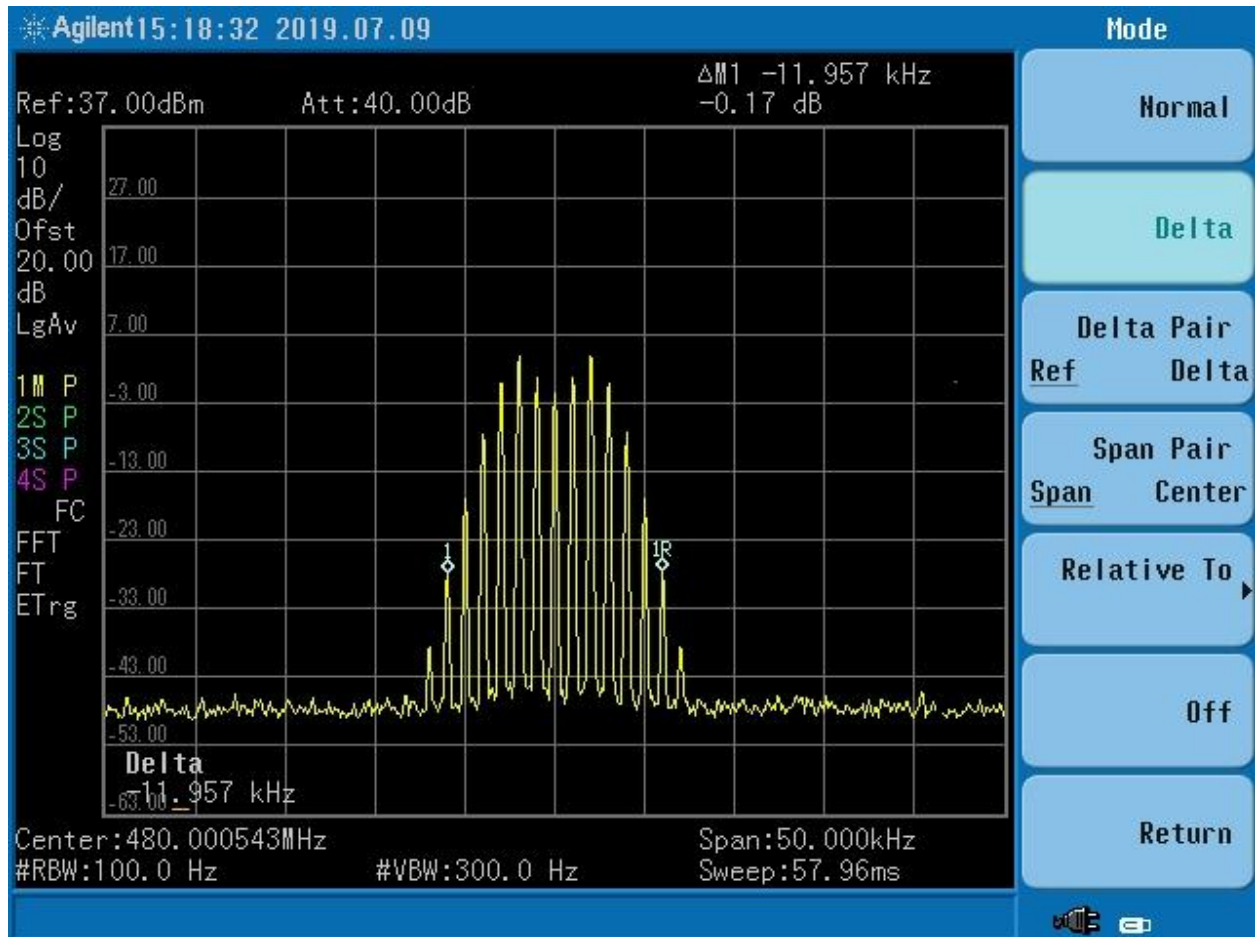


Figure 75. Input 480 MHz @ 12.5 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

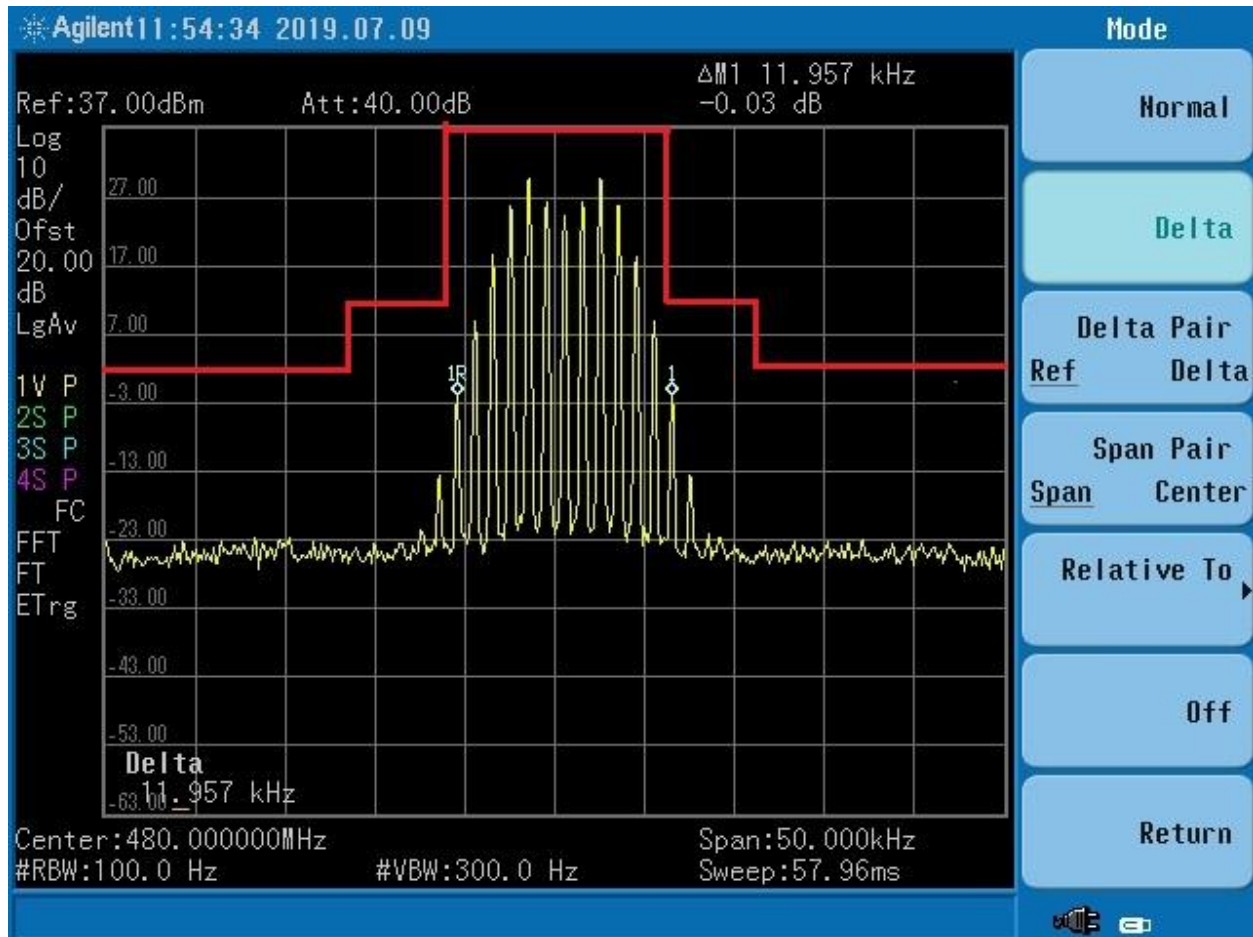


Figure 76. 480 MHz @ 12.5 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

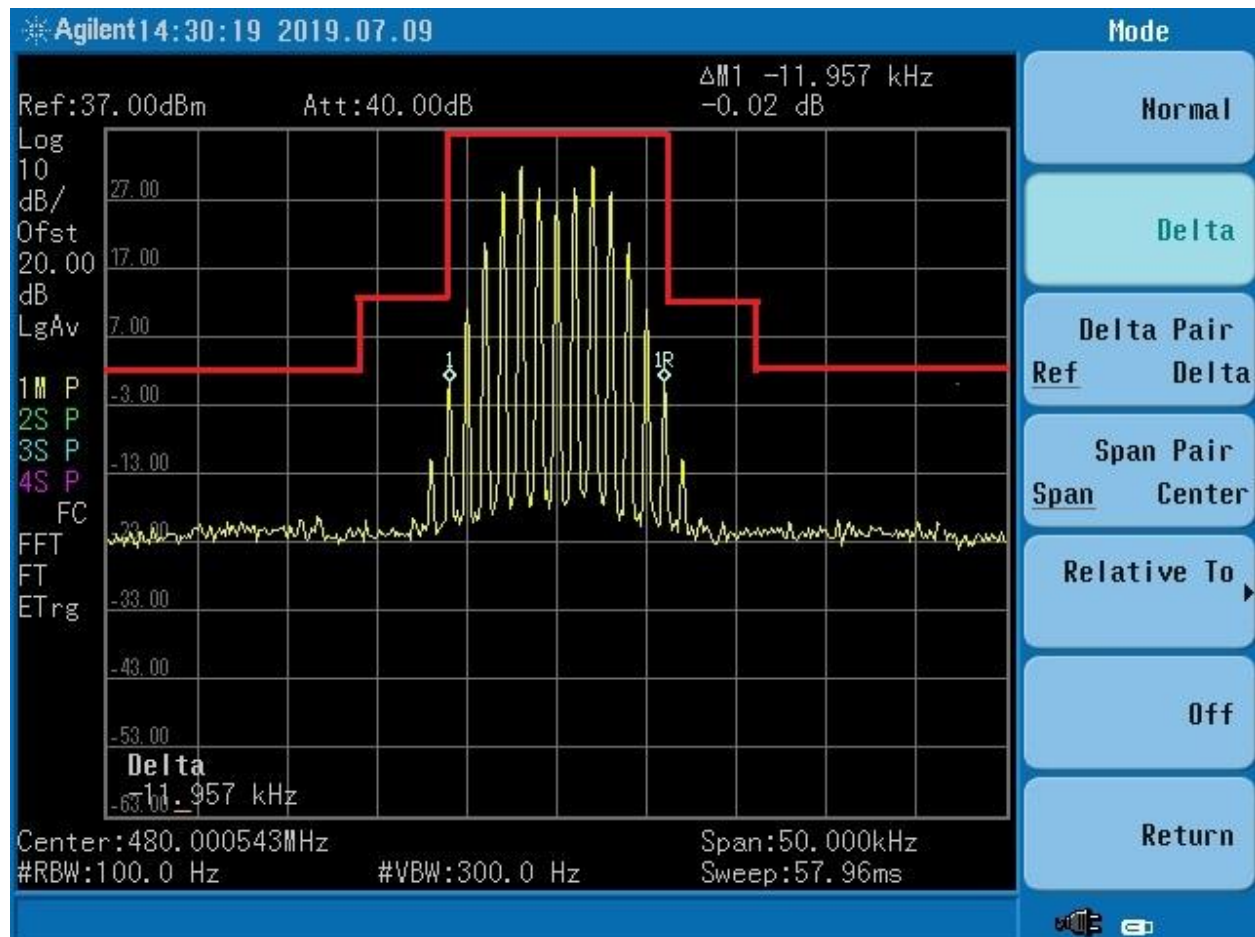


Figure 77. 480 MHz @ 12.5 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

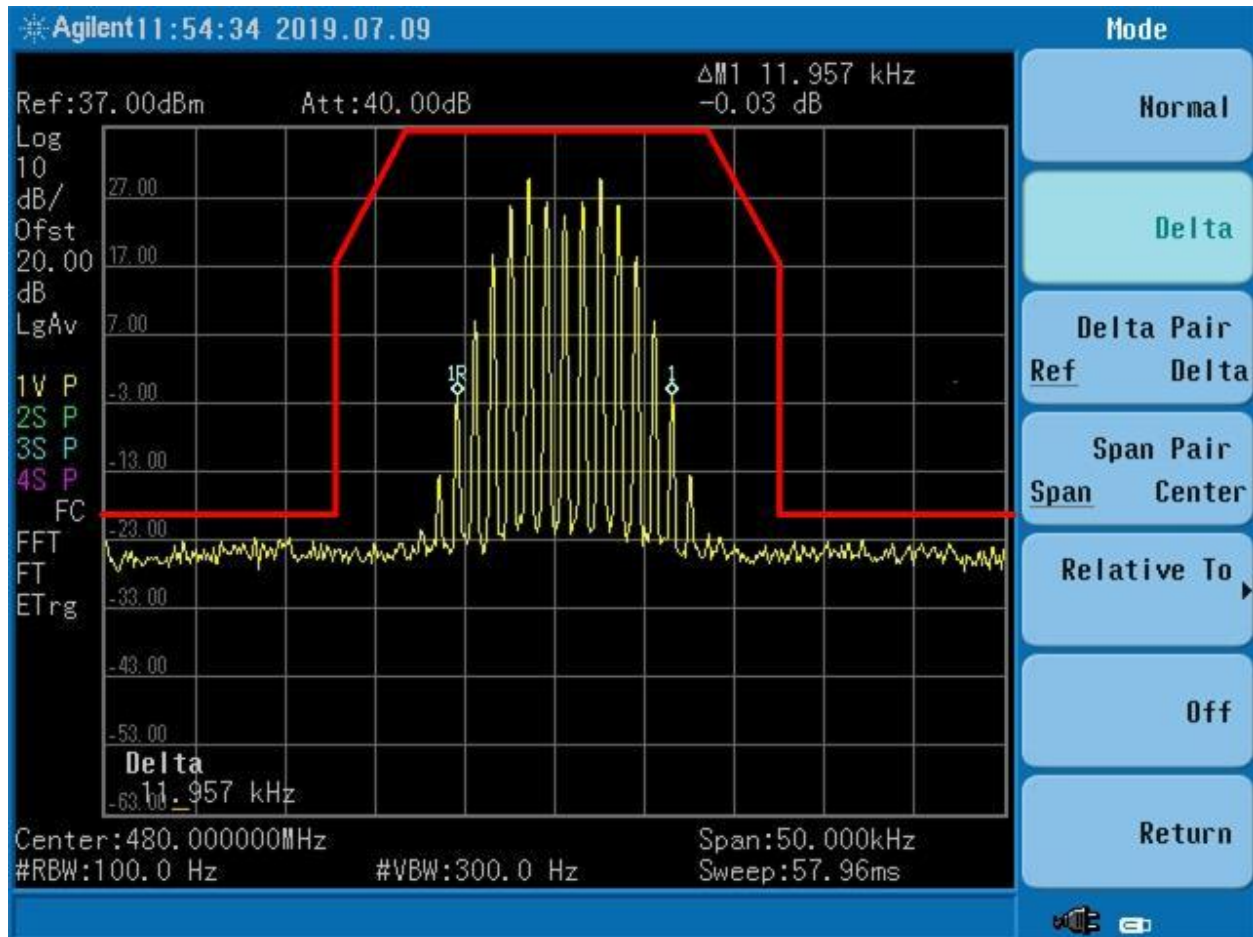


Figure 78. 480 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

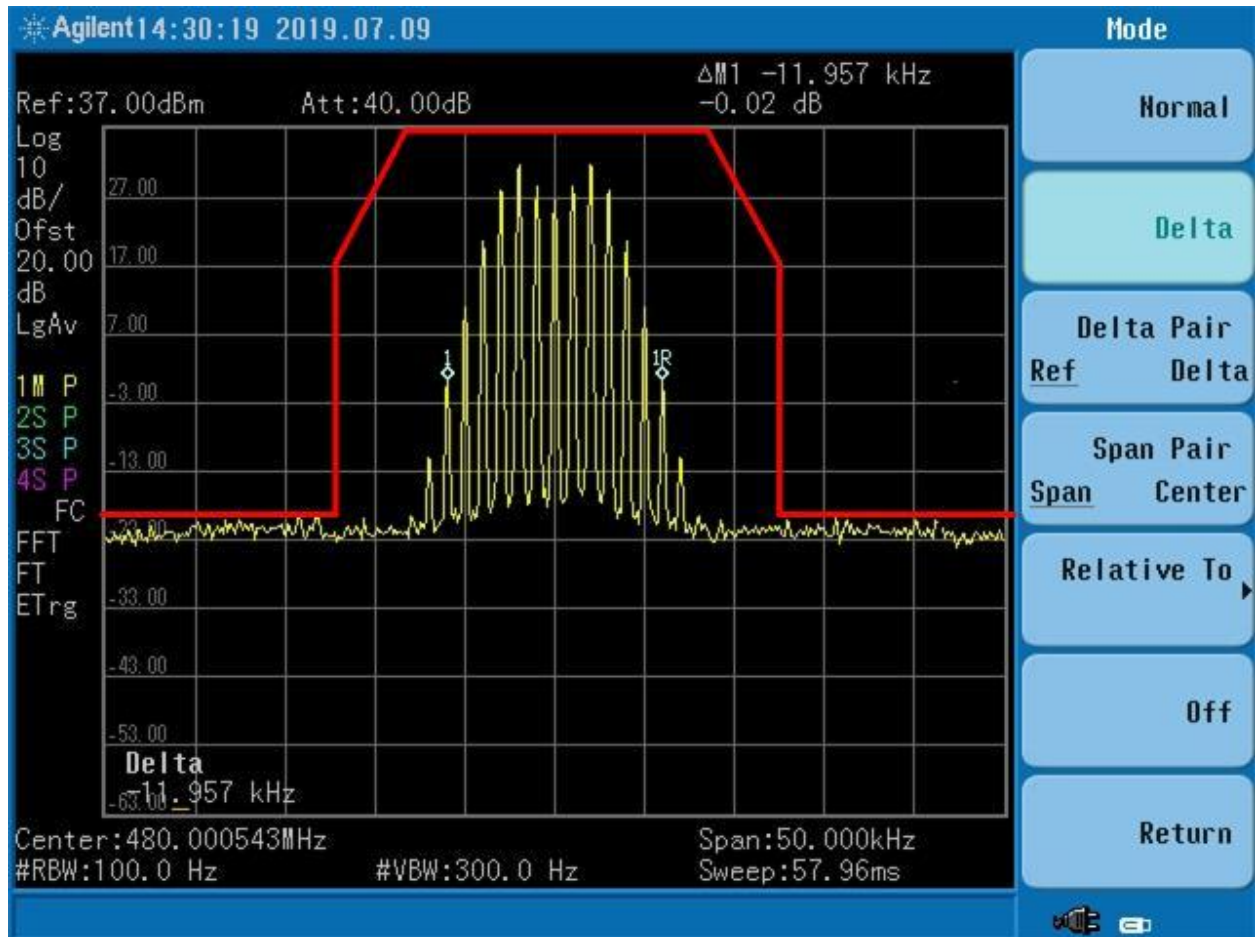


Figure 79. 480 MHz @ 12.5 kHz +3 dB, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

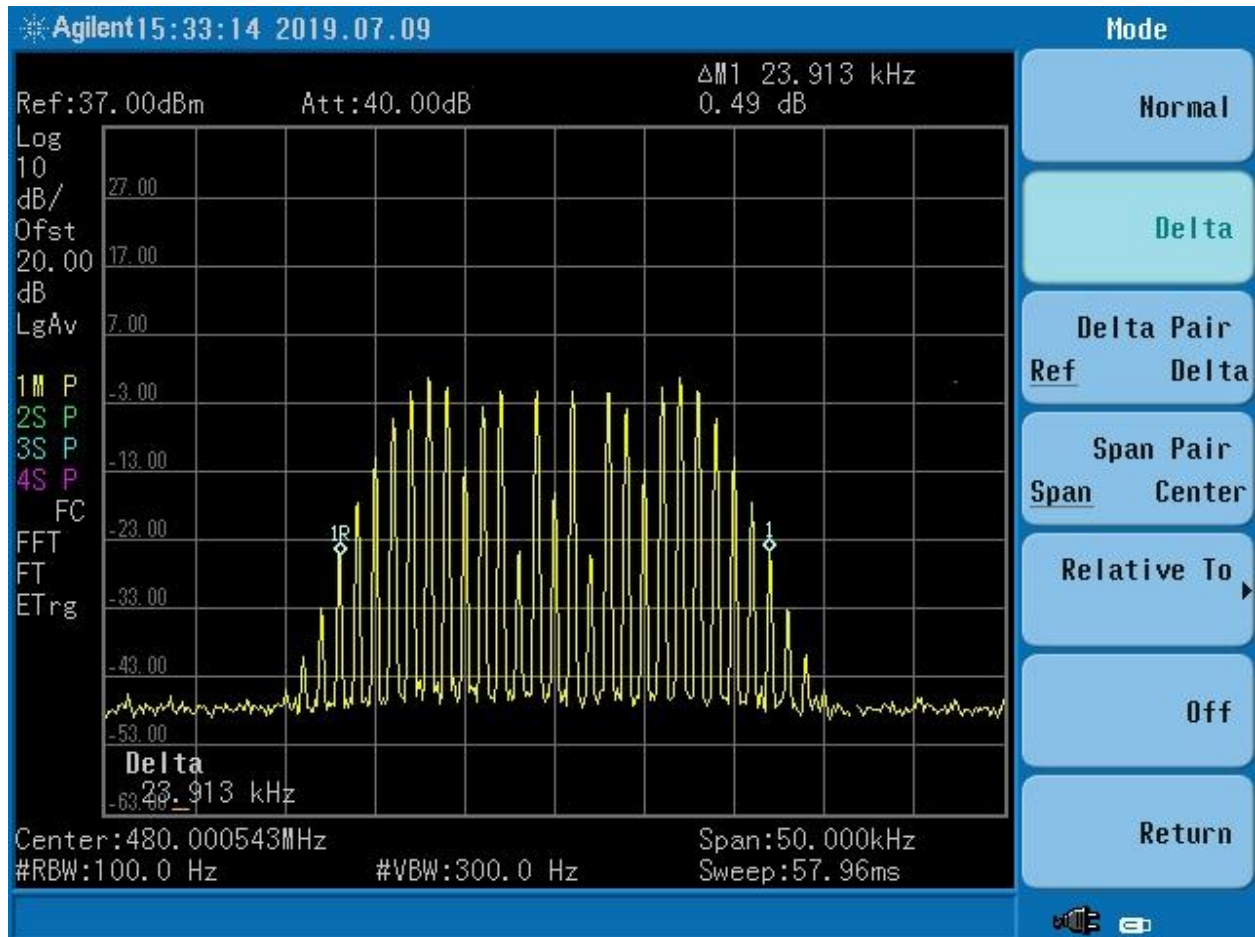


Figure 80. Input 480 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

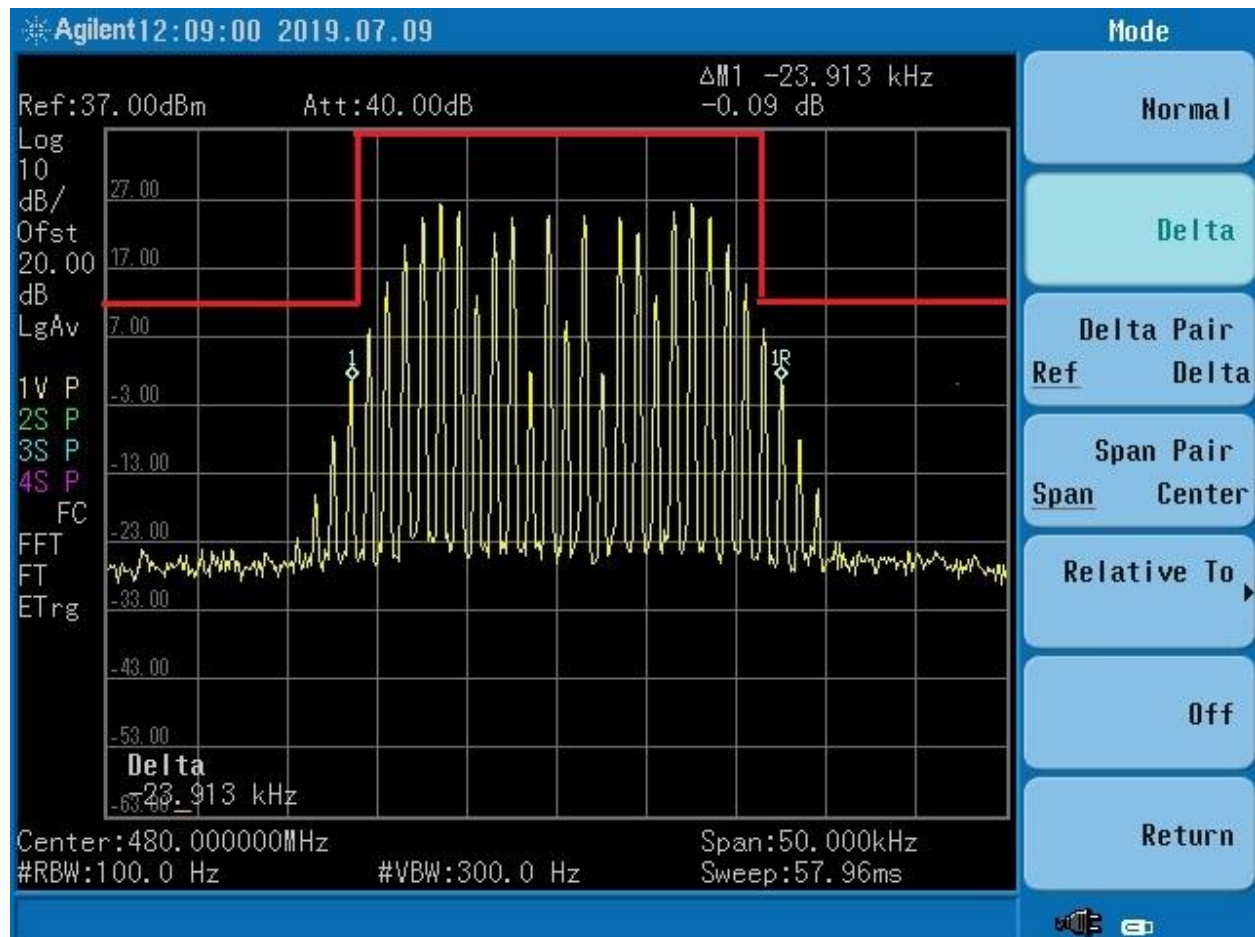


Figure 81. 480 MHz @ 25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

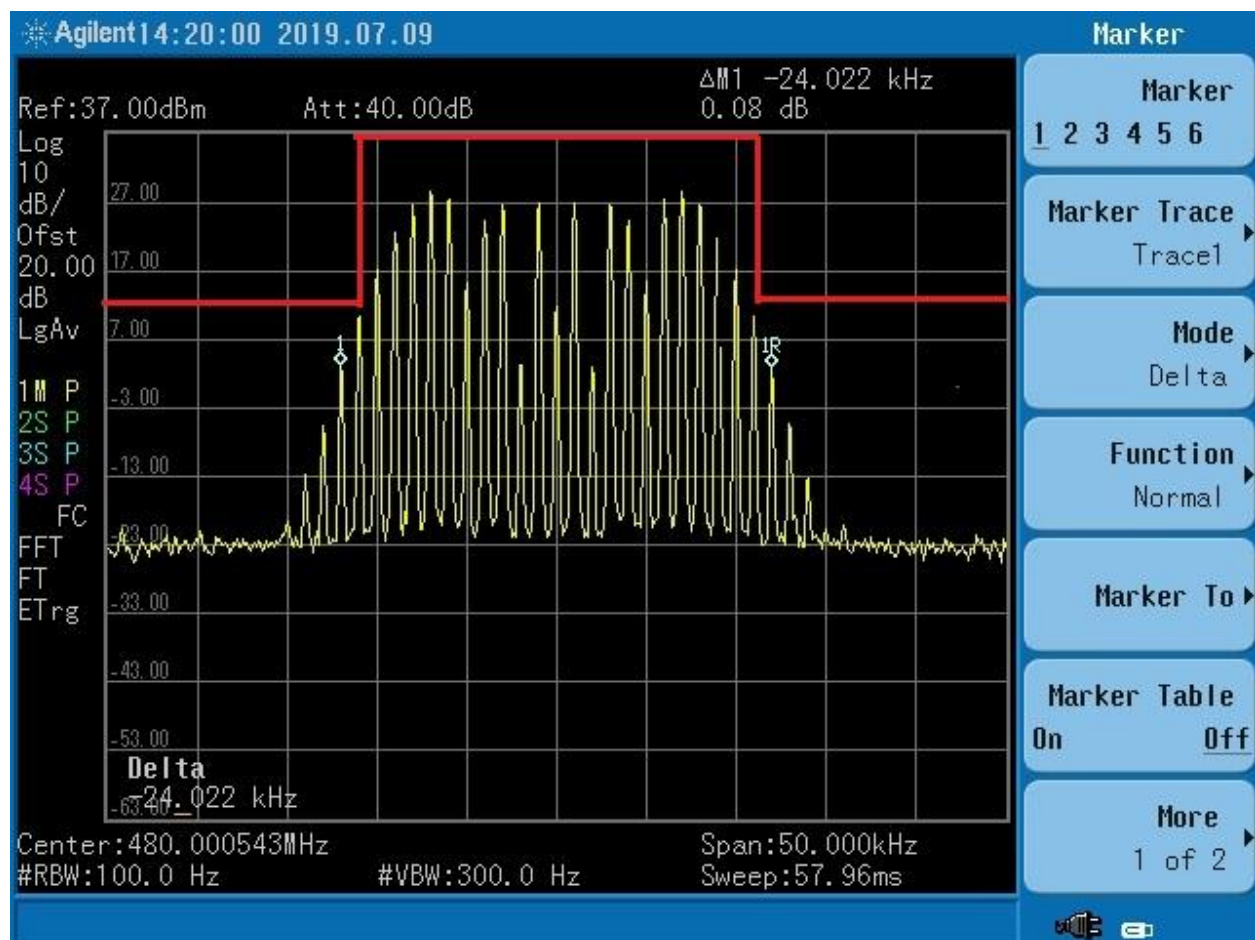


Figure 82. 480 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

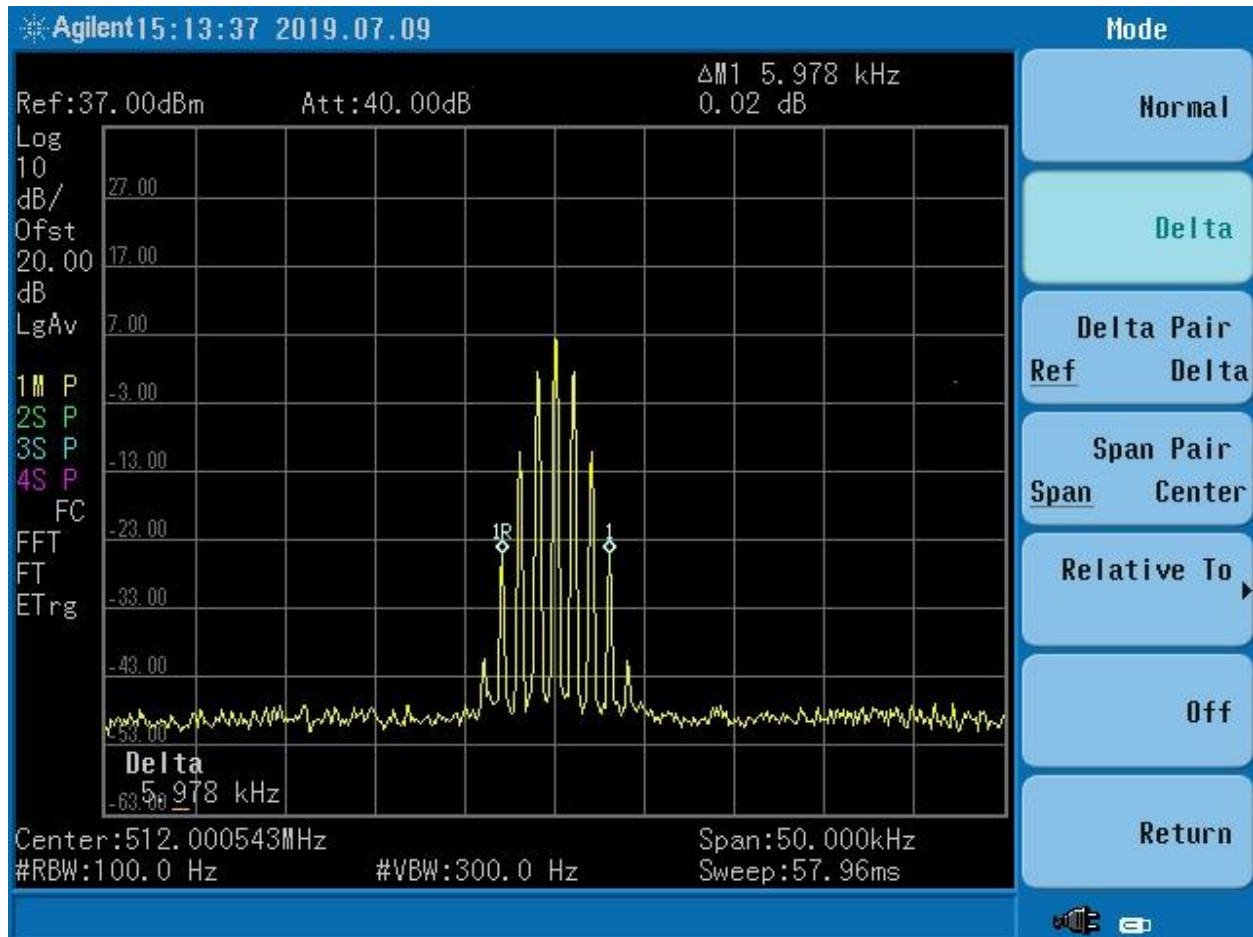


Figure 83. Input 512 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

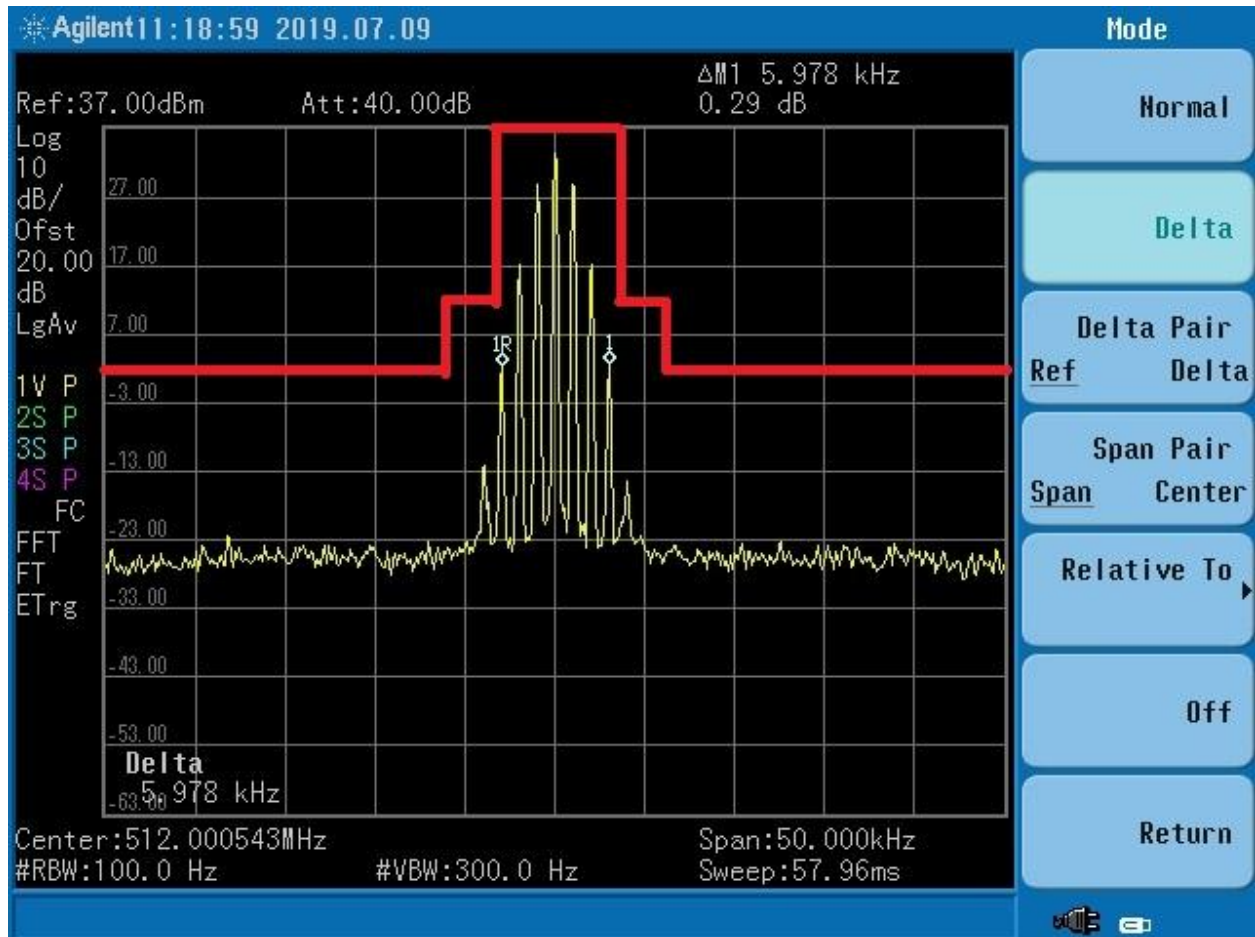


Figure 84. 512 MHz @ 6.25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

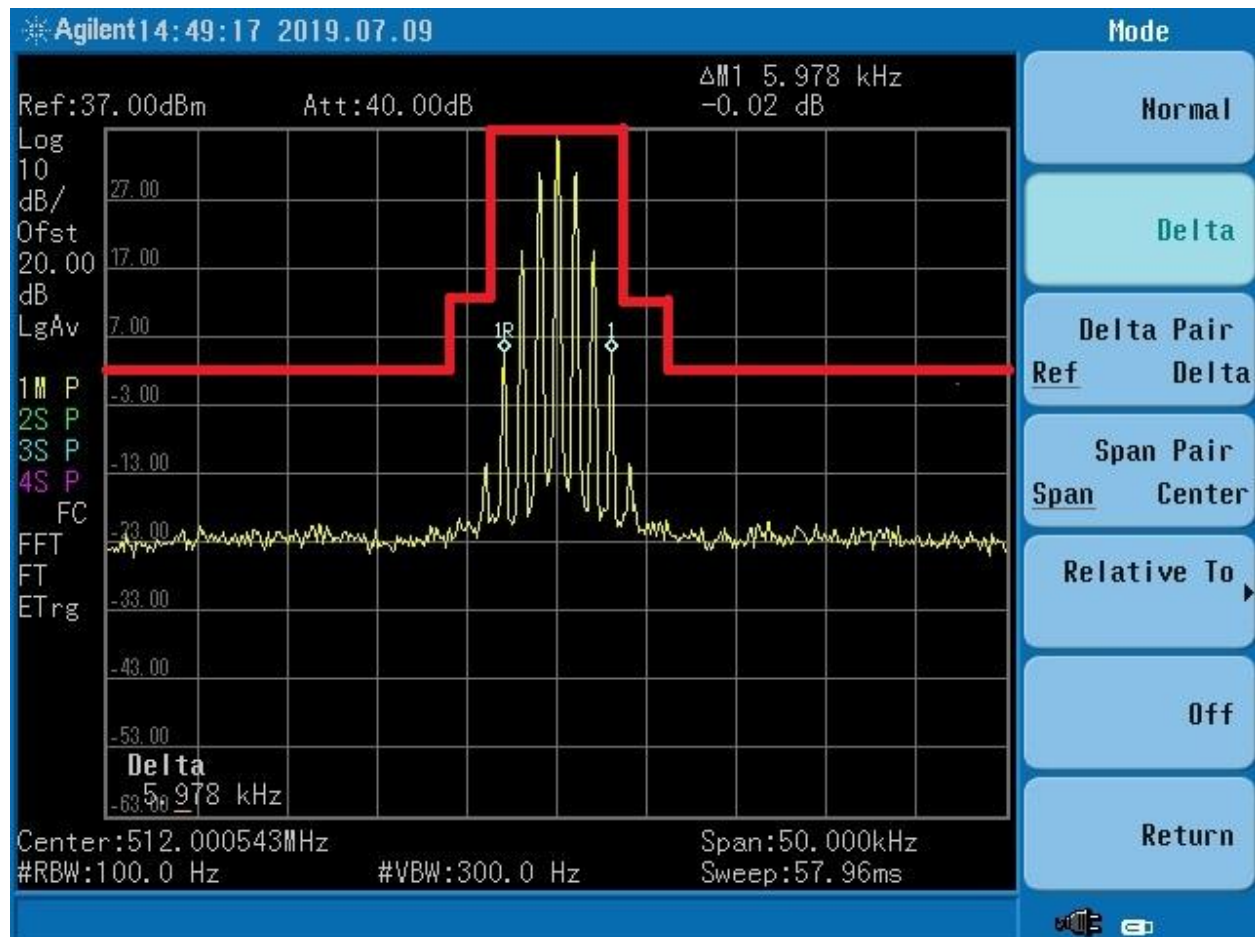


Figure 85. 512 MHz @ 6.25 kHz, +3 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE3
22303-SAFE3
19-0244
August 6, 2019
Safe-Com Wireless
SAFE-1001

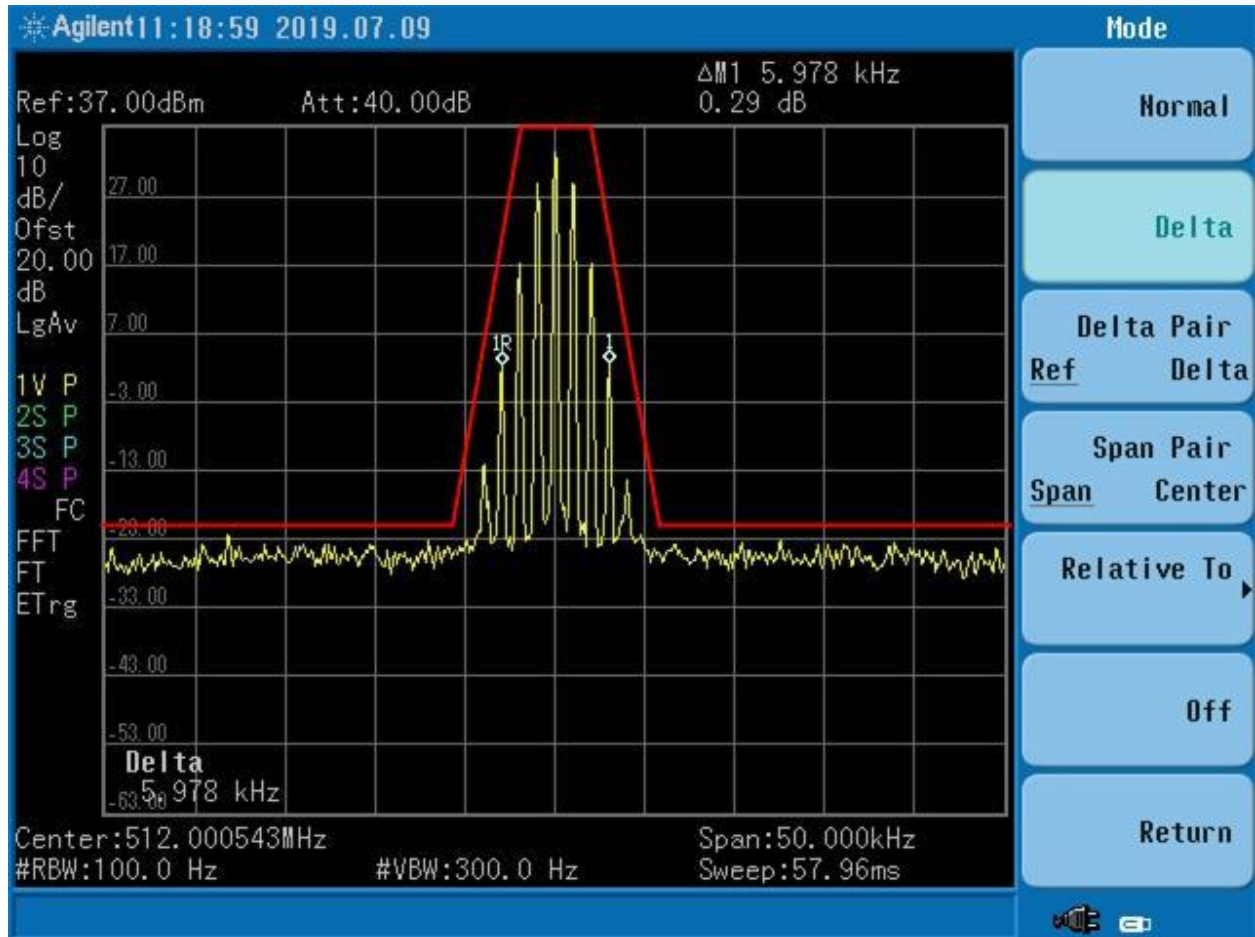


Figure 86. 512 MHz @ 6.25 kHz, Mask E