

BT

DUT: TB635L 3.0, TB650L 3.0, TB635 3.0, TB650 3.0


Communication System:BT; Frequency: 2441 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2441\text{ MHz}$; $\sigma = 1.76\text{ S/m}$; $\epsilon_r = 39.41$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.0\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.8\text{ }^{\circ}\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front DH5/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0919 W/kg

Front DH5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.629 V/m ; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.245 W/kg
SAR(1 g) = 0.078 W/kg ; SAR(10 g) = 0.026 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 34.3%
Maximum value of SAR (measured) = 0.149 W/kg

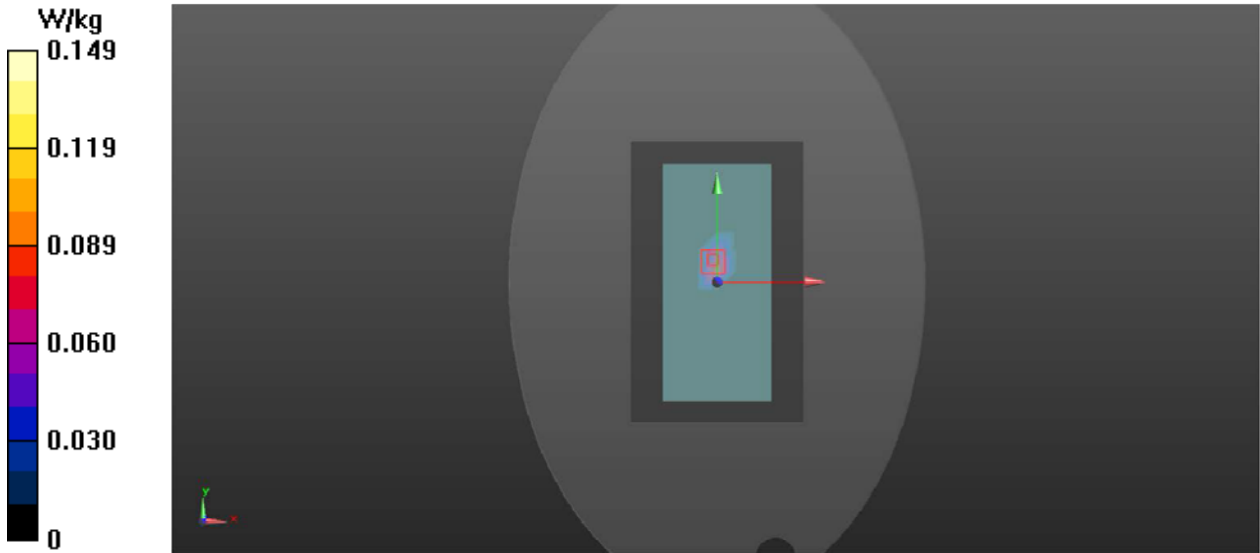

2.4GWIFI

DUT: TB635L 3.0, TB650L 3.0, TB635 3.0, TB650 3.0


Communication System:802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.76\text{ S/m}$; $\epsilon_r = 39.49$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.0\text{ }^\circ\text{C}$; Liquid Temperature : $21.8\text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.371 W/kg

Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.125 V/m ; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.983 W/kg
SAR(1 g) = 0.293 W/kg ; SAR(10 g) = 0.125 W/kg
Smallest distance from peaks to all points 3 dB below = 7 mm
Ratio of SAR at M2 to SAR at M1 = 37.2%
Maximum value of SAR (measured) = 0.585 W/kg

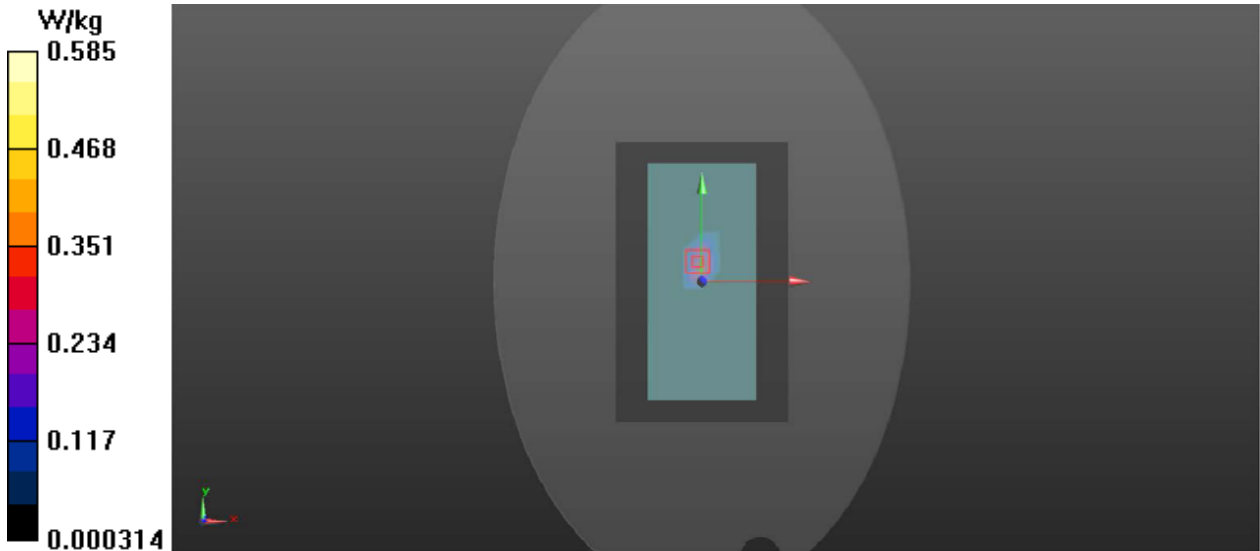

5.2GWIFI

DUT: TB635L 3.0, TB650L 3.0, TB635 3.0, TB650 3.0


Communication System:802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5200\text{ MHz}$; $\sigma = 4.68\text{ S/m}$; $\epsilon_r = 35.69$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.2\text{ }^\circ\text{C}$; Liquid Temperature : $22.0\text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.919 W/kg

Front/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 3.548 V/m ; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 2.75 W/kg
SAR(1 g) = 0.397 W/kg ; SAR(10 g) = 0.150 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 46.5%
Maximum value of SAR (measured) = 1.17 W/kg

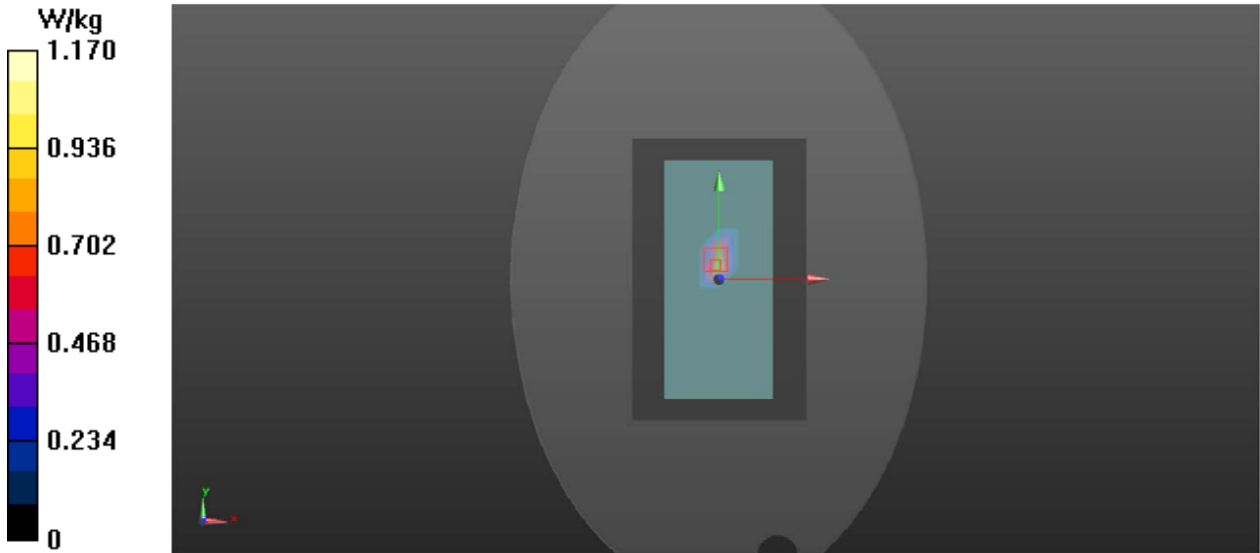

5.8GWIFI

DUT: TB635L 3.0, TB650L 3.0, TB635 3.0, TB650 3.0

Communication System:802.11a; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: f = 5785 MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.52$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.1 °C; Liquid Temperature : 21.9 °C

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
 - Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 W/kg

Front/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 3.560 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 3.25 W/kg
SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.139 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 42.7%
Maximum value of SAR (measured) = 1.31 W/kg

