

BT

DUT: TK635L 3.0, TK650L 3.0, TK635A 3.0, TK650A 3.0


Communication System: BT ; Frequency: 2441 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.73 \text{ S/m}$; $\epsilon_r = 39.91$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front 3DH5/Area Scan (9x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.186 W/kg

Front 3DH5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.368 V/m ; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.380 W/kg
SAR(1 g) = 0.081 W/kg ; SAR(10 g) = 0.035 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 39.5%
Maximum value of SAR (measured) = 0.247 W/kg

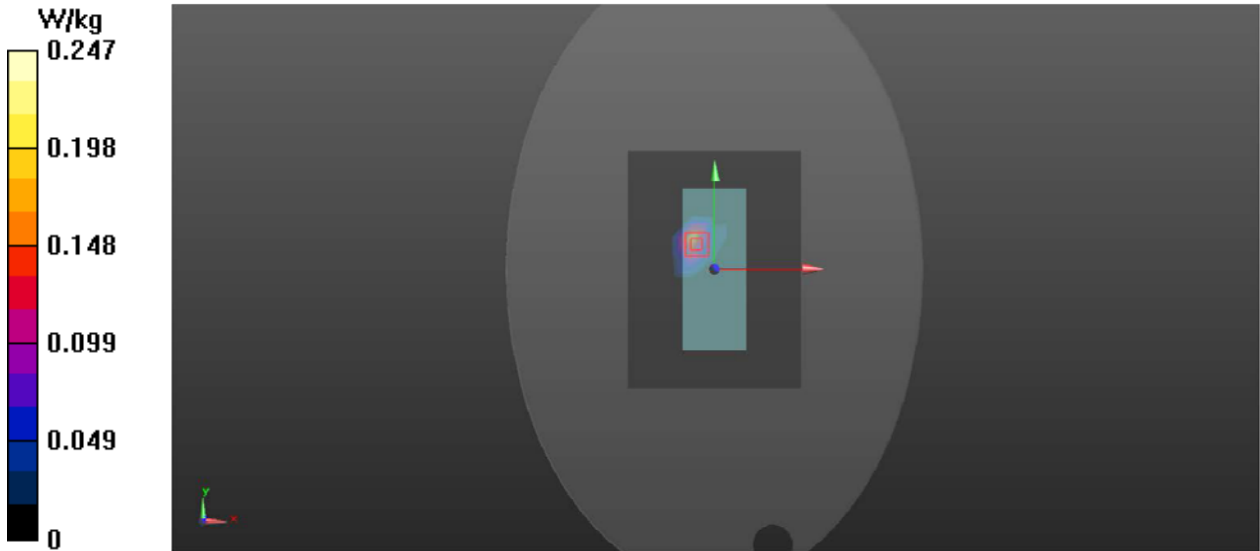

2.4GWIFI

DUT: TK635L 3.0, TK650L 3.0, TK635A 3.0, TK650A 3.0


Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.76\text{ S/m}$; $\epsilon_r = 40.00$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.0\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.8\text{ }^{\circ}\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front/Area Scan (9x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.668 W/kg

Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.795 V/m ; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.238 W/kg ; SAR(10 g) = 0.117 W/kg
Smallest distance from peaks to all points 3 dB below = 9.5 mm
Ratio of SAR at M2 to SAR at M1 = 40.1%
Maximum value of SAR (measured) = 0.875 W/kg

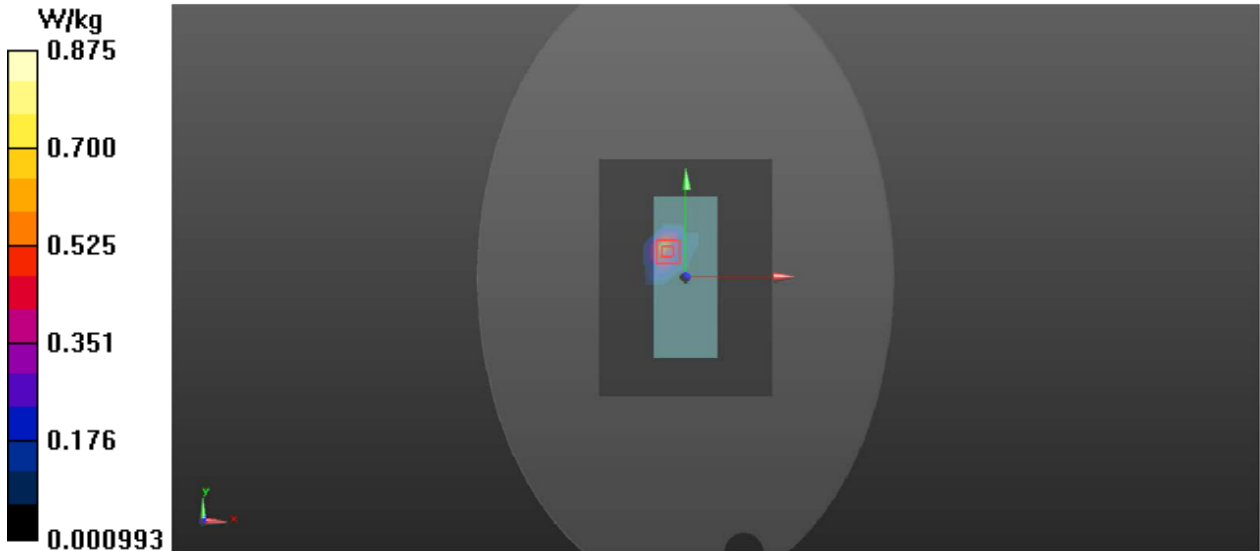

5.2GWIFI

DUT: TK635L 3.0, TK650L 3.0, TK635A 3.0, TK650A 3.0


Communication System: 802.11a ; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.68 \text{ S/m}$; $\epsilon_r = 36.80$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front/Area Scan (9x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.405 W/kg

Front/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 2.898 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.168 W/kg ; SAR(10 g) = 0.074 W/kg
Smallest distance from peaks to all points 3 dB below = 8 mm
Ratio of SAR at M2 to SAR at M1 = 47.3%
Maximum value of SAR (measured) = 0.708 W/kg

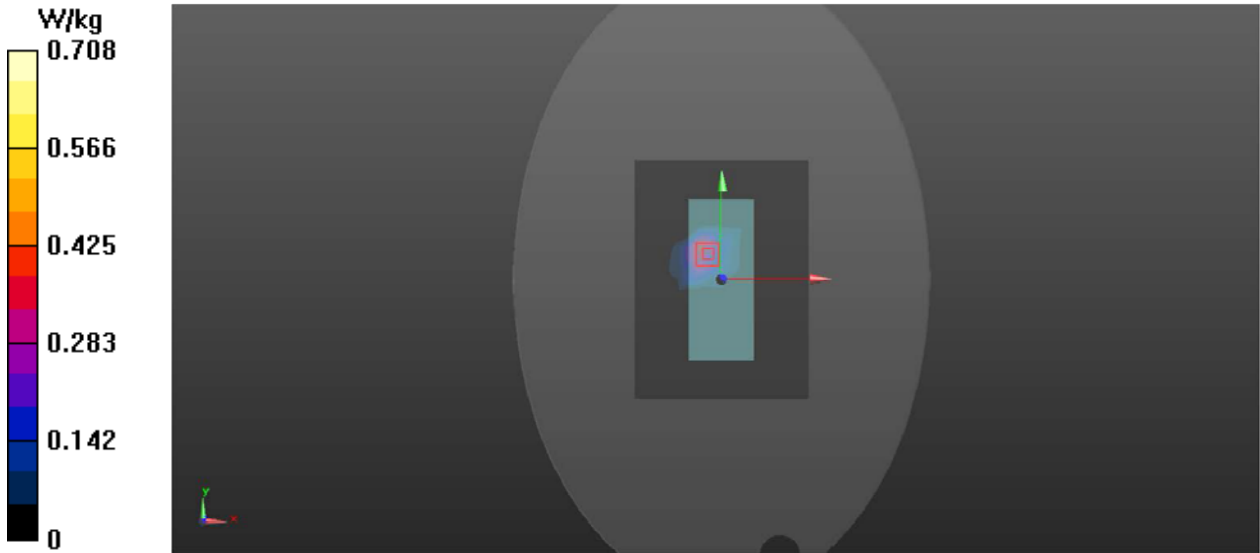

5.8GWIFI

DUT: TK635L 3.0, TK650L 3.0, TK635A 3.0, TK650A 3.0

Communication System: 802.11a ; Frequency: 5745 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.28 \text{ S/m}$; $\epsilon_r = 35.63$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.0 \text{ }^\circ\text{C}$; Liquid Temperature : $21.8 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; Calibrated: 2026/7/27;
- Electronics: DAE4 Sn1418; Calibrated: 2026/7/27
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Front/Area Scan (9x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.494 W/kg

Front/Zoom Scan (9x9x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 2.874 V/m ; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 2.03 W/kg
SAR(1 g) = 0.246 W/kg ; SAR(10 g) = 0.121 W/kg
Smallest distance from peaks to all points 3 dB below = 8.8 mm
Ratio of SAR at M2 to SAR at M1 = 46.7%
Maximum value of SAR (measured) = 0.859 W/kg

