




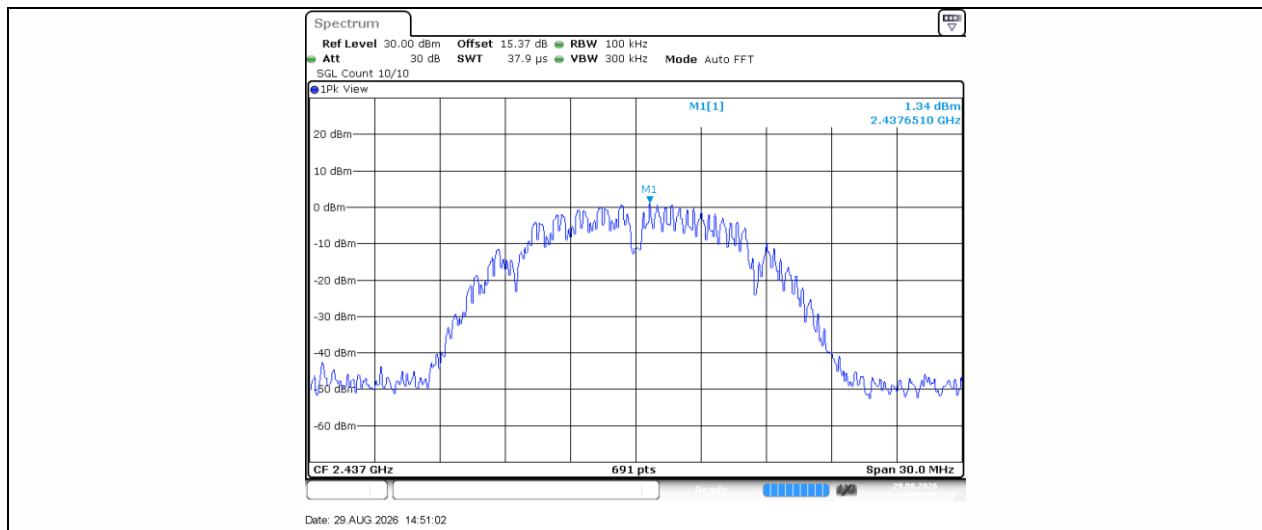


11B-Ant1-2437-0~Reference-PASS

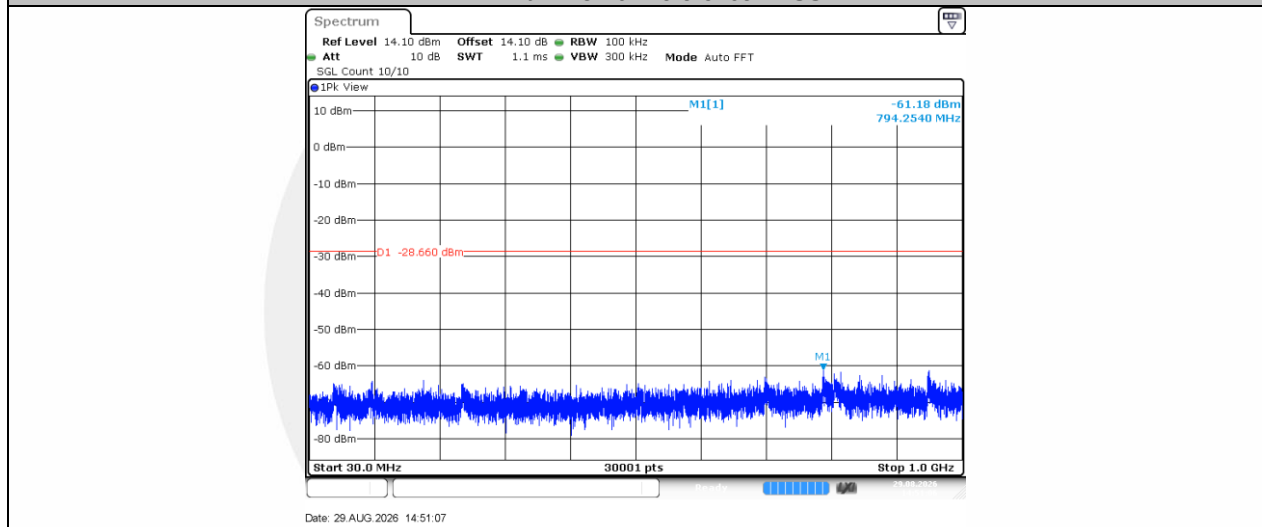


11B-Ant1-2437-30~1000-PASS

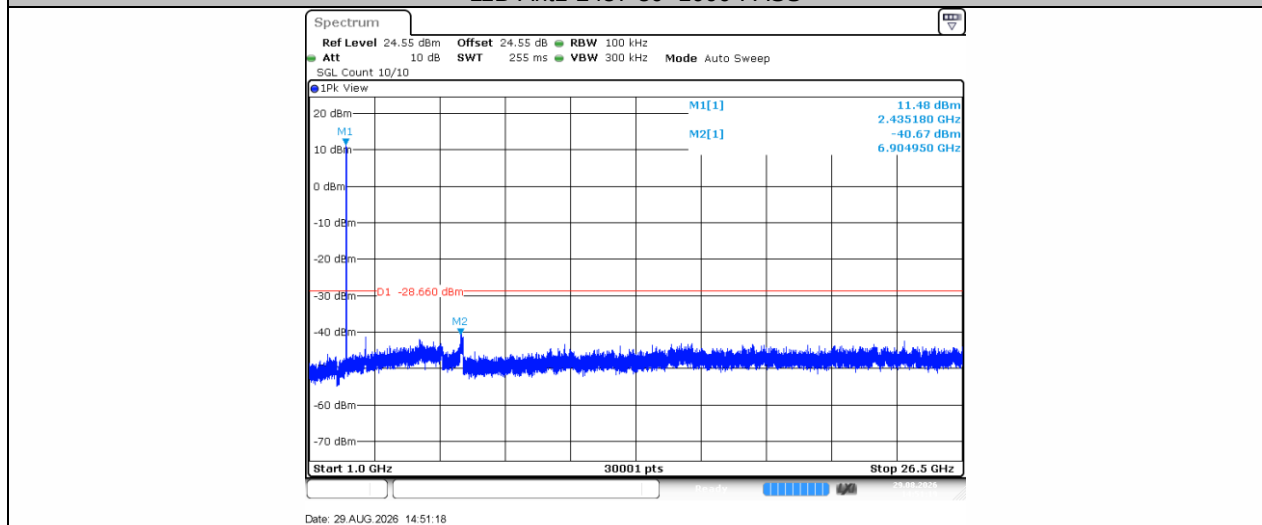


11B-Ant1-2437-1000~26500-PASS

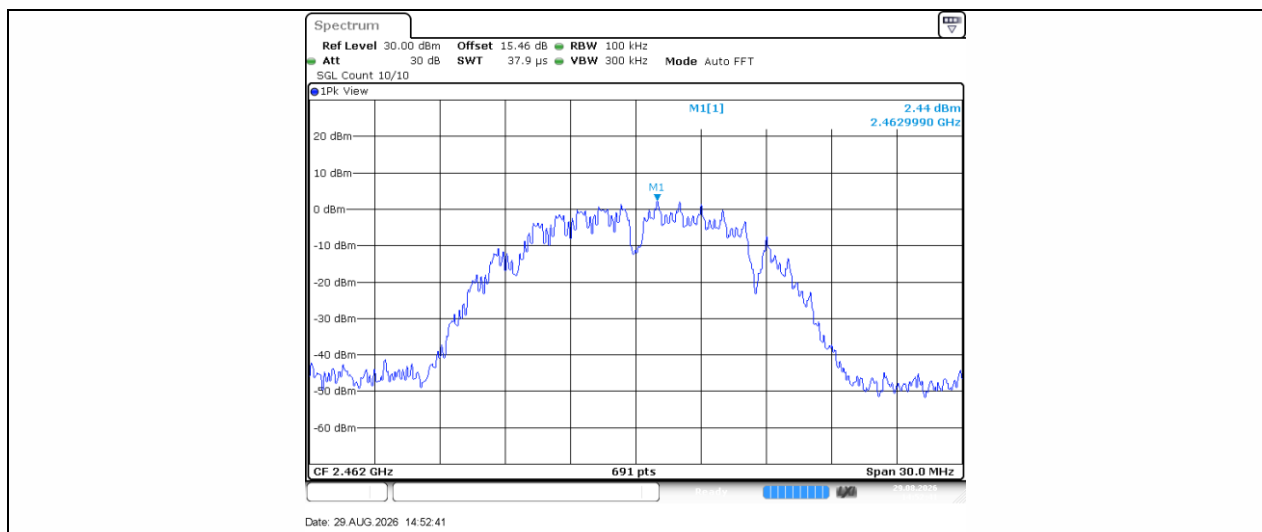


11B-Ant1-2462-0~Reference-PASS

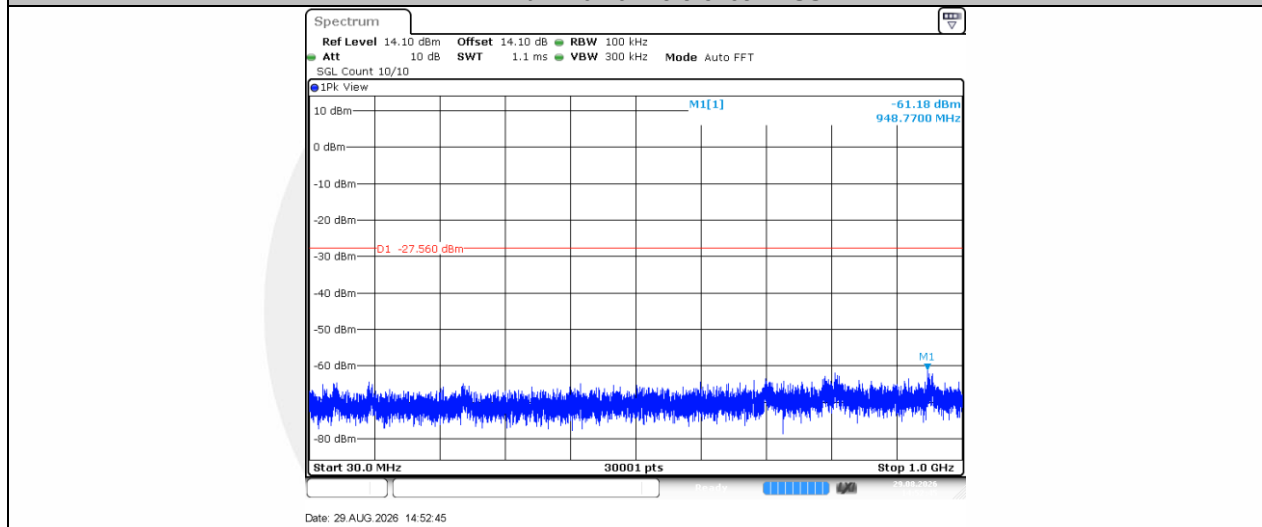


11B-Ant1-2462-30~1000-PASS

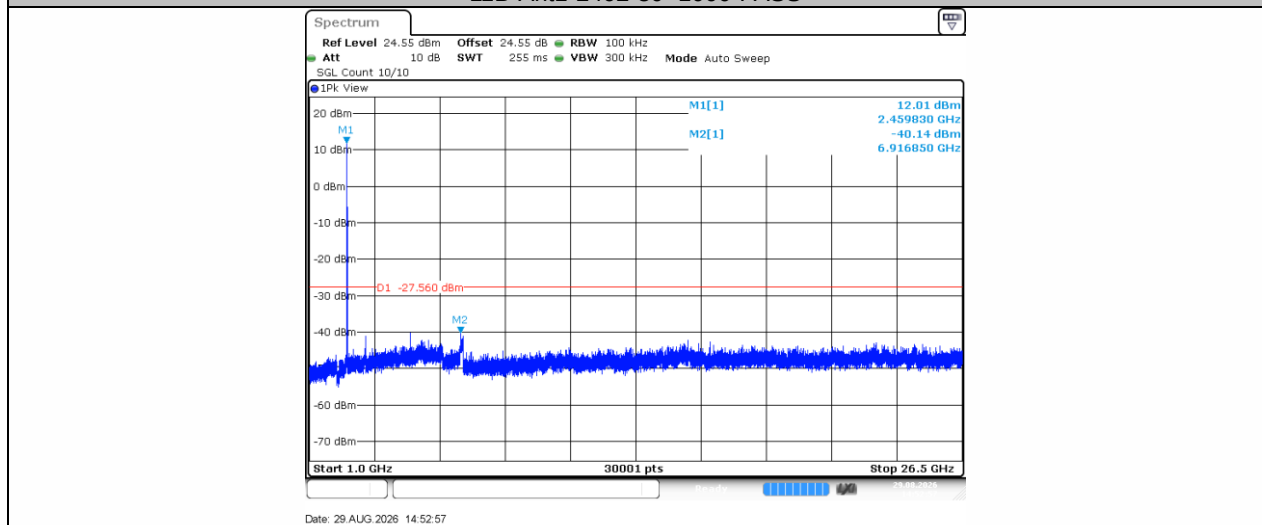


11B-Ant1-2462-1000~26500-PASS

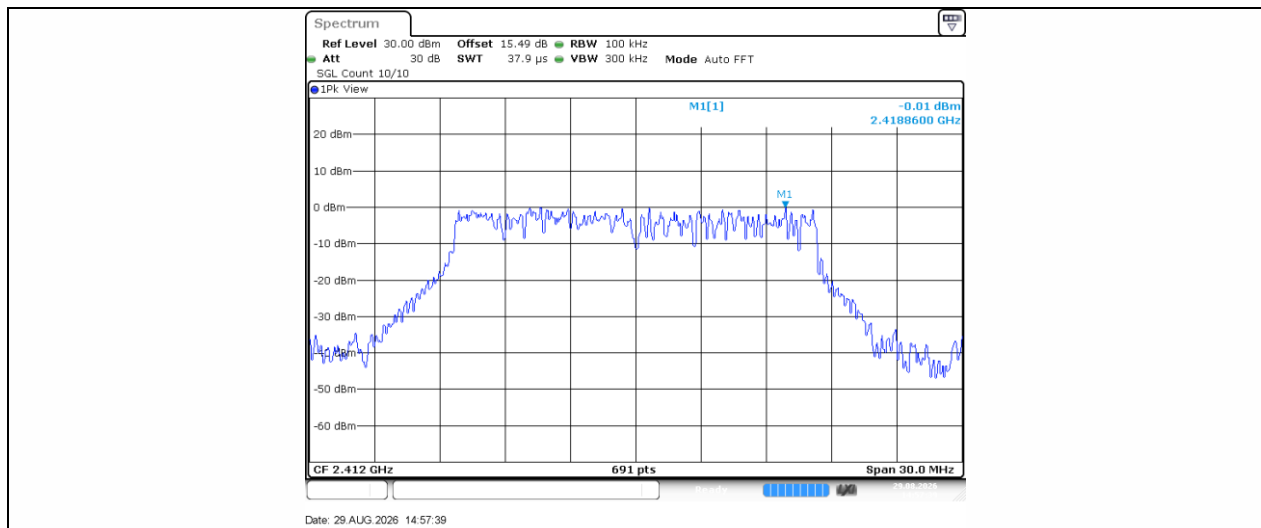


11G-Ant1-2412-0~Reference-PASS

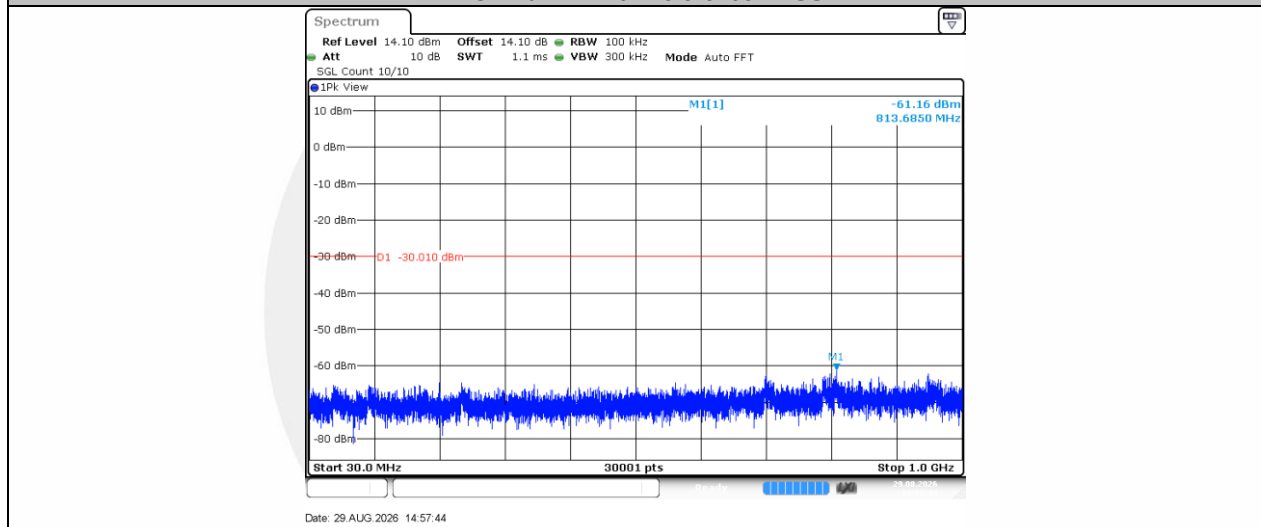


11G-Ant1-2412-30~1000-PASS

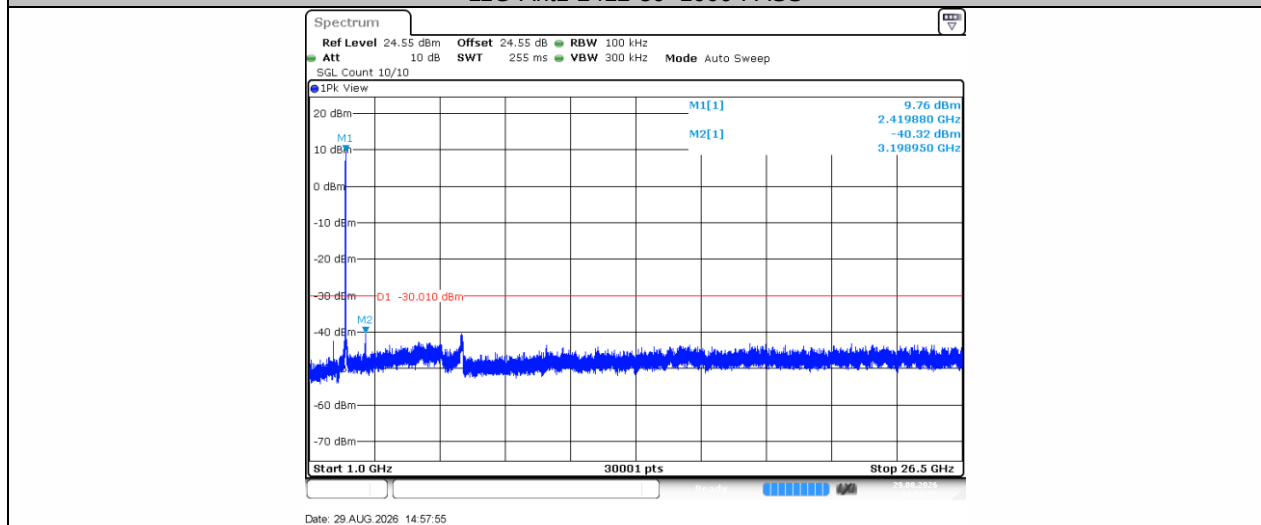


11G-Ant1-2412-1000~26500-PASS

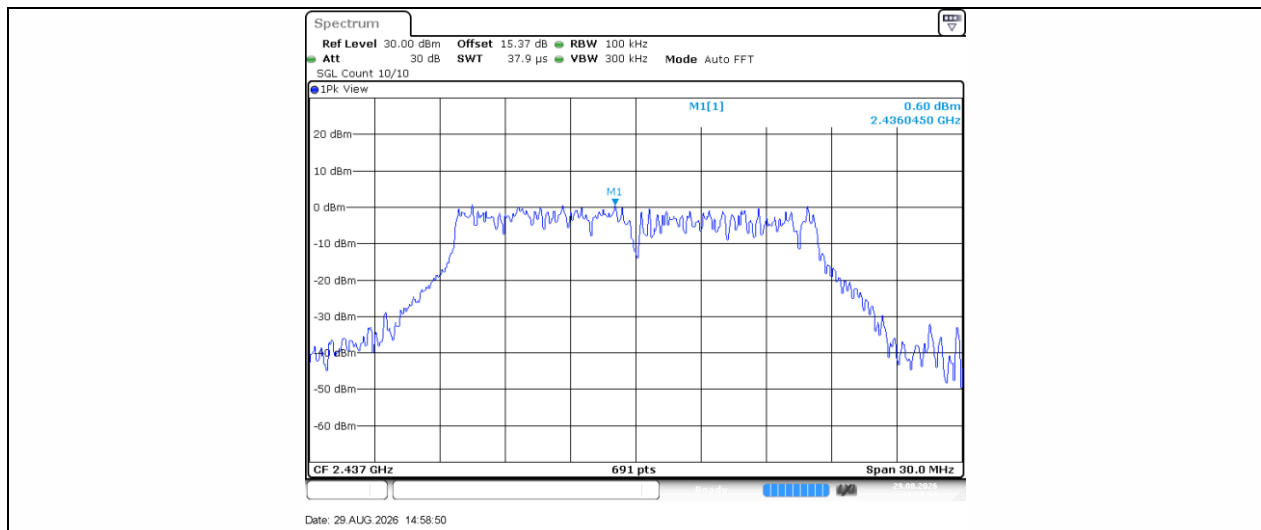


11G-Ant1-2437-0~Reference-PASS

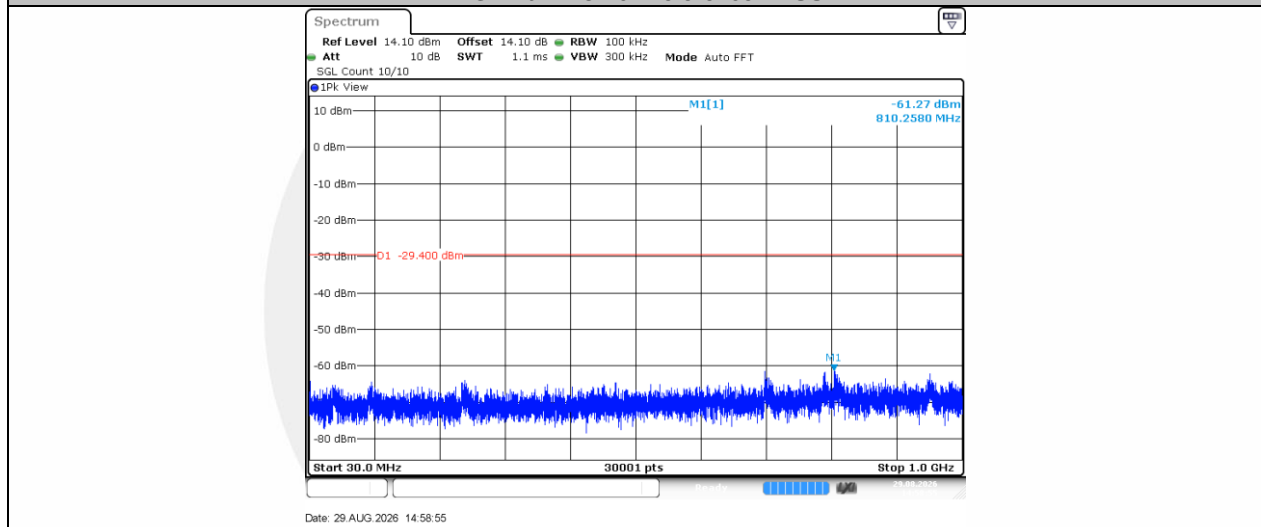


11G-Ant1-2437-30~1000-PASS

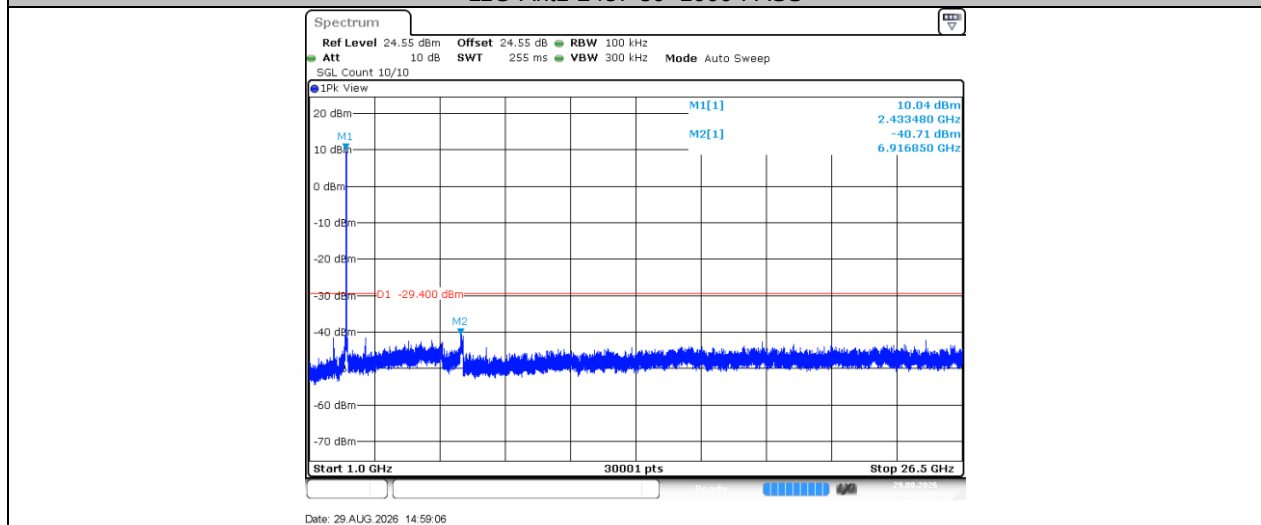


11G-Ant1-2437-1000~26500-PASS

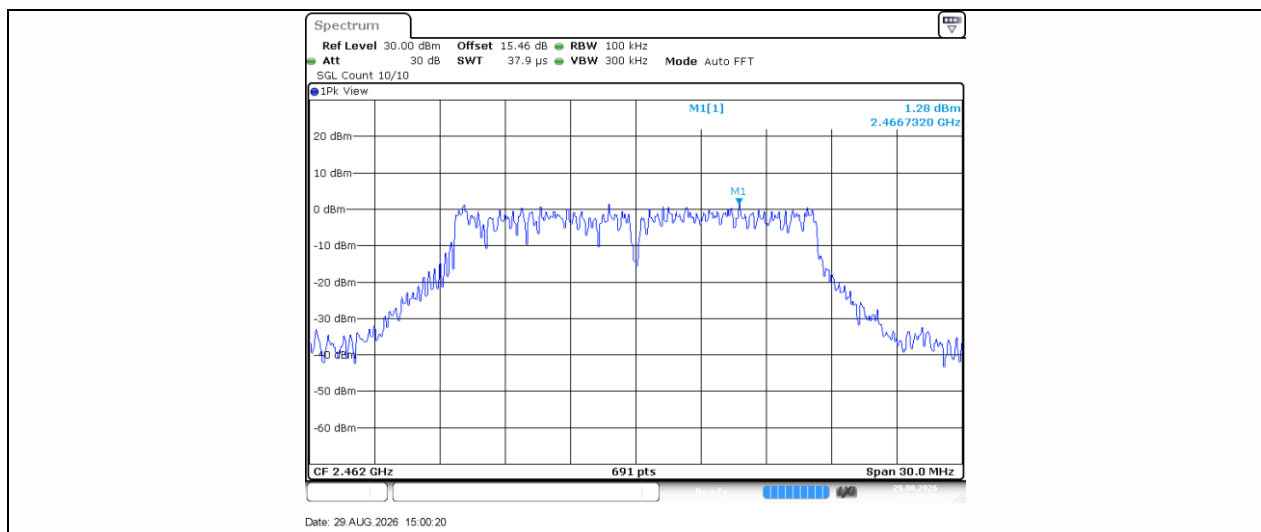


11G-Ant1-2462-0~Reference-PASS

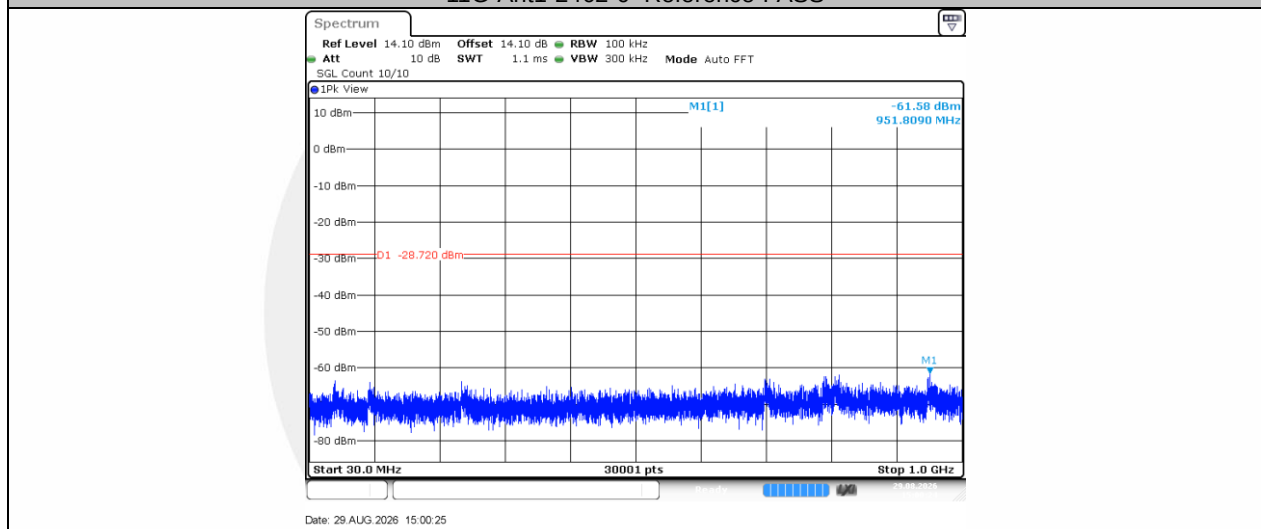


11G-Ant1-2462-30~1000-PASS

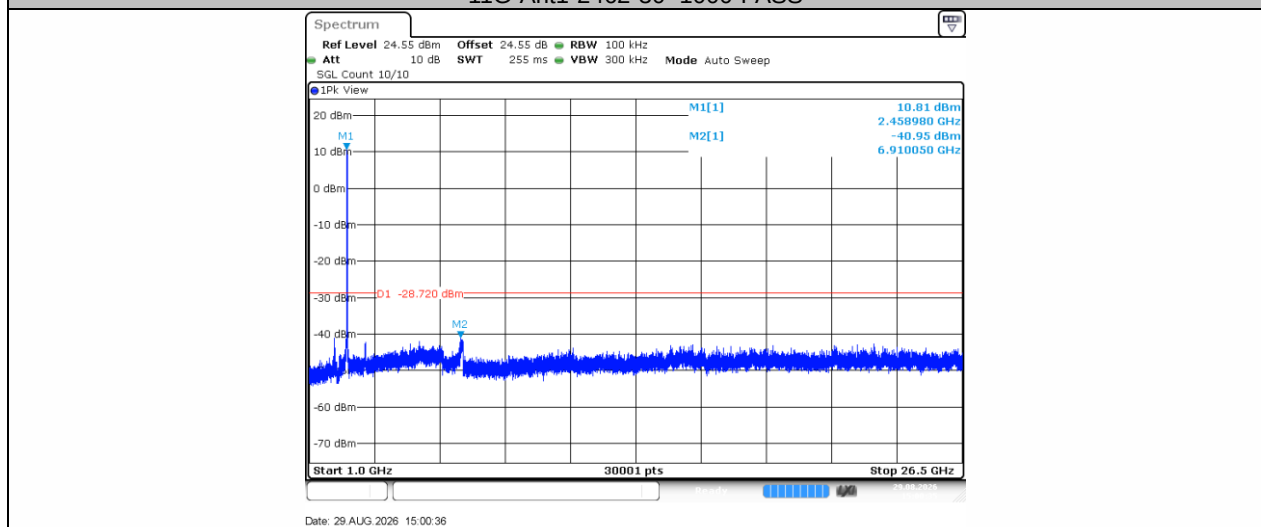


11G-Ant1-2462-1000~26500-PASS

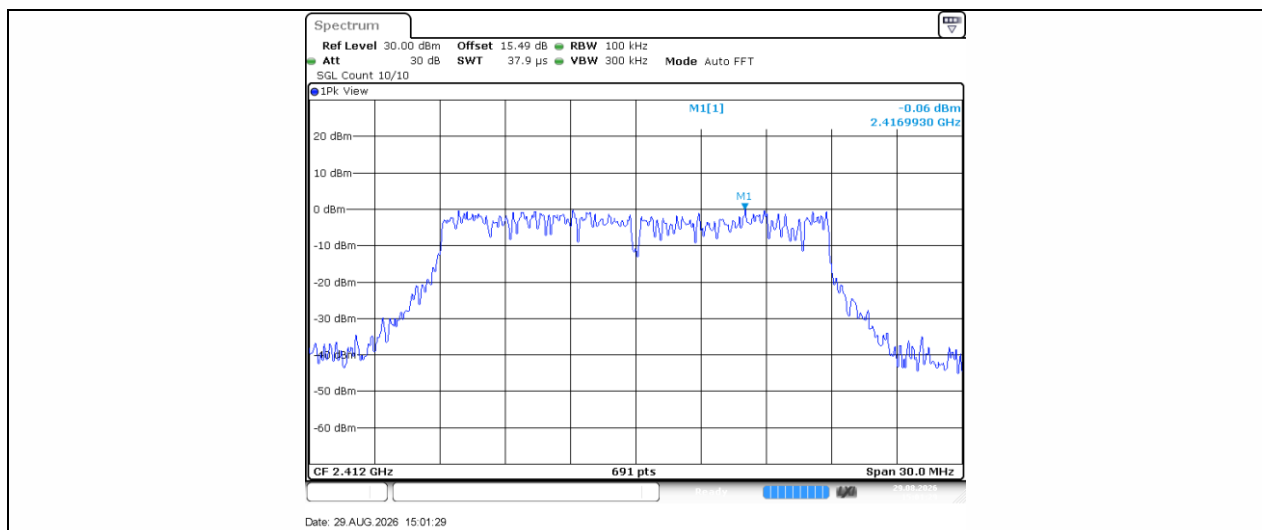


11N20SISO-Ant1-2412-0~Reference-PASS

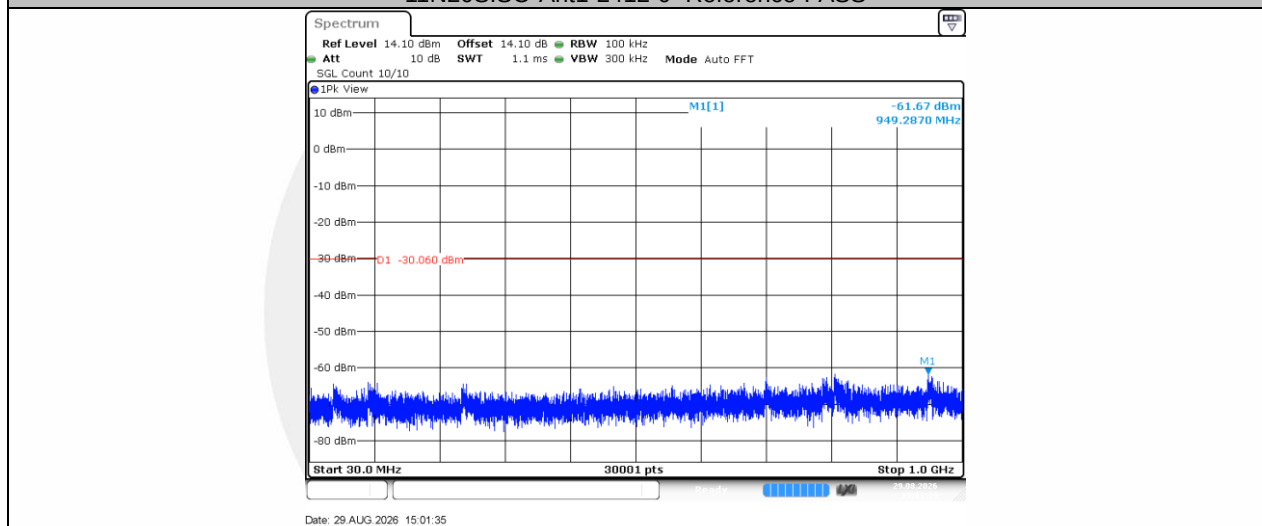


11N20SISO-Ant1-2412-30~1000-PASS

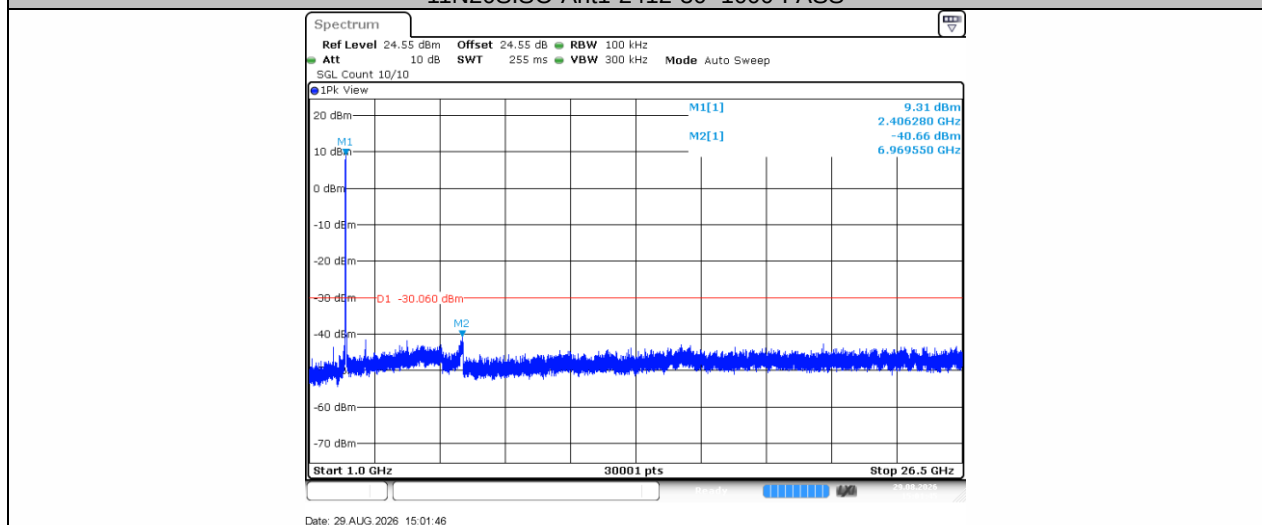


11N20SISO-Ant1-2412-1000~26500-PASS

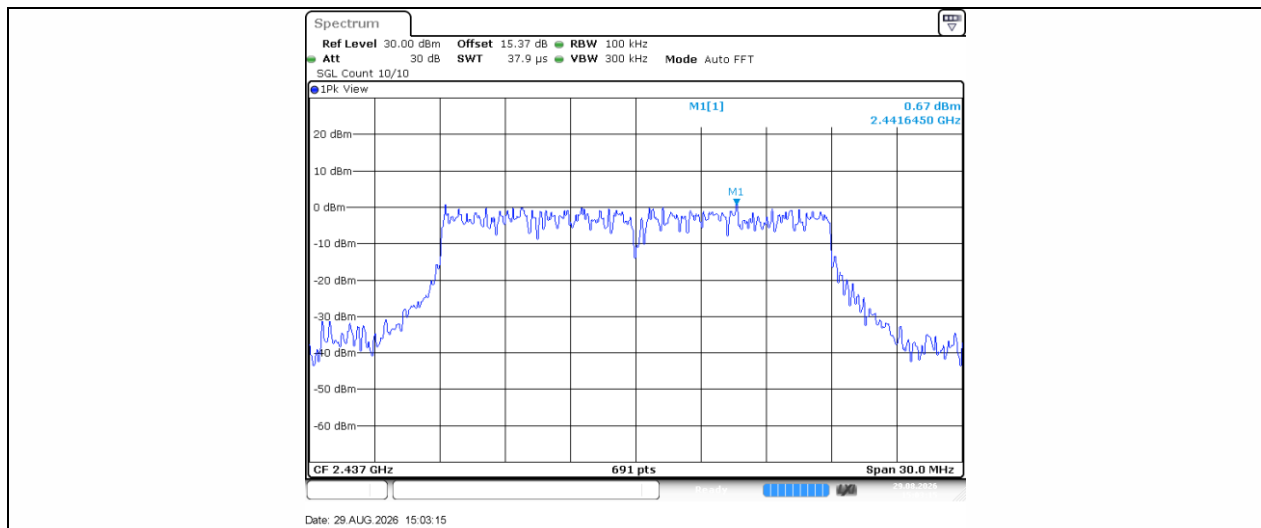


11N20SISO-Ant1-2437-0~Reference-PASS

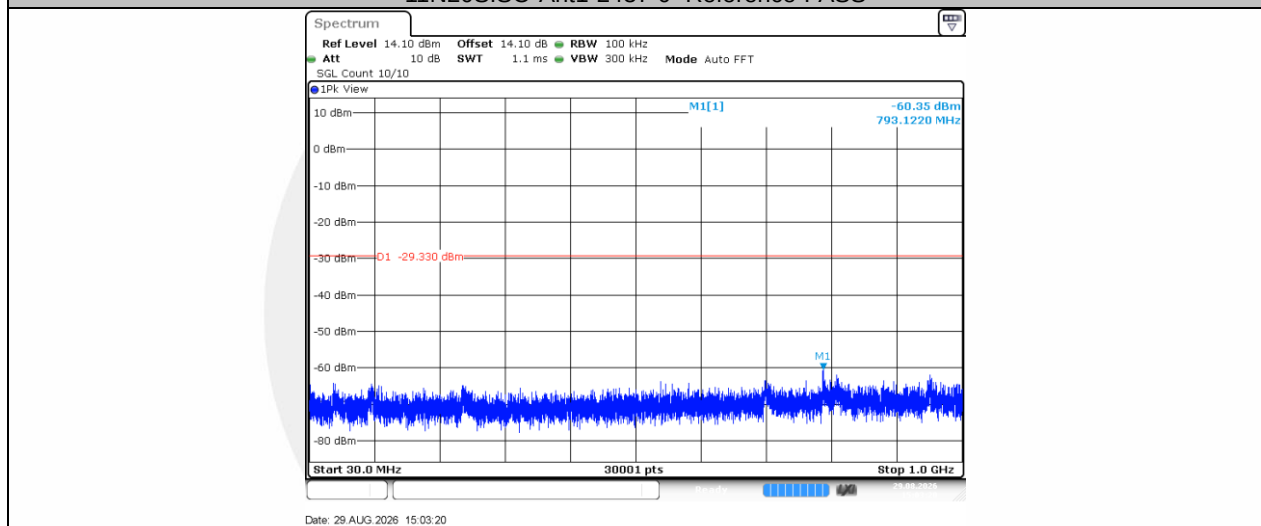


11N20SISO-Ant1-2437-30~1000-PASS

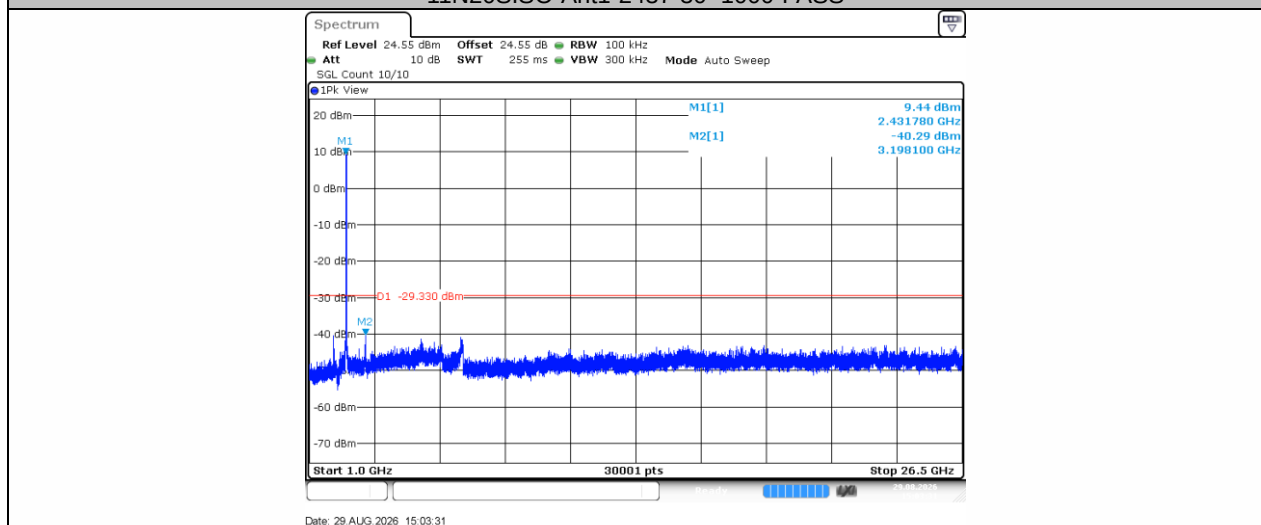


11N20SISO-Ant1-2437-1000~26500-PASS

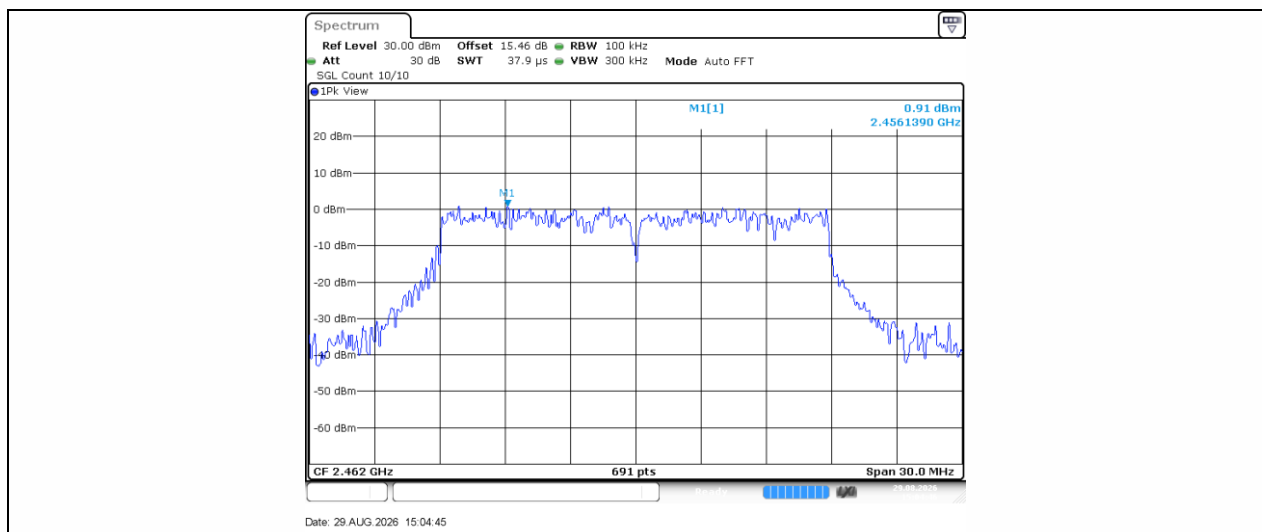


11N20SISO-Ant1-2462-0~Reference-PASS

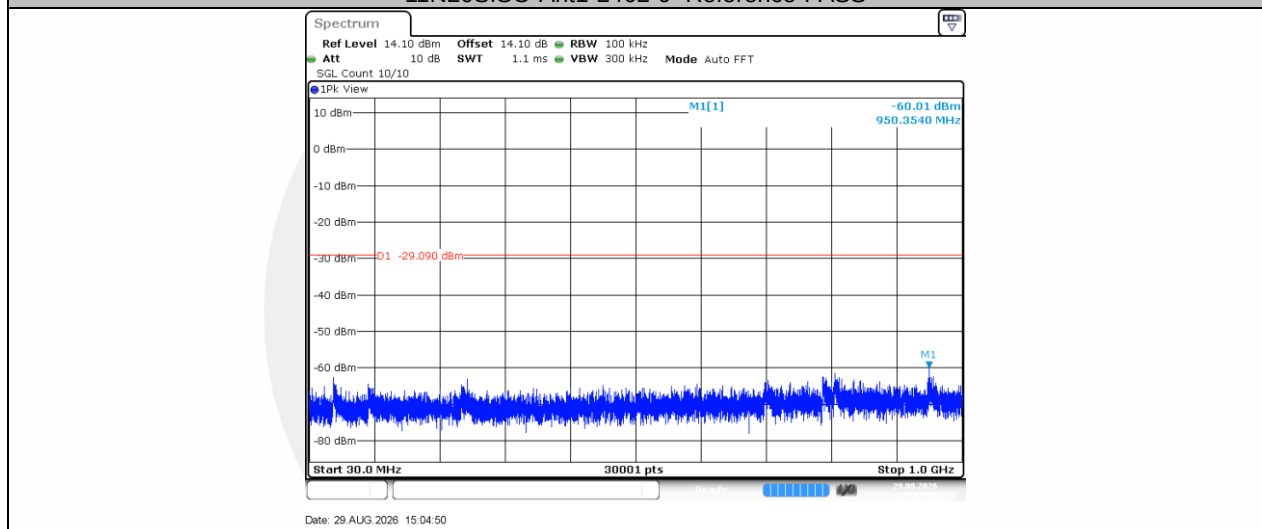


11N20SISO-Ant1-2462-30~1000-PASS

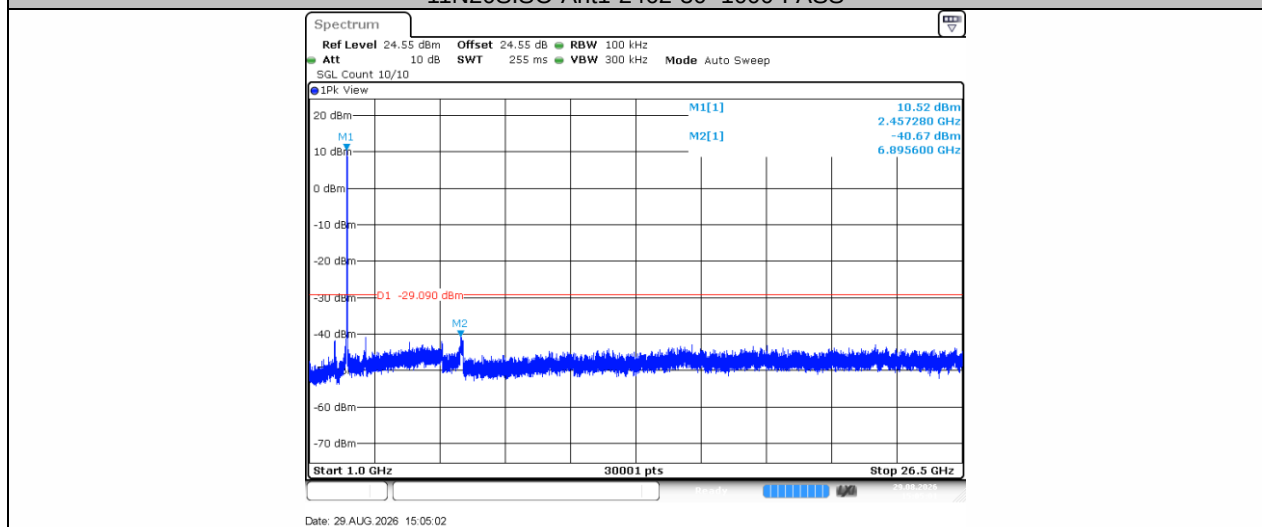


11N20SISO-Ant1-2462-1000~26500-PASS

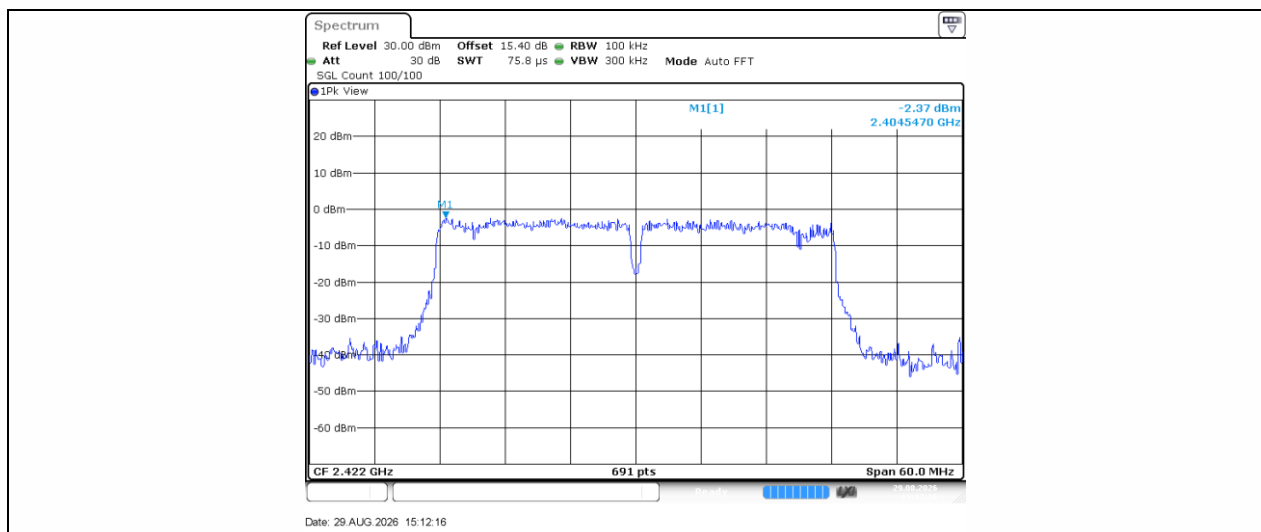


11N40SISO-Ant1-2422-0~Reference-PASS

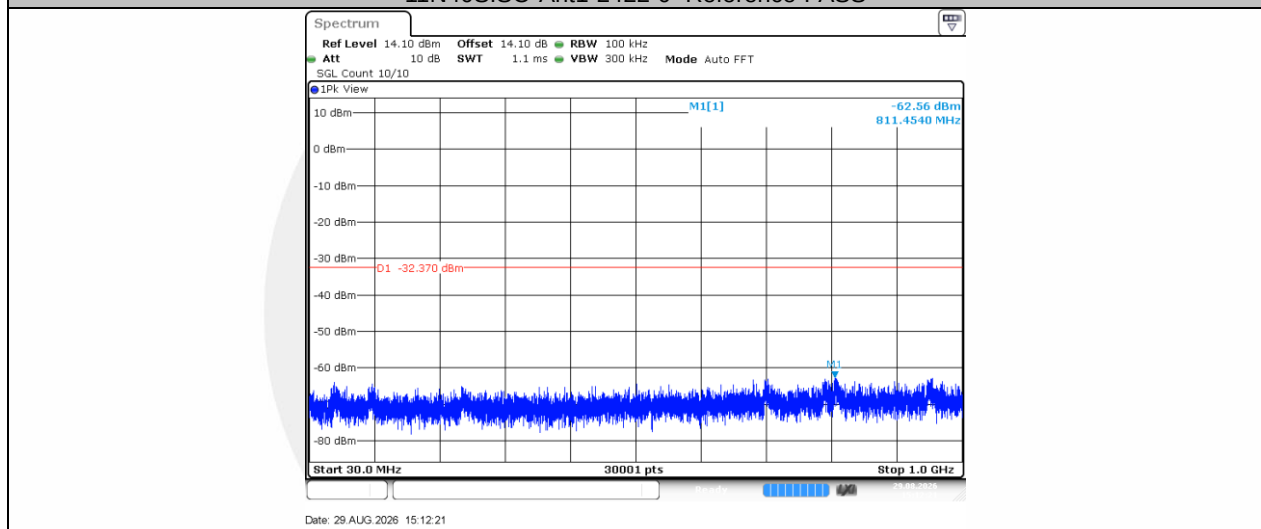


11N40SISO-Ant1-2422-30~1000-PASS

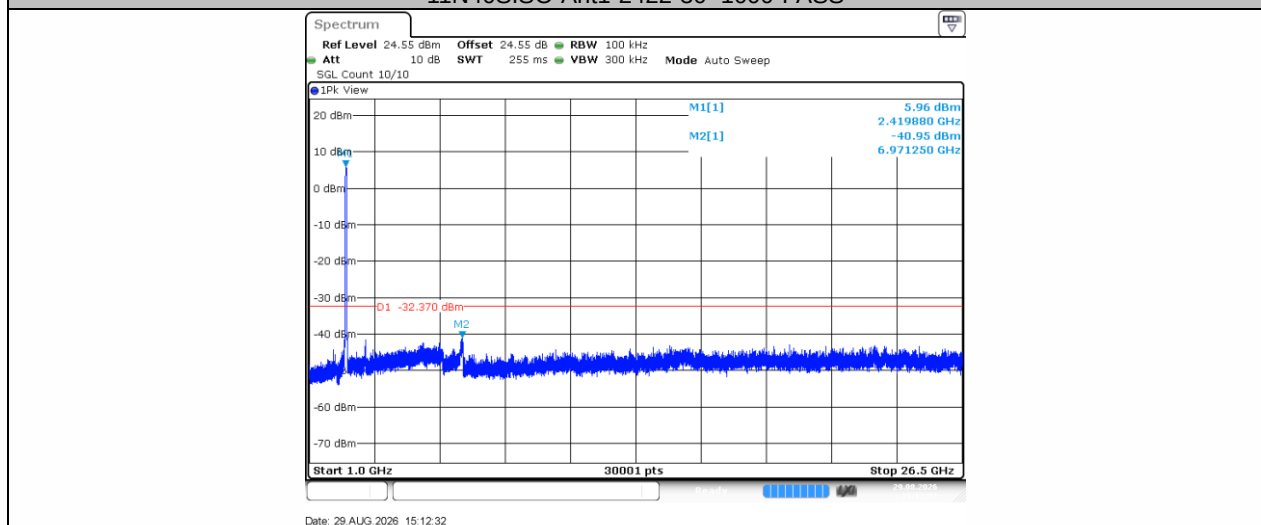


11N40SISO-Ant1-2422-1000~26500-PASS

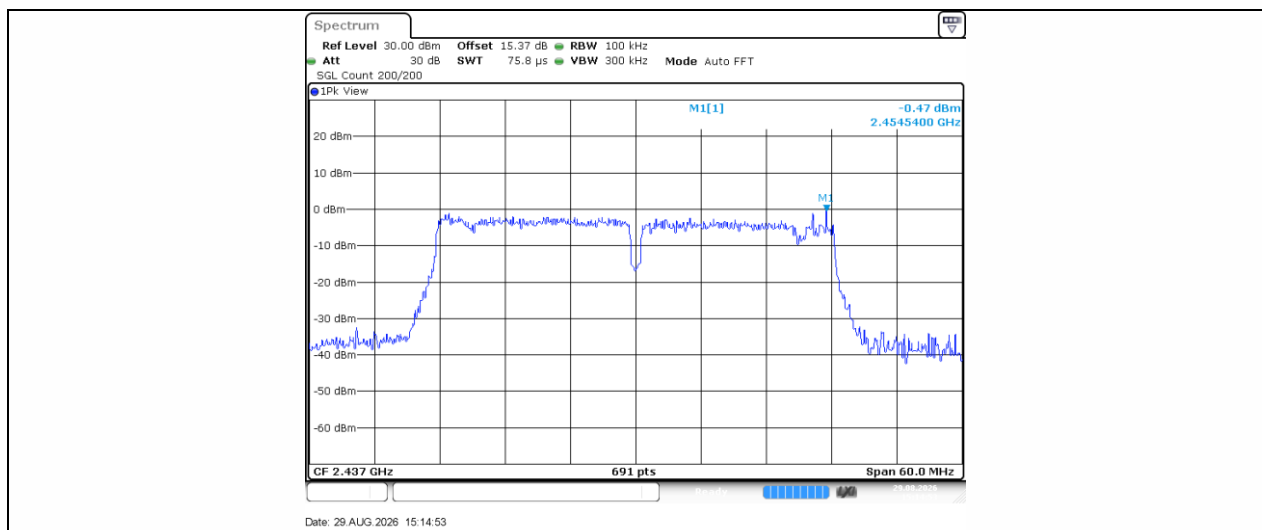


11N40SISO-Ant1-2437-0~Reference-PASS

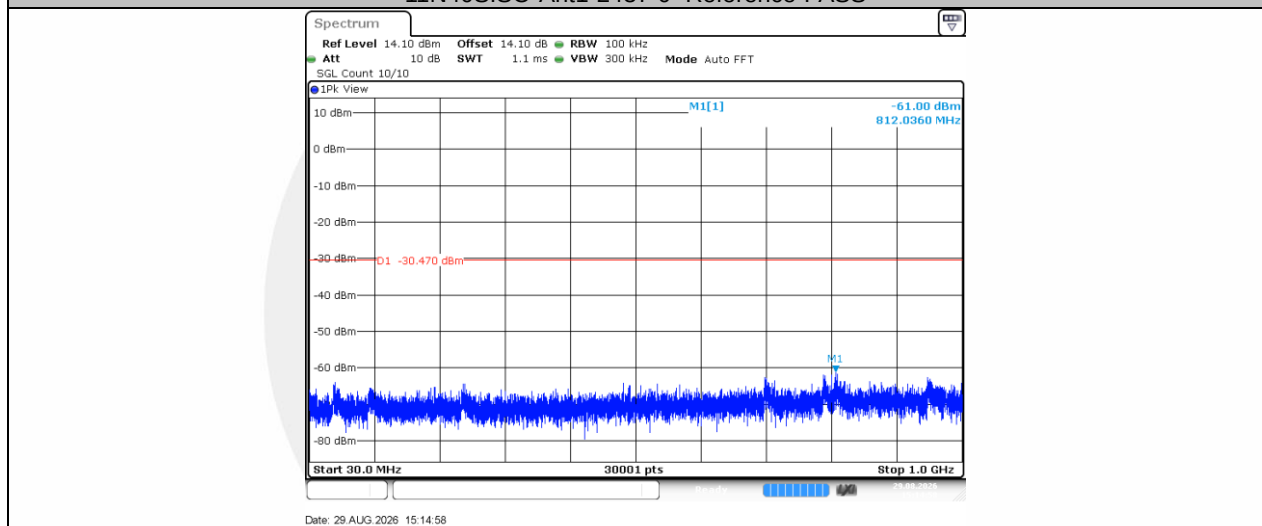


11N40SISO-Ant1-2437-30~1000-PASS

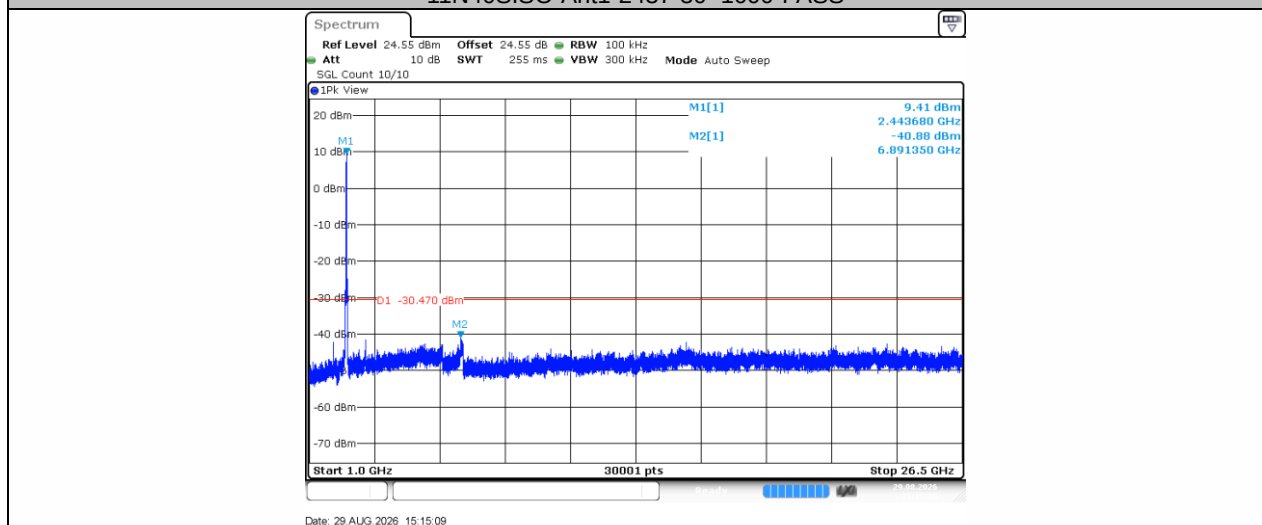


11N40SISO-Ant1-2437-1000~26500-PASS

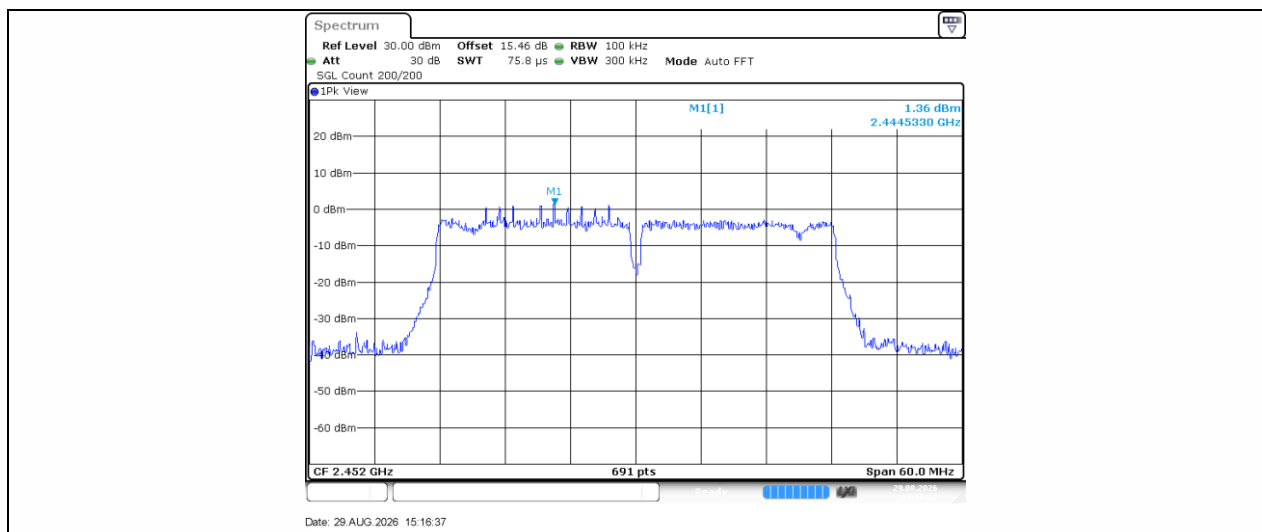


11N40SISO-Ant1-2452-0~Reference-PASS

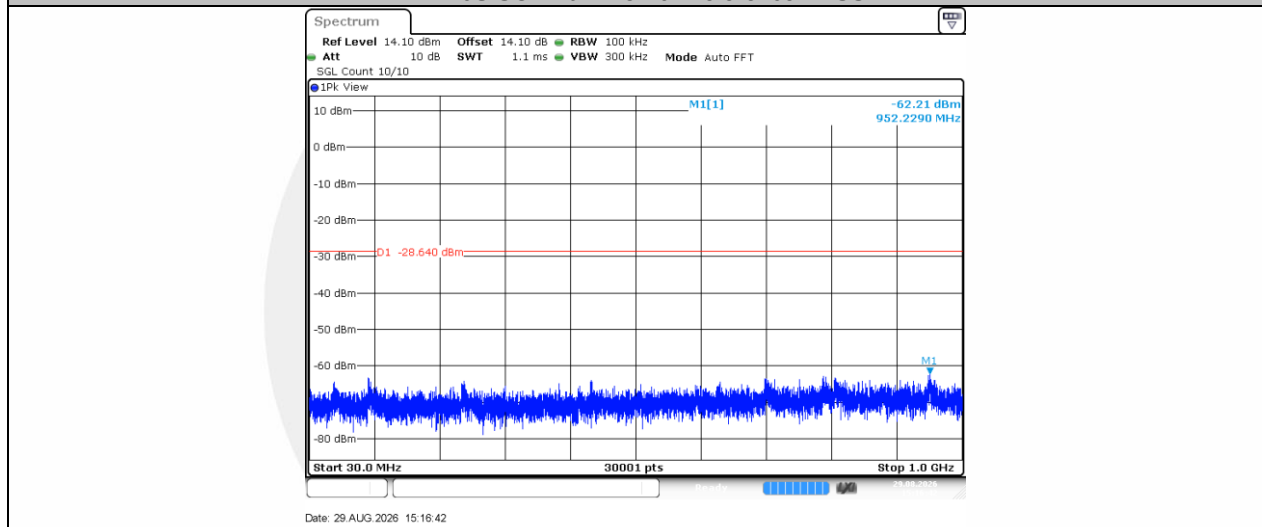


11N40SISO-Ant1-2452-30~1000-PASS

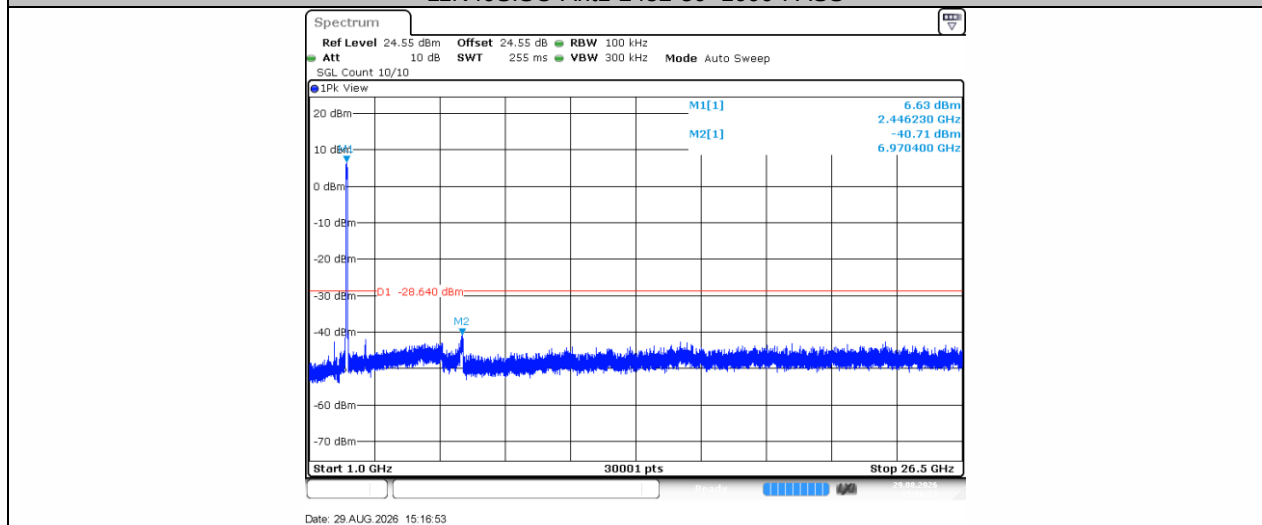


11N40SISO-Ant1-2452-1000~26500-PASS

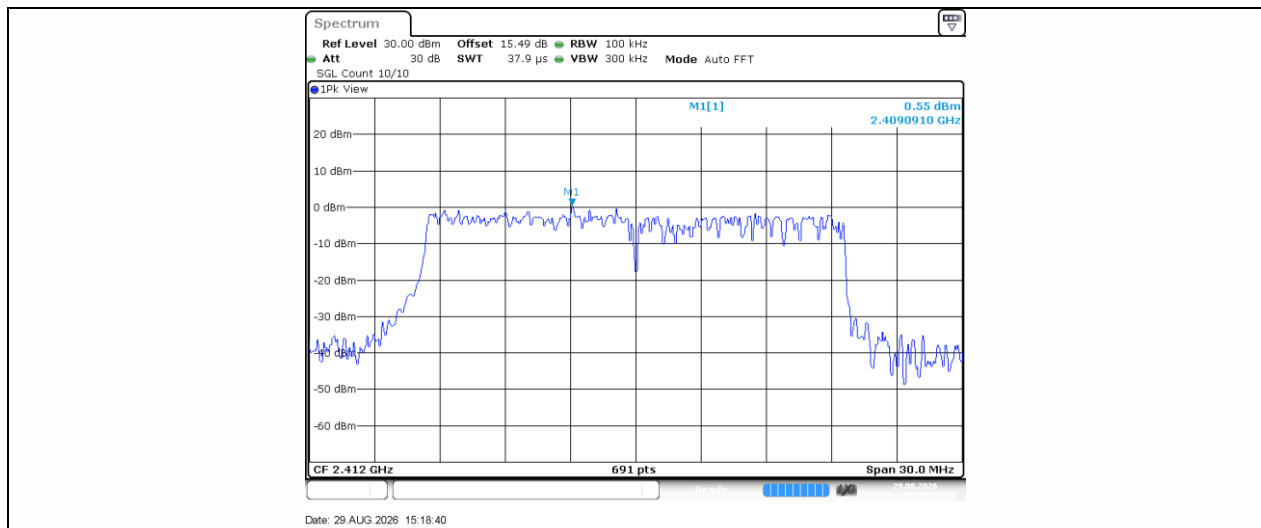




11AX20SISO-Ant1-2412-0~Reference-PASS



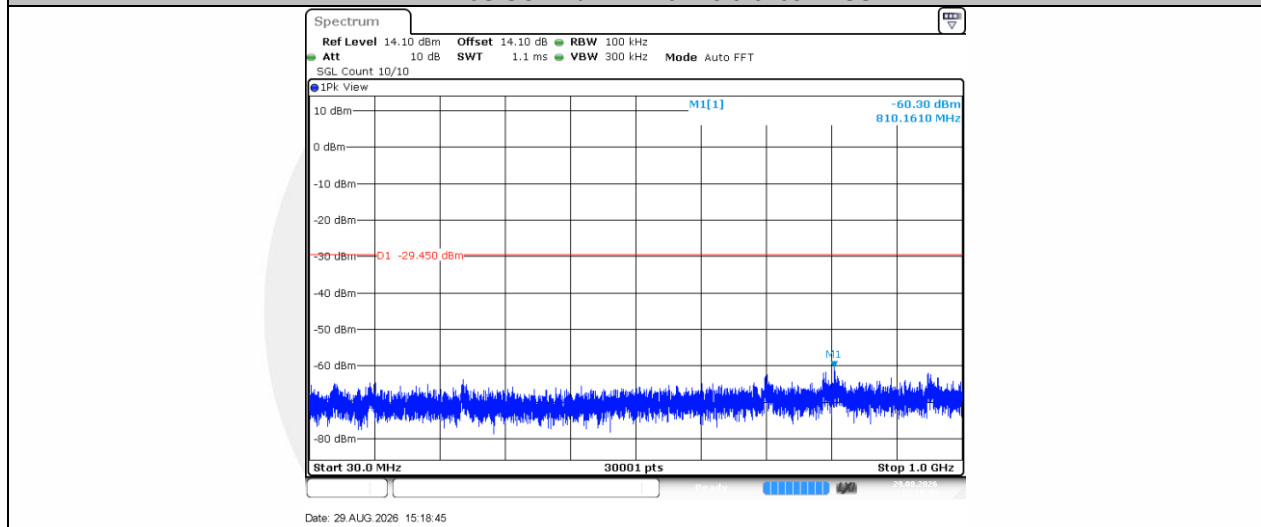



11AX20SISO-Ant1-2412-30~1000-PASS

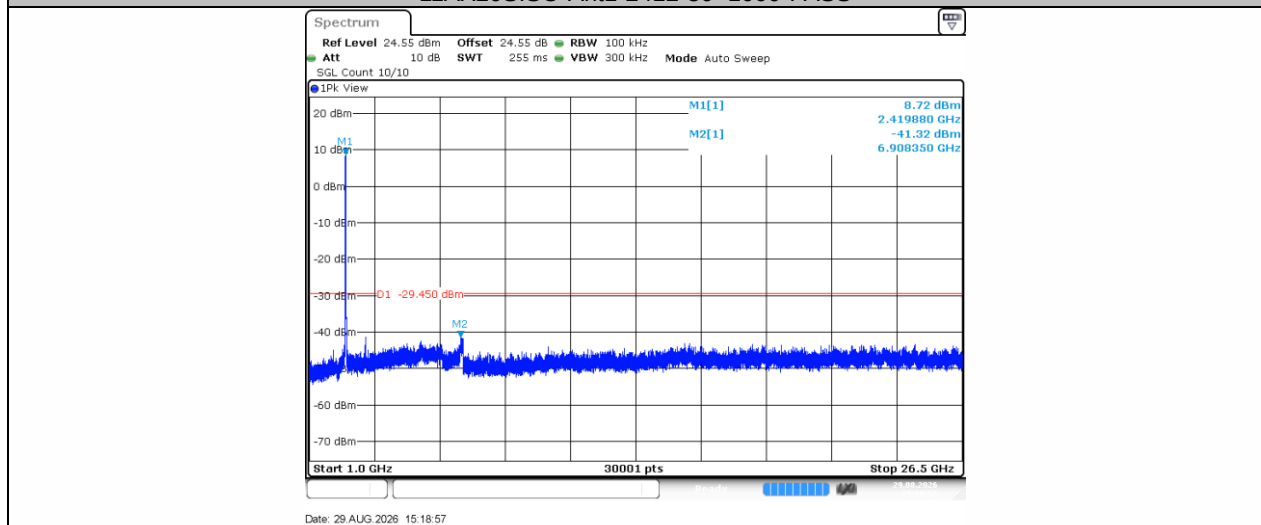


11AX20SISO-Ant1-2412-1000~26500-PASS

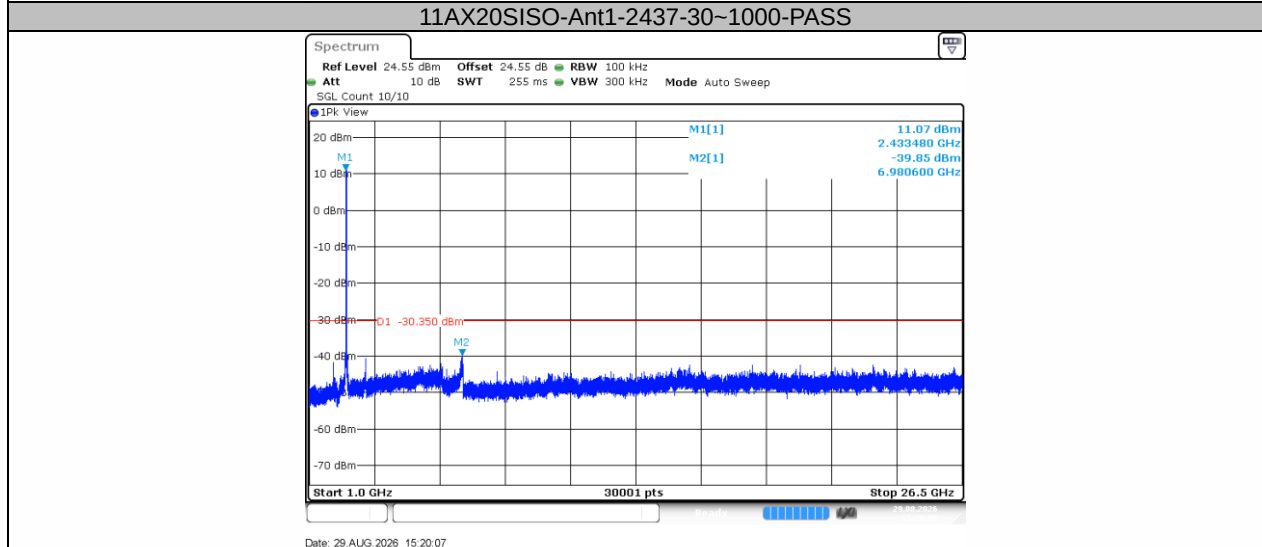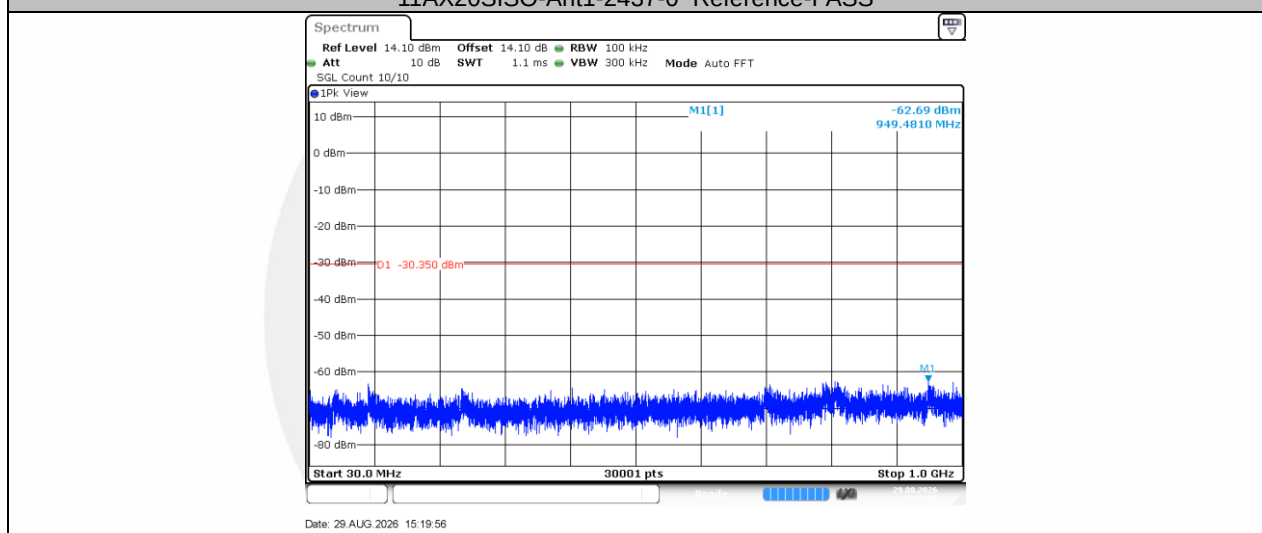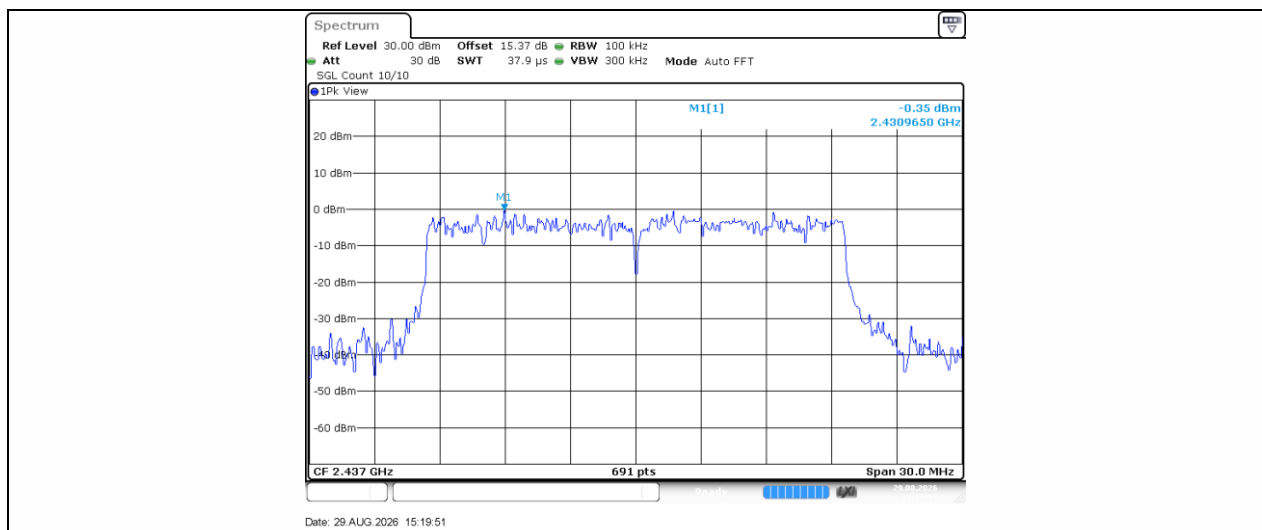

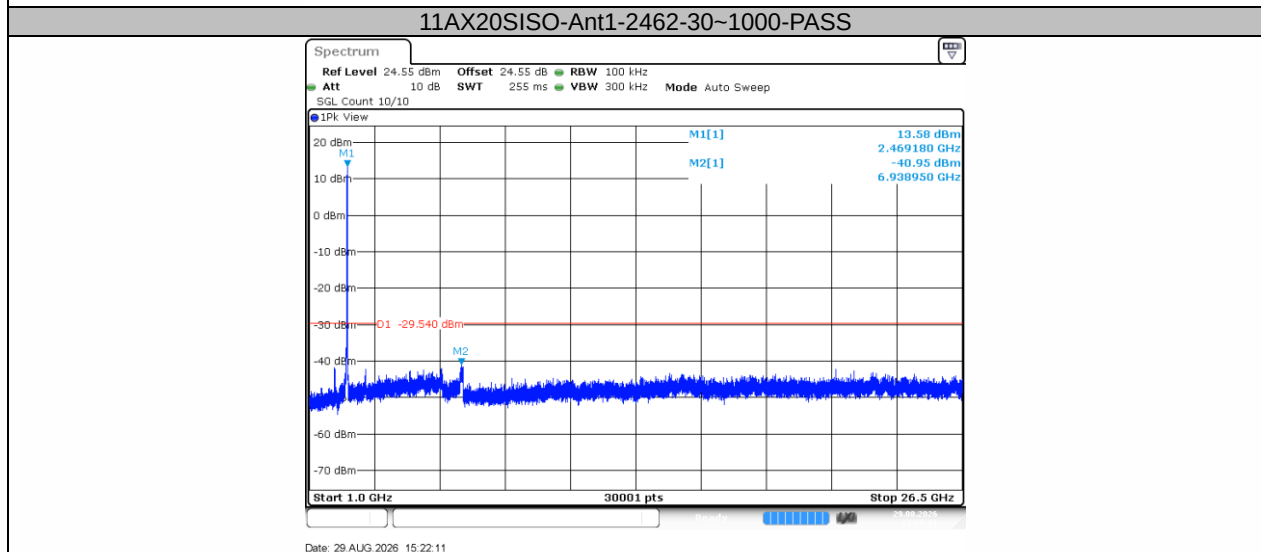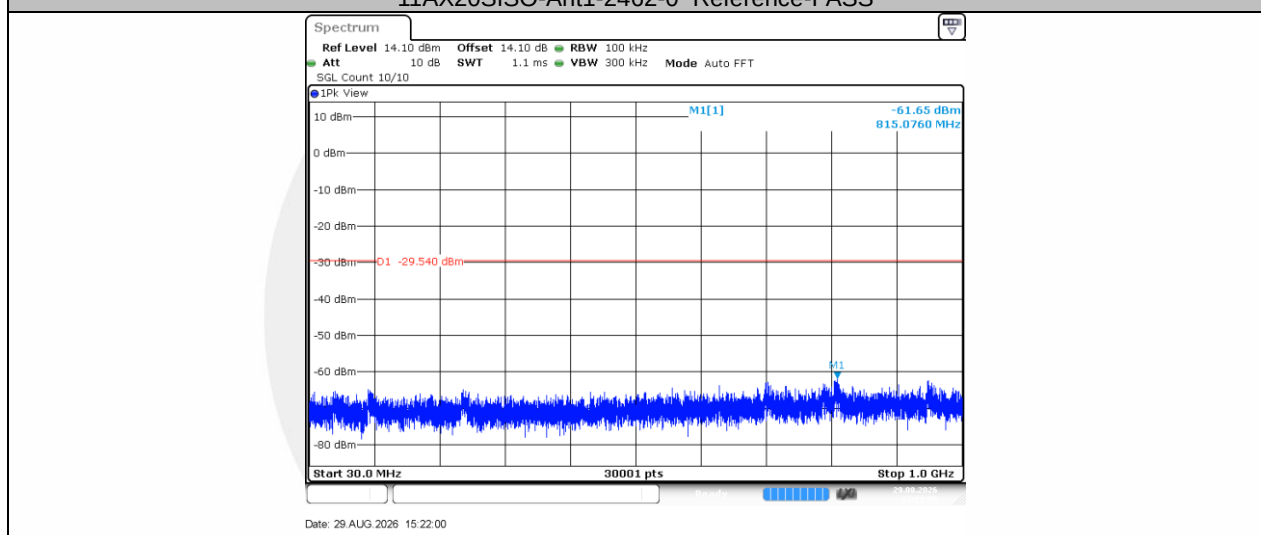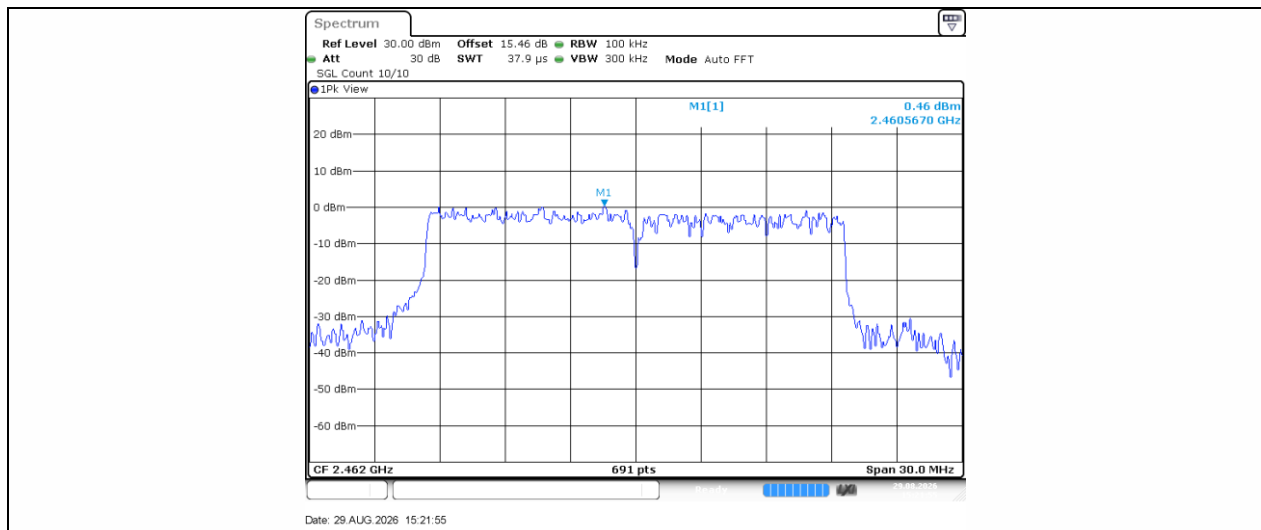


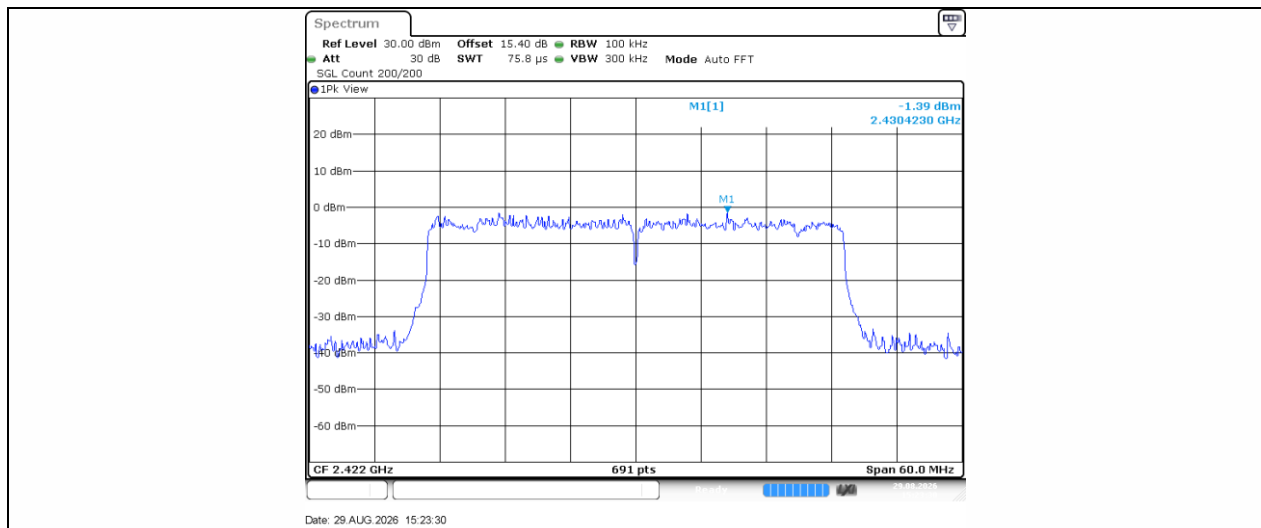


11AX40SISO-Ant1-2422-0~Reference-PASS

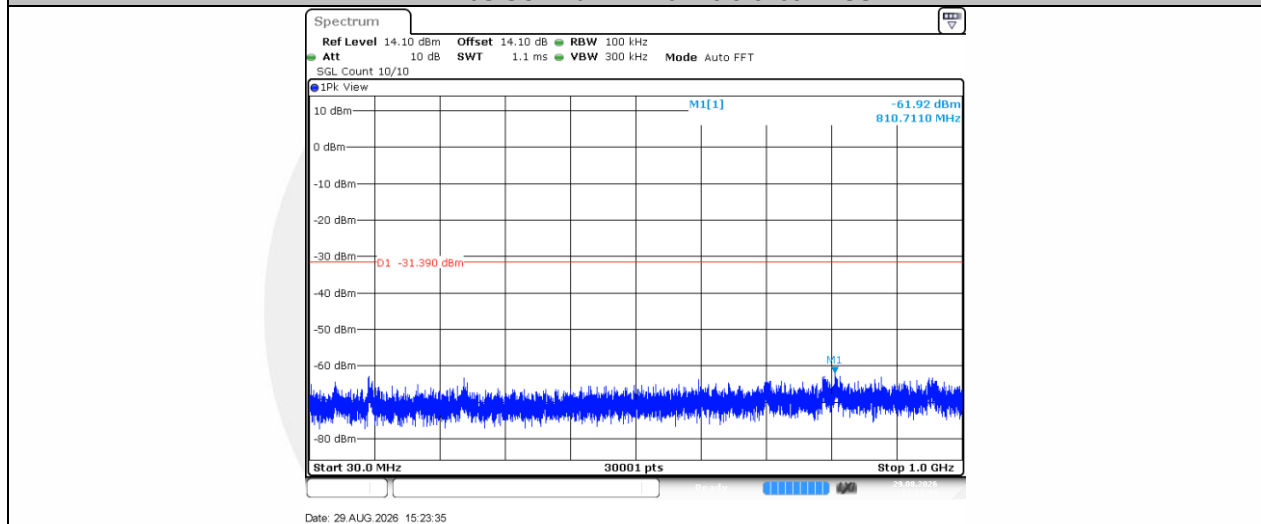


11AX40SISO-Ant1-2422-30~1000-PASS

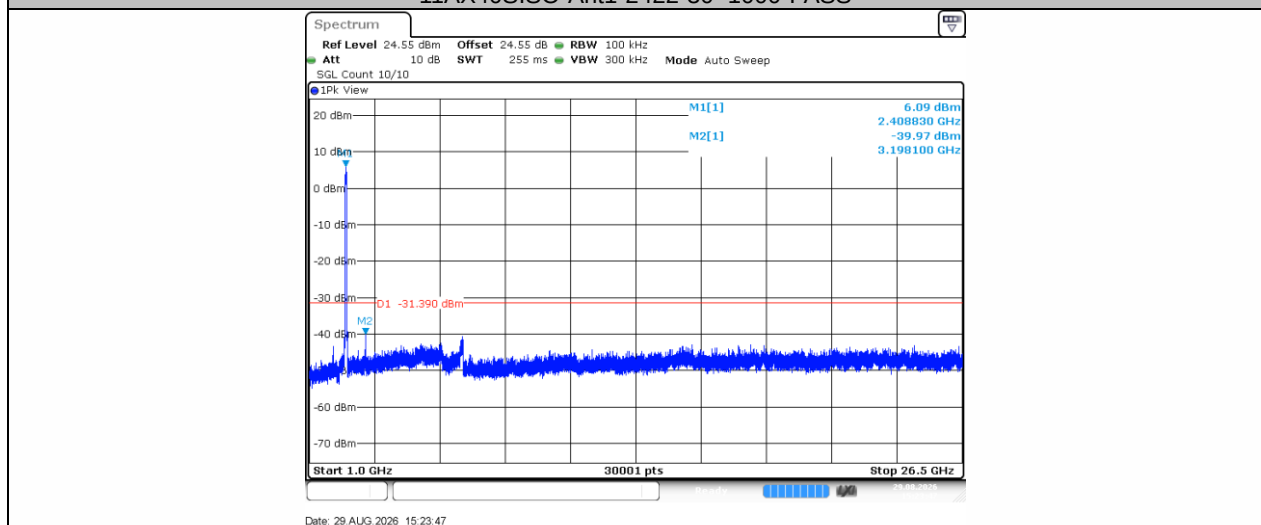


11AX40SISO-Ant1-2422-1000~26500-PASS

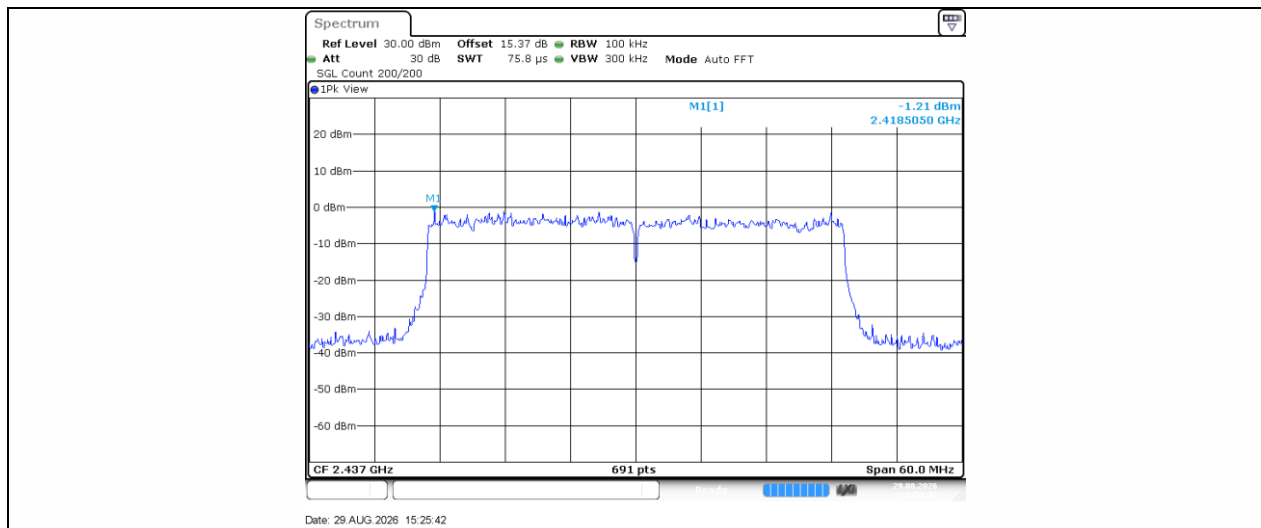


11AX40SISO-Ant1-2437-0~Reference-PASS

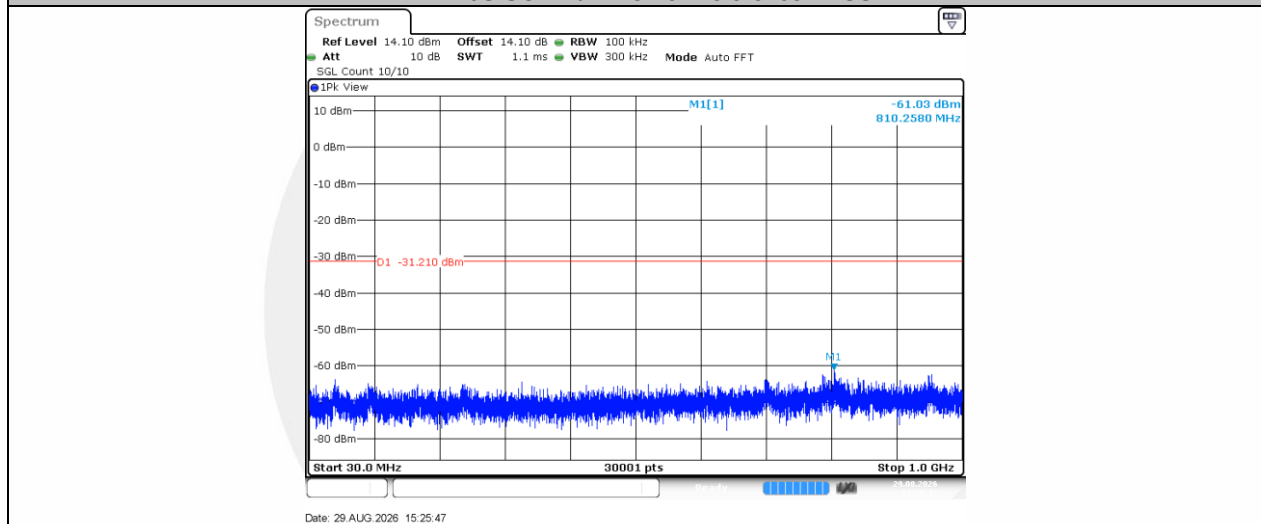


11AX40SISO-Ant1-2437-30~1000-PASS

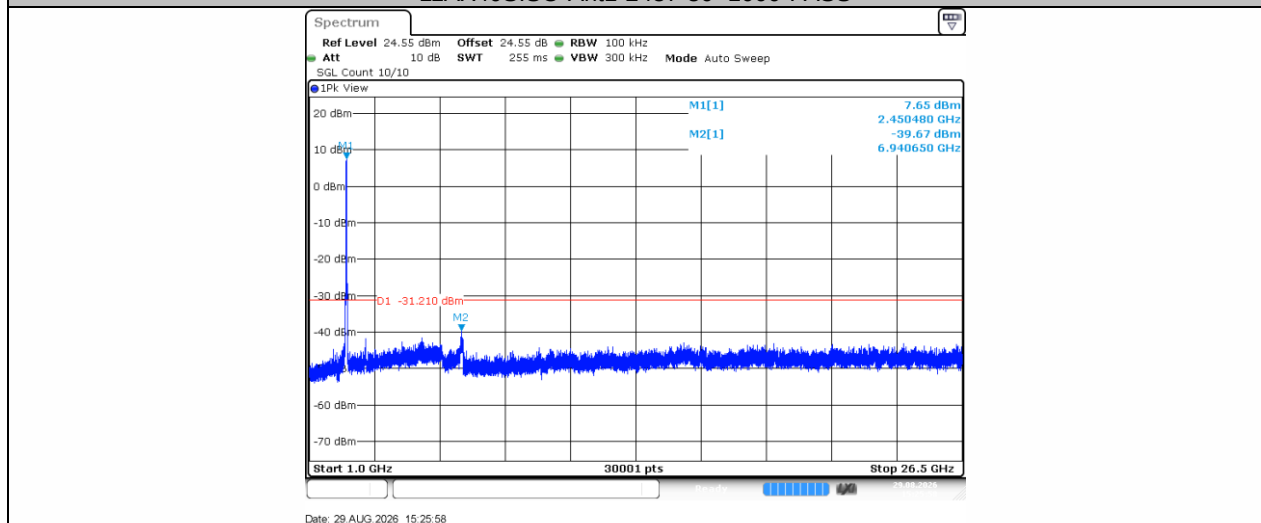


11AX40SISO-Ant1-2437-1000~26500-PASS

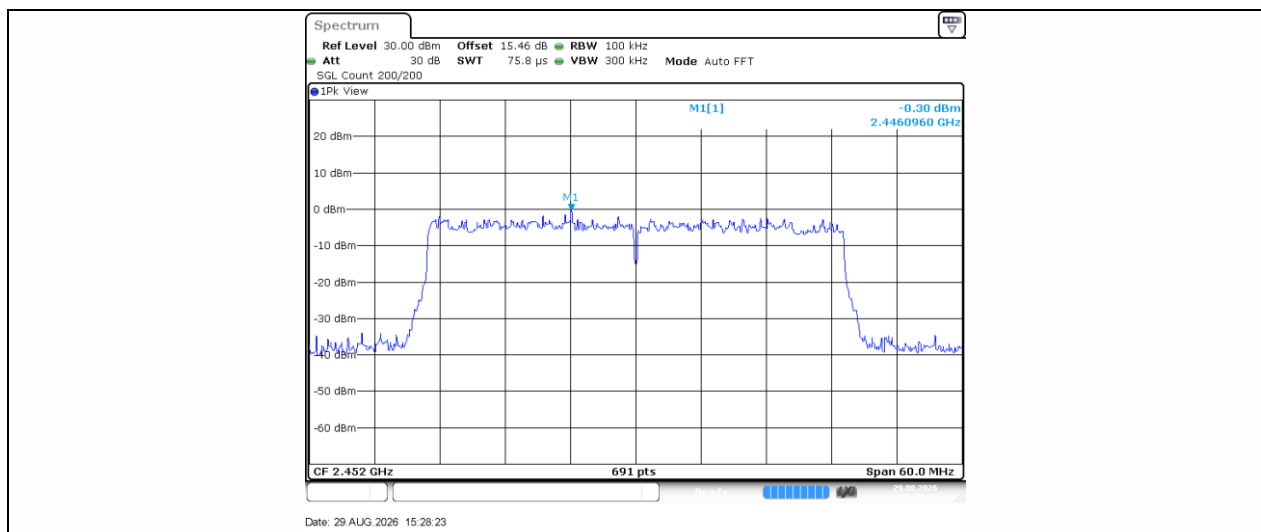

11AX40SISO-Ant1-2452-0~Reference-PASS

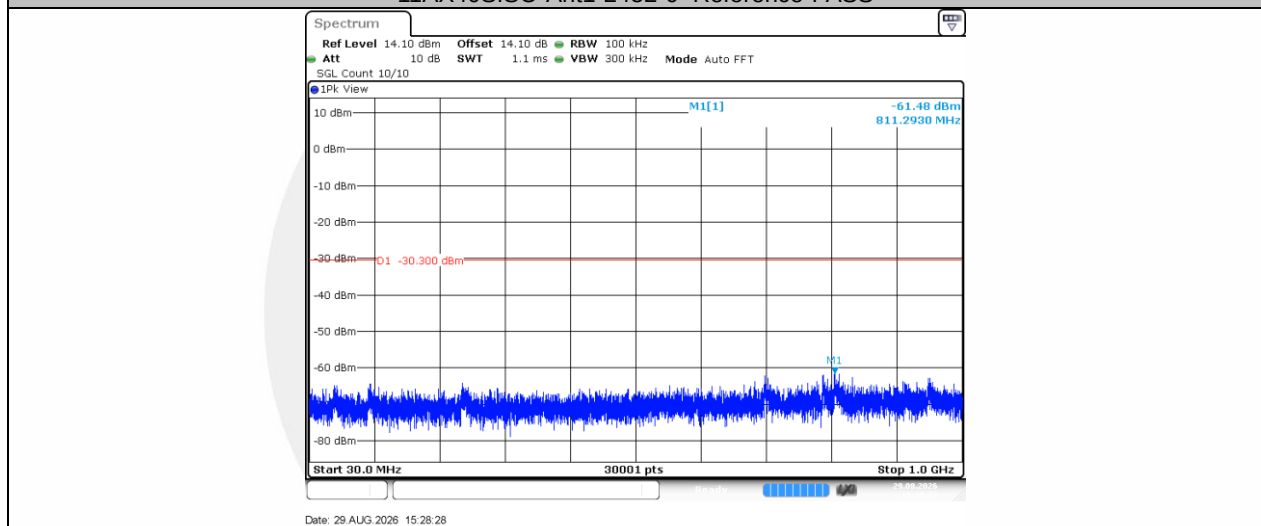

11AX40SISO-Ant1-2452-30~1000-PASS

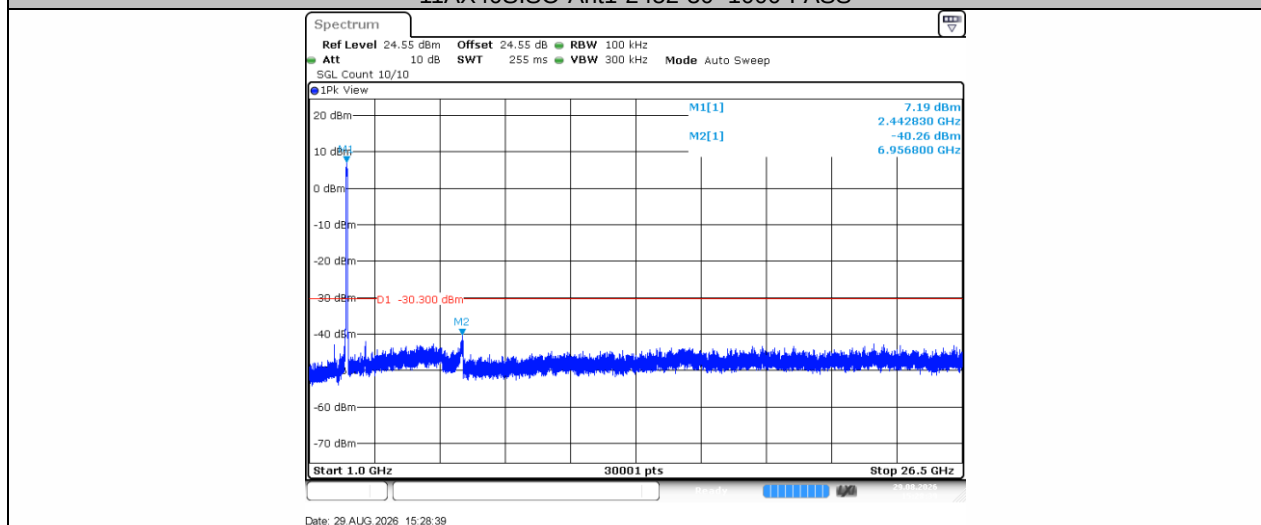

11AX40SISO-Ant1-2452-1000~26500-PASS

8.5 RADIATED EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205 the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

Pass

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	25° C
Relative Humidity:	60%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Margin(dB)	Detector
4830	V	43.88	74.00	30.12	peak
8356.875	V	55.39	74.00	18.61	peak
17998.125	V	67.03	74.00	6.97	peak
4830	V	30.43	54.00	23.57	AVG
8356.875	V	36.44	54.00	17.56	AVG
17998.125	V	47.36	54.00	6.64	AVG
4858.125	H	44.87	74.00	29.13	peak
8311.875	H	55.85	74.00	18.15	peak
17977.5	H	67.45	74.00	6.55	peak
4858.125	H	29.83	54.00	24.17	AVG
8311.875	H	36.45	54.00	17.55	AVG
17977.5	H	46.62	54.00	7.38	AVG

Test mode: 802.11 b Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Margin(dB)	Detector
4813.125	V	43.51	74.00	30.49	peak
8381.25	V	55.84	74.00	18.16	peak
17960.625	V	66.63	74.00	7.37	peak
4813.125	V	30.11	54.00	23.89	AVG
8381.25	V	36.58	54.00	17.42	AVG
17960.625	V	45.74	54.00	8.26	AVG
4846.875	H	43.82	74.00	30.18	peak
8315.625	H	55.56	74.00	18.44	peak
17996.25	H	66.61	74.00	7.39	peak
4846.875	H	30.51	54.00	23.49	AVG
8315.625	H	36.10	54.00	17.90	AVG
17996.25	H	47.34	54.00	6.66	AVG

Test mode: 802.11 b Frequency: Channel 11: 2462MHz


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Margin(dB)	Detector
4861.875	V	44.22	74.00	29.78	peak
8298.75	V	55.75	74.00	18.25	peak
17994.375	V	66.92	74.00	7.08	peak
4861.875	V	29.83	54.00	24.17	AVG
8298.75	V	36.45	54.00	17.55	AVG
17994.375	V	47.08	54.00	6.92	AVG
4882.5	H	44.12	74.00	29.88	peak
8332.5	H	56.02	74.00	17.98	peak
17970	H	66.89	74.00	7.11	peak
4882.5	H	30.51	54.00	23.49	AVG
8332.5	H	36.58	54.00	17.42	AVG
17970	H	46.10	54.00	7.90	AVG

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Corrected Reading= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Margin = Limit - Corrected Reading
(5)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


■ Spurious Emission above 1GHz (1GHz to 18GHz)

All modes have been tested, and the worst result recorded was report as below:


Test mode: GFSK Frequency: Channel 1: 2412MHz V

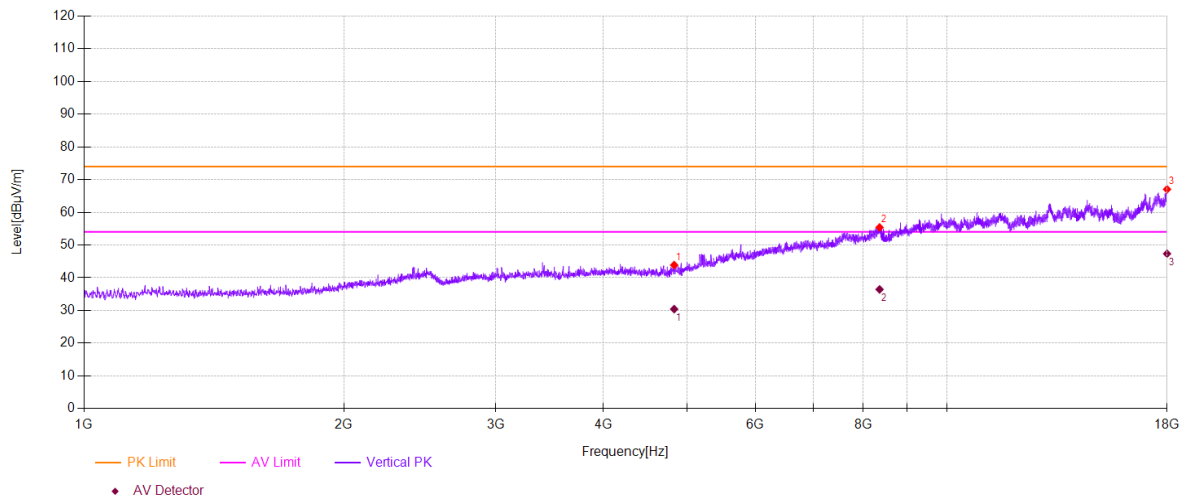


Test mode: GFSK Frequency: Channel 1: 2412MHz H

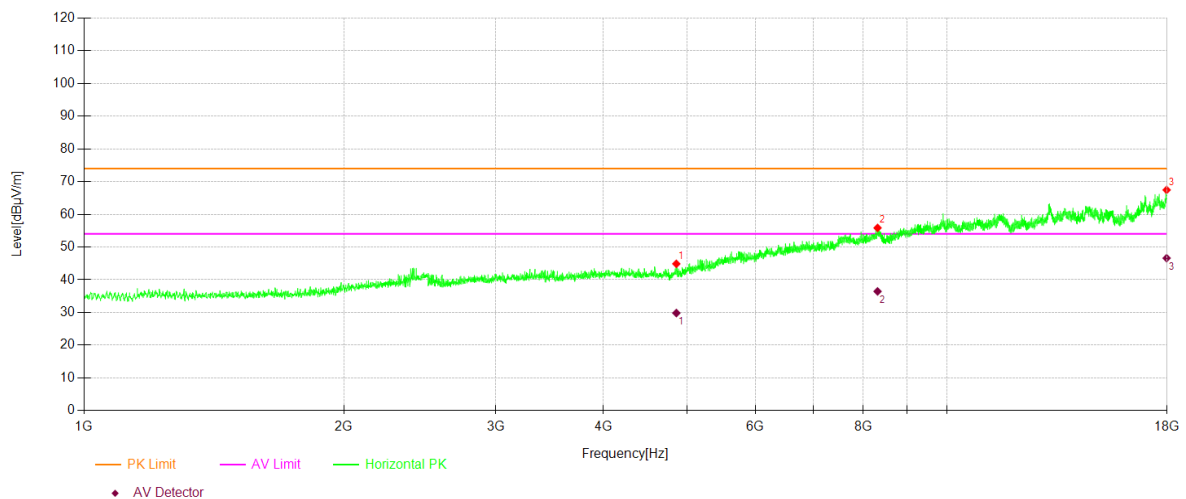


Test mode: GFSK Frequency: Channel 6: 2437MHz V

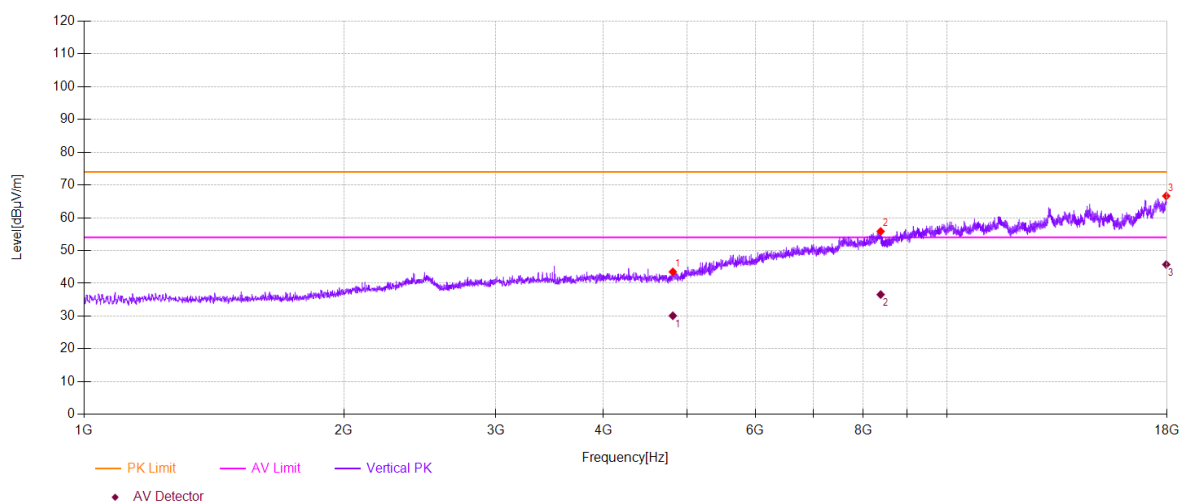


Test mode: GFSK Frequency: Channel 6: 2437MHz H

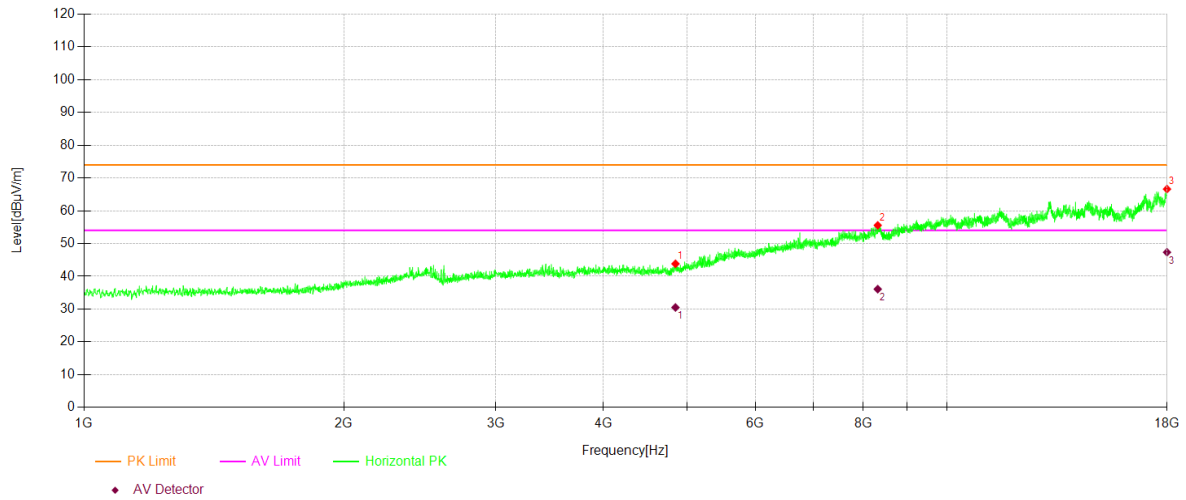

Test mode: GFSK Frequency: Channel 11: 2462MHz V

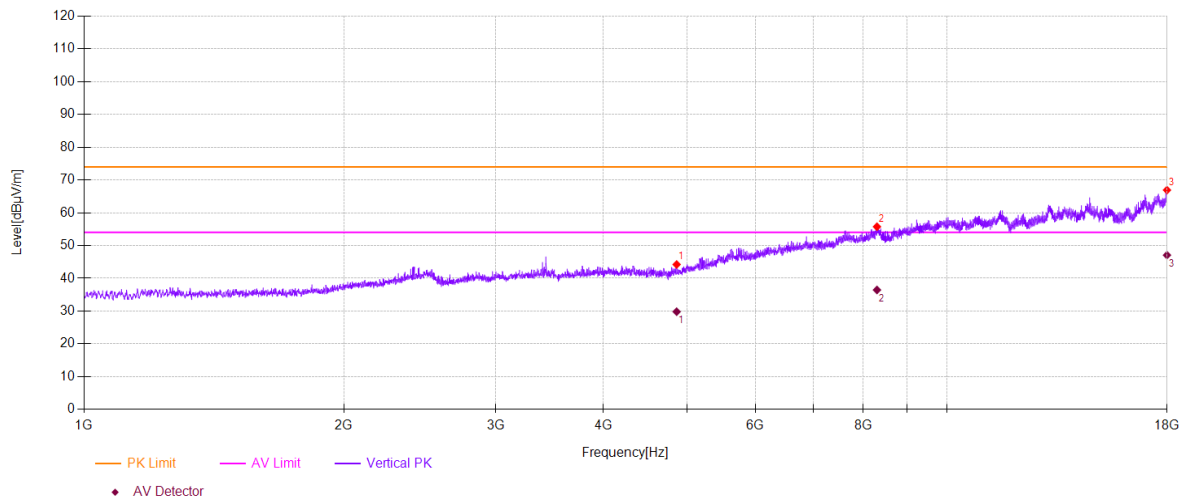

Test mode: GFSK Frequency: Channel 11: 2462MHz H

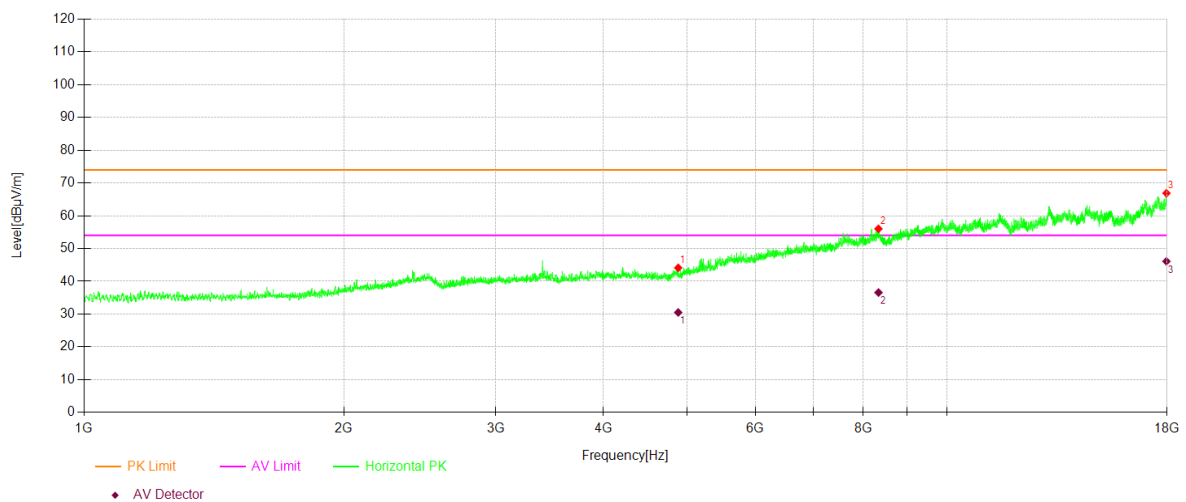

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
All modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Test mode: 802.11AC Frequency: Channel 1: 2412MHz


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Margin(dB)	Detector
2380.98	V	44.22	74.00	29.78	peak
2380.98	V	36.72	54.00	17.28	AVG
2378.92	H	43.74	74.00	30.26	peak
2378.92	H	36.76	54.00	17.24	AVG

Test mode: 802.11 AC Frequency: Channel 11: 2462MHz


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Margin(dB)	Detector
2484.61	V	43.93	74.00	30.07	peak
2484.61	V	36.63	54.00	17.37	AVG
2485.55	H	44.23	74.00	29.77	peak
2485.55	H	36.47	54.00	17.53	AVG

Note: (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
(2) Corrected Reading= Reading Level+Correct Factor.
(3) Correct Factor= Ant_F + Cab_L - Preamp
(4) Margin = Limit - Corrected Reading
(5)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	☐ 802.11b	☐ 802.11g	☒ 802.11ax(BE20)	☐ 802.11ax(BE40)
	☒ Channel 1: 2412MHz	☐ Channel 3: 2422MHz	Polarity: H	
	VBW=3MHz			

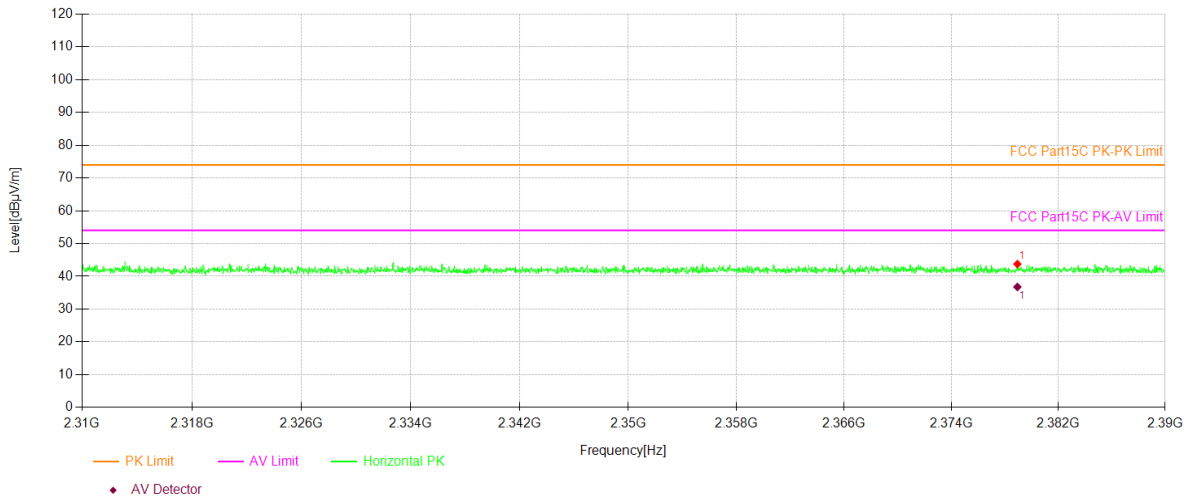

Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	☐ 802.11b	☐ 802.11g	☒ 802.11ax(BE20)	☐ 802.11ax(BE40)
	☒ Channel 1:2412MHz	☐ Channel 3: 2422MHz	Polarity:V	
	VBW=3MHz			

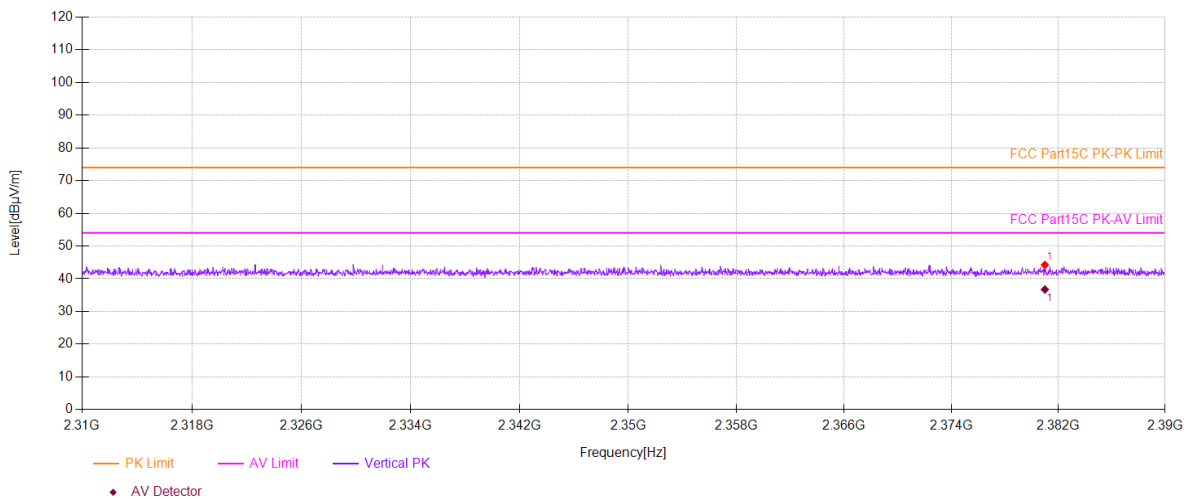


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model ☐ 802.11b ☐ 802.11g ☐ 802.11ax(BE20) ☒ 802.11ax(BE40)

☒ Channel 11: 2462MHz ☐ Channel 9: 2452MHz

VBW=3MHz

Polarity: H

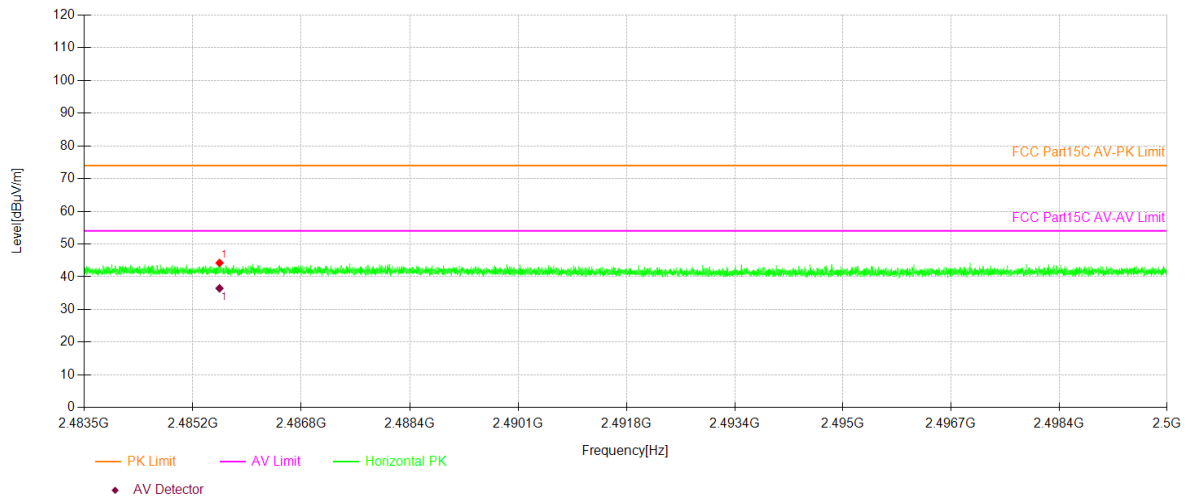


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model ☐ 802.11b ☐ 802.11g ☐ 802.11ax(BE20) ☒ 802.11ax(BE40)

☒ Channel 11: 2462MHz ☐ Channel 9: 2452MHz

VBW=3MHz


Polarity: V

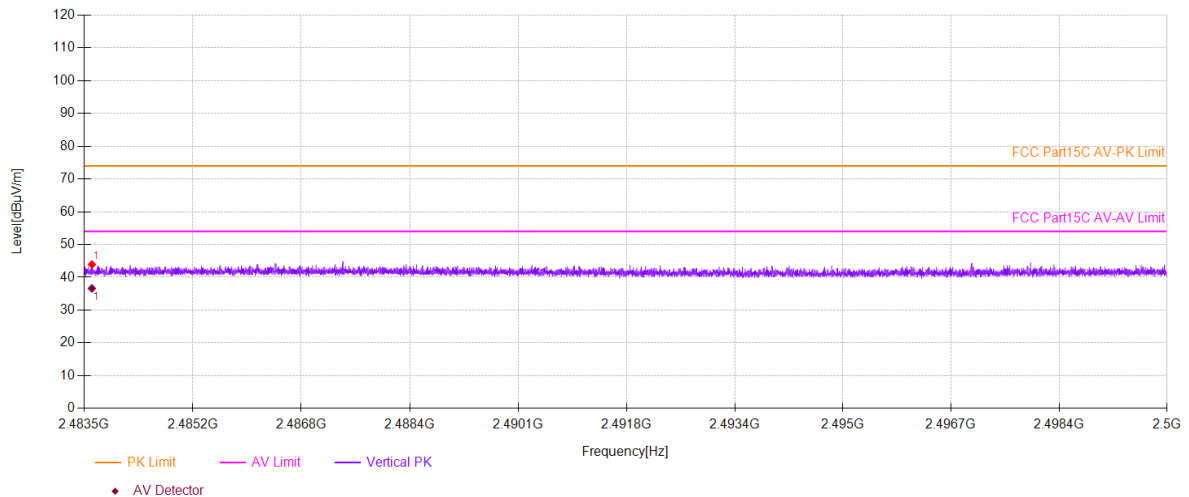

■ Spurious Emission below 1GHz (30MHz to 1GHz)

All antenna modes 2.4G 802.11b/g/n/ax have been tested, and the worst result 802.11n20 recorded was report as below:

2412

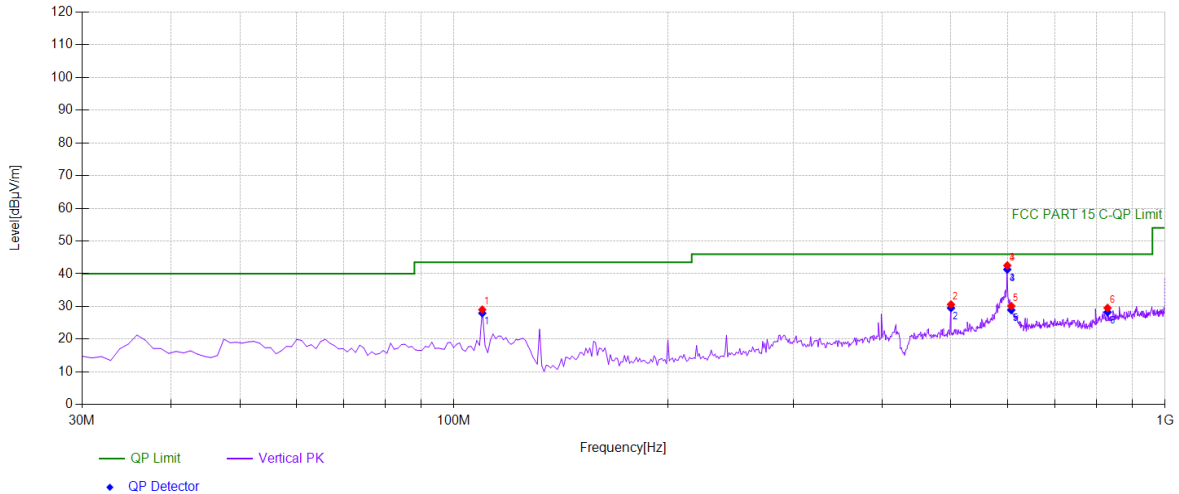


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	109.6196	41.33	-12.30	29.03	PK	43.50	14.47	Vertical
2	499.95	34.04	-3.43	30.61	PK	46.00	15.39	Vertical
3	599.96	42.37	0.16	42.53	PK	46.00	3.47	Vertical
4	599.96	42.37	0.16	42.53	PK	46.00	3.47	Vertical
5	607.7277	30.29	-0.15	30.14	PK	46.00	15.86	Vertical
6	830.0801	27.10	2.46	29.56	PK	46.00	16.44	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	109.6196	-12.30	27.95	43.50	15.55
2	499.95	-3.43	29.53	46.00	16.47
3	599.96	0.16	41.31	46.00	4.69
4	599.96	0.16	41.13	46.00	4.87
5	607.7277	-0.15	28.92	46.00	17.08
6	830.0801	2.46	28.26	46.00	17.74

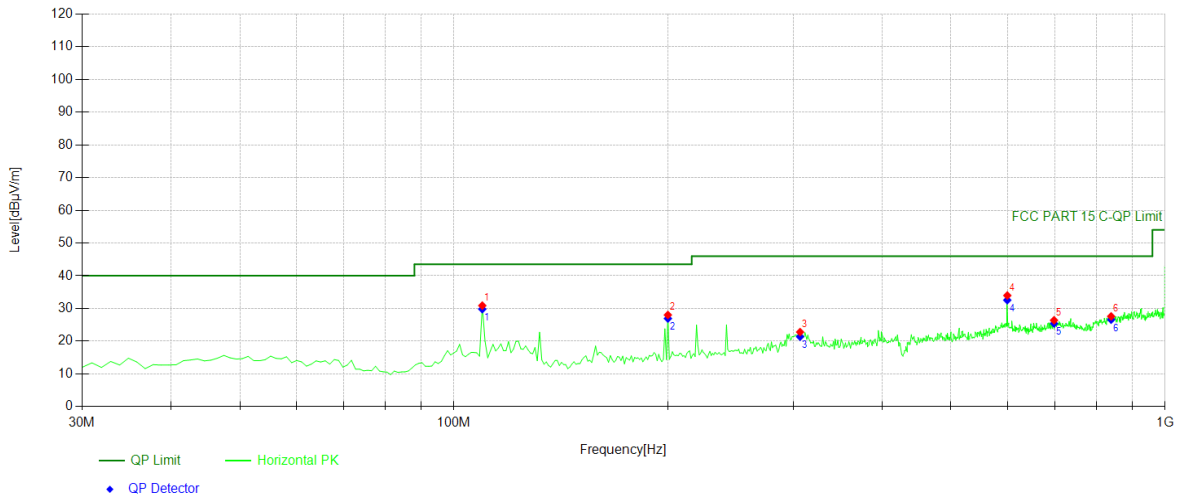


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	109.6196	43.19	-12.30	30.89	PK	43.50	12.61	Horizontal
2	199.9199	40.04	-12.01	28.03	PK	43.50	15.47	Horizontal
3	306.7267	30.61	-7.80	22.81	PK	46.00	23.19	Horizontal
4	599.96	33.81	0.16	33.97	PK	46.00	12.03	Horizontal
5	698.028	25.79	0.61	26.40	PK	46.00	19.60	Horizontal
6	839.7898	24.80	2.80	27.60	PK	46.00	18.40	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	109.6196	-12.30	29.80	43.50	13.70
2	199.9199	-12.01	26.94	43.50	16.56
3	306.7267	-7.80	21.40	46.00	24.60
4	599.96	0.16	32.56	46.00	13.44
5	698.028	0.61	25.40	46.00	20.60
6	839.7898	2.80	26.60	46.00	19.40

2437

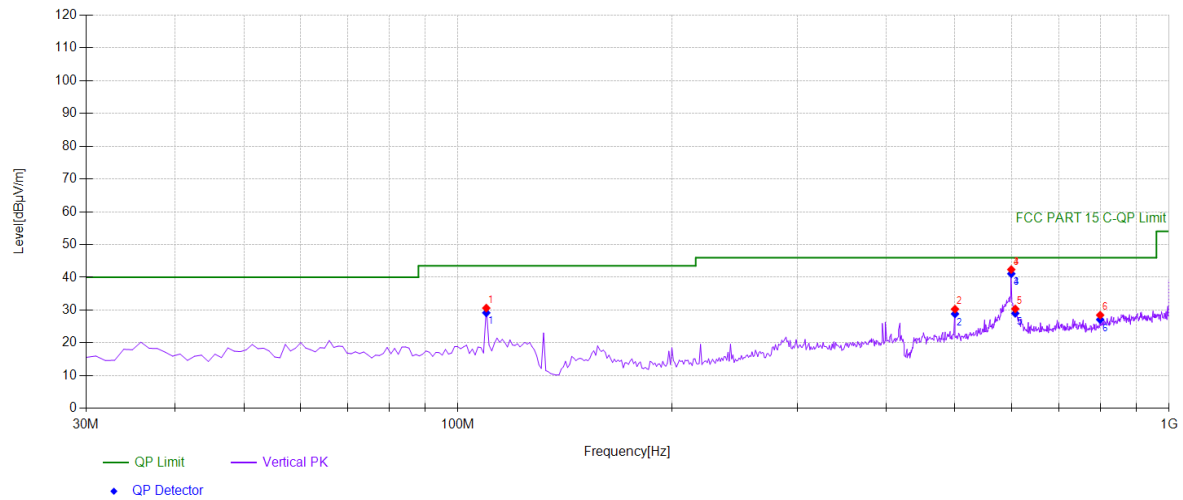


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	109.6196	42.93	-12.30	30.63	PK	43.50	12.87	Vertical
2	499.95	33.72	-3.43	30.29	PK	46.00	15.71	Vertical
3	599.96	42.22	0.16	42.38	PK	46.00	3.62	Vertical
4	599.96	42.22	0.16	42.38	PK	46.00	3.62	Vertical
5	607.7277	30.52	-0.15	30.37	PK	46.00	15.63	Vertical
6	799.98	27.32	1.16	28.48	PK	46.00	17.52	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	109.6196	-12.30	29.18	43.50	14.32
2	499.95	-3.43	28.84	46.00	17.16
3	599.96	0.16	41.10	46.00	4.90
4	599.96	0.16	41.10	46.00	4.90
5	607.7277	-0.15	29.01	46.00	16.99
6	799.98	1.16	27.12	46.00	18.88

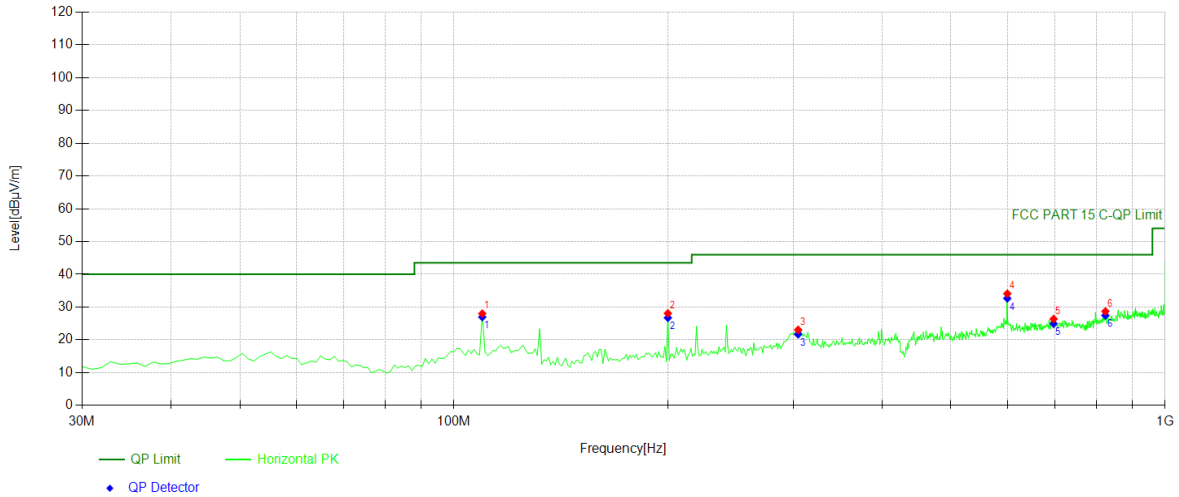


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	109.6196	40.31	-12.30	28.01	PK	43.50	15.49	Horizontal
2	199.9199	40.11	-12.01	28.10	PK	43.50	15.40	Horizontal
3	304.7848	30.90	-7.83	23.07	PK	46.00	22.93	Horizontal
4	599.96	33.94	0.16	34.10	PK	46.00	11.90	Horizontal
5	697.0571	25.81	0.57	26.38	PK	46.00	19.62	Horizontal
6	824.2543	26.73	1.98	28.71	PK	46.00	17.29	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	109.6196	-12.30	26.97	43.50	16.53
2	199.9199	-12.01	26.74	43.50	16.76
3	304.7848	-7.83	21.71	46.00	24.29
4	599.96	0.16	32.66	46.00	13.34
5	697.0571	0.57	24.94	46.00	21.06
6	824.2543	1.98	27.45	46.00	18.55

2462

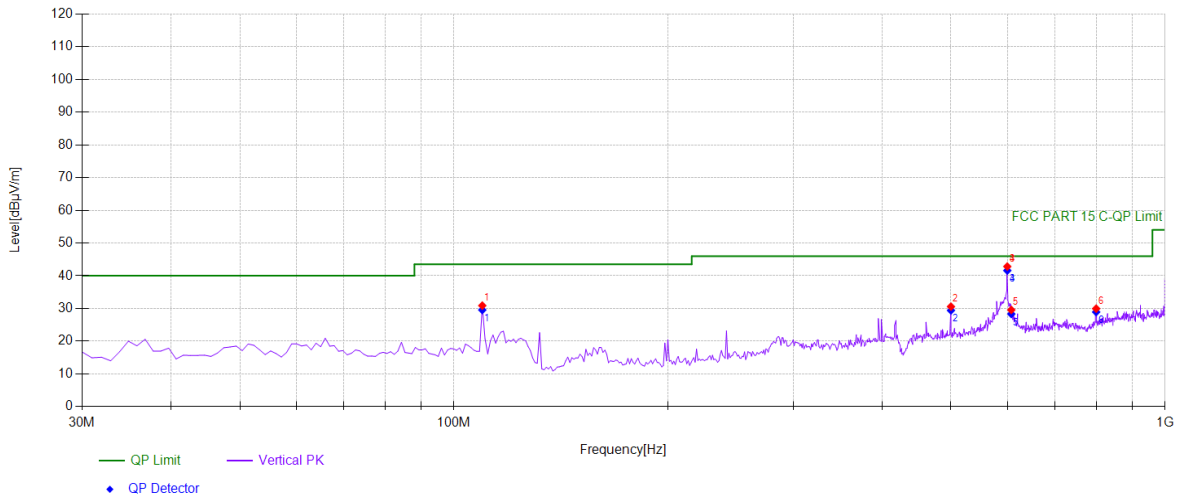


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	109.6196	43.19	-12.30	30.89	PK	43.50	12.61	Vertical
2	499.95	34.00	-3.43	30.57	PK	46.00	15.43	Vertical
3	599.96	42.67	0.16	42.83	PK	46.00	3.17	Vertical
4	599.96	42.67	0.16	42.83	PK	46.00	3.17	Vertical
5	607.7277	29.72	-0.15	29.57	PK	46.00	16.43	Vertical
6	799.98	28.81	1.16	29.97	PK	46.00	16.03	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	109.6196	-12.30	29.56	43.50	13.94
2	499.95	-3.43	29.42	46.00	16.58
3	599.96	0.16	41.60	46.00	4.40
4	599.96	0.16	41.68	46.00	4.32
5	607.7277	-0.15	28.34	46.00	17.66
6	799.98	1.16	28.92	46.00	17.08

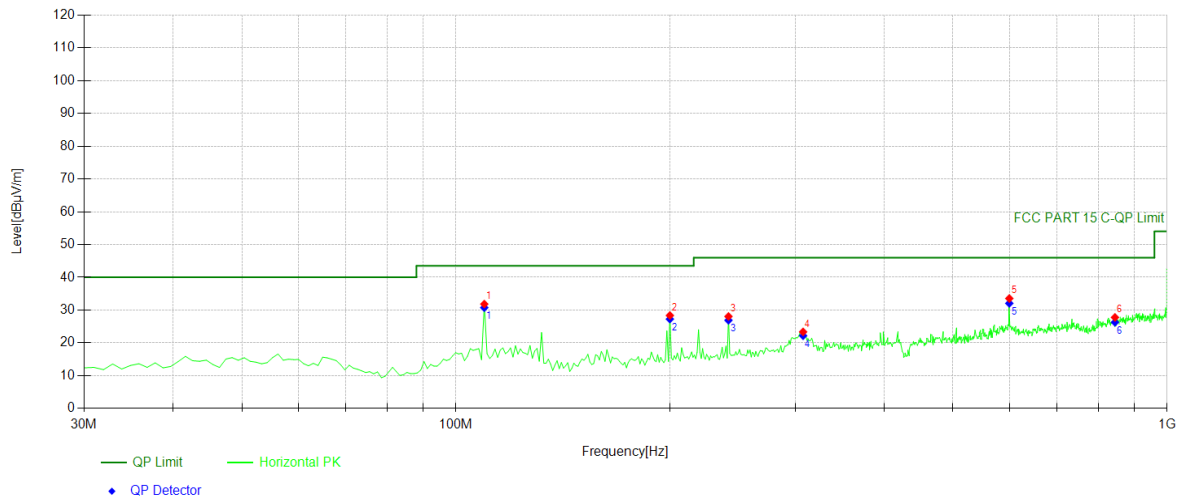

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	109.6196	44.15	-12.30	31.85	PK	43.50	11.65	Horizontal
2	199.9199	40.37	-12.01	28.36	PK	43.50	15.14	Horizontal
3	241.6717	37.92	-9.85	28.07	PK	46.00	17.93	Horizontal
4	307.6977	31.14	-7.78	23.36	PK	46.00	22.64	Horizontal
5	599.96	33.40	0.16	33.56	PK	46.00	12.44	Horizontal
6	844.6446	24.97	2.81	27.78	PK	46.00	18.22	Horizontal

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	109.6196	-12.30	30.76	43.50	12.74
2	199.9199	-12.01	27.27	43.50	16.23
3	241.6717	-9.85	26.90	46.00	19.10
4	307.6977	-7.78	22.19	46.00	23.81
5	599.96	0.16	32.07	46.00	13.93
6	844.6446	2.81	26.29	46.00	19.71

8.6 CONDUCTED EMISSION TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	79.00	66.00
0.5-30.0	73.00	60.00

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

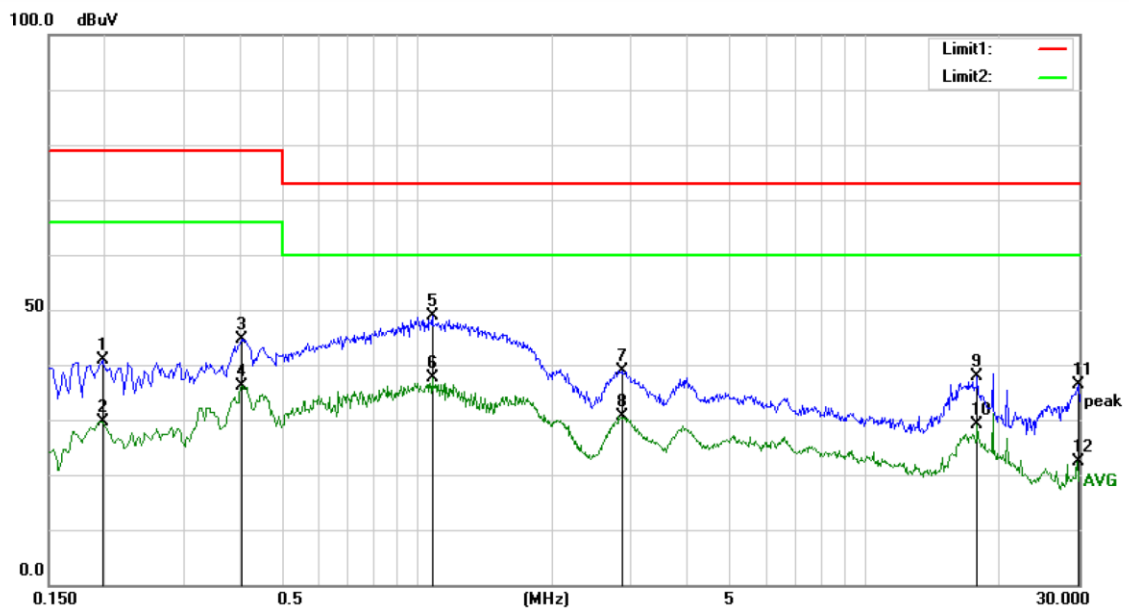

Site Conduction #1

Phase: **L1**

Temperature: 21.7


Limit: (CE)FCC PART 15 class A_QP

Power: AC 120V/60Hz

Humidity: 62 %

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1980	31.03	9.80	40.83	79.00	-38.17	QP	
2		0.1980	19.86	9.80	29.66	66.00	-36.34	AVG	
3		0.4060	35.06	9.61	44.67	79.00	-34.33	QP	
4		0.4060	26.59	9.61	36.20	66.00	-29.80	AVG	
5		1.0820	39.06	9.89	48.95	73.00	-24.05	QP	
6	*	1.0820	27.77	9.89	37.66	60.00	-22.34	AVG	
7		2.8660	28.98	9.93	38.91	73.00	-34.09	QP	
8		2.8660	20.71	9.93	30.64	60.00	-29.36	AVG	
9		17.8100	27.16	10.66	37.82	73.00	-35.18	QP	
10		17.8100	18.58	10.66	29.24	60.00	-30.76	AVG	
11		29.9780	23.35	13.00	36.35	73.00	-36.65	QP	
12		29.9780	9.45	13.00	22.45	60.00	-37.55	AVG	

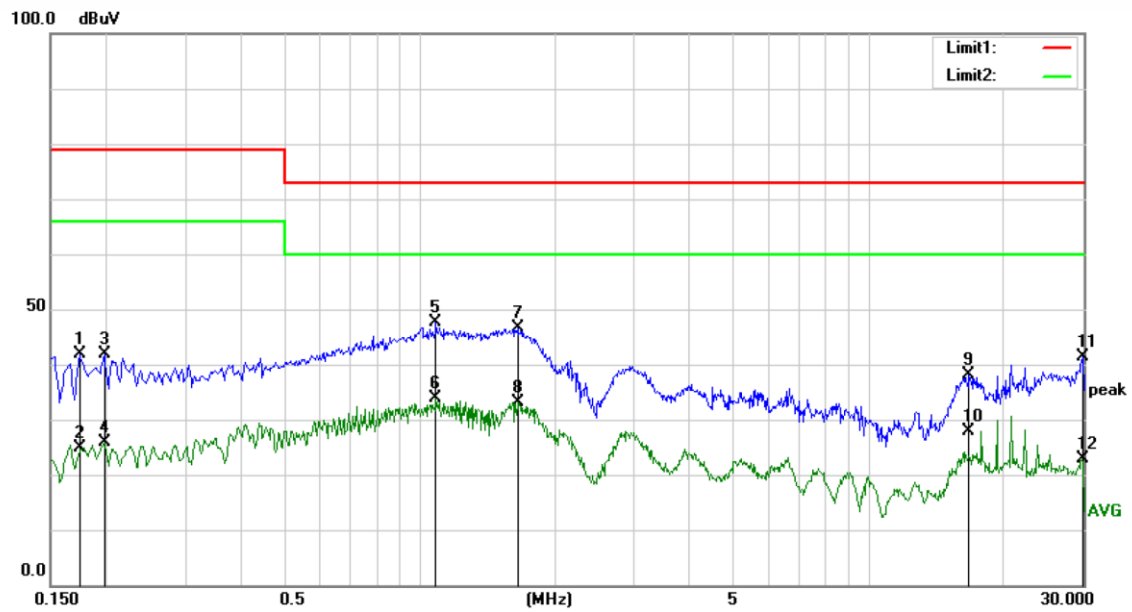

Site Conduction #1

Phase: **N**

Temperature: 21.7

Limit: (CE)FCC PART 15 class A_QP

Power: AC 120V/60Hz

Humidity: 62 %

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1740	32.29	9.63	41.92	79.00	-37.08	QP	
2		0.1740	15.28	9.63	24.91	66.00	-41.09	AVG	
3		0.1980	32.08	9.80	41.88	79.00	-37.12	QP	
4		0.1980	16.15	9.80	25.95	66.00	-40.05	AVG	
5	*	1.0860	37.74	9.89	47.63	73.00	-25.37	QP	
6		1.0860	23.95	9.89	33.84	60.00	-26.16	AVG	
7		1.6460	36.62	9.89	46.51	73.00	-26.49	QP	
8		1.6460	23.25	9.89	33.14	60.00	-26.86	AVG	
9		16.6740	27.58	10.62	38.20	73.00	-34.80	QP	
10		16.6740	17.38	10.62	28.00	60.00	-32.00	AVG	
11		29.9940	28.26	13.00	41.26	73.00	-31.74	QP	
12		29.9940	9.91	13.00	22.91	60.00	-37.09	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi..

8.7.2 Result

PASS.

- - ☒ Antenna uses a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos

Detail of factor for radiated emission

Frequency(MHz)	Ant F(dB)	Cab L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

*** End of Report ***

9 APPENDIX PHOTOGRAPHS OF EUT

Please refer to the file of External Photo and Internal Photo.



10 APPENDIX PHOTOGRAPHS OF TEST SETUP

Please refer to the file of Test Setup Photo.



声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。
1. This report is invalid without the signature of the authorized approver and "special seal for testing".
2. 未经许可本报告不得部分复制。
2. This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。
6. Objections shall be raised within 20 days from the date receiving the report.