

TEST REPORT

Application No.: KSCR2608001996AT
FCC ID: 2AKW5-RONDS03
Applicant: Anhui Ronds Science & Technology Incorporated Company
Address of Applicant: #59, branch road of biomedical park, high-tech district, Hefei, Anhui, China
Manufacturer: Anhui Ronds Science & Technology Incorporated Company
Address of Manufacturer: #59, branch road of biomedical park, high-tech district, Hefei, Anhui, China
Equipment Under Test (EUT):
EUT Name: Wireless Smart Sensor
Model No.: RW609U, RW609S ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: Ronds
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-08-06
Date of Test: 2026-08-07 to 2026-09-02
Date of Issue: 2026-09-03

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record			
Version	Description	Date	Remark
00	Original	2026-09-03	/

Authorized for issue by:			
Prepared By		<i>Tommie Tang</i>	
		<u>Tommie_Tang/Project Engineer</u>	
Approved By		<i>Terry Hou</i>	
		<u>Terry Hou /Reviewer</u>	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10-2020+Cor.1-2023 Section 6.10.5 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10-2020+Cor.1-2023 Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10-2020+Cor.1-2023 Section 6.6 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10-2020+Cor.1-2023 Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10-2020+Cor.1-2023 Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectral Density		ANSI C63.10-2020+Cor.1-2023 Section 11.10.3	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10-2020+Cor.1-2023 Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10-2020+Cor.1-2023 Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

Declaration of EUT Family Grouping:

Note: There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model RW609U was tested since their differences were the model RW609U has additional circuit for condition monitoring function compared to RW609S.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary.....	3
3 Contents	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Power level setting using in test:.....	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty	6
4.5 Test Location	7
4.6 Test Facility.....	7
4.7 Deviation from Standards	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	9
6.1 Antenna Requirement	9
7 Radio Spectrum Matter Test Results	10
7.1 Radiated Emissions which fall in the restricted bands	10
7.2 Radiated Spurious Emissions Below 1GHz.....	29
7.3 Radiated Spurious Emissions Above 1GHz	33
7.4 Maximum Conducted Output Power	47
7.5 Minimum 6dB Bandwidth.....	48
7.6 Power Spectral Density	49
7.7 Conducted Band Edges Measurement	50
7.8 Conducted Spurious Emissions	51
8 Test Setup Photo	52
9 EUT Constructional Details (EUT Photos).....	52
10 Appendix.....	53

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.6V by battery
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	Chip Antenna
Antenna Gain:	4.97dBi(Provided by the manufacturer)

4.2 Power level setting using in test:

Channel	1M	2M
0	4	4
19	4	4
39	4	4

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	/

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%
Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 2541.01)**

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1172)**

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

- **ISED (CAB Identifier: CN0072)**

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

- **VCCI (Member No:1938)**

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301196	07/06/2026	07/05/2027
2	LISN	R&S	ENV216	KS301197	01/08/2026	01/07/2027
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/08/2026	01/07/2027
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	12/18/2025	12/17/2026
5	CE test Cable	Thermax	/	CZ301102	12/18/2025	12/17/2026
6	Software	Faratronic	E3	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	07/07/2026	07/06/2027
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	07/07/2026	07/06/2027
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	12/17/2025	12/16/2026
4	Signal Generator	R&S	SMBV100B	KSEM032	12/17/2025	12/16/2026
5	Signal Generator	R&S	SMW200A	KSEM020-1	07/07/2026	07/06/2027
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	07/07/2026	07/06/2027
7	Signal Generator	Agilent	E8257C	KS301066	07/07/2026	07/06/2027
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	07/07/2026	07/06/2027
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	12/17/2025	12/16/2026
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	07/07/2026	07/06/2027
11	Switcher	TST	FY562	KUS2001M001-4	12/17/2025	12/16/2026
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111- CZ301120	12/17/2025	12/16/2026
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	07/07/2026	07/06/2027
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	12/30/2025	12/29/2026
15	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	07/06/2026	07/05/2027
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	12/17/2025	12/16/2026
3	Signal Generator	Agilent	E8257C	KS301066	07/07/2026	07/06/2027
4	Loop Antenna (9KHz-30MHz)	COM-POWER	AL-130R	KUS1806E001	07/07/2026	07/06/2027
5	Bilog Antenna (30MHz-1GHz)	TESEQ	CBL 6112D	KUS1806E005	07/07/2026	07/06/2027
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	01/11/2026	01/10/2028
7	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/11/2026	01/10/2028
8	Amplifier(30MHz~1GHz)	TST	LNA009100G30	KSEM061	12/18/2025	12/17/2026
9	Amplifier(400MHz~8GHz)	TST	LNA004080G30	KSEM062	12/18/2025	12/17/2026
10	Amplifier(1GHz~18GHz)	TST	LNA010180G45	KSEM039	07/07/2026	07/06/2027
11	Amplifier(18~40GHz)	TST	LNA180400G40	KSEM038	07/07/2026	07/06/2027
12	Radiation Test Cable	REBES MICROWAVE	A81-SMSM-10M	CZ301097- CZ301100	11/14/2025	11/13/2026
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	12/30/2025	12/29/2026
14	Software	ESE	E3_V 6.111221a	/	NCR	NCR
15	Measurement Software	Tonscend	JS32-RE V5.0.0.1	/	NCR	NCR
16	Measurement Software	Tonscend	JS32-RSE V5.0.0.0	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Chip Antenna and no consideration of replacement. The best case gain of the antenna is 4.97 dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.10.5 & 11.12

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 51.0 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

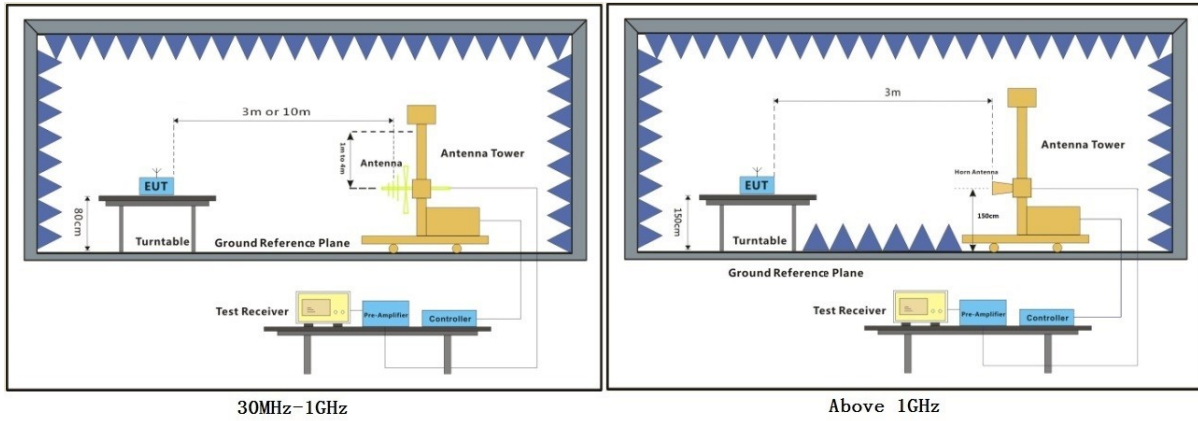

7.1.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.


Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.

BLE_1M_TX_CH_00_Horizontal_Peak

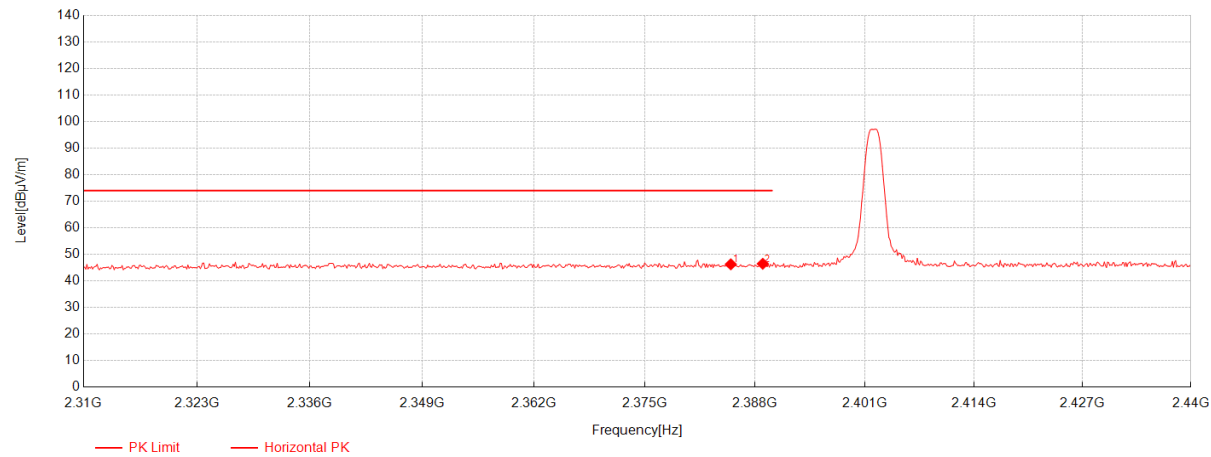


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2385.14	45.72	26.65	-26.15	46.22	74.00	27.78	Horizontal
2	2388.91	45.87	26.69	-26.13	46.43	74.00	27.57	Horizontal

BLE_1M_TX_CH_00_Horizontal_Average

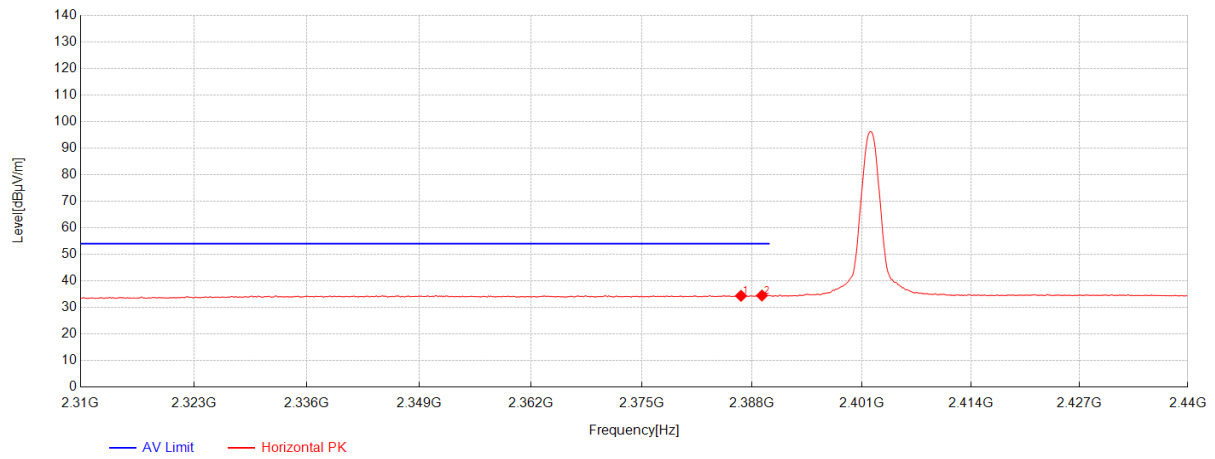


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.7	33.83	26.67	-26.14	34.36	54.00	19.64	Horizontal
2	2389.17	33.92	26.69	-26.13	34.48	54.00	19.52	Horizontal

BLE_1M_TX_CH_00_Vertical_Peak

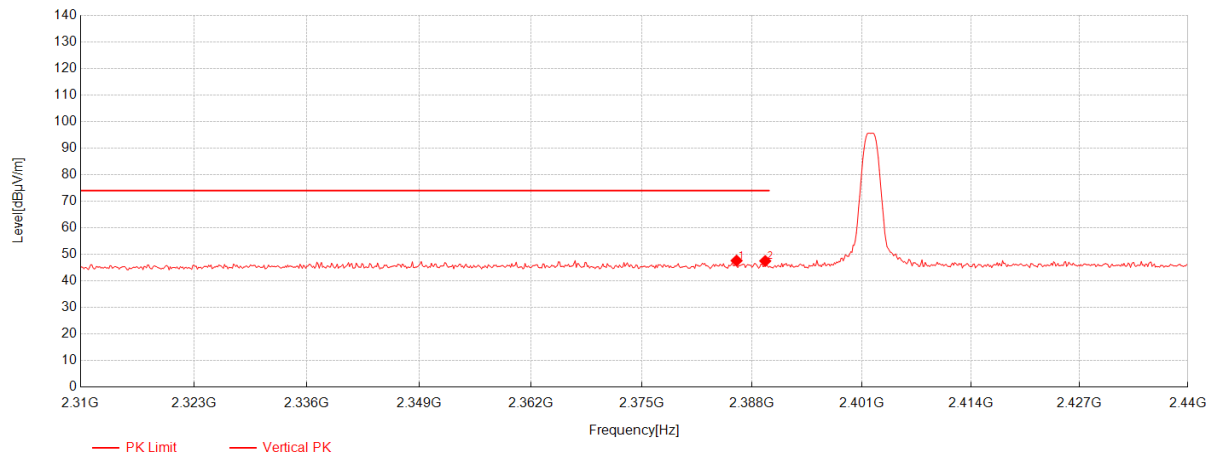


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.18	47.09	26.66	-26.14	47.61	74.00	26.39	Vertical
2	2389.56	46.91	26.70	-26.13	47.48	74.00	26.52	Vertical

BLE_1M_TX_CH_00_Vertical_Average

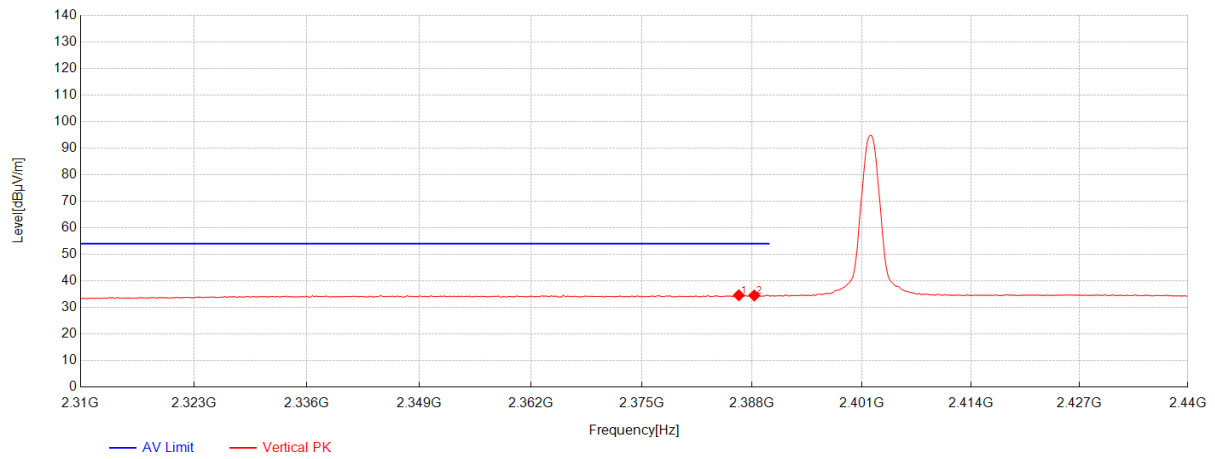


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.44	34.05	26.66	-26.14	34.57	54.00	19.43	Vertical
2	2388.26	33.94	26.68	-26.14	34.48	54.00	19.52	Vertical

BLE_1M_TX_CH_39_Horizontal

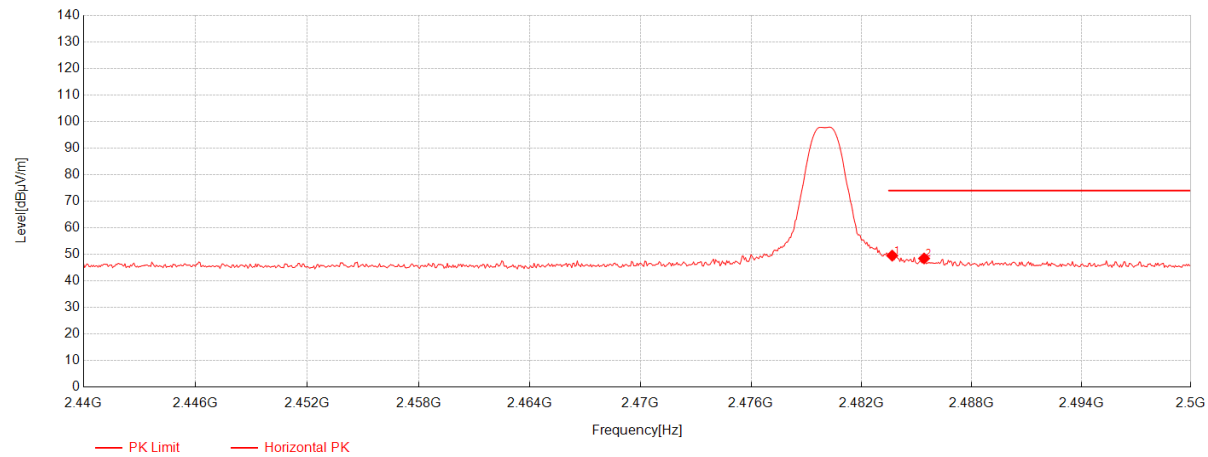


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.68	48.58	27.16	-26.24	49.50	74.00	24.50	Horizontal
2	2485.42	47.52	27.15	-26.24	48.43	74.00	25.57	Horizontal

BLE_1M_TX_CH_39_Horizontal_Average

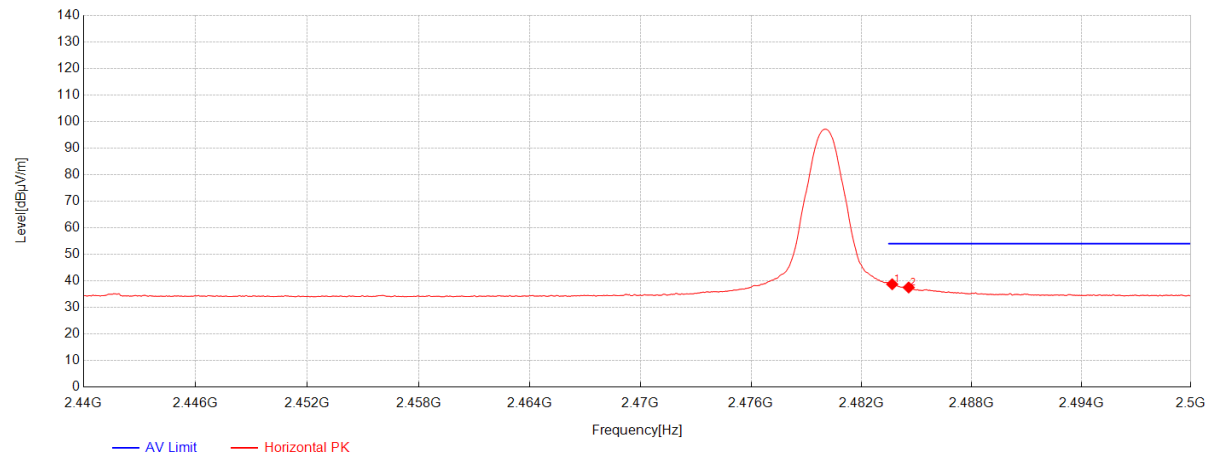


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.68	37.81	27.16	-26.24	38.73	54.00	15.27	Horizontal
2	2484.58	36.60	27.15	-26.24	37.51	54.00	16.49	Horizontal

BLE_1M_TX_CH_39_Vertical

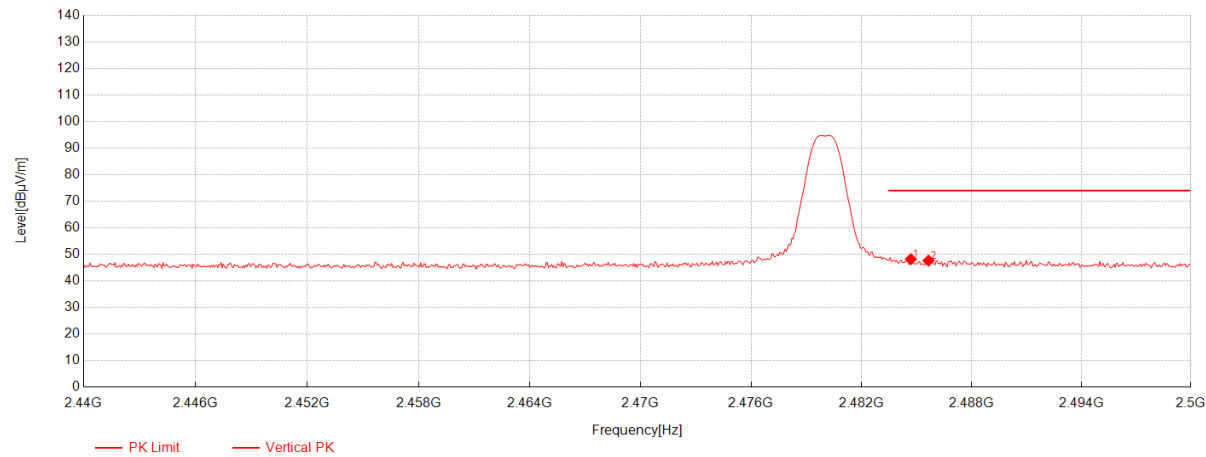


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2484.7	47.26	27.15	-26.24	48.17	74.00	25.83	Vertical
2	2485.66	46.71	27.14	-26.24	47.61	74.00	26.39	Vertical

BLE_1M_TX_CH_39_Veritical_Average

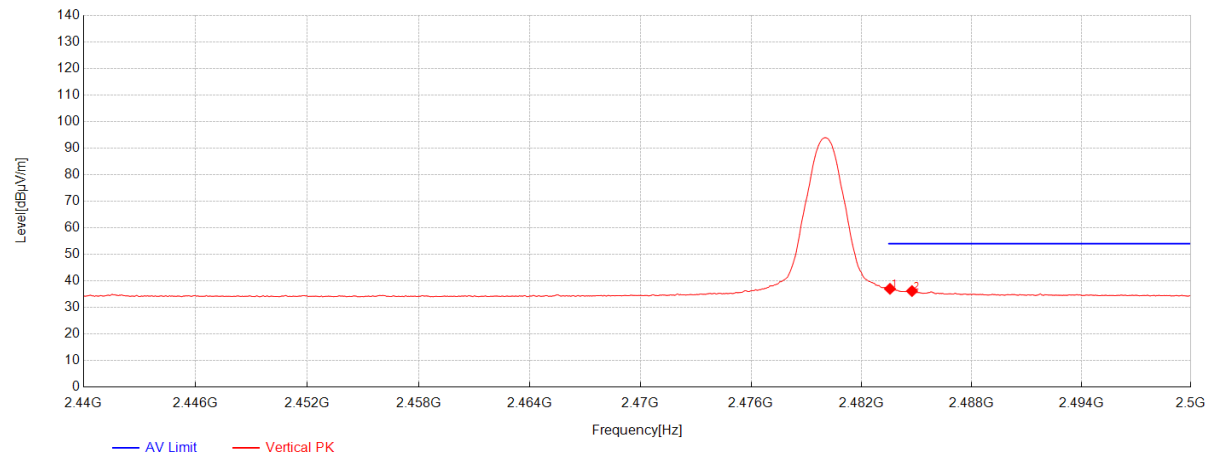


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.56	36.09	27.16	-26.24	37.01	54.00	16.99	Vertical
2	2484.76	35.25	27.15	-26.24	36.16	54.00	17.84	Vertical

BLE_2M_TX_CH_00_Horizontal_Peak

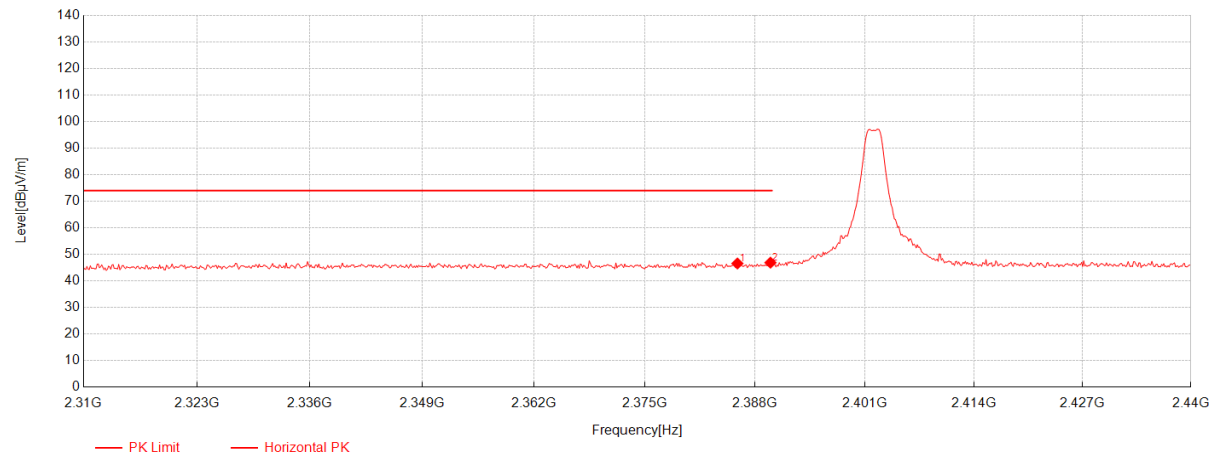


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2385.92	46.02	26.66	-26.15	46.53	74.00	27.47	Horizontal
2	2389.82	46.28	26.70	-26.13	46.85	74.00	27.15	Horizontal

BLE_2M_TX_CH_00_Horizontal_Average

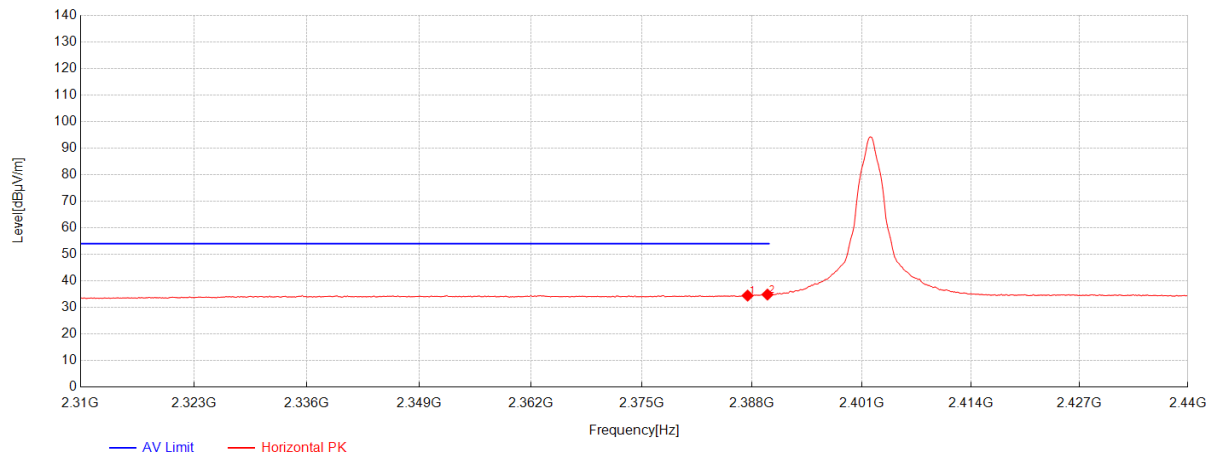


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.48	33.92	26.67	-26.14	34.45	54.00	19.55	Horizontal
2	2389.82	34.26	26.70	-26.13	34.83	54.00	19.17	Horizontal

BLE_2M_TX_CH_00_Vertical

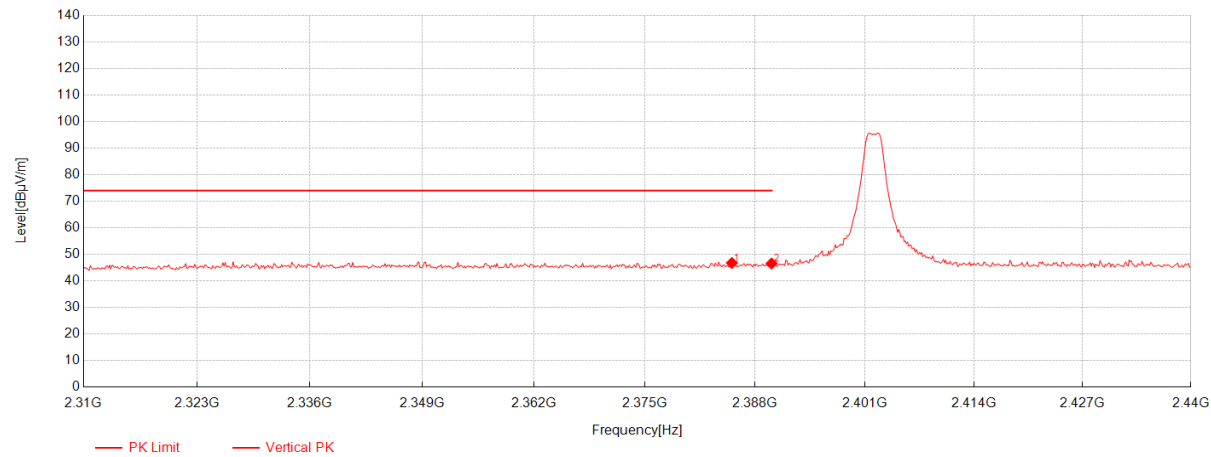


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2385.27	46.23	26.65	-26.15	46.73	74.00	27.27	Vertical
2	2389.95	45.96	26.70	-26.13	46.53	74.00	27.47	Vertical

BLE_2M_TX_CH_00_Vertical_Average

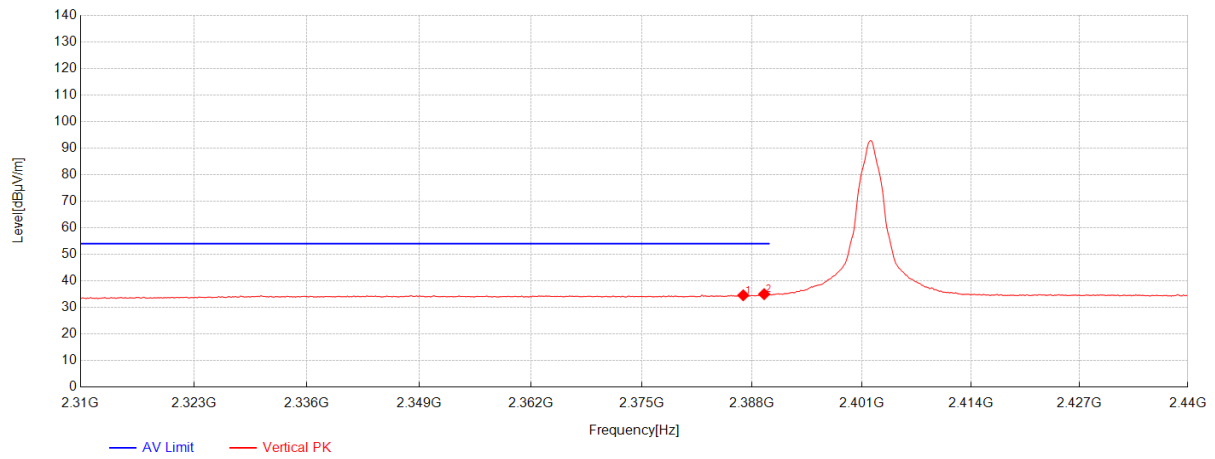


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.96	34.05	26.67	-26.14	34.58	54.00	19.42	Vertical
2	2389.43	34.44	26.69	-26.13	35.00	54.00	19.00	Vertical

BLE_2M_TX_CH_39_Horizontal_Peak

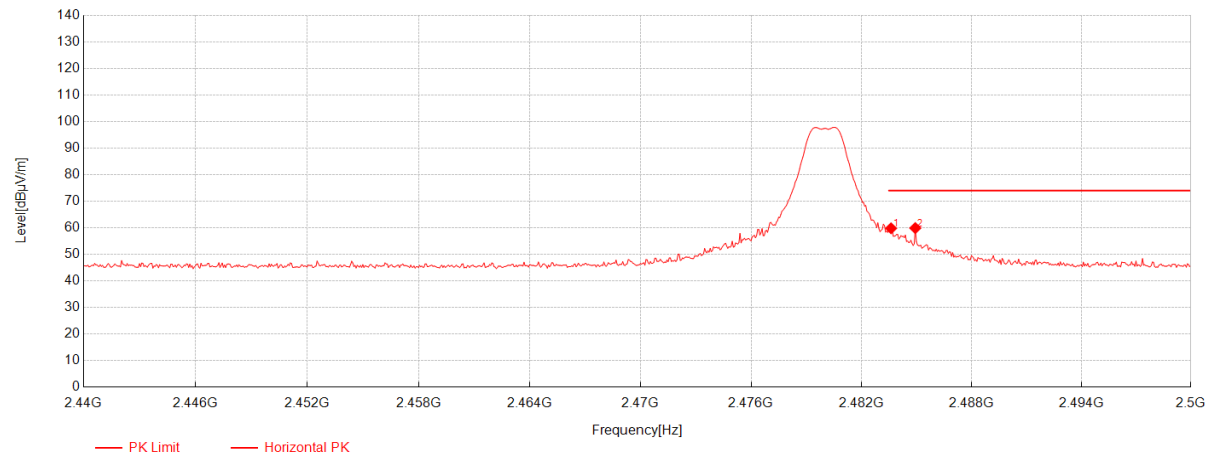


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.62	58.85	27.16	-26.24	59.77	74.00	14.23	Horizontal
2	2484.94	58.95	27.15	-26.24	59.86	74.00	14.14	Horizontal

BLE_2M_TX_CH_39_Horizontal_Average

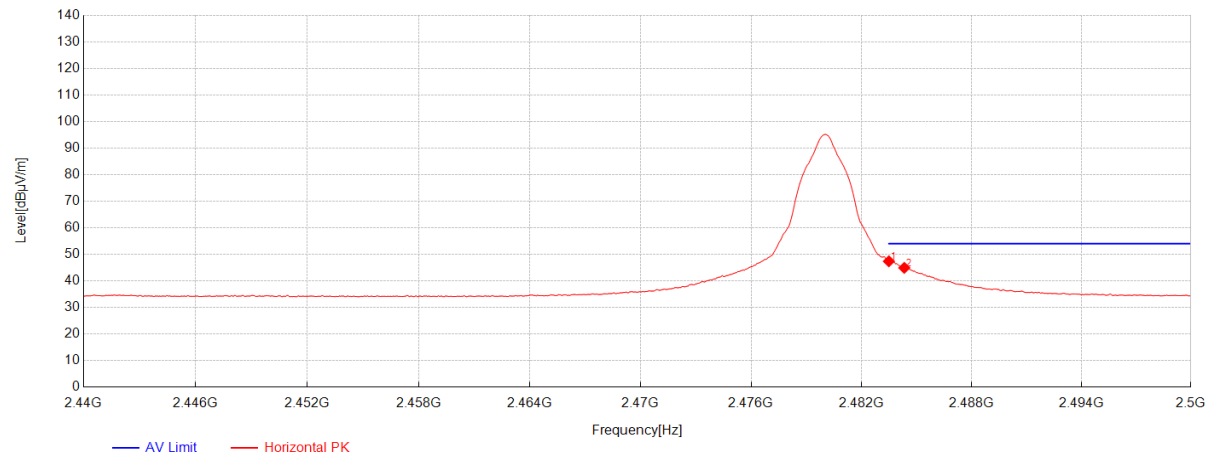


Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.5	46.43	27.17	-26.24	47.36	54.00	6.64	Horizontal
2	2484.34	43.97	27.16	-26.24	44.89	54.00	9.11	Horizontal

BLE_2M_TX_CH_39_Verical

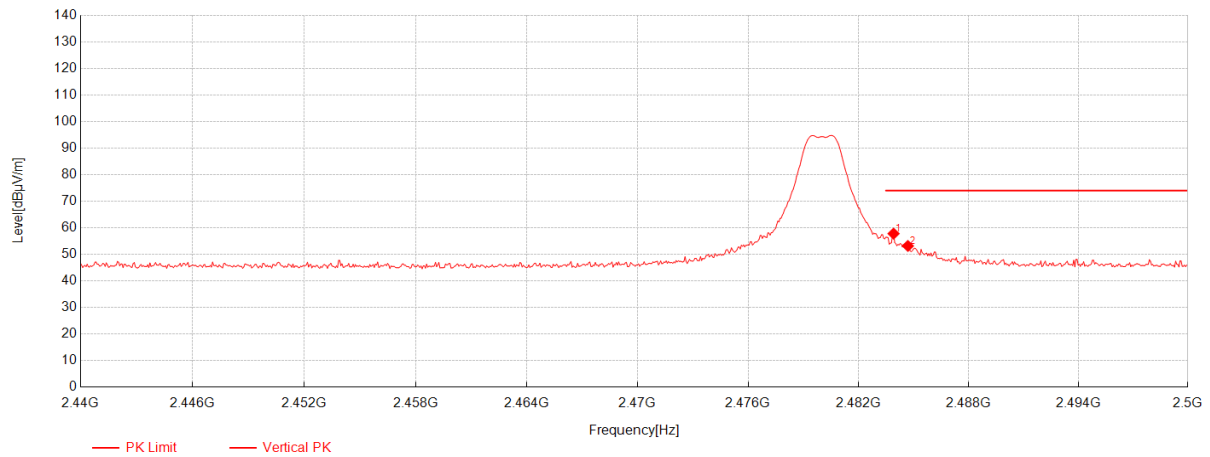

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.92	56.86	27.16	-26.24	57.78	74.00	16.22	Vertical
2	2484.7	52.23	27.15	-26.24	53.14	74.00	20.86	Vertical

BLE_2M_TX_CH_39_Veritical_Average

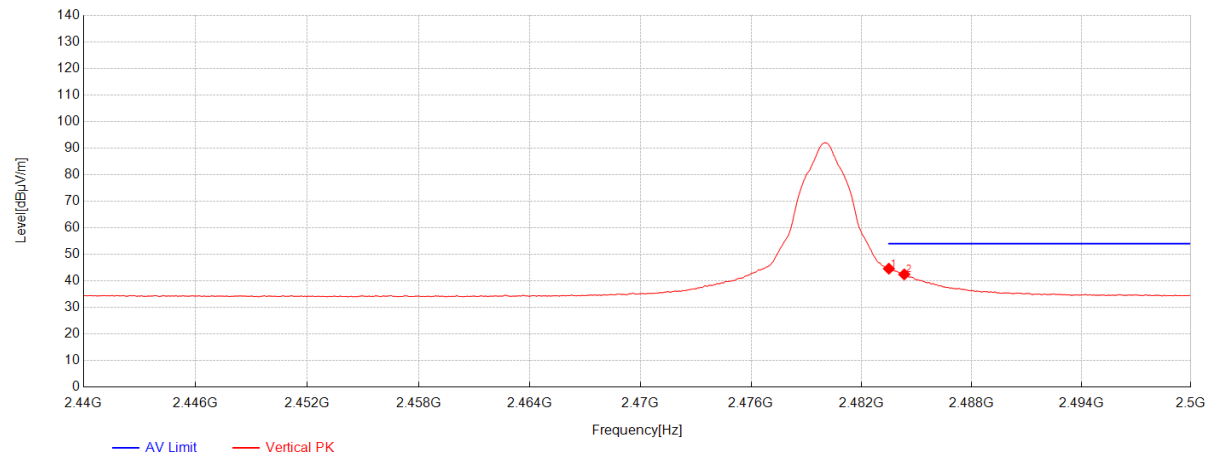

Data List								
NO.	Frequency [MHz]	Reading [dBµV]	AF [dB/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Polarity
1	2483.5	43.65	27.17	-26.24	44.58	54.00	9.42	Vertical
2	2484.34	41.51	27.16	-26.24	42.43	54.00	11.57	Vertical

7.2 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength (dBμV/m@3m)
0.009-0.490	2400/F(kHz)	300	128.5 to 93.8
0.490-1.705	24000/F(kHz)	30	73.8 to 62.9
1.705-30.0	30	30	69.60
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
960-1000	500	3	54.0

Note : The above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 51.0 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.2.3 Test Setup Diagram

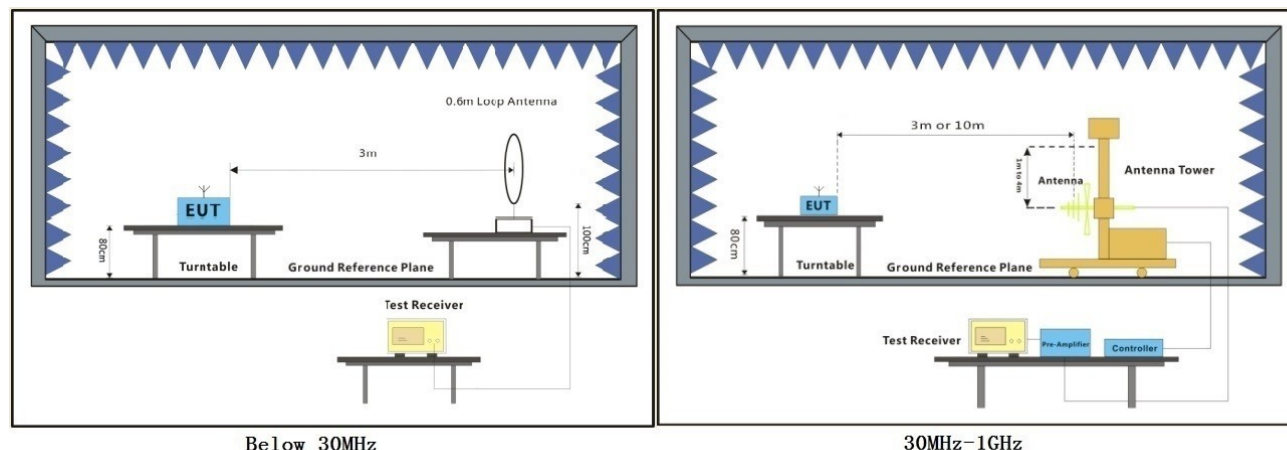


7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1 Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
2. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.


Test Mode: 00; Polarity: Horizontal

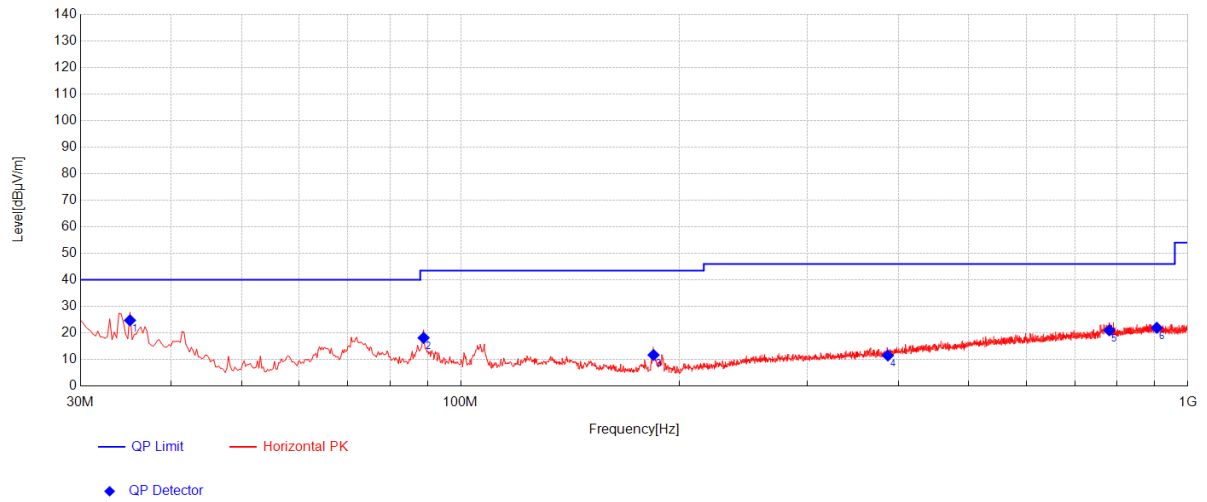

Final Data List

NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	35.0925	15.55	-32.47	24.77	40.00	15.23	Horizontal
2	88.9275	10.78	-31.92	18.16	43.50	25.34	Horizontal
3	184.23	11.28	-31.43	11.72	43.50	31.78	Horizontal
4	386.96	16.04	-30.62	11.53	46.00	34.47	Horizontal
5	780.295	22.49	-29.33	21.00	46.00	25.00	Horizontal
6	906.88	23.25	-29.08	21.94	46.00	24.06	Horizontal

Test Mode: 00; Polarity: Vertical

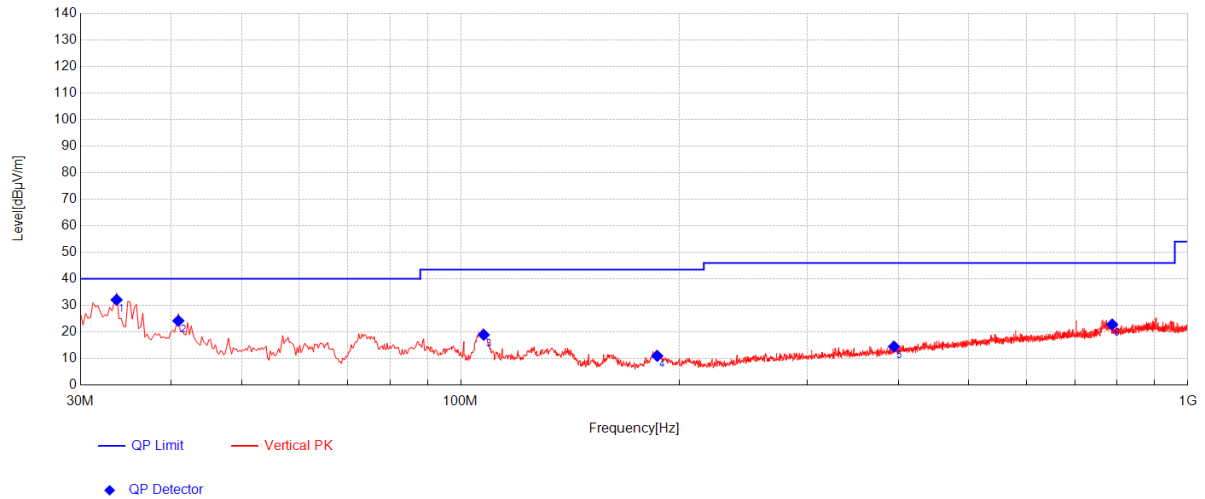

Final Data List

NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	33.6375	16.82	-32.49	32.11	40.00	7.89	Vertical
2	40.9125	11.03	-32.40	24.21	40.00	15.79	Vertical
3	107.6	12.76	-31.80	18.93	43.50	24.57	Vertical
4	186.4125	11.29	-31.40	10.98	43.50	32.52	Vertical
5	394.4775	16.46	-30.59	14.52	46.00	31.48	Vertical
6	787.3275	22.40	-29.34	22.86	46.00	23.14	Vertical

7.3 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.6 & 11.12

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C


Humidity: 51.0 % RH

Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_ Keep the EUT in continuously transmitting mode with GFSK modulation.

7.3.3 Test Setup Diagram

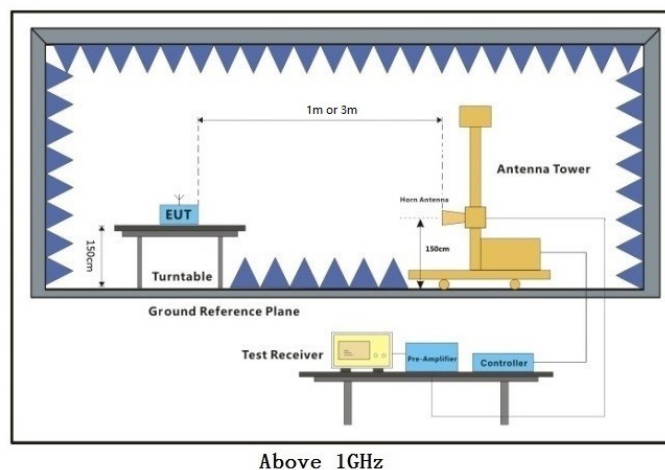


7.3.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
 2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
 3. For the frequency above 18GHz, the disturbance above 18GHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s).


BLE_1M_TX_CH_00_Horizontal

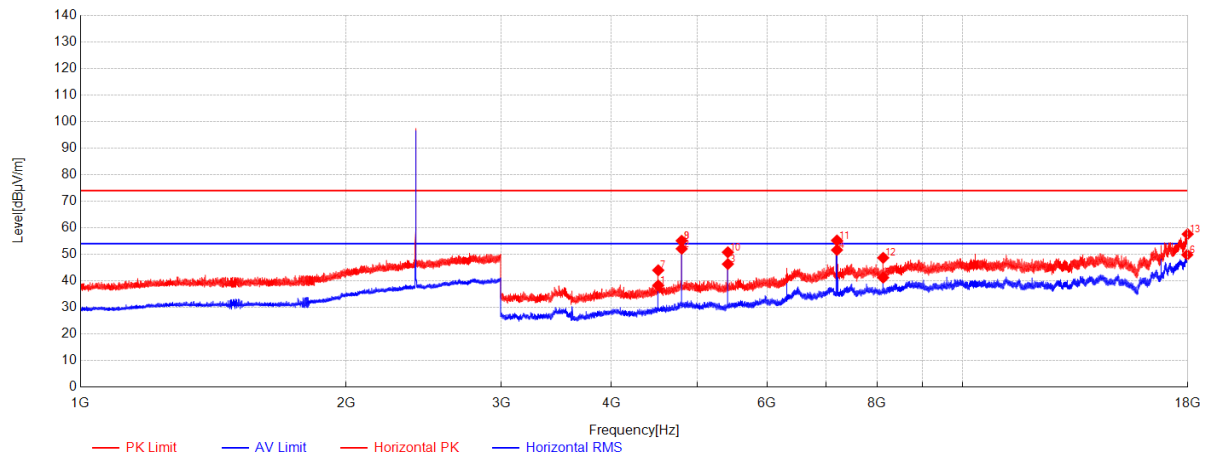

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4519	59.21	30.53	-51.46	38.28	54.00	15.72	Horizontal
2	4804.5	70.62	31.49	-50.04	52.07	54.00	1.93	Horizontal
3	5420	64.94	31.78	-50.40	46.32	54.00	7.68	Horizontal
4	7206	63.99	36.22	-48.61	51.60	54.00	2.40	Horizontal
5	8129.5	51.76	36.82	-47.36	41.22	54.00	12.78	Horizontal
6	17981	48.11	43.20	-41.49	49.82	54.00	4.18	Horizontal
7	4519	64.91	30.53	-51.46	43.98	74.00	30.02	Horizontal
8	4803.5	73.64	31.49	-50.04	55.09	74.00	18.91	Horizontal
9	4803.5	73.64	31.49	-50.04	55.09	74.00	18.91	Horizontal
10	5419.5	69.41	31.78	-50.41	50.78	74.00	23.22	Horizontal
11	7205.5	67.58	36.22	-48.61	55.19	74.00	18.81	Horizontal
12	8129	59.20	36.82	-47.36	48.66	74.00	25.34	Horizontal
13	18000	55.54	43.20	-41.16	57.58	74.00	16.42	Horizontal

BLE_1M_TX_CH_00_Verical

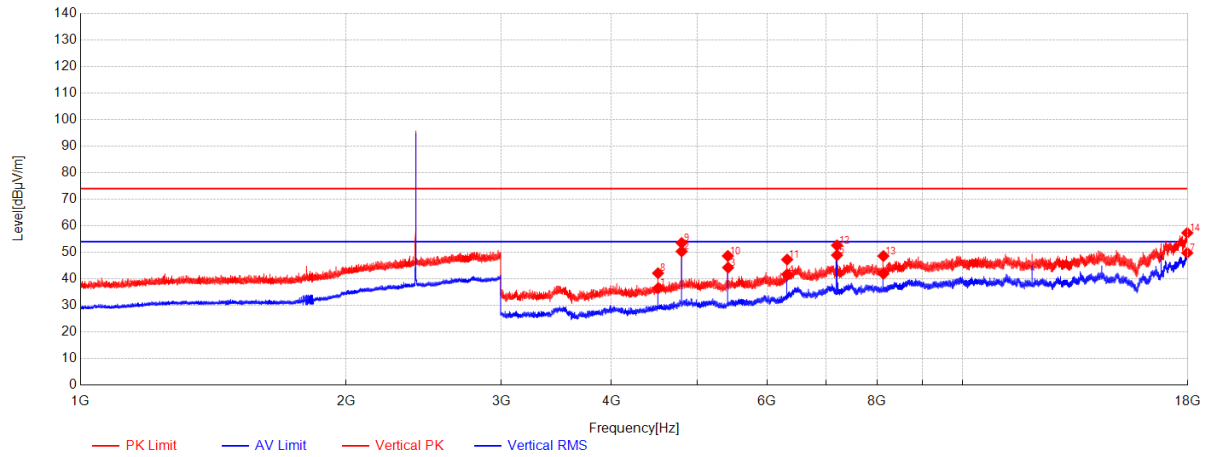

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4519.5	57.45	30.53	-51.46	36.52	54.00	17.48	Vertical
2	4804	68.88	31.49	-50.04	50.33	54.00	3.67	Vertical
3	5423	62.84	31.79	-50.39	44.24	54.00	9.76	Vertical
4	6327	56.28	33.76	-48.35	41.69	54.00	12.31	Vertical
5	7207	61.29	36.23	-48.61	48.91	54.00	5.09	Vertical
6	8134.5	52.48	36.84	-47.39	41.93	54.00	12.07	Vertical
7	17980	48.07	43.20	-41.50	49.77	54.00	4.23	Vertical
8	4516.5	63.10	30.50	-51.46	42.14	74.00	31.86	Vertical
9	4803.5	72.06	31.49	-50.04	53.51	74.00	20.49	Vertical
10	5419.5	67.26	31.78	-50.41	48.63	74.00	25.37	Vertical
11	6326.5	61.85	33.76	-48.35	47.26	74.00	26.74	Vertical
12	7206.5	64.99	36.23	-48.61	52.61	74.00	21.39	Vertical
13	8134	59.13	36.84	-47.39	48.58	74.00	25.42	Vertical
14	17982.5	55.54	43.20	-41.46	57.28	74.00	16.72	Vertical


BLE_1M_TX_CH_19_Horizontal

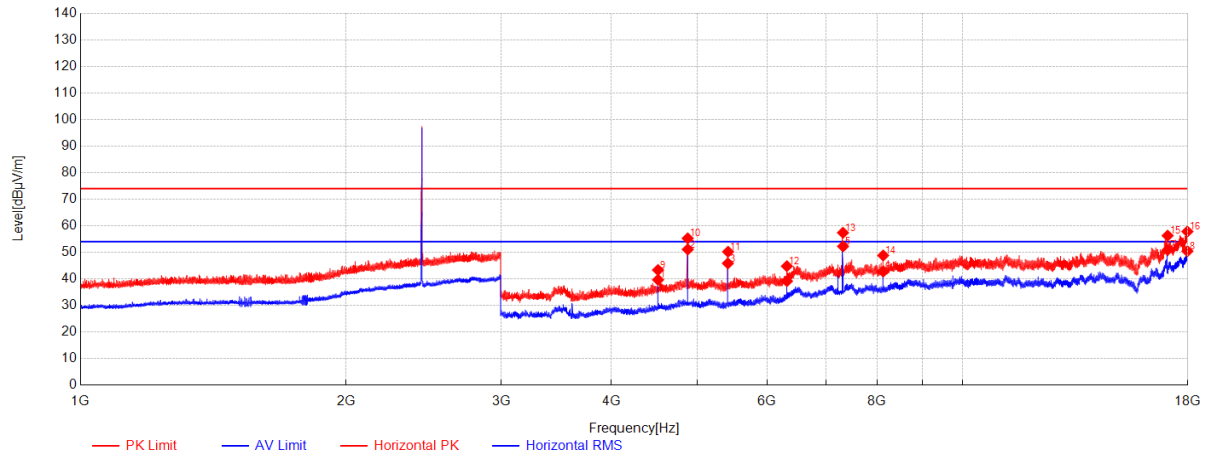

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4517	60.60	30.50	-51.46	39.64	54.00	14.36	Horizontal
2	4881	70.23	31.46	-50.61	51.08	54.00	2.92	Horizontal
3	5420	64.44	31.78	-50.40	45.82	54.00	8.18	Horizontal
4	6323	53.78	33.74	-48.38	39.14	54.00	14.86	Horizontal
5	7320	64.39	36.34	-48.51	52.22	54.00	1.78	Horizontal
6	8130	53.29	36.82	-47.36	42.75	54.00	11.25	Horizontal
7	17082	52.79	40.96	-42.87	50.88	54.00	3.12	Horizontal
8	17987.5	48.58	43.20	-41.38	50.40	54.00	3.60	Horizontal
9	4516	64.30	30.49	-51.46	43.33	74.00	30.67	Horizontal
10	4880.5	74.38	31.46	-50.61	55.23	74.00	18.77	Horizontal
11	5422.5	68.81	31.79	-50.40	50.20	74.00	23.80	Horizontal
12	6322.5	59.41	33.74	-48.38	44.77	74.00	29.23	Horizontal
13	7319.5	69.52	36.34	-48.51	57.35	74.00	16.65	Horizontal
14	8129.5	59.34	36.82	-47.36	48.80	74.00	25.20	Horizontal
15	17082	58.17	40.96	-42.87	56.26	74.00	17.74	Horizontal
16	17987	56.00	43.20	-41.38	57.82	74.00	16.18	Horizontal

BLE_1M_TX_CH_19_Vertical

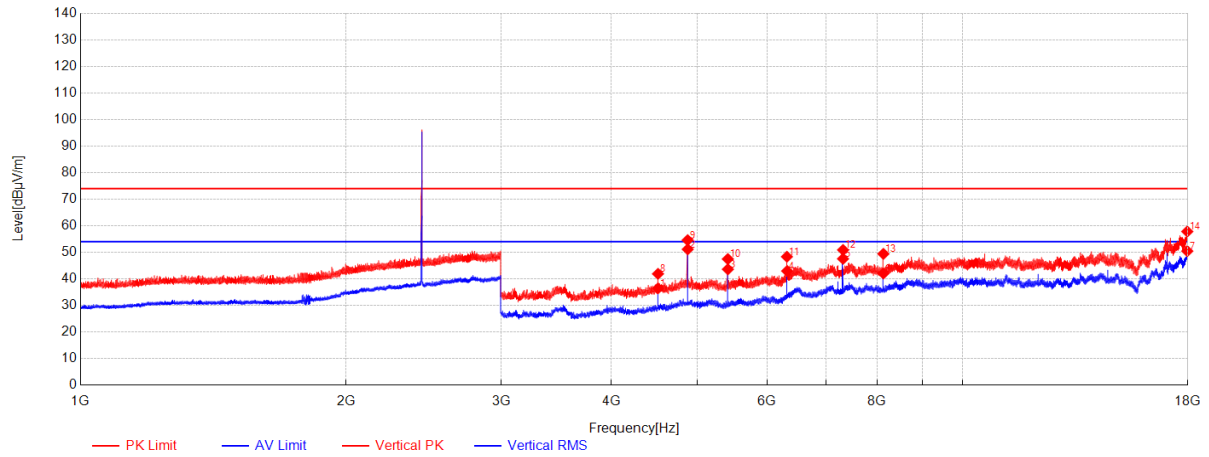


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4516.5	57.39	30.50	-51.46	36.43	54.00	17.57	Vertical
2	4880.5	70.28	31.46	-50.61	51.13	54.00	2.87	Vertical
3	5420	62.22	31.78	-50.40	43.60	54.00	10.40	Vertical
4	6327	57.54	33.76	-48.35	42.95	54.00	11.05	Vertical
5	7320	59.71	36.34	-48.51	47.54	54.00	6.46	Vertical
6	8134	52.57	36.84	-47.39	42.02	54.00	11.98	Vertical
7	17980.5	48.73	43.20	-41.50	50.43	54.00	3.57	Vertical
8	4516	62.86	30.49	-51.46	41.89	74.00	32.11	Vertical
9	4879.5	73.71	31.46	-50.60	54.57	74.00	19.43	Vertical
10	5419.5	66.08	31.78	-50.41	47.45	74.00	26.55	Vertical
11	6323	62.97	33.74	-48.38	48.33	74.00	25.67	Vertical
12	7321	63.04	36.34	-48.50	50.88	74.00	23.12	Vertical
13	8133.5	59.95	36.83	-47.38	49.40	74.00	24.60	Vertical
14	17983	56.06	43.20	-41.45	57.81	74.00	16.19	Vertical

BLE_1M_TX_CH_39_Horizontal

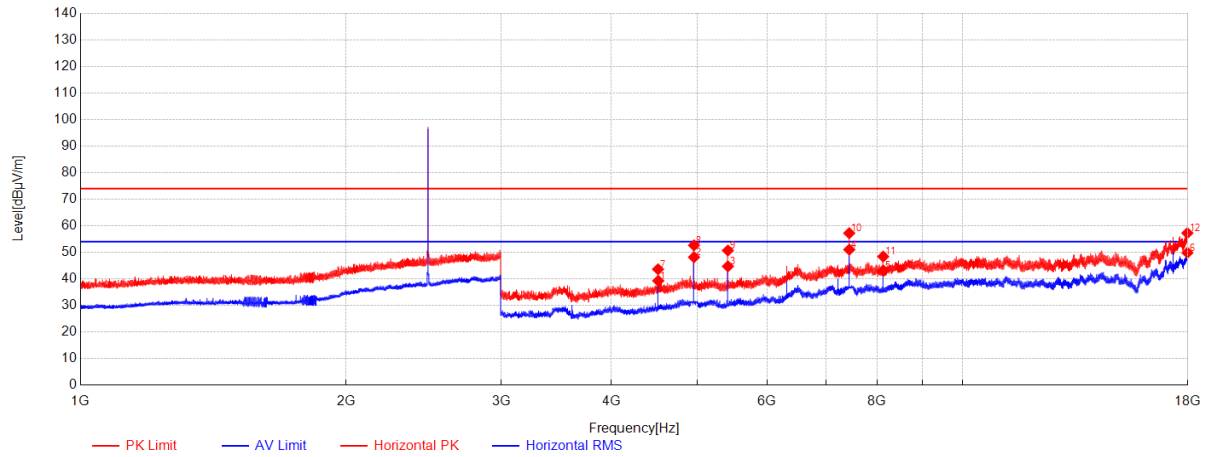

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4519	60.20	30.53	-51.46	39.27	54.00	14.73	Horizontal
2	4961	67.27	31.57	-50.71	48.13	54.00	5.87	Horizontal
3	5420	63.32	31.78	-50.40	44.70	54.00	9.30	Horizontal
4	7441	62.23	36.22	-47.45	51.00	54.00	3.00	Horizontal
5	8134	53.63	36.84	-47.39	43.08	54.00	10.92	Horizontal
6	17988	47.99	43.20	-41.37	49.82	54.00	4.18	Horizontal
7	4516.5	64.58	30.50	-51.46	43.62	74.00	30.38	Horizontal
8	4960.5	71.77	31.56	-50.71	52.62	74.00	22.38	Horizontal
9	5419.5	69.31	31.78	-50.41	50.68	74.00	23.32	Horizontal
10	7439.5	68.44	36.22	-47.47	57.19	74.00	16.81	Horizontal
11	8129	58.94	36.82	-47.36	48.40	74.00	25.60	Horizontal
12	17985.5	55.43	43.20	-41.41	57.22	74.00	16.78	Horizontal


BLE_1M_TX_CH_39_Verical

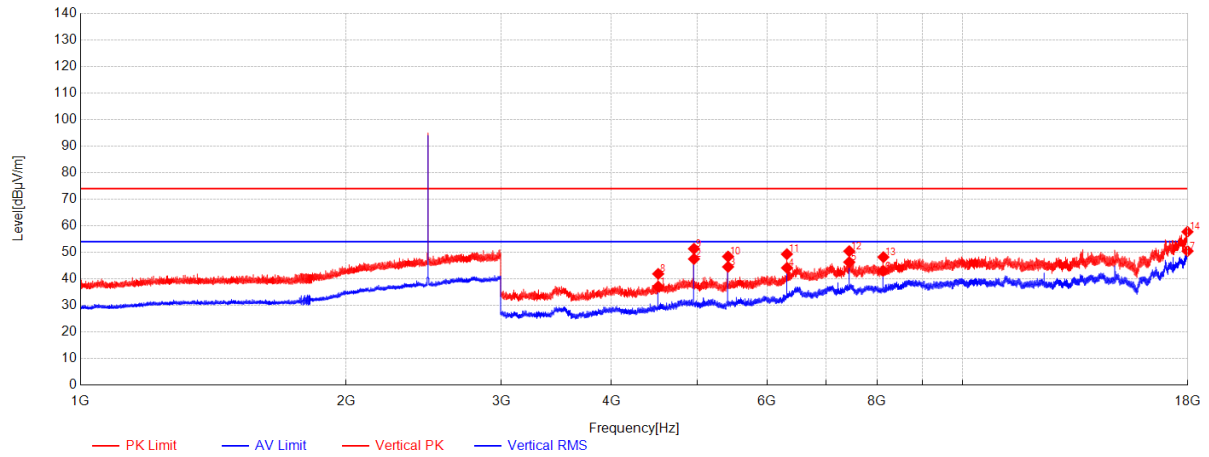

Data List


NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4519	58.01	30.53	-51.46	37.08	54.00	16.92	Vertical
2	4961	66.63	31.57	-50.71	47.49	54.00	6.51	Vertical
3	5423	63.12	31.79	-50.39	44.52	54.00	9.48	Vertical
4	6325	58.76	33.75	-48.37	44.14	54.00	9.86	Vertical
5	7441	57.51	36.22	-47.45	46.28	54.00	7.72	Vertical
6	8129.5	53.55	36.82	-47.36	43.01	54.00	10.99	Vertical
7	17995	48.50	43.20	-41.25	50.45	54.00	3.55	Vertical
8	4518.5	62.81	30.52	-51.46	41.87	74.00	32.13	Vertical
9	4960.5	70.46	31.56	-50.71	51.31	74.00	22.69	Vertical
10	5422.5	67.00	31.79	-50.40	48.39	74.00	25.61	Vertical
11	6322.5	63.94	33.74	-48.38	49.30	74.00	24.70	Vertical
12	7440.5	61.67	36.22	-47.46	50.43	74.00	23.57	Vertical
13	8134	58.73	36.84	-47.39	48.18	74.00	25.82	Vertical
14	17990	55.84	43.20	-41.33	57.71	74.00	16.29	Vertical

BLE_2M_TX_CH_00_Horizontal

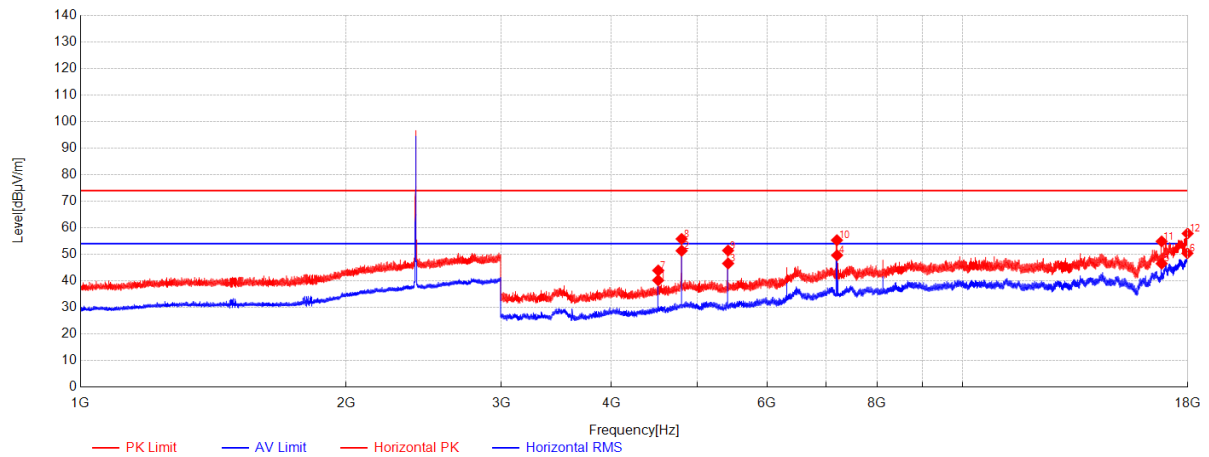


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4518	61.15	30.52	-51.46	40.21	54.00	13.79	Horizontal
2	4803.5	69.89	31.49	-50.04	51.34	54.00	2.66	Horizontal
3	5423	65.14	31.79	-50.39	46.54	54.00	7.46	Horizontal
4	7208	61.99	36.23	-48.61	49.61	54.00	4.39	Horizontal
5	16818	50.62	40.27	-44.40	46.49	54.00	7.51	Horizontal
6	17986.5	48.56	43.20	-41.39	50.37	54.00	3.63	Horizontal
7	4519	64.84	30.53	-51.46	43.91	74.00	30.09	Horizontal
8	4803	74.33	31.49	-50.03	55.79	74.00	18.21	Horizontal
9	5422.5	70.02	31.79	-50.40	51.41	74.00	22.59	Horizontal
10	7204.5	67.69	36.22	-48.61	55.30	74.00	18.70	Horizontal
11	16817.5	58.98	40.27	-44.40	54.85	74.00	19.15	Horizontal
12	17999.5	55.79	43.20	-41.17	57.82	74.00	16.18	Horizontal

BLE_2M_TX_CH_00_Vertical

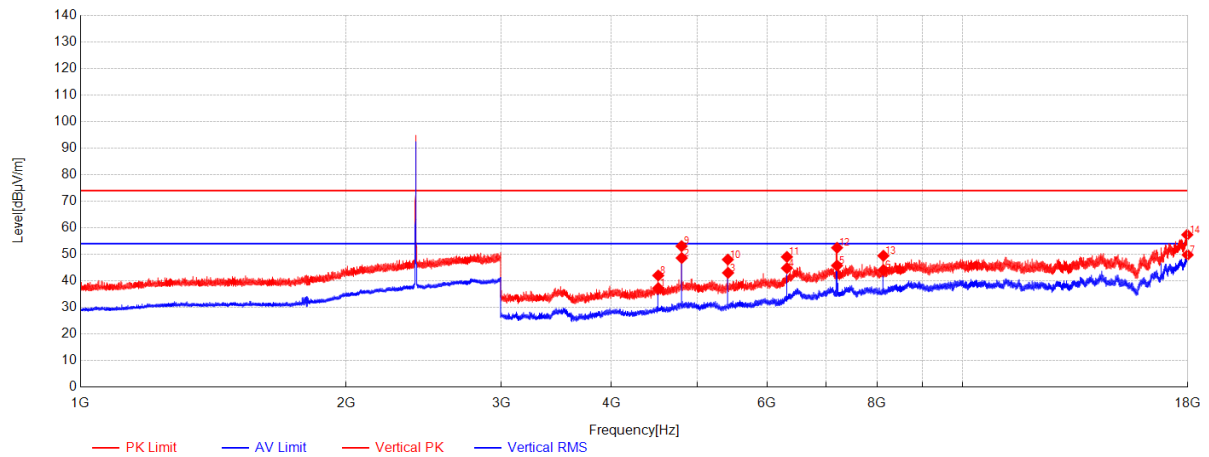


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4519.5	58.18	30.53	-51.46	37.25	54.00	16.75	Vertical
2	4804.5	67.15	31.49	-50.04	48.60	54.00	5.40	Vertical
3	5423	61.61	31.79	-50.39	43.01	54.00	10.99	Vertical
4	6323.5	59.44	33.74	-48.38	44.80	54.00	9.20	Vertical
5	7207.5	58.13	36.23	-48.61	45.75	54.00	8.25	Vertical
6	8134.5	54.63	36.84	-47.39	44.08	54.00	9.92	Vertical
7	17999.5	47.74	43.20	-41.17	49.77	54.00	4.23	Vertical
8	4519	62.95	30.53	-51.46	42.02	74.00	31.98	Vertical
9	4803	71.61	31.49	-50.03	53.07	74.00	20.93	Vertical
10	5419.5	66.65	31.78	-50.41	48.02	74.00	25.98	Vertical
11	6323	63.65	33.74	-48.38	49.01	74.00	24.99	Vertical
12	7207.5	64.83	36.23	-48.61	52.45	74.00	21.55	Vertical
13	8134	60.00	36.84	-47.39	49.45	74.00	24.55	Vertical
14	17980.5	55.65	43.20	-41.50	57.35	74.00	16.65	Vertical

BLE_2M_TX_CH_19_Horizontal

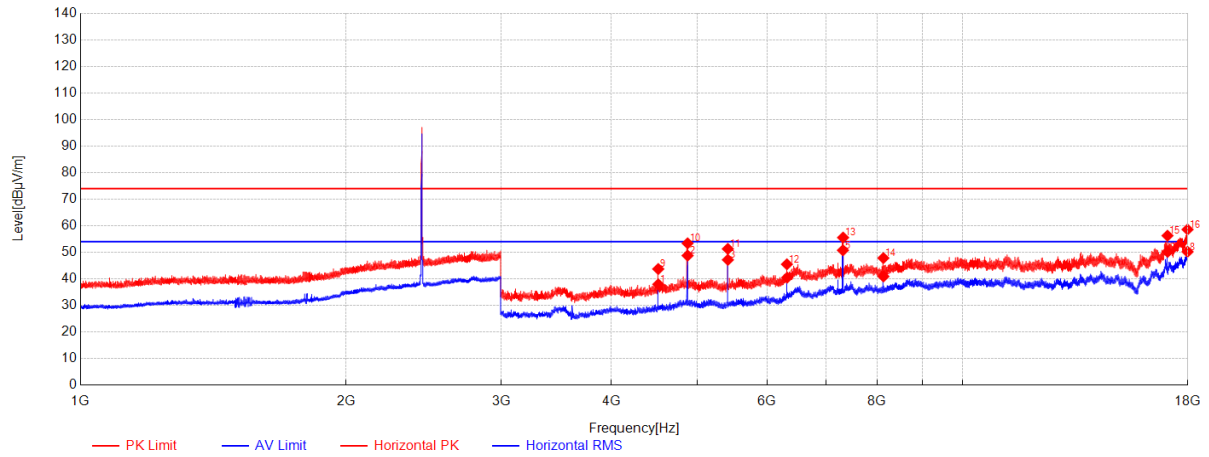


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4519.5	58.87	30.53	-51.46	37.94	54.00	16.06	Horizontal
2	4879.5	67.90	31.46	-50.60	48.76	54.00	5.24	Horizontal
3	5420	65.77	31.78	-50.40	47.15	54.00	6.85	Horizontal
4	6327	55.06	33.76	-48.35	40.47	54.00	13.53	Horizontal
5	7319	62.93	36.34	-48.52	50.75	54.00	3.25	Horizontal
6	8134.5	51.46	36.84	-47.39	40.91	54.00	13.09	Horizontal
7	17084	52.14	40.97	-42.95	50.16	54.00	3.84	Horizontal
8	17994	48.24	43.20	-41.26	50.18	54.00	3.82	Horizontal
9	4519	64.65	30.53	-51.46	43.72	74.00	30.28	Horizontal
10	4879	72.51	31.46	-50.59	53.38	74.00	20.62	Horizontal
11	5419.5	69.91	31.78	-50.41	51.28	74.00	22.72	Horizontal
12	6323	60.12	33.74	-48.38	45.48	74.00	28.52	Horizontal
13	7321.5	67.69	36.34	-48.50	55.53	74.00	18.47	Horizontal
14	8134	58.37	36.84	-47.39	47.82	74.00	26.18	Horizontal
15	17076.5	58.03	40.91	-42.68	56.26	74.00	17.74	Horizontal
16	17994	56.63	43.20	-41.26	58.57	74.00	15.43	Horizontal

BLE_2M_TX_CH_19_Vertical

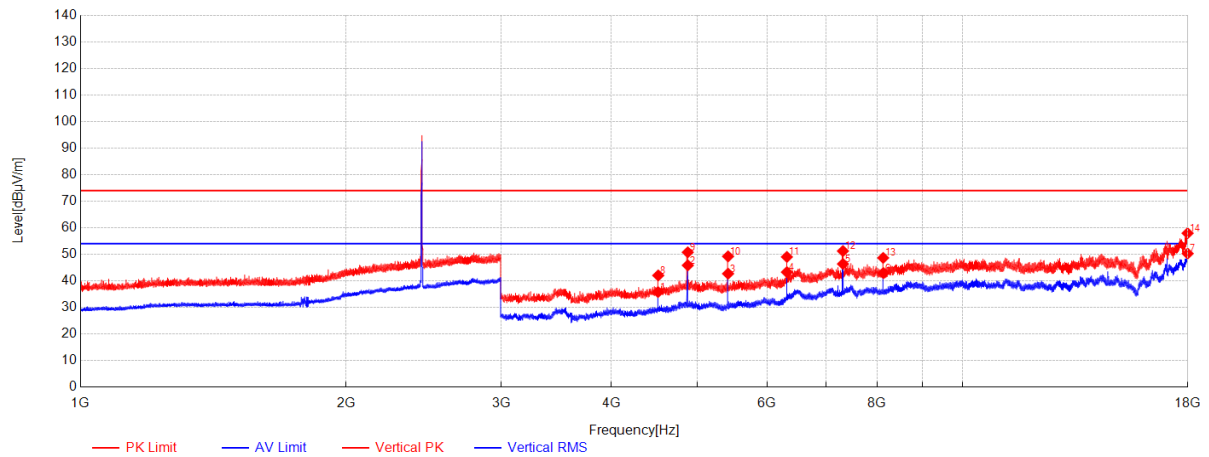

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4516.5	56.75	30.50	-51.46	35.79	54.00	18.21	Vertical
2	4881.5	64.98	31.46	-50.61	45.83	54.00	8.17	Vertical
3	5422.5	61.31	31.79	-50.40	42.70	54.00	11.30	Vertical
4	6323	57.92	33.74	-48.38	43.28	54.00	10.72	Vertical
5	7319	58.54	36.34	-48.52	46.36	54.00	7.64	Vertical
6	8134.5	53.48	36.84	-47.39	42.93	54.00	11.07	Vertical
7	18000	48.21	43.20	-41.16	50.25	54.00	3.75	Vertical
8	4519	62.96	30.53	-51.46	42.03	74.00	31.97	Vertical
9	4881	69.90	31.46	-50.61	50.75	74.00	23.25	Vertical
10	5422.5	67.82	31.79	-50.40	49.21	74.00	24.79	Vertical
11	6322.5	63.64	33.74	-48.38	49.00	74.00	25.00	Vertical
12	7318.5	63.40	36.34	-48.52	51.22	74.00	22.78	Vertical
13	8129.5	59.19	36.82	-47.36	48.65	74.00	25.35	Vertical
14	17996.5	55.94	43.20	-41.22	57.92	74.00	16.08	Vertical


BLE_2M_TX_CH_39_Horizontal

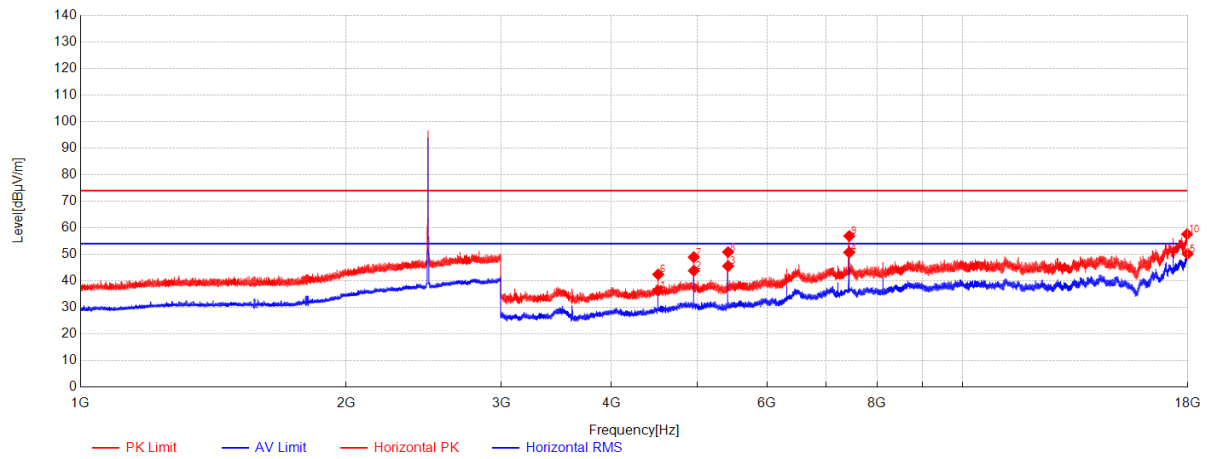

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4516.5	57.27	30.50	-51.46	36.31	54.00	17.69	Horizontal
2	4959.5	62.97	31.56	-50.71	43.82	54.00	10.18	Horizontal
3	5423	64.17	31.79	-50.39	45.57	54.00	8.43	Horizontal
4	7439.5	61.97	36.22	-47.47	50.72	54.00	3.28	Horizontal
5	17999.5	48.10	43.20	-41.17	50.13	54.00	3.87	Horizontal
6	4518.5	63.35	30.52	-51.46	42.41	74.00	31.59	Horizontal
7	4959	68.08	31.55	-50.71	48.92	74.00	25.08	Horizontal
8	5422.5	69.43	31.79	-50.40	50.82	74.00	23.18	Horizontal
9	7441.5	68.12	36.22	-47.45	56.89	74.00	17.11	Horizontal
10	17973.5	55.99	43.20	-41.62	57.57	74.00	16.43	Horizontal

BLE_2M_TX_CH_39_Verical

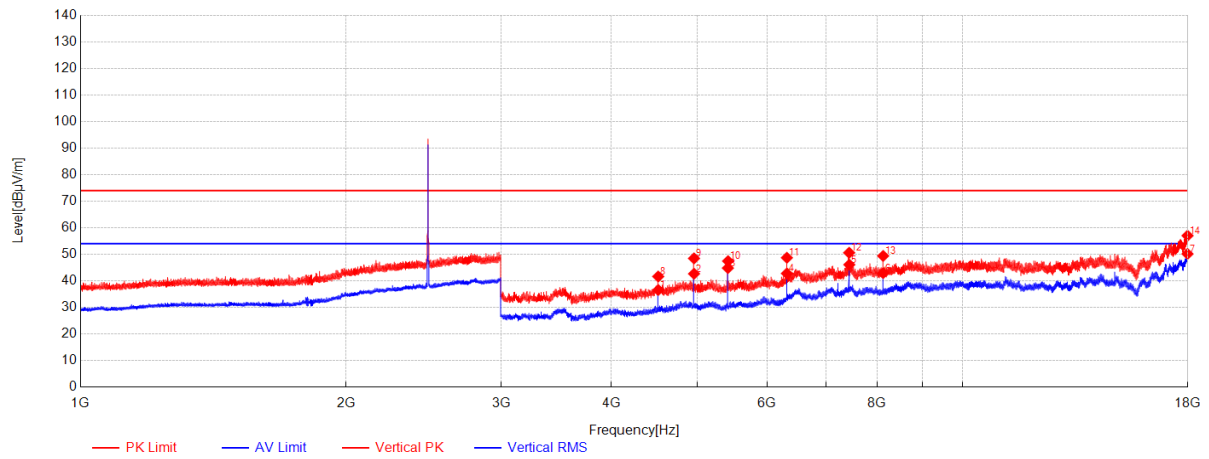

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4519.5	57.50	30.53	-51.46	36.57	54.00	17.43	Vertical
2	4961.5	61.80	31.57	-50.71	42.66	54.00	11.34	Vertical
3	5420	63.43	31.78	-50.40	44.81	54.00	9.19	Vertical
4	6323	57.42	33.74	-48.38	42.78	54.00	11.22	Vertical
5	7442	57.31	36.22	-47.44	46.09	54.00	7.91	Vertical
6	8130	53.46	36.82	-47.36	42.92	54.00	11.08	Vertical
7	17993.5	48.20	43.20	-41.27	50.13	54.00	3.87	Vertical
8	4518.5	62.58	30.52	-51.46	41.64	74.00	32.36	Vertical
9	4961	67.58	31.57	-50.71	48.44	74.00	25.56	Vertical
10	5422.5	66.04	31.79	-50.40	47.43	74.00	26.57	Vertical
11	6322.5	63.34	33.74	-48.38	48.70	74.00	25.30	Vertical
12	7438.5	61.83	36.22	-47.48	50.57	74.00	23.43	Vertical
13	8129	59.92	36.82	-47.36	49.38	74.00	24.62	Vertical
14	17993.5	55.08	43.20	-41.27	57.01	74.00	16.99	Vertical

7.4 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C


Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_ Keep the EUT in continuously transmitting mode with GFSK modulation.

7.4.3 Test Setup Diagram

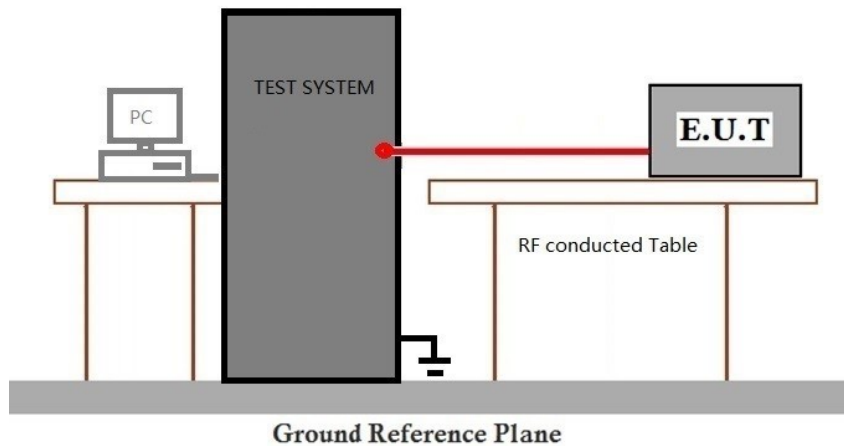

7.4.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.5 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
 Test Method: ANSI C63.10-2020+Cor.1-2023 Section 11.8.1

Limit:
 ≥500 kHz


7.5.1 E.U.T. Operation

Operating Environment:
 Temperature: 25.5 °C Humidity: 46.3 % RH Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.5.3 Test Setup Diagram

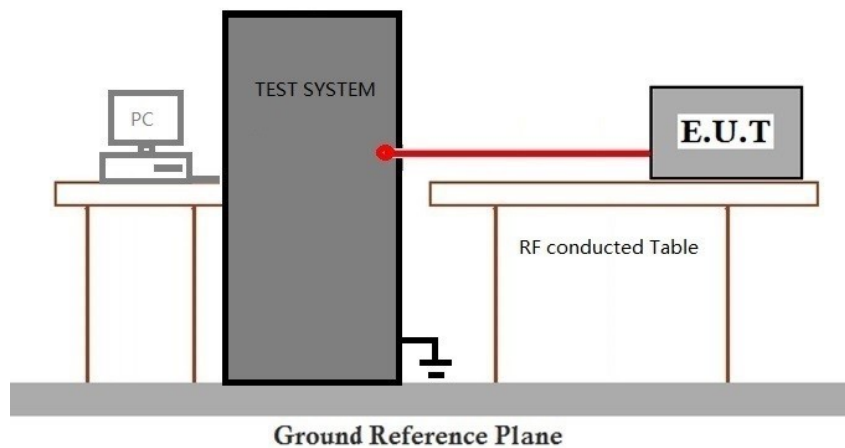

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 11.10.3

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C


Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

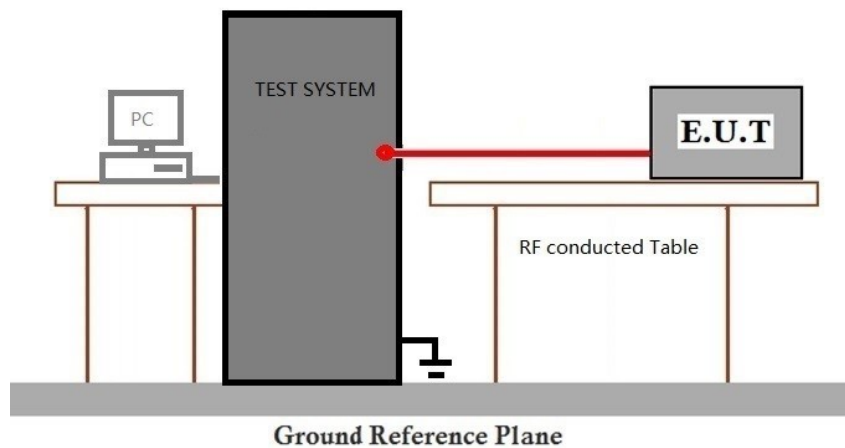

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C


Humidity: 46.3 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

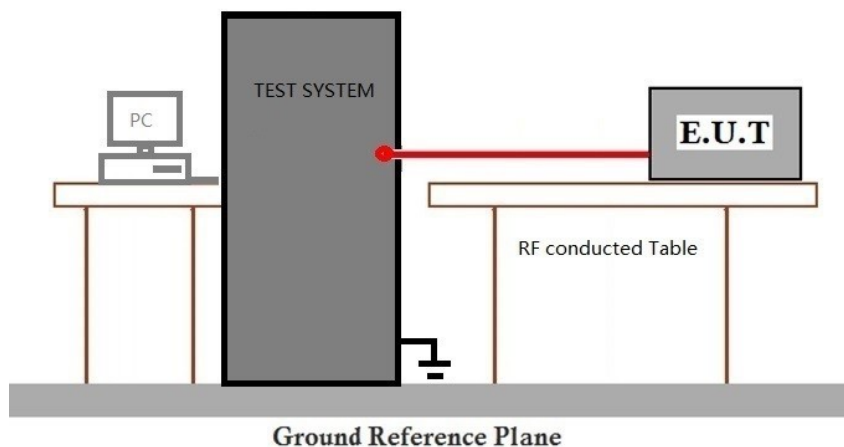

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10-2020+Cor.1-2023 Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 25.5 °C Humidity: 46.3 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.8.3 Test Setup Diagram

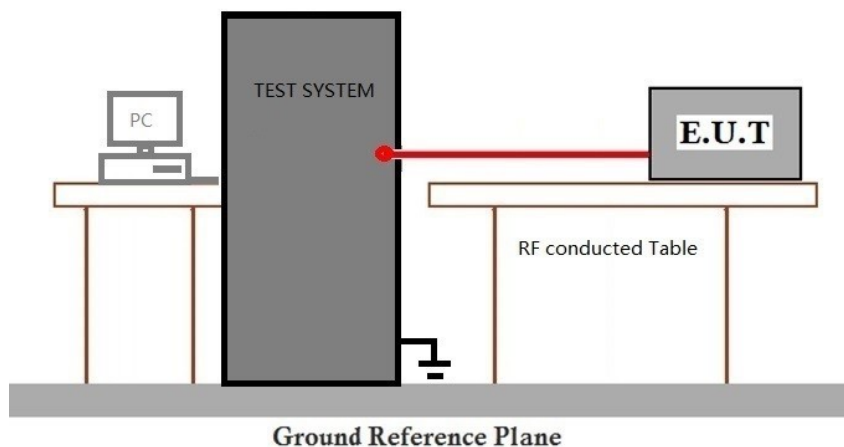

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2608001996AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2608001996AT

10 Appendix

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	100.000	100.000	100.00	0.00	0.00
		2440	100.000	100.000	100.00	0.00	0.00
		2480	100.000	100.000	100.00	0.00	0.00
2M	SISO	2402	100.000	100.000	100.00	0.00	0.00
		2440	100.000	100.000	100.00	0.00	0.00
		2480	100.000	100.000	100.00	0.00	0.00

1.2 Test Graph


1.2.1 Ant1

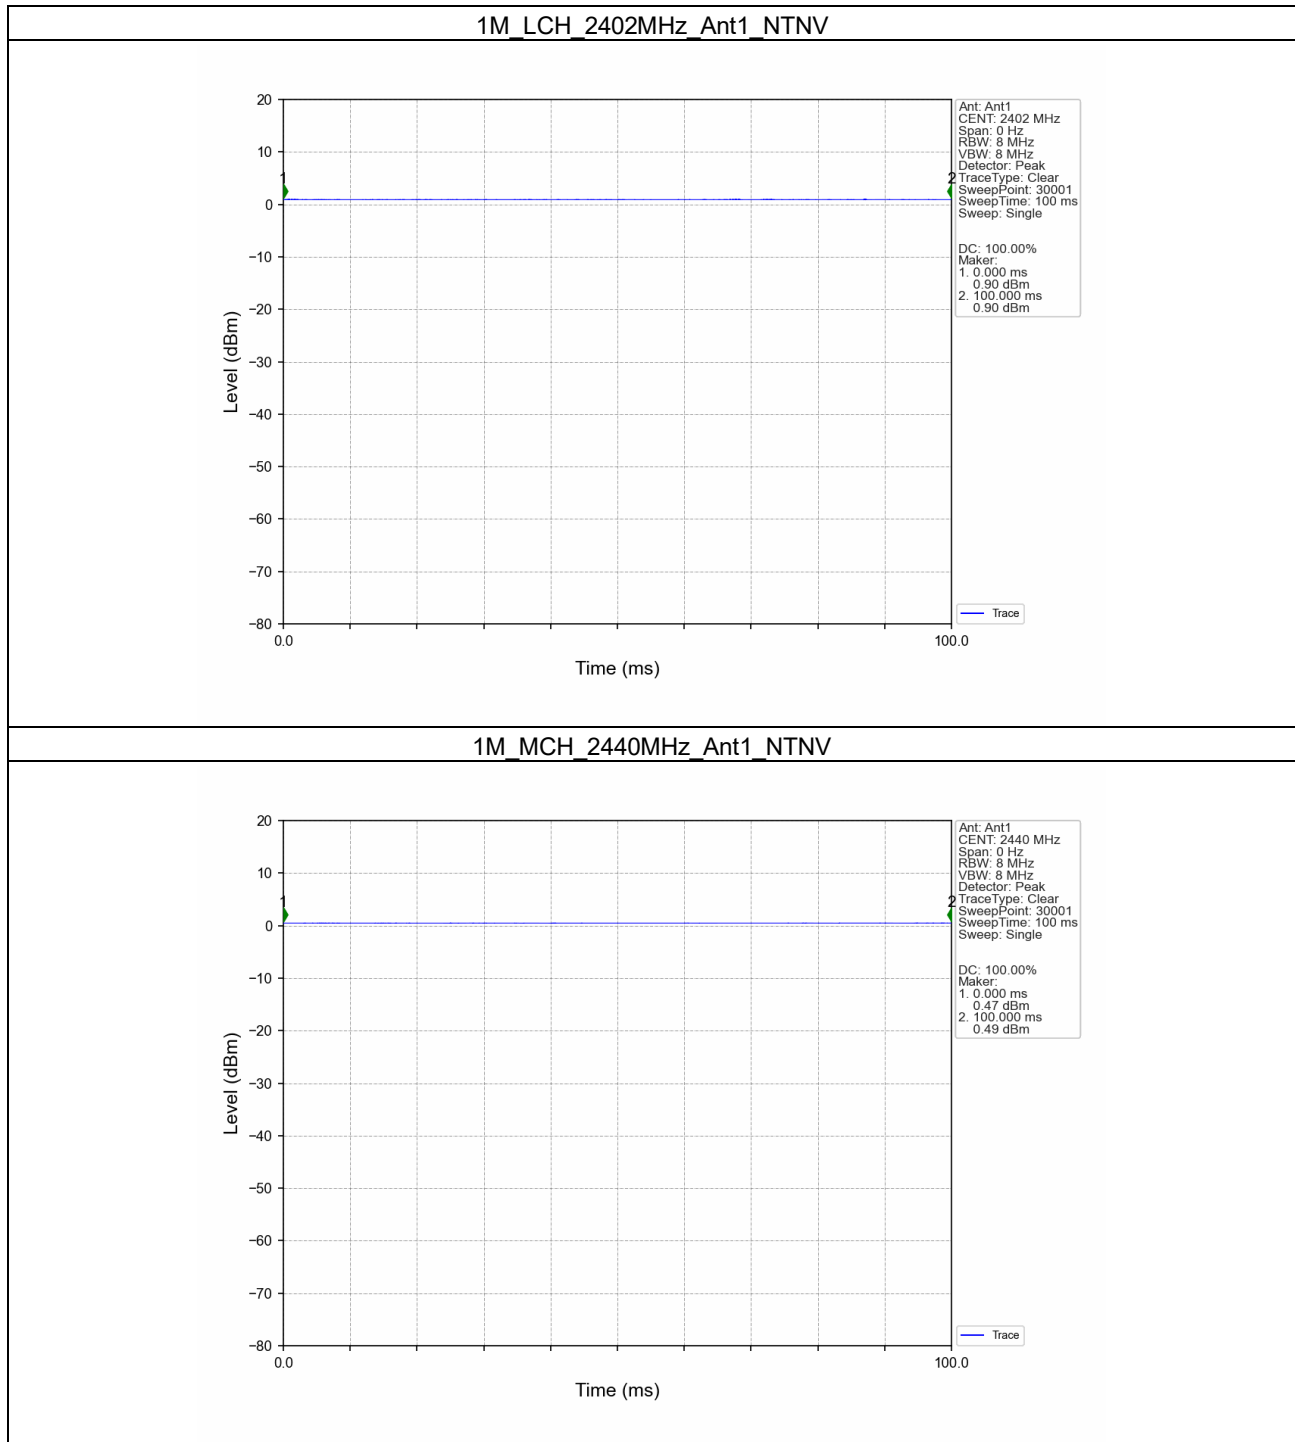


1M_HCH_2480MHz_Ant1_NTNV

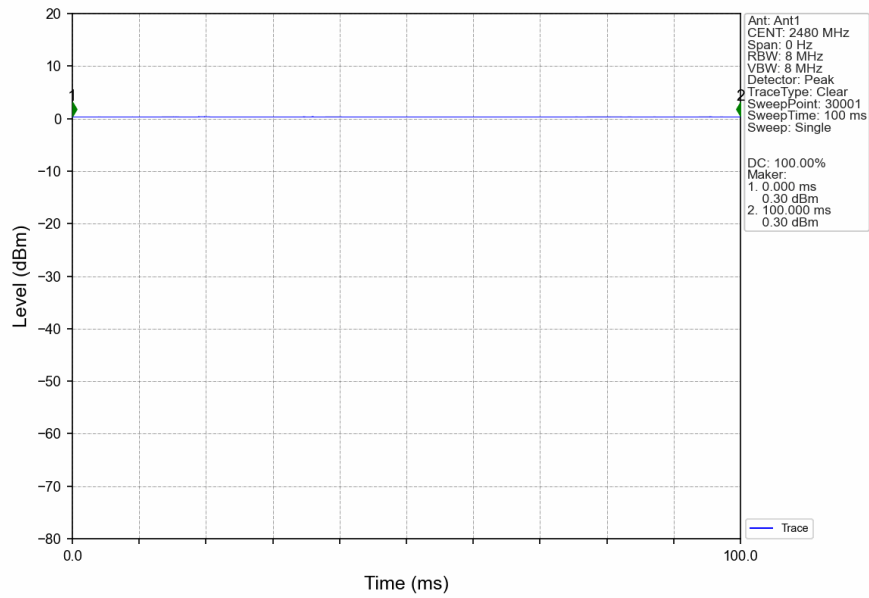


2M_LCH_2402MHz_Ant1_NTNV

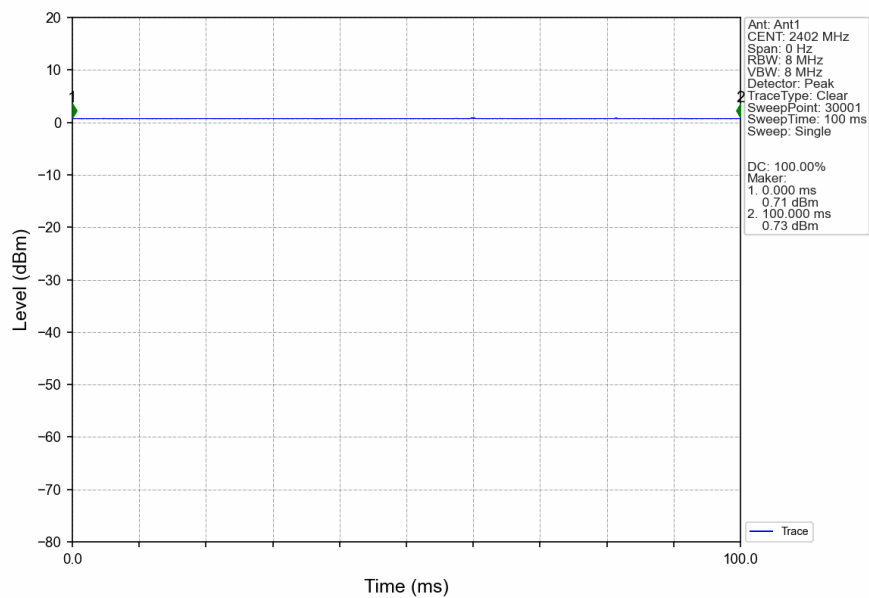

2M_MCH_2440MHz_Ant1_NTNV

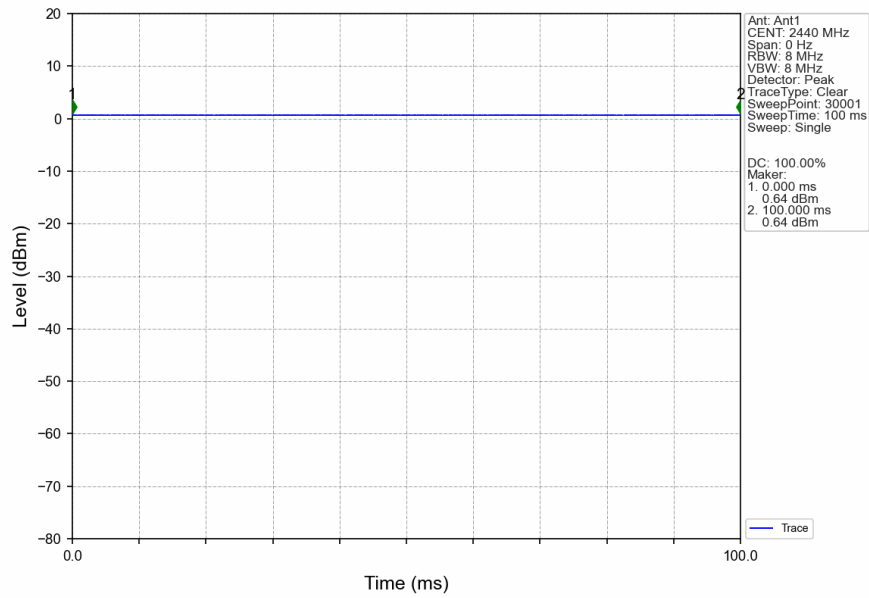

2M_HCH_2480MHz_Ant1_NTNV

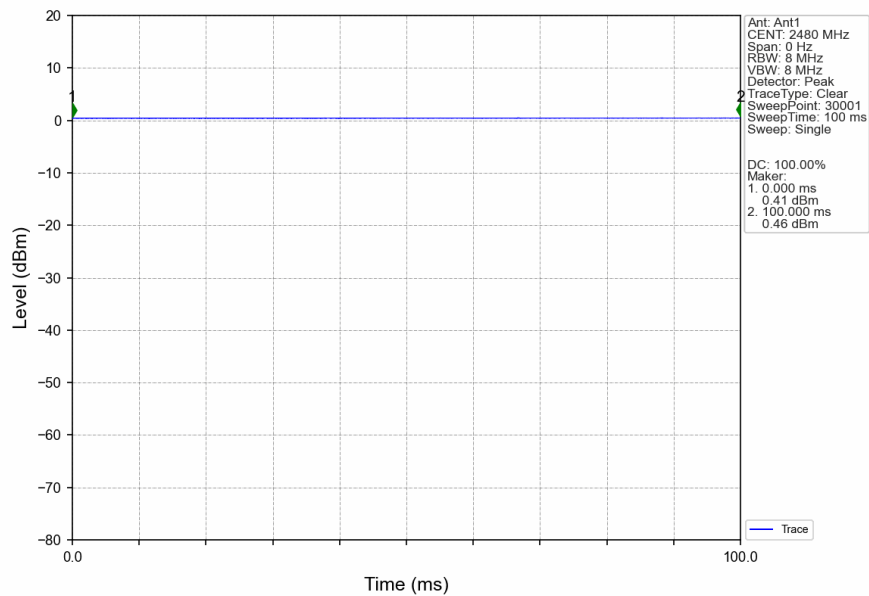

2. Bandwidth

2.1 Test Result

2.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.024	/	Pass
		2440	1	1.026	/	Pass
		2480	1	1.026	/	Pass
2M	SISO	2402	1	2.047	/	Pass
		2440	1	2.047	/	Pass
		2480	1	2.048	/	Pass

2.1.2 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.680	≥ 0.5	Pass
		2440	1	0.677	≥ 0.5	Pass
		2480	1	0.674	≥ 0.5	Pass
2M	SISO	2402	1	1.374	≥ 0.5	Pass
		2440	1	1.377	≥ 0.5	Pass
		2480	1	1.373	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

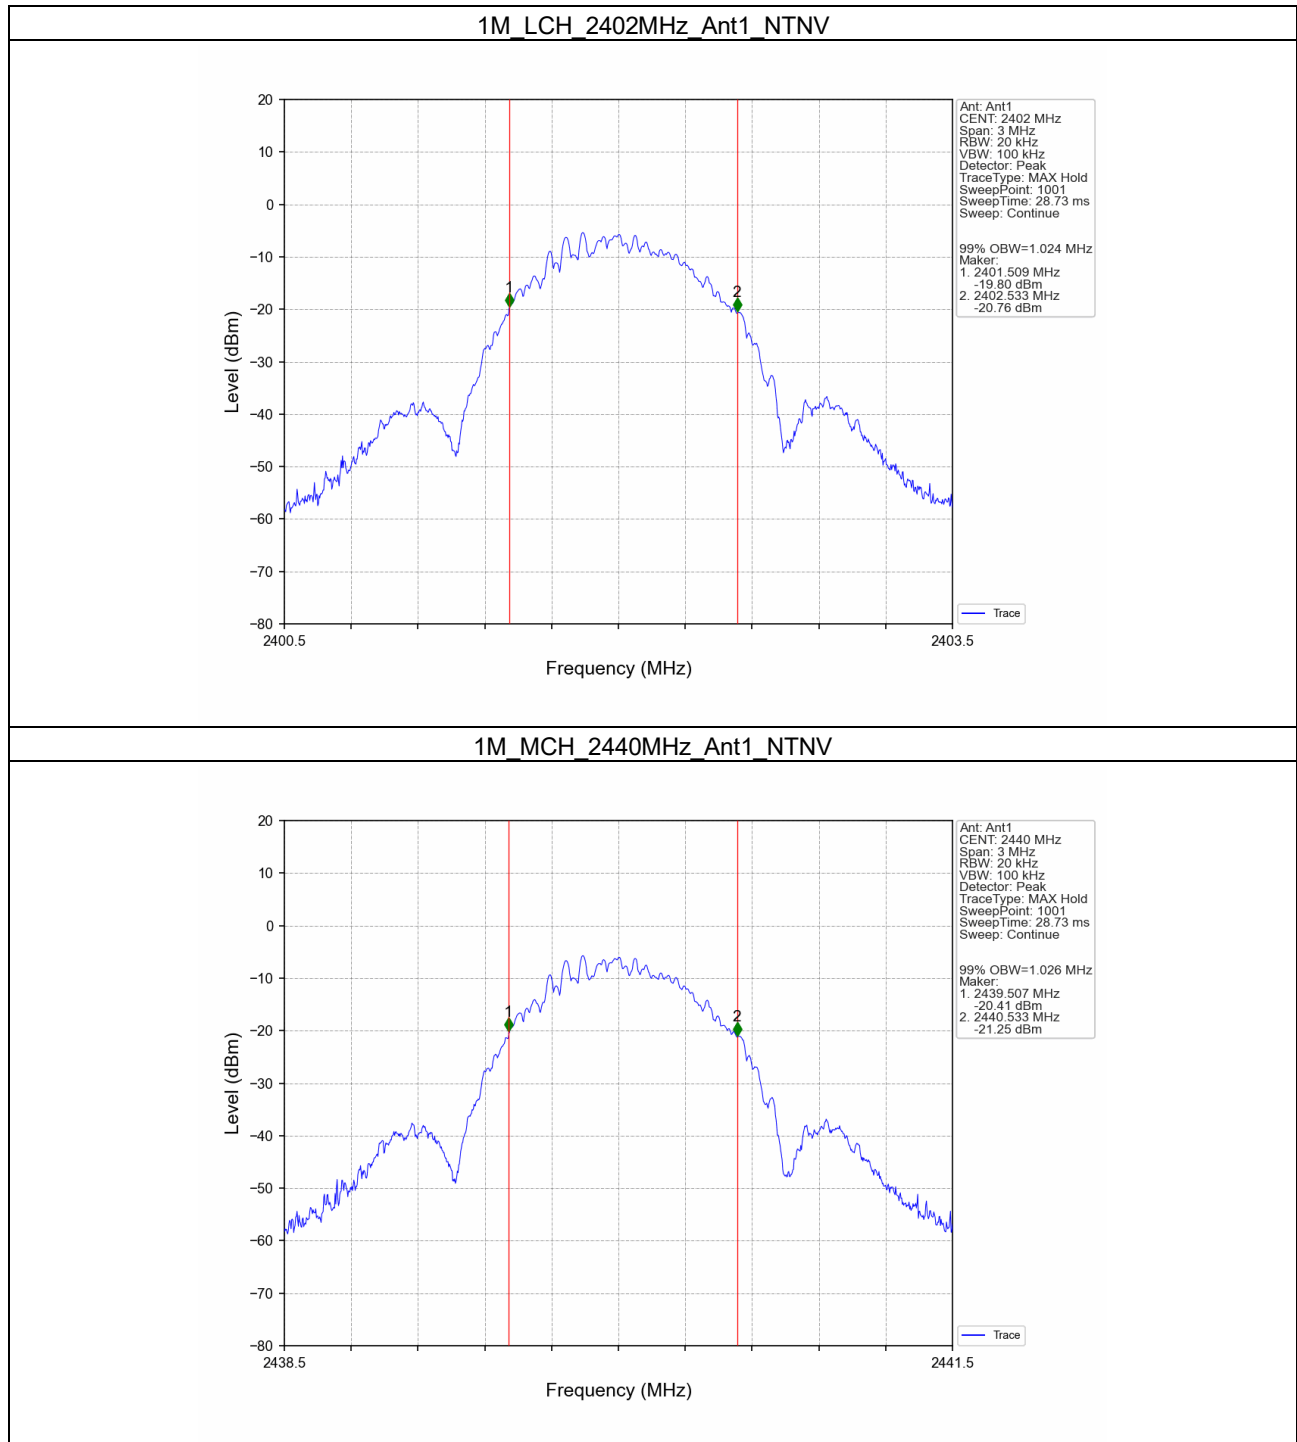


1M_HCH_2480MHz_Ant1_NTNV

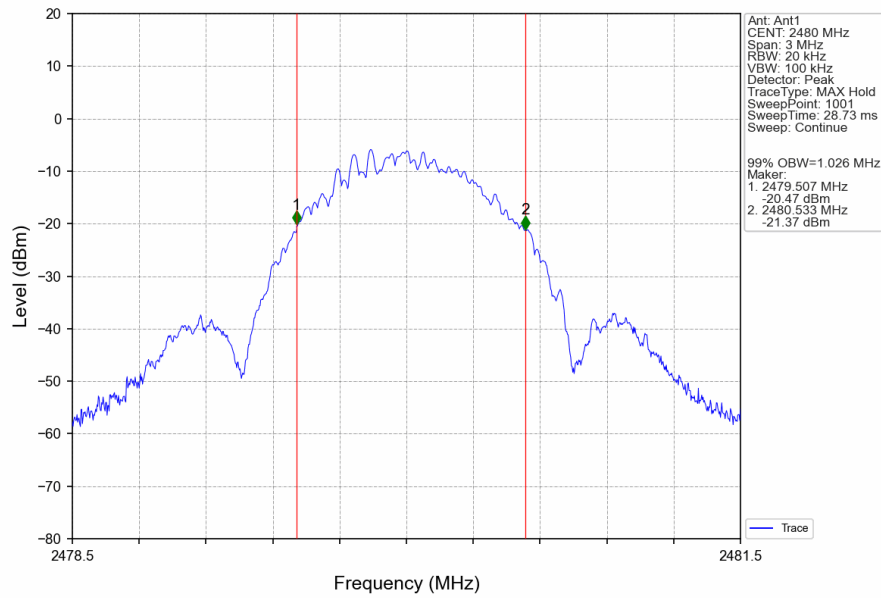


2M_LCH_2402MHz_Ant1_NTNV

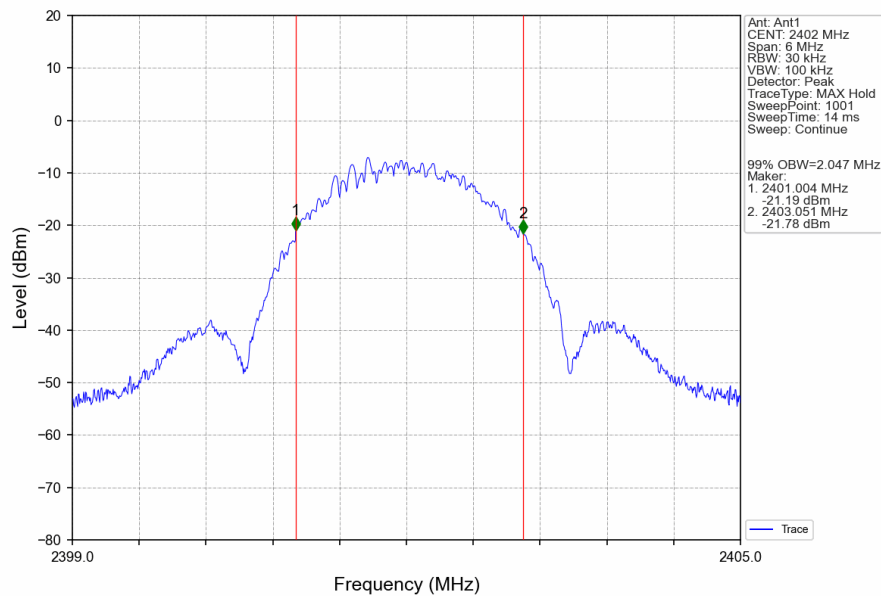

2M_MCH_2440MHz_Ant1_NTNV

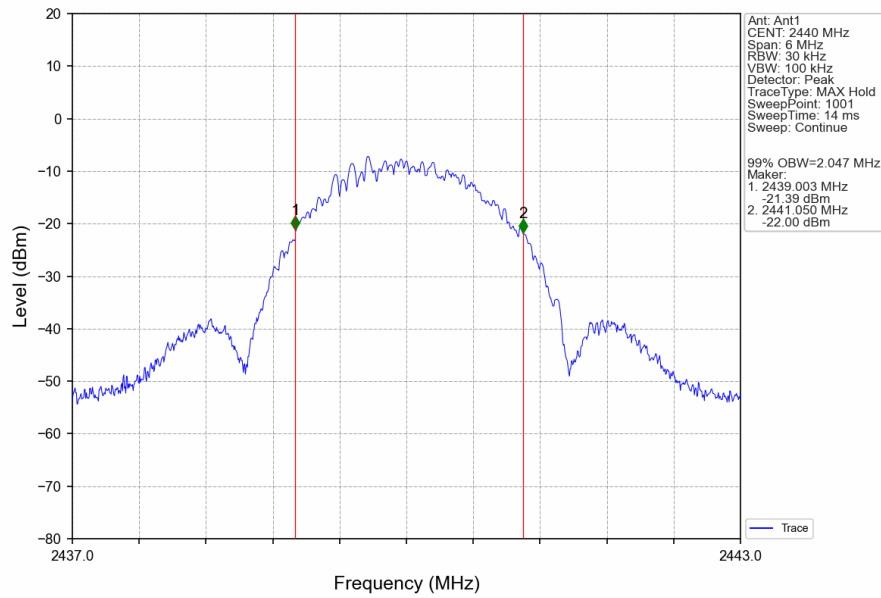


2M_HCH_2480MHz_Ant1_NTNV

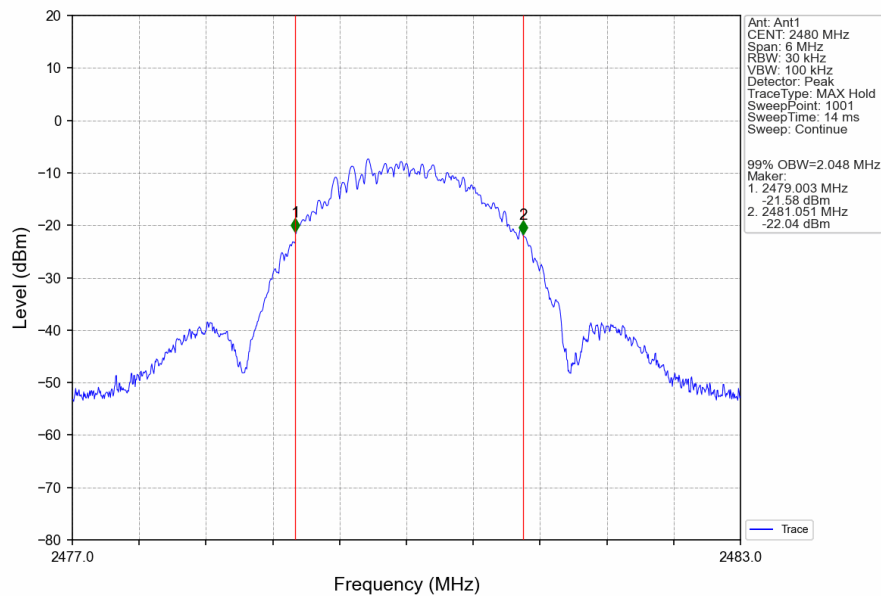


2.2.2 6dB BW


1M_LCH_2402MHz_Ant1_NTNV

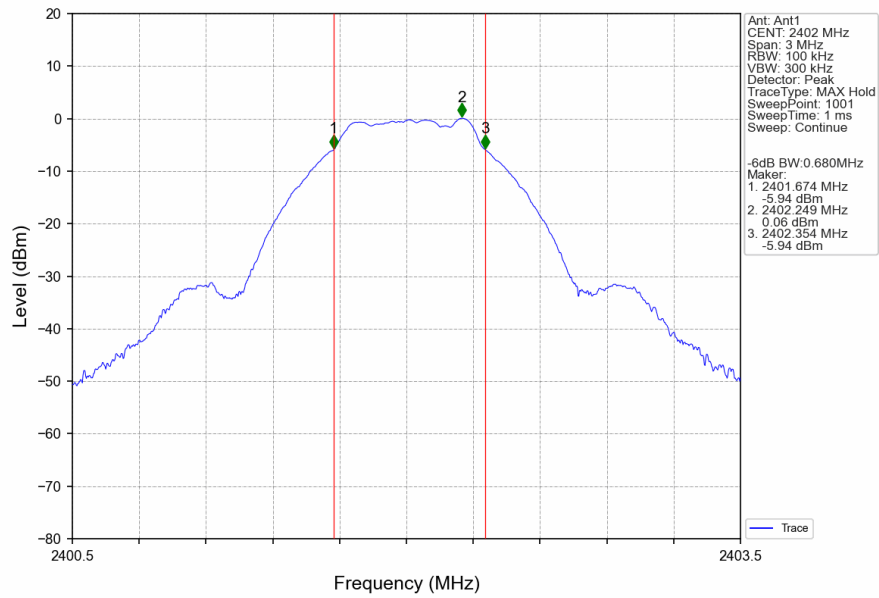


1M_MCH_2440MHz_Ant1_NTNV

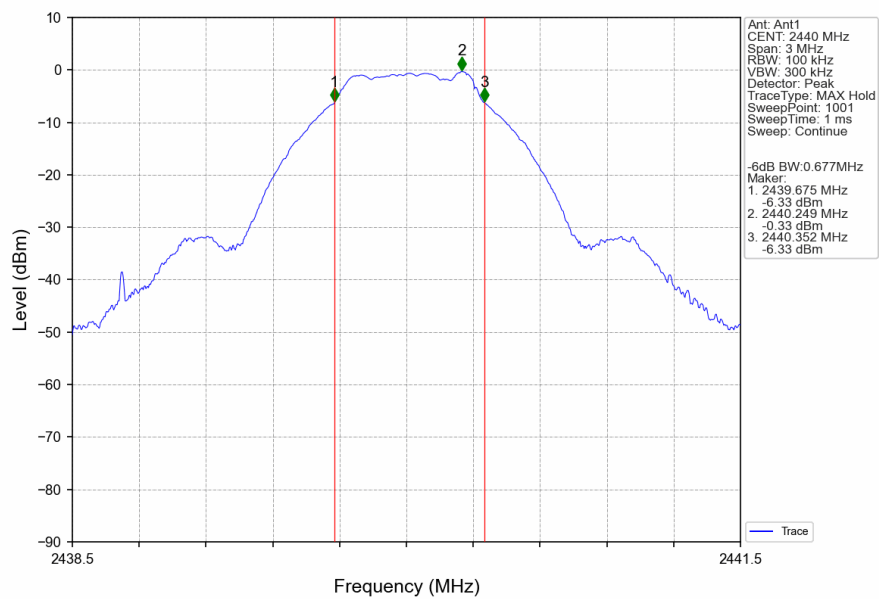


1M_HCH_2480MHz_Ant1_NTNV

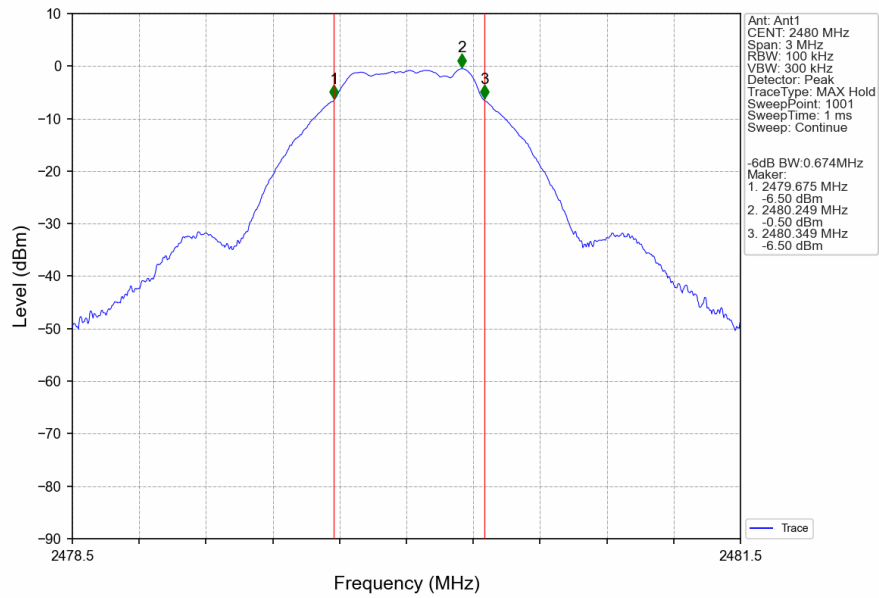


2M_LCH_2402MHz_Ant1_NTNV

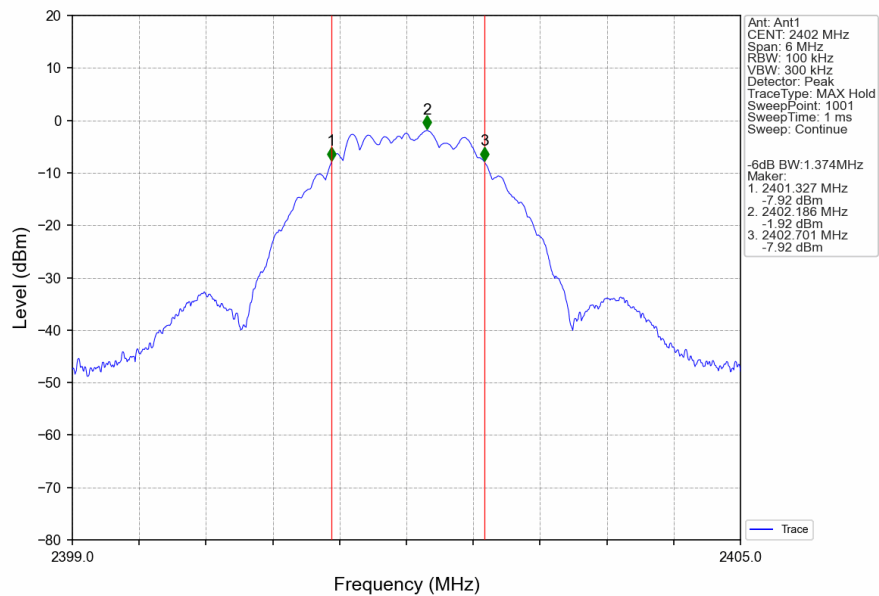

2M_MCH_2440MHz_Ant1_NTNV

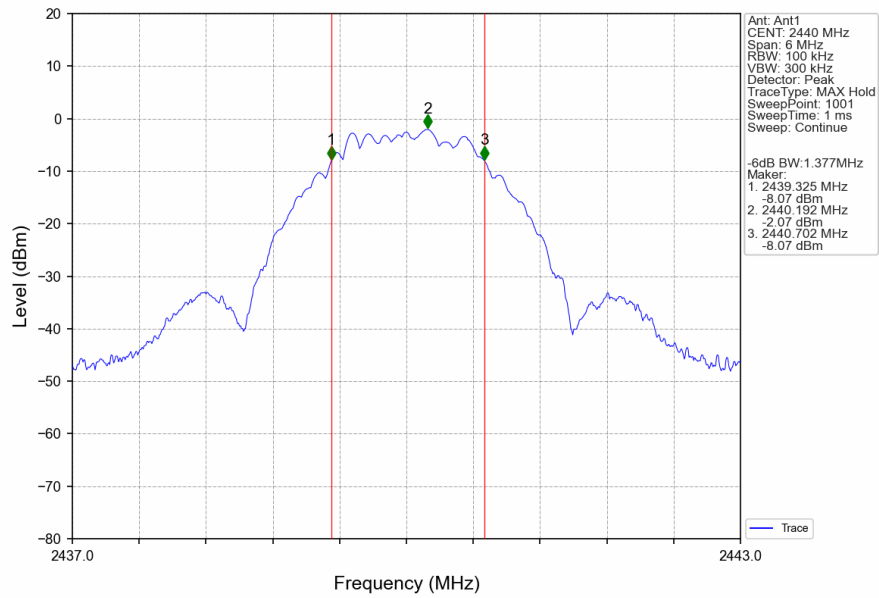

2M_HCH_2480MHz_Ant1_NTNV

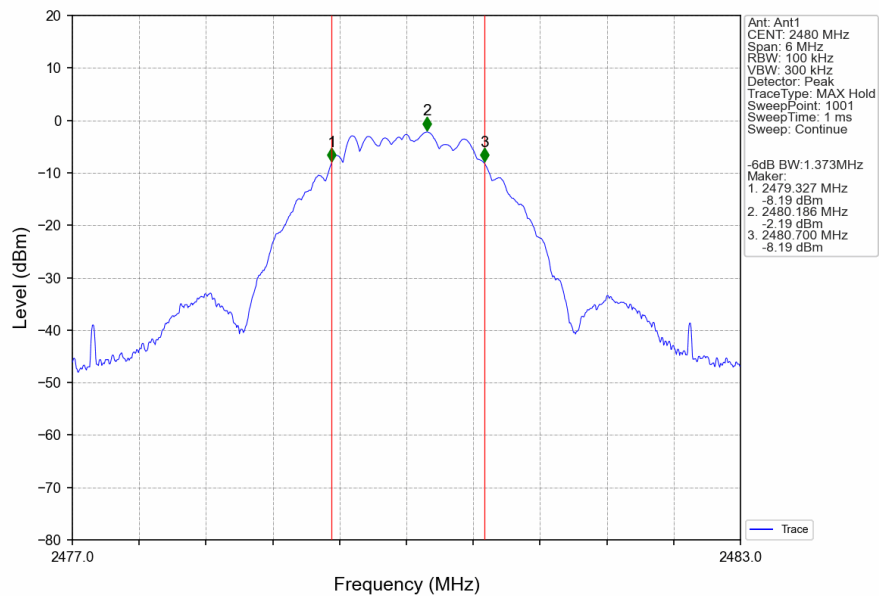

3. Maximum Conducted Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	0.86	<=30	Pass
		2440	0.41	<=30	Pass
		2480	0.24	<=30	Pass
2M	SISO	2402	0.63	<=30	Pass
		2440	0.52	<=30	Pass
		2480	0.36	<=30	Pass
Note1: Antenna Gain: Ant1: 4.97dBi;					

3.2 Test Graph


3.2.1 Power

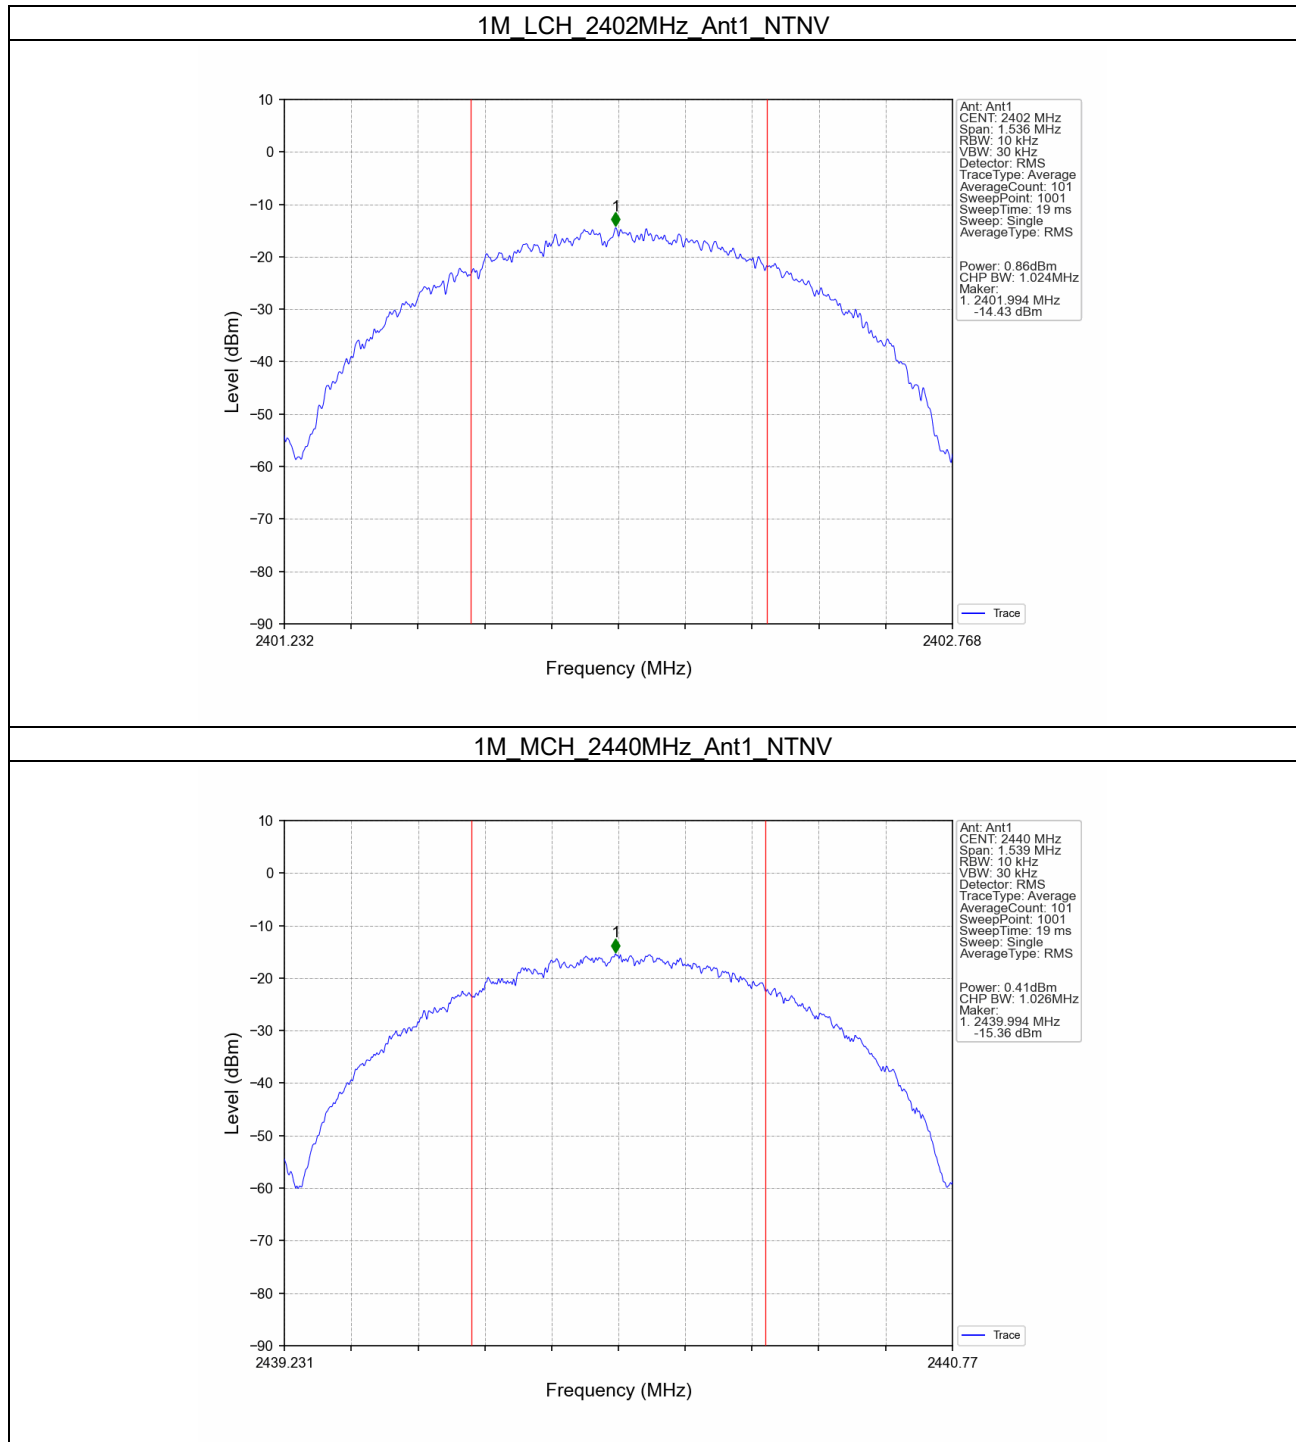


1M_HCH_2480MHz_Ant1_NTNV

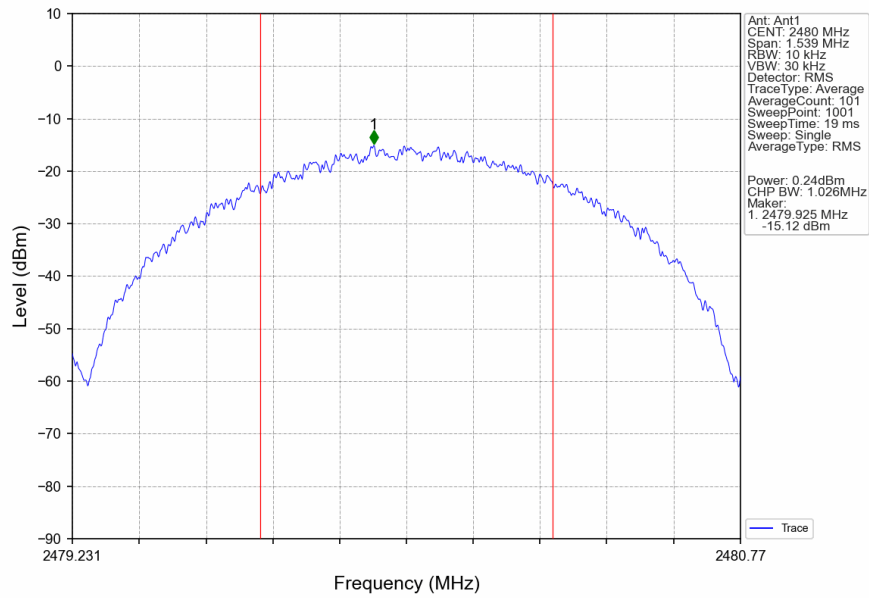


2M_LCH_2402MHz_Ant1_NTNV

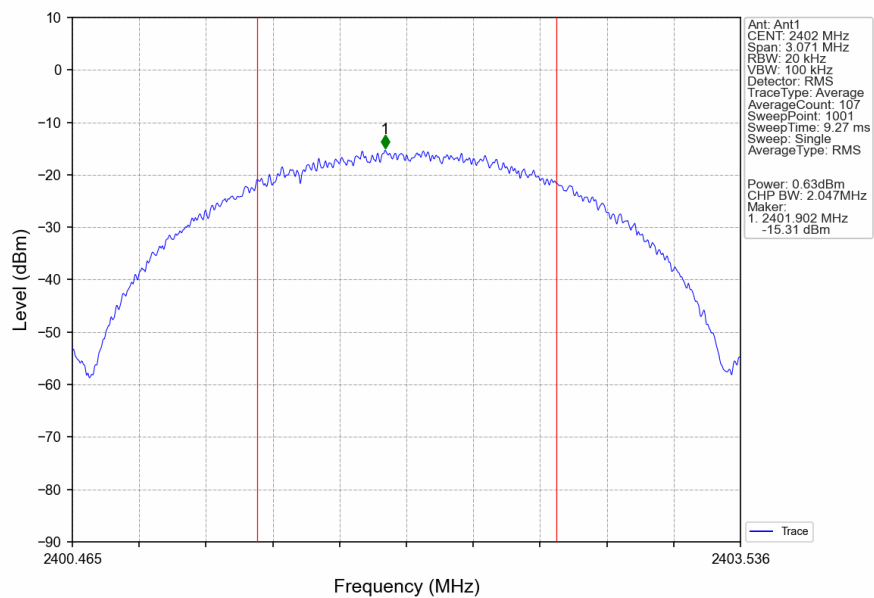

2M_MCH_2440MHz_Ant1_NTNV

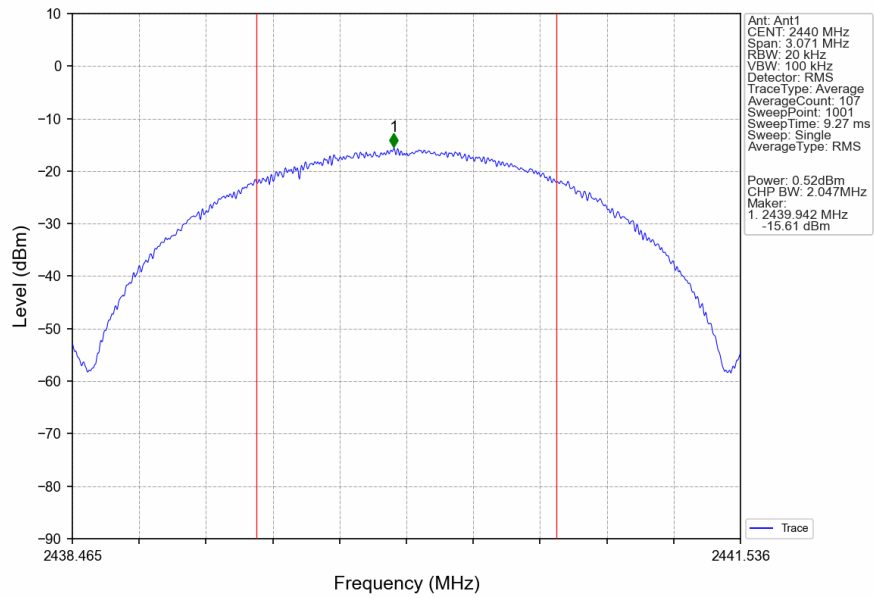

2M_HCH_2480MHz_Ant1_NTNV

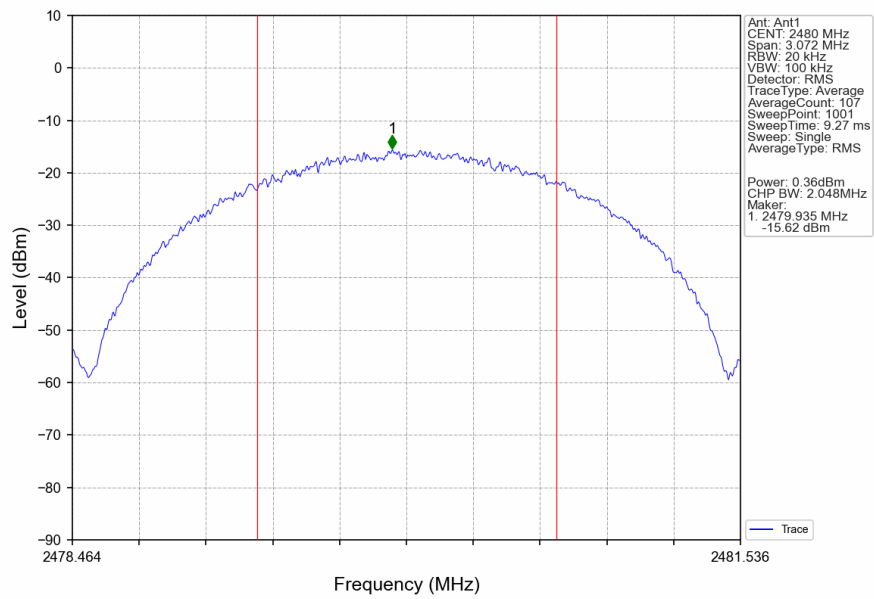

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit(dBm/3kHz)	
1M	SISO	2402	-18.35dBm/3kHz	<=8	Pass
		2440	-19.39dBm/3kHz	<=8	Pass
		2480	-19.47dBm/3kHz	<=8	Pass
2M	SISO	2402	-23.42dBm/3kHz	<=8	Pass
		2440	-23.68dBm/3kHz	<=8	Pass
		2480	-23.53dBm/3kHz	<=8	Pass
Note1: Antenna Gain: Ant1: 4.97dBi;					

4.2 Test Graph


4.2.1 PSD

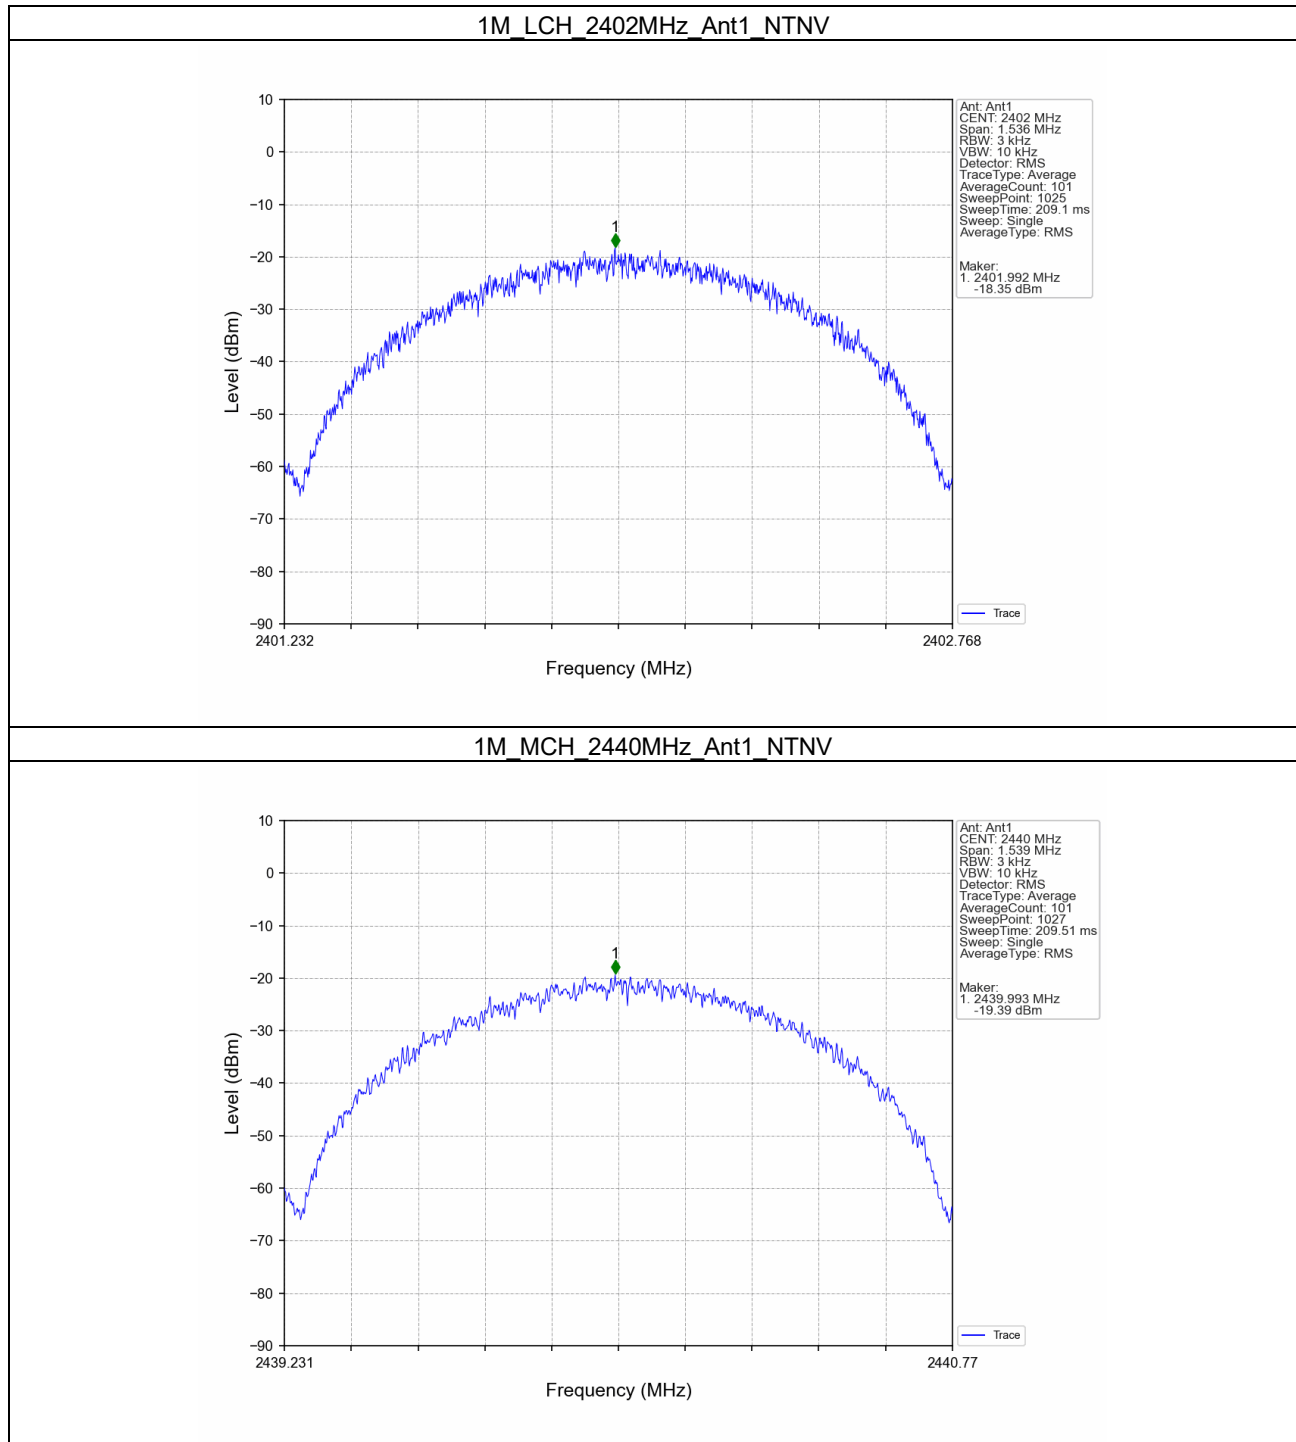


1M_HCH_2480MHz_Ant1_NTNV

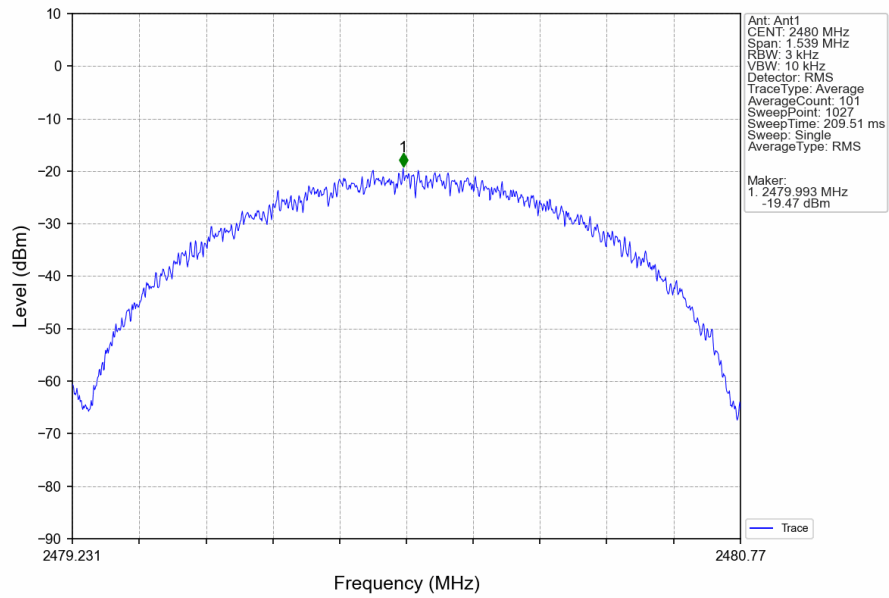


2M_LCH_2402MHz_Ant1_NTNV

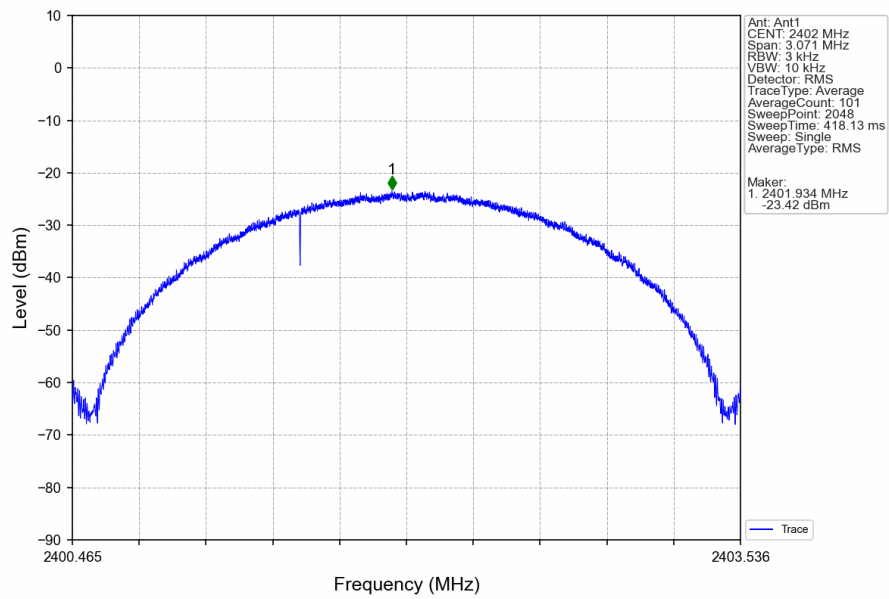

2M_MCH_2440MHz_Ant1_NTNV

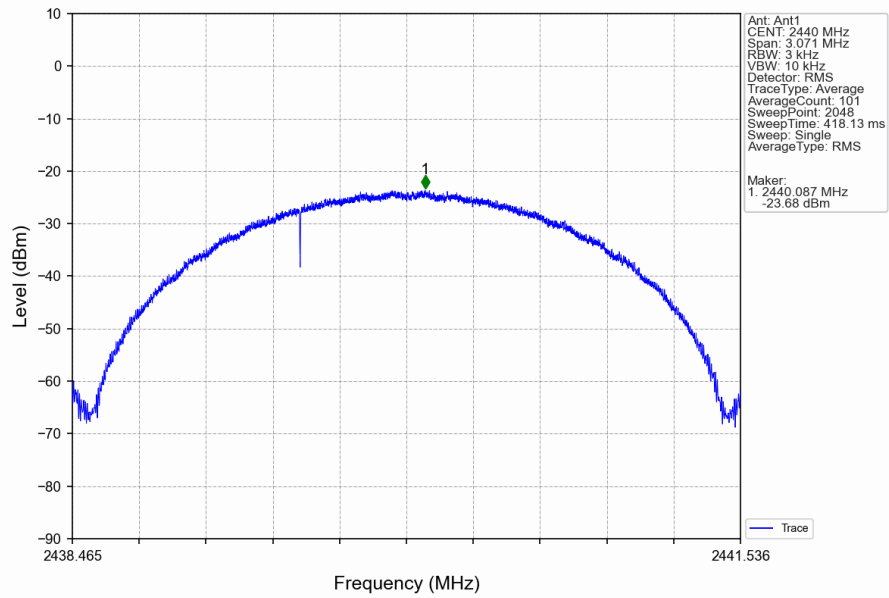

2M_HCH_2480MHz_Ant1_NTNV

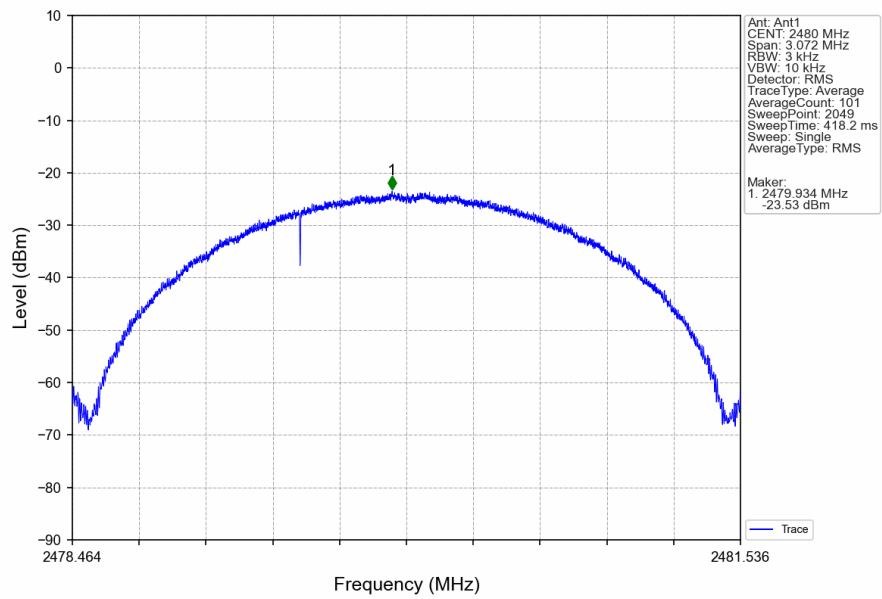

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-0.01
		2440	1	-0.07
		2480	1	-0.11
2M	SISO	2402	1	-2.07
		2440	1	-2.12
		2480	1	-2.34

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-0.01	-30.01	Pass
		2440	1	-0.01	-30.01	Pass
		2480	1	-0.01	-30.01	Pass
2M	SISO	2402	1	-2.07	-32.07	Pass
		2440	1	-2.07	-32.07	Pass
		2480	1	-2.07	-32.07	Pass

5.2 Test Graph


5.2.1 Ref

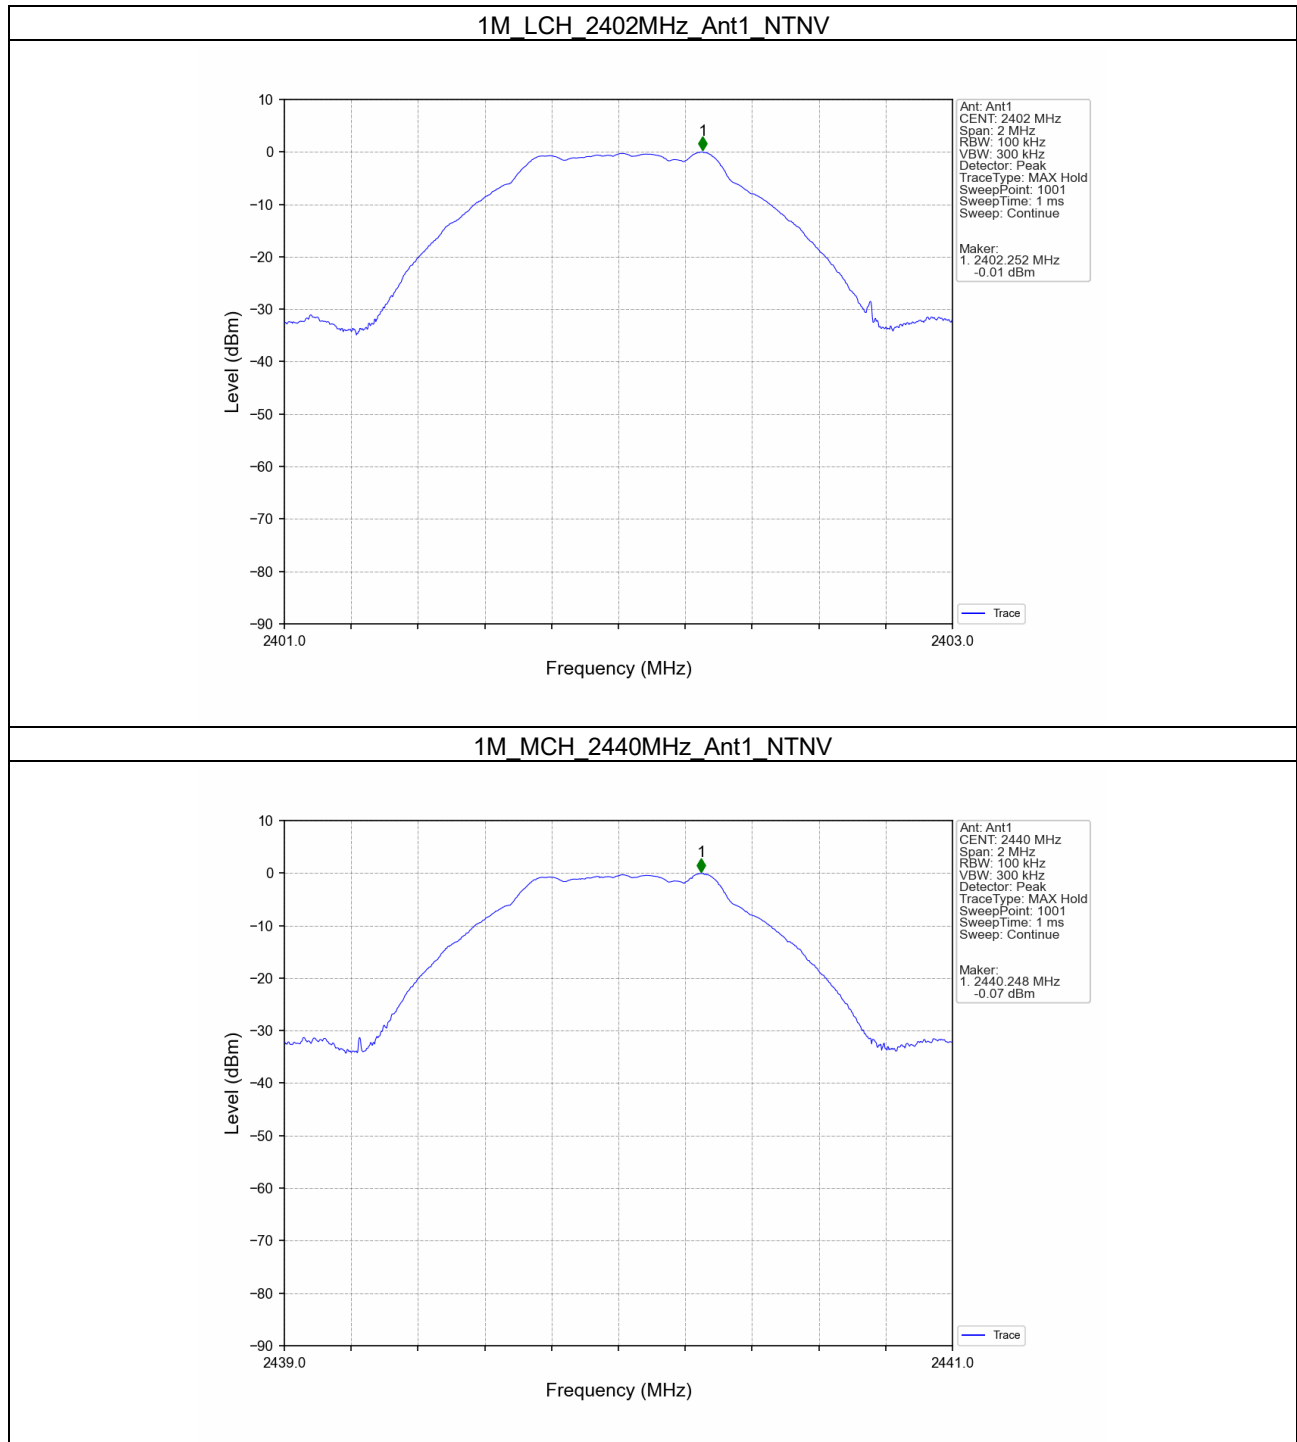


1M_HCH_2480MHz_Ant1_NTNV

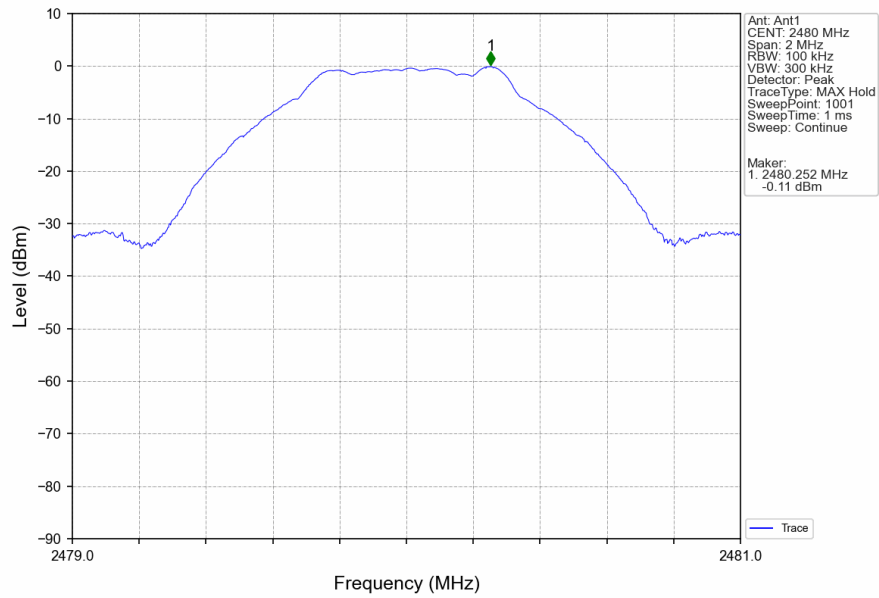


2M_LCH_2402MHz_Ant1_NTNV

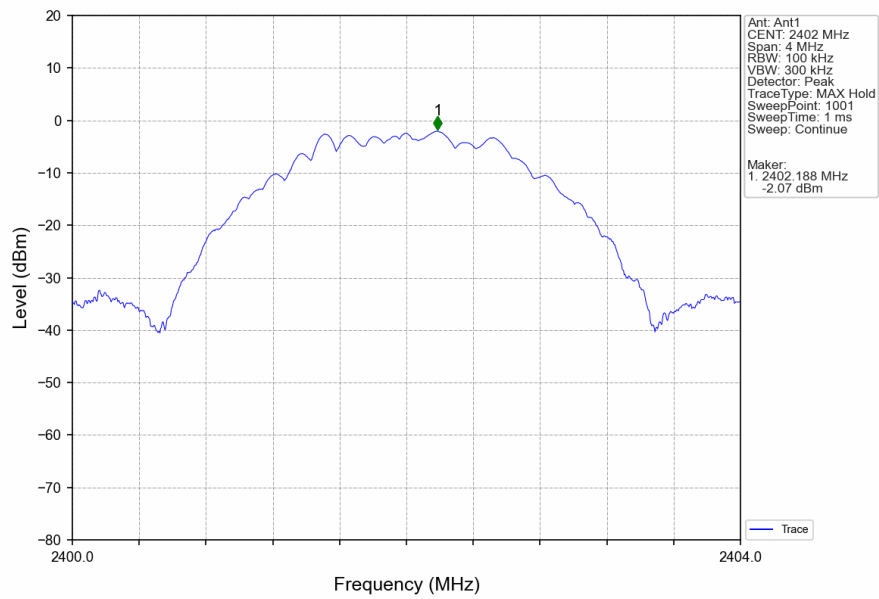

2M_MCH_2440MHz_Ant1_NTNV

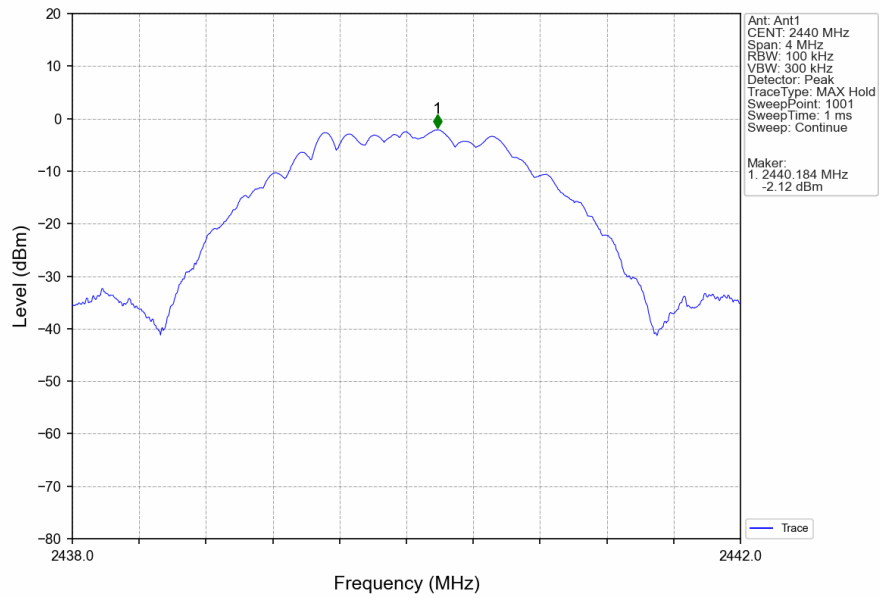


2M_HCH_2480MHz_Ant1_NTNV

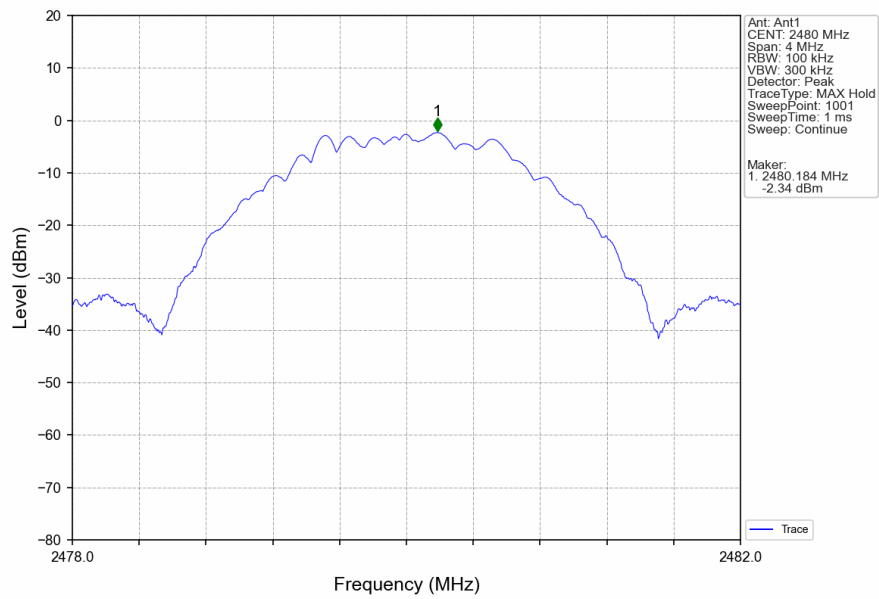


5.2.2 CSE


1M_LCH_2402MHz_Ant1_NTNV

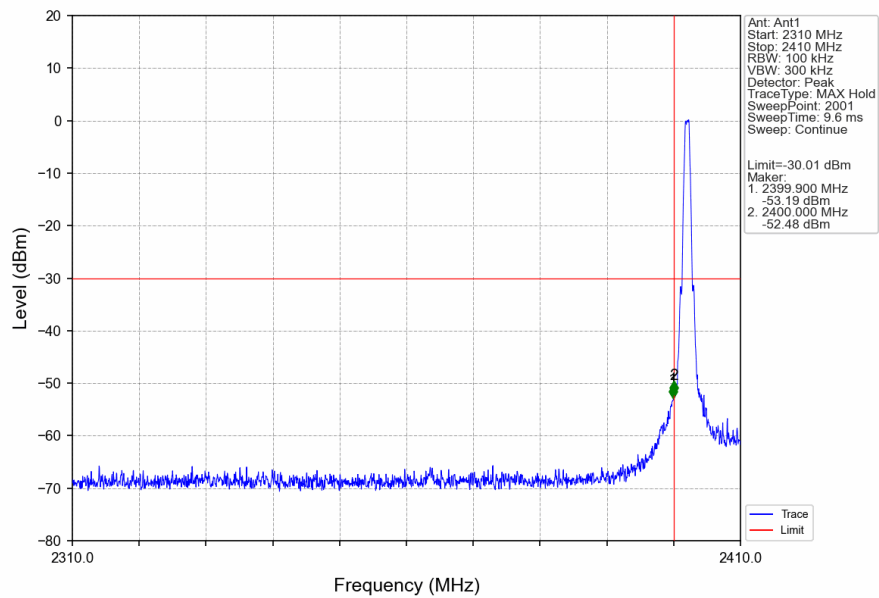


1M_LCH_2402MHz_Ant1_NTNV

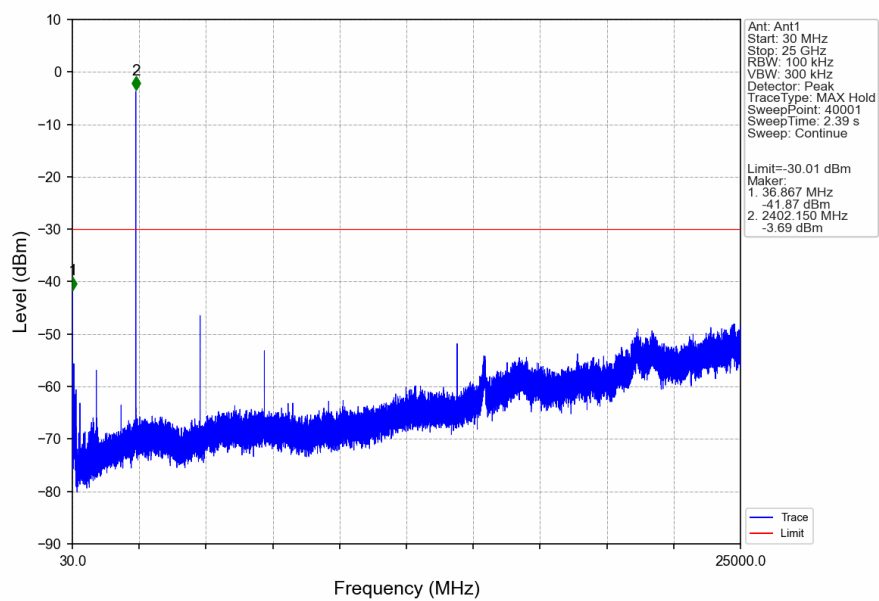


1M_MCH_2440MHz_Ant1_NTNV

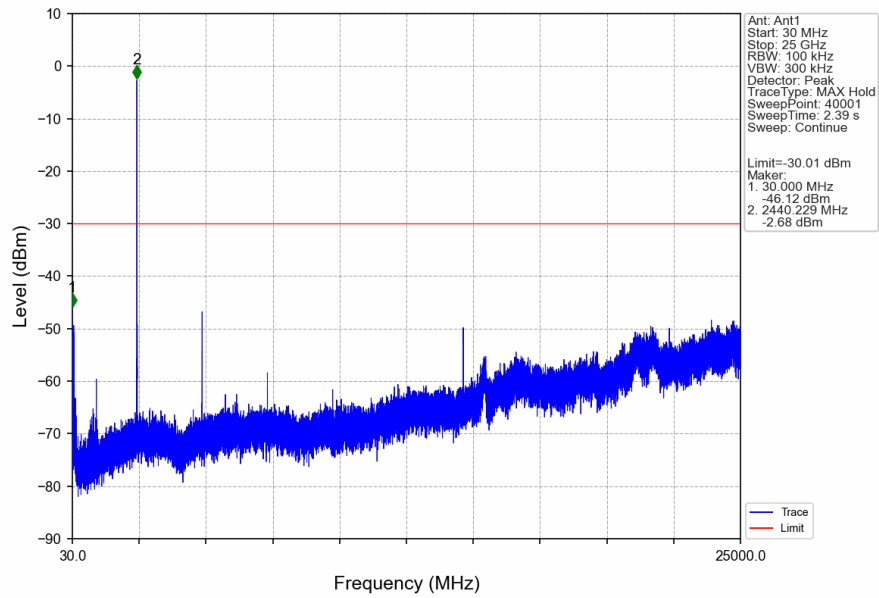


1M_HCH_2480MHz_Ant1_NTNV

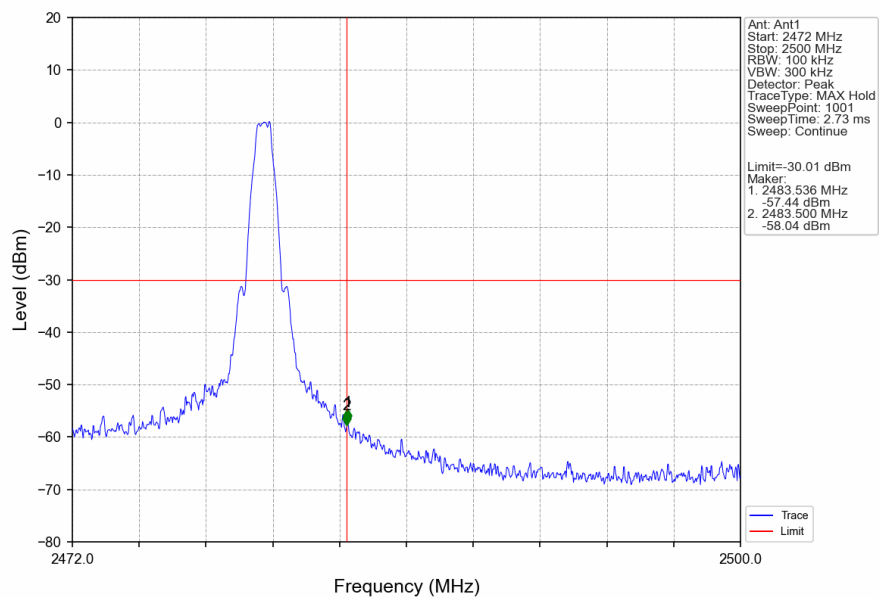


1M_HCH_2480MHz_Ant1_NTNV

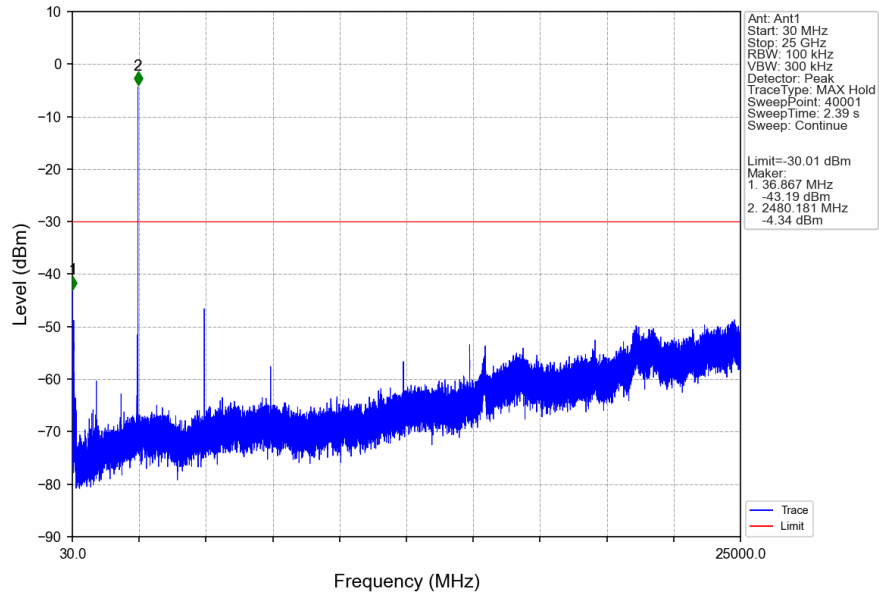


2M_LCH_2402MHz_Ant1_NTNV

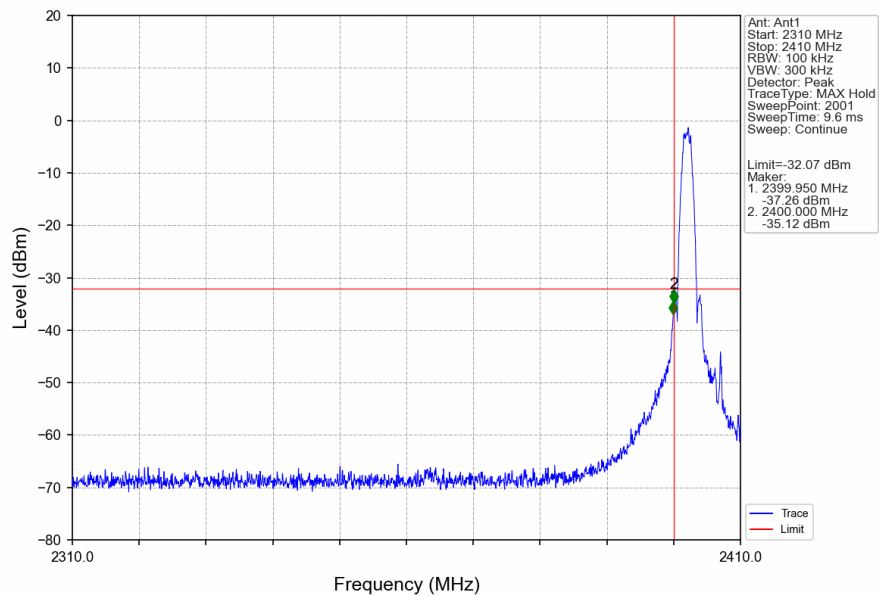


2M_LCH_2402MHz_Ant1_NTNV

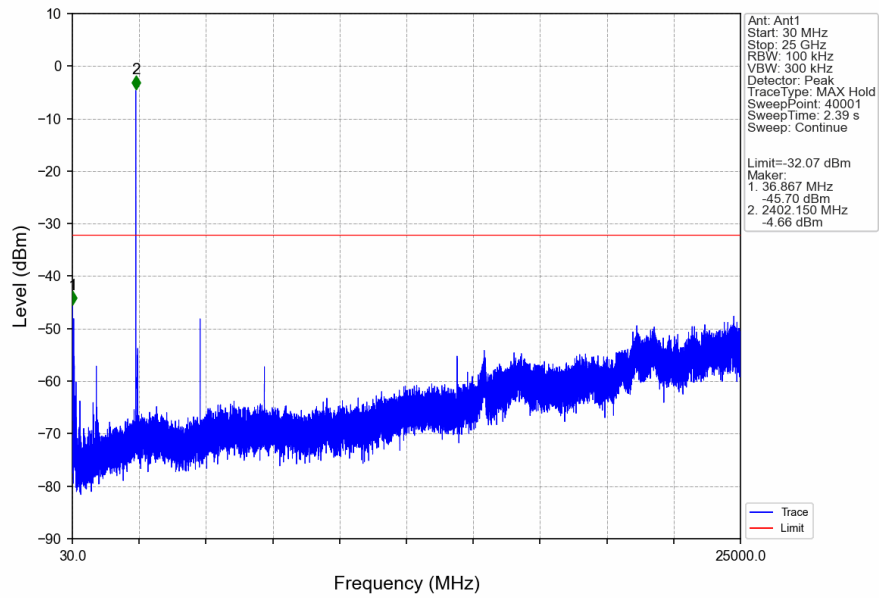


2M_MCH_2440MHz_Ant1_NTNV

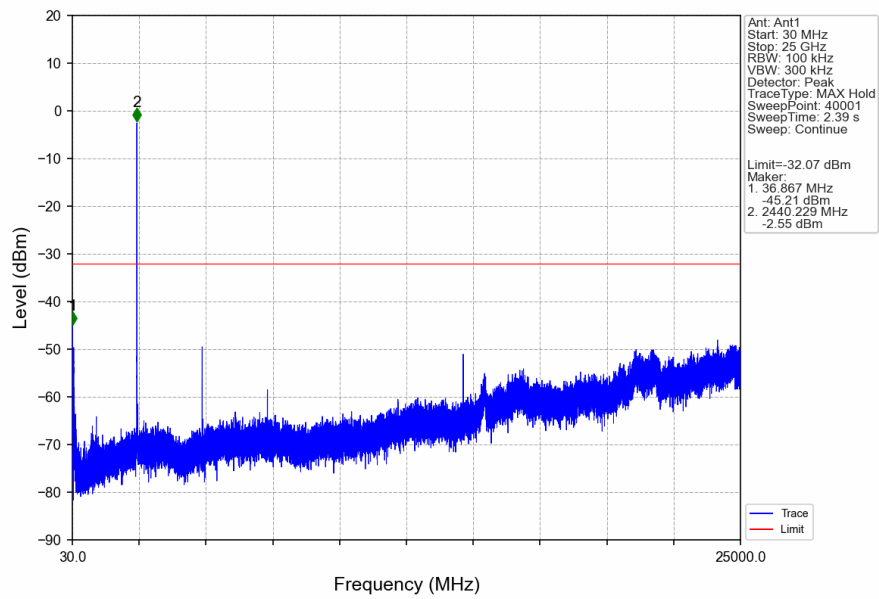

2M_HCH_2480MHz_Ant1_NTNV

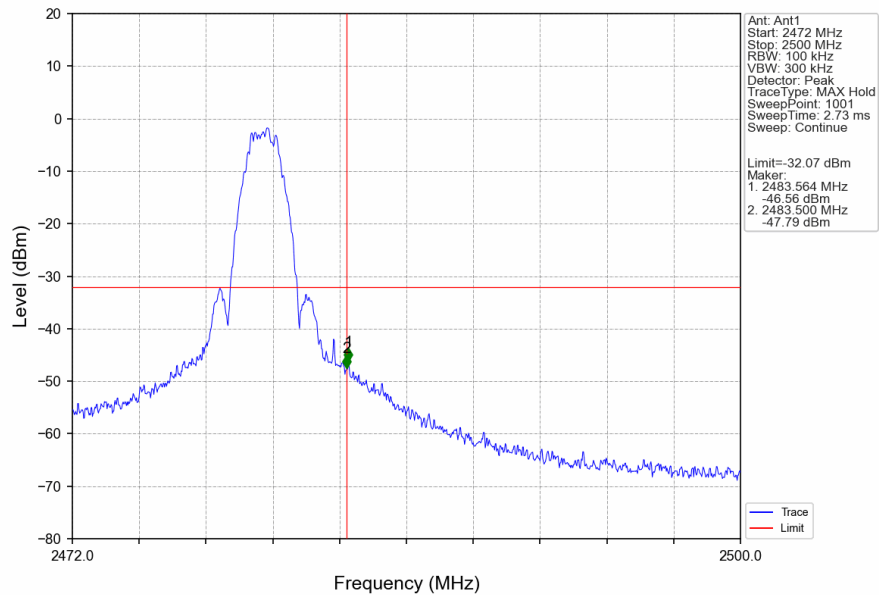

2M_HCH_2480MHz_Ant1_NTNV

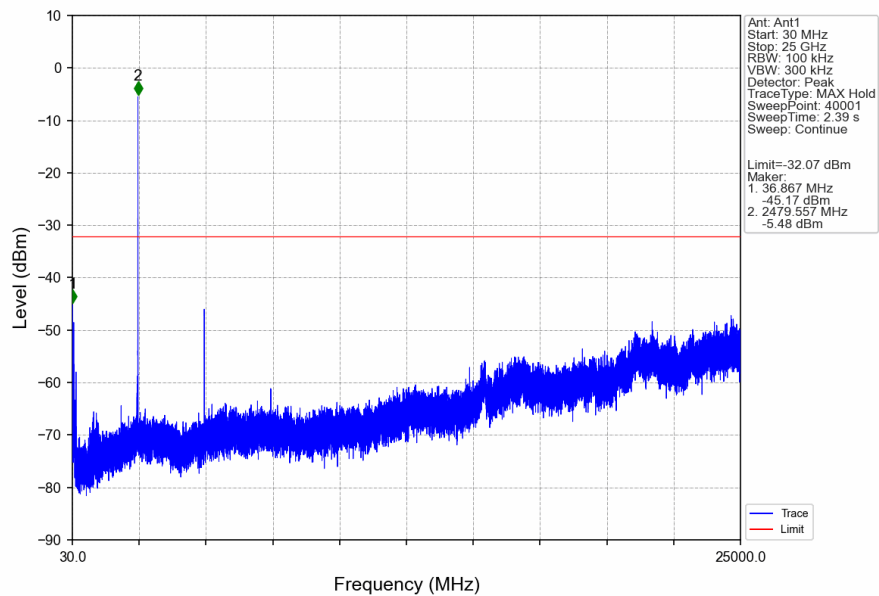

- End of the Report -