

# FCC Part 15B TEST REPORT

**Product Name : 3G/2G fixed wireless phone**

**Model Name : F800C**

Prepared for:

**CO-COMM SERVICIOS TELECOMUNICACIONES S.L.**

**C/Lisboa, 20 – 28232 Las Rozas (Madrid), Spain.**

**TEL: (+34) 981 553233**

**FAX: (+34) 981 553054**

Prepared by:

**Unilab (Shanghai) Co., Ltd.**

**FCC 2.948 register number is 714465**

**No. 1350, Lianxi Rd. Pudong New District, Shanghai, China**

**TEL: +86-21-50275125**

**FAX: +86-21-50275126**

**Report Number : UL47120170105FCC001-5**

**Date of Report : 02-07-2017**

**Date of Test : 01-05-2017~01-23-2017**

## Notes :

The test results only relate to these samples which have been tested.

Partly using this report will not be admitted unless been allowed by Unilab.

Unilab is only responsible for the complete report with the reported stamp of Unilab.

**Applicant:** CO-COMM SERVICIOS TELECOMUNICACIONES S.L.  
C/Lisboa, 20 – 28232 Las Rozas (Madrid), Spain.

**Manufacturer:** CO-COMM SERVICIOS TELECOMUNICACIONES S.L.  
C/Lisboa, 20 – 28232 Las Rozas (Madrid), Spain.

**Product Name:** 3G/2G fixed wireless phone

**Brand Name:** CO-COMM

**Model Name:** F800C

**FCC ID:** 2AKWZF800C

**EUT Voltage:** Extreme Low:3.5V  
Nominal:3.7V  
Extreme High:4.2V

**Date of Receipt:** 01-05-2017

**Test Standard:** FCC CFR Title 47 Part 15 Subpart B

**Test Result:** Pass

**Date of Test** 01-13-2017~01-20-2017

Prepared by : Wayne Wu  
(Technical Engineer: Wayne Wu)

Reviewed by : Forest Cao  
(Senior Engineer: Forest Cao)

Approved by : Eva Wang  
(Supervisor: Eva Wang)

## TABLE OF CONTENTS

|                   |                                             |           |
|-------------------|---------------------------------------------|-----------|
| <b>1.</b>         | <b>TECHNIACL SUMMARY .....</b>              | <b>4</b>  |
| 1.1               | SUMMARY OF STANDARDS AND TEST RESULTS ..... | 4         |
| 1.2               | TEST UNCERTAINTY .....                      | 4         |
| 1.3               | TEST EQUIPMENT LIST .....                   | 4         |
| 1.4               | SUPPORT EQUIPMENT AND CABLE .....           | 4         |
| 1.5               | CABLE OF TEST .....                         | 4         |
| 1.6               | TEST MODE AND DESCRIPTION .....             | 4         |
| 1.7               | TEST FACILITY .....                         | 5         |
| 1.8               | TEST SETUP CONFIGURATION .....              | 5         |
| <b>2.</b>         | <b>CONDUCTED DISTURBANCE .....</b>          | <b>6</b>  |
| 2.1               | TEST SETUP .....                            | 6         |
| 2.2               | LIMITS .....                                | 6         |
| 2.3               | TEST PROCEDURE .....                        | 6         |
| 2.4               | TEST RESULT .....                           | 7         |
| <b>3.</b>         | <b>RADIATED DISTURBANCE (RE) .....</b>      | <b>9</b>  |
| 3.1               | TEST SETUP .....                            | 9         |
| 3.2               | LIMITS .....                                | 9         |
| 3.3               | TEST PROCEDURE .....                        | 10        |
| 3.4               | TEST RESULT .....                           | 11        |
| <b>APPENDIX 1</b> | <b>PHOTOGRAPHS OF TEST SETUP.....</b>       | <b>15</b> |
| <b>APPENDIX 2</b> | <b>PHOTOGRAPHS OF EUT .....</b>             | <b>15</b> |

## 1. TECHNIACL SUMMARY

### 1.1 SUMMARY OF STANDARDS AND TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

| Test Item             | FCC        | Result |
|-----------------------|------------|--------|
| Conducted disturbance | FCC 15.107 | P*     |
| Radiated disturbance  | FCC 15.109 | P      |

Note: P means pass, F means failure, N/A means not applicable

### 1.2 TEST UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Test item             | Value (dB) |
|-----------------------|------------|
| Conducted disturbance | 3.4        |
| Radiated disturbance  | 4.2        |

### 1.3 TEST EQUIPMENT LIST

| Equipment                        | Manufacturer   | Model      | Serial No. | Due Date   | Cal interval |
|----------------------------------|----------------|------------|------------|------------|--------------|
| Receiver                         | Agilent        | N9038A     | MY51210142 | 11/01/2017 | 1 year       |
| LISN                             | R&S            | NNBM 8126F | 1035       | 08/21/2017 | 1 year       |
| 3m Chamber & Accessory Equipment | ETS-LINDGREN   | FACT-3     | CT-0000336 | 03/12/2017 | 3 years      |
| Biconilog Antenna                | SCHWARZBECK    | VULB 9160  | 3316       | 09/08/2018 | 2 years      |
| Horn Antenna                     | SCHWARZBECK    | BBHA9120D  | 942        | 09/18/2017 | 2 years      |
| Microwave Preamplifier           | EM Electronics | EM30180    | 3008A02425 | 02/18/2017 | 1 year       |

### 1.4 SUPPORT EQUIPMENT AND CABLE

| Equipment | Manufacturer | Model          | Serial No.    | Due Date |
|-----------|--------------|----------------|---------------|----------|
| Laptop    | Lenovo       | ThinkPad E450c | SL10G10780    | /        |
| Mouse     | Lenovo       | SM-8825        | 1550900947733 | /        |

### 1.5 CABLE OF TEST

| No. | Cable Type | Quantity | Provider | Length(m) | Specification | Note |
|-----|------------|----------|----------|-----------|---------------|------|
| 1   | USB cable  | 1        | Mexxen   | 1.0       | Unshielded    | None |

### 1.6 TEST MODE AND DESCRIPTION

| Test mode                    | Test Voltage   |
|------------------------------|----------------|
| Data exchange with USB cable | AC 115V / 60Hz |

## **1.7 TEST FACILITY**

All test facilities used to collect the test data are located at No. 1350, Lianxi Rd. Pudong New District, Shanghai, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4: 2009, CISPR 16-1-1 and other equivalent standards. The laboratory is compliance with the requirements of the ISO/IEC/EN17025.

## **1.8 TEST SETUP CONFIGURATION**

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.


### **Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. All the tests were carried out with the EUT in normal operation. Which was shown in this test report is the worst test mode.

## 2. CONDUCTED DISTURBANCE

### 2.1 TEST SETUP

For mains port:

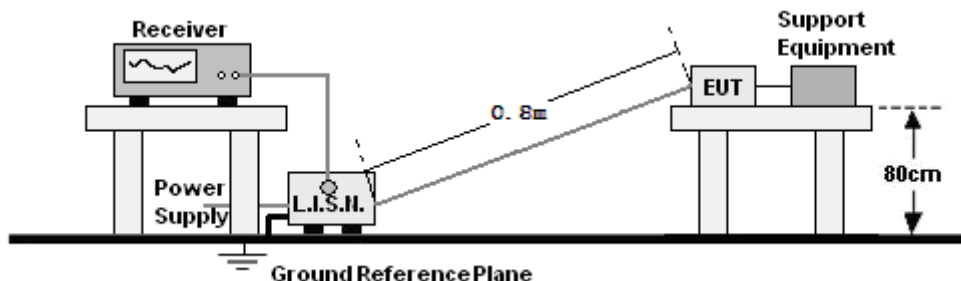

### 2.2 LIMITS

Limits for Class B digital devices

| Frequency range<br>(MHz) | Limits<br>dB(μV) |          |
|--------------------------|------------------|----------|
|                          | Quasi-peak       | Average  |
| 0,15 to 0,50             | 66 to 56         | 56 to 46 |
| 0,50 to 5                | 56               | 46       |
| 5 to 30                  | 60               | 50       |

**NOTE:** 1. The lower limit shall apply at the transition frequencies.  
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

### 2.3 TEST PROCEDURE

For mains port:


- The EUT and support equipment were placed on a nonconductive table 0.8m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane. The EUT connected to the main through Line Impedance Stability Network (L.I.S.N) to provide a 50 Ω/50uH coupling impedance for the measuring equipment. The support equipment is also connected to the main power through a LISN that provides a 50 Ω/50uH coupling impedance with 50 Ω terminations. Both sides of AC line (Line & Neutral) were checked to find out the maximum conducted emission.
- The RBW of the receiver was set at 9 kHz. The frequency range from 150 kHz to 30 MHz was checked. Run the receiver's pre-scan to record the maximum disturbance generated from EUT in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

2.4 TEST RESULT

For mains port:


Test mode: Data exchange by USB cable - AC 115V / 60Hz

LISN: Line

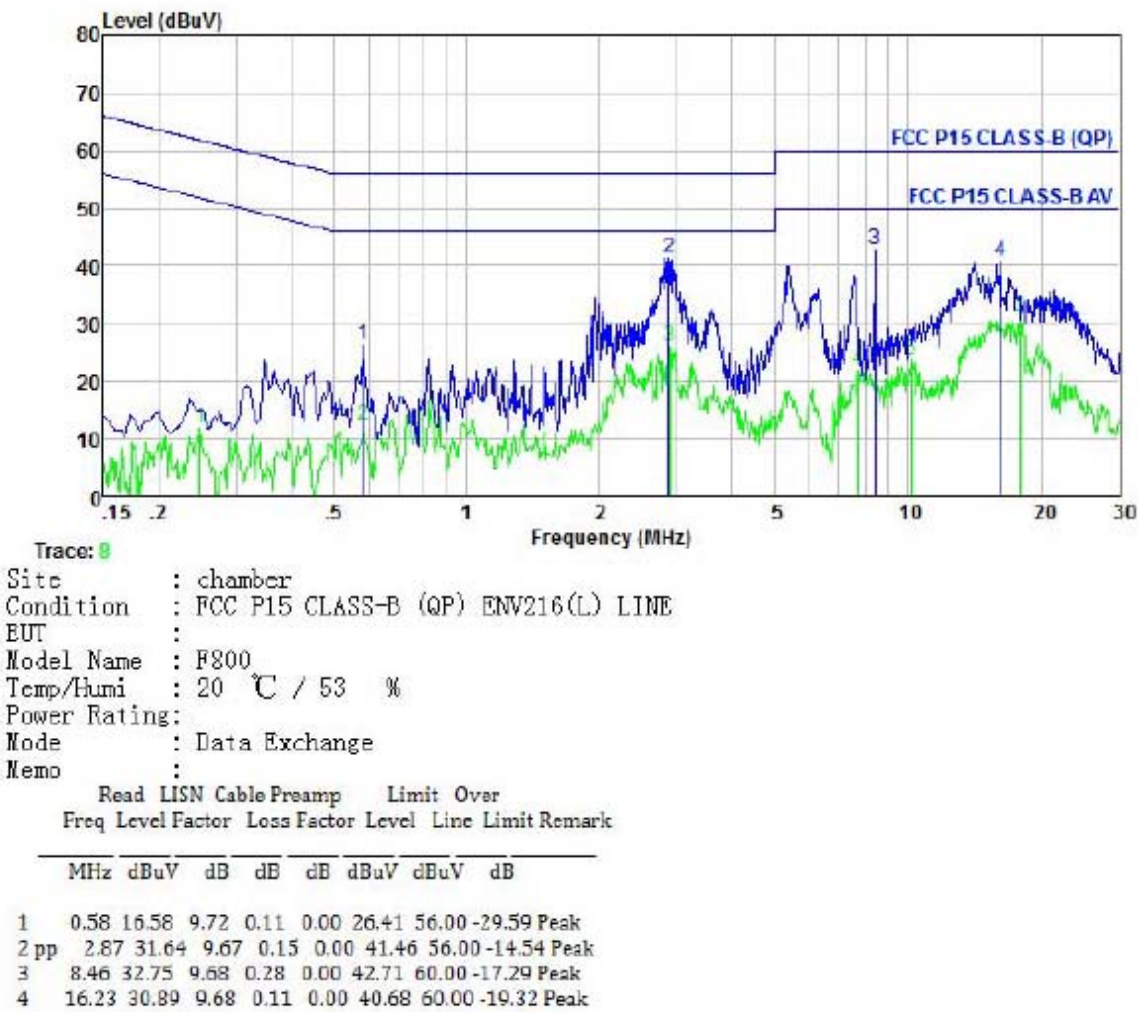

Test mode: Data exchange by USB cable - AC 115V / 60Hz


LISN: Neutral

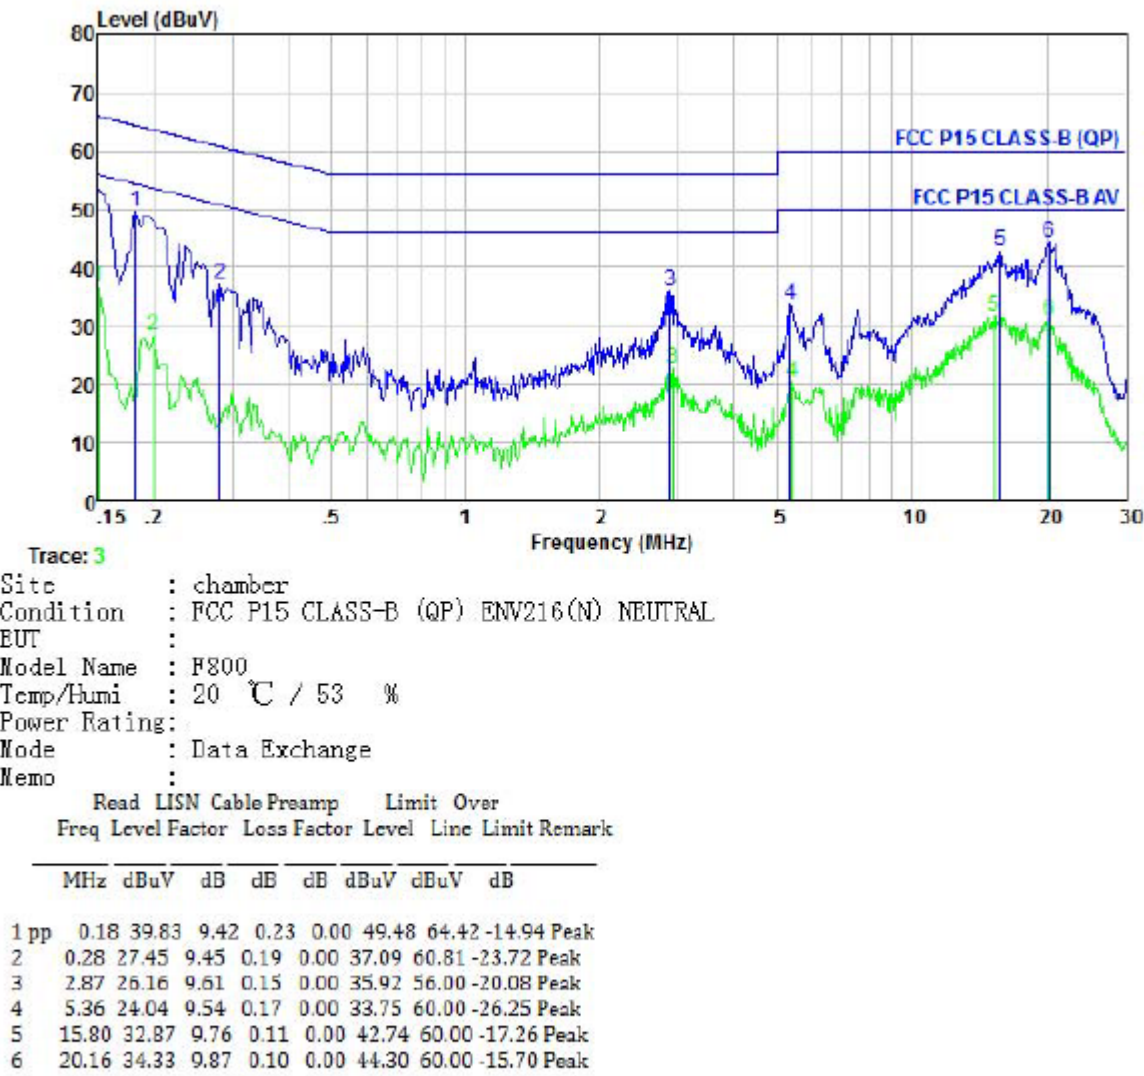


### 3. RADIATED DISTURBANCE (RE)

#### 3.1 TEST SETUP

30MHz ~ 1GHz:

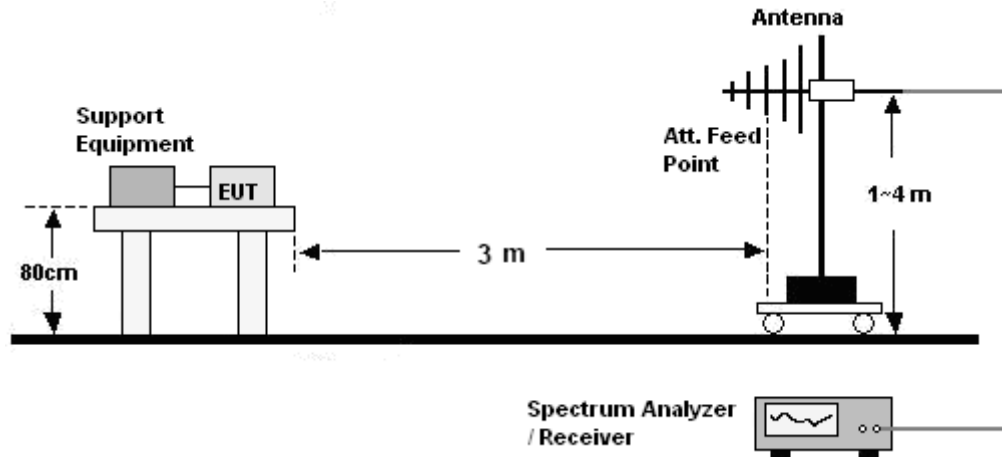

Above 1GHz:

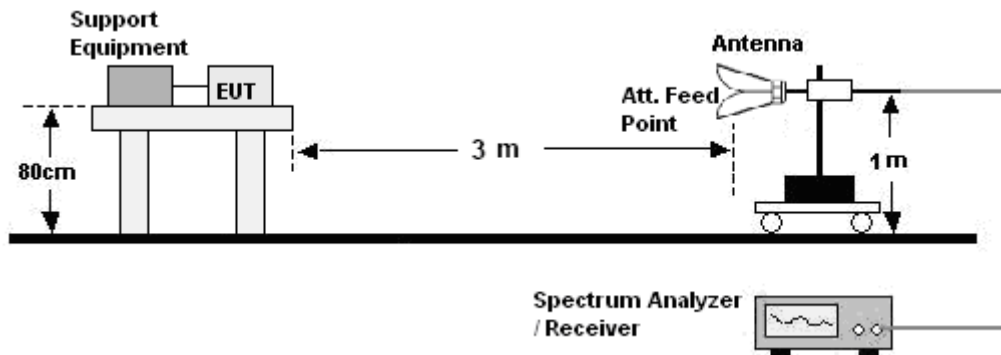

#### 3.2 LIMITS

Limits for Class B digital devices

| Frequency (MHz) | limits at 3m<br>dB(μV/m) |
|-----------------|--------------------------|
| 30-88           | 40.0                     |
| 88-216          | 43.5                     |
| 216-960         | 46.0                     |
| Above 960       | 54.0                     |

**NOTE:** 1. The lower limit shall apply at the transition frequency.

2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.

3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.

### 3.3 TEST PROCEDURE

#### **30MHz ~ 1GHz:**

- a. The EUT and support equipment were placed on the non-conductive turntable 0.8m above the horizontal metal ground plane at a chamber. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna.
- b. The frequency range from 30MHz to 1GHz was checked. The RBW of the receiver was set at 120kHz. Set the receiver in Peak detector, Max Hold mode. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency receiver to QP Detector and record the maximum value.


#### **Above 1GHz:**

- a. The EUT and support equipment were placed on the non-conductive turntable 0.8m above the ground at a chamber. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. Horn antenna was used as receiving antenna.
- b. The frequency range above 1GHz was checked. The RBW of the receiver was set at 1MHz. Set the receiver in Peak detector, Max Hold mode. Record the maximum field strength of all the pre-scan process in the full band when the antenna is 1m and varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its Average value: rotate the turntable from 0 to 360 degrees to find the degree where EUT radiated the maximum emission, then set the test frequency receiver to EMI Average Detector and record the maximum value.

3.4 TEST RESULT

30MHz ~ 1GHz:


Test mode: Data exchange by USB cable - AC 115V / 60Hz  
Antenna Polarity: Horizontal

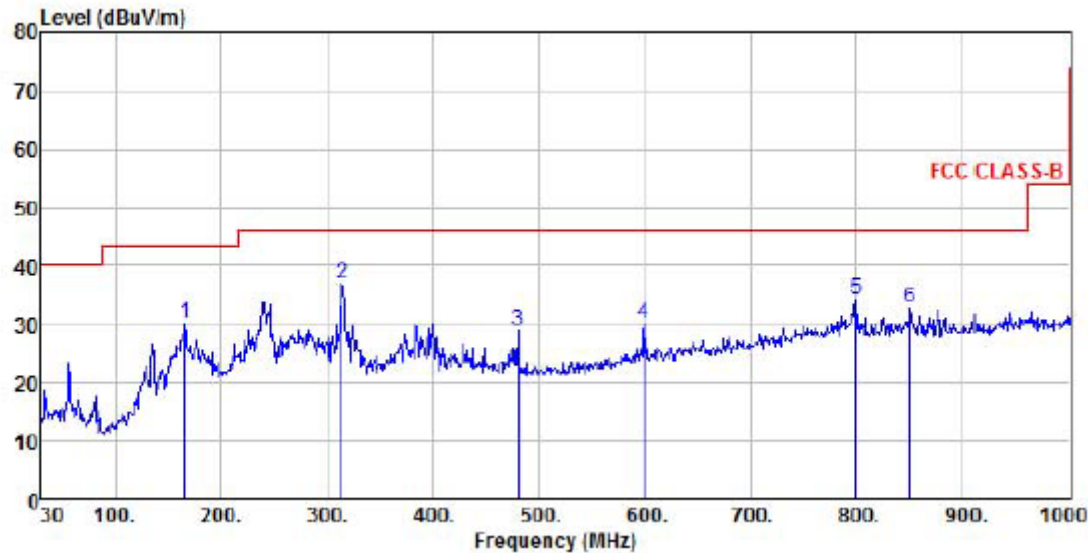

Site : chamber  
Condition : FCC CLASS-B 3m VULB9160 HORIZONTAL  
EUT :  
Model Name : F800  
Temp/Humi : 20 ℃ / 53 %  
Power Rating:  
Mode : Data Exchange  
Memo :

|   |           | Read  | LISN   | Cable | Preamp |       | Limit | Over   |        |
|---|-----------|-------|--------|-------|--------|-------|-------|--------|--------|
|   | Freq      | Level | Factor | Loss  | Factor | Level | Line  | Limit  | Remark |
|   | MHz       | dBuV  | dB     | dB    | dB     | dBuV  | dBuV  | dB     |        |
| 1 | 165.80    | 14.76 | 13.55  | 1.77  | 0.00   | 30.08 | 43.50 | -13.42 | Peak   |
| 2 | pp 314.21 | 20.95 | 13.51  | 2.52  | 0.00   | 36.98 | 46.00 | -9.02  | Peak   |
| 3 | 480.08    | 9.02  | 16.89  | 3.00  | 0.00   | 28.91 | 46.00 | -17.09 | Peak   |
| 4 | 599.39    | 7.48  | 19.16  | 3.34  | 0.00   | 29.98 | 46.00 | -16.02 | Peak   |
| 5 | 800.18    | 8.69  | 21.76  | 3.80  | 0.00   | 34.25 | 46.00 | -11.75 | Peak   |
| 6 | 850.62    | 6.70  | 22.06  | 3.98  | 0.00   | 32.74 | 46.00 | -13.26 | Peak   |

Test mode: Data exchange by USB cable - AC 115V / 60Hz  
Antenna Polarity: Horizontal

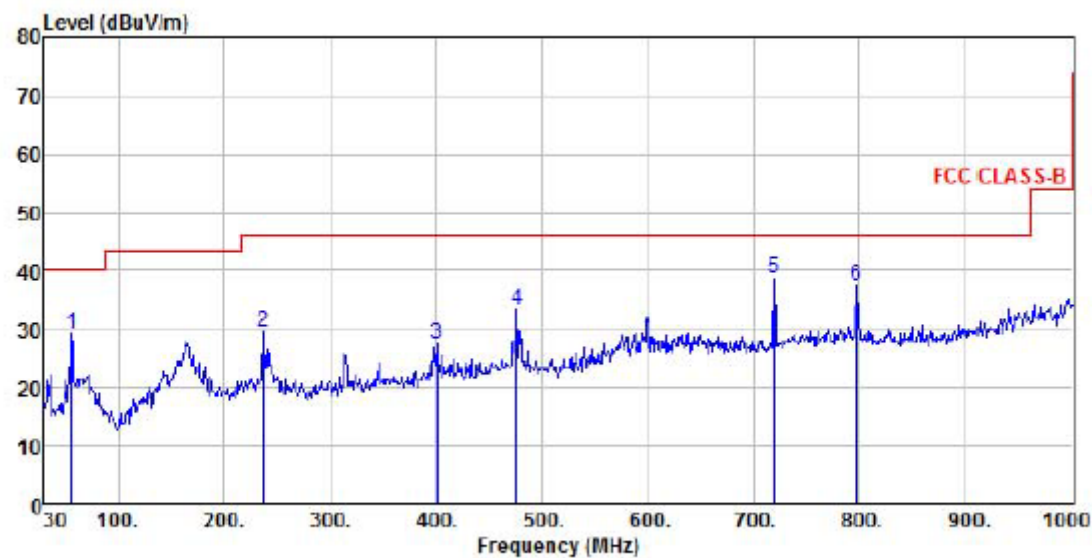


Site : chamber  
Condition : FCC CLASS-B 3m VULB9160 VERTICAL  
EUT :  
Model Name : F800  
Temp/Humi : 20 ℃ / 53 %  
Power Rating:  
Mode : Data Exchange  
Memo :

|      | Read   | LISN   | Cable | Preamp | Limit | Over  |                   |
|------|--------|--------|-------|--------|-------|-------|-------------------|
| Freq | Level  | Factor | Loss  | Factor | Level | Line  | Limit Remark      |
| MHz  | dBuV   | dB     | dB    | dB     | dBuV  | dBuV  | dB                |
| 1    | 55.22  | 15.72  | 12.40 | 1.00   | 0.00  | 29.12 | 40.00 -10.88 Peak |
| 2    | 236.61 | 15.80  | 11.52 | 2.10   | 0.00  | 29.42 | 46.00 -16.58 Peak |
| 3    | 400.54 | 9.62   | 15.32 | 2.65   | 0.00  | 27.59 | 46.00 -18.41 Peak |
| 4    | 476.20 | 13.53  | 16.81 | 2.97   | 0.00  | 33.31 | 46.00 -12.69 Peak |
| 5 pp | 719.67 | 14.36  | 20.52 | 3.70   | 0.00  | 38.58 | 46.00 -7.42 Peak  |
| 6    | 797.27 | 12.09  | 21.73 | 3.81   | 0.00  | 37.63 | 46.00 -8.37 Peak  |

Above 1GHz:


Test mode:           Data exchange by USB cable - AC 115V / 60Hz  
Antenna Polarity:   Horizontal

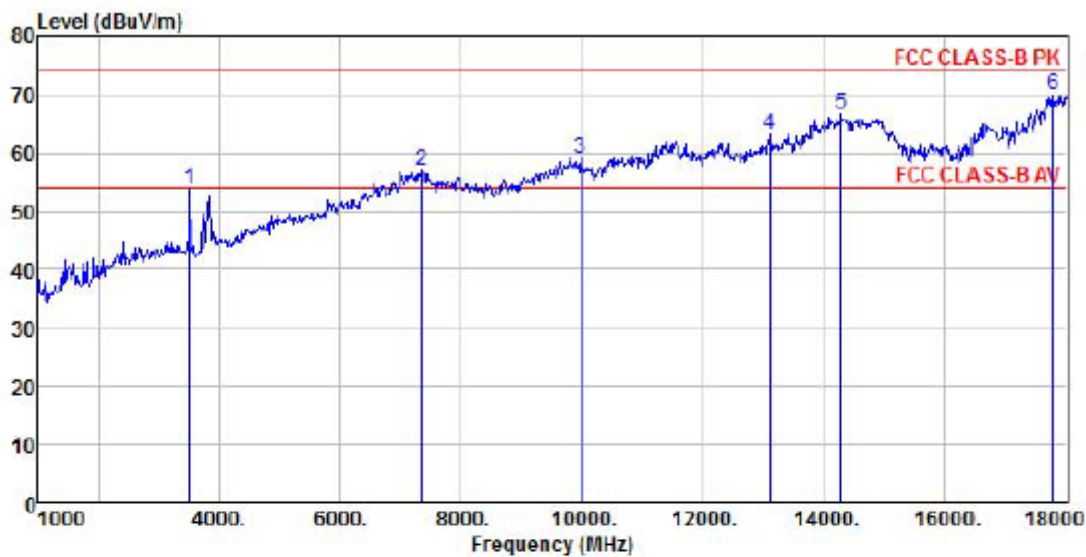

Site : chamber  
Condition : FCC CLASS-B PK 3m BBHA9120D(943) HORIZONTAL  
EUT :  
Model Name : F800  
Temp/Humi : 20 ℃ / 53 %  
Power Rating:  
Mode : Data Exchange  
Memo :

|      |          | Read LISN |       | Cable Preamp |       | Limit |       | Over   | Remark |
|------|----------|-----------|-------|--------------|-------|-------|-------|--------|--------|
| Freq | Level    | Factor    | Loss  | Factor       | Level | Line  | Limit |        |        |
| MHz  | dBuV     | dB        | dB    | dB           | dBuV  | dBuV  | dB    |        |        |
| 1    | 3499.00  | 54.00     | 28.86 | 8.74         | 37.80 | 53.80 | 74.00 | -20.20 | Peak   |
| 2    | 7341.00  | 45.25     | 36.47 | 12.80        | 37.49 | 57.03 | 74.00 | -16.97 | Peak   |
| 3    | 9976.00  | 45.17     | 38.59 | 14.73        | 39.43 | 59.06 | 74.00 | -14.94 | Peak   |
| 4    | 13104.00 | 43.93     | 39.57 | 18.15        | 38.43 | 63.22 | 74.00 | -10.78 | Peak   |
| 5    | 14294.00 | 43.89     | 42.33 | 18.88        | 38.41 | 66.69 | 74.00 | -7.31  | Peak   |
| 6    | 17762.00 | 42.61     | 44.89 | 19.43        | 37.10 | 69.83 | 74.00 | -4.17  | Peak   |

Test mode: Data exchange by USB cable - AC 115V / 60Hz  
Antenna Polarity: Vertical

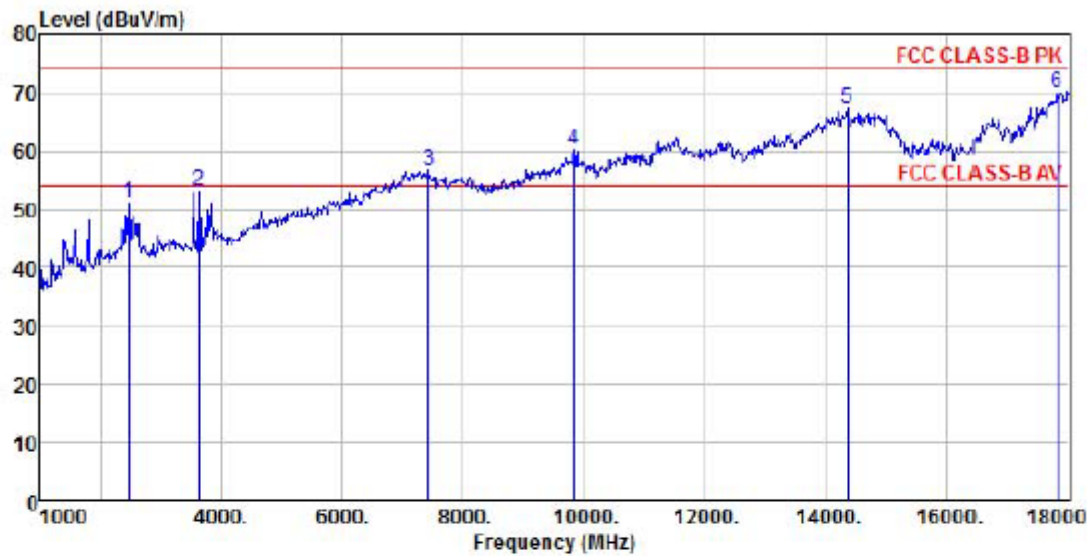

Site : chamber  
Condition : FCC CLASS-B PK 3m BBHA9120D(943) VERTICAL  
EUT :  
Model Name : F800  
Temp/Humi : 20 ℃ / 53 %  
Power Rating:  
Mode : Data Exchange  
Memo :

|      | Read     | LISN  | Cable  | Preamp |        | Limit | Over  |              |
|------|----------|-------|--------|--------|--------|-------|-------|--------------|
|      | Freq     | Level | Factor | Loss   | Factor | Level | Line  | Limit Remark |
|      | MHz      | dBuV  | dB     | dB     | dB     | dBuV  | dBuV  | dB           |
| 1    | 2462.00  | 54.47 | 27.49  | 7.39   | 38.32  | 51.03 | 74.00 | -22.97 Peak  |
| 2    | 3618.00  | 53.17 | 29.18  | 8.63   | 37.73  | 53.25 | 74.00 | -20.75 Peak  |
| 3    | 7426.00  | 45.20 | 36.57  | 12.80  | 37.78  | 56.79 | 74.00 | -17.21 Peak  |
| 4    | 9840.00  | 46.36 | 38.70  | 14.79  | 39.68  | 60.17 | 74.00 | -13.83 Peak  |
| 5    | 14362.00 | 44.09 | 42.43  | 19.06  | 38.34  | 67.24 | 74.00 | -6.76 Peak   |
| 6 pp | 17813.00 | 41.92 | 45.61  | 19.60  | 37.02  | 70.11 | 74.00 | -3.89 Peak   |

## **APPENDIX 1    PHOTOGRAPHS OF TEST SETUP**

Please refer to the file named “Part 15B Setup Photos”.

## **APPENDIX 2    PHOTOGRAPHS OF EUT**

Please refer to the two files named “EUT External Photos” and “EUT Internal Photos”.

----End of the report----