



Shenzhen Shuodian Electronic Technology Co.,Ltd
Page number 1-10

SPECIFICATION

for

RGBICWW Ceiling light_ANT

Woan Technology (Shenzhen) Co., Ltd

Customer No.

Product No.

WA-RGBICWW Ceiling light_ANT-Onboard antenna

Author: XiaofengZeng Review: Liming

Release Date: 2026.03.20

ShenZhen Shuodian Electronic Technology Co., Ltd

508 West, building 64, Jinlong Industrial City, majialong, Nanshan District, Shenzhen

E-mail: sz_shuodian@163.com

Tel: 0755-86006322

Fax: 0755-86006323

Shenzhen Shuodian Electronic Technology Co.,Ltd



Contents

SPECIFICATION	1
SHENZHEN SHUODIAN ELECTRONIC TECHNOLOGY CO., LTD	1
CONTENTS	2
1. BILATERAL CONFIRMATION PAGE	3
2. GENERAL	4
3. GENERAL PRODUCT SPECIFICATIONS	4
4. SPECIFICATION DETIALS	5
4.1 MECHANICAL PROPERTIES	5
4.2 ELECTRIC PERFORMANCE	7
5. PRODUCT PACKAGING	10
6. DOCUMENT RESUME	10



1. Bilateral Confirmation page

1.1 Customer signature

Customer: Woan Technology (Shenzhen) Co., Ltd

Seapartment/post	Sign	Date
Hardware Engineer/RD		
Mechanical/MD		
Project Manager/PM		
Commercial/Puchasing		
Checker		

1.2 Signature of ShuoDian Technology company

Seapartment/post	Sign	Date
Antenna Engineer/RD		
Mechanical/MD		
Project Manager/PM		
QA		
Checker		



2. General

2.1 Scope of application

This specification is only applicable to Woan RGBICWW Ceiling light_ANT


2.2 Operating temperature range

Temperature range of this product: -20 ~ +65 °C

2.3 Storage temperature range:

This product is stored at - 30 ~ + 75 °C

3. General product specifications

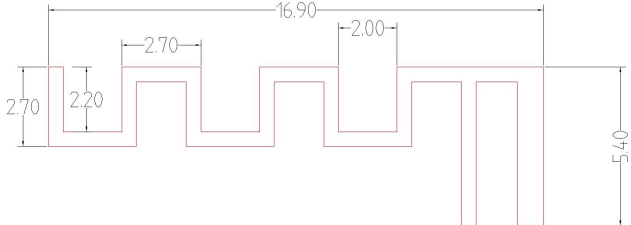NO.	ITEMS	DETAILS
1	Type	RGBICWW Ceiling light_ANT
2	Operating Frequency Band	2.4~2.5GHz
3	Radiation Efficiency	≥50%
4	Impedance	50Ω
5	Antenna Type	IFA
6	Antenna composition	Onboard antenna
7	Antenna size: (mm)	



4. Specification Detials

4.1 Mechanical Properties

4.11 Product Composition:

4.12 Apperance

Good appearance without scars 、 dirt、 protuberances, etc.

4.13 Antenna Picture and Structure Dimension

Refer to product drawings:



Product drawings:





4.2 Electric Performance


4.21 Test condition

Environment:	Equipment:
Temperature: 10℃——+30℃	Network Analyzer: Agilent E8358A
Humidity: ≤80% (+40℃)	Anechior Chamber: ETS
Atmospher: 750mmkg±30mmkg	

4.22 Test Data for Electrical Performance:

4.22.1 S11 of the Antenna:

Marker	2400MHz	2450MHz	2500MHz
Returnloss	-8.55	-23.57	-9.09
VSWR	2.2	1.12	2.09

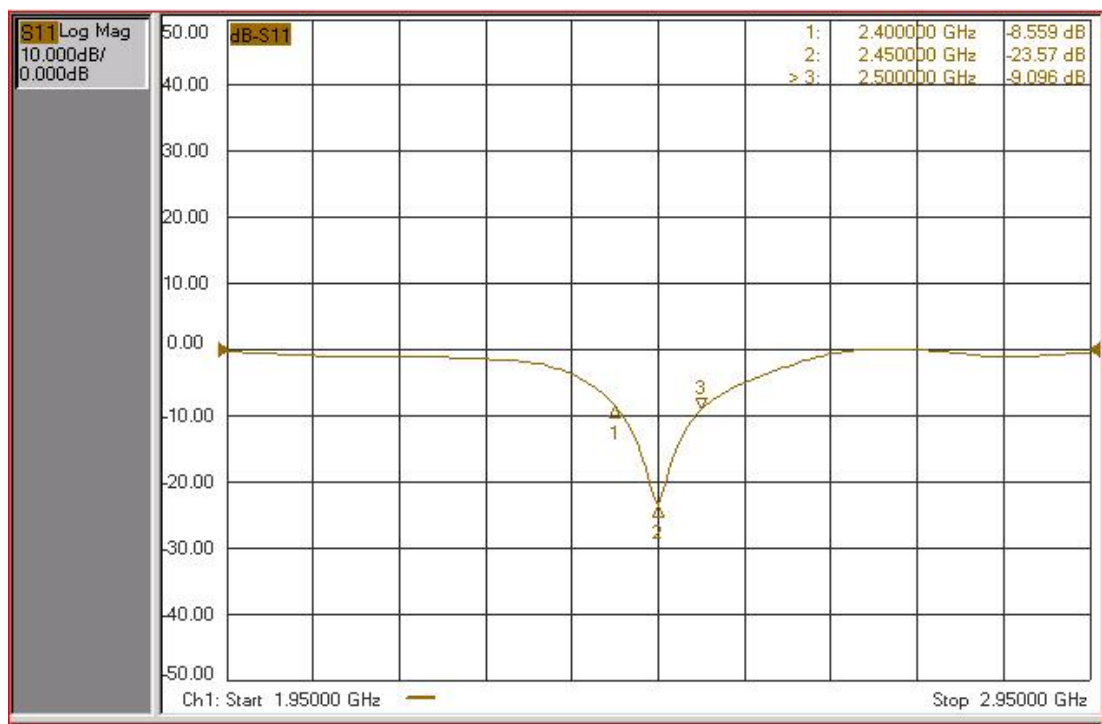



4. 22. 2 Passive gain、 efficiency and Radiation Pattern:


Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400.0	2.13	62.6
2410.0	2.11	65.1
2420.0	2.24	67.3
2430.0	2.43	68.3
2440.0	2.71	69.7
2450.0	2.85	70.2
2460.0	2.64	69.0
2470.0	2.18	64.8
2480.0	1.98	60.4
2490.0	1.66	55.7
2500.0	1.33	52.2

2450MHz



2450.0MHz H+V, Eff: 70.9%




Back View

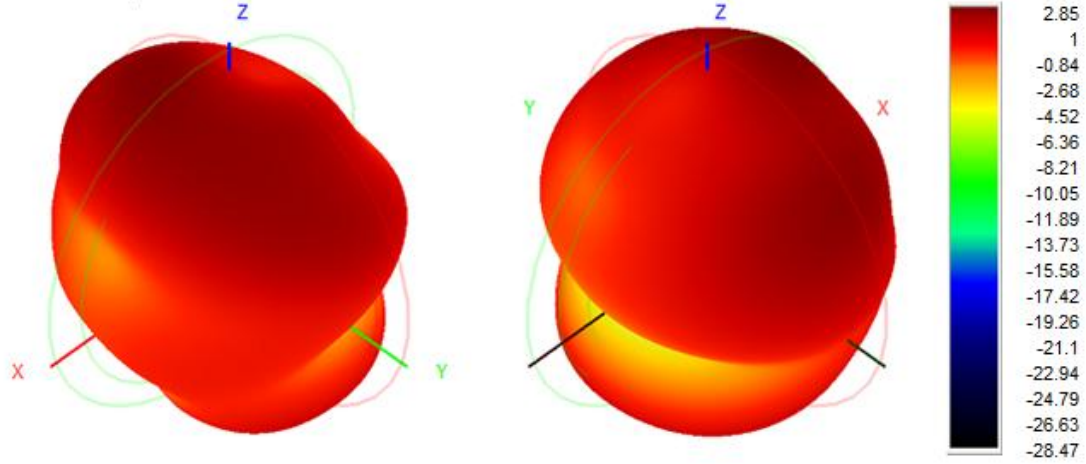

2450.0MHz Total(E1-XZ), Max= 2.68dBi

2450.0MHz Total(E2-YZ), Max= 2.52dBi

Total(H-XY), Max= -1.50dBi, CirD=11.59

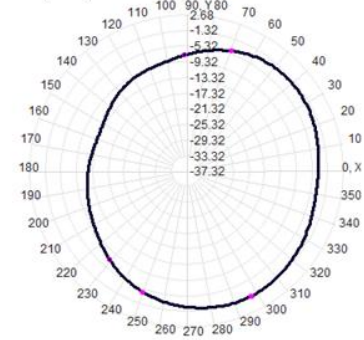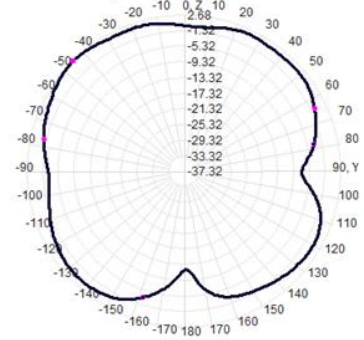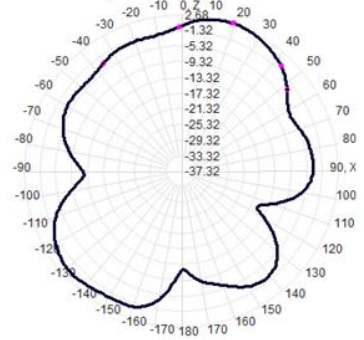



5. Product Packaging

Manner of packing:

Packed in self sealed bags, 200 pcs each.

6. Document Resume

Document No.	
Release Date	2026/03/20
Author	XiofengZeng



Shenzhen Shuodian Electronic Technology Co.,Ltd

Page number 11-10

Review	LiMing
--------	--------

Revised History

Date	Version	Revised Record
2025/05/05	1.00	New Project