SAR MEASUREMENT												
Depth of Liquid (cm):>15												
Product: Body Worn Camera												
Band:SA N66												
BW MHz	**MOD**	**Position**	**Test Mode**	**Ch.**	**Freq. (MHz)**	**Power Drift (<±5%)**	**SAR (1g) (W/kg)**	**Max. Tuneup Power (dBm)**	**Meas. output Power (dBm)**	**Tune-up Scaling factor**	**Scaled SAR (W/kg)**	**Limit (W/kg)**
			RB Allocation									
20	**DFT-s-OFDM QPSK**	Body back	Inner_1RB_Right	349000	1745	-0.70	0.098	24.20	23.77	1.104	0.108	1.6
		Body front	Inner_1RB_Right	349000	1745	-0.13	0.727	24.20	23.77	1.104	0.803	1.6
		Edge2(Right)	Inner_1RB_Right	349000	1745	0.65	**0.727**	24.20	23.77	1.104	**0.803**	1.6
		Edge3(Bottom)	Inner_1RB_Right	349000	1745	-0.80	0.683	24.20	23.77	1.104	0.754	1.6
		Edge4(Left)	Inner_1RB_Right	349000	1745	0.10	0.283	24.20	23.77	1.104	0.312	1.6

SAR MEASUREMENT												
Depth of Liquid (cm):>15												
Product: Body Worn Camera												
Band:SA N71												
BW MHz	**MOD**	**Position**	**Test Mode** / **RB Allocation**	**Ch.**	**Freq. (MHz)**	**Power Drift (<±5%)**	**SAR (1g) (W/kg)**	**Max. Tuneup Power (dBm)**	**Meas. output Power (dBm)**	**Tune-up Scaling factor**	**Scaled SAR (W/kg)**	**Limit (W/kg)**
20	**DFT-s-OFDM QPSK**	Body back	Inner_1RB_Right	136100	680.5	-0.24	0.023	24.00	23.56	1.107	0.025	1.6
		Body front	Inner_1RB_Right	136100	680.5	0.37	0.065	24.00	23.56	1.107	0.072	1.6
		Edge2(Right)	Inner_1RB_Right	136100	680.5	-0.82	0.080	24.00	23.56	1.107	0.089	1.6
		Edge3(Bottom)	Inner_1RB_Right	136100	680.5	-0.75	**0.086**	24.00	23.56	1.107	**0.095**	1.6
		Edge4(Left)	Inner_1RB_Right	136100	680.5	0.13	0.013	24.00	23.56	1.107	0.014	1.6

Note:
· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
·The test separation for body back, body front and 4 Edges is 0mm of all above table

SAR MEASUREMENT										
Depth of Liquid (cm):>15										
Product: Body Worn Camera										
Test Mode:802.11b										
Position	**Mode**	**Ch.**	**Fr. (MHz)**	**Power Drift (<±5%)**	**SAR (1g) (W/kg)**	**Max. Tune-up Power (dBm)**	**Meas. Output Power (dBm)**	**Tune-up Scaling factor**	**Scaled SAR (W/kg)**	**Limit (W/kg)**
Body back	DTS	6	2437	-0.18	0.067	14.10	13.60	1.122	0.075	1.6
Body front	DTS	6	2437	0.39	0.089	14.10	13.60	1.122	0.100	1.6
Edge 1 (Top)	DTS	6	2437	-0.88	0.049	14.10	13.60	1.122	0.055	1.6
Edge 2(Right)	DTS	6	2437	0.82	0.039	14.10	13.60	1.122	0.044	1.6
Edge 4(Left)	DTS	6	2437	-0.71	**0.175**	14.10	13.60	1.122	**0.196**	1.6

Note:
- According to KDB248227, SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.
- All of above “DTS” means data transmitters.
- The test separation for body back, body front and 4 Edges is 5mm of all above table.

SAR MEASUREMENT									
Depth of Liquid (cm):>15									
Product: Body Worn Camera									
Test Mode: 5.2GHz WIFI-802.11a									
Position	**Ch.**	**Fr. (MHz)**	**Power Drift (<±5%)**	**SAR (1g) (W/kg)**	**Max. Tune-up Power (dBm)**	**Meas. Output Power (dBm)**	**Tune-up Scaling factor**	**Scaled SAR (W/kg)**	**Limit (W/kg)**
Body back	40	5200	-0.34	0.031	13.20	12.97	1.054	0.033	1.6
Body front	40	5200	0.88	**0.305**	13.20	12.97	1.054	**0.322**	1.6
Edge 1 (Top)	40	5200	-0.65	0.035	13.20	12.97	1.054	0.037	1.6
Edge 2(Right)	40	5200	-0.82	0.060	13.20	12.97	1.054	0.063	1.6
Edge 4(Left)	40	5200	0.80	0.279	13.20	12.97	1.054	0.294	1.6

SAR MEASUREMENT									
Depth of Liquid (cm):>15									
Product: Body Worn Camera									
Test Mode: 5.3GHz WIFI-802.11a									
Position	**Ch.**	**Fr. (MHz)**	**Power Drift (<±5%)**	**SAR (1g) (W/kg)**	**Max. Tune-up Power (dBm)**	**Meas. Output Power (dBm)**	**Tune-up Scaling factor**	**Scaled SAR (W/kg)**	**Limit (W/kg)**
Body back	60	5300	-0.74	0.025	13.20	12.96	1.057	0.026	1.6
Body front	60	5300	0.70	0.233	13.20	12.96	1.057	0.246	1.6
Edge 1 (Top)	60	5300	0.18	0.030	13.20	12.96	1.057	0.032	1.6
Edge 2 (Right)	60	5300	-0.79	0.058	13.20	12.96	1.057	0.061	1.6
Edge 4 (Left)	60	5300	-0.97	**0.256**	13.20	12.96	1.057	**0.271**	1.6

SAR MEASUREMENT									
Depth of Liquid (cm):>15									
Product: Body Worn Camera									
Test Mode: 5.6GHzWIFI- 802.11a									
Position	**Ch.**	**Fr. (MHz)**	**Power Drift (<±5%)**	**SAR (1g) (W/kg)**	**Max. Tune-up Power (dBm)**	**Meas. Output Power (dBm)**	**Tune-up Scaling factor**	**Scaled SAR (W/kg)**	**Limit (W/kg)**
Body back	116	5580	-0.62	0.019	13.60	13.42	1.042	0.020	1.6
Body front	116	5580	0.61	0.184	13.60	13.42	1.042	0.192	1.6
Edge 1 (Top)	116	5580	-0.87	0.022	13.60	13.42	1.042	0.023	1.6
Edge 2 (Right)	116	5580	0.85	0.036	13.60	13.42	1.042	0.038	1.6
Edge 4 (Left)	116	5580	-0.92	**0.241**	13.60	13.42	1.042	**0.251**	1.6

SAR MEASUREMENT									
Depth of Liquid (cm):>15									
Product: Body Worn Camera									
Test Mode: 5.8GHz WIFI-802.11a									
Position	**Ch.**	**Fr. (MHz)**	**Power Drift (<±5%)**	**SAR (1g) (W/kg)**	**Max. Tune-up Power (dBm)**	**Meas. Output Power (dBm)**	**Tune-up Scaling factor**	**Scaled SAR (W/kg)**	**Limit (W/kg)**
Body back	157	5785	-0.65	0.011	13.10	12.80	1.072	0.012	1.6
Body front	157	5785	0.90	0.159	13.10	12.80	1.072	0.170	1.6
Edge 1 (Top)	157	5785	-0.66	0.016	13.10	12.80	1.072	0.017	1.6
Edge 2 (Right)	157	5785	-0.87	0.023	13.10	12.80	1.072	0.025	1.6
Edge 4 (Left)	157	5785	0.64	**0.249**	13.10	12.80	1.072	**0.267**	1.6

Note:
· When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
·The test separation for body back, body front and 4 Edges is 5mm of all above table

Repeated SAR											
Product: Body Worn Camera											
Test Mode: LTE Band 2& LTE Band 4& LTE Band 5& LTE Band 41& LTE Band 66& SA N2& SA N41											
Position	**Mode**		**Ch.**	**Fr. (MHz)**	**Power Drift (<±5%)**	**Once SAR (1g) (W/kg)**	**Power Drift (<±5%)**	**Twice SAR (1g) (W/kg)**	**Power Drift (<±5%)**	**Third SAR (1g) (W/kg)**	**Limit W/kg**
	UL RB Allocation	**UL RB START**									
Body front	1	0	18700	1860	-0.31	0.837	--	--	--	--	1.6
Edge 2(Right)	1	0	20175	1732.5	-1.03	0.991	--	--	--	--	1.6
Edge 2(Right)	1	0	20450	829	0.71 6	0.749	--	--	--	--	1.6
Edge 3(Bottom)	1	0	40620	2593	-0.88	1.067	--	--	--	--	1.6
Edge 2(Right)	1	0	132322	1745	0.71	0.891	--	--	--	--	1.6
Body front	Inner_1RB_Right		376000	1880	-0.33	1.165	--	--	--	--	1.6
Edge3(Bottom)	Inner_1RB_Right		518598	2592.99	0.62	1.050	--	--	--	--	1.6

The second repeated SAR judge reference									
Product: Body Worn Camera									
Band	**Position**	**Mode**		**Ch.**	**Fr. (MHz)**	**Orignal SAR (1g) (W/kg)**	**First SAR (1g) (W/kg)**	**Ratio**	**Limit**
		UL RB Allocation	**UL RB START**						
LTE Band 2	Body front	1	0	18700	1860	1.096	0.837	1.170	＜1.2
LTE Band 4	Edge 2(Right)	1	0	20175	1732.5	1.058	0.991	1.068	＜1.2
LTE Band 5	Edge 2(Right)	1	0	20450	829	0.812	0.749	1.084	＜1.2
LTE Band 41	Edge 3(Bottom)	1	0	40620	2593	1.122	1.067	1.052	＜1.2
LTE Band 66	Edge 2(Right)	1	0	132322	1745	0.897	0.891	1.007	＜1.2
SA N2	Body front	Inner_1RB_Right		376000	1880	1.261	1.165	1.082	＜1.2
SA N41	Edge3(Bottom)	Inner_1RB_Right		518598	2592.99	1.062	1.050	1.011	＜1.2

Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

NO	Simultaneous state	Portable Handset	Note
		Body-worn	
1	LTE+WLAN 2.4GHz (data) +Bluetooth(data)	Yes	-
2	SA+WLAN 2.4GHz (data) +Bluetooth(data)	Yes	-

NOTE:

1. WLAN and BT with different antenna.
2. For simultaneous transmission at head and body exposure position, 3 transmitters simultaneous transmission was the worst state.
3. Based upon KDB 447498 D01, BT SAR is excluded as below table.
4. Based upon KDB 447498 D01,for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR AND 5mm for body-worn SAR.
5. According to KDB 447498 D01 4.3.1, Standalone SAR test exclusion is as follow:
   For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:
   [(max. power of channel, including tune-up tolerance, mW) / (min. test separation distance, mm)] • [√f(GHz)] ≤ 3.0 for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR[30], where
   - f(GHz) is the RF channel transmit frequency in GHz
   - Power and distance are rounded to the nearest mW and mm before calculation[31]
   - The result is rounded to one decimal place for comparison
   - The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below

   The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.
6. I f the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
7. According to KDB 447498 D01 4.3.2, simultaneous transmission SAR test exclusion is as follow:
   (1) Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.
   (2) Any transmitters and antennas should be considered when calculating simultaneous mode.
   (3) For mobile phone and PC, it's the sum of all transmitters and antennas at the same mode with same position in each applicable exposure condition
   (4) When the standalone SAR test exclusion of section 4.3.2 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to det
   (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances ≤ 50 mm;
   where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.

8. When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The ratio is determined by (SAR1 + SAR2)1.5/Ri, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Estimated SAR		Max Power including Tune-up Tolerance		Separation Distance (mm)	Estimated SAR (W/kg)
		dBm	mW		
BT	Body	1	1.259	5	0.052

Sum of the SAR for LTE Band 2 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 2	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.095	0.075	0.052	0.222	No
	Front	1.145	0.100	0.052	1.297	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.901	0.044	0.052	0.997	No
	Edge 3	0.877	0.000	0.052	0.929	No
	Edge 4	0.244	0.196	0.052	0.492	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 2	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.095	0.033	0.052	0.180	No
	Front	1.145	0.322	0.052	1.519	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.901	0.063	0.052	1.016	No
	Edge 3	0.877	0.000	0.052	0.929	No
	Edge 4	0.244	0.294	0.052	0.590	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 2	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.095	0.026	0.052	0.173	No
	Front	1.145	0.246	0.052	1.443	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.901	0.061	0.052	1.014	No
	Edge 3	0.877	0.000	0.052	0.929	No
	Edge 4	0.244	0.271	0.052	0.567	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 2	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.095	0.020	0.052	0.167	No
	Front	1.145	0.192	0.052	1.389	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.901	0.038	0.052	0.991	No
	Edge 3	0.877	0.000	0.052	0.929	No
	Edge 4	0.244	0.251	0.052	0.547	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 2	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.095	0.012	0.052	0.159	No
	Front	1.145	0.170	0.052	1.367	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.901	0.025	0.052	0.978	No
	Edge 3	0.877	0.000	0.052	0.929	No
	Edge 4	0.244	0.267	0.052	0.563	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 4 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 4	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.207	0.075	0.052	0.334	No
	Front	1.053	0.100	0.052	1.205	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	1.108	0.044	0.052	1.204	No
	Edge 3	1.057	0.000	0.052	1.109	No
	Edge 4	0.396	0.196	0.052	0.644	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 4	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.207	0.033	0.052	0.292	No
	Front	1.053	0.322	0.052	1.427	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	1.108	0.063	0.052	1.223	No
	Edge 3	1.057	0.000	0.052	1.109	No
	Edge 4	0.396	0.294	0.052	0.742	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 4	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.207	0.026	0.052	0.285	No
	Front	1.053	0.246	0.052	1.351	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	1.108	0.061	0.052	1.221	No
	Edge 3	1.057	0.000	0.052	1.109	No
	Edge 4	0.396	0.271	0.052	0.719	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 4	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.207	0.020	0.052	0.279	No
	Front	1.053	0.192	0.052	1.297	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	1.108	0.038	0.052	1.198	No
	Edge 3	1.057	0.000	0.052	1.109	No
	Edge 4	0.396	0.251	0.052	0.699	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 4	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.207	0.012	0.052	0.271	No
	Front	1.053	0.170	0.052	1.275	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	1.108	0.025	0.052	1.185	No
	Edge 3	1.057	0.000	0.052	1.109	No
	Edge 4	0.396	0.267	0.052	0.715	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 5 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 5	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.462	0.075	0.052	0.589	No
	Front	0.708	0.100	0.052	0.860	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.999	0.044	0.052	1.095	No
	Edge 3	0.270	0.000	0.052	0.322	No
	Edge 4	0.404	0.196	0.052	0.652	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 5	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.462	0.033	0.052	0.547	No
	Front	0.708	0.322	0.052	1.082	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.999	0.063	0.052	1.114	No
	Edge 3	0.270	0.000	0.052	0.322	No
	Edge 4	0.404	0.294	0.052	0.750	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 5	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.462	0.026	0.052	0.540	No
	Front	0.708	0.246	0.052	1.006	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.999	0.061	0.052	1.112	No
	Edge 3	0.270	0.000	0.052	0.322	No
	Edge 4	0.404	0.271	0.052	0.727	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 5	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.462	0.020	0.052	0.534	No
	Front	0.708	0.192	0.052	0.952	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.999	0.038	0.052	1.089	No
	Edge 3	0.270	0.000	0.052	0.322	No
	Edge 4	0.404	0.251	0.052	0.707	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 5	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.462	0.012	0.052	0.526	No
	Front	0.708	0.170	0.052	0.930	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.999	0.025	0.052	1.076	No
	Edge 3	0.270	0.000	0.052	0.322	No
	Edge 4	0.404	0.267	0.052	0.723	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 12 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 12	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.055	0.075	0.052	0.182	No
	Front	0.171	0.100	0.052	0.323	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.169	0.044	0.052	0.265	No
	Edge 3	0.219	0.000	0.052	0.271	No
	Edge 4	0.029	0.196	0.052	0.277	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 12	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.055	0.033	0.052	0.140	No
	Front	0.171	0.322	0.052	0.545	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.169	0.063	0.052	0.284	No
	Edge 3	0.219	0.000	0.052	0.271	No
	Edge 4	0.029	0.294	0.052	0.375	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 12	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.055	0.026	0.052	0.133	No
	Front	0.171	0.246	0.052	0.469	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.169	0.061	0.052	0.282	No
	Edge 3	0.219	0.000	0.052	0.271	No
	Edge 4	0.029	0.271	0.052	0.352	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 12	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.055	0.020	0.052	0.127	No
	Front	0.171	0.192	0.052	0.415	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.169	0.038	0.052	0.259	No
	Edge 3	0.219	0.000	0.052	0.271	No
	Edge 4	0.029	0.251	0.052	0.332	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 12	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.055	0.012	0.052	0.119	No
	Front	0.171	0.170	0.052	0.393	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.169	0.025	0.052	0.246	No
	Edge 3	0.219	0.000	0.052	0.271	No
	Edge 4	0.029	0.267	0.052	0.348	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 13 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 13	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.209	0.075	0.052	0.336	No
	Front	0.426	0.100	0.052	0.578	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.438	0.044	0.052	0.534	No
	Edge 3	0.267	0.000	0.052	0.319	No
	Edge 4	0.155	0.196	0.052	0.403	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 13	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.209	0.033	0.052	0.294	No
	Front	0.426	0.322	0.052	0.800	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.438	0.063	0.052	0.553	No
	Edge 3	0.267	0.000	0.052	0.319	No
	Edge 4	0.155	0.294	0.052	0.501	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 13	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.209	0.026	0.052	0.287	No
	Front	0.426	0.246	0.052	0.724	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.438	0.061	0.052	0.551	No
	Edge 3	0.267	0.000	0.052	0.319	No
	Edge 4	0.155	0.271	0.052	0.478	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 13	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.209	0.020	0.052	0.281	No
	Front	0.426	0.192	0.052	0.670	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.438	0.038	0.052	0.528	No
	Edge 3	0.267	0.000	0.052	0.319	No
	Edge 4	0.155	0.251	0.052	0.458	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 13	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.209	0.012	0.052	0.273	No
	Front	0.426	0.170	0.052	0.648	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.438	0.025	0.052	0.515	No
	Edge 3	0.267	0.000	0.052	0.319	No
	Edge 4	0.155	0.267	0.052	0.474	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 14 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 14	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.249	0.075	0.052	0.376	No
	Front	0.456	0.100	0.052	0.608	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.511	0.044	0.052	0.607	No
	Edge 3	0.276	0.000	0.052	0.328	No
	Edge 4	0.201	0.196	0.052	0.449	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 14	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.249	0.033	0.052	0.334	No
	Front	0.456	0.322	0.052	0.830	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.511	0.063	0.052	0.626	No
	Edge 3	0.276	0.000	0.052	0.328	No
	Edge 4	0.201	0.294	0.052	0.547	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 14	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.249	0.026	0.052	0.327	No
	Front	0.456	0.246	0.052	0.754	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.511	0.061	0.052	0.624	No
	Edge 3	0.276	0.000	0.052	0.328	No
	Edge 4	0.201	0.271	0.052	0.524	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 14	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.249	0.020	0.052	0.321	No
	Front	0.456	0.192	0.052	0.700	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.511	0.038	0.052	0.601	No
	Edge 3	0.276	0.000	0.052	0.328	No
	Edge 4	0.201	0.251	0.052	0.504	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 14	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.249	0.012	0.052	0.313	No
	Front	0.456	0.170	0.052	0.678	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.511	0.025	0.052	0.588	No
	Edge 3	0.276	0.000	0.052	0.328	No
	Edge 4	0.201	0.267	0.052	0.520	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 41 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 41	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.092	0.075	0.052	0.219	No
	Front	0.450	0.100	0.052	0.602	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.305	0.044	0.052	0.401	No
	Edge 3	1.227	0.000	0.052	1.279	No
	Edge 4	0.055	0.196	0.052	0.303	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 41	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.092	0.033	0.052	0.177	No
	Front	0.450	0.322	0.052	0.824	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.305	0.063	0.052	0.420	No
	Edge 3	1.227	0.000	0.052	1.279	No
	Edge 4	0.055	0.294	0.052	0.401	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 41	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.092	0.026	0.052	0.170	No
	Front	0.450	0.246	0.052	0.748	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.305	0.061	0.052	0.418	No
	Edge 3	1.227	0.000	0.052	1.279	No
	Edge 4	0.055	0.271	0.052	0.378	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 41	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.092	0.020	0.052	0.164	No
	Front	0.450	0.192	0.052	0.694	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.305	0.038	0.052	0.395	No
	Edge 3	1.227	0.000	0.052	1.279	No
	Edge 4	0.055	0.251	0.052	0.358	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 41	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.092	0.012	0.052	0.156	No
	Front	0.450	0.170	0.052	0.672	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.305	0.025	0.052	0.382	No
	Edge 3	1.227	0.000	0.052	1.279	No
	Edge 4	0.055	0.267	0.052	0.374	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 66 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 66	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.165	0.075	0.052	0.292	No
	Front	0.910	0.100	0.052	1.062	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.941	0.044	0.052	1.037	No
	Edge 3	0.771	0.000	0.052	0.823	No
	Edge 4	0.181	0.196	0.052	0.429	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 66	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.165	0.033	0.052	0.250	No
	Front	0.910	0.322	0.052	1.284	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.941	0.063	0.052	1.056	No
	Edge 3	0.771	0.000	0.052	0.823	No
	Edge 4	0.181	0.294	0.052	0.527	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 66	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.165	0.026	0.052	0.243	No
	Front	0.910	0.246	0.052	1.208	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.941	0.061	0.052	1.054	No
	Edge 3	0.771	0.000	0.052	0.823	No
	Edge 4	0.181	0.271	0.052	0.504	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 66	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.165	0.020	0.052	0.237	No
	Front	0.910	0.192	0.052	1.154	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.941	0.038	0.052	1.031	No
	Edge 3	0.771	0.000	0.052	0.823	No
	Edge 4	0.181	0.251	0.052	0.484	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 66	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.165	0.012	0.052	0.229	No
	Front	0.910	0.170	0.052	1.132	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.941	0.025	0.052	1.018	No
	Edge 3	0.771	0.000	0.052	0.823	No
	Edge 4	0.181	0.267	0.052	0.500	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for LTE Band 71 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 71	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.045	0.075	0.052	0.172	No
	Front	0.173	0.100	0.052	0.325	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.156	0.044	0.052	0.252	No
	Edge 3	0.205	0.000	0.052	0.257	No
	Edge 4	0.020	0.196	0.052	0.268	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 71	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.045	0.033	0.052	0.130	No
	Front	0.173	0.322	0.052	0.547	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.156	0.063	0.052	0.271	No
	Edge 3	0.205	0.000	0.052	0.257	No
	Edge 4	0.020	0.294	0.052	0.366	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 71	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.045	0.026	0.052	0.123	No
	Front	0.173	0.246	0.052	0.471	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.156	0.061	0.052	0.269	No
	Edge 3	0.205	0.000	0.052	0.257	No
	Edge 4	0.020	0.271	0.052	0.343	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 71	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.045	0.020	0.052	0.117	No
	Front	0.173	0.192	0.052	0.417	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.156	0.038	0.052	0.246	No
	Edge 3	0.205	0.000	0.052	0.257	No
	Edge 4	0.020	0.251	0.052	0.323	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 71	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.045	0.012	0.052	0.109	No
	Front	0.173	0.170	0.052	0.395	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.156	0.025	0.052	0.233	No
	Edge 3	0.205	0.000	0.052	0.257	No
	Edge 4	0.020	0.267	0.052	0.339	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N2 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N2	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.117	0.075	0.052	0.244	No
	Front	1.216	0.100	0.052	1.368	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.840	0.044	0.052	0.936	No
	Edge 3	1.264	0.000	0.052	1.316	No
	Edge 4	0.289	0.196	0.052	0.537	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N2	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.117	0.033	0.052	0.202	No
	Front	1.216	0.322	0.052	1.590	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.840	0.063	0.052	0.955	No
	Edge 3	1.264	0.000	0.052	1.316	No
	Edge 4	0.289	0.294	0.052	0.635	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N2	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.117	0.026	0.052	0.195	No
	Front	1.216	0.246	0.052	1.514	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.840	0.061	0.052	0.953	No
	Edge 3	1.264	0.000	0.052	1.316	No
	Edge 4	0.289	0.271	0.052	0.612	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N2	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.117	0.020	0.052	0.189	No
	Front	1.216	0.192	0.052	1.460	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.840	0.038	0.052	0.930	No
	Edge 3	1.264	0.000	0.052	1.316	No
	Edge 4	0.289	0.251	0.052	0.592	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N2	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.117	0.012	0.052	0.181	No
	Front	1.216	0.170	0.052	1.438	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.840	0.025	0.052	0.917	No
	Edge 3	1.264	0.000	0.052	1.316	No
	Edge 4	0.289	0.267	0.052	0.608	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N5 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N5	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.341	0.075	0.052	0.468	No
	Front	0.546	0.100	0.052	0.698	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.718	0.044	0.052	0.814	No
	Edge 3	0.228	0.000	0.052	0.280	No
	Edge 4	0.351	0.196	0.052	0.599	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N5	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.341	0.033	0.052	0.426	No
	Front	0.546	0.322	0.052	0.920	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.718	0.063	0.052	0.833	No
	Edge 3	0.228	0.000	0.052	0.280	No
	Edge 4	0.351	0.294	0.052	0.697	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N5	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.341	0.026	0.052	0.419	No
	Front	0.546	0.246	0.052	0.844	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.718	0.061	0.052	0.831	No
	Edge 3	0.228	0.000	0.052	0.280	No
	Edge 4	0.351	0.271	0.052	0.674	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N5	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.341	0.020	0.052	0.413	No
	Front	0.546	0.192	0.052	0.790	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.718	0.038	0.052	0.808	No
	Edge 3	0.228	0.000	0.052	0.280	No
	Edge 4	0.351	0.251	0.052	0.654	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N5	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.341	0.012	0.052	0.405	No
	Front	0.546	0.170	0.052	0.768	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.718	0.025	0.052	0.795	No
	Edge 3	0.228	0.000	0.052	0.280	No
	Edge 4	0.351	0.267	0.052	0.670	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N12 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N12	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.050	0.075	0.052	0.177	No
	Front	0.155	0.100	0.052	0.307	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.212	0.044	0.052	0.308	No
	Edge 3	0.224	0.000	0.052	0.276	No
	Edge 4	0.034	0.196	0.052	0.282	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N12	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.050	0.033	0.052	0.135	No
	Front	0.155	0.322	0.052	0.529	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.212	0.063	0.052	0.327	No
	Edge 3	0.224	0.000	0.052	0.276	No
	Edge 4	0.034	0.294	0.052	0.380	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N12	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.050	0.026	0.052	0.128	No
	Front	0.155	0.246	0.052	0.453	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.212	0.061	0.052	0.325	No
	Edge 3	0.224	0.000	0.052	0.276	No
	Edge 4	0.034	0.271	0.052	0.357	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N12	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.050	0.020	0.052	0.122	No
	Front	0.155	0.192	0.052	0.399	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.212	0.038	0.052	0.302	No
	Edge 3	0.224	0.000	0.052	0.276	No
	Edge 4	0.034	0.251	0.052	0.337	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N12	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.050	0.012	0.052	0.114	No
	Front	0.155	0.170	0.052	0.377	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.212	0.025	0.052	0.289	No
	Edge 3	0.224	0.000	0.052	0.276	No
	Edge 4	0.034	0.267	0.052	0.353	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N13 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N13	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.072	0.075	0.052	0.199	No
	Front	0.225	0.100	0.052	0.377	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.287	0.044	0.052	0.383	No
	Edge 3	0.156	0.000	0.052	0.208	No
	Edge 4	0.053	0.196	0.052	0.301	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N13	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.072	0.033	0.052	0.157	No
	Front	0.225	0.322	0.052	0.599	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.287	0.063	0.052	0.402	No
	Edge 3	0.156	0.000	0.052	0.208	No
	Edge 4	0.053	0.294	0.052	0.399	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N13	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.072	0.026	0.052	0.150	No
	Front	0.225	0.246	0.052	0.523	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.287	0.061	0.052	0.400	No
	Edge 3	0.156	0.000	0.052	0.208	No
	Edge 4	0.053	0.271	0.052	0.376	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N13	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.072	0.020	0.052	0.144	No
	Front	0.225	0.192	0.052	0.469	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.287	0.038	0.052	0.377	No
	Edge 3	0.156	0.000	0.052	0.208	No
	Edge 4	0.053	0.251	0.052	0.356	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N13	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.072	0.012	0.052	0.136	No
	Front	0.225	0.170	0.052	0.447	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.287	0.025	0.052	0.364	No
	Edge 3	0.156	0.000	0.052	0.208	No
	Edge 4	0.053	0.267	0.052	0.372	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N14 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N14	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.059	0.075	0.052	0.186	No
	Front	0.216	0.100	0.052	0.368	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.315	0.044	0.052	0.411	No
	Edge 3	0.153	0.000	0.052	0.205	No
	Edge 4	0.051	0.196	0.052	0.299	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N14	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.059	0.033	0.052	0.144	No
	Front	0.216	0.322	0.052	0.590	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.315	0.063	0.052	0.430	No
	Edge 3	0.153	0.000	0.052	0.205	No
	Edge 4	0.051	0.294	0.052	0.397	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N14	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.059	0.026	0.052	0.137	No
	Front	0.216	0.246	0.052	0.514	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.315	0.061	0.052	0.428	No
	Edge 3	0.153	0.000	0.052	0.205	No
	Edge 4	0.051	0.271	0.052	0.374	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N14	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.059	0.020	0.052	0.131	No
	Front	0.216	0.192	0.052	0.460	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.315	0.038	0.052	0.405	No
	Edge 3	0.153	0.000	0.052	0.205	No
	Edge 4	0.051	0.251	0.052	0.354	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N14	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.059	0.012	0.052	0.123	No
	Front	0.216	0.170	0.052	0.438	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.315	0.025	0.052	0.392	No
	Edge 3	0.153	0.000	0.052	0.205	No
	Edge 4	0.051	0.267	0.052	0.370	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N41 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N41	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.061	0.075	0.052	0.188	No
	Front	0.468	0.100	0.052	0.620	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.122	0.044	0.052	0.218	No
	Edge 3	1.143	0.000	0.052	1.195	No
	Edge 4	0.020	0.196	0.052	0.268	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N41	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.061	0.033	0.052	0.146	No
	Front	0.468	0.322	0.052	0.842	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.122	0.063	0.052	0.237	No
	Edge 3	1.143	0.000	0.052	1.195	No
	Edge 4	0.020	0.294	0.052	0.366	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N41	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.061	0.026	0.052	0.139	No
	Front	0.468	0.246	0.052	0.766	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.122	0.061	0.052	0.235	No
	Edge 3	1.143	0.000	0.052	1.195	No
	Edge 4	0.020	0.271	0.052	0.343	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N41	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.061	0.020	0.052	0.133	No
	Front	0.468	0.192	0.052	0.712	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.122	0.038	0.052	0.212	No
	Edge 3	1.143	0.000	0.052	1.195	No
	Edge 4	0.020	0.251	0.052	0.323	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N41	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.061	0.012	0.052	0.125	No
	Front	0.468	0.170	0.052	0.690	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.122	0.025	0.052	0.199	No
	Edge 3	1.143	0.000	0.052	1.195	No
	Edge 4	0.020	0.267	0.052	0.339	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N66 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N66	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.108	0.075	0.052	0.235	No
	Front	0.803	0.100	0.052	0.955	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.803	0.044	0.052	0.899	No
	Edge 3	0.754	0.000	0.052	0.806	No
	Edge 4	0.312	0.196	0.052	0.560	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N66	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.108	0.033	0.052	0.193	No
	Front	0.803	0.322	0.052	1.177	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.803	0.063	0.052	0.918	No
	Edge 3	0.754	0.000	0.052	0.806	No
	Edge 4	0.312	0.294	0.052	0.658	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N66	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.108	0.026	0.052	0.186	No
	Front	0.803	0.246	0.052	1.101	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.803	0.061	0.052	0.916	No
	Edge 3	0.754	0.000	0.052	0.806	No
	Edge 4	0.312	0.271	0.052	0.635	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N66	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.108	0.020	0.052	0.180	No
	Front	0.803	0.192	0.052	1.047	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.803	0.038	0.052	0.893	No
	Edge 3	0.754	0.000	0.052	0.806	No
	Edge 4	0.312	0.251	0.052	0.615	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N66	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.108	0.012	0.052	0.172	No
	Front	0.803	0.170	0.052	1.025	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.803	0.025	0.052	0.880	No
	Edge 3	0.754	0.000	0.052	0.806	No
	Edge 4	0.312	0.267	0.052	0.631	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

Sum of the SAR for SA N71 &Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N71	Wi-Fi DTS Band	Bluetooth		
Body-worn	Rear	0.025	0.075	0.052	0.152	No
	Front	0.072	0.100	0.052	0.224	No
	Edge 1	0.000	0.055	0.052	0.107	No
	Edge 2	0.089	0.044	0.052	0.185	No
	Edge 3	0.095	0.000	0.052	0.147	No
	Edge 4	0.014	0.196	0.052	0.262	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N71	5.2GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.025	0.033	0.052	0.110	No
	Front	0.072	0.322	0.052	0.446	No
	Edge 1	0.000	0.037	0.052	0.089	No
	Edge 2	0.089	0.063	0.052	0.204	No
	Edge 3	0.095	0.000	0.052	0.147	No
	Edge 4	0.014	0.294	0.052	0.360	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N71	5.3GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.025	0.026	0.052	0.103	No
	Front	0.072	0.246	0.052	0.370	No
	Edge 1	0.000	0.032	0.052	0.084	No
	Edge 2	0.089	0.061	0.052	0.202	No
	Edge 3	0.095	0.000	0.052	0.147	No
	Edge 4	0.014	0.271	0.052	0.337	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N71	5.6GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.025	0.020	0.052	0.097	No
	Front	0.072	0.192	0.052	0.316	No
	Edge 1	0.000	0.023	0.052	0.075	No
	Edge 2	0.089	0.038	0.052	0.179	No
	Edge 3	0.095	0.000	0.052	0.147	No
	Edge 4	0.014	0.251	0.052	0.317	No
RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		SA N71	5.8GHz WI-Fi Band	Bluetooth		
Body-worn	Rear	0.025	0.012	0.052	0.089	No
	Front	0.072	0.170	0.052	0.294	No
	Edge 1	0.000	0.017	0.052	0.069	No
	Edge 2	0.089	0.025	0.052	0.166	No
	Edge 3	0.095	0.000	0.052	0.147	No
	Edge 4	0.014	0.267	0.052	0.333	No

Note:

·According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than1.6 W/kg, SPLSR assessment is not required.
·SPLSR mean is “The SAR to Peak Location Separation Ratio “

APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
System Check Head 750 MHz
DUT: Dipole 750 MHz Type: SID 750
Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=2.28
Frequency: 750 MHz; Medium parameters used: f = 750 MHz; σ=0.88 mho/m; εr =41.91; ρ= 1000 kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

SURFACE SAR	VOLUME SAR
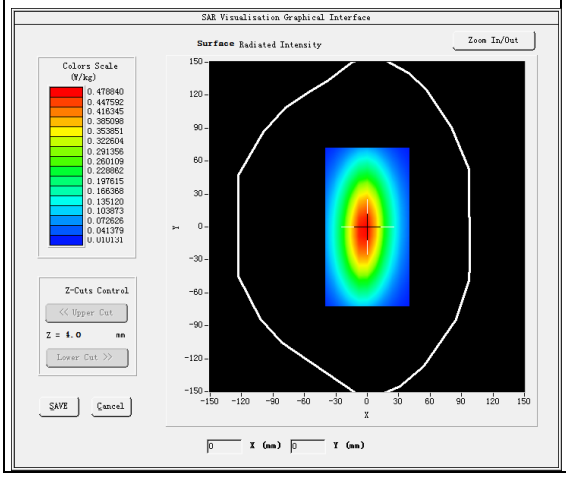	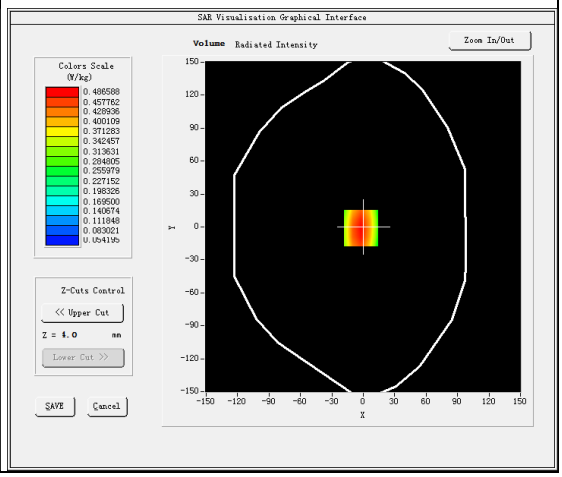

Maximum location: X=-2.00, Y=-1.00
SAR Peak: 0.68 W/kg

SAR 10g (W/Kg)	0.327975
SAR 1g (W/Kg)	0.518093

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.6599	0.4870	0.3384	0.2380	0.1735	0.1248	0.0931

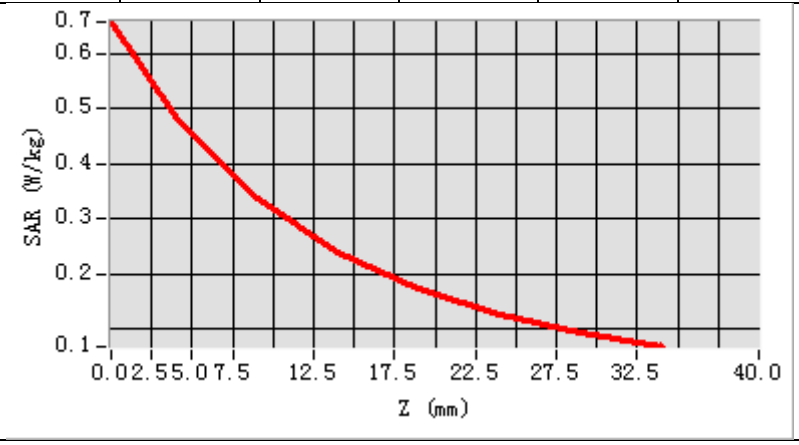

3D screen shot	Hot spot position
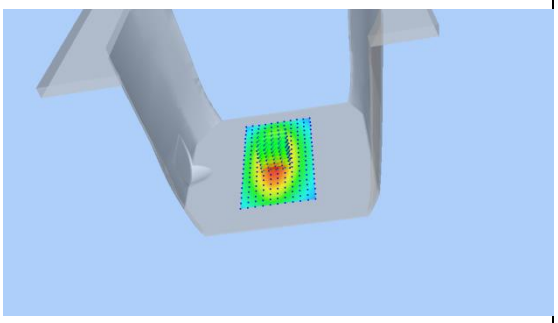	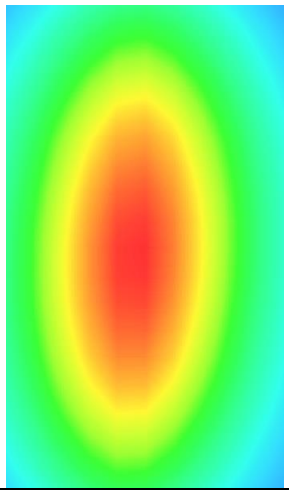

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
System Check Head 835 MHz
DUT: Dipole 835 MHz Type: SID 835
Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=2.20
Frequency: 835 MHz; Medium parameters used: f = 835 MHz; σ=0.93 mho/m; εr =41.68; ρ= 1000 kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

SURFACE SAR	VOLUME SAR
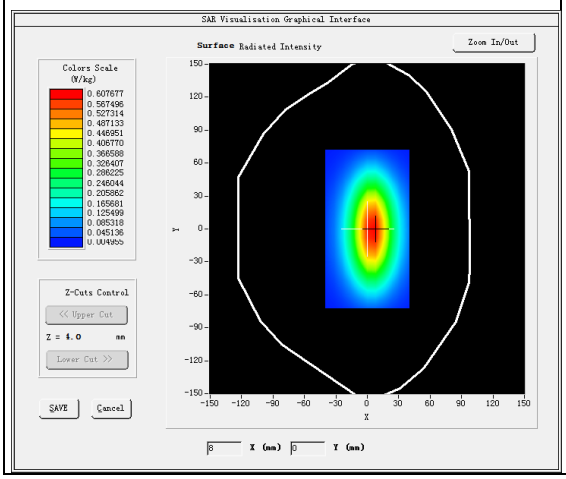	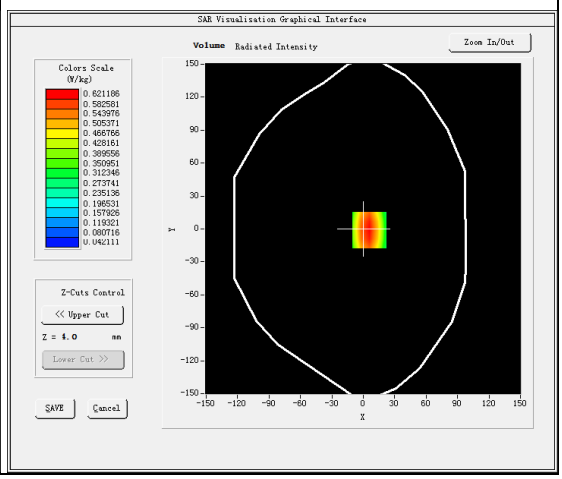

Maximum location: X=6.00, Y=-1.00
SAR Peak: 0.89 W/kg

SAR 10g (W/Kg)	0.386649
SAR 1g (W/Kg)	0.607341

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.8825	0.6211	0.3657	0.2629	0.1740	0.1193	0.0834

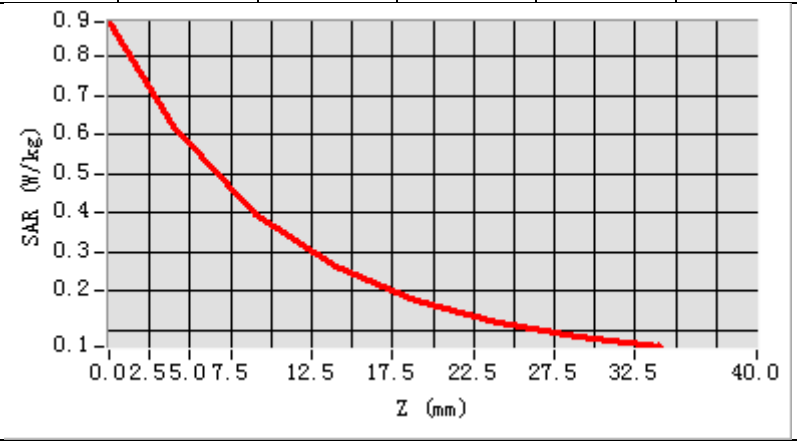

3D screen shot	Hot spot position
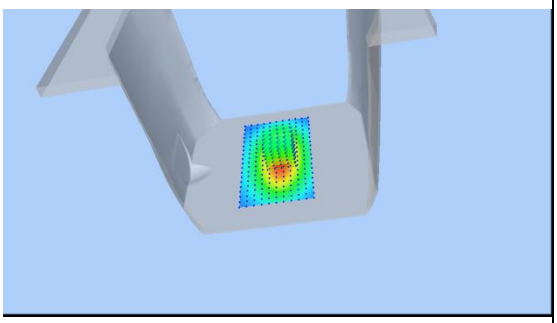	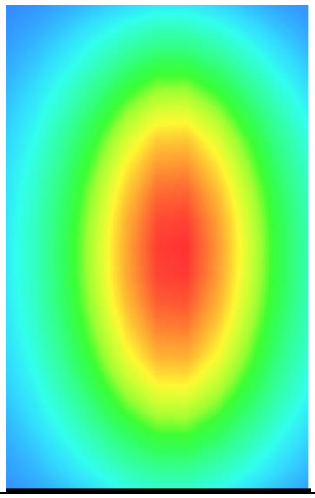

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
System Check Head 1750MHz
DUT: Dipole 1800 MHz; Type: SID 1800
Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=2.29
Frequency: 1750 MHz; Medium parameters used: f = 1750MHz; σ=1.34 mho/m; εr =38.88; ρ= 1000 kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

SURFACE SAR	VOLUME SAR
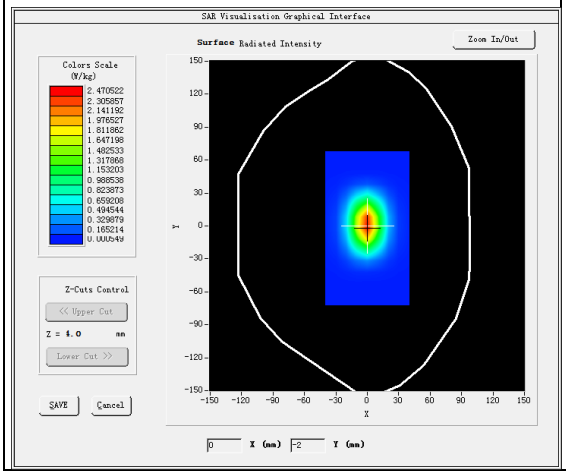	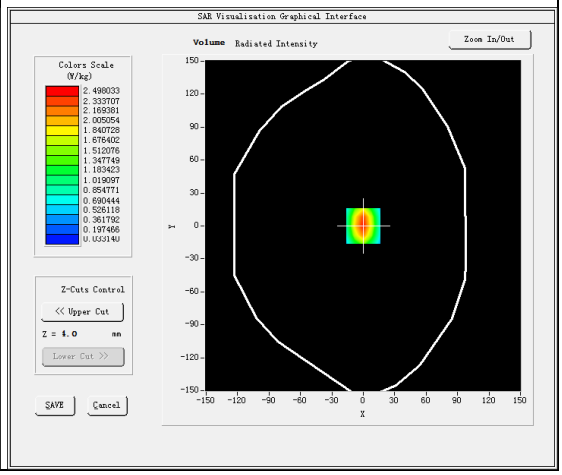

Maximum location: X=0.00, Y=0.00
SAR Peak: 4.04 W/kg

SAR 10g (W/Kg)	1.192690
SAR 1g (W/Kg)	2.353817

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.0703	2.4961	1.3109	0.7258	0.4051	0.2268	0.1344

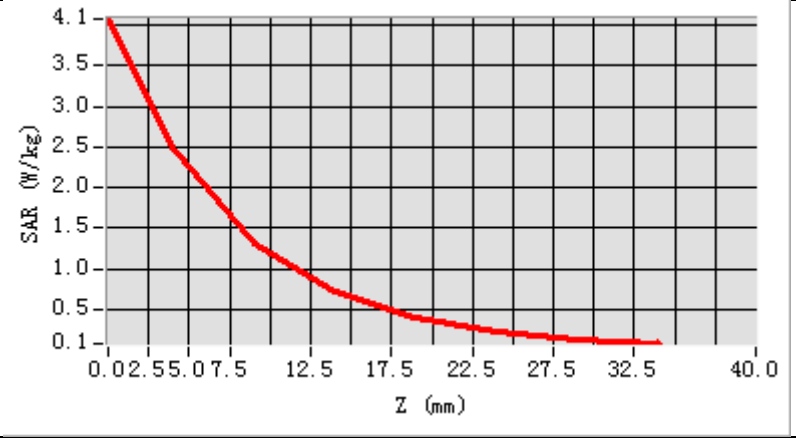

3D screen shot	Hot spot position
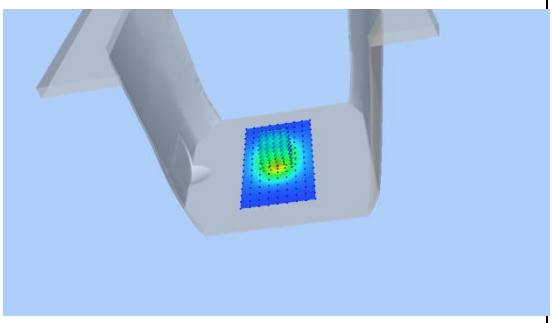	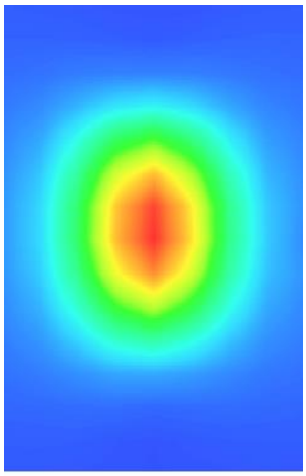

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
System Check Head 1900MHz
DUT: Dipole 1900 MHz; Type: SID 1900
Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=2.29
Frequency: 1900 MHz; Medium parameters used: f = 1900 MHz; σ=1.41 mho/m; εr =40.43; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

SURFACE SAR	VOLUME SAR
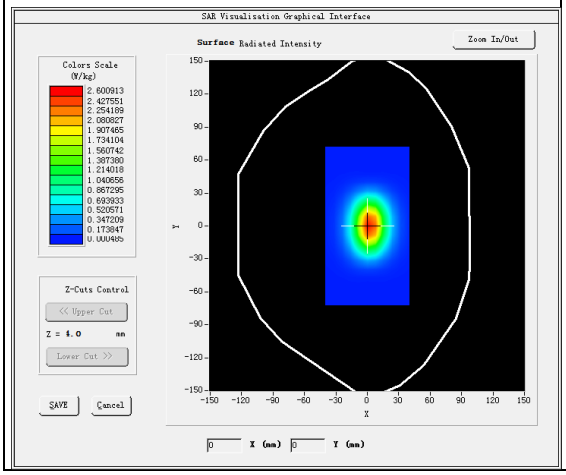	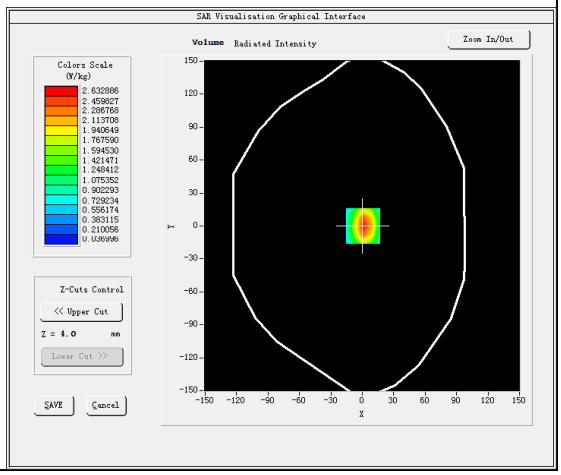

Maximum location: X=1.00, Y=0.00
SAR Peak: 4.30 W/kg

SAR 10g (W/Kg)	1.255680
SAR 1g (W/Kg)	2.490639

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	4.3042	2.6308	1.3776	0.7511	0.4198	0.2350	0.1357

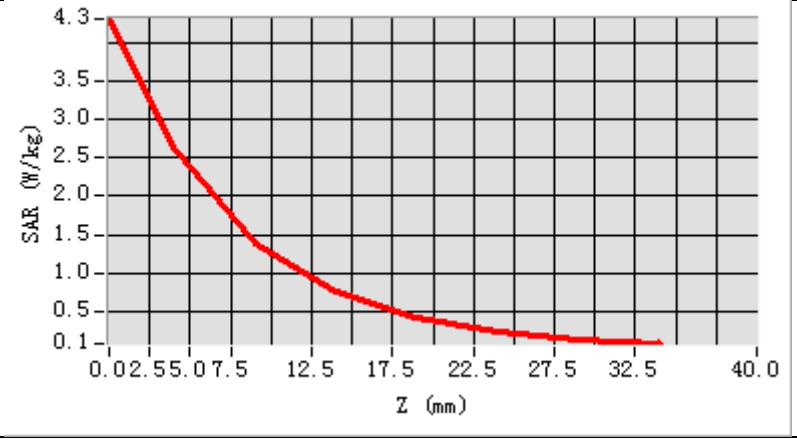

3D screen shot	Hot spot position
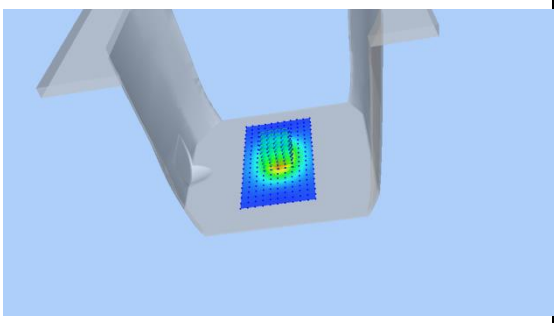	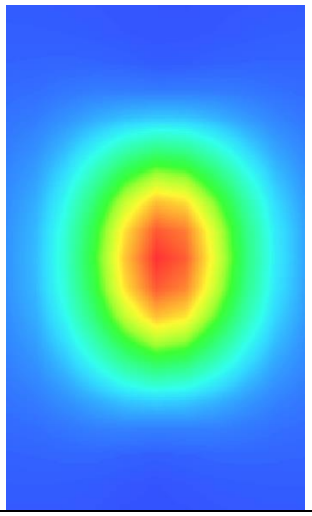

Test Laboratory: AGC Lab **Date: Jul. 15, 2026**
System Check Head 2450 MHz
DUT: Dipole 2450 MHz Type: SID 2450
Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=2.38
Frequency: 2450 MHz; Medium parameters used: f = 2450 MHz; σ=1.82 mho/m; εr =38.71; ρ= 1000 kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 2450MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 2450MHz Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

SURFACE SAR	VOLUME SAR
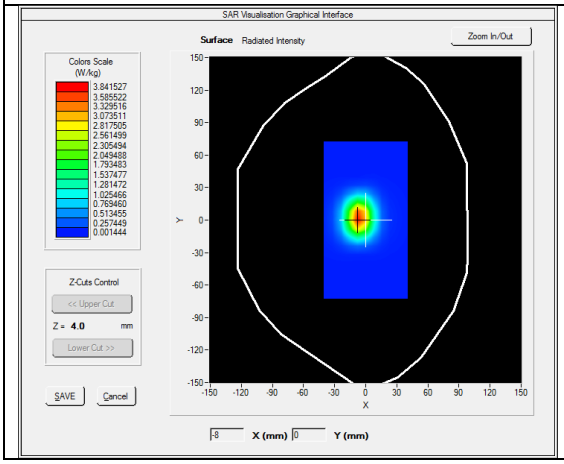	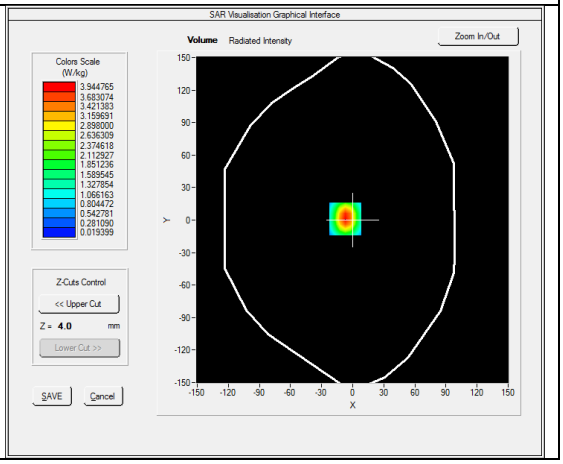

Maximum location: X=-7.00, Y=1.00
SAR Peak: 6.74 W/kg

SAR 10g (W/Kg)	1.625902
SAR 1g (W/Kg)	3.640759

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.8250	3.9427	1.8600	0.9059	0.4432	0.2217	0.1087

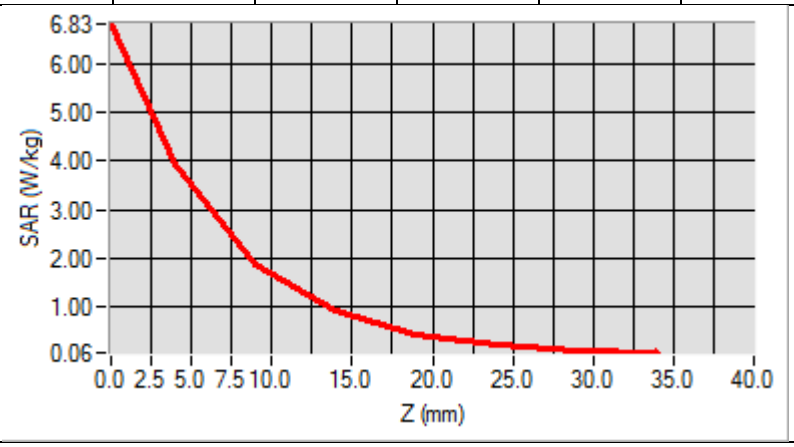

3D screen shot	Hot spot position
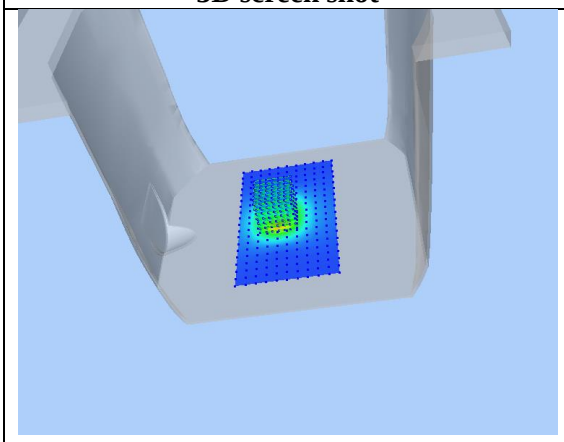	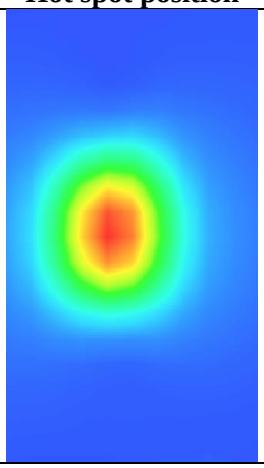

Test Laboratory: AGC Lab **Date: Jul. 15, 2026**
System Check Head 2600MHz
DUT: Dipole 2600 MHz; Type: SID 2600
Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=2.21
Frequency:2600 MHz; Medium parameters used: f = 2600 MHz; σ=1.93 mho/m; εr =38.95; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section; Input Power=18dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm
Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

SURFACE SAR	VOLUME SAR
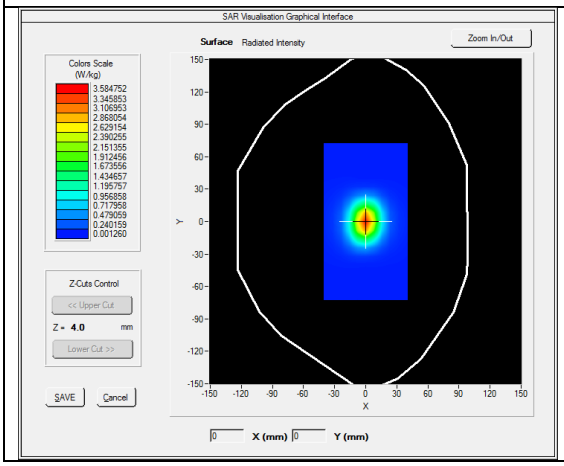	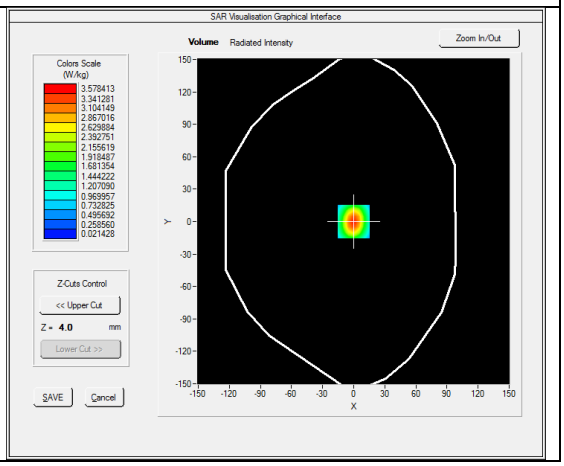

Maximum location: X=0.00, Y=0.00
SAR Peak: 6.00 W/kg

SAR 10g (W/Kg)	1.527387
SAR 1g (W/Kg)	3.342805

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.0614	3.5736	1.7420	0.8599	0.4325	0.2262	0.1147

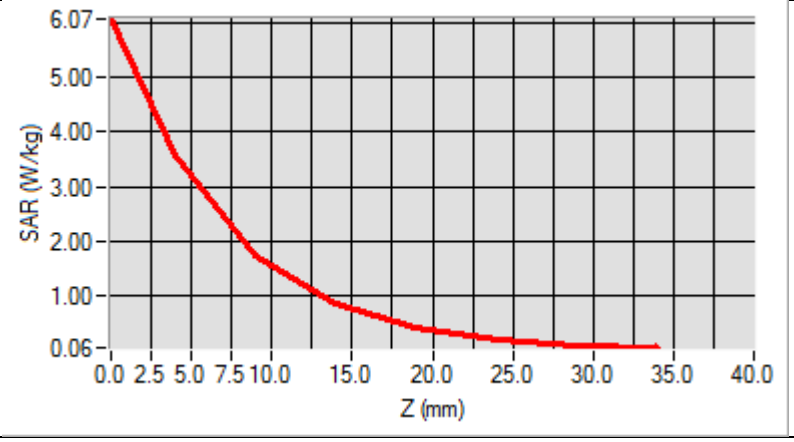

3D screen shot	Hot spot position
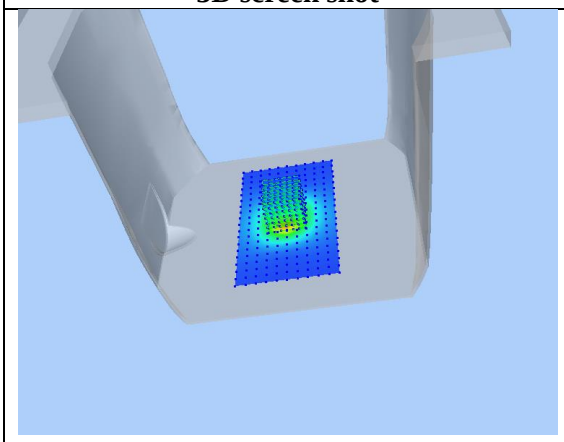	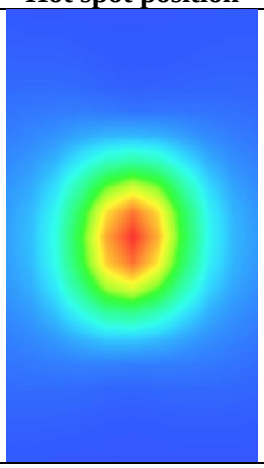

Test Laboratory: AGC Lab **Date: Jul. 11, 2026**
System Check 5200 MHz
DUT: Dipole 5000MHz Type: SID5000
Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1; Conv.F=1.64
Frequency: 5200 MHz; Medium parameters used: f = 5250 MHz; σ =4.58 mho/m; εr =35.32; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section; Input Power=10dBm

SATIMO Configuration:
- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 5200 MHz Body/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 5200 MHz Body/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

SURFACE SAR	VOLUME SAR
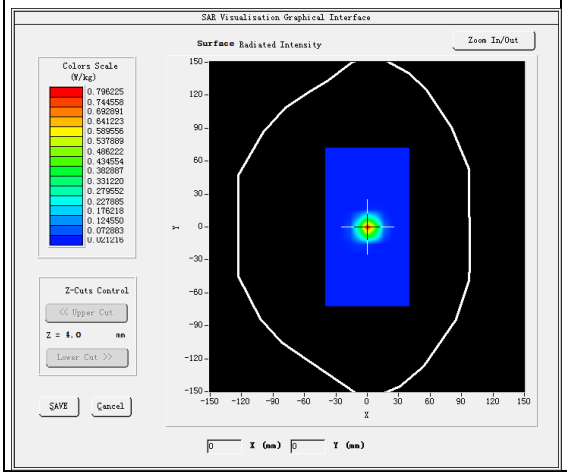	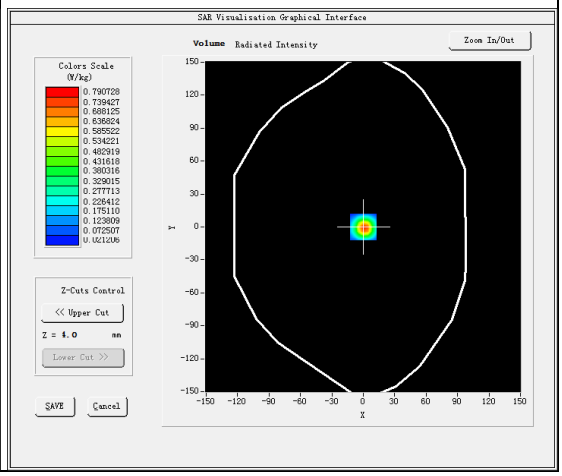

Maximum location: X=0.00, Y=0.00
SAR Peak: 2.24 W/kg

SAR 10g (W/Kg)	0.215735
SAR 1g (W/Kg)	0.739101

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	2.2233	0.7928	0.3997	0.1921	0.0808	0.0376	0.0290	0.0231	0.0252	0.0258	0.0259	0.0252

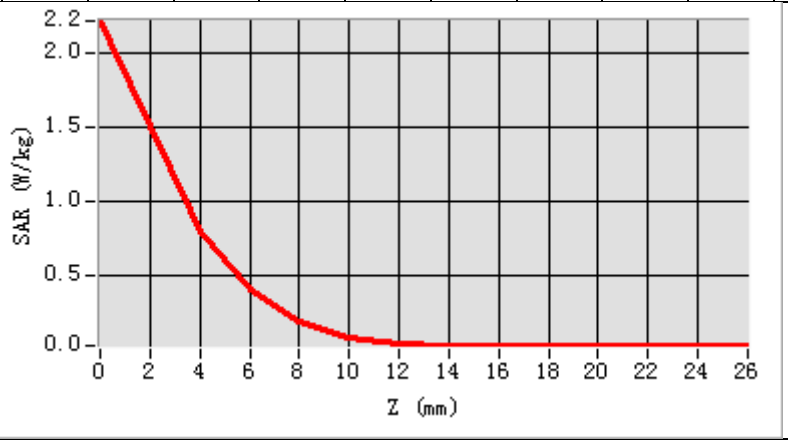

3D screen shot	Hot spot position
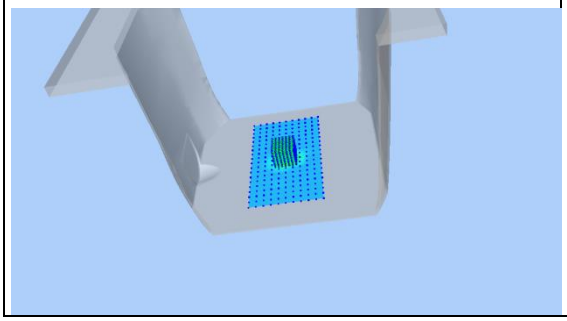	

Test Laboratory: AGC Lab **Date: Jul. 11, 2026**
System Check Head 5300 MHz
DUT: Dipole 5000MHz Type: SID5000
Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1; Conv.F=1.64
Frequency: 5300 MHz; Medium parameters used: f = 5250 MHz; σ =4.67 mho/m; εr =36.19; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section; Input Power=10dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 5300 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 5300 MHz Head/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

SURFACE SAR	VOLUME SAR
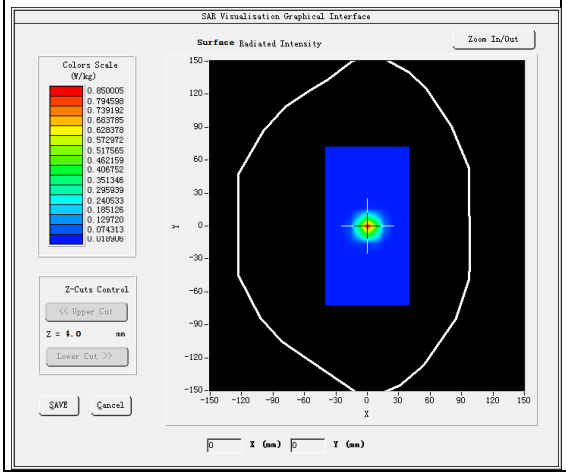	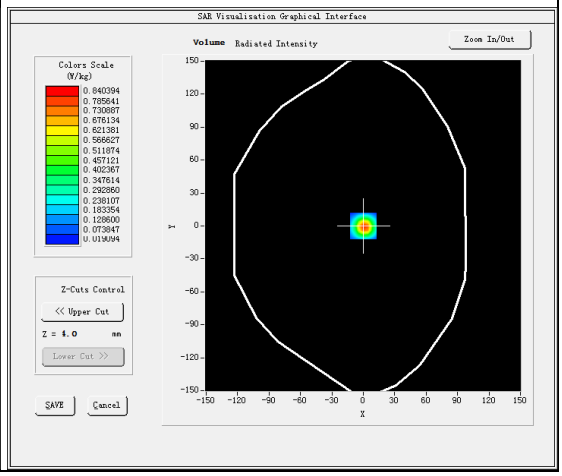

Maximum location: X=0.00, Y=0.00
SAR Peak: 2.32 W/kg

SAR 10g (W/Kg)	0.226103
SAR 1g (W/Kg)	0.772298

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	2.3667	0.8388	0.4094	0.1930	0.0872	0.0321	0.0239	0.0174	0.0182	0.0187	0.0190	0.0193

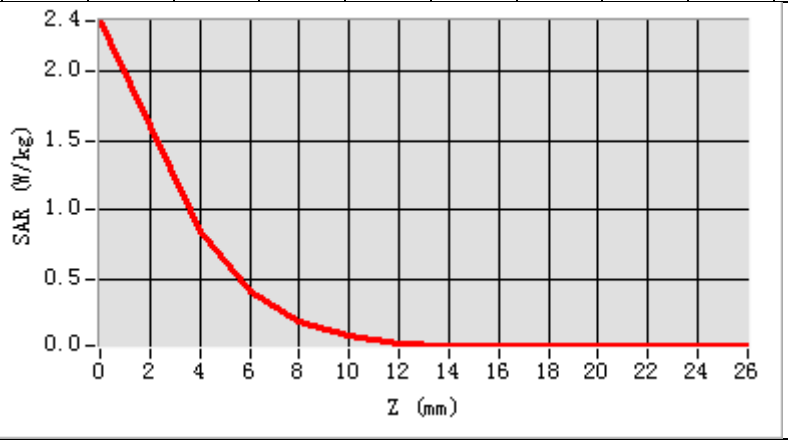

3D screen shot	Hot spot position
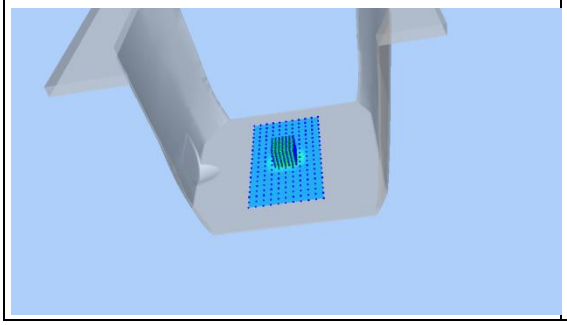	

Test Laboratory: AGC Lab **Date: Jul. 12, 2026**
System Check Head 5600 MHz
DUT: Dipole 5000MHz Type: SID5000
Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1; Conv.F=1.50
Frequency: 5600 MHz; Medium parameters used: f = 5600 MHz; σ =5.03 mho/m; εr =35.28; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section; Input Power=10dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 5600 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 5600 MHz Head/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

SURFACE SAR	VOLUME SAR
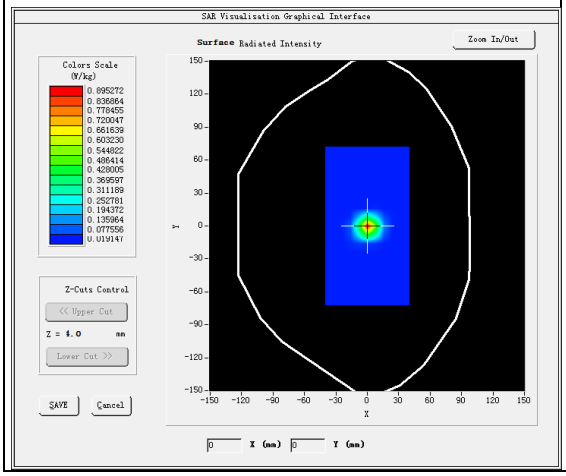	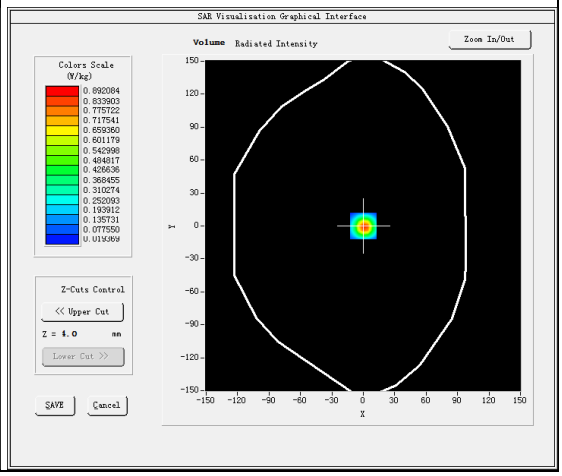

Maximum location: X=0.00, Y=0.00
SAR Peak: 2.49 W/kg

SAR 10g (W/Kg)	0.239206
SAR 1g (W/Kg)	0.825795

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	2.4831	0.8929	0.4483	0.2135	0.0960	0.0352	0.0248	0.0191	0.0233	0.0238	0.0230	0.0225

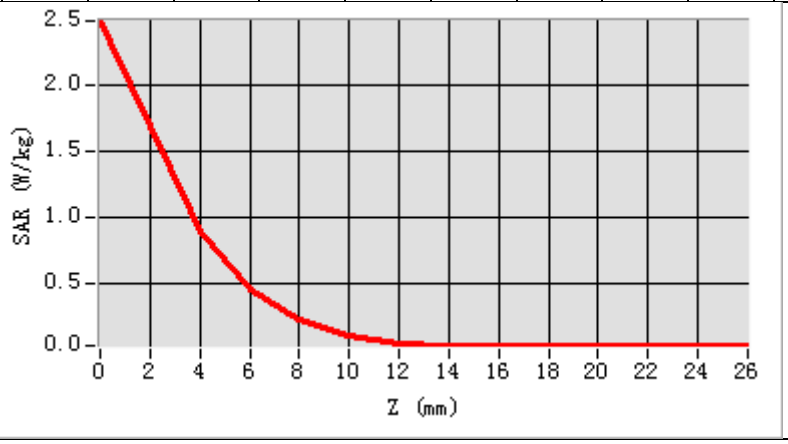

3D screen shot	Hot spot position
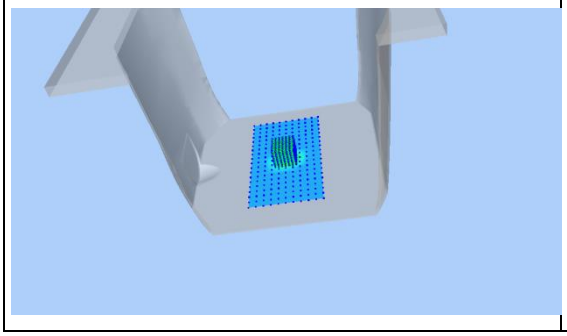	

Test Laboratory: AGC Lab **Date: Jul. 12, 2026**
System Check Head 5800 MHz
DUT: Dipole 5000MHz Type: SID5000
Communication System: CW; Communication System Band: D5000 (5000.0 MHz); Duty Cycle: 1:1; Conv.F=1.49
Frequency: 5800 MHz; Medium parameters used: f = 5750 MHz; σ =5.31 mho/m; εr =36.54; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section; Input Power=10dBm

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 5800 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/System Check 5800 MHz Head/Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

SURFACE SAR	VOLUME SAR
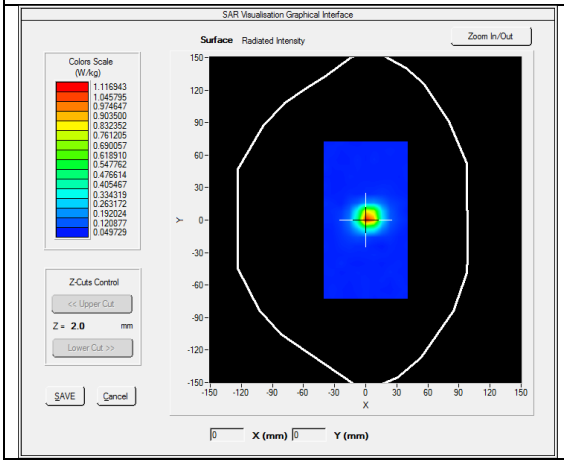	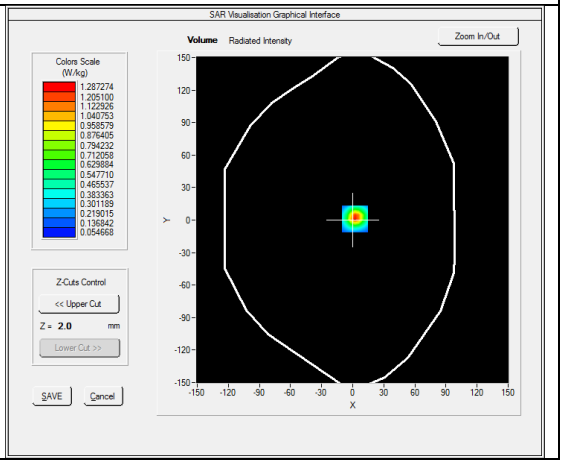

Maximum location: X=2.00, Y=1.00
SAR Peak: 2.31 W/kg

SAR 10g (W/Kg)	0.239360
SAR 1g (W/Kg)	0.694104

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	2.1642	1.2850	0.6438	0.3505	0.1908	0.1237	0.0822	0.0661	0.0632	0.0588	0.0580	0.0630

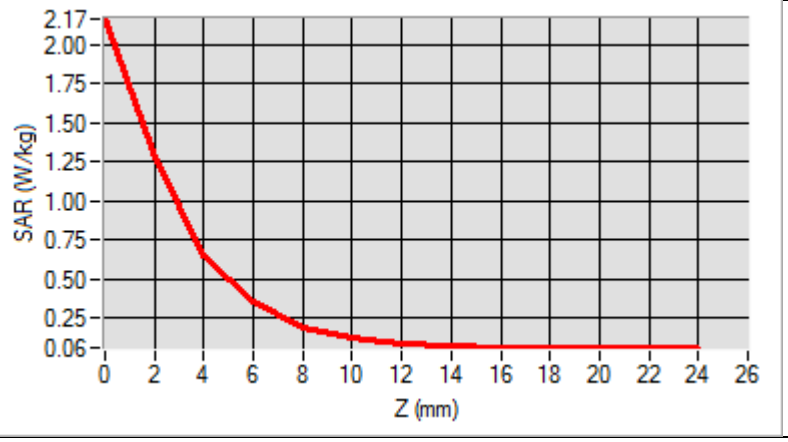

3D screen shot	Hot spot position
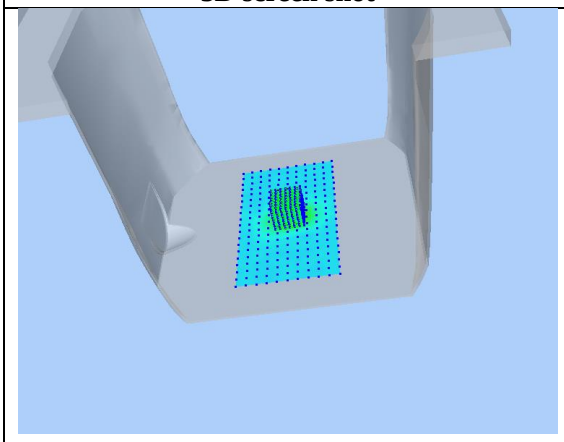	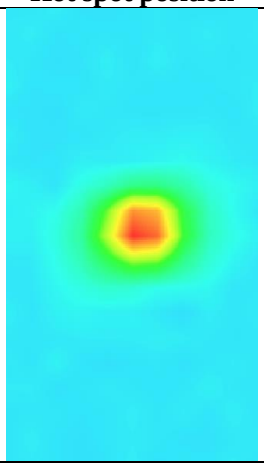

APPENDIX B. SAR MEASUREMENT DATA

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
LTE Band 2 Low-Body-Front (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.29; Frequency:1860MHz; Medium parameters used: f = 1900 MHz; σ= 1.37 mho/m; εr =41.23; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 2 Low-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 2 Low-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Front
Band	LTE Band 2
Channels	Low
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
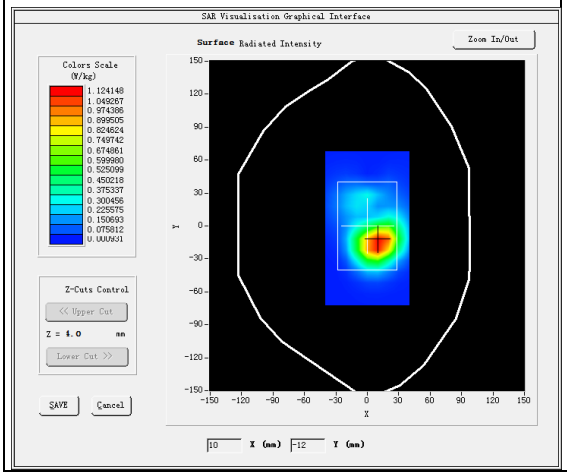	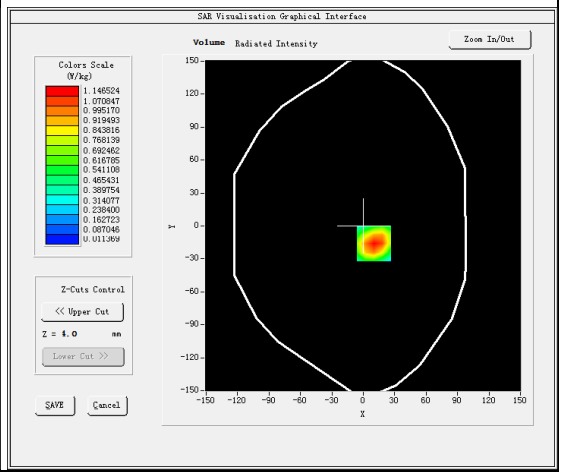

Maximum location: X=10.00, Y=-16.00
SAR Peak: 1.83 W/kg

SAR 10g (W/Kg)	0.578844
SAR 1g (W/Kg)	1.096229

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.8191	1.1465	0.6276	0.3665	0.2072	0.1180	0.0676

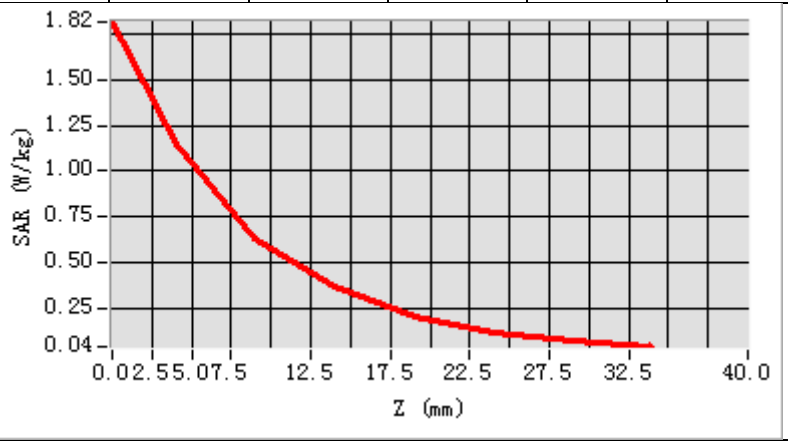

3D screen shot	Hot spot position
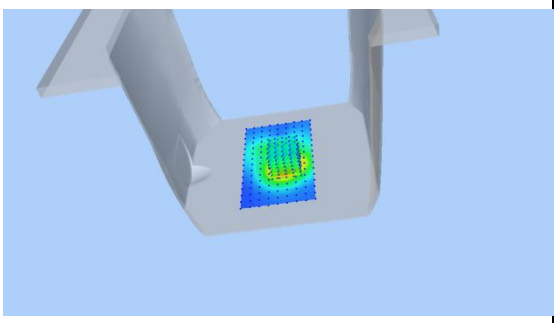	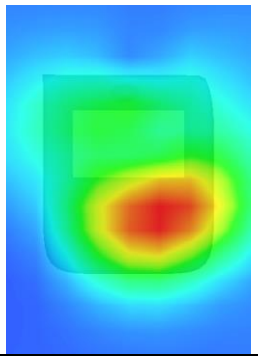

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
LTE Band 4 Mid-Body- Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.29; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz; σ= 1.32 mho/m; εr =39.71; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 4 Mid-Body- Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 4 Mid-Body- Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
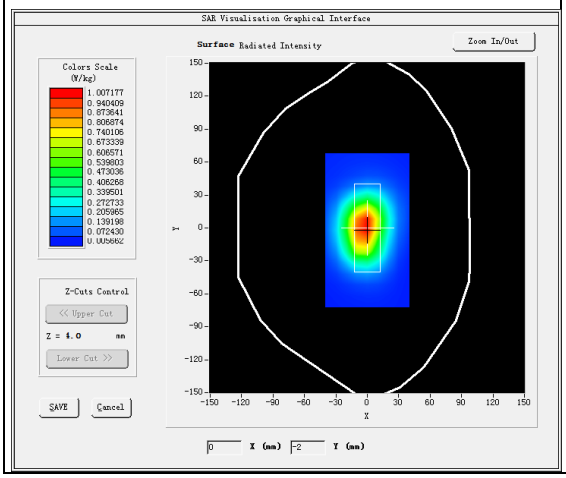	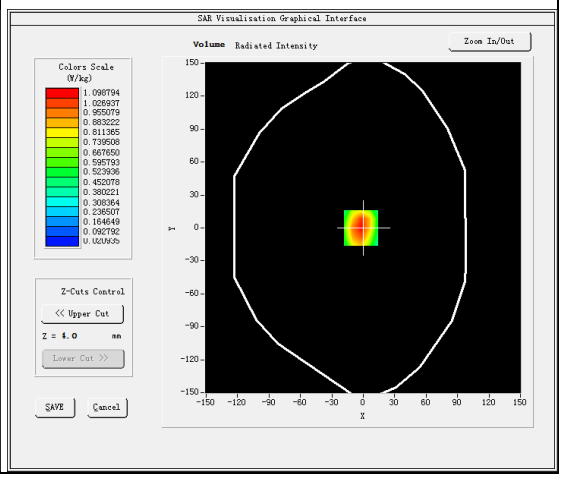

Maximum location: X=-2.00, Y=0.00
SAR Peak: 1.72 W/kg

SAR 10g (W/Kg)	0.590340
SAR 1g (W/Kg)	1.058309

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.7189	1.0988	0.6364	0.3994	0.2619	0.1549	0.0952

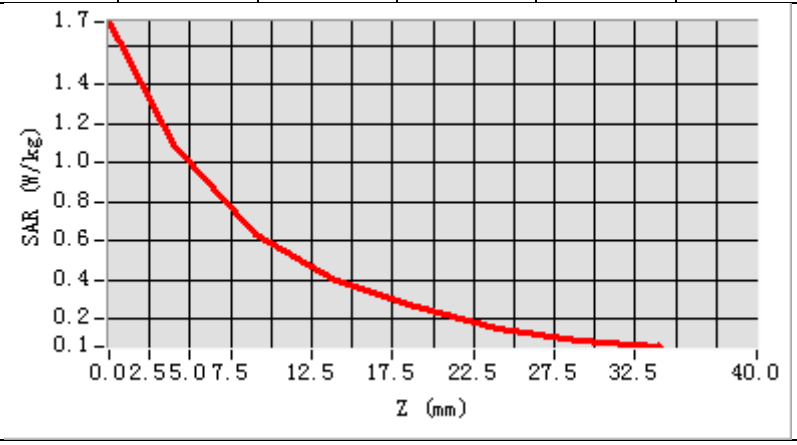

3D screen shot	Hot spot position
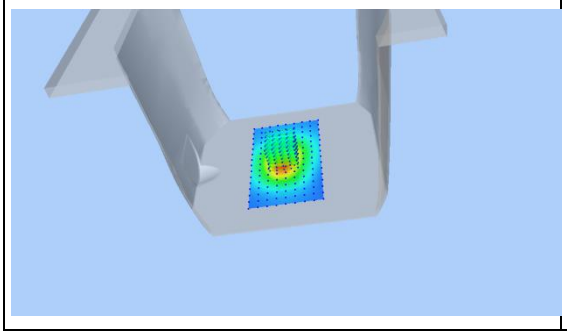	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
LTE Band 5 Low-Body-Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.20
Frequency:829 MHz; Medium parameters used: f = 835 MHz; σ=0.91mho/m; εr =42.05; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 5 Low-Body-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 5 Low-Body-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 5
Channels	Low
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
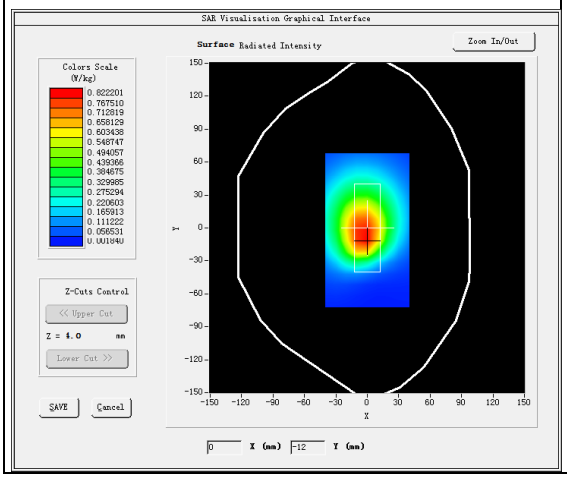	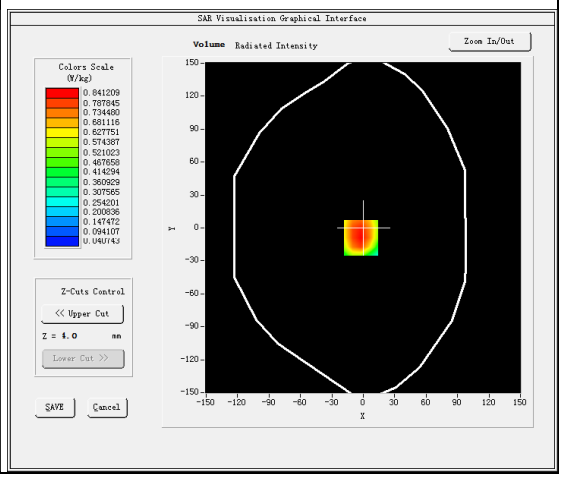

Maximum location: X=-2.00, Y=-9.00
SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.526768
SAR 1g (W/Kg)	0.812256

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.1316	0.8412	0.5755	0.3926	0.2672	0.1842	0.1266

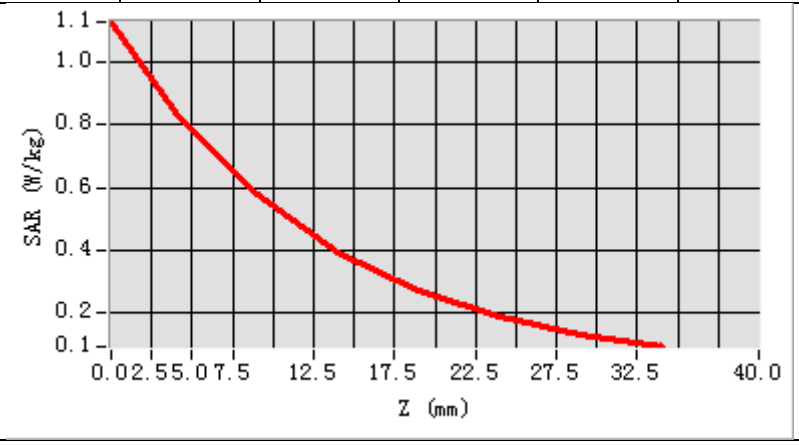

3D screen shot	Hot spot position
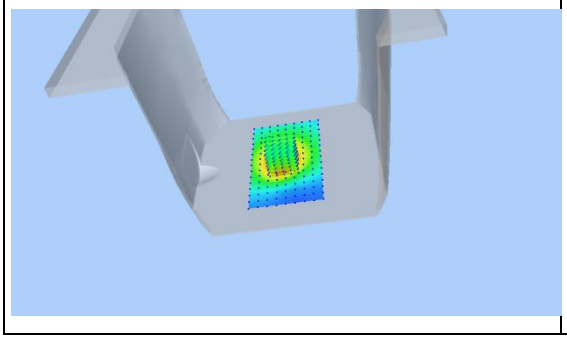	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
LTE Band 5 High-Body-Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.20
Frequency:844 MHz; Medium parameters used: f = 835 MHz; σ=0.93mho/m; εr =40.98; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 5 High-Body-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 5 High-Body-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 5
Channels	High
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
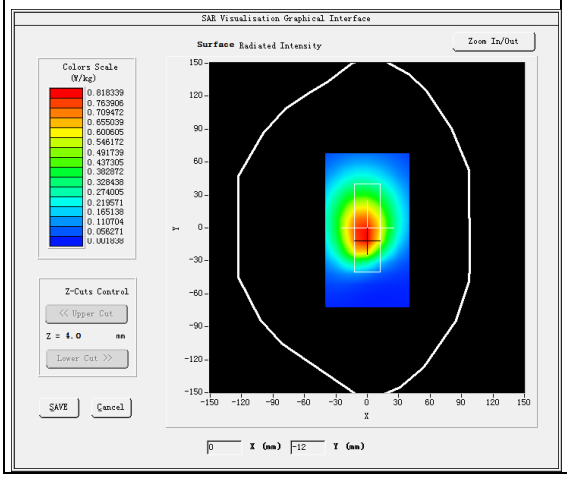	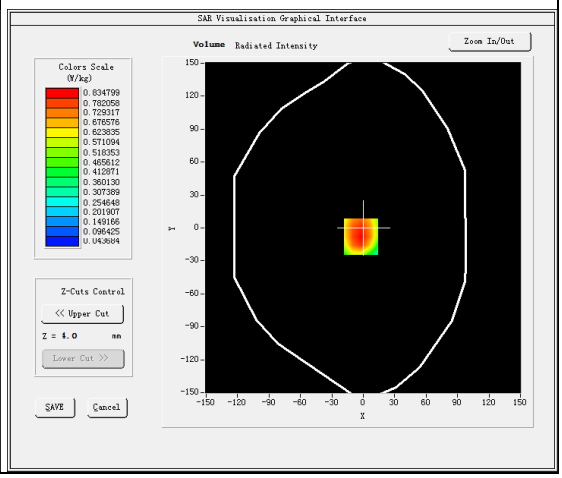

Maximum location: X=-2.00, Y=-8.00
SAR Peak: 1.15 W/kg

SAR 10g (W/Kg)	0.528457
SAR 1g (W/Kg)	0.802675

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.0790	0.8348	0.5896	0.4062	0.2761	0.1899	0.1329

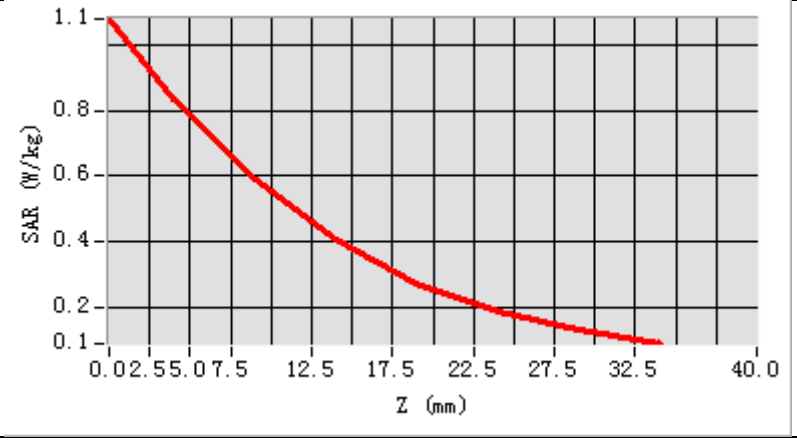

3D screen shot	Hot spot position
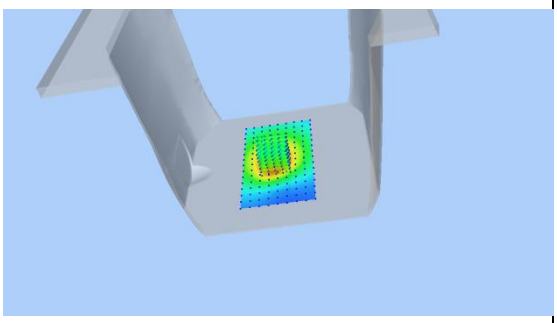	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
LTE Band 12 Mid-Body- Edge 3(Bottom) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 12; Duty Cycle:1:1; Conv.F=2.28; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; σ=0.87 mho/m; εr =42.36; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 12 Mid-Body- Edge 3(Bottom) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 12 Mid-Body- Edge 3(Bottom) /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	LTE Band 12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
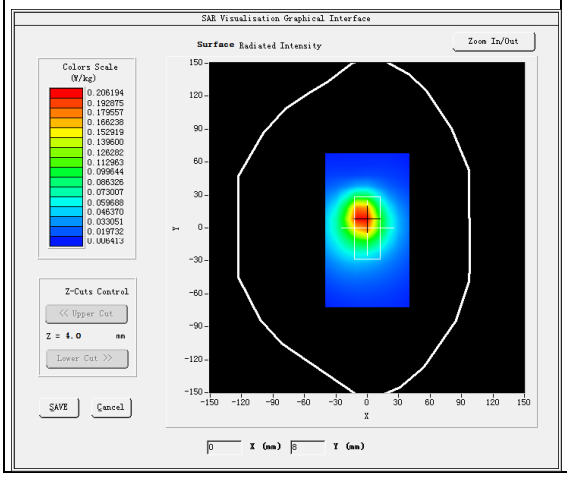	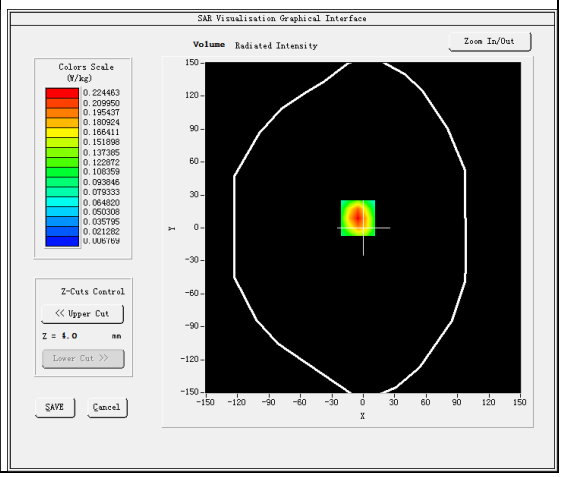

Maximum location: X=-5.00, Y=9.00
SAR Peak: 0.35 W/kg

SAR 10g (W/Kg)	0.120873
SAR 1g (W/Kg)	0.216152

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3476	0.2245	0.1296	0.0794	0.0507	0.0332	0.0223

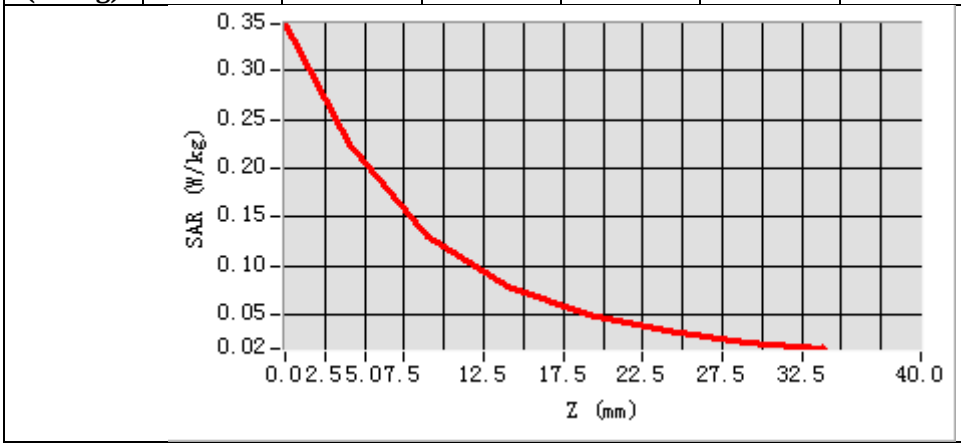

3D screen shot	Hot spot position
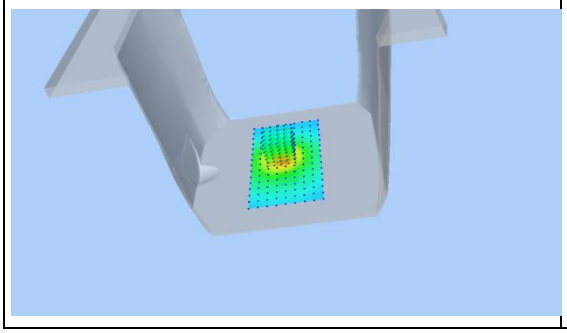	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
LTE Band 13 Mid-Body- Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 13; Duty Cycle:1:1; Conv.F=2.28; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; σ=0.90 mho/m; εr =41.66; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 13 Mid-Body- Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 13 Mid-Body- Edge 2(Right) /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
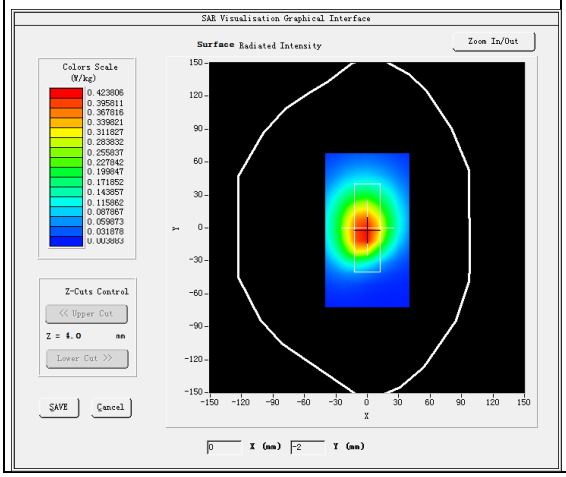	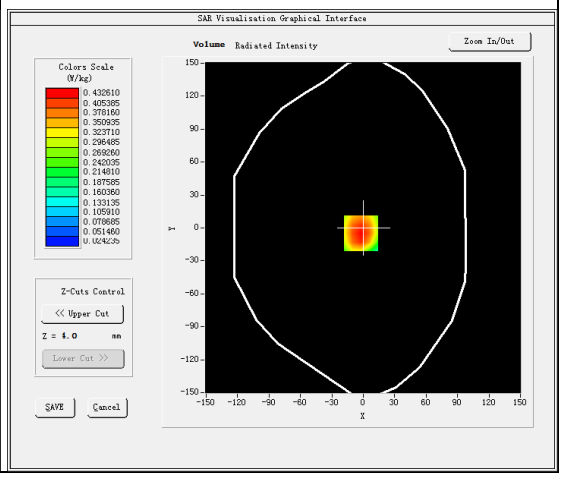

Maximum location: X=-2.00, Y=-5.00
SAR Peak: 0.59 W/kg

SAR 10g (W/Kg)	0.273967
SAR 1g (W/Kg)	0.417028

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.5662	0.4326	0.3048	0.2141	0.1485	0.1042	0.0739

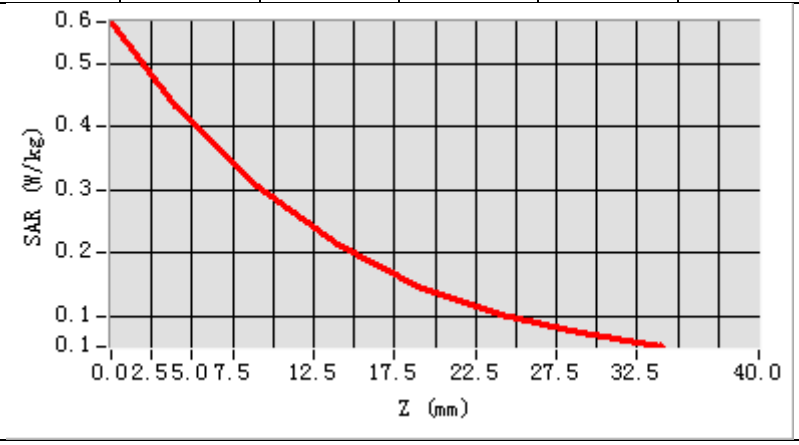

3D screen shot	Hot spot position
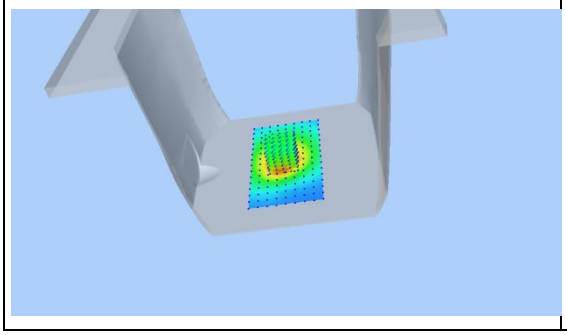	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
LTE Band 14 Mid-Body- Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 14; Duty Cycle:1:1; Conv.F=2.28; Frequency: 793 MHz; Medium parameters used: f = 750 MHz; σ=0.91 mho/m; εr =41.32;ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 14 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 14 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 14
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
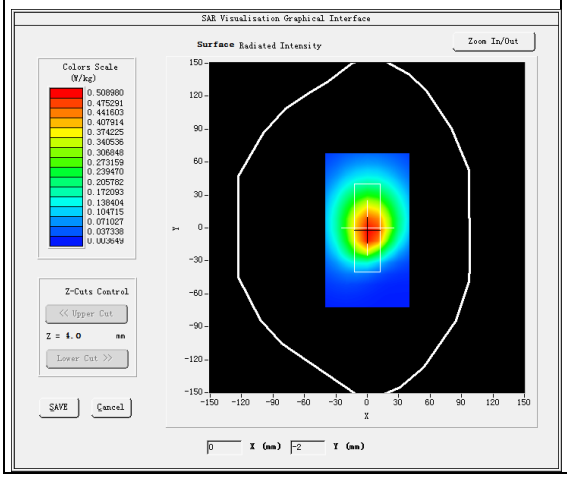	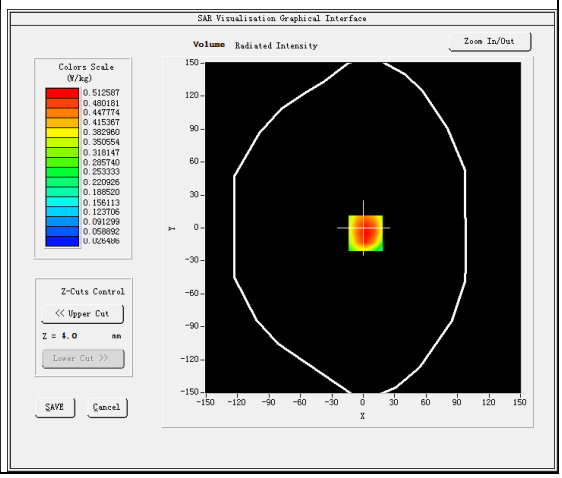

Maximum location: X=2.00, Y=-5.00
SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.322921
SAR 1g (W/Kg)	0.496173

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.6697	0.5126	0.3618	0.2516	0.1749	0.1209	0.0850

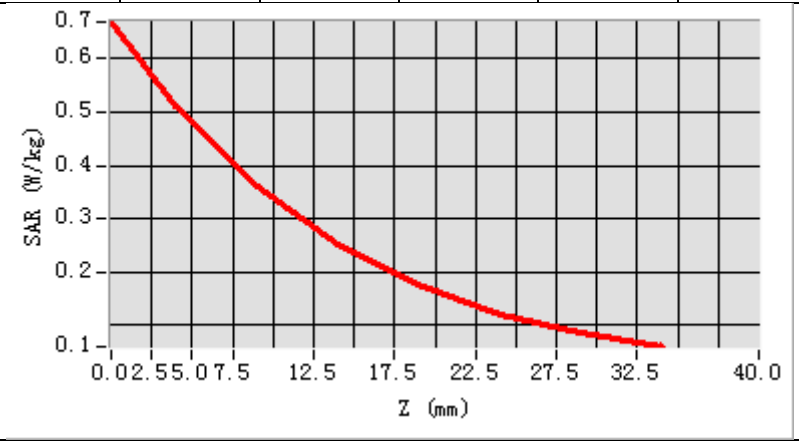

3D screen shot	Hot spot position
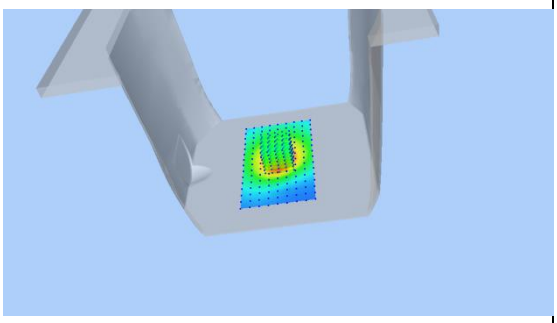	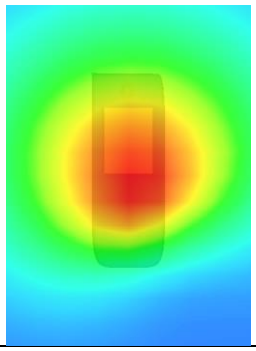

Test Laboratory: AGC Lab **Date: Jul. 15, 2026**
LTE Band 41 Mid-Body- Edge 3(Bottom) (1RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.21
Frequency: 2593MHz; Medium parameters used: f =2600 MHz; σ=1.91 mho/m; εr =39.02; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE BAND 41 Mid-Body- Edge 3(Bottom) /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 41 Mid-Body- Edge 3(Bottom) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

SURFACE SAR	VOLUME SAR
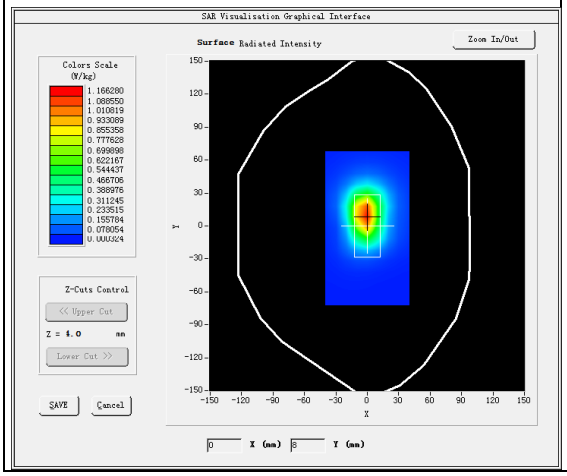	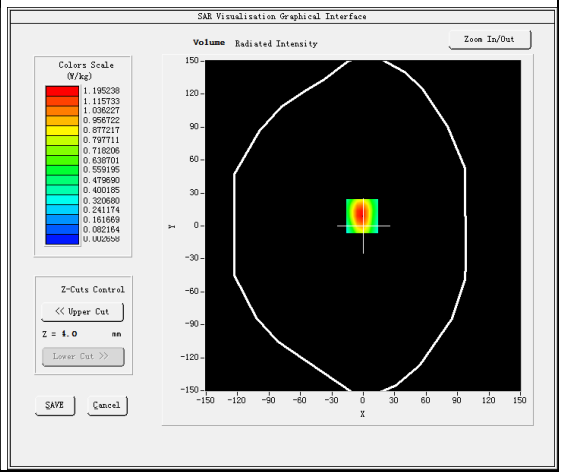

Maximum location: X=-1.00, Y=9.00
SAR Peak: 2.06 W/kg

SAR 10g (W/Kg)	0.533203
SAR 1g (W/Kg)	1.122279

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.0591	1.1952	0.5619	0.2647	0.1207	0.0554	0.0250

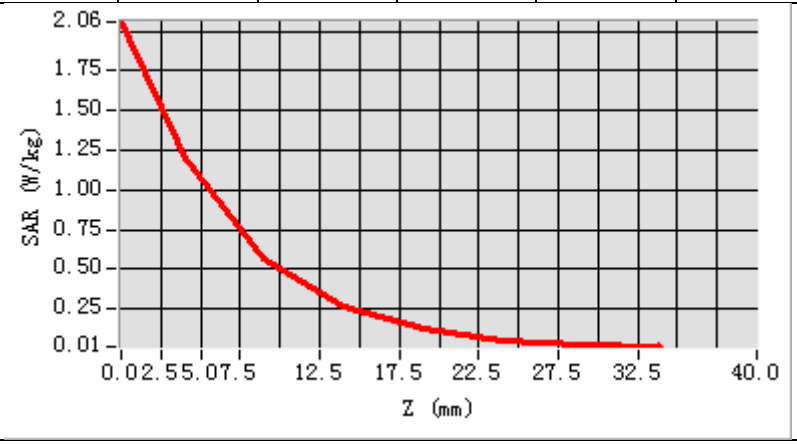

3D screen shot	Hot spot position
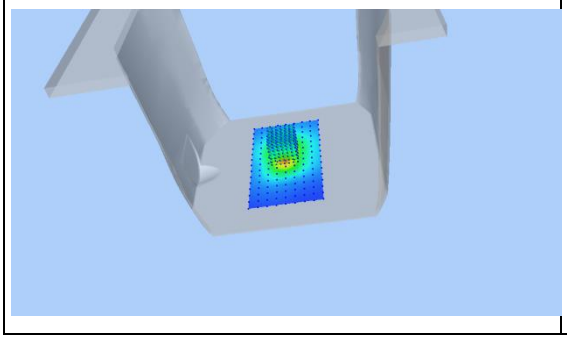	

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
LTE Band 66 Mid-Body-Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.29; Frequency:1745 MHz; Medium parameters used: f = 1750 MHz; σ=1.33 mho/m; εr =39.16; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 66 Mid-Body-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 66 Mid-Body-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
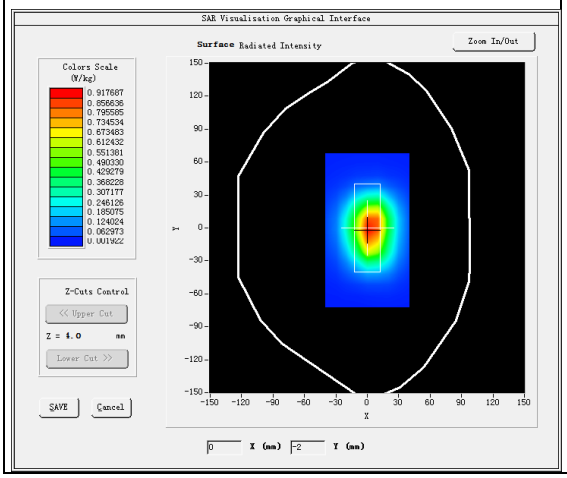	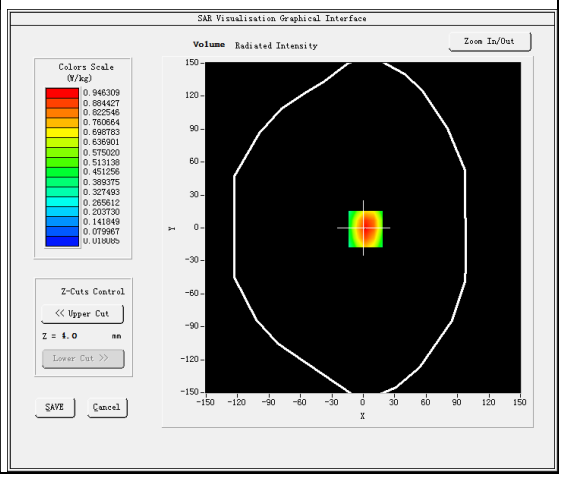

Maximum location: X=2.00, Y=-1.00
SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.510428
SAR 1g (W/Kg)	0.897125

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.3745	0.9463	0.5787	0.3309	0.2018	0.1298	0.0792

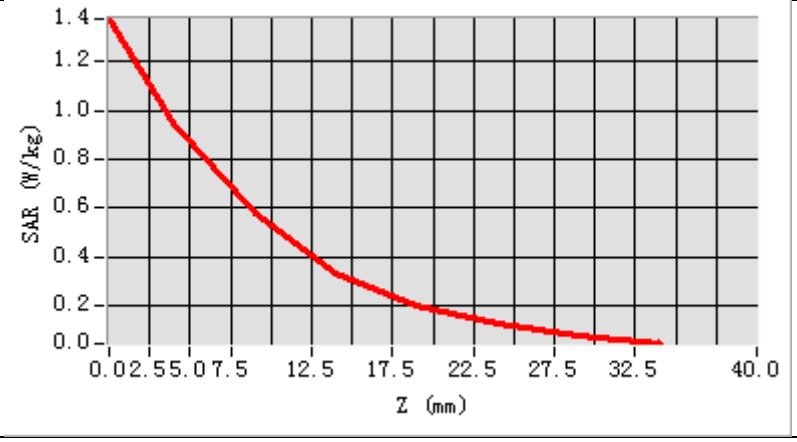

3D screen shot	Hot spot position
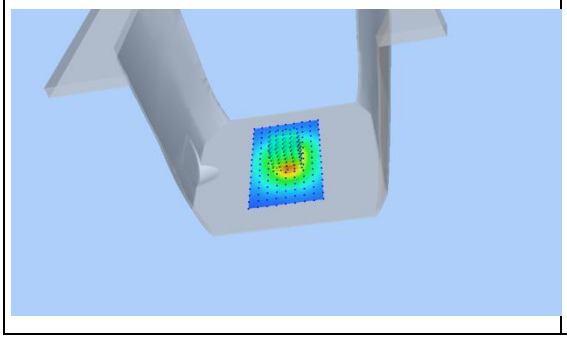	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
LTE Band 71 Mid-Body- Edge 3(Bottom) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 71; Duty Cycle:1:1; Conv.F=1.94; Frequency: 683 MHz; Medium parameters used: f = 750 MHz; σ=0.86 mho/m; εr =42.61; ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 71 Mid-Body-Edge 3(Bottom)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 71 Mid-Body-Edge 3(Bottom)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	LTE Band 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
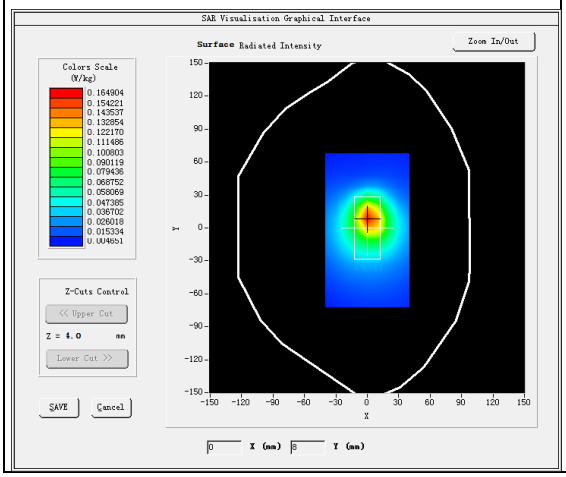	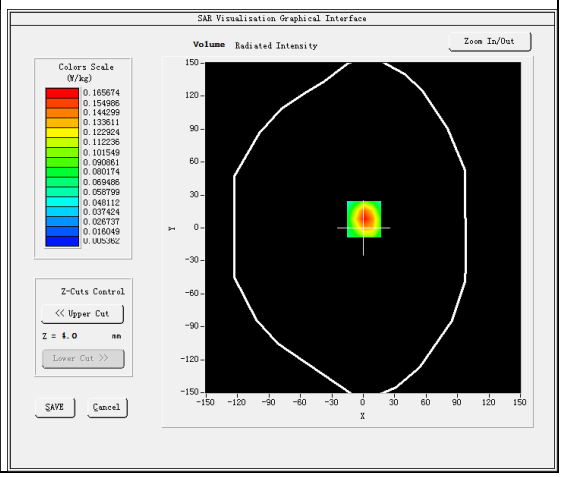

Maximum location: X=1.00, Y=8.00
SAR Peak: 0.26 W/kg

SAR 10g (W/Kg)	0.090445
SAR 1g (W/Kg)	0.163606

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.2595	0.1657	0.0944	0.0581	0.0372	0.0246	0.0168

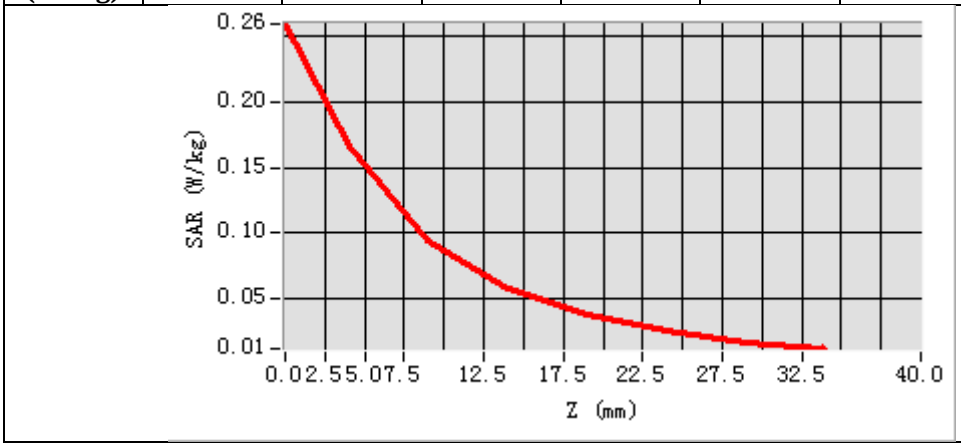

3D screen shot	Hot spot position
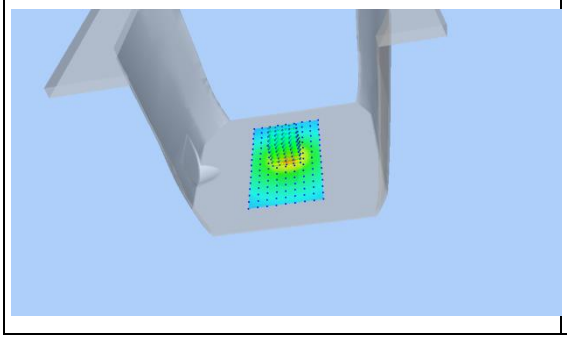	

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
5G NR SA2 Mid-Body-Edge3(Bottom)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA2; Duty Cycle:1:1; Conv.F=2.29; Frequency:1880MHz; Medium parameters used: f = 1900 MHz; σ= 1.39 mho/m; εr =40.92; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA2 Mid-Body-Edge3(Bottom)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA2 Mid-Body-Edge3(Bottom)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge3(Bottom)
Band	5G NR SA2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
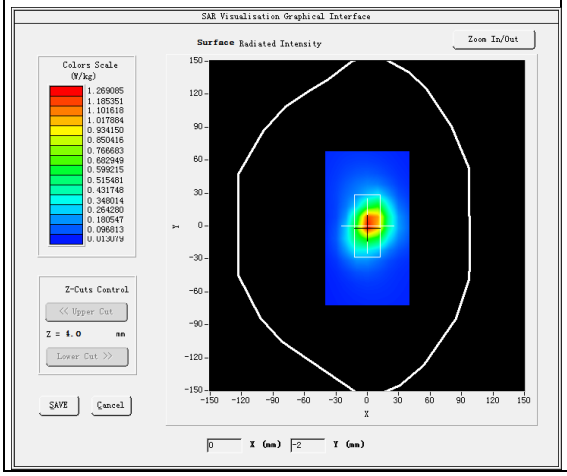	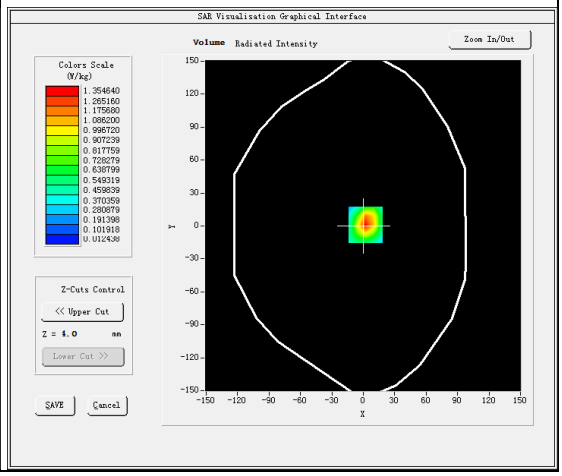

Maximum location: X=2.00, Y=1.00
SAR Peak: 2.23 W/kg

SAR 10g (W/Kg)	0.600695
SAR 1g (W/Kg)	1.260992

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.2163	1.3546	0.7030	0.3674	0.1964	0.1053	0.0558

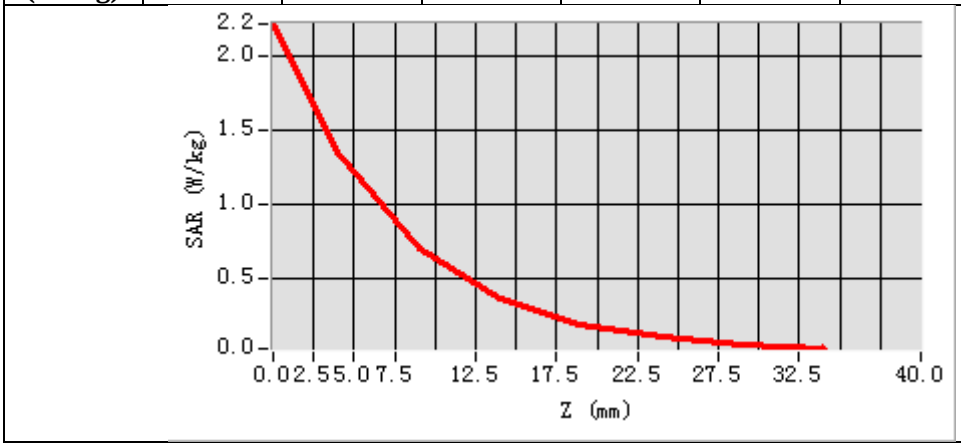

3D screen shot	Hot spot position
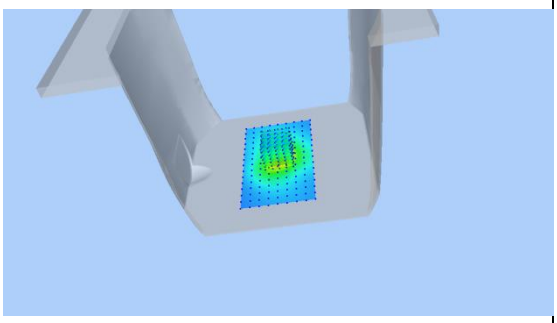	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
5G NR SA5 Mid-Body-Edge 2(Right)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA5; Duty Cycle:1:1; Conv.F=2.20
Frequency:836.5 MHz; Medium parameters used: f = 835 MHz; σ=0.93mho/m; εr =41.30; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA5 Mid-Body-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA5 Mid-Body-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	5G NR SA5
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
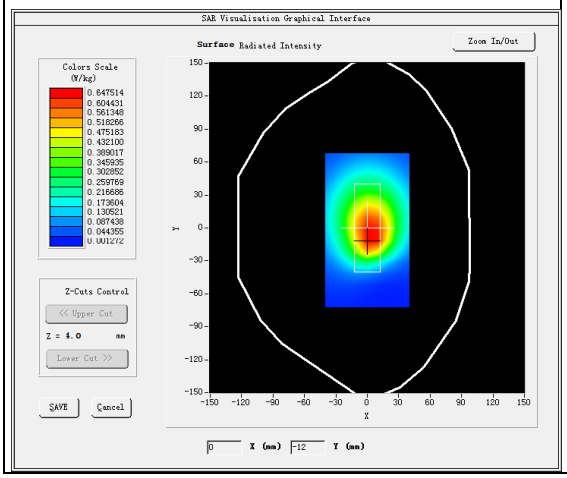	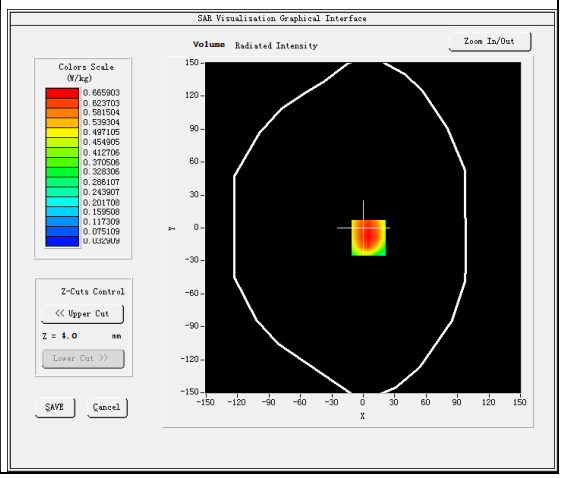

Maximum location: X=5.00, Y=-9.00
SAR Peak: 0.92 W/kg

SAR 10g (W/Kg)	0.422400
SAR 1g (W/Kg)	0.643036

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.8793	0.6659	0.4627	0.3146	0.2140	0.1468	0.1014

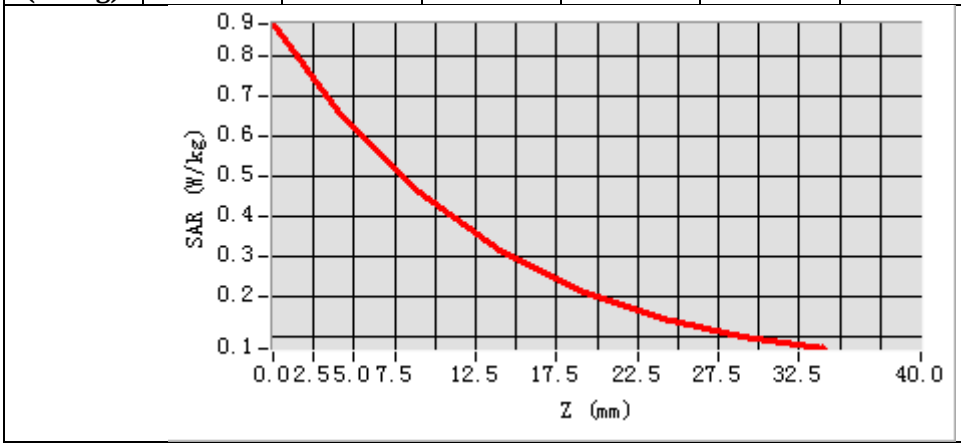

3D screen shot	Hot spot position
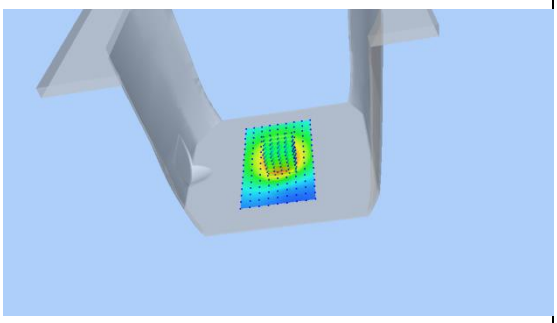	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
5G NR SA12 Mid-Body- Edge 3(Bottom)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA12; Duty Cycle:1:1; Conv.F=2.28; Frequency: 707.5 MHz; Medium parameters used: f = 750 MHz; σ=0.87 mho/m; εr =42.36; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA12 Mid-Body- Edge 3(Bottom) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA12 Mid-Body- Edge 3(Bottom) /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	5G NR SA12
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
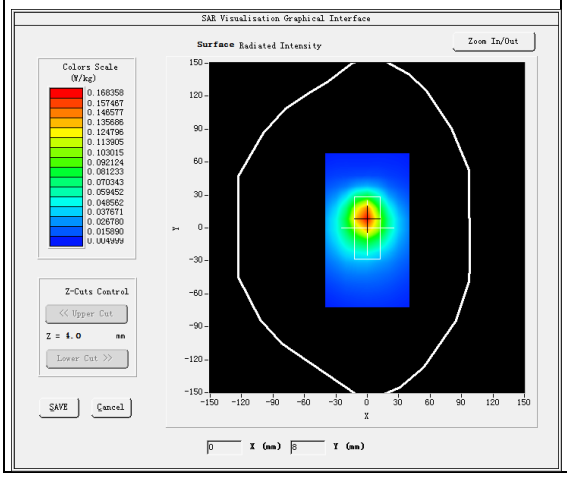	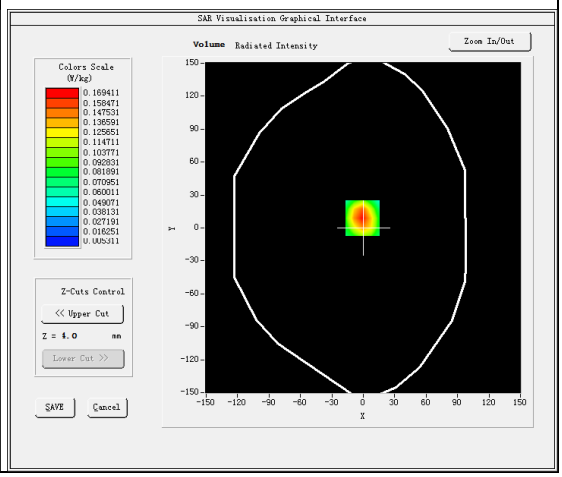

Maximum location: X=-1.00, Y=9.00
SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.092482
SAR 1g (W/Kg)	0.164728

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.2638	0.1694	0.0978	0.0614	0.0393	0.0264	0.0172

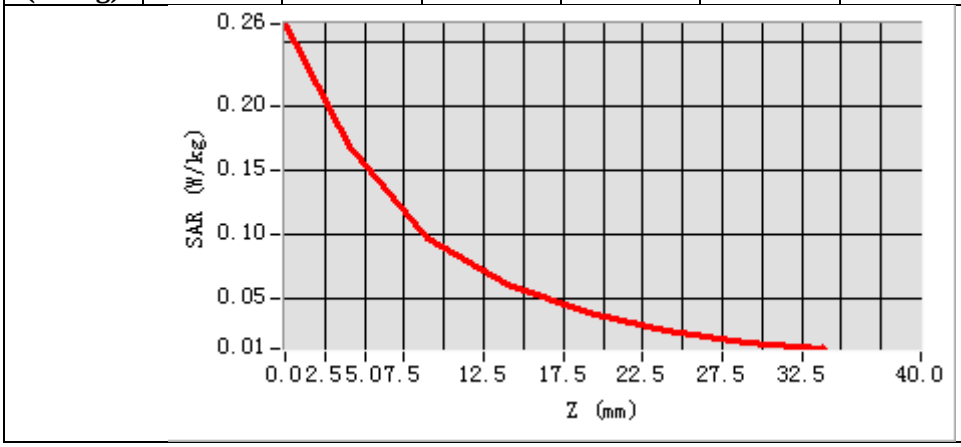

3D screen shot	Hot spot position
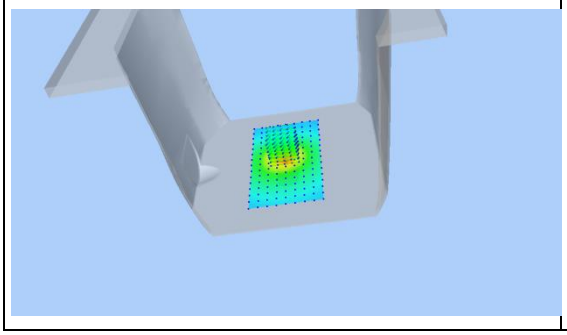	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
5G NR SA13 Mid-Body- Edge 2(Right)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA13; Duty Cycle:1:1; Conv.F=2.28; Frequency: 782 MHz; Medium parameters used: f = 750 MHz; σ=0.90 mho/m; εr =41.66; ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA13 Mid-Body- Edge 2(Right) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA13 Mid-Body- Edge 2(Right) /Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	5G NR SA13
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
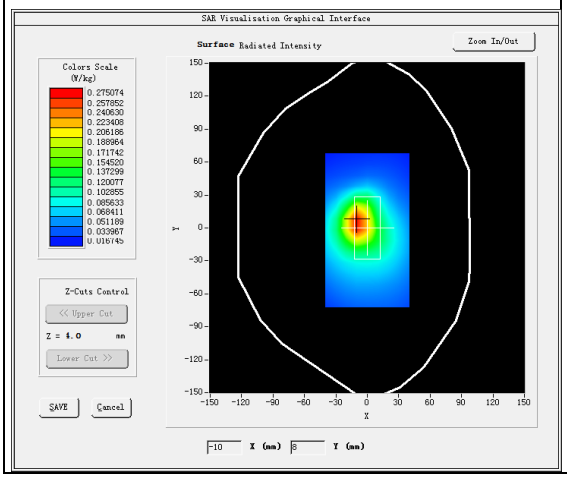	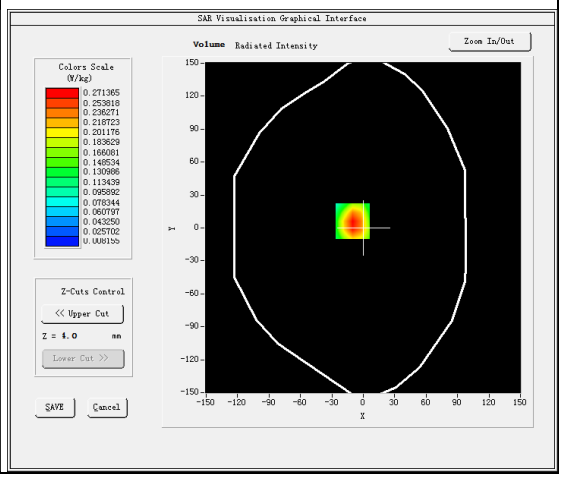

Maximum location: X=-10.00, Y=6.00
SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.151720
SAR 1g (W/Kg)	0.260185

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.4008	0.2714	0.1655	0.1043	0.0657	0.0427	0.0274

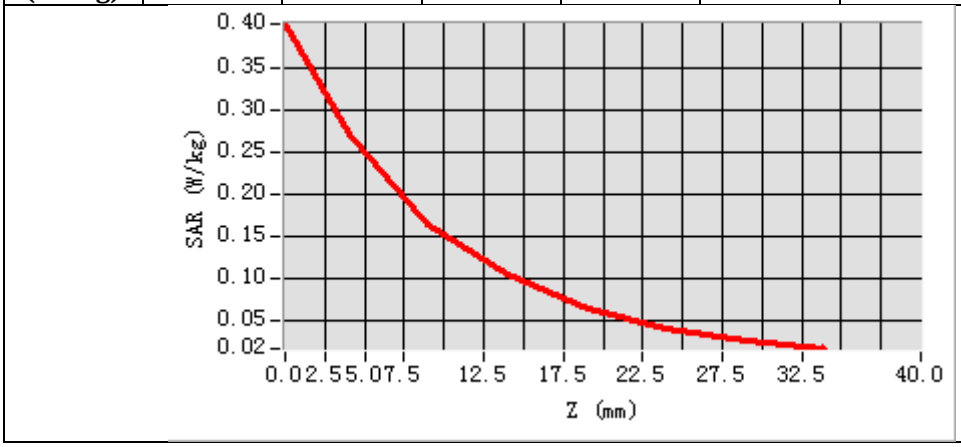

3D screen shot	Hot spot position
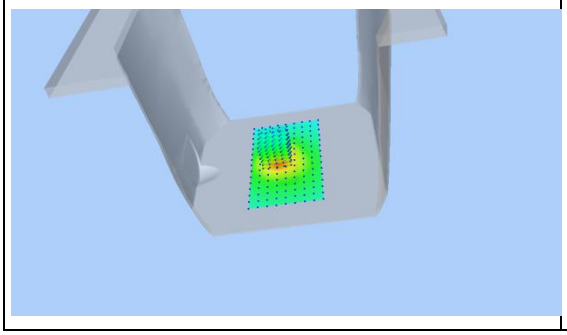	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
5G NR SA14 Mid-Body- Edge 2(Right)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA14; Duty Cycle:1:1; Conv.F=2.28; Frequency: 793 MHz; Medium parameters used: f = 750 MHz; σ=0.91 mho/m; εr =41.32;ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA14 Mid-Body-Back/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA14 Mid-Body-Back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	5G NR SA14
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
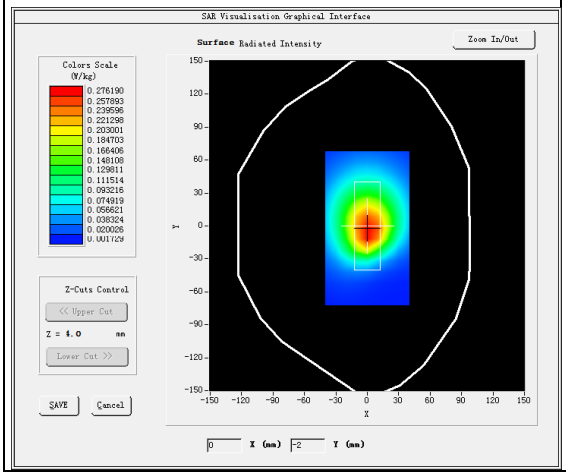	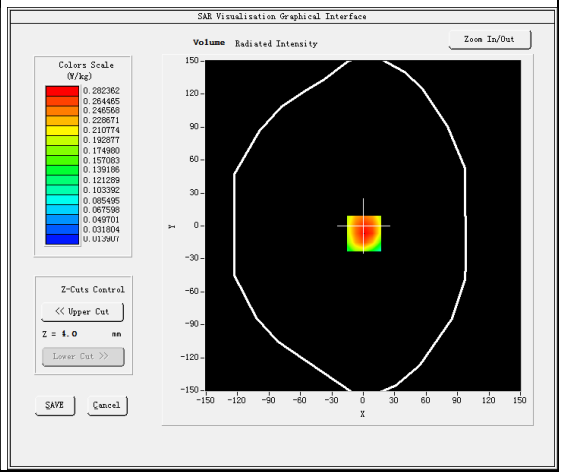

Maximum location: X=1.00, Y=-7.00
SAR Peak: 0.39 W/kg

SAR 10g (W/Kg)	0.177206
SAR 1g (W/Kg)	0.272341

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3789	0.2824	0.1938	0.1346	0.0923	0.0629	0.0448

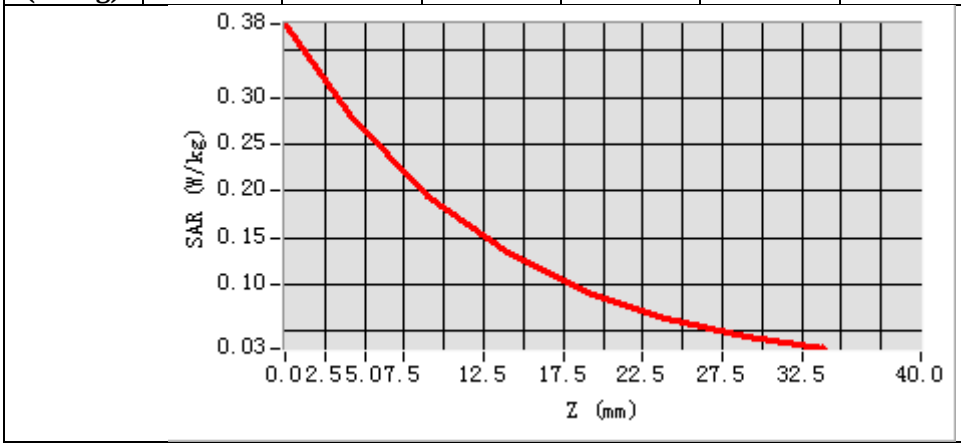

3D screen shot	Hot spot position
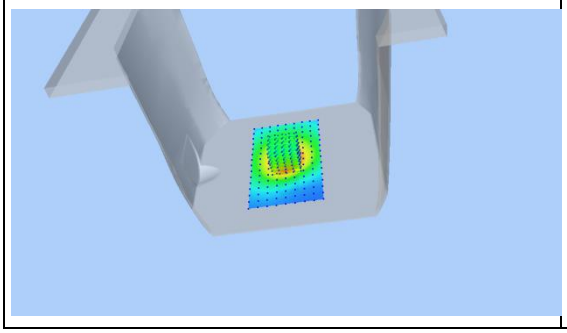	

Test Laboratory: AGC Lab **Date: Jul. 15, 2026**
5G NR SA41 Mid-Body- Edge 3(Bottom) (1RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA41; Duty Cycle:1:1.58; Conv.F=2.21
Frequency: 2592.99MHz; Medium parameters used: f =2600 MHz; σ=1.91 mho/m; εr =39.02; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR BAND 41 Mid-Body- Edge 3(Bottom) /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ 5G NR BAND 41 Mid-Body- Edge 3(Bottom) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	5G NR BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

SURFACE SAR	VOLUME SAR
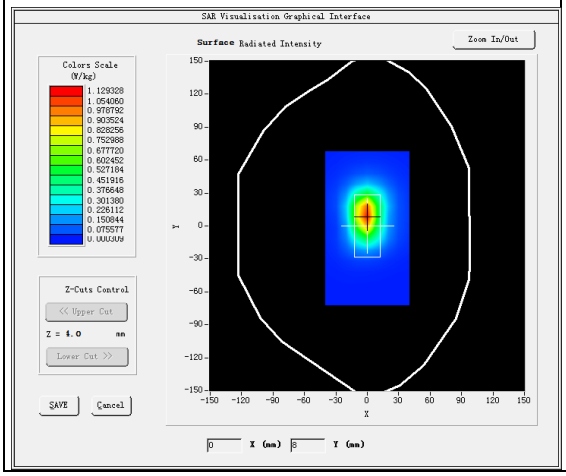	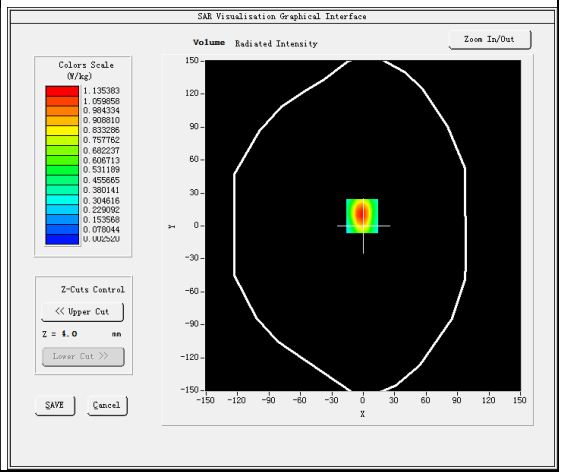

Maximum location: X=-1.00, Y=9.00
SAR Peak: 2.02 W/kg

SAR 10g (W/Kg)	0.478266
SAR 1g (W/Kg)	1.062411

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.0340	1.1354	0.4986	0.2215	0.0973	0.0433	0.0196

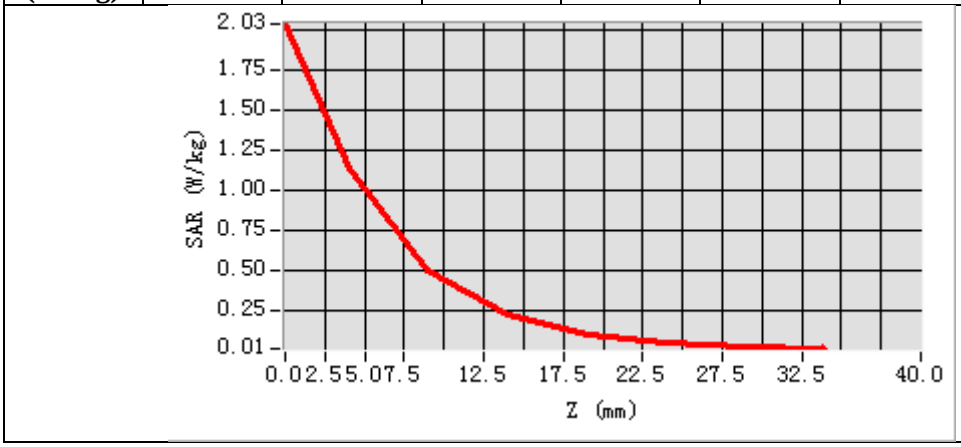

3D screen shot	Hot spot position
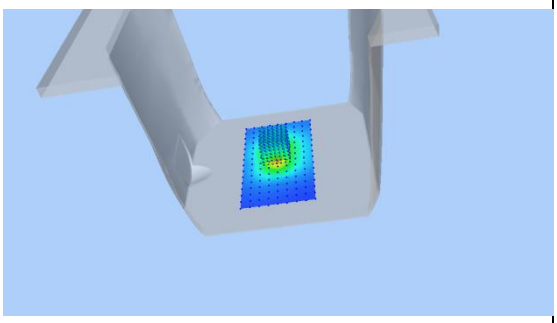	

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
5G NR SA66 Mid-Body-Edge 2(Right)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA66; Duty Cycle:1:1; Conv.F=2.29; Frequency:1745 MHz; Medium parameters used: f = 1750 MHz; σ=1.33 mho/m; εr =39.16; ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA66 Mid-Body-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA66 Mid-Body-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	5G NR SA66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
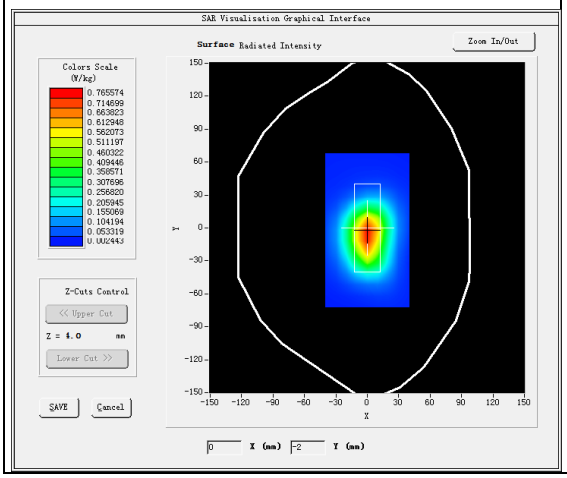	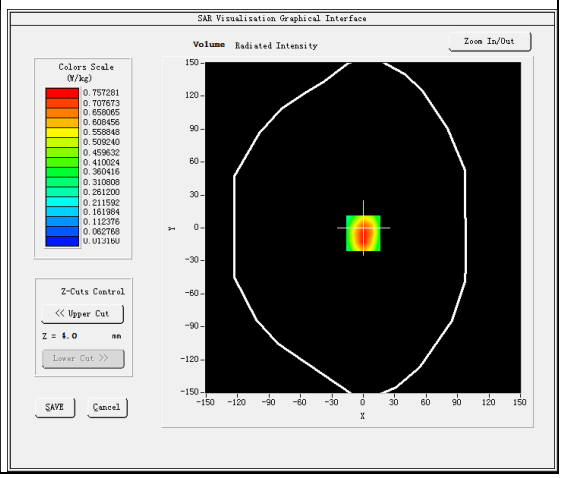

Maximum location: X=0.00, Y=-5.00
SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.407144
SAR 1g (W/Kg)	0.727006

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.2072	0.7573	0.4200	0.2575	0.1650	0.0912	0.0623

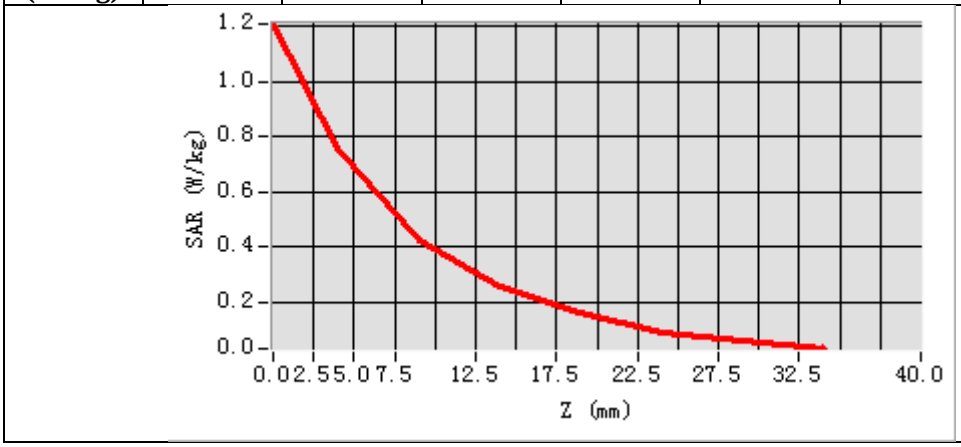

3D screen shot	Hot spot position
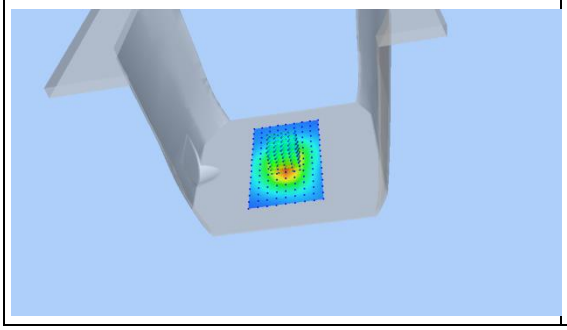	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
5G NR SA71 Mid-Body- Edge 3(Bottom)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA71; Duty Cycle:1:1; Conv.F=1.94; Frequency: 680.5 MHz; Medium parameters used: f = 750 MHz; σ=0.86 mho/m; εr =42.79; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA71 Mid-Body-Edge 3(Bottom)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA71 Mid-Body-Edge 3(Bottom)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	5G NR SA 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
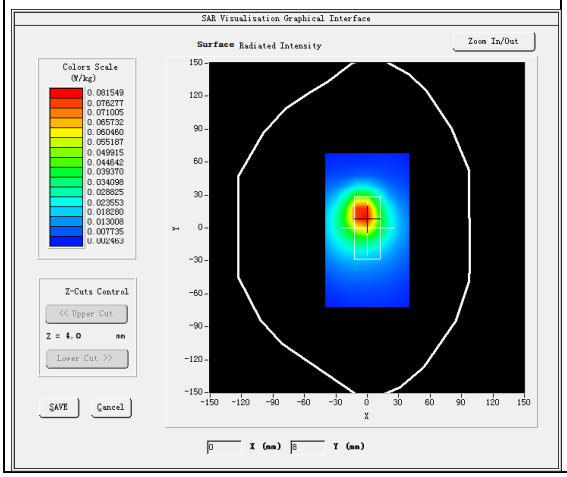	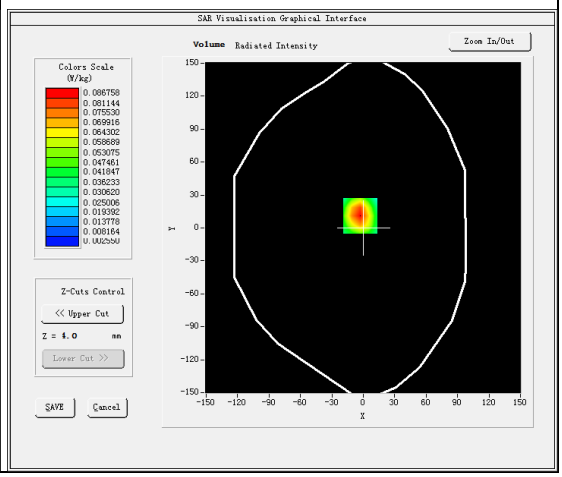

Maximum location: X=-3.00, Y=11.00
SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.047492
SAR 1g (W/Kg)	0.085680

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.1336	0.0868	0.0504	0.0308	0.0197	0.0133	0.0090

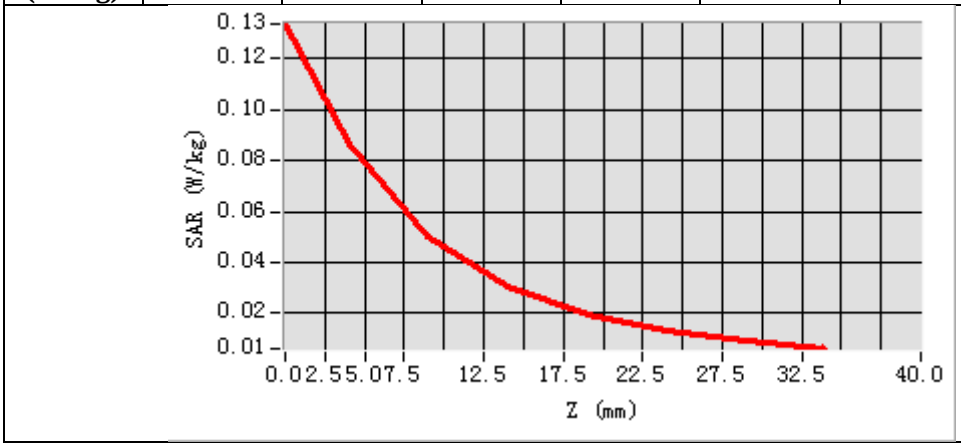

3D screen shot	Hot spot position
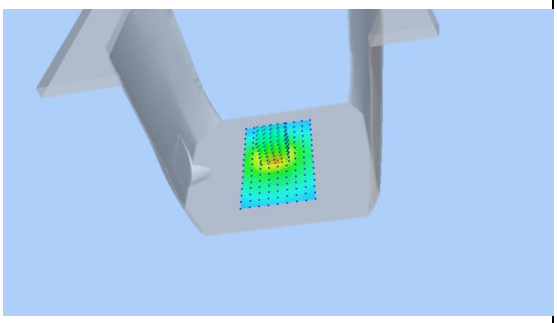	

WIFI MODE

Test Laboratory: AGC Lab **Date: Jul. 15, 2026**
802.11b Mid-Body-Worn- Edge 4(Left)
DUT: Body Worn Camera; Type: R2 5G

Communication System: Wi-Fi; Communication System Band: 802.11b; Duty Cycle: 1:1; Conv.F=2.38; Frequency: 2437 MHz; Medium parameters used: f = 2450 MHz; σ =1.80mho/m; εr =39.01; ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/802.11b Mid- Body- Edge 4(Left) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11b Mid- Body- Edge 4(Left) /Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 4(Left)
Band	2450MHz
Channels	Middle
Signal	Crest factor: 1.0

SURFACE SAR	VOLUME SAR
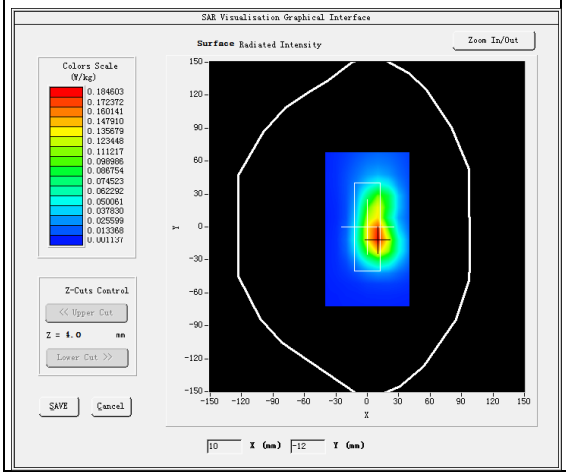	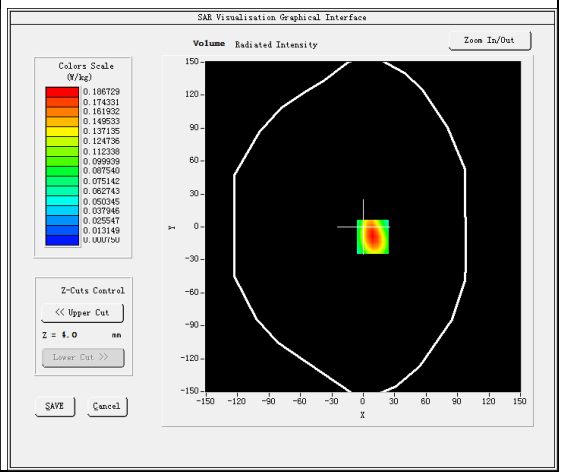

Maximum location: X=9.00, Y=-9.00
SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.087358
SAR 1g (W/Kg)	0.175168

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.3145	0.1867	0.0917	0.0456	0.0223	0.0101	0.0049

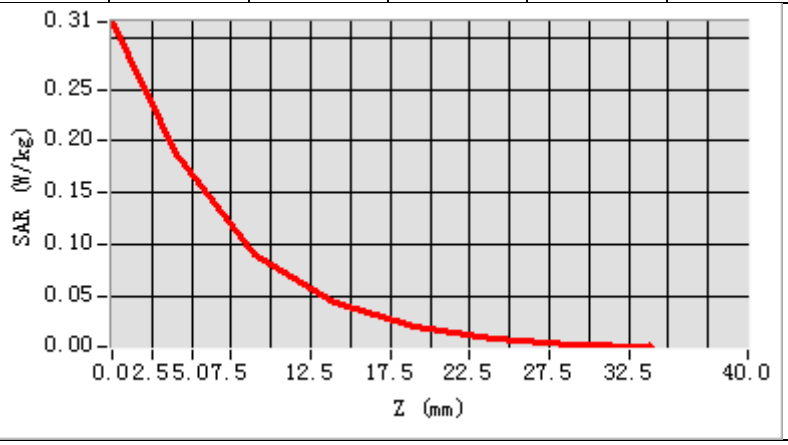

3D screen shot	Hot spot position
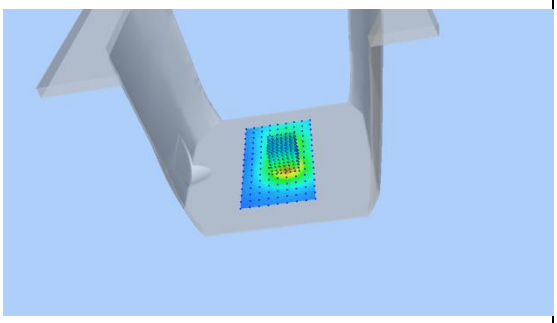	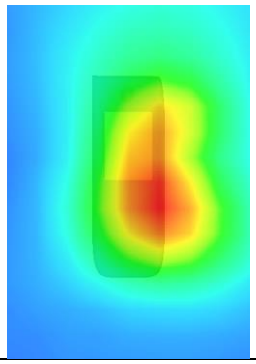

5.2GHz 802.11a
Test Laboratory: AGC Lab **Date: Jul. 11, 2026**
802.11a CH40-Front
DUT: Body Worn Camera; Type: R2 5G

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=2.35; Frequency: 5200MHz; Medium parameters used: f = 5250 MHz; σ= 4.58mho/m; εr =35.32; ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH40- Front /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11a CH40- Front /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Front
Band	5200MHz
Channels	CH40
Signal	Crest factor: 1.0

SURFACE SAR	VOLUME SAR
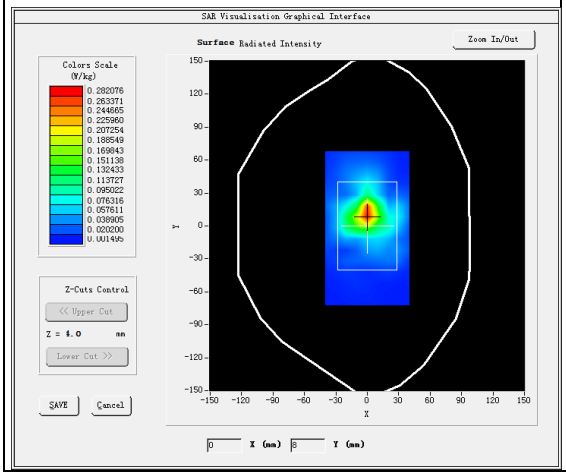	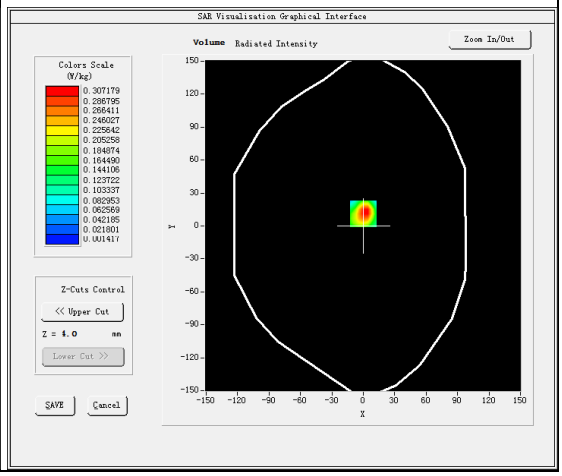

Maximum location: X=0.00, Y=11.00
SAR Peak: 0.82 W/kg

SAR 10g (W/Kg)	0.106087
SAR 1g (W/Kg)	0.305196

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.7962	0.3072	0.1695	0.0875	0.0463	0.0252	0.0128	0.0071	0.0042	0.0027	0.0018	0.0018

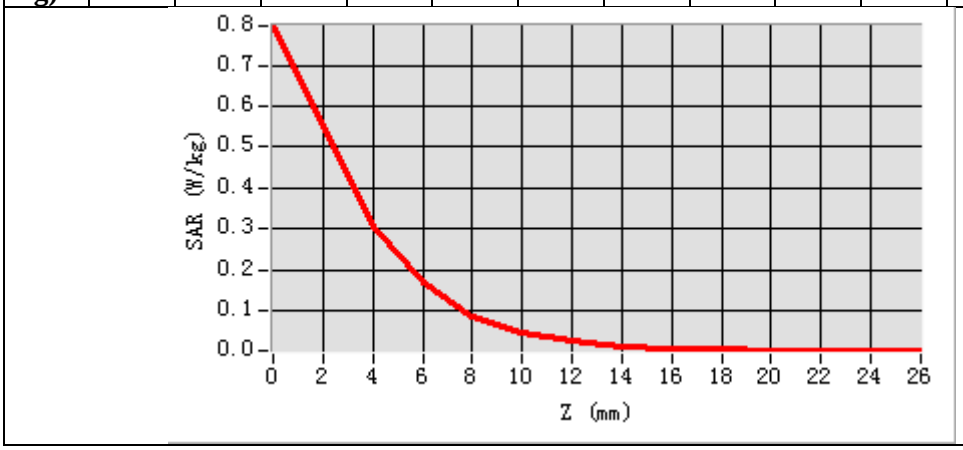

3D screen shot	Hot spot position
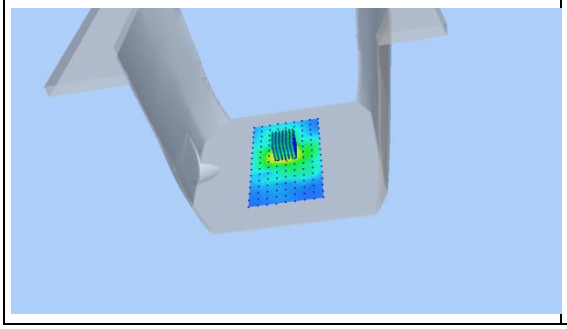	

5.3GHz 802.11a
Test Laboratory: AGC Lab **Date: Jul. 11, 2026**
802.11a CH60-Edge 4(Left)
DUT: Body Worn Camera; Type: R2 5G

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.64; Frequency: 5300MHz; Medium parameters used: f = 5250 MHz; σ= 4.67mho/m; εr =36.19; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH60- Edge 4(Left) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11a CH60- Edge 4(Left) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Edge 4(Left)
Band	5300MHz
Channels	CH60
Signal	Crest factor: 1.0

SURFACE SAR	VOLUME SAR
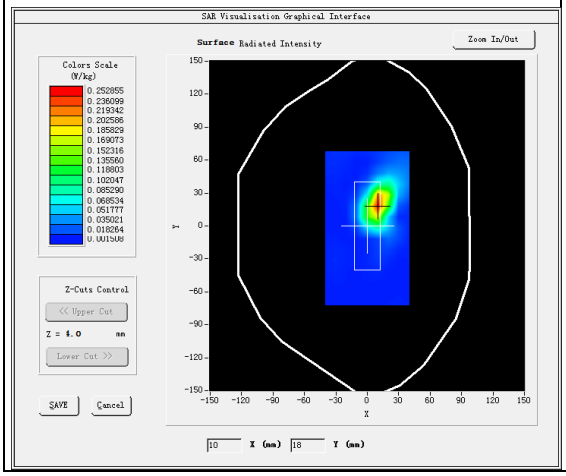	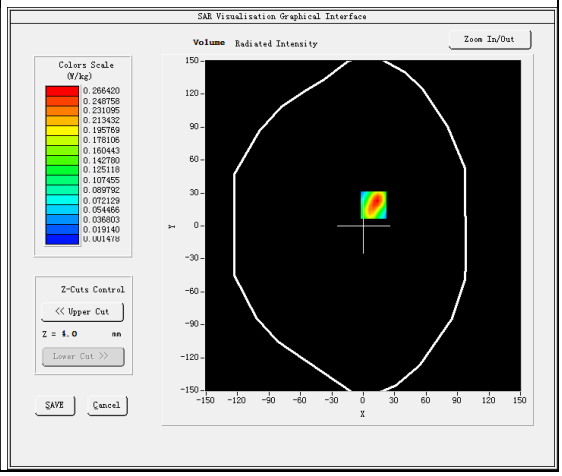

Maximum location: X=10.00, Y=19.00
SAR Peak: 0.71 W/kg

SAR 10g (W/Kg)	0.091973
SAR 1g (W/Kg)	0.255676

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.7380	0.2664	0.1210	0.0703	0.0334	0.0177	0.0095	0.0050	0.0030	0.0018	0.0018	0.0017

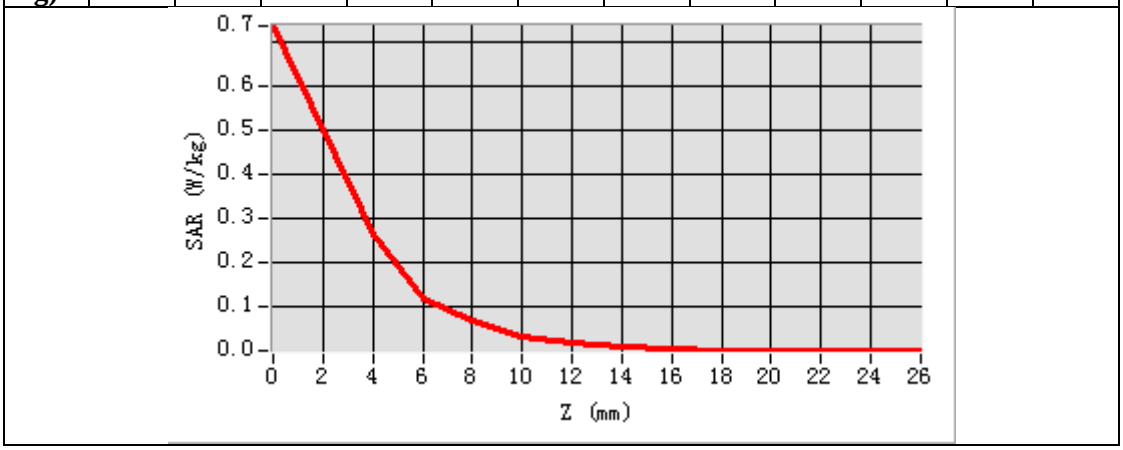

3D screen shot	Hot spot position
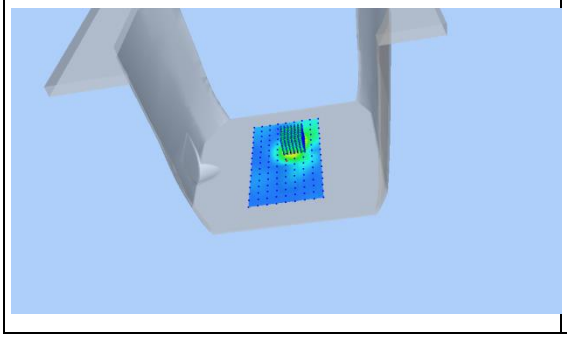	

5.6GHz 802.11a
Test Laboratory: AGC Lab **Date: Jul. 12, 2026**
802.11a CH116-Edge 4(Left)
DUT: Body Worn Camera; Type: R2 5G

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.50; Frequency: 5580MHz; Medium parameters used: f = 5600 MHz; σ= 5.01mho/m; εr =35.69; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/802.11a CH116-Edge 4(Left) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/802.11a CH116-Edge 4(Left) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Edge 4(Left)
Band	5600MHz
Channels	CH116
Signal	Crest factor: 1.0

SURFACE SAR	VOLUME SAR
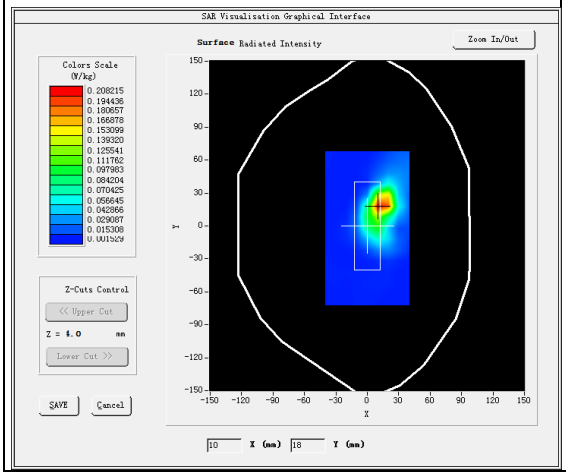	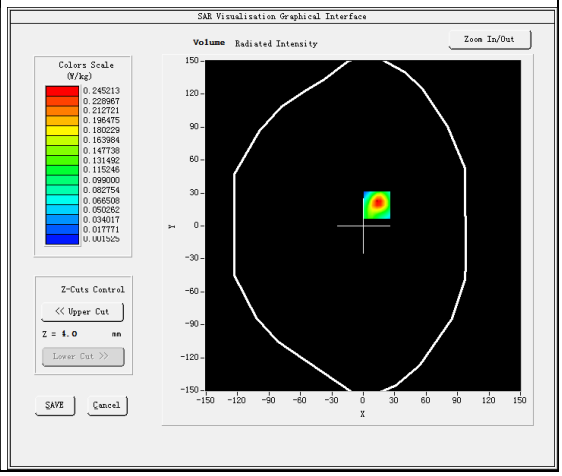

Maximum location: X=13.00, Y=19.00
SAR Peak: 0.69 W/kg

SAR 10g (W/Kg)	0.079843
SAR 1g (W/Kg)	0.241310

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.7278	0.2452	0.0921	0.0562	0.0216	0.0122	0.0055	0.0035	0.0019	0.0019	0.0018	0.0018

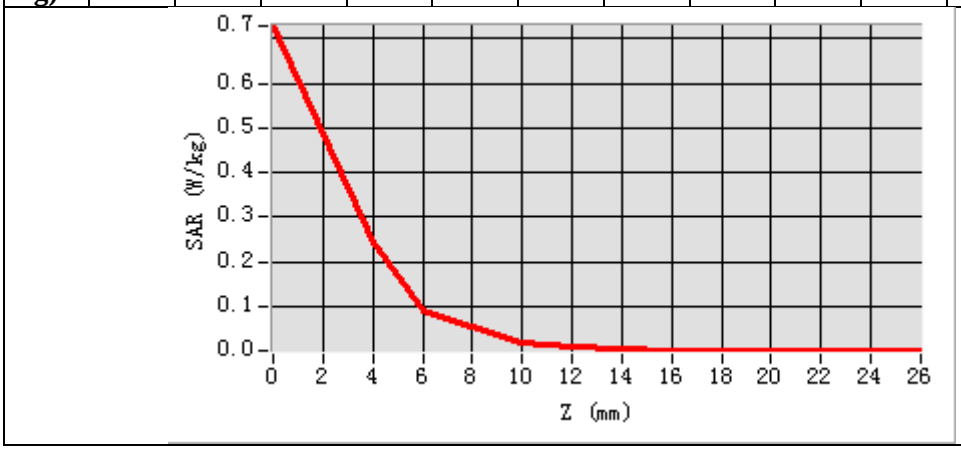

3D screen shot	Hot spot position
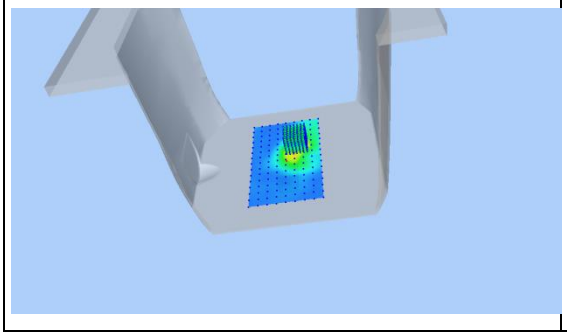	

5.8GHz 802.11a
Test Laboratory: AGC Lab **Date: Jul. 12, 2026**
802.11a CH157-Edge 4 (Left)
DUT: Body Worn Camera; Type: R2 5G

Communication System: Wi-Fi; Communication System Band: 802.11a; Duty Cycle: 1:1; Conv.F=1.49; Frequency: 5785MHz; Medium parameters used: f = 5750 MHz; σ= 5.29mho/m; εr =36.88; ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 802.11a CH157- Edge 4 (Left) /Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 802.11a CH157- Edge 4 (Left) /Zoom Scan: Measurement grid: dx=4mm,dy=4mm, dz=2mm

Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	7x7x12 dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Edge 4 (Left)
Band	5800MHz
Channels	Middle
Signal	Crest factor: 1.0

SURFACE SAR	VOLUME SAR
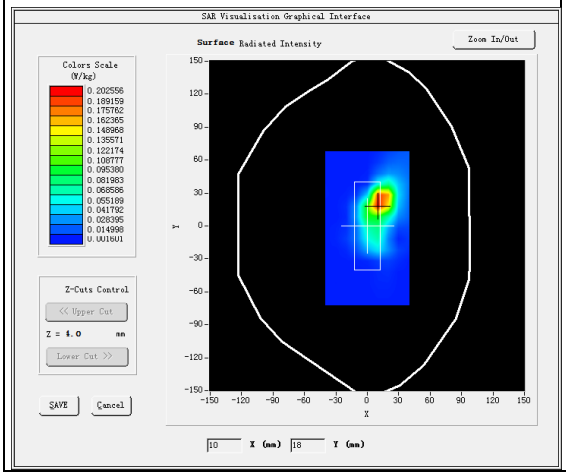	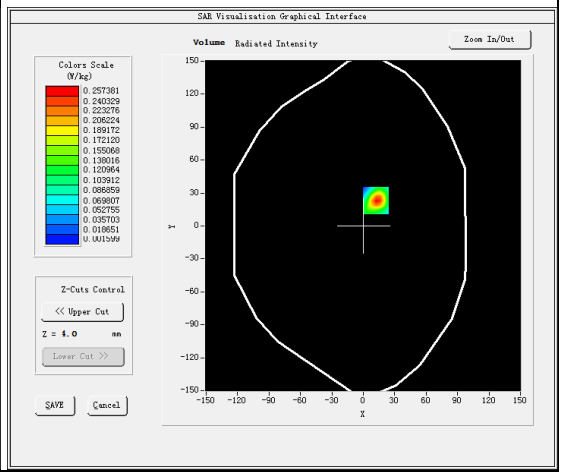

Maximum location: X=12.00, Y=23.00
SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.080548
SAR 1g (W/Kg)	0.249011

Z (mm)	0.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.7330	0.2574	0.1206	0.0580	0.0263	0.0120	0.0049	0.0030	0.0019	0.0020	0.0019	0.0019

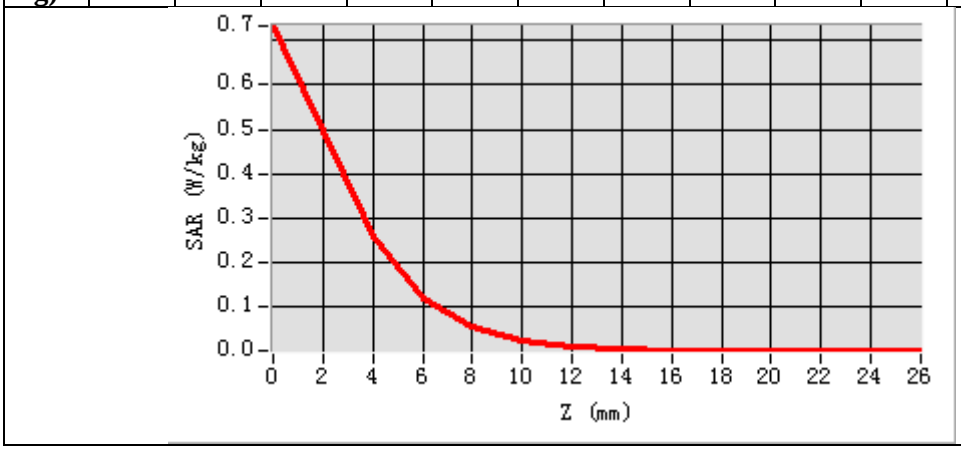

3D screen shot	Hot spot position
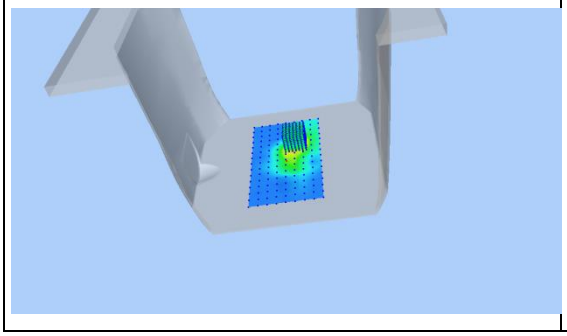	

Repeated SAR
Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
LTE Band 2 Low-Body-Front (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 2; Duty Cycle:1:1; Conv.F=2.29; Frequency:1860MHz; Medium parameters used: f = 1900 MHz; σ= 1.37 mho/m; εr =41.23; ρ= 1000 kg/m³ ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 2 Low-Body-Front/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 2 Low-Body-Front/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Front
Band	LTE Band 2
Channels	Low
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
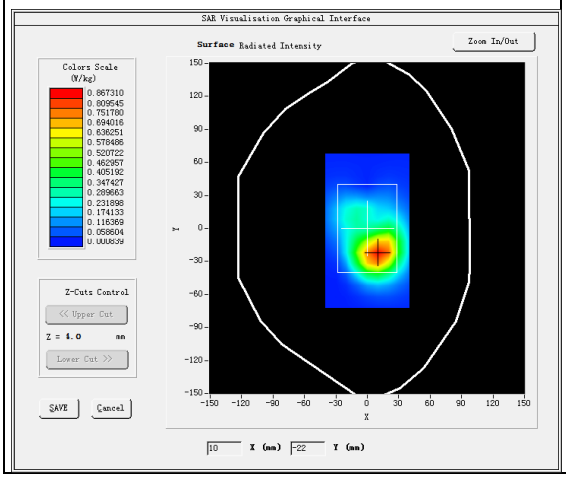	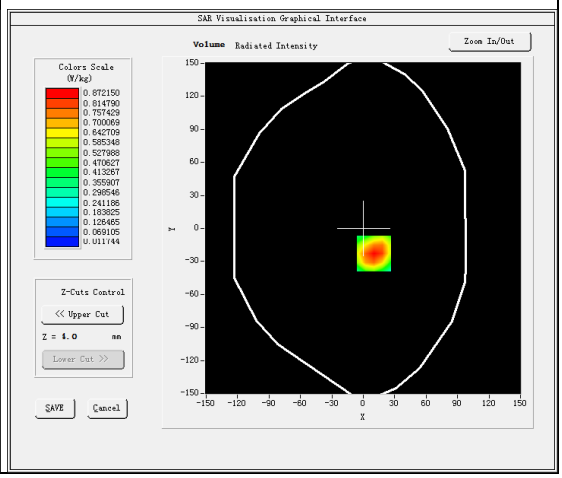

Maximum location: X=10.00, Y=-23.00
SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.449632
SAR 1g (W/Kg)	0.937189

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.3905	0.8721	0.4751	0.2643	0.1494	0.0855	0.0464

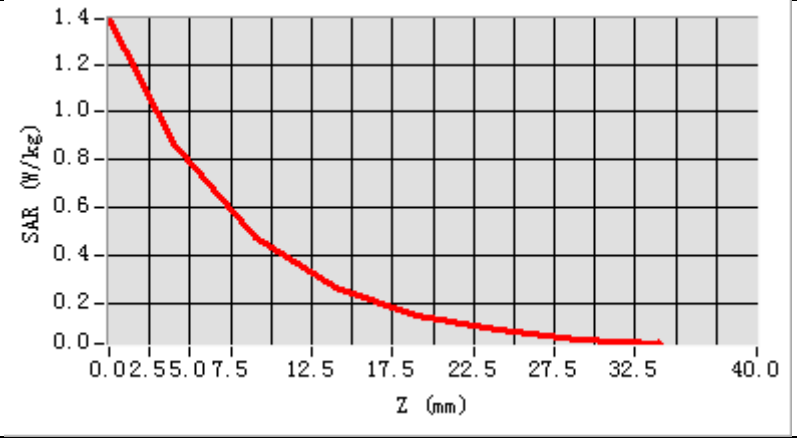

3D screen shot	Hot spot position
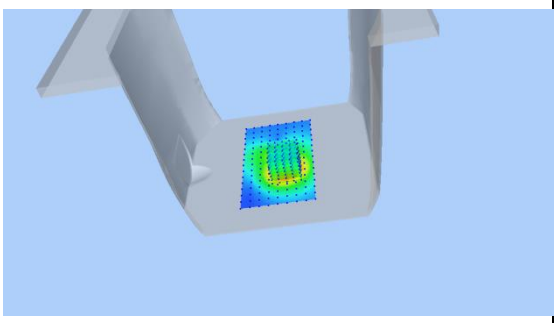	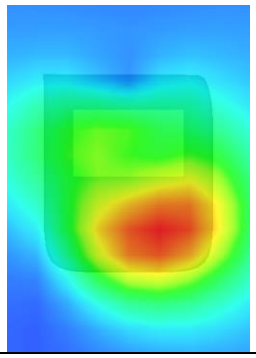

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
LTE Band 4 Mid-Body- Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 4; Duty Cycle:1:1; Conv.F=2.29; Frequency:1732.5 MHz; Medium parameters used: f = 1750 MHz; σ= 1.32 mho/m; εr =39.71; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 4 Mid-Body- Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 4 Mid-Body- Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 4
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
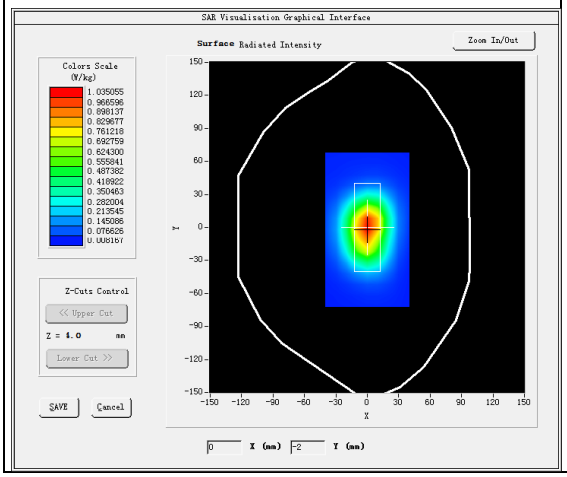	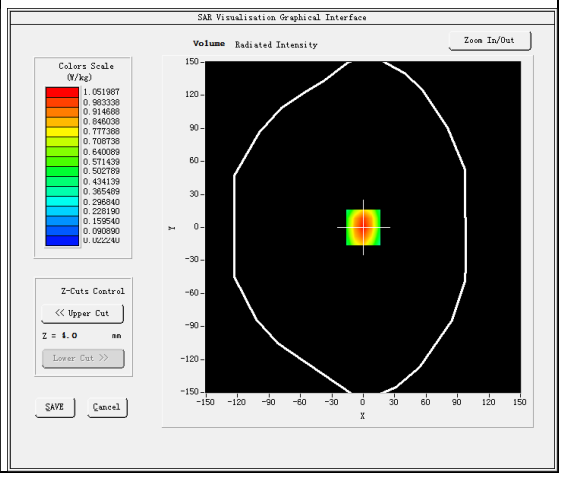

Maximum location: X=0.00, Y=0.00
SAR Peak: 1.47 W/kg

SAR 10g (W/Kg)	0.583480
SAR 1g (W/Kg)	0.991029

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.4665	1.0520	0.6769	0.4282	0.2665	0.1567	0.1011

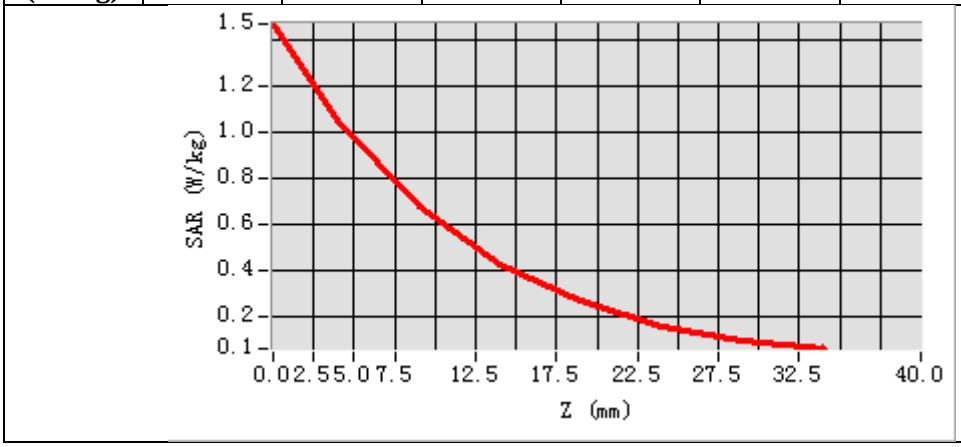

3D screen shot	Hot spot position
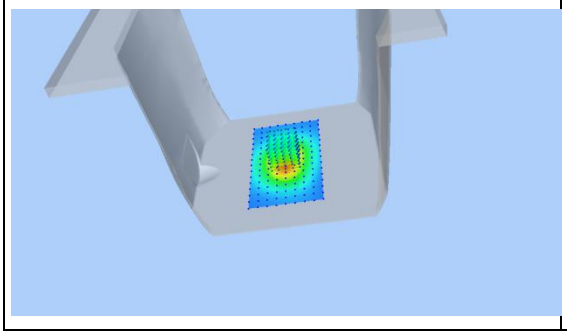	

Test Laboratory: AGC Lab **Date: Jul. 13, 2026**
LTE Band 5 Low-Body-Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 5; Duty Cycle:1:1; Conv.F=2.20
Frequency:829 MHz; Medium parameters used: f = 835 MHz; σ=0.91mho/m; εr =42.05; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 5 Low-Body-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 5 Low-Body-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 5
Channels	Low
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
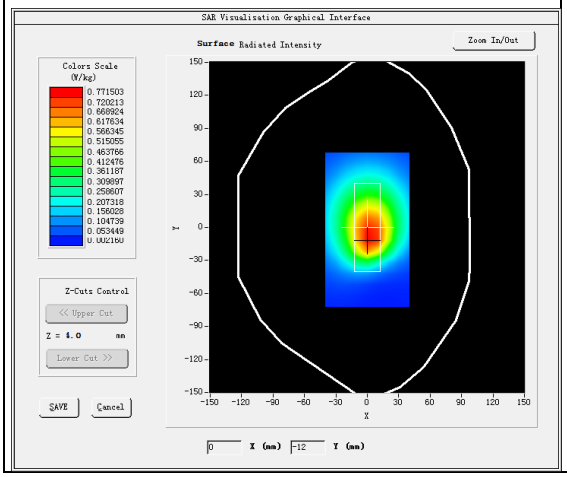	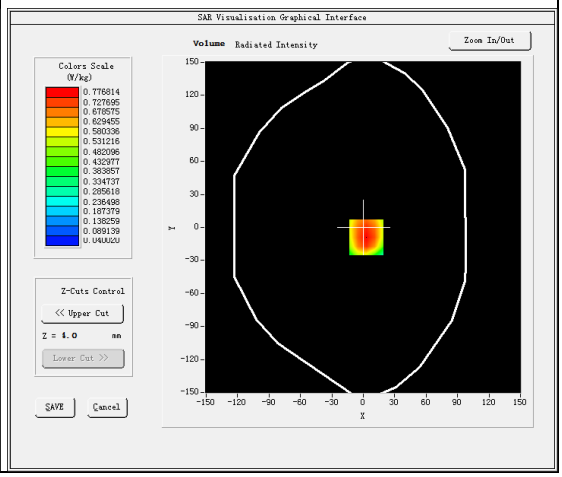

Maximum location: X=3.00, Y=-9.00
SAR Peak: 1.08 W/kg

SAR 10g (W/Kg)	0.488195
SAR 1g (W/Kg)	0.748827

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.0215	0.7768	0.5422	0.3667	0.2499	0.1718	0.1170

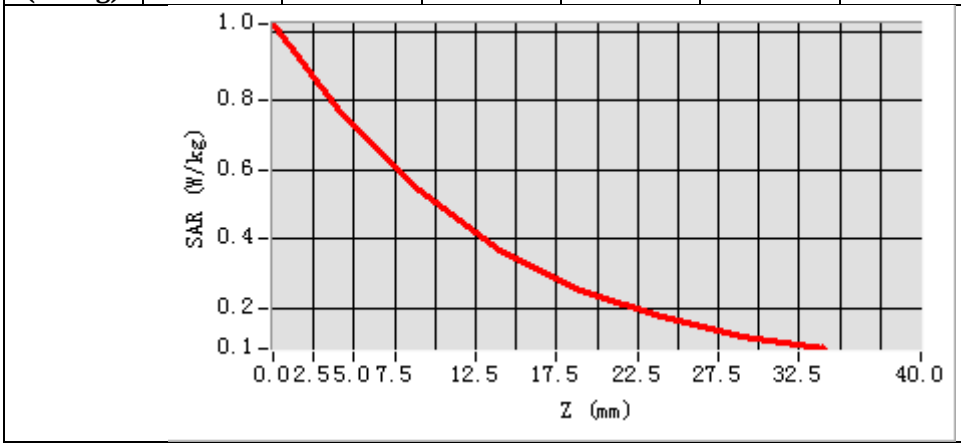

3D screen shot	Hot spot position
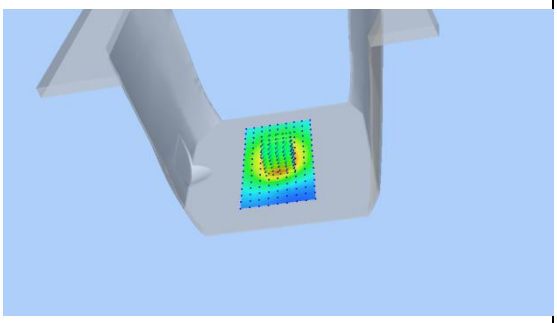	

Test Laboratory: AGC Lab **Date: Jul. 15, 2026**
LTE Band 41 Mid-Body- Edge 3(Bottom) (1RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 41; Duty Cycle:1:1.58; Conv.F=2.21
Frequency: 2593MHz; Medium parameters used: f =2600 MHz; σ=1.91 mho/m; εr =39.02; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE BAND 41 Mid-Body- Edge 3(Bottom) /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ LTE BAND 41 Mid-Body- Edge 3(Bottom) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	LTE BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

SURFACE SAR	VOLUME SAR
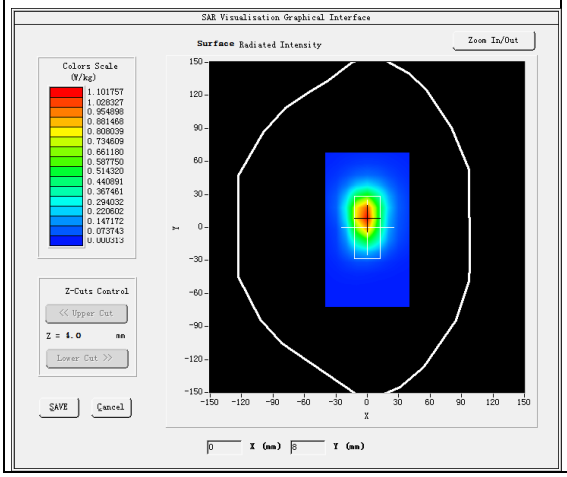	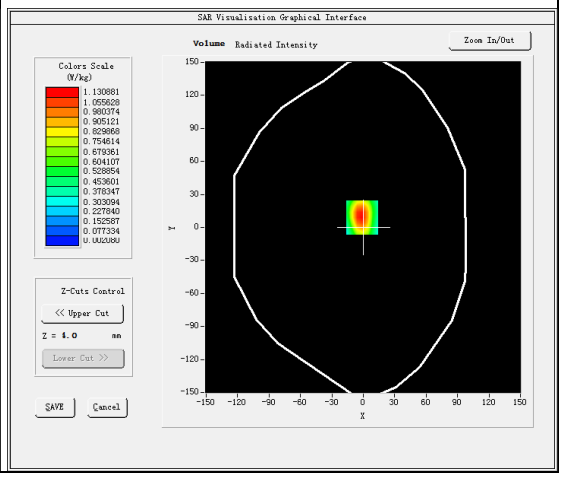

Maximum location: X=-1.00, Y=9.00
SAR Peak: 1.94 W/kg

SAR 10g (W/Kg)	0.501995
SAR 1g (W/Kg)	1.066638

Z (mm)	**0.00**	**4.00**	**9.00**	**14.00**	**19.00**	**24.00**	**29.00**

SAR (W/Kg)	1.9361	1.1309	0.5365	0.2506	0.1137	0.0516	0.0223

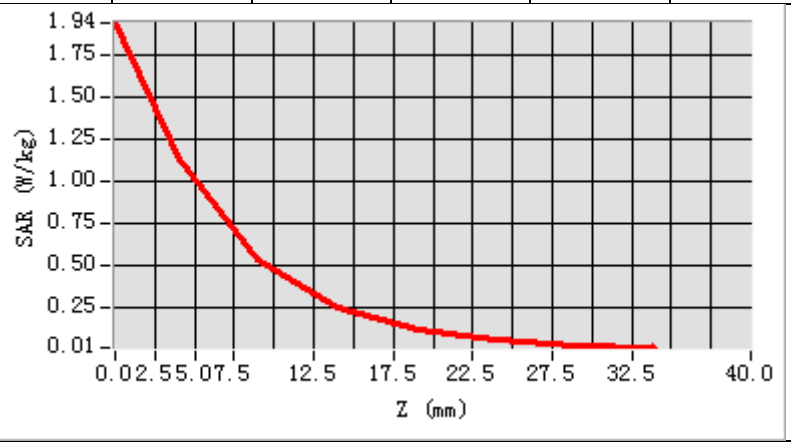

3D screen shot	Hot spot position
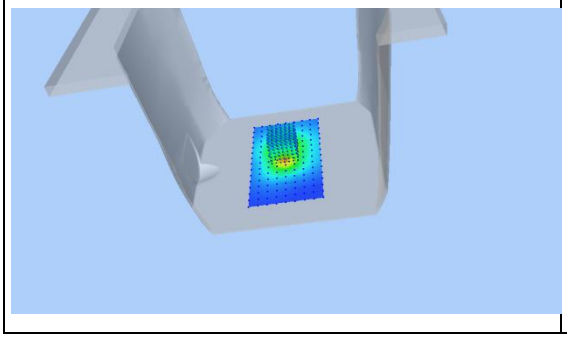	

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
LTE Band 66 Mid-Body-Edge 2(Right) (1 RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=2.29; Frequency:1745 MHz; Medium parameters used: f = 1750 MHz; σ=1.33 mho/m; εr =39.16; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ LTE Band 66 Mid-Body-Edge 2(Right)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ LTE Band 66 Mid-Body-Edge 2(Right)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 2(Right)
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
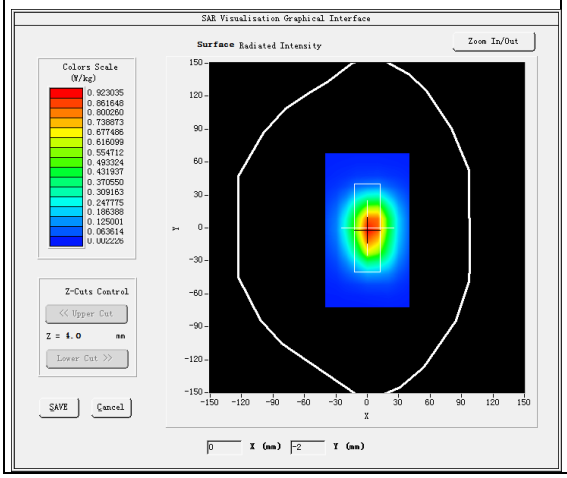	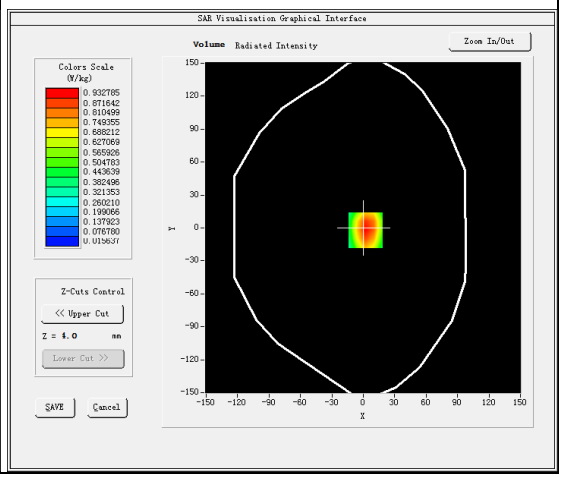

Maximum location: X=2.00, Y=-2.00
SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.510014
SAR 1g (W/Kg)	0.890946

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.3760	0.9328	0.5667	0.3408	0.2126	0.1287	0.0774

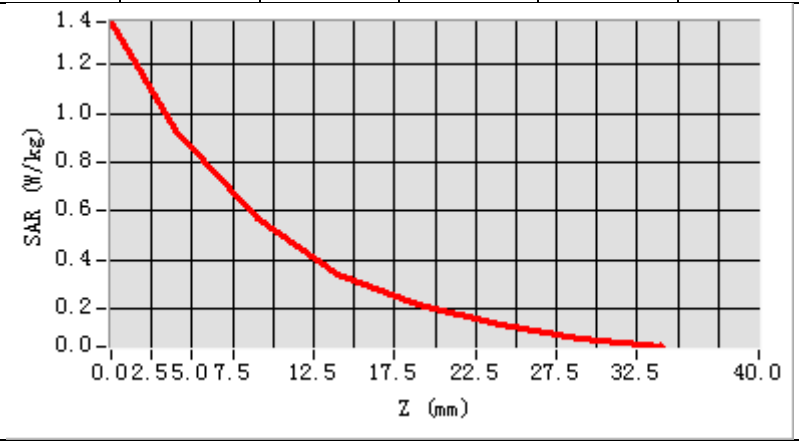

3D screen shot	Hot spot position
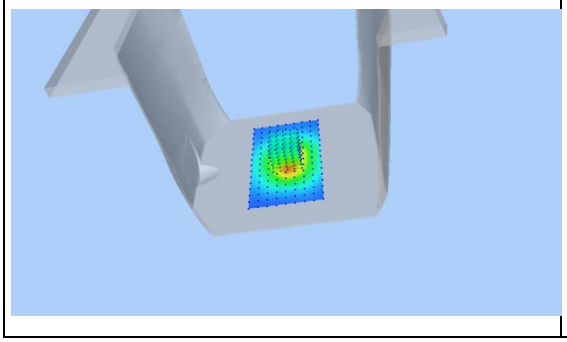	

Test Laboratory: AGC Lab **Date: Jul. 14, 2026**
5G NR SA2 Mid-Body-Edge3(Bottom)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA2; Duty Cycle:1:1; Conv.F=2.29; Frequency:1880MHz; Medium parameters used: f = 1900 MHz; σ= 1.39 mho/m; εr =40.92; ρ= 1000 kg/m^3 ; Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR SA2 Mid-Body-Edge3(Bottom)/Area Scan: Measurement grid: dx=8mm, dy=8mm
Configuration/ 5G NR SA2 Mid-Body-Edge3(Bottom)/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	surf_sam_plan.txt, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge3(Bottom)
Band	5G NR SA2
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

SURFACE SAR	VOLUME SAR
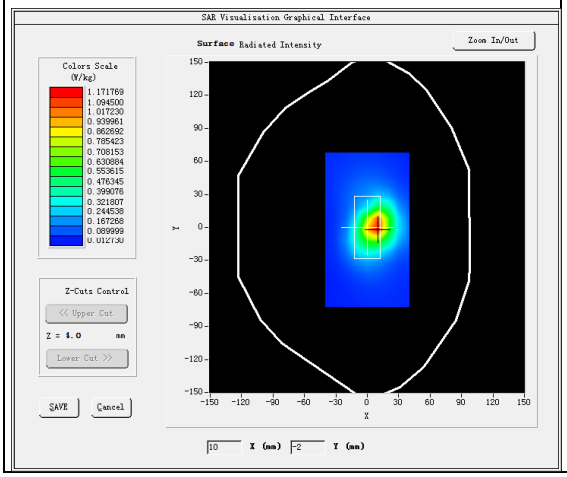	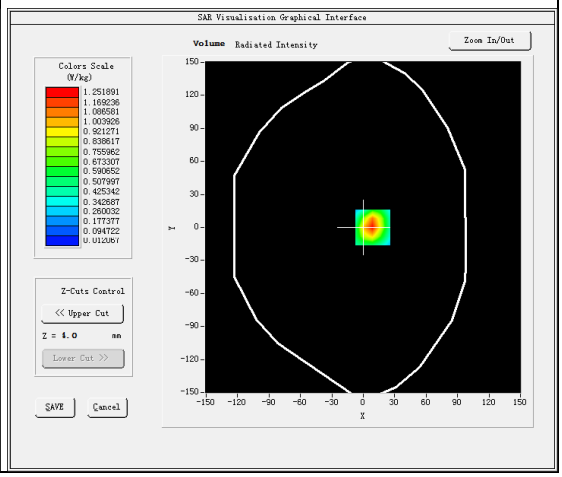

Maximum location: X=9.00, Y=0.00
SAR Peak: 2.05 W/kg

SAR 10g (W/Kg)	0.559138
SAR 1g (W/Kg)	1.165006

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.0285	1.2519	0.6566	0.3451	0.1849	0.0970	0.0544

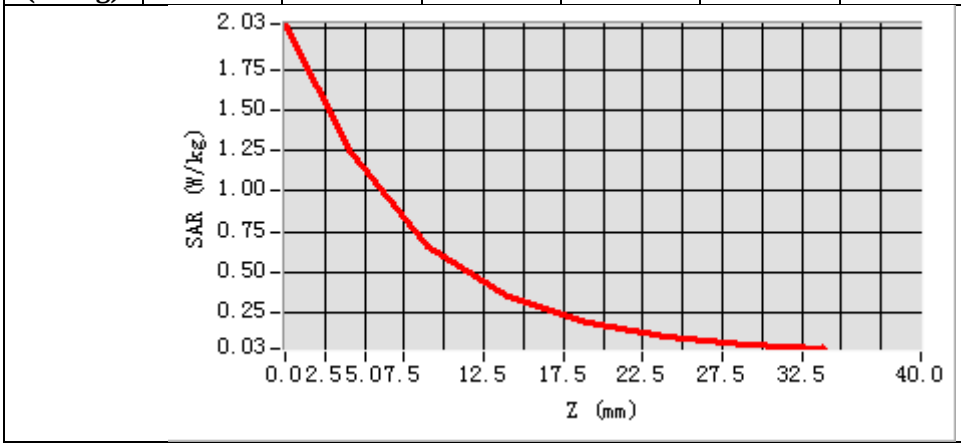

3D screen shot	Hot spot position
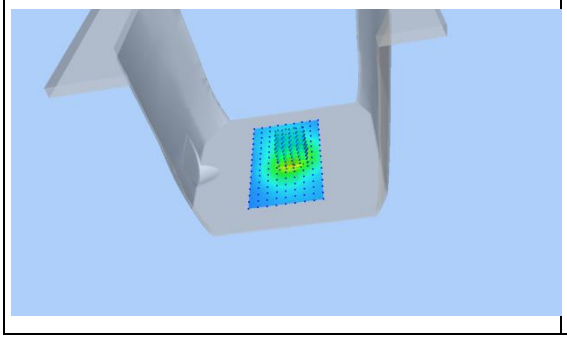	

Test Laboratory: AGC Lab **Date: Jul. 15, 2026**
5G NR SA41 Mid-Body- Edge 3(Bottom) (1RB#0)
DUT: Body Worn Camera; Type: R2 5G

Communication System: 5G NR; Communication System Band: 5G NR SA41; Duty Cycle:1:1.58; Conv.F=2.21
Frequency: 2592.99MHz; Medium parameters used: f =2600 MHz; σ=1.91 mho/m; εr =39.02; ρ= 1000 kg/m^3 ;
Phantom section: Flat Section

SATIMO Configuration:

- Probe: SSE2; Calibrated: 2026-05-27; Serial No.: 2023-EPGO-414
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/ 5G NR BAND 41 Mid-Body- Edge 3(Bottom) /Area Scan: Measurement grid: dx=8mm, y=8mm
Configuration/ 5G NR BAND 41 Mid-Body- Edge 3(Bottom) /Zoom Scan: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Area Scan	surf_sam_plan.txt, h= 5.00 mm
ZoomScan	7x7x7,dx=5mm dy=5mm dz=5mm
Phantom	Validation plane
Device Position	Body Edge 3(Bottom)
Band	5G NR BAND 41
Channels	Middle
Signal	OFDM (Crest factor: 1.58)

SURFACE SAR	VOLUME SAR
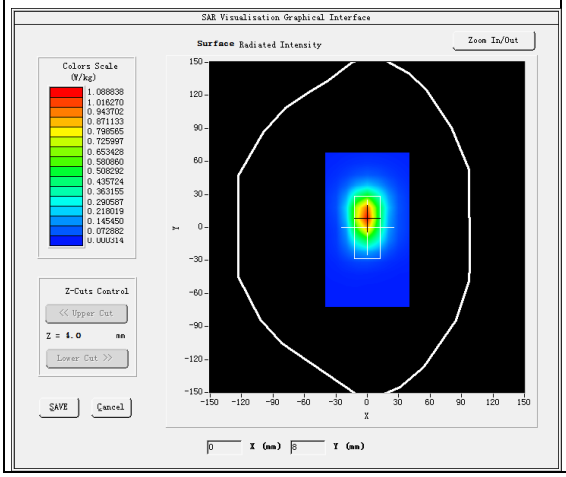	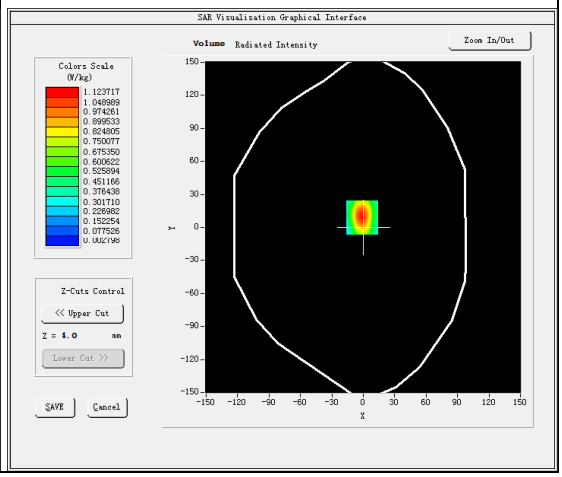

Maximum location: X=-1.00, Y=9.00
SAR Peak: 2.00 W/kg

SAR 10g (W/Kg)	0.474327
SAR 1g (W/Kg)	1.050064

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	2.0149	1.1237	0.4934	0.2180	0.0972	0.0433	0.0200

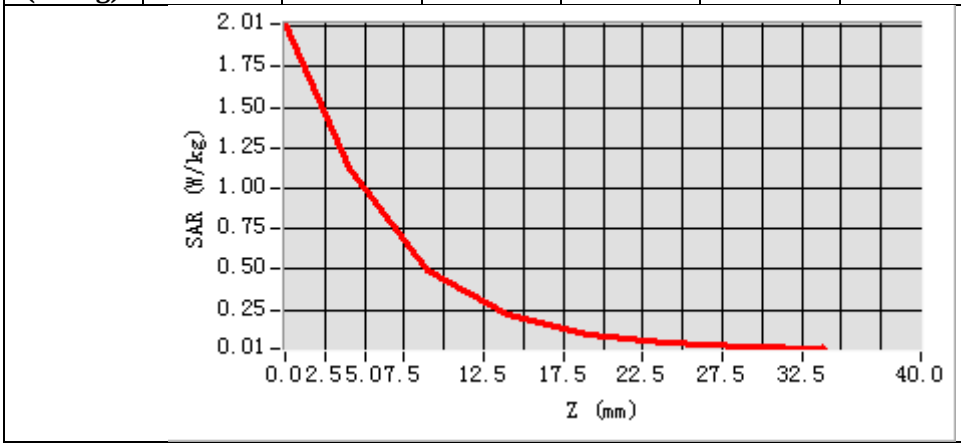

3D screen shot	Hot spot position
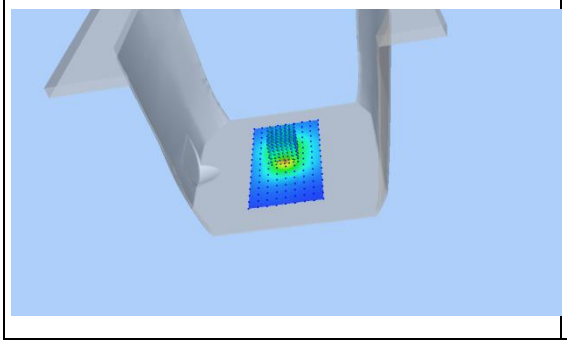	

APPENDIX C. TEST SETUP PHOTOGRAPHS

Refer to Attached files.

APPENDIX D. CALIBRATION DATA

Refer to Attached files.

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----END OF REPORT----