

FCC TEST REPORT

Report No.....: AB26070132FW01
FCC ID.....: 2AL26-R2-5G
Applicant.....: Reveal Media Limited
Address.....: Riverview House, 20 Old Bridge Street, Hampton Wick, KT1 4BU,
UNITED KINGDOM
Manufacturer.....: Reveal Media Hong Kong Ltd.
Address.....: 6/F., Luk Kwok Centre, 72 Gloucester Road, Wan Chai, Hong Kong
Product Name.....: Body Worn Camera
Trade Mark.....: Reveal Media
Test Model.....: R2 5G
Additional Model(s).....: /
Standard.....: FCC 47 CFR Part 22 Subpart H;
FCC 47 CFR Part 24 Subpart E;
FCC 47 CFR Part 27;
FCC 47 CFR Part 90;
Date of Receipt.....: 2026.07.09
Date of Test Date.....: 2026.07.09-2026.07.15
Date of Issue.....: 2026.07.15
Test Result.....: Pass

Compiled by: (Printed Name + Signature)	Huaijie Li	
Supervised by: (Printed Name + Signature)	David Huang	
Approved by: (Printed Name + Signature)	Jay Liu	

Testing Laboratory Name.....: Aibo Standard Technology (Shenzhen) Co., Ltd.
Address.....: 101, Building B, Tuori New Energy Industrial Park, High-tech Park,
Tianliao Community, Yutang Street, Guangming District, Shenzhen
City, Guangdong Province, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Aibo. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Aibo within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

FCC TEST REPORT

EUT.....	: Body Worn Camera
Test Model.....	: R2 5G
Applicant.....	: Reveal Media Limited
Address.....	: Riverview House, 20 Old Bridge Street, Hampton Wick, KT1 4BU, UNITED KINGDOM
Manufacturer.....	: Reveal Media Hong Kong Ltd.
Address.....	: 6/F., Luk Kwok Centre, 72 Gloucester Road, Wan Chai, Hong Kong

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

REPORT VERSION

Version No.	Issue Date	Description
01	2026.07.15	Initial Issue

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. GENERAL DESCRIPTION OF EUT	5
1.2. DESCRIPTION OF SUPPORT EQUIPMENT	6
1.3. DESCRIPTION OF EXTERNAL I/O	6
1.4. GENERAL DESCRIPTION OF APPLIED STANDARDS	7
1.5. DESCRIPTION OF TEST FACILITY	7
1.6. MEASUREMENT UNCERTAINTY	8
1.7. ENVIRONMENTAL CONDITIONS	8
1.8. DESCRIPTION OF TEST MODES	9
2. SUMMARY OF TEST RESULT	10
3. MEASUREMENT INSTRUMENTS LIST	11
4. FIELD STRENGTH OF SPURIOUS RADIATION	12
4.1. LIMIT	12
4.2. TEST SETUP	12
4.3. TEST PROCEDURE	14
4.4. TEST RESULT	14
5. PHOTOGRAPHS OF TEST SETUP	42
6. PHOTOGRAPHS OF THE EUT	42

1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF EUT

Product Name:	Body Worn Camera	
Trade Mark:	Reveal Media	
Test Model:	R2 5G	
Additional Model(s):	/	
Model Difference:	/	
Hardware Version:	EP-VRM09MB	
Software Version:	nrf52833_xxaa.hex	
Power Supply:	DC 5V/2A	
Battery:	DC 3.8V by battery	
Test Sample(s) Number:	AB26070132-01 (Engineer Sample) AB26070132-02 (Normal Sample)	
Radio Specification Subject to this Report		
Support Networks:	Band 2/4/5/12/13/14/41/66/71	
Frequency Range:	Band 2	1850MHz–1910MHz
	Band 4	1710MHz–1755MHz
	Band 5	824MHz–849MHz
	Band 12	699MHz–716MHz
	Band 13	777MHz–787MHz
	Band 14	788MHz–798MHz
	Band 41	2500MHz–2690MHz
	Band 66	1710MHz–1780MHz
	Band 71	663MHz–698MHz
Modulation Type:	QPSK, 16QAM	
Channel Bandwidth:	Band 2	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz
	Band 4	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz
	Band 5	1.4MHz, 3MHz, 5MHz, 10MHz
	Band 12	1.4MHz, 3MHz, 5MHz, 10MHz
	Band 13	5MHz, 10MHz
	Band 14	5MHz, 10MHz
	Band 41	5MHz, 10MHz, 15MHz, 20MHz
	Band 66	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz
	Band 71	5MHz, 10MHz, 15MHz, 20MHz
Antenna Type:	Internal Antenna; 1.52dBi (max.) For E-UTRA Band 2;(Max) 1.2dBi (max.) For E-UTRA Band 4;(Max) -0.23dBi (max.) For E-UTRA Band5;(Max) -9.97dBi (max.) For E-UTRA Band 12;(Max)	

	-6.81dBi (max.) For E-UTRA Band 13;(Max) -5.09dBi (max.) For E-UTRA Band 14;(Max) -0.70dBi (max.) For E-UTRA Band 41;(Max) 1.2dBi (max.) For E-UTRA Band 66;(Max) -12.6dBi (max.) For E-UTRA Band 71;(Max)
--	--

1.2. DESCRIPTION OF SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	Supplied by
Adapter	Shenzhen Keyu Power Technology Co., Ltd.	KA20A-CN	2415	Applicant

1.3. DESCRIPTION OF EXTERNAL I/O

I/O Port Description	Quantity	Cable
USB Type-C Interface	1	0.8m, unshielded

1.4. GENERAL DESCRIPTION OF APPLIED STANDARDS

The tests were performed according to following standards:

[FCC 47 CFR Part 22](#) - Public Mobile Services

[FCC 47 CFR Part 24](#) - Personal Communications Services

[FCC 47 CFR Part 27](#) -Miscellaneous Wireless Communications Services

[FCC 47 CFR Part 90](#) -Title 47, Part 90 of the Code of Federal Regulations: Private Land Mobile Radio Services

[FCC 47 CFR Part 2](#) - Frequency Allocations and Radio Treaty Matters; General Rules and Regulations

[ANSI C63.26-2015](#) - American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01](#) - KDB 971168 D01 Power Meas License Digital Systems v03r01

[KDB 412172 D01 Determining ERP and EIRP v01r01](#) - Guidelines for determining the effective radiated power (ERP) and isotropically radiated power (EIRP) of an RF transmitting system

1.5. DESCRIPTION OF TEST FACILITY

Test Lab: Aibo Standard Technology (Shenzhen) Co., Ltd.

Address: 101, Building B, Tuori New Energy Industrial Park, High-tech Park, Tianliao Community, Yutang Street, Guangming District, Shenzhen City, Guangdong Province, China

Tel.: +86 755 85250797

E-mail: aibo@aibonorm.com

Website: www.aibonorm.com

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Certificate No.: 7514.01

Aibo Standard Technology (Shenzhen) Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1411

Test Firm Registration Number: 567066

ISED Wireless Device Testing Laboratories

CAB identifier: CN0185

1.6. MEASUREMENT UNCERTAINTY

The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Items	Measurement Uncertainty
Radiated Spurious Emissions(9KHz~30MHz)	±2.70dB
Radiated Spurious Emissions(25MHz~1000MHz)	±1.60dB
Radiated Spurious Emissions(1GHz~20GHz)	±2.29dB
Radiated Spurious Emissions(20GHz~40GHz)	±5.32dB
RF Conducted Power	±0.57dB
Conducted Spurious Emissions	±1.60dB
RF Frequency	±6.0 x 10 ⁻⁷

Note: All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95 % level of confidence.

1.7. ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	+15°C ~ +35°C
Lative Humidity	20 % ~ 75 %
Air Pressure	98KPa ~ 101KPa

Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NVNT	0 to +40	3.80	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

1.8. DESCRIPTION OF TEST MODES

System Test Configuration:

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

2. SUMMARY OF TEST RESULT

B2			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1MHz	PASS

B4 & B66			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(h)(1)	≤ -13 dBm/1MHz.	PASS

B5			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §22.355	≤ -13 dBm/1MHz	PASS

B12 & B71			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1MHz	PASS

B13			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(c)(2)	≤ -13 dBm/1MHz	PASS

B14			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §90.543(c)	≤ -13 dBm/1MHz	PASS

B41			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(m)(4)	≤ -25 dBm/1MHz	PASS

3. MEASUREMENT INSTRUMENTS LIST

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Loop Antenna	Schwarzbeck	FMZB 1519	1519-025	01/18/2026	01/17/2028
2	Power Amplifier	HZEMC	HPA-9K0133	HYP A23029	01/20/2026	01/19/2027
3	Broadband Antenna	Schwarzbeck	VULB 9168	01763	01/29/2026	01/28/2028
4	Attenuator	PRM	ATT50-6-3	ATT50-6-3	01/20/2026	01/19/2027
5	Spectrum Analyzer	R&S	FSV40-N	101365	01/20/2026	01/19/2027
6	Horn Antenna	Schwarzbeck	BBHA 9120 D	02786	02/19/2026	02/18/2028
7	Horn Antenna	Schwarzbeck	ZLB7-18-40G-77	072410839	02/19/2026	02/18/2028
8	Power Amplifier	HZEMC	PA0118-43	HYP A23030	01/20/2026	01/19/2027
9	Power Amplifier	HZEMC	PA01840-45	HYP A23031	01/20/2026	01/19/2027
10	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW500	118780	01/20/2026	01/19/2027

Test Software		
Software name	Model	Version
Radiated Emission Measurement Software	FASLAB	V4.1

4. FIELD STRENGTH OF SPURIOUS RADIATION

4.1. LIMIT

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

Additional requirement for LTE Band 2:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

Additional requirement for LTE Band 4/66:

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

Additional requirement for LTE Band 5:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

Limit requirement for LTE Band 12/71: For operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.


Limit requirement for LTE Band 13: According to FCC section 27.53(c)(2), any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB in a 100kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. This calculated to be -13dBm.

Additional requirement for LTE Band 14: On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10 \log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.


Additional requirement for LTE Band 41:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB. This calculated to be -25dBm.

4.2. TEST SETUP

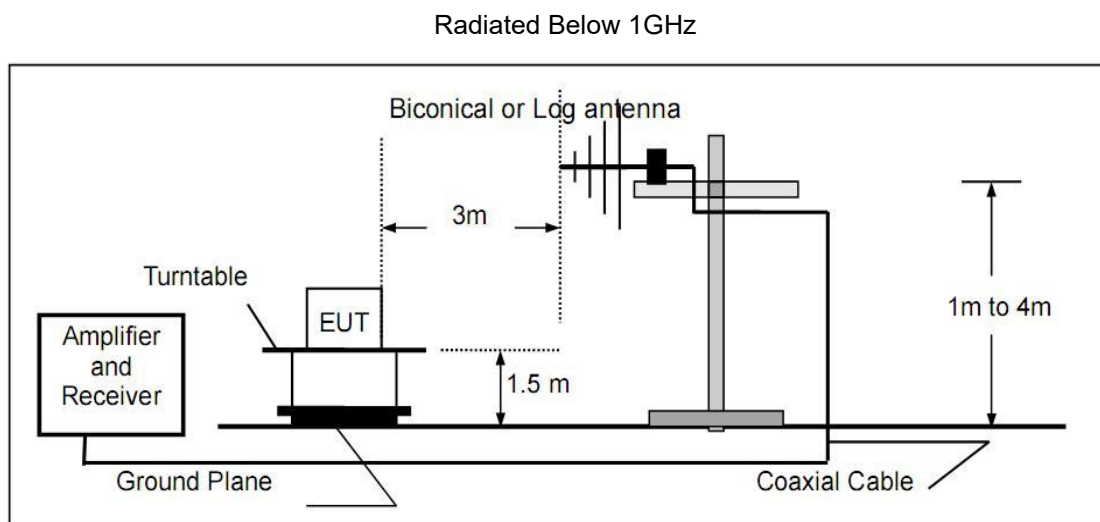


Radiated Above 1GHz

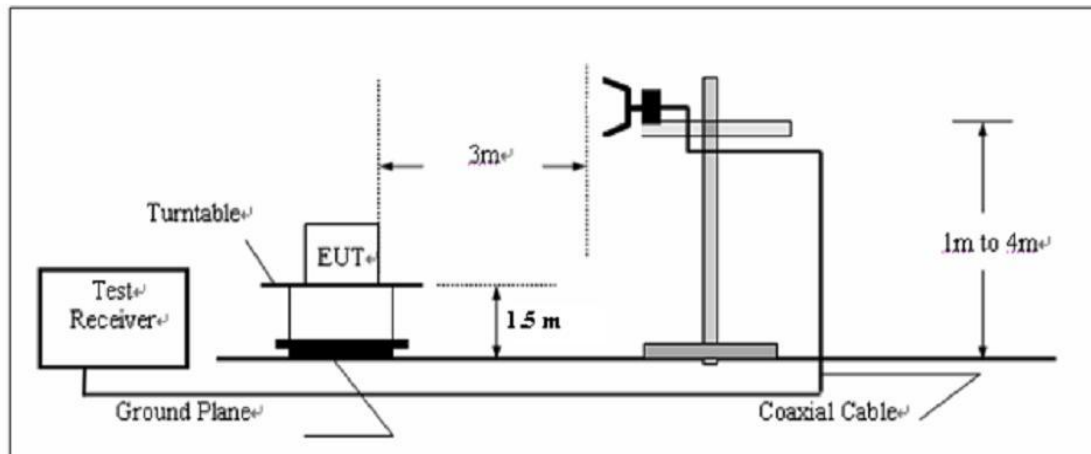


Substitution Method

Radiated Below 1GHz

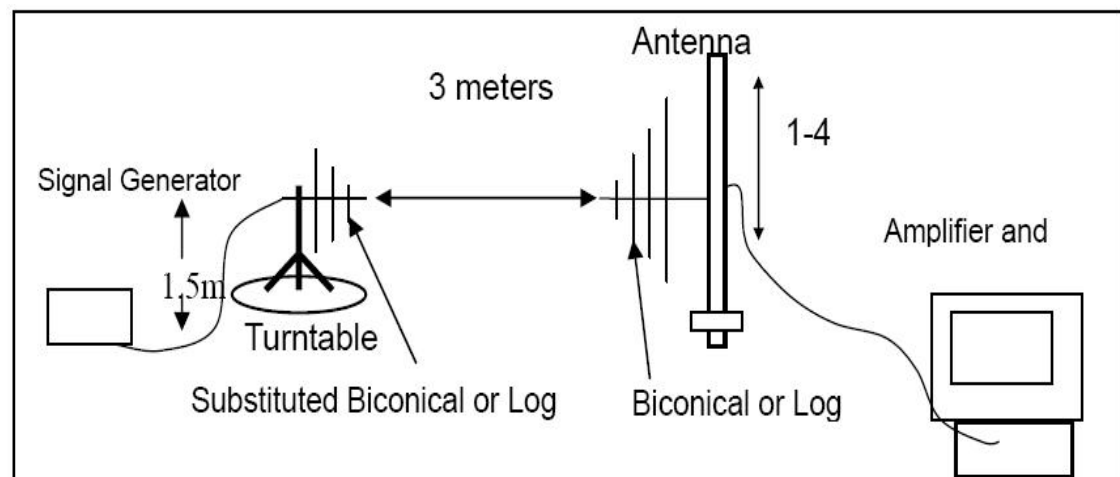

Radiated Above 1 GHz

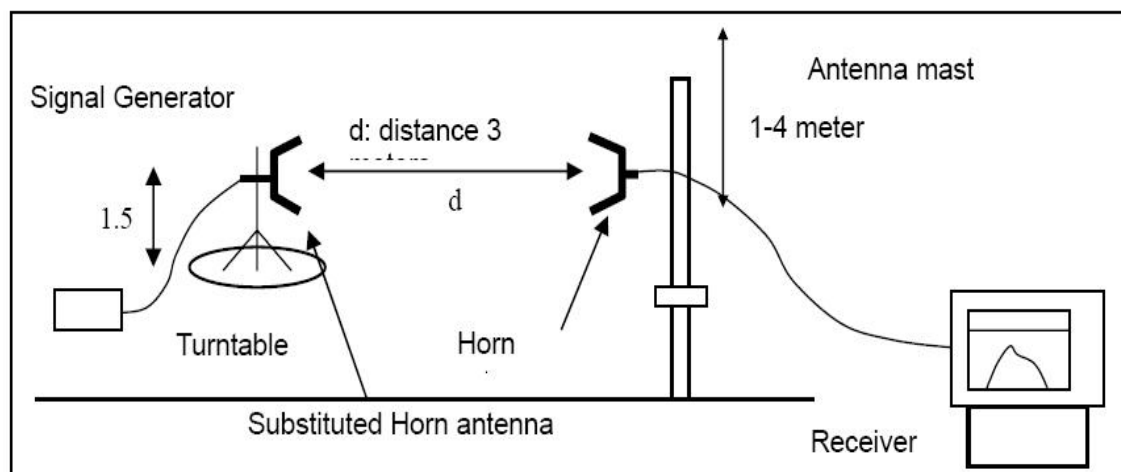

4.3. TEST PROCEDURE

Refer to KDB 971168 D01 v03r01 Section 7 for test method.

- (1) EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- (2) A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- (3) The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, and the maximum value of the receiver should be recorded as (P_r).
- (4) The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- (5) An amplifier should be connected to the Signal Source output port. And the cable should be connecting between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
- (6) The measurement results are obtained as described below:
$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$$

We used signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:
$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$
- (7) This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.
- (8) Test frequency range should extend to 10th harmonic of highest fundamental frequency.

4.4. TEST RESULT

Pass.

Remark:

- a) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, and test data recorded in this report.
- b) Pre-scan all modes and recorded the worst case in this report.
- c) Radiated spurious emission test from 9KHz to 10th harmonic of fundamental was verified, and the emission levels from 9kHz to 30MHz are attenuated 20dB below the limit and not recorded in report.

The measurement data as follows:

LTE Band2_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-61.94	-0.09	-62.03	-13.00	-49.03	PK+	H
2	541.190	-68.71	8.09	-60.62	-13.00	-47.62	PK+	H
3	1851.000	-46.93	3.64	-43.29	-13.00	-30.29	PK+	H
4	2943.000	-56.04	6.31	-49.73	-13.00	-36.73	PK+	H
5	5550.000	-53.49	2.26	-51.23	-13.00	-38.23	PK+	H
6	17977.500	-63.74	21.31	-42.43	-13.00	-29.43	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-61.48	-0.09	-61.57	-13.00	-48.57	PK+	V
2	290.930	-64.47	1.9	-62.57	-13.00	-49.57	PK+	V
3	986.420	-69.13	15.7	-53.43	-13.00	-40.43	PK+	V
4	5550.000	-41.93	2.26	-39.67	-13.00	-26.67	PK+	V
5	7402.500	-57.06	7.32	-49.74	-13.00	-36.74	PK+	V
6	17820.000	-63.45	20.15	-43.30	-13.00	-30.3	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band2_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.92	-0.09	-61.01	-13.00	-48.01	PK+	H
2	313.240	-67.18	2.74	-64.44	-13.00	-51.44	PK+	H
3	986.420	-69.32	15.7	-53.62	-13.00	-40.62	PK+	H
4	3757.500	-48.39	-2.97	-51.36	-13.00	-38.36	PK+	H
5	5640.000	-53.48	2.92	-50.56	-13.00	-37.56	PK+	H
6	17940.000	-64.89	21	-43.89	-13.00	-30.89	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-61.64	-0.09	-61.73	-13.00	-48.73	PK+	V
2	167.740	-67.97	1.8	-66.17	-13.00	-53.17	PK+	V
3	989.330	-69.13	15.83	-53.30	-13.00	-40.3	PK+	V
4	3757.500	-46.45	-2.97	-49.42	-13.00	-36.42	PK+	V
5	5640.000	-45.31	2.92	-42.39	-13.00	-29.39	PK+	V
6	18000.000	-64.25	21.5	-42.75	-13.00	-29.75	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band2_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.86	-0.09	-60.95	-13.00	-47.95	PK+	H
2	287.050	-65.76	1.82	-63.94	-13.00	-50.94	PK+	H
3	984.480	-68.33	15.63	-52.70	-13.00	-39.7	PK+	H
4	3817.500	-47.10	-2.93	-50.03	-13.00	-37.03	PK+	H
5	9547.500	-58.31	10.22	-48.09	-13.00	-35.09	PK+	H
6	18000.000	-64.97	21.5	-43.47	-13.00	-30.47	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-61.62	-0.09	-61.71	-13.00	-48.71	PK+	V
2	476.200	-67.42	6.78	-60.64	-13.00	-47.64	PK+	V
3	3817.500	-50.87	-2.93	-53.80	-13.00	-40.8	PK+	V
4	5722.500	-48.32	2.63	-45.69	-13.00	-32.69	PK+	V
5	7635.000	-56.11	7.42	-48.69	-13.00	-35.69	PK+	V
6	9547.500	-51.96	10.22	-41.74	-13.00	-28.74	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band4_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.43	-0.09	-60.52	-13.00	-47.52	PK+	H
2	165.800	-67.48	2.07	-65.41	-13.00	-52.41	PK+	H
3	964.110	-69.37	15.42	-53.95	-13.00	-40.95	PK+	H
4	3420.000	-45.53	-4.49	-50.02	-13.00	-37.02	PK+	H
5	5130.000	-53.34	1.89	-51.45	-13.00	-38.45	PK+	H
6	17805.000	-64.06	20.03	-44.03	-13.00	-31.03	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.96	-0.09	-60.05	-13.00	-47.05	PK+	V
2	733.250	-68.38	11.94	-56.44	-13.00	-43.44	PK+	V
3	2110.000	-47.69	4.95	-42.74	-13.00	-29.74	PK+	V
4	3420.000	-42.76	-4.49	-47.25	-13.00	-34.25	PK+	V
5	5130.000	-50.41	1.89	-48.52	-13.00	-35.52	PK+	V
6	17962.500	-64.78	21.19	-43.59	-13.00	-30.59	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band4_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.97	-0.09	-60.06	-13.00	-47.06	PK+	H
2	108.570	-65.62	-1.46	-67.08	-13.00	-54.08	PK+	H
3	542.160	-67.49	8.12	-59.37	-13.00	-46.37	PK+	H
4	3457.500	-44.41	-4.42	-48.83	-13.00	-35.83	PK+	H
5	5197.500	-52.01	1.71	-50.30	-13.00	-37.3	PK+	H
6	18000.000	-64.92	21.5	-43.42	-13.00	-30.42	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	971.870	-68.99	15.41	-53.58	-13.00	-40.58	PK+	V
2	2132.000	-50.98	5	-45.98	-13.00	-32.98	PK+	V
3	3465.000	-45.20	-4.38	-49.58	-13.00	-36.58	PK+	V
4	5197.500	-52.04	1.71	-50.33	-13.00	-37.33	PK+	V
5	6930.000	-55.55	5.87	-49.68	-13.00	-36.68	PK+	V
6	17992.500	-64.40	21.44	-42.96	-13.00	-29.96	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band4_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.78	-0.09	-59.87	-13.00	-46.87	PK+	H
2	149.310	-68.30	2.18	-66.12	-13.00	-53.12	PK+	H
3	323.910	-67.17	3.02	-64.15	-13.00	-51.15	PK+	H
4	3502.500	-42.41	-4.2	-46.61	-13.00	-33.61	PK+	H
5	5257.500	-50.84	1.59	-49.25	-13.00	-36.25	PK+	H
6	17985.000	-64.16	21.38	-42.78	-13.00	-29.78	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.82	-0.09	-59.91	-13.00	-46.91	PK+	V
2	159.980	-67.79	2.26	-65.53	-13.00	-52.53	PK+	V
3	2155.000	-51.93	5.06	-46.87	-13.00	-33.87	PK+	V
4	3502.500	-45.22	-4.2	-49.42	-13.00	-36.42	PK+	V
5	7012.500	-56.61	6.15	-50.46	-13.00	-37.46	PK+	V
6	18000.000	-64.63	21.5	-43.13	-13.00	-30.13	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band5_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.80	-0.16	-59.96	-13.00	-46.96	PK+	H
2	160.950	-69.05	2	-67.05	-13.00	-54.05	PK+	H
3	766.230	-68.27	12.46	-55.81	-13.00	-42.81	PK+	H
4	1341.000	-38.58	-10.39	-48.97	-13.00	-35.97	PK+	H
5	3000.000	-55.74	0.92	-54.82	-13.00	-41.82	PK+	H
6	8871.000	-59.74	8.88	-50.86	-13.00	-37.86	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.01	-0.16	-60.17	-13.00	-47.17	PK+	V
2	164.830	-67.80	1.77	-66.03	-13.00	-53.03	PK+	V
3	488.810	-69.28	6.71	-62.57	-13.00	-49.57	PK+	V
4	1658.000	-38.51	-10.4	-48.91	-13.00	-35.91	PK+	V
5	3003.000	-54.94	0.64	-54.30	-13.00	-41.3	PK+	V
6	8532.000	-58.95	8.25	-50.70	-13.00	-37.7	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band5_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.80	-0.16	-59.96	-13.00	-46.96	PK+	H
2	471.350	-69.97	6.36	-63.61	-13.00	-50.61	PK+	H
3	1673.000	-42.84	-10.4	-53.24	-13.00	-40.24	PK+	H
4	3000.000	-54.15	0.92	-53.23	-13.00	-40.23	PK+	H
5	5016.000	-54.33	1.67	-52.66	-13.00	-39.66	PK+	H
6	8889.000	-60.22	8.89	-51.33	-13.00	-38.33	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.72	-0.16	-59.88	-13.00	-46.88	PK+	V
2	150.280	-68.62	2.22	-66.40	-13.00	-53.4	PK+	V
3	388.900	-68.48	4.34	-64.14	-13.00	-51.14	PK+	V
4	1673.000	-44.06	-10.4	-54.46	-13.00	-41.46	PK+	V
5	4182.000	-51.17	-1.94	-53.11	-13.00	-40.11	PK+	V
6	7689.000	-58.86	7.44	-51.42	-13.00	-38.42	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band5_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.10	-0.16	-60.26	-13.00	-47.26	PK+	H
2	468.440	-69.82	6.34	-63.48	-13.00	-50.48	PK+	H
3	1688.000	-46.30	-10.4	-56.70	-13.00	-43.7	PK+	H
4	3009.000	-54.28	0.09	-54.19	-13.00	-41.19	PK+	H
5	5061.000	-55.06	1.76	-53.30	-13.00	-40.3	PK+	H
6	8601.000	-59.49	8.47	-51.02	-13.00	-38.02	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.76	-0.16	-59.92	-13.00	-46.92	PK+	V
2	450.980	-69.35	6.14	-63.21	-13.00	-50.21	PK+	V
3	1687.000	-44.50	-10.4	-54.90	-13.00	-41.9	PK+	V
4	3000.000	-55.41	0.92	-54.49	-13.00	-41.49	PK+	V
5	4221.000	-51.22	-1.79	-53.01	-13.00	-40.01	PK+	V
6	8769.000	-60.13	8.88	-51.25	-13.00	-38.25	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band12_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.88	-0.16	-60.04	-13.00	-47.04	PK+	H
2	167.740	-67.43	1.58	-65.85	-13.00	-52.85	PK+	H
3	397.630	-69.13	4.43	-64.70	-13.00	-51.7	PK+	H
4	1407.000	-49.22	-10.33	-59.55	-13.00	-46.55	PK+	H
5	3000.000	-55.27	0.92	-54.35	-13.00	-41.35	PK+	H
6	7450.000	-59.26	7.48	-51.78	-13.00	-38.78	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.40	-0.16	-60.56	-13.00	-47.56	PK+	V
2	162.890	-68.72	2.1	-66.62	-13.00	-53.62	PK+	V
3	704.150	-66.52	11.76	-54.76	-13.00	-41.76	PK+	V
4	1408.000	-50.33	-10.33	-60.66	-13.00	-47.66	PK+	V
5	3005.000	-54.12	0.46	-53.66	-13.00	-40.66	PK+	V
6	6587.500	-57.55	5.36	-52.19	-13.00	-39.19	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band12_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.000	-60.06	-0.27	-60.33	-13.00	-47.33	PK+	H
2	166.770	-67.68	1.68	-66.00	-13.00	-53	PK+	H
3	529.550	-68.97	7.65	-61.32	-13.00	-48.32	PK+	H
4	1415.000	-48.18	-10.33	-58.51	-13.00	-45.51	PK+	H
5	3000.000	-54.72	0.92	-53.80	-13.00	-40.8	PK+	H
6	7605.000	-58.90	7.5	-51.40	-13.00	-38.4	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.21	-0.16	-59.37	-13.00	-46.37	PK+	V
2	159.980	-69.11	2.1	-67.01	-13.00	-54.01	PK+	V
3	461.650	-69.66	6.18	-63.48	-13.00	-50.48	PK+	V
4	1415.000	-49.16	-10.33	-59.49	-13.00	-46.49	PK+	V
5	3002.500	-54.73	0.69	-54.04	-13.00	-41.04	PK+	V
6	7155.000	-58.35	6.86	-51.49	-13.00	-38.49	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band12_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.63	-0.16	-60.79	-13.00	-47.79	PK+	H
2	167.740	-68.21	1.58	-66.63	-13.00	-53.63	PK+	H
3	495.600	-70.26	6.92	-63.34	-13.00	-50.34	PK+	H
4	1421.000	-49.55	-10.34	-59.89	-13.00	-46.89	PK+	H
5	3002.500	-54.29	0.69	-53.60	-13.00	-40.6	PK+	H
6	7527.500	-58.67	7.55	-51.12	-13.00	-38.12	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.33	-0.16	-60.49	-13.00	-47.49	PK+	V
2	156.100	-68.29	2.22	-66.07	-13.00	-53.07	PK+	V
3	310.330	-67.09	2.58	-64.51	-13.00	-51.51	PK+	V
4	1422.000	-48.36	-10.34	-58.70	-13.00	-45.7	PK+	V
5	4265.000	-52.09	-1.62	-53.71	-13.00	-40.71	PK+	V
6	7470.000	-59.06	7.48	-51.58	-13.00	-38.58	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band13_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1010.000	-51.34	-9.1	-60.44	-13.00	-47.44	PK+	H
2	1556.000	-43.12	-10.46	-53.58	-13.00	-40.58	PK+	H
3	2254.000	-51.93	-7.83	-59.76	-13.00	-46.76	PK+	H
4	3010.000	-54.10	-0.01	-54.11	-13.00	-41.11	PK+	H
5	4522.500	-55.98	-0.54	-56.52	-13.00	-43.52	PK+	H
6	6987.500	-58.61	6.05	-52.56	-13.00	-39.56	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1557.000	-47.17	-10.46	-57.63	-13.00	-44.63	PK+	V
2	2066.000	-51.65	-8.57	-60.22	-13.00	-47.22	PK+	V
3	3000.000	-54.78	0.92	-53.86	-13.00	-40.86	PK+	V
4	4942.500	-56.00	1.37	-54.63	-13.00	-41.63	PK+	V
5	6565.000	-57.52	5.29	-52.23	-13.00	-39.23	PK+	V
6	7922.500	-59.92	7.81	-52.11	-13.00	-39.11	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band13_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1568.000	-45.24	-10.45	-55.69	-13.00	-42.69	PK+	H
2	2317.000	-52.03	-7.83	-59.86	-13.00	-46.86	PK+	H
3	3000.000	-55.74	0.92	-54.82	-13.00	-41.82	PK+	H
4	5012.500	-56.77	1.67	-55.10	-13.00	-42.1	PK+	H
5	6897.500	-57.31	5.81	-51.50	-13.00	-38.5	PK+	H
6	7962.500	-59.24	7.86	-51.38	-13.00	-38.38	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1018.000	-51.28	-9.18	-60.46	-13.00	-47.46	PK+	V
2	1567.000	-46.50	-10.45	-56.95	-13.00	-43.95	PK+	V
3	2149.000	-52.58	-8.11	-60.69	-13.00	-47.69	PK+	V
4	3000.000	-54.38	0.92	-53.46	-13.00	-40.46	PK+	V
5	5402.500	-55.98	1.6	-54.38	-13.00	-41.38	PK+	V
6	6985.000	-57.34	6.04	-51.30	-13.00	-38.3	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band13_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1004.000	-51.39	-9.04	-60.43	-13.00	-47.43	PK+	H
2	1571.000	-44.04	-10.45	-54.49	-13.00	-41.49	PK+	H
3	2181.000	-52.05	-7.96	-60.01	-13.00	-47.01	PK+	H
4	3002.500	-55.59	0.69	-54.90	-13.00	-41.9	PK+	H
5	5070.000	-56.55	1.8	-54.75	-13.00	-41.75	PK+	H
6	7250.000	-58.82	7.09	-51.73	-13.00	-38.73	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1267.000	-42.79	-10.37	-53.16	-13.00	-40.16	PK+	V
2	1572.000	-43.30	-10.45	-53.75	-13.00	-40.75	PK+	V
3	3012.500	-53.71	-0.24	-53.95	-13.00	-40.95	PK+	V
4	4407.500	-54.34	-1.01	-55.35	-13.00	-42.35	PK+	V
5	6587.500	-56.51	5.36	-51.15	-13.00	-38.15	PK+	V
6	7457.500	-59.25	7.48	-51.77	-13.00	-38.77	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band14_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1039.000	-50.60	-9.39	-59.99	-13.00	-46.99	PK+	H
2	1630.000	-51.48	-10.42	-61.90	-13.00	-48.9	PK+	H
3	2331.000	-51.83	-7.79	-59.62	-13.00	-46.62	PK+	H
4	3725.000	-54.24	-3.11	-57.35	-13.00	-44.35	PK+	H
5	6437.500	-56.99	5.01	-51.98	-13.00	-38.98	PK+	H
6	7532.500	-59.43	7.55	-51.88	-13.00	-38.88	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1118.000	-50.34	-10.08	-60.42	-13.00	-47.42	PK+	V
2	1682.000	-51.21	-10.4	-61.61	-13.00	-48.61	PK+	V
3	2380.000	-52.02	-7.71	-59.73	-13.00	-46.73	PK+	V
4	4382.500	-54.73	-1.1	-55.83	-13.00	-42.83	PK+	V
5	6572.500	-57.31	5.31	-52.00	-13.00	-39	PK+	V
6	7452.500	-59.11	7.48	-51.63	-13.00	-38.63	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band14_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1010.000	-51.58	-9.1	-60.68	-13.00	-47.68	PK+	H
2	1517.000	-51.31	-10.43	-61.74	-13.00	-48.74	PK+	H
3	2216.000	-52.11	-7.86	-59.97	-13.00	-46.97	PK+	H
4	3672.500	-54.89	-3.45	-58.34	-13.00	-45.34	PK+	H
5	6965.000	-57.24	5.96	-51.28	-13.00	-38.28	PK+	H
6	7640.000	-59.19	7.41	-51.78	-13.00	-38.78	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1000.000	-51.12	-9	-60.12	-13.00	-47.12	PK+	V
2	1617.000	-50.74	-10.42	-61.16	-13.00	-48.16	PK+	V
3	2341.000	-52.23	-7.76	-59.99	-13.00	-46.99	PK+	V
4	3807.500	-54.41	-2.95	-57.36	-13.00	-44.36	PK+	V
5	5757.500	-57.34	2.55	-54.79	-13.00	-41.79	PK+	V
6	7597.500	-59.36	7.51	-51.85	-13.00	-38.85	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band14_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1327.000	-35.70	-10.36	-46.06	-13.00	-33.06	PK+	H
2	2143.000	-49.00	-8.14	-57.14	-13.00	-44.14	PK+	H
3	3000.000	-54.89	0.92	-53.97	-13.00	-40.97	PK+	H
4	4627.500	-55.96	-0.19	-56.15	-13.00	-43.15	PK+	H
5	6360.000	-57.78	4.9	-52.88	-13.00	-39.88	PK+	H
6	7617.500	-59.38	7.46	-51.92	-13.00	-38.92	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1051.000	-50.48	-9.51	-59.99	-13.00	-46.99	PK+	V
2	1782.000	-51.42	-10.17	-61.59	-13.00	-48.59	PK+	V
3	3007.500	-55.19	0.22	-54.97	-13.00	-41.97	PK+	V
4	4315.000	-55.28	-1.37	-56.65	-13.00	-43.65	PK+	V
5	5652.500	-56.85	2.88	-53.97	-13.00	-40.97	PK+	V
6	7160.000	-58.85	6.88	-51.97	-13.00	-38.97	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band41_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.55	-0.09	-60.64	-25.00	-35.64	PK+	H
2	167.740	-68.03	1.8	-66.23	-25.00	-41.23	PK+	H
3	313.240	-67.79	2.74	-65.05	-25.00	-40.05	PK+	H
4	963.140	-68.82	15.4	-53.42	-25.00	-28.42	PK+	H
5	5002.500	-54.21	1.66	-52.55	-25.00	-27.55	PK+	H
6	11400.000	-61.91	13.05	-48.86	-25.00	-23.86	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.48	-0.09	-60.57	-25.00	-35.57	PK+	V
2	167.740	-66.61	1.8	-64.81	-25.00	-39.81	PK+	V
3	312.270	-66.73	2.72	-64.01	-25.00	-39.01	PK+	V
4	1186.000	-54.75	2.53	-52.22	-25.00	-27.22	PK+	V
5	5002.500	-53.31	1.66	-51.65	-25.00	-26.65	PK+	V
6	18000.000	-64.11	21.5	-42.61	-25.00	-17.61	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band41_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-58.90	-0.09	-58.99	-25.00	-33.99	PK+	H
2	163.860	-66.61	2.27	-64.34	-25.00	-39.34	PK+	H
3	953.440	-67.11	15.25	-51.86	-25.00	-26.86	PK+	H
4	5190.000	-52.80	1.73	-51.07	-25.00	-26.07	PK+	H
5	11160.000	-61.55	13.01	-48.54	-25.00	-23.54	PK+	H
6	17977.500	-65.01	21.31	-43.70	-25.00	-18.7	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.11	-0.09	-60.20	-25.00	-35.2	PK+	V
2	449.040	-68.68	6.42	-62.26	-25.00	-37.26	PK+	V
3	990.300	-67.90	15.86	-52.04	-25.00	-27.04	PK+	V
4	5002.500	-56.92	1.66	-55.26	-25.00	-30.26	PK+	V
5	11115.000	-62.38	12.98	-49.40	-25.00	-24.4	PK+	V
6	17842.500	-64.26	20.3	-43.96	-25.00	-18.96	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band41_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.64	-0.09	-59.73	-25.00	-34.73	PK+	H
2	160.950	-69.01	2.23	-66.78	-25.00	-41.78	PK+	H
3	439.340	-68.99	6.2	-62.79	-25.00	-37.79	PK+	H
4	1320.000	-49.03	2.97	-46.06	-25.00	-21.06	PK+	H
5	5370.000	-47.84	1.52	-46.32	-25.00	-21.32	PK+	H
6	17992.500	-64.85	21.44	-43.41	-25.00	-18.41	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.33	-0.09	-60.42	-25.00	-35.42	PK+	V
2	85.290	-62.32	-3.19	-65.51	-25.00	-40.51	PK+	V
3	996.120	-70.05	15.81	-54.24	-25.00	-29.24	PK+	V
4	5370.000	-51.12	1.52	-49.60	-25.00	-24.6	PK+	V
5	10522.500	-60.74	11.62	-49.12	-25.00	-24.12	PK+	V
6	17917.500	-64.61	20.81	-43.80	-25.00	-18.8	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band66_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-58.68	-0.09	-58.77	-13.00	-45.77	PK+	H
2	310.330	-66.71	2.68	-64.03	-13.00	-51.03	PK+	H
3	1343.000	-51.82	2.99	-48.83	-13.00	-35.83	PK+	H
4	3420.000	-48.54	-4.49	-53.03	-13.00	-40.03	PK+	H
5	5130.000	-51.63	1.89	-49.74	-13.00	-36.74	PK+	H
6	17835.000	-63.28	20.26	-43.02	-13.00	-30.02	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.80	-0.09	-60.89	-13.00	-47.89	PK+	V
2	150.280	-69.08	2.24	-66.84	-13.00	-53.84	PK+	V
3	986.420	-69.15	15.7	-53.45	-13.00	-40.45	PK+	V
4	2110.000	-47.98	4.95	-43.03	-13.00	-30.03	PK+	V
5	5130.000	-48.86	1.89	-46.97	-13.00	-33.97	PK+	V
6	17820.000	-64.30	20.15	-44.15	-13.00	-31.15	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band66_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.60	-0.09	-59.69	-13.00	-46.69	PK+	H
2	168.710	-67.57	1.75	-65.82	-13.00	-52.82	PK+	H
3	1307.000	-49.64	2.87	-46.77	-13.00	-33.77	PK+	H
4	3487.500	-44.32	-4.27	-48.59	-13.00	-35.59	PK+	H
5	6915.000	-58.33	5.84	-52.49	-13.00	-39.49	PK+	H
6	17932.500	-65.03	20.94	-44.09	-13.00	-31.09	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	318.090	-67.58	2.88	-64.70	-13.00	-51.7	PK+	V
2	2145.000	-50.79	5.03	-45.76	-13.00	-32.76	PK+	V
3	3487.500	-43.75	-4.27	-48.02	-13.00	-35.02	PK+	V
4	5235.000	-51.62	1.63	-49.99	-13.00	-36.99	PK+	V
5	6975.000	-55.72	6	-49.72	-13.00	-36.72	PK+	V
6	17992.500	-65.13	21.44	-43.69	-13.00	-30.69	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band66_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-60.57	-0.09	-60.66	-13.00	-47.66	PK+	H
2	85.290	-63.69	-3.19	-66.88	-13.00	-53.88	PK+	H
3	1300.000	-51.41	2.86	-48.55	-13.00	-35.55	PK+	H
4	3555.000	-43.34	-4.14	-47.48	-13.00	-34.48	PK+	H
5	5332.500	-49.62	1.48	-48.14	-13.00	-35.14	PK+	H
6	17985.000	-63.39	21.38	-42.01	-13.00	-29.01	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	30.970	-59.66	-0.09	-59.75	-13.00	-46.75	PK+	V
2	87.230	-62.49	-3.05	-65.54	-13.00	-52.54	PK+	V
3	562.530	-68.04	8.55	-59.49	-13.00	-46.49	PK+	V
4	2179.000	-52.40	5.17	-47.23	-13.00	-34.23	PK+	V
5	3555.000	-50.31	-4.14	-54.45	-13.00	-41.45	PK+	V
6	17962.500	-65.62	21.19	-44.43	-13.00	-31.43	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band71_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1083.000	-51.00	-9.78	-60.78	-13.00	-47.78	PK+	H
2	1680.000	-51.14	-10.4	-61.54	-13.00	-48.54	PK+	H
3	2527.000	-53.18	-7.12	-60.30	-13.00	-47.3	PK+	H
4	4294.000	-54.65	-1.47	-56.12	-13.00	-43.12	PK+	H
5	5734.000	-56.17	2.6	-53.57	-13.00	-40.57	PK+	H
6	6906.000	-56.29	5.83	-50.46	-13.00	-37.46	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1038.000	-49.97	-9.38	-59.35	-13.00	-46.35	PK+	V
2	1561.000	-51.46	-10.46	-61.92	-13.00	-48.92	PK+	V
3	2439.000	-52.22	-7.55	-59.77	-13.00	-46.77	PK+	V
4	3772.000	-54.49	-2.97	-57.46	-13.00	-44.46	PK+	V
5	5016.000	-56.81	1.67	-55.14	-13.00	-42.14	PK+	V
6	6920.000	-57.55	5.85	-51.70	-13.00	-38.7	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band71_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1009.000	-50.68	-9.09	-59.77	-13.00	-46.77	PK+	H
2	1435.000	-51.35	-10.35	-61.70	-13.00	-48.7	PK+	H
3	2202.000	-51.81	-7.88	-59.69	-13.00	-46.69	PK+	H
4	3014.000	-53.71	-0.38	-54.09	-13.00	-41.09	PK+	H
5	6060.000	-57.22	3.41	-53.81	-13.00	-40.81	PK+	H
6	6908.000	-57.43	5.83	-51.60	-13.00	-38.6	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1010.000	-50.13	-9.1	-59.23	-13.00	-46.23	PK+	V
2	1433.000	-51.33	-10.35	-61.68	-13.00	-48.68	PK+	V
3	2171.000	-52.37	-8.01	-60.38	-13.00	-47.38	PK+	V
4	3000.000	-54.47	0.92	-53.55	-13.00	-40.55	PK+	V
5	4582.000	-56.14	-0.34	-56.48	-13.00	-43.48	PK+	V
6	6628.000	-56.78	5.44	-51.34	-13.00	-38.34	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

LTE Band71_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1079.000	-50.28	-9.74	-60.02	-13.00	-47.02	PK+	H
2	1631.000	-51.73	-10.42	-62.15	-13.00	-49.15	PK+	H
3	2324.000	-52.20	-7.81	-60.01	-13.00	-47.01	PK+	H
4	4034.000	-54.73	-2.42	-57.15	-13.00	-44.15	PK+	H
5	5018.000	-56.09	1.68	-54.41	-13.00	-41.41	PK+	H
6	6554.000	-56.56	5.25	-51.31	-13.00	-38.31	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1012.000	-50.59	-9.12	-59.71	-13.00	-46.71	PK+	V
2	1505.000	-51.02	-10.41	-61.43	-13.00	-48.43	PK+	V
3	2207.000	-51.68	-7.87	-59.55	-13.00	-46.55	PK+	V
4	3000.000	-53.36	0.92	-52.44	-13.00	-39.44	PK+	V
5	4034.000	-54.34	-2.42	-56.76	-13.00	-43.76	PK+	V
6	6910.000	-57.05	5.83	-51.22	-13.00	-38.22	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

5. PHOTOGRAPHS OF TEST SETUP

Please refer to Appendix A for Test Setup Photos of the EUT.

6. PHOTOGRAPHS OF THE EUT

Please refer to Appendix B for External Photos of the EUT.

*****THE END*****