

FCC TEST REPORT

Report No.....: AB26070132FW02
FCC ID.....: 2AL26-R2-5G
Applicant.....: Reveal Media Limited
Address.....: Riverview House, 20 Old Bridge Street, Hampton Wick, KT1 4BU,
UNITED KINGDOM
Manufacturer.....: Reveal Media Hong Kong Ltd.
Address.....: 6/F., Luk Kwok Centre, 72 Gloucester Road, Wan Chai, Hong Kong
Product Name.....: Body Worn Camera
Trade Mark.....: Reveal Media
Test Model.....: R2 5G
Additional Model(s).....: /
Standard.....: FCC 47 CFR Part 22 Subpart H;
FCC 47 CFR Part 24 Subpart E;
FCC 47 CFR Part 27;
FCC 47 CFR Part 90;
Date of Receipt.....: 2026.07.09
Date of Test Date.....: 2026.07.09-2026.07.15
Date of Issue.....: 2026.07.15
Test Result.....: Pass

Compiled by: (Printed Name + Signature)	Huajie Li	
Supervised by: (Printed Name + Signature)	David Huang	
Approved by: (Printed Name + Signature)	Jay Liu	

Testing Laboratory Name.....: Aibo Standard Technology (Shenzhen) Co., Ltd.
Address.....: 101, Building B, Tuori New Energy Industrial Park, High-tech Park,
Tianliao Community, Yutang Street, Guangming District, Shenzhen
City, Guangdong Province, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by Aibo. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to Aibo within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

FCC TEST REPORT

EUT.....	: Body Worn Camera
Test Model.....	: R2 5G
Applicant.....	: Reveal Media Limited
Address.....	: Riverview House, 20 Old Bridge Street, Hampton Wick, KT1 4BU, UNITED KINGDOM
Manufacturer.....	: Reveal Media Hong Kong Ltd.
Address.....	: 6/F., Luk Kwok Centre, 72 Gloucester Road, Wan Chai, Hong Kong

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

REPORT VERSION

Version No.	Issue Date	Description
01	2026.07.15	Initial Issue

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. GENERAL DESCRIPTION OF EUT	5
1.2. DESCRIPTION OF SUPPORT EQUIPMENT	6
1.3. DESCRIPTION OF EXTERNAL I/O	6
1.4. GENERAL DESCRIPTION OF APPLIED STANDARDS	7
1.5. DESCRIPTION OF TEST FACILITY	7
1.6. MEASUREMENT UNCERTAINTY	8
1.7. ENVIRONMENTAL CONDITIONS	8
1.8. DESCRIPTION OF TEST MODES	9
2. SUMMARY OF TEST RESULT	10
3. MEASUREMENT INSTRUMENTS LIST	13
4. RADIATED SPURIOUS EMISSIONS	14
4.1. LIMIT	14
4.2. TEST SETUP	15
4.3. TEST PROCEDURE	16
4.4. TEST RESULT	16
5. PHOTOGRAPHS OF TEST SETUP	41
6. PHOTOGRAPHS OF THE EUT	41

1. GENERAL INFORMATION

1.1. GENERAL DESCRIPTION OF EUT

Product Name:	Body Worn Camera	
Trade Mark:	Reveal Media	
Test Model:	R2 5G	
Additional Model(s):	/	
Model Difference:	/	
Hardware Version:	EP-VRM09MB	
Software Version:	nrf52833_xxaa.hex	
Power Supply:	DC 5V/2A	
Battery:	DC 3.8V by battery	
Test Sample(s) Number:	AB26070132-01 (Engineer Sample) AB26070132-02 (Normal Sample)	
Radio Specification Subject to this Report		
Support Networks:	n2/5/12/13/14/41/66/71	
Frequency Range:	n 2	1850MHz–1910MHz
	n 5	824MHz–849MHz
	n 12	699MHz–716MHz
	n 13	777MHz–787MHz
	n 14	788MHz–798MHz
	n41	2496MHz-2690MHz
	n66	1710MHz–1780MHz
	n71	663MHz–698MHz
Modulation Type:	DFT-s-OFDM	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM
	CP-OFDM	QPSK, 16QAM, 64QAM, 256QAM
Channel Bandwidth:	n 2	5MHz, 10MHz, 15MHz, 20MHz
	n 5	5MHz, 10MHz, 15MHz, 20MHz
	n 12	5MHz, 10MHz, 15MHz
	n 13	5MHz, 10MHz
	n 14	5MHz, 10MHz
	n41	10MHz, 15MHz, 20MHz
	n66	5MHz, 10MHz, 15MHz, 20MHz
	n71	5MHz, 10MHz, 15MHz, 20MHz
Antenna Type:	Internal Antenna 1.52dBi (max.) For n2;(Max) -0.23dBi (max.) For n5;(Max) -9.97dBi (max.) For n12;(Max) -6.81dBi (max.) For n13;(Max) -5.09dBi (max.) For n14;(Max)	

	-0.70dBi (max.) For n41;(Max) 1.2dBi (max.) For n66;(Max) -12.6dBi (max.) For n71;(Max)
--	---

1.2. DESCRIPTION OF SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	Supplied by
Adapter	Shenzhen Keyu Power Technology Co., Ltd.	KA20A-CN	2415	Applicant

1.3. DESCRIPTION OF EXTERNAL I/O

I/O Port Description	Quantity	Cable
USB Type-C Interface	1	0.8m, unshielded

1.4. GENERAL DESCRIPTION OF APPLIED STANDARDS

The tests were performed according to following standards:

[FCC 47 CFR Part 22](#) - Public Mobile Services

[FCC 47 CFR Part 24](#) - Personal Communications Services

[FCC 47 CFR Part 27](#) -Miscellaneous Wireless Communications Services

[FCC 47 CFR Part 90](#) -Title 47, Part 90 of the Code of Federal Regulations: Private Land Mobile Radio Services

[FCC 47 CFR Part 2](#) - Frequency Allocations and Radio Treaty Matters; General Rules and Regulations

[ANSI C63.26-2015](#) - American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01](#) - KDB 971168 D01 Power Meas License Digital Systems v03r01

[KDB 412172 D01 Determining ERP and EIRP v01r01](#) - Guidelines for determining the effective radiated power (ERP) and isotropically radiated power (EIRP) of an RF transmitting system

1.5. DESCRIPTION OF TEST FACILITY

Test Lab: Aibo Standard Technology (Shenzhen) Co., Ltd.

Address: 101, Building B, Tuori New Energy Industrial Park, High-tech Park, Tianliao Community, Yutang Street, Guangming District, Shenzhen City, Guangdong Province, China

Tel.: +86 755 85250797

E-mail: aibo@aibonorm.com

Website: www.aibonorm.com

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Certificate No.: 7514.01

Aibo Standard Technology (Shenzhen) Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1411

Test Firm Registration Number: 567066

ISED Wireless Device Testing Laboratories

CAB identifier: CN0185

1.6. MEASUREMENT UNCERTAINTY

The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Items	Measurement Uncertainty
Radiated Spurious Emissions(9KHz~30MHz)	±2.70dB
Radiated Spurious Emissions(25MHz~1000MHz)	±1.60dB
Radiated Spurious Emissions(1GHz~20GHz)	±2.29dB
Radiated Spurious Emissions(20GHz~40GHz)	±5.32dB
RF Conducted Power	±0.57dB
Conducted Spurious Emissions	±1.60dB
RF Frequency	±6.0 x 10 ⁻⁷

Note: All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95 % level of confidence.

1.7. ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	+15°C ~ +35°C
Lative Humidity	20 % ~ 75 %
Air Pressure	98KPa ~ 101KPa

Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NVNT	0 to +40	3.80	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

1.8. DESCRIPTION OF TEST MODES

System Test Configuration:

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

2. SUMMARY OF TEST RESULT

n2			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §24.238(a)	≤ -13 dBm/1MHz	PASS

Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

n5			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §22.917(a)	≤ -13 dBm/1MHz	PASS

n41			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(m)(4)	≤ -25 dBm/1MHz	PASS

n12			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1MHz	PASS

Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

n13			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(c)(2)	≤ -13 dBm/1MHz	PASS

n14			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §90.543(c)	≤ -13 dBm/1MHz	PASS

n66			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(h)(1)	≤ -13 dBm/1MHz.	PASS

Remark: For the verdict, the “N/A” denotes “not applicable”, the “N/T” denotes “not tested”.

n71			
Item	FCC Rule No.	Requirements	Result
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1MHz	PASS

Test detailed items/section required by FCC rules and results are as below:

Test Item	Test Engineer	Result	Method Determination /Remark
Radiated Spurious Emissions	HeChen	PASS	Nodeviation
Note 1: The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03 and ANSI/TIA-603-E-2016. Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table. Note 3: The declared of product specification for EUT presented in the report are provided by manufacturer and the test laboratory is not responsible for the accuracy of the information. Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.			

3. MEASUREMENT INSTRUMENTS LIST

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
1	Loop Antenna	Schwarzbeck	FMZB 1519	1519-025	01/18/2026	01/17/2028
2	Power Amplifier	HZEMC	HPA-9K0133	HYP A23029	01/20/2026	01/19/2027
3	Broadband Antenna	Schwarzbeck	VULB 9168	01763	01/29/2026	01/28/2028
4	Attenuator	PRM	ATT50-6-3	ATT50-6-3	01/20/2026	01/19/2027
5	Spectrum Analyzer	R&S	FSV40-N	101365	01/20/2026	01/19/2027
6	Horn Antenna	Schwarzbeck	BBHA 9120 D	02786	02/19/2026	02/18/2028
7	Horn Antenna	Schwarzbeck	ZLB7-18-40G-77	072410839	02/19/2026	02/18/2028
8	Power Amplifier	HZEMC	PA0118-43	HYP A23030	01/20/2026	01/19/2027
9	Power Amplifier	HZEMC	PA01840-45	HYP A23031	01/20/2026	01/19/2027
10	Keysight 5G NR+comprehensive testing instrument	ANRITSU	MT8000A	6272655242	02/09/2026	02/08/2027

Test Software		
Software name	Model	Version
Radiated Emission Measurement Software	FASLAB	V4.1

4. Radiated Spurious Emissions

4.1. LIMIT

According to FCC section 2.1051, section 22.917(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

According to FCC section 24.238(a) for n2, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

Additional to FCC section 22.917(a) for n5, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. This calculated to be -13dBm.

According to FCC section 27.53(g) for n12, n71, for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB.

According to FCC section 27.53(c)(2) for n13, any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB in a 100kHz bandwidth. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed. This calculated to be -13dBm.


According to FCC section 90.543(f) for n14, on any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10 \log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.

According to FCC section 27.53(m)(4) for n41, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB. This calculated to be -25dBm.


According to FCC section 27.53(h) for n66, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

4.2. TEST SETUP

Radiated Below 1GHz

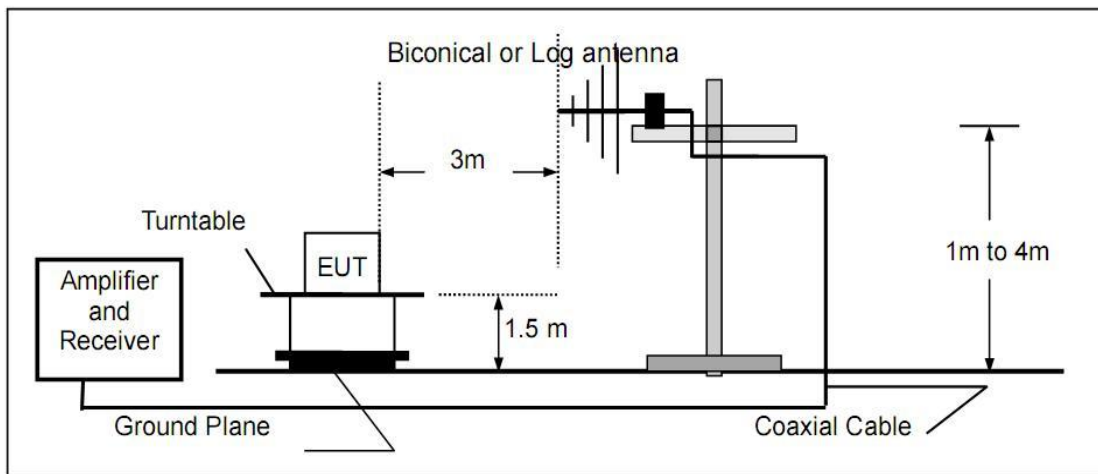



Radiated Above 1GHz

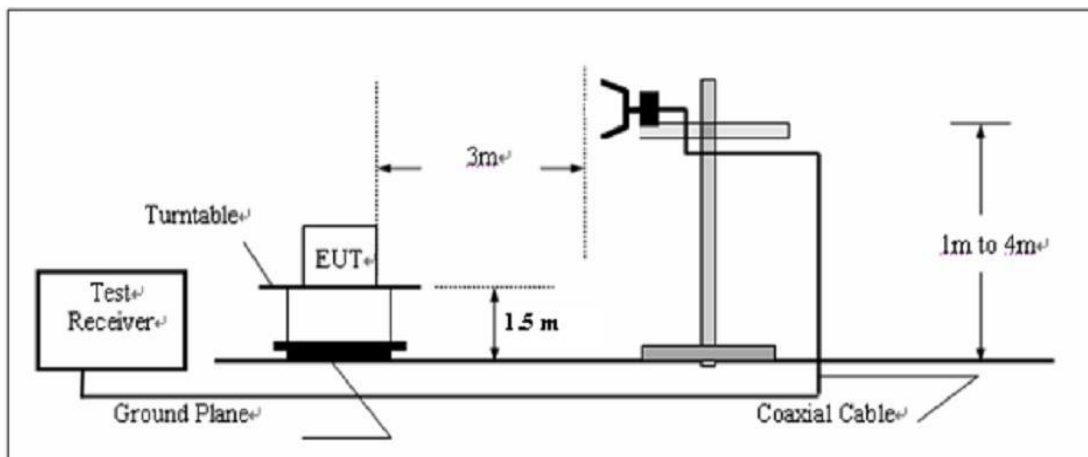

Substitution Method

Radiated Below 1GHz

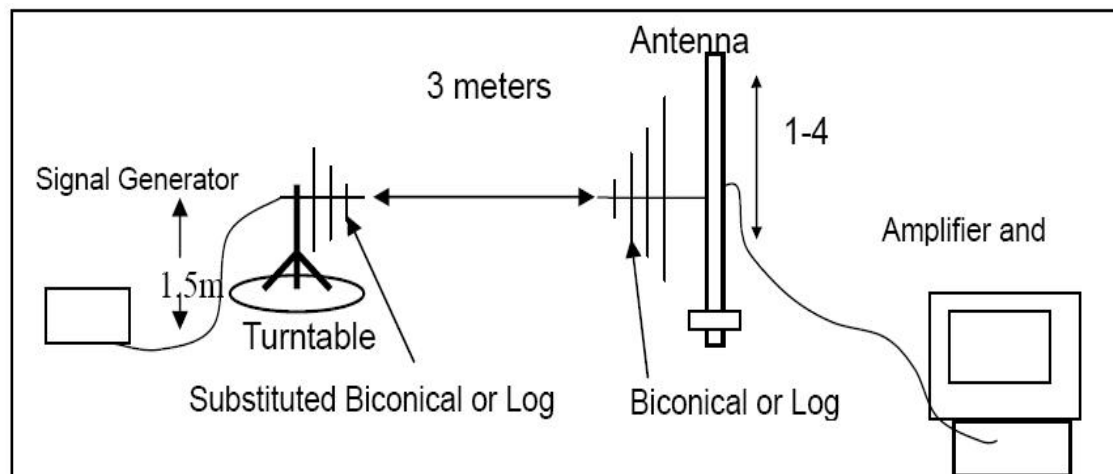

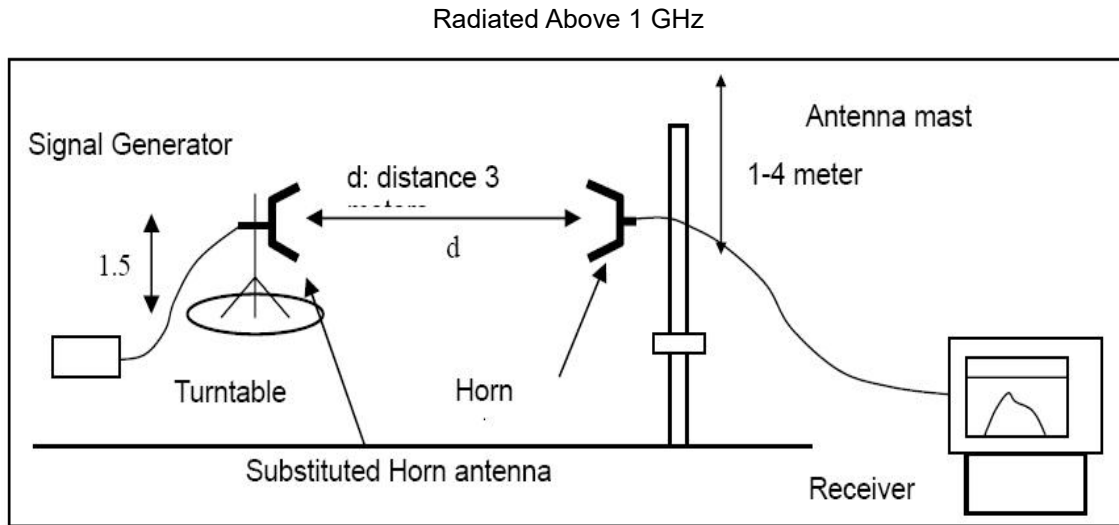

4.3. TEST PROCEDURE

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

4.4. TEST RESULT

Pass.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. Test Antenna height is varied from 1m to 4m above the ground, and the Turn Table is actuated to turn from 0° to 360°, both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The substitution corrections are obtained as described below:

$$ASUBST = PSUBST_TX - PSUBST_RX - LSUBST_CABLES + GSUBST_TX_ANT$$

$$ATOT = LCABLES + ASUBST$$

Where ASUBST is the final substitution correction including receive antenna gain.

PSUBST_TX is signal generator level,

PSUBST_RX is receiver level,

LSUBST_CABLES is cable losses including TX cable,

GSUBST_TX_ANT is substitution antenna gain.

ATOT is total correction factor including cable loss and substitution correction

During the test, the data of ATOT was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of ATOT.

Note1: The power of the EUT transmitting frequency should be ignored.

Note2: All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note3: All bandwidth and modulation were considered and evaluated respectively by performing full test for each band; only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.

The measurement data as follows:

n2_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	157.070	-69.62	2.41	-67.21	-13.00	-54.21	PK+	H
2	400.540	-69.42	4.75	-64.67	-13.00	-51.67	PK+	H
3	965.080	-67.66	15.44	-52.22	-13.00	-39.22	PK+	H
4	2853.000	-57.40	6.09	-51.31	-13.00	-38.31	PK+	H
5	6990.000	-57.04	6.06	-50.98	-13.00	-37.98	PK+	H
6	17992.500	-64.90	21.44	-43.46	-13.00	-30.46	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	146.400	-69.02	1.84	-67.18	-13.00	-54.18	PK+	V
2	455.830	-67.88	6.45	-61.43	-13.00	-48.43	PK+	V
3	902.030	-67.14	14.47	-52.67	-13.00	-39.67	PK+	V
4	2915.000	-57.69	6.18	-51.51	-13.00	-38.51	PK+	V
5	7545.000	-58.58	7.54	-51.04	-13.00	-38.04	PK+	V
6	17970.000	-64.78	21.25	-43.53	-13.00	-30.53	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n2_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	161.920	-67.84	2.21	-65.63	-13.00	-52.63	PK+	H
2	434.490	-69.10	5.97	-63.13	-13.00	-50.13	PK+	H
3	968.960	-67.99	15.36	-52.63	-13.00	-39.63	PK+	H
4	2950.000	-58.60	6.34	-52.26	-13.00	-39.26	PK+	H
5	8040.000	-60.26	7.94	-52.32	-13.00	-39.32	PK+	H
6	17992.500	-65.07	21.44	-43.63	-13.00	-30.63	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	150.280	-68.69	2.24	-66.45	-13.00	-53.45	PK+	V
2	410.240	-68.52	5.09	-63.43	-13.00	-50.43	PK+	V
3	940.830	-68.02	15.16	-52.86	-13.00	-39.86	PK+	V
4	2939.000	-58.14	6.29	-51.85	-13.00	-38.85	PK+	V
5	8842.500	-59.06	8.87	-50.19	-13.00	-37.19	PK+	V
6	17977.500	-64.76	21.31	-43.45	-13.00	-30.45	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n2_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	155.130	-69.39	2.35	-67.04	-13.00	-54.04	PK+	H
2	452.920	-67.99	6.45	-61.54	-13.00	-48.54	PK+	H
3	990.300	-68.85	15.86	-52.99	-13.00	-39.99	PK+	H
4	2797.000	-57.49	5.74	-51.75	-13.00	-38.75	PK+	H
5	6960.000	-58.76	5.94	-52.82	-13.00	-39.82	PK+	H
6	17872.500	-64.45	20.49	-43.96	-13.00	-30.96	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	165.800	-69.06	2.07	-66.99	-13.00	-53.99	PK+	V
2	403.450	-69.58	4.88	-64.70	-13.00	-51.7	PK+	V
3	977.690	-68.65	15.53	-53.12	-13.00	-40.12	PK+	V
4	2903.000	-59.01	6.12	-52.89	-13.00	-39.89	PK+	V
5	7155.000	-59.06	6.86	-52.20	-13.00	-39.2	PK+	V
6	17970.000	-65.20	21.25	-43.95	-13.00	-30.95	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n5_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	156.100	-68.49	2.21	-66.28	-13.00	-53.28	PK+	H
2	334.580	-67.76	3.1	-64.66	-13.00	-51.66	PK+	H
3	945.680	-67.36	14.49	-52.87	-13.00	-39.87	PK+	H
4	3000.000	-53.12	0.92	-52.20	-13.00	-39.2	PK+	H
5	5007.000	-55.11	1.67	-53.44	-13.00	-40.44	PK+	H
6	8991.000	-59.15	9.11	-50.04	-13.00	-37.04	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	155.130	-68.48	2.23	-66.25	-13.00	-53.25	PK+	V
2	360.770	-69.01	3.8	-65.21	-13.00	-52.21	PK+	V
3	938.890	-67.63	14.55	-53.08	-13.00	-40.08	PK+	V
4	1437.000	-49.66	-10.35	-60.01	-13.00	-47.01	PK+	V
5	3006.000	-54.48	0.36	-54.12	-13.00	-41.12	PK+	V
6	8406.000	-59.33	8.03	-51.30	-13.00	-38.3	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n5_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	139.610	-69.17	1.38	-67.79	-13.00	-54.79	PK+	H
2	474.260	-69.01	6.41	-62.60	-13.00	-49.6	PK+	H
3	996.120	-69.21	14.67	-54.54	-13.00	-41.54	PK+	H
4	3006.000	-54.35	0.36	-53.99	-13.00	-40.99	PK+	H
5	5010.000	-56.70	1.67	-55.03	-13.00	-42.03	PK+	H
6	8880.000	-60.53	8.89	-51.64	-13.00	-38.64	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	151.250	-69.79	2.18	-67.61	-13.00	-54.61	PK+	V
2	415.090	-69.24	4.95	-64.29	-13.00	-51.29	PK+	V
3	931.130	-69.35	14.48	-54.87	-13.00	-41.87	PK+	V
4	3000.000	-53.66	0.92	-52.74	-13.00	-39.74	PK+	V
5	5079.000	-56.23	1.85	-54.38	-13.00	-41.38	PK+	V
6	8109.000	-58.70	7.9	-50.80	-13.00	-37.8	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n5_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	154.160	-68.85	2.27	-66.58	-13.00	-53.58	PK+	H
2	424.790	-69.62	5.36	-64.26	-13.00	-51.26	PK+	H
3	947.620	-68.41	14.5	-53.91	-13.00	-40.91	PK+	H
4	3000.000	-55.44	0.92	-54.52	-13.00	-41.52	PK+	H
5	4560.000	-54.37	-0.43	-54.80	-13.00	-41.8	PK+	H
6	8985.000	-59.53	9.09	-50.44	-13.00	-37.44	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	153.190	-69.30	2.23	-67.07	-13.00	-54.07	PK+	V
2	346.220	-69.31	3.47	-65.84	-13.00	-52.84	PK+	V
3	907.850	-68.39	14.12	-54.27	-13.00	-41.27	PK+	V
4	1988.000	-51.80	-9.08	-60.88	-13.00	-47.88	PK+	V
5	3009.000	-53.63	0.09	-53.54	-13.00	-40.54	PK+	V
6	8214.000	-58.17	7.6	-50.57	-13.00	-37.57	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n12_1.4M Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	162.890	-69.80	2.1	-67.70	-13.00	-54.7	PK+	H
2	398.600	-68.83	4.43	-64.40	-13.00	-51.4	PK+	H
3	916.580	-68.96	14.04	-54.92	-13.00	-41.92	PK+	H
4	1830.000	-51.77	-9.99	-61.76	-13.00	-48.76	PK+	H
5	3000.000	-54.13	0.92	-53.21	-13.00	-40.21	PK+	H
6	7455.000	-58.63	7.48	-51.15	-13.00	-38.15	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	162.890	-67.97	2.1	-65.87	-13.00	-52.87	PK+	V
2	392.780	-68.43	4.37	-64.06	-13.00	-51.06	PK+	V
3	986.420	-68.75	14.64	-54.11	-13.00	-41.11	PK+	V
4	3000.000	-53.51	0.92	-52.59	-13.00	-39.59	PK+	V
5	4795.000	-55.12	0.13	-54.99	-13.00	-41.99	PK+	V
6	7477.500	-58.23	7.47	-50.76	-13.00	-37.76	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n12_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	174.530	-68.58	0.61	-67.97	-13.00	-54.97	PK+	H
2	370.470	-69.59	3.96	-65.63	-13.00	-52.63	PK+	H
3	986.420	-69.32	14.64	-54.68	-13.00	-41.68	PK+	H
4	3005.000	-54.51	0.46	-54.05	-13.00	-41.05	PK+	H
5	6582.500	-57.42	5.35	-52.07	-13.00	-39.07	PK+	H
6	7722.500	-60.02	7.48	-52.54	-13.00	-39.54	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	160.950	-69.16	2.07	-67.09	-13.00	-54.09	PK+	V
2	362.710	-68.76	3.77	-64.99	-13.00	-51.99	PK+	V
3	963.140	-68.90	14.49	-54.41	-13.00	-41.41	PK+	V
4	3000.000	-55.84	0.92	-54.92	-13.00	-41.92	PK+	V
5	6577.500	-57.42	5.33	-52.09	-13.00	-39.09	PK+	V
6	7905.000	-59.68	7.79	-51.89	-13.00	-38.89	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n12_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	140.580	-69.50	1.38	-68.12	-13.00	-55.12	PK+	H
2	388.900	-68.63	4.31	-64.32	-13.00	-51.32	PK+	H
3	987.390	-69.07	14.67	-54.40	-13.00	-41.4	PK+	H
4	3002.500	-55.60	0.69	-54.91	-13.00	-41.91	PK+	H
5	5002.500	-57.21	1.66	-55.55	-13.00	-42.55	PK+	H
6	6835.000	-57.88	5.6	-52.28	-13.00	-39.28	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	147.370	-69.42	1.89	-67.53	-13.00	-54.53	PK+	V
2	399.570	-69.84	4.43	-65.41	-13.00	-52.41	PK+	V
3	935.010	-68.17	14.32	-53.85	-13.00	-40.85	PK+	V
4	3002.500	-54.29	0.69	-53.60	-13.00	-40.6	PK+	V
5	5020.000	-56.66	1.68	-54.98	-13.00	-41.98	PK+	V
6	7455.000	-58.60	7.48	-51.12	-13.00	-38.12	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n13_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1167.000	-50.37	-10.48	-60.85	-13.00	-47.85	PK+	H
2	2079.000	-52.30	-8.48	-60.78	-13.00	-47.78	PK+	H
3	3002.500	-53.21	0.69	-52.52	-13.00	-39.52	PK+	H
4	4270.000	-54.50	-1.59	-56.09	-13.00	-43.09	PK+	H
5	5307.500	-54.93	1.51	-53.42	-13.00	-40.42	PK+	H
6	7312.500	-58.05	7.24	-50.81	-13.00	-37.81	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1342.000	-51.39	-10.39	-61.78	-13.00	-48.78	PK+	V
2	2203.000	-52.58	-7.88	-60.46	-13.00	-47.46	PK+	V
3	3000.000	-54.28	0.92	-53.36	-13.00	-40.36	PK+	V
4	4075.000	-54.57	-2.31	-56.88	-13.00	-43.88	PK+	V
5	5317.500	-55.35	1.5	-53.85	-13.00	-40.85	PK+	V
6	7312.500	-56.95	7.24	-49.71	-13.00	-36.71	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n13_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1331.000	-50.72	-10.37	-61.09	-13.00	-48.09	PK+	H
2	2052.000	-53.08	-8.66	-61.74	-13.00	-48.74	PK+	H
3	3015.000	-54.57	-0.47	-55.04	-13.00	-42.04	PK+	H
4	4875.000	-57.05	0.85	-56.20	-13.00	-43.2	PK+	H
5	6845.000	-58.52	5.62	-52.90	-13.00	-39.9	PK+	H
6	7685.000	-59.09	7.43	-51.66	-13.00	-38.66	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1006.000	-50.33	-9.06	-59.39	-13.00	-46.39	PK+	V
2	1978.000	-51.54	-9.14	-60.68	-13.00	-47.68	PK+	V
3	3002.500	-54.40	0.69	-53.71	-13.00	-40.71	PK+	V
4	5052.500	-56.42	1.72	-54.70	-13.00	-41.7	PK+	V
5	6667.500	-57.57	5.45	-52.12	-13.00	-39.12	PK+	V
6	7607.500	-59.08	7.49	-51.59	-13.00	-38.59	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n13_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1141.000	-50.12	-10.28	-60.40	-13.00	-47.4	PK+	H
2	1922.000	-52.49	-9.5	-61.99	-13.00	-48.99	PK+	H
3	3000.000	-54.36	0.92	-53.44	-13.00	-40.44	PK+	H
4	4367.500	-56.04	-1.14	-57.18	-13.00	-44.18	PK+	H
5	6580.000	-57.57	5.34	-52.23	-13.00	-39.23	PK+	H
6	7595.000	-58.19	7.51	-50.68	-13.00	-37.68	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1116.000	-49.46	-10.06	-59.52	-13.00	-46.52	PK+	V
2	1759.000	-52.62	-10.21	-62.83	-13.00	-49.83	PK+	V
3	3010.000	-54.39	-0.01	-54.40	-13.00	-41.4	PK+	V
4	4572.500	-56.23	-0.38	-56.61	-13.00	-43.61	PK+	V
5	6915.000	-57.85	5.84	-52.01	-13.00	-39.01	PK+	V
6	7937.500	-59.34	7.83	-51.51	-13.00	-38.51	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n14_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1436.000	-49.25	-10.35	-59.60	-13.00	-46.6	PK+	H
2	2081.000	-51.19	-8.47	-59.66	-13.00	-46.66	PK+	H
3	3002.500	-55.17	0.69	-54.48	-13.00	-41.48	PK+	H
4	4577.500	-56.05	-0.36	-56.41	-13.00	-43.41	PK+	H
5	6890.000	-57.84	5.78	-52.06	-13.00	-39.06	PK+	H
6	7612.500	-58.90	7.48	-51.42	-13.00	-38.42	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1037.000	-49.77	-9.37	-59.14	-13.00	-46.14	PK+	V
2	1438.000	-50.56	-10.35	-60.91	-13.00	-47.91	PK+	V
3	2310.000	-51.72	-7.85	-59.57	-13.00	-46.57	PK+	V
4	3007.500	-55.28	0.22	-55.06	-13.00	-42.06	PK+	V
5	5030.000	-56.62	1.69	-54.93	-13.00	-41.93	PK+	V
6	6910.000	-57.65	5.83	-51.82	-13.00	-38.82	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n14_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1083.000	-49.43	-9.78	-59.21	-13.00	-46.21	PK+	H
2	1821.000	-53.10	-10.03	-63.13	-13.00	-50.13	PK+	H
3	3000.000	-53.46	0.92	-52.54	-13.00	-39.54	PK+	H
4	5022.500	-54.98	1.68	-53.30	-13.00	-40.3	PK+	H
5	6917.500	-56.30	5.85	-50.45	-13.00	-37.45	PK+	H
6	7850.000	-57.85	7.73	-50.12	-13.00	-37.12	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1007.000	-49.97	-9.07	-59.04	-13.00	-46.04	PK+	V
2	1528.000	-51.33	-10.44	-61.77	-13.00	-48.77	PK+	V
3	2180.000	-52.07	-7.97	-60.04	-13.00	-47.04	PK+	V
4	3010.000	-52.53	-0.01	-52.54	-13.00	-39.54	PK+	V
5	5085.000	-55.58	1.88	-53.70	-13.00	-40.7	PK+	V
6	7447.500	-57.77	7.48	-50.29	-13.00	-37.29	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n14_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1076.000	-50.73	-9.72	-60.45	-13.00	-47.45	PK+	H
2	1596.000	-51.69	-10.44	-62.13	-13.00	-49.13	PK+	H
3	2204.000	-52.57	-7.88	-60.45	-13.00	-47.45	PK+	H
4	3000.000	-53.69	0.92	-52.77	-13.00	-39.77	PK+	H
5	5012.500	-55.44	1.67	-53.77	-13.00	-40.77	PK+	H
6	7375.000	-58.20	7.32	-50.88	-13.00	-37.88	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1054.000	-48.61	-9.53	-58.14	-13.00	-45.14	PK+	V
2	1441.000	-49.33	-10.35	-59.68	-13.00	-46.68	PK+	V
3	2223.000	-51.02	-7.86	-58.88	-13.00	-45.88	PK+	V
4	3000.000	-53.67	0.92	-52.75	-13.00	-39.75	PK+	V
5	6985.000	-57.25	6.04	-51.21	-13.00	-38.21	PK+	V
6	7915.000	-58.66	7.8	-50.86	-13.00	-37.86	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n41_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	154.160	-69.52	2.37	-67.15	-25.00	-42.15	PK+	H
2	431.580	-70.21	5.88	-64.33	-25.00	-39.33	PK+	H
3	990.300	-68.65	15.86	-52.79	-25.00	-27.79	PK+	H
4	2697.000	-58.37	6.79	-51.58	-25.00	-26.58	PK+	H
5	6420.000	-57.25	4.97	-52.28	-25.00	-27.28	PK+	H
6	17955.000	-65.10	21.13	-43.97	-25.00	-18.97	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	159.010	-69.44	2.47	-66.97	-25.00	-41.97	PK+	V
2	445.160	-69.66	6.26	-63.40	-25.00	-38.4	PK+	V
3	992.240	-69.12	15.83	-53.29	-25.00	-28.29	PK+	V
4	2773.000	-57.87	6.97	-50.90	-25.00	-25.9	PK+	V
5	7597.500	-59.46	7.51	-51.95	-25.00	-26.95	PK+	V
6	17992.500	-65.65	21.44	-44.21	-25.00	-19.21	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n41_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	153.190	-68.95	2.3	-66.65	-25.00	-41.65	PK+	H
2	427.700	-68.66	5.76	-62.90	-25.00	-37.9	PK+	H
3	981.570	-68.73	15.56	-53.17	-25.00	-28.17	PK+	H
4	2809.000	-58.04	6.81	-51.23	-25.00	-26.23	PK+	H
5	7470.000	-59.06	7.48	-51.58	-25.00	-26.58	PK+	H
6	17812.500	-63.29	20.09	-43.20	-25.00	-18.2	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	153.190	-68.77	2.3	-66.47	-25.00	-41.47	PK+	V
2	446.130	-67.53	6.3	-61.23	-25.00	-36.23	PK+	V
3	991.270	-68.19	15.84	-52.35	-25.00	-27.35	PK+	V
4	2880.000	-58.61	6.84	-51.77	-25.00	-26.77	PK+	V
5	9450.000	-60.10	10	-50.10	-25.00	-25.1	PK+	V
6	17977.500	-64.89	21.31	-43.58	-25.00	-18.58	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n41_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	156.100	-69.34	2.34	-67.00	-25.00	-42	PK+	H
2	462.620	-68.87	6.5	-62.37	-25.00	-37.37	PK+	H
3	991.270	-68.72	15.84	-52.88	-25.00	-27.88	PK+	H
4	2907.000	-58.00	6.9	-51.10	-25.00	-26.1	PK+	H
5	6435.000	-56.58	5	-51.58	-25.00	-26.58	PK+	H
6	17970.000	-64.26	21.25	-43.01	-25.00	-18.01	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	149.310	-69.66	2.18	-67.48	-25.00	-42.48	PK+	V
2	496.570	-68.72	7.14	-61.58	-25.00	-36.58	PK+	V
3	999.030	-69.03	15.88	-53.15	-25.00	-28.15	PK+	V
4	2833.000	-57.66	6.73	-50.93	-25.00	-25.93	PK+	V
5	6982.500	-57.19	6.03	-51.16	-25.00	-26.16	PK+	V
6	17992.500	-63.87	21.44	-42.43	-25.00	-17.43	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n66_1.4M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	153.190	-69.31	2.3	-67.01	-13.00	-54.01	PK+	H
2	448.070	-69.99	6.38	-63.61	-13.00	-50.61	PK+	H
3	976.720	-70.04	15.53	-54.51	-13.00	-41.51	PK+	H
4	2890.000	-57.88	6.17	-51.71	-13.00	-38.71	PK+	H
5	7650.000	-58.42	7.38	-51.04	-13.00	-38.04	PK+	H
6	17835.000	-63.11	20.26	-42.85	-13.00	-29.85	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	149.310	-68.45	2.18	-66.27	-13.00	-53.27	PK+	V
2	420.910	-68.39	5.48	-62.91	-13.00	-49.91	PK+	V
3	987.390	-69.94	15.75	-54.19	-13.00	-41.19	PK+	V
4	2800.000	-57.97	5.78	-52.19	-13.00	-39.19	PK+	V
5	7297.500	-58.79	7.21	-51.58	-13.00	-38.58	PK+	V
6	17940.000	-63.98	21	-42.98	-13.00	-29.98	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n66_1.4M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	166.770	-69.02	1.89	-67.13	-13.00	-54.13	PK+	H
2	352.040	-68.79	3.62	-65.17	-13.00	-52.17	PK+	H
3	962.170	-69.62	15.38	-54.24	-13.00	-41.24	PK+	H
4	2946.000	-58.38	6.34	-52.04	-13.00	-39.04	PK+	H
5	7537.500	-58.33	7.54	-50.79	-13.00	-37.79	PK+	H
6	17992.500	-64.05	21.44	-42.61	-13.00	-29.61	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	150.280	-69.24	2.24	-67.00	-13.00	-54	PK+	V
2	406.360	-69.53	4.98	-64.55	-13.00	-51.55	PK+	V
3	972.840	-68.78	15.44	-53.34	-13.00	-40.34	PK+	V
4	2942.000	-58.86	6.33	-52.53	-13.00	-39.53	PK+	V
5	7320.000	-58.77	7.26	-51.51	-13.00	-38.51	PK+	V
6	17880.000	-64.53	20.54	-43.99	-13.00	-30.99	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n66_1.4M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	163.860	-69.64	2.27	-67.37	-13.00	-54.37	PK+	H
2	448.070	-68.69	6.38	-62.31	-13.00	-49.31	PK+	H
3	967.990	-68.40	15.38	-53.02	-13.00	-40.02	PK+	H
4	2876.000	-59.24	6.12	-53.12	-13.00	-40.12	PK+	H
5	8722.500	-59.76	8.83	-50.93	-13.00	-37.93	PK+	H
6	17932.500	-64.39	20.94	-43.45	-13.00	-30.45	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	156.100	-70.48	2.34	-68.14	-13.00	-55.14	PK+	V
2	412.180	-69.66	5.14	-64.52	-13.00	-51.52	PK+	V
3	999.030	-69.60	15.88	-53.72	-13.00	-40.72	PK+	V
4	2883.000	-57.90	6.15	-51.75	-13.00	-38.75	PK+	V
5	7230.000	-58.29	7.09	-51.20	-13.00	-38.2	PK+	V
6	17850.000	-62.62	20.35	-42.27	-13.00	-29.27	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n71_5M_Low Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1018.000	-50.95	-9.18	-60.13	-13.00	-47.13	PK+	H
2	1376.000	-51.91	-10.36	-62.27	-13.00	-49.27	PK+	H
3	2185.000	-51.89	-7.95	-59.84	-13.00	-46.84	PK+	H
4	3672.000	-54.52	-3.45	-57.97	-13.00	-44.97	PK+	H
5	4944.000	-56.00	1.38	-54.62	-13.00	-41.62	PK+	H
6	6722.000	-56.95	5.47	-51.48	-13.00	-38.48	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1082.000	-50.26	-9.77	-60.03	-13.00	-47.03	PK+	V
2	1450.000	-50.97	-10.36	-61.33	-13.00	-48.33	PK+	V
3	2137.000	-51.92	-8.17	-60.09	-13.00	-47.09	PK+	V
4	3006.000	-53.55	0.36	-53.19	-13.00	-40.19	PK+	V
5	3864.000	-54.52	-2.87	-57.39	-13.00	-44.39	PK+	V
6	6978.000	-57.66	6.01	-51.65	-13.00	-38.65	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n71_5M_Middle Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1041.000	-49.59	-9.41	-59.00	-13.00	-46	PK+	H
2	1471.000	-50.53	-10.38	-60.91	-13.00	-47.91	PK+	H
3	2163.000	-51.44	-8.05	-59.49	-13.00	-46.49	PK+	H
4	3000.000	-53.53	0.92	-52.61	-13.00	-39.61	PK+	H
5	4218.000	-54.43	-1.8	-56.23	-13.00	-43.23	PK+	H
6	6906.000	-56.88	5.83	-51.05	-13.00	-38.05	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1038.000	-48.25	-9.38	-57.63	-13.00	-44.63	PK+	V
2	1348.000	-50.15	-10.39	-60.54	-13.00	-47.54	PK+	V
3	2194.000	-50.77	-7.91	-58.68	-13.00	-45.68	PK+	V
4	4278.000	-55.21	-1.55	-56.76	-13.00	-43.76	PK+	V
5	5528.000	-56.22	2.16	-54.06	-13.00	-41.06	PK+	V
6	6902.000	-57.33	5.82	-51.51	-13.00	-38.51	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

n71_5M_High Channel								
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1037.000	-50.74	-9.37	-60.11	-13.00	-47.11	PK+	H
2	1734.000	-51.08	-10.28	-61.36	-13.00	-48.36	PK+	H
3	3004.000	-55.38	0.55	-54.83	-13.00	-41.83	PK+	H
4	4548.000	-55.31	-0.48	-55.79	-13.00	-42.79	PK+	H
5	6046.000	-57.51	3.34	-54.17	-13.00	-41.17	PK+	H
6	6902.000	-57.80	5.82	-51.98	-13.00	-38.98	PK+	H
No.	Freq. (MHz)	Reading (dBm)	Corr. (dB)	Meas. (dBm)	Limit (dBm)	Margin (dB)	Det.	Pol.
1	1040.000	-50.34	-9.4	-59.74	-13.00	-46.74	PK+	V
2	1462.000	-51.65	-10.37	-62.02	-13.00	-49.02	PK+	V
3	2086.000	-52.36	-8.43	-60.79	-13.00	-47.79	PK+	V
4	3792.000	-53.93	-2.97	-56.90	-13.00	-43.9	PK+	V
5	5018.000	-55.42	1.68	-53.74	-13.00	-40.74	PK+	V
6	6906.000	-57.16	5.83	-51.33	-13.00	-38.33	PK+	V
Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics. The emission levels of other frequencies are attenuated 20dB below the limit and not recorded in report.								

5. PHOTOGRAPHS OF TEST SETUP

Please refer to Appendix A for Test Setup Photos of the EUT.

6. PHOTOGRAPHS OF THE EUT

Please refer to Appendix B for External Photos of the EUT.

*****THE END*****