


Test Report

Project Information			
Customer:	Command Studio Digital Console		
EUT:			
Model:		SN:	
Mode:	11N40_5310	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-01-03 20:20:46

Test Graph

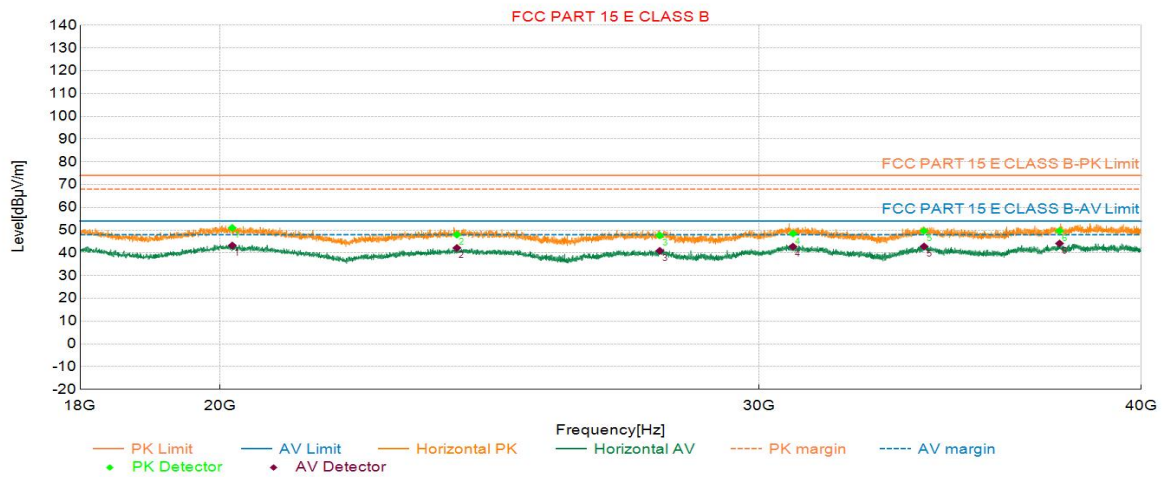

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV/m)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20184.82	40.85	10.11	50.96	74.00	23.04	100	320	Horizontal
2	23900.99	35.92	12.06	47.98	74.00	26.02	100	290	Horizontal
3	27843.78	38.98	8.66	47.64	74.00	26.36	100	80	Horizontal
4	30778.88	33.78	14.69	48.47	74.00	25.53	100	170	Horizontal
5	33967.00	35.73	13.92	49.65	74.00	24.35	100	330	Horizontal
6	37612.76	36.00	13.67	49.67	74.00	24.33	100	230	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20184.82	33.11	10.11	43.22	54.00	10.78	100	320	Horizontal
2	23900.99	30.09	12.06	42.15	54.00	11.85	100	290	Horizontal
3	27843.78	32.23	8.66	40.89	54.00	13.11	100	80	Horizontal
4	30778.88	28.05	14.69	42.74	54.00	11.26	100	170	Horizontal
5	33967.00	28.91	13.92	42.83	54.00	11.17	100	330	Horizontal
6	37612.76	30.45	13.67	44.12	54.00	9.88	100	230	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	Command Studio Digital Console		
EUT:			
Model:		SN:	
Mode:	11N40_5310	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-01-03 20:25:17

Test Graph

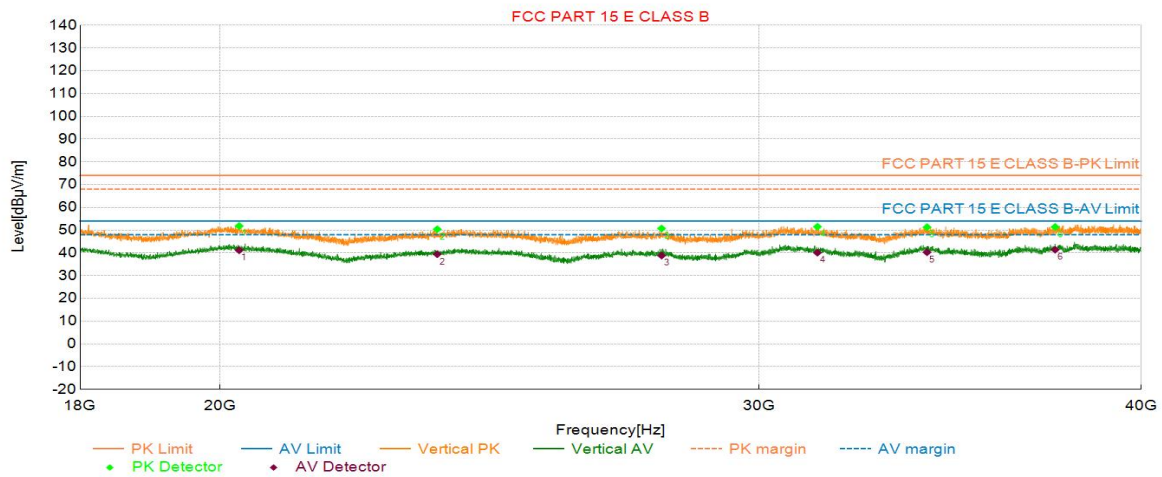

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV/m)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20290.43	41.79	10.03	51.82	74.00	22.18	100	360	Vertical
2	23551.16	38.82	11.55	50.37	74.00	23.63	100	20	Vertical
3	27881.19	42	8.70	50.70	74.00	23.30	100	210	Vertical
4	31350.94	36.8	14.69	51.49	74.00	22.51	100	300	Vertical
5	34044.00	37.28	13.99	51.27	74.00	22.73	100	220	Vertical
6	37487.35	37.9	13.48	51.38	74.00	22.62	100	170	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20290.43	31.12	10.03	41.15	54.00	12.85	100	360	Vertical
2	23551.16	27.85	11.55	39.40	54.00	14.60	100	20	Vertical
3	27881.19	30.12	8.70	38.82	54.00	15.18	100	210	Vertical
4	31350.94	25.40	14.69	40.09	54.00	13.91	100	300	Vertical
5	34044.00	26.27	13.99	40.26	54.00	13.74	100	220	Vertical
6	37487.35	27.90	13.48	41.38	54.00	12.62	100	170	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	Command Studio Digital Console		
EUT:			
Model:		SN:	
Mode:	11N40_5510	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-01-03 20:21:51

Test Graph

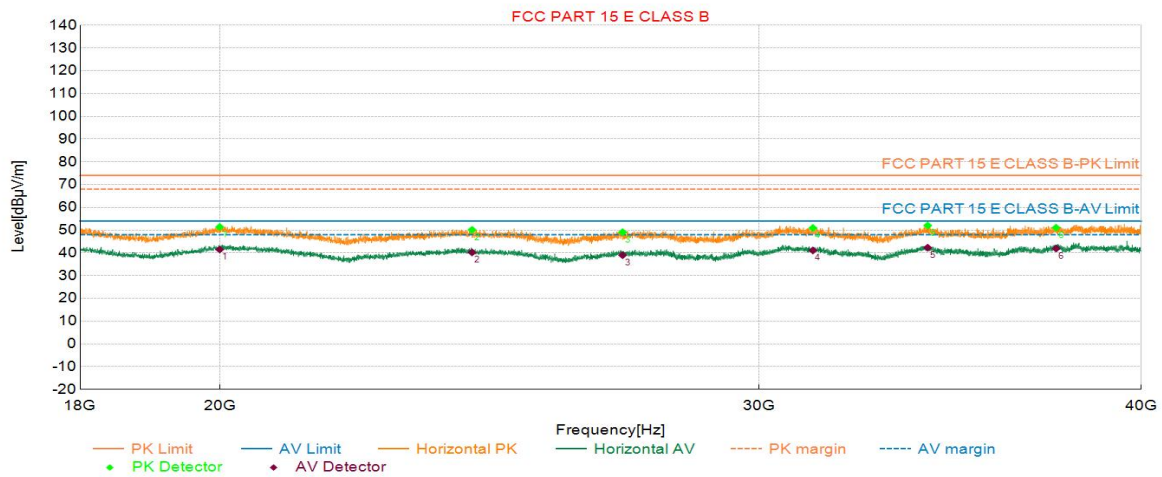

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV/m)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19995.60	41.15	10.24	51.39	74.00	22.61	100	30	Horizontal
2	24176.02	37.97	12.14	50.11	74.00	23.89	100	90	Horizontal
3	27075.91	41.34	7.75	49.09	74.00	24.91	100	250	Horizontal
4	31243.12	36.05	14.89	50.94	74.00	23.06	100	270	Horizontal
5	34061.61	38.06	13.96	52.02	74.00	21.98	100	60	Horizontal
6	37515.95	37.55	13.52	51.07	74.00	22.93	100	350	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	19995.60	31.22	10.24	41.46	54.00	12.54	100	30	Horizontal
2	24176.02	28.06	12.14	40.20	54.00	13.80	100	90	Horizontal
3	27075.91	31.23	7.75	38.98	54.00	15.02	100	250	Horizontal
4	31243.12	26.18	14.89	41.07	54.00	12.93	100	270	Horizontal
5	34061.61	28.32	13.96	42.28	54.00	11.72	100	60	Horizontal
6	37515.95	28.40	13.52	41.92	54.00	12.08	100	350	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	Command Studio Digital Console		
EUT:			
Model:		SN:	
Mode:	11N40_5510	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-01-03 20:25:54

Test Graph

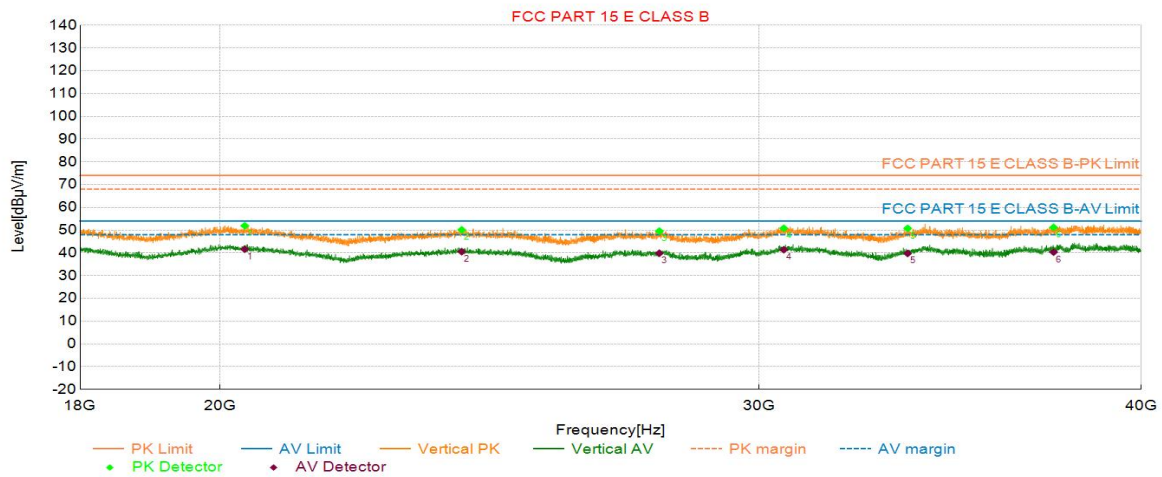

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV/m)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20376.24	41.92	9.96	51.88	74.00	22.12	100	270	Vertical
2	23989.00	37.94	12.19	50.13	74.00	23.87	100	350	Vertical
3	27834.98	40.93	8.65	49.58	74.00	24.42	100	80	Vertical
4	30567.66	36.72	14.07	50.79	74.00	23.21	100	200	Vertical
5	33551.16	38.73	12.02	50.75	74.00	23.25	100	170	Vertical
6	37445.54	37.74	13.45	51.19	74.00	22.81	100	240	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20376.24	31.64	9.96	41.60	54.00	12.40	100	270	Vertical
2	23989.00	28.35	12.19	40.54	54.00	13.46	100	350	Vertical
3	27834.98	31.19	8.65	39.84	54.00	14.16	100	80	Vertical
4	30567.66	27.34	14.07	41.41	54.00	12.59	100	200	Vertical
5	33551.16	27.72	12.02	39.74	54.00	14.26	100	170	Vertical
6	37445.54	26.89	13.45	40.34	54.00	13.66	100	240	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	Command Studio Digital Console		
EUT:			
Model:		SN:	
Mode:	11N40_5755	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-01-03 20:23:01

Test Graph

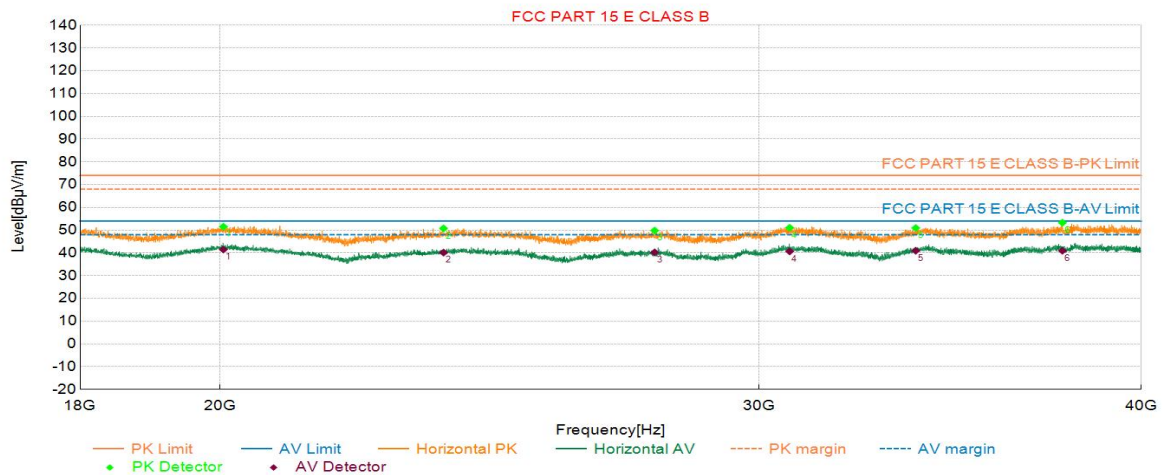

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV/m)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20050.61	41.28	10.22	51.50	74.00	22.50	100	240	Horizontal
2	23663.37	39.04	11.72	50.76	74.00	23.24	100	350	Horizontal
3	27735.97	41.28	8.54	49.82	74.00	24.18	100	260	Horizontal
4	30701.87	36.58	14.46	51.04	74.00	22.96	100	310	Horizontal
5	33755.78	37.96	12.96	50.92	74.00	23.08	100	60	Horizontal
6	37694.17	39.45	13.80	53.25	74.00	20.75	100	310	Horizontal

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20050.61	31.26	10.22	41.48	54.00	12.52	100	240	Horizontal
2	23663.37	28.40	11.72	40.12	54.00	13.88	100	350	Horizontal
3	27735.97	31.68	8.54	40.22	54.00	13.78	100	260	Horizontal
4	30701.87	26.19	14.46	40.65	54.00	13.35	100	310	Horizontal
5	33755.78	27.99	12.96	40.95	54.00	13.05	100	60	Horizontal
6	37694.17	27.14	13.80	40.94	54.00	13.06	100	310	Horizontal

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:	Command Studio Digital Console		
EUT:			
Model:		SN:	
Mode:	11N40_5755	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2026-01-03 20:26:21

Test Graph

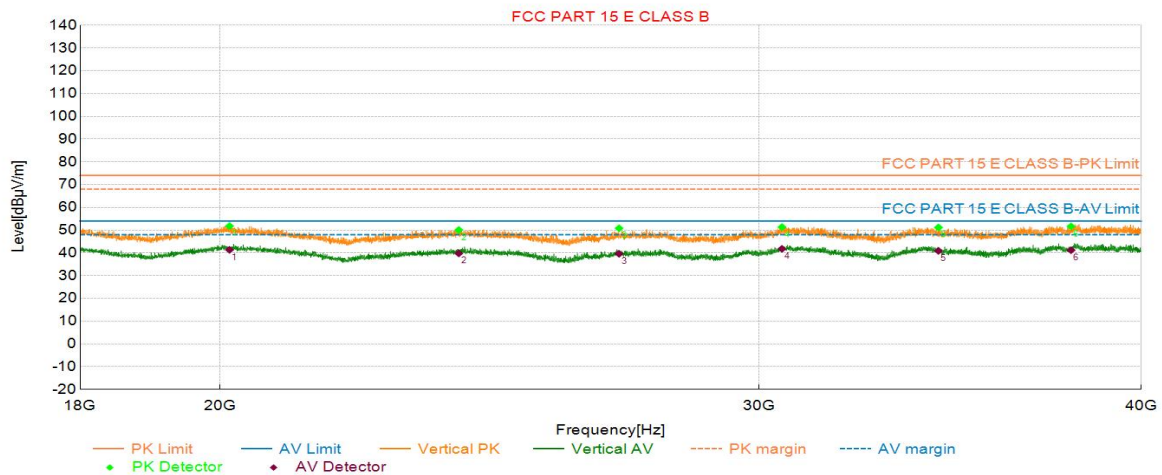

PK Final Data List

NO.	Freq. (MHz)	PK Reading (dBμV/m)	Factor (dB)	PK Value (dBμV/m)	PK Limit (dBμV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20143.01	41.62	10.15	51.77	74.00	22.23	100	210	Vertical
2	23936.19	37.93	12.11	50.04	74.00	23.96	100	140	Vertical
3	27003.30	43.16	7.65	50.81	74.00	23.19	100	280	Vertical
4	30523.65	37.39	13.93	51.32	74.00	22.68	100	220	Vertical
5	34336.63	37.73	13.43	51.16	74.00	22.84	100	30	Vertical
6	37940.59	37.44	14.20	51.64	74.00	22.36	100	120	Vertical

AV Final Data List

NO.	Freq. (MHz)	AV Reading (dBμV/m)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	20143.01	31.18	10.15	41.33	54.00	12.67	100	210	Vertical
2	23936.19	27.66	12.11	39.77	54.00	14.23	100	140	Vertical
3	27003.30	31.94	7.65	39.59	54.00	14.41	100	280	Vertical
4	30523.65	27.84	13.93	41.77	54.00	12.23	100	220	Vertical
5	34336.63	27.46	13.43	40.89	54.00	13.11	100	30	Vertical
6	37940.59	26.98	14.20	41.18	54.00	12.82	100	120	Vertical

Note1: PK Value=PK Reading + Factor, PK Margin=PK Limit - PK Value


Note2: AV Value=AV Reading + Factor, AV Margin=AV Limit - AV Value

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5180	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 11:20:00

Test Graph

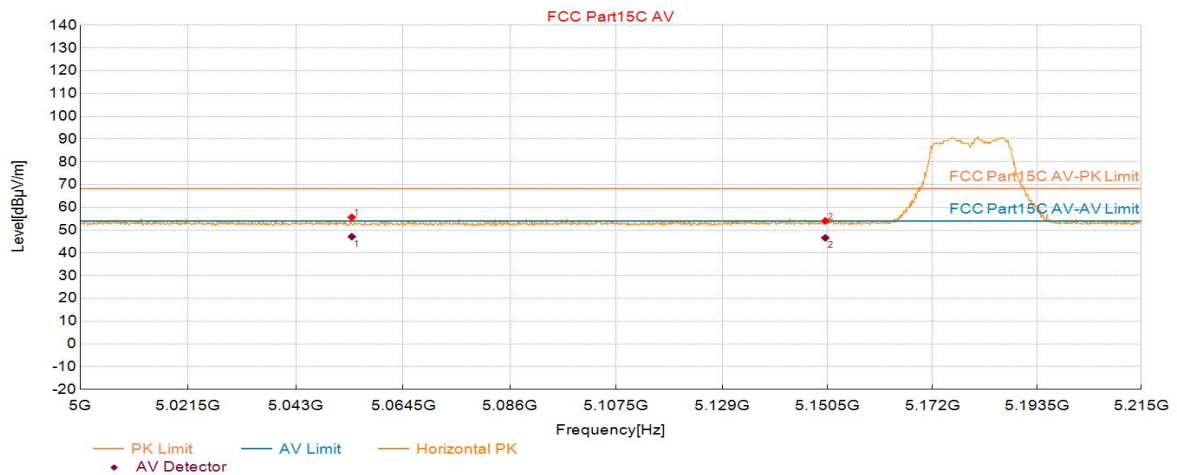

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5054.21	37.85	55.62	17.77	68.20	12.58	150	300	Horizontal
2	5150.04	36.19	54.01	17.82	68.20	14.19	150	310	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5054.21	17.77	47.11	54.00	6.89	150	300	Horizontal
2	5150.04	17.82	46.59	54.00	7.41	150	310	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5180	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 11:20:40

Test Graph

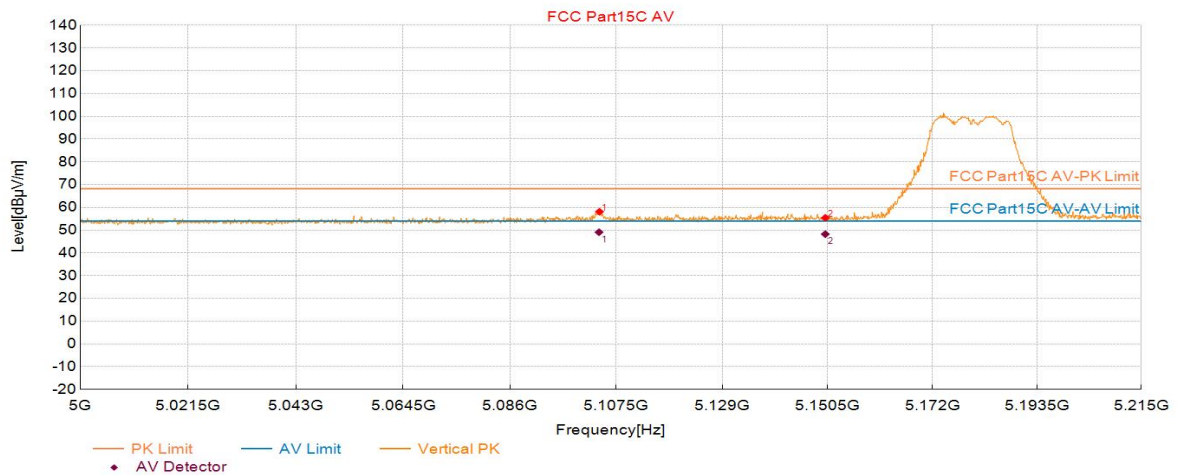

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5104.11	40.29	58.07	17.78	68.20	10.13	150	176	Vertical
2	5150.04	37.56	55.38	17.82	68.20	12.82	150	185	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5104.02	17.78	49.08	54.00	4.92	150	273.6	Vertical
2	5150.04	17.82	48.23	54.00	5.77	150	185	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5320	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 11:39:40

Test Graph

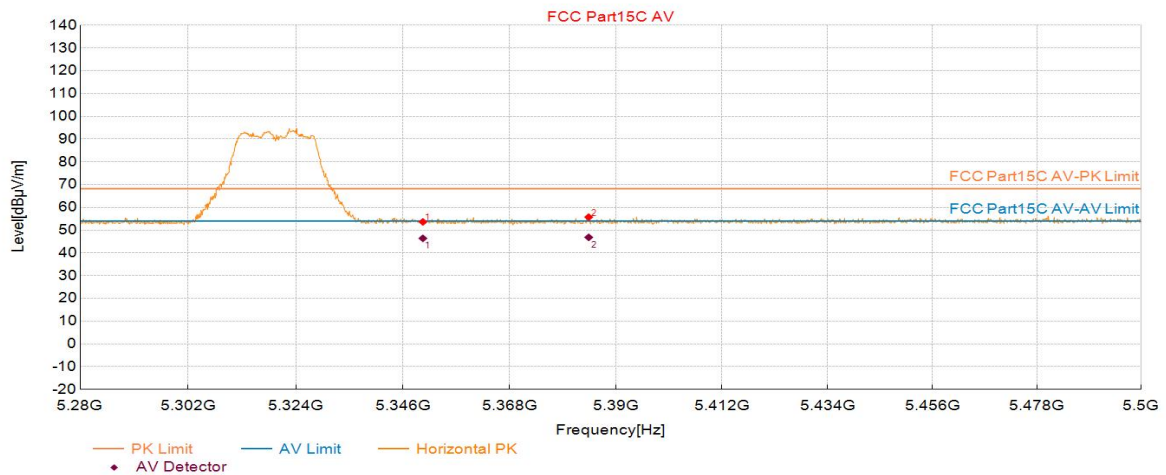

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	35.32	53.60	18.28	68.20	14.60	150	119	Horizontal
2	5384.33	37.24	55.69	18.45	68.20	12.51	150	261	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	18.28	46.38	54.00	7.62	150	119	Horizontal
2	5384.33	18.45	46.82	54.00	7.18	150	261	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5320	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 11:34:21

Test Graph

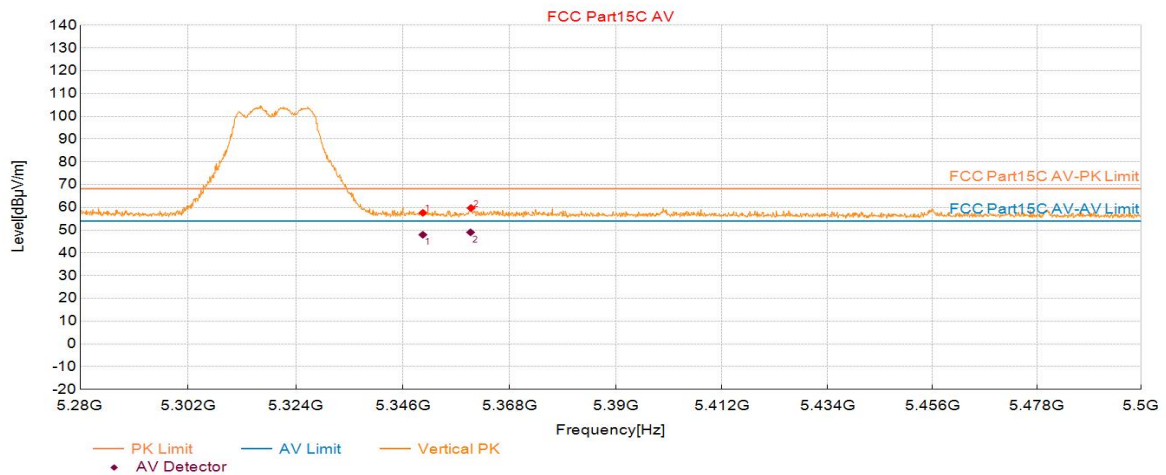

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	39.32	57.60	18.28	68.20	10.60	150	79	Vertical
2	5360.01	41.37	59.70	18.33	68.20	8.50	150	170	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	18.28	47.95	54.00	6.05	150	79	Vertical
2	5359.92	18.33	49.02	54.00	4.98	150	166.1	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5500	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 11:48:48

Test Graph

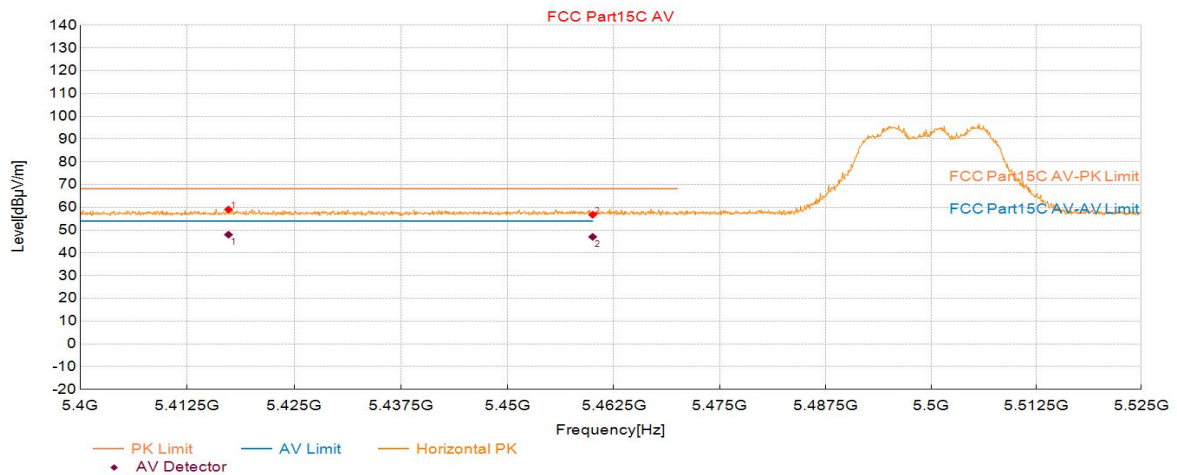

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5417.32	40.49	59.06	18.57	68.20	9.14	150	194	Horizontal
2	5460.03	38.09	56.74	18.65	68.20	11.46	150	232	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5417.32	18.57	47.98	54.00	6.02	150	194	Horizontal
2	5460.00	18.65	47.02	54.00	6.98	150	232	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5500	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 11:49:27

Test Graph

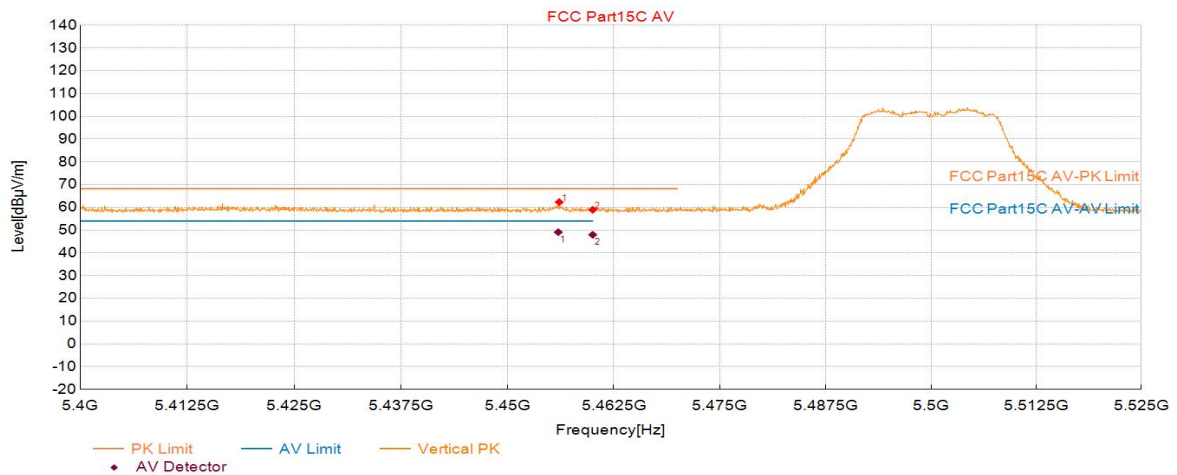

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.09	43.66	62.31	18.65	68.20	5.89	150	109	Vertical
2	5460.03	40.26	58.91	18.65	68.20	9.29	150	0	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.98	18.65	49.08	54.00	4.92	150	112.5	Vertical
2	5460.00	18.65	47.95	54.00	6.05	150	0	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5700	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 12:04:40

Test Graph

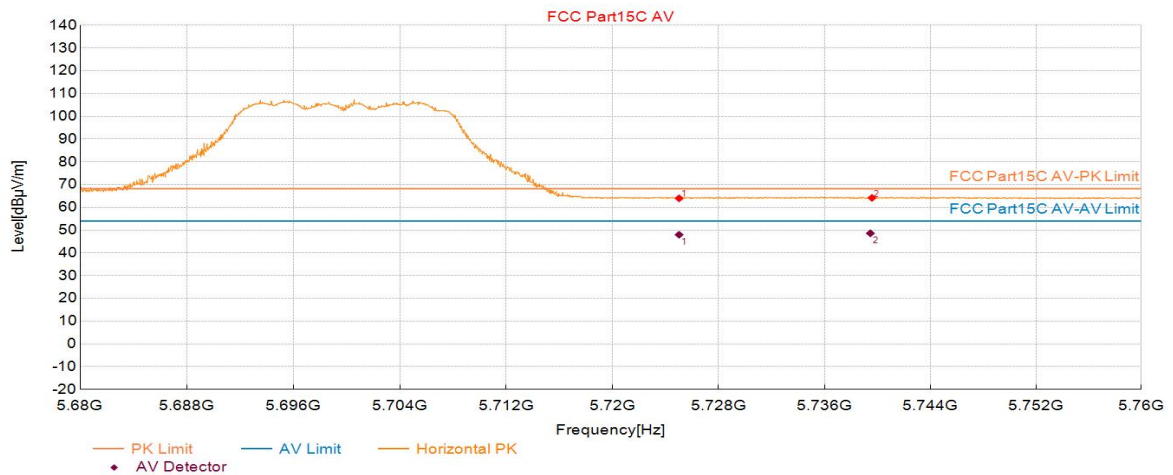

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	44.11	63.97	19.86	68.20	4.23	150	115	Horizontal
2	5739.59	44.24	64.17	19.93	68.20	4.03	150	33	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	19.86	47.96	54.00	6.04	150	115	Horizontal
2	5739.47	19.93	48.59	54.00	5.41	150	358	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11A_5700	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 12:00:49

Test Graph

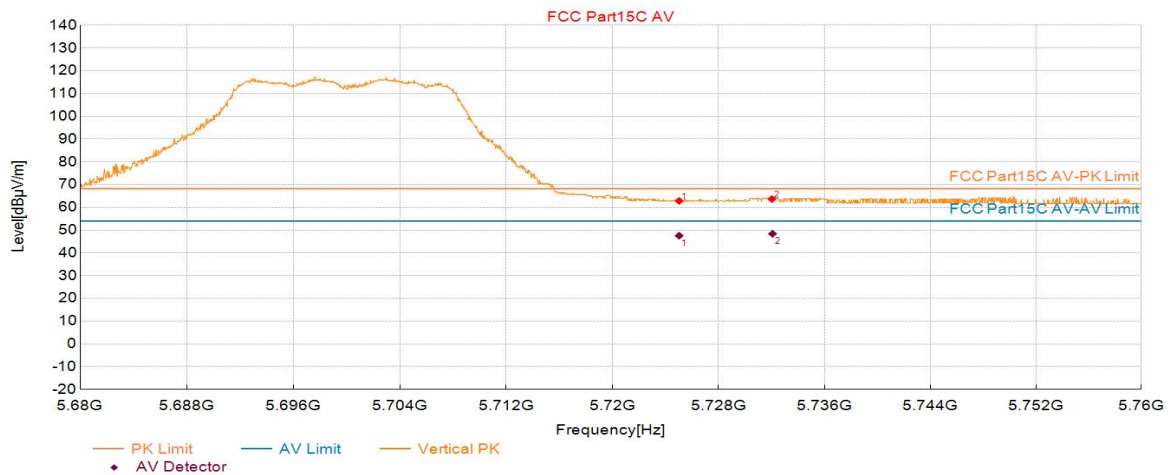

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	42.96	62.82	19.86	68.20	5.38	150	37	Vertical
2	5732.03	43.77	63.66	19.89	68.20	4.54	150	54	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.02	19.86	47.52	54.00	6.48	150	37	Vertical
2	5732.07	19.89	48.36	54.00	5.64	150	93.6	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11N20_5180	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:	Power Set:3		

Start of Test:2025-10-17 14:14:10

Test Graph

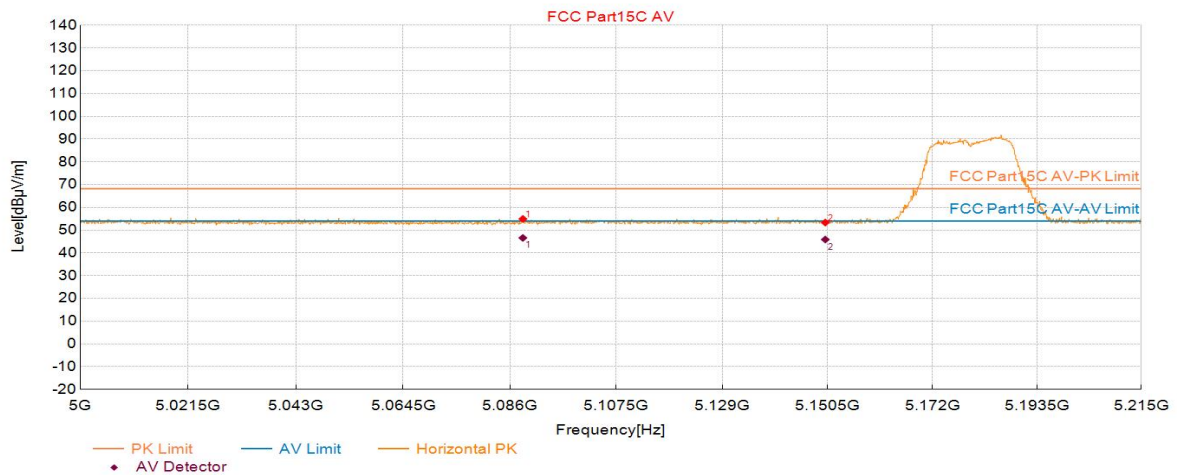

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5088.62	37.13	54.91	17.78	68.20	13.29	150	160	Horizontal
2	5150.04	35.48	53.30	17.82	68.20	14.90	150	155	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5088.62	17.78	46.57	54.00	7.43	150	160	Horizontal
2	5150.04	17.82	45.86	54.00	8.14	150	155	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11N20_5180	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:	Power Set:3		

Start of Test:2025-10-17 14:14:50

Test Graph

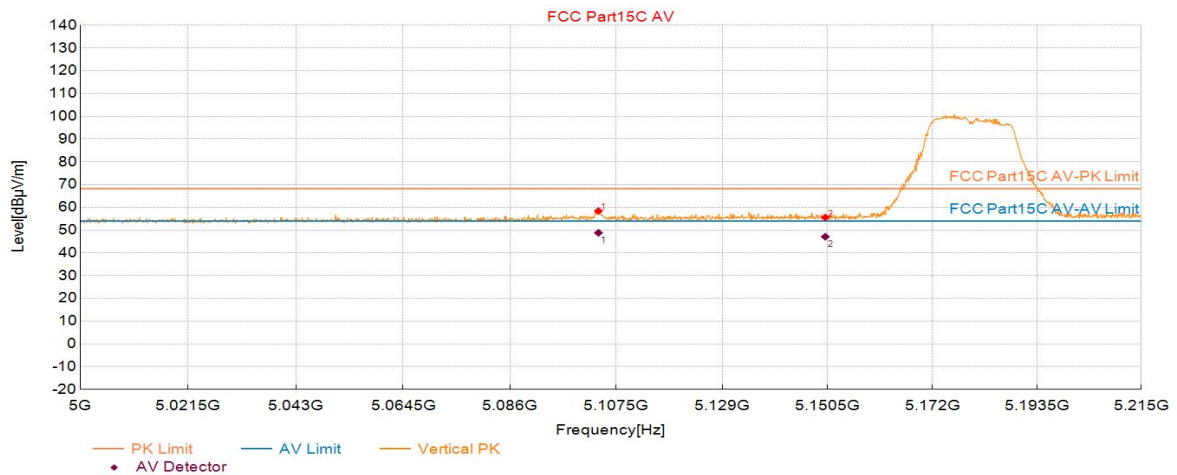

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5103.90	40.63	58.41	17.78	68.20	9.79	150	168	Vertical
2	5150.04	37.69	55.51	17.82	68.20	12.69	150	179	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5103.90	17.78	48.82	54.00	5.18	150	274.3	Vertical
2	5150.04	17.82	47.09	54.00	6.91	150	179	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11N20_5320	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 14:41:25

Test Graph

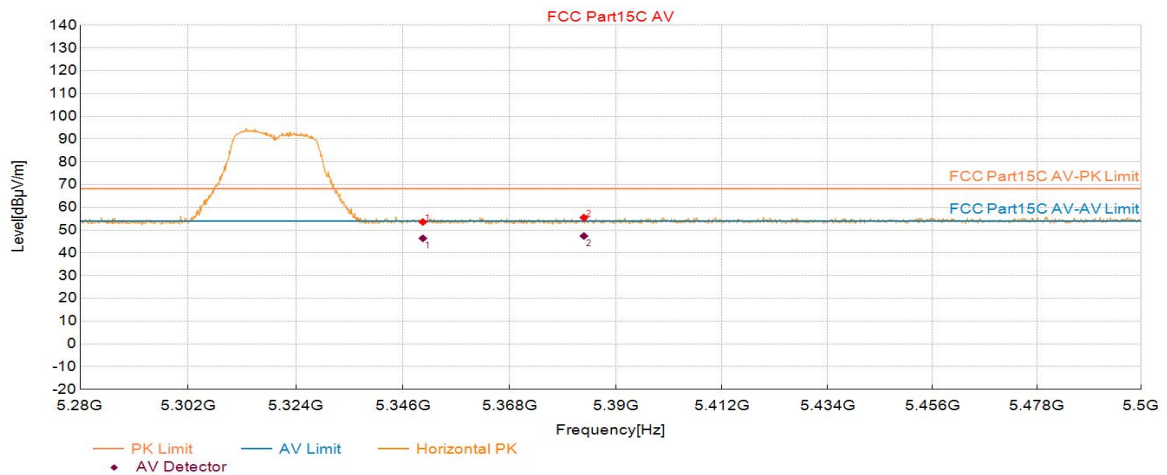

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	35.27	53.55	18.28	68.20	14.65	150	149	Horizontal
2	5383.34	37.04	55.49	18.45	68.20	12.71	150	144	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	18.28	46.38	54.00	7.62	150	149	Horizontal
2	5383.34	18.45	47.40	54.00	6.60	150	144	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11N20_5320	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 14:32:04

Test Graph

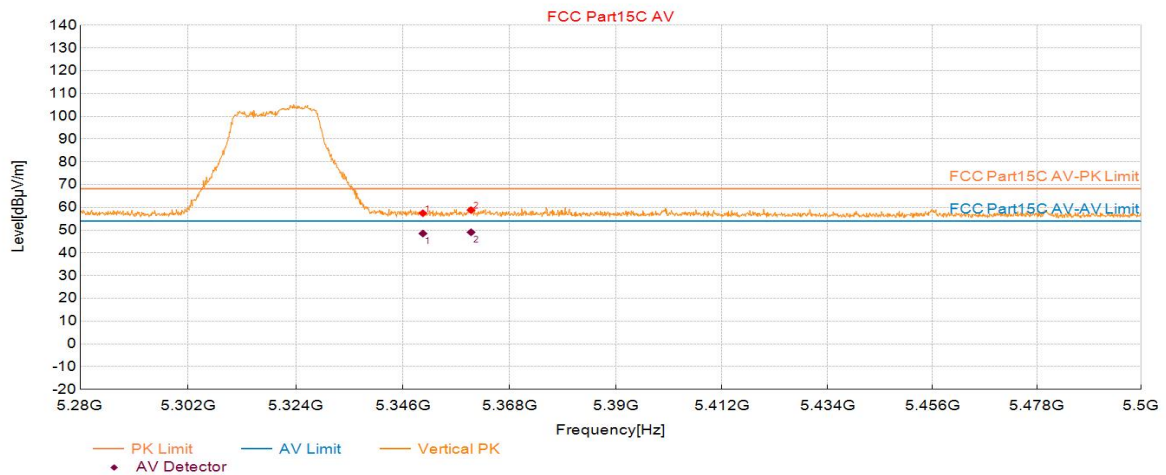

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	39.13	57.41	18.28	68.20	10.79	150	182	Vertical
2	5360.01	40.46	58.79	18.33	68.20	9.41	150	168	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.11	18.28	48.50	54.00	5.50	150	182	Vertical
2	5360.03	18.33	49.05	54.00	4.95	150	168	Vertical


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11N20_5500	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 14:54:57

Test Graph

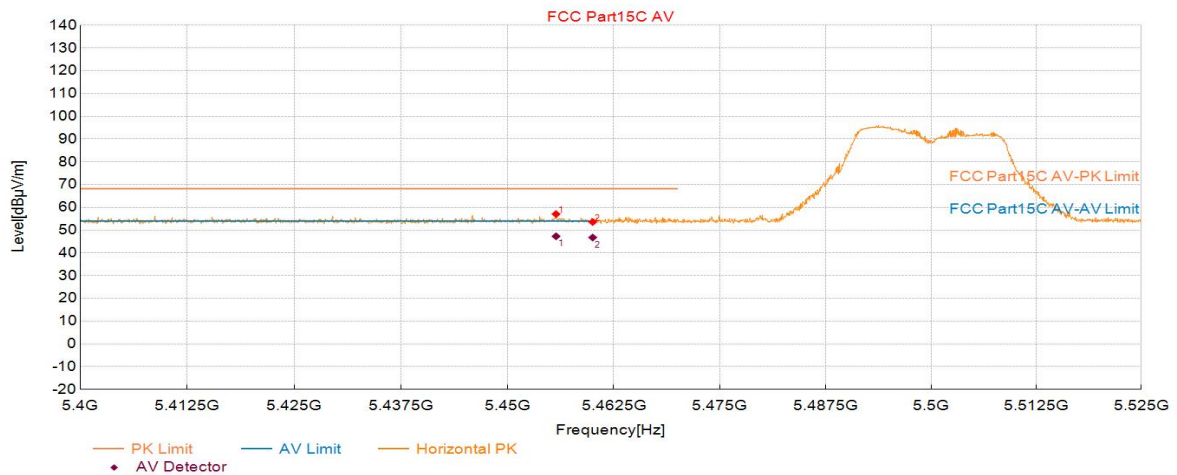

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.72	38.40	57.05	18.65	68.20	11.15	150	63	Horizontal
2	5460.03	34.90	53.55	18.65	68.20	14.65	150	345	Horizontal

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.72	18.65	47.28	54.00	6.72	150	63	Horizontal
2	5460.00	18.65	46.75	54.00	7.25	150	345	Horizontal


Note1: Level=Reading+Factor, Margin=Limit - Level

Test Report

Project Information			
Customer:			
EUT:			
Model:	CTI-CMST01-PTZ	SN:	
Mode:	11N20_5500	Voltage:	DC 12V
Environment:	24.2℃ 51%	Engineer:	Soho Liu
Remark:			

Start of Test:2025-10-17 14:50:04

Test Graph

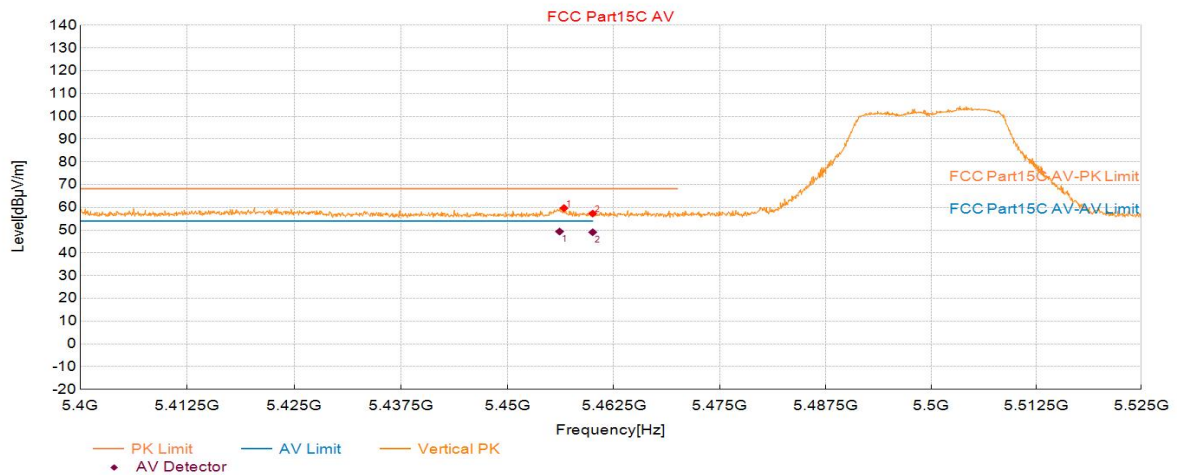

Suspected Data List

NO.	Frequency (MHz)	Reading (dBμV/m)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.65	41.03	59.68	18.65	68.20	8.52	150	99	Vertical
2	5460.03	38.60	57.25	18.65	68.20	10.95	150	257	Vertical

AV Final Data List

NO.	Freq. (MHz)	Factor (dB)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.13	18.65	49.37	54.00	4.63	150	111.1	Vertical
2	5460.00	18.65	49.06	54.00	4.94	150	257	Vertical

Note1: Level=Reading+Factor, Margin=Limit - Level