


FCC AND ISCED CERTIFICATION TEST REPORT

Applicant:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Blvd, Greenville, SC 29607, United States
Manufacturer:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Blvd, Greenville, SC 29607, United States
Product Description:	Command Studio Digital Console
Brand Name:	Clear Touch
Tested Model:	CTI-CMST01-SCRN
FCC ID:	2AL27-CMSTSCRN
IC:	22693-CMSTSCRN
Report No.:	JCF250916081-001
Received Date:	Sep. 22, 2025
Tested Date:	Sep. 22, 2025 - Dec. 18, 2025
Issued Date:	Dec. 18, 2025
Test Standards:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023
Test Procedure:	ANSI C63.10-2020/Cor1-2023, 558074 D01 15.247 Meas Guidance v05r02, 662911 D01 Multiple Transmitter Output v02r01, RSS-Gen Issue 5 A2, Feb. 2021
Test Result:	Pass
Prepared By:  <u>Kennys Zhang/Engineer</u> Date: Dec. 18, 2025	
Reviewed By:  <u>Roger Li/Engineer</u> Date: Dec. 18, 2025	
Approved By:  <u>Talent Zhang/Engineer</u> Date: Dec. 18, 2025	

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 18, 2025	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary of Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Test Channel Configuration	7
4.4. Test environment conditions	8
4.5. Description of Available Antennas	8
4.6. Description of Available Antennas	9
5. Description of Test Setup	9
5.1. Accessory	9
5.2. Support Equipment	9
5.3. Test Setup	10
5.4. Setup Diagram for Tests	10
6. Measurement Uncertainty	10
7. Measuring Instrument and Software Used	10
8. On Time and Duty Cycle	13
8.1. Block diagram of test setup	13
8.2. Limits	13
8.3. Procedure	13
8.4. Results	13
8.5. Original test data	14
9. 6 dB DTS Bandwidth and 99 % Occupied Bandwidth	27
9.1. Block diagram of test setup	27
9.2. Limits	27
9.3. Test Procedure	27
9.4. Results	27
9.5. Original test data	29
10. Conducted Output Power	54
10.1. Block diagram of test setup	54
10.2. Limits	54
10.3. Test Procedure	54
10.4. Results	54
11. Power Spectral Density	56
11.1. Block diagram of test setup	56
11.2. Limits	56
11.3. Test Procedure	56
11.4. Results	56
11.5. Original test data	57
12. Conducted Band edge and Spurious Emissions	70
12.1. Block diagram of test setup	70
12.2. Limits	70
12.3. Test Procedure	70
12.4. Test result	70
12.5. Original test data	73
13. Radiated Emission	117
13.1. Block diagram of test setup	117
13.2. Limit	118
13.3. Test Procedure	119
13.4. Results	121
13.5. Original test data	121

14. AC Power Line Conducted Emissions 122

14.1. Block diagram of test setup 122

14.2. Limits 122

14.3. Test procedure 122

14.4. Test result 123

14.5. Original test data 123

15. Antenna Requirements 124

15.1. Applicable Requirements 124

15.2. Result 124

APPENDIX A – Radiated Emission Below 1GHz Test Data 125

APPENDIX B – Radiated Emission Above 1GHz Test Data 127

APPENDIX C – AC Power Line Conducted Emission Test Data 157

1. Test Report Declare

Applicant:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Blvd, Greenville, SC 29607, United States
Manufacturer:	Clear Touch Interactive Inc
Address:	1100 Thousand Oaks Blvd, Greenville, SC 29607, United States
Product Name:	Command Studio Digital Console
Brand Name:	Clear Touch
Model Name:	CTI-CMST01-SCRN
Difference Description:	N/A

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	6dB Bandwidth and 99 % Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	Command Studio Digital Console
Model Number:	CTI-CMST01-SCRN
EUT Function Description:	Please refer to user manual of this device
Power Supply:	Input: 24V= 4A
Sample No.:	250916081-01-01
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	IEEE802.11b/g/n/ax
Operation Frequency:	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz IEEE 802.11ax HE20: 2412MHz—2462MHz IEEE 802.11ax HE40: 2422MHz—2452MHz
Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n (HT20/40): OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax (HE20/40): OFDMA (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Antenna Type:	External Antenna, MAX. Gain: 4.08 dBi External Antenna, MAX. Directional Gain: 7.09 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel List for 802.11b/g/n/ax (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n/ax (40 MHz)					
Channel	Frequency (MHz)	Channel	Frequency(MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442	/	/
5	2432	8	2447	/	/

4.3. Test Channel Configuration

Tested mode, channel and rand data rate information			
Mode	Data rate (Mbps) (see Note)	Channel	Frequency (MHz)

802.11b	1	Low: CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
802.11g	6	Low: CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
802.11n HT20	MCS 8	Low: CH1	2412
	MCS 8	Middle: CH6	2437
	MCS 8	High: CH11	2462
802.11n HT40	MCS 8	Low: CH3	2422
	MCS 8	Middle: CH6	2437
	MCS 8	High: CH9	2452
802.11ax HE20	MCS 0	Low: CH1	2412
	MCS 0	Middle: CH6	2437
	MCS 0	High: CH11	2462
802.11ax HE40	MCS 0	Low: CH3	2422
	MCS 0	Middle: CH6	2437
	MCS 0	High: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

4.4. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.5. Description of Available Antennas

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		MobaXterm		
Modulation Mode	Transmit Antenna Number	Test Software Setting Value		
		Channel	ANT1	ANT2
802.11b	2	CH1	Default	Default
		CH6	Default	Default
		CH11	Default	Default
802.11g	2	CH1	14	14
		CH6	14	14
		CH11	13	13
802.11HT20	2	CH1	13	13
		CH6	12	12
		CH11	11	12
802.11n HT40	2	CH3	11	13
		CH6	11	12

		CH9	11	12
802.11ax HE20	2	CH1	11	14
		CH6	11	12
		CH11	11	12
802.11ax HE40	2	CH3	13	13
		CH6	13	13
		CH9	13	13

4.6. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
802.11b	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11g	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11n HT40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE20	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.
802.11ax HE40	☒ 2TX, 2RX	ANT 1 and ANT2 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
Adapter	Gangqi	GQ120A-2400400-E1	/	/

5.2. Support Equipment


Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup


The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests


RF Connect Test:



Radiated Emission Test:



AC Power Line Conducted Emissions Test:



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k = 2.	

7. Measuring Instrument and Software Used


TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 31, 2025	Jul. 30, 2026
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Jul. 31, 2025	Jul. 30, 2026
☒	Signal Generator	Keysight	N5171B	MY57280639	Jul. 31, 2025	Jul. 30, 2026
☒	DC POWER	Keysight	E342A	MY59020356	Jul. 31, 2025	Jul. 30, 2026
☒	Incubator thermometer	GWS	EL-02JA	21107288	Jul. 31, 2025	Jul. 30, 2026
☒	Control	Tonscend	JS0806-2	/	Jul. 31, 2025	Jul. 30, 2026

	unit(Power sensor)					
☑	Spectrum Analyzer	Keysight	N9020B	MY60112206	Aug. 29, 2025	Aug. 28, 2026
☑	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 01, 2025	Jul. 31, 2026
☑	Spectrum Analyzer	Keysight	N9020B	MY60112811	Jul. 31, 2025	Jul. 30, 2026
☑	Signal Generator	Keysight	N5173B	MY62220145	Jul. 31, 2025	Jul. 30, 2026
☑	Vector Signal Generator	Keysight	N5182B	MY61252859	Jul. 31, 2025	Jul. 30, 2026
☑	DC POWER	Keysight	E3642A	MY40005294	Jul. 31, 2025	Jul. 30, 2026
☑	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	EMI Receiver	R&S	ESR26	101424	Feb. 24, 2025	Feb. 25, 2026
☑	Hybrid Antenna	Schwarzbeck	VULB9163	01361	May. 28, 2025	May. 27, 2026
☑	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Aug. 31, 2025	Aug. 30, 2026
☑	Horn Antenna 2	ETS	BBHA 9170	1090	Aug. 31, 2025	Aug. 30, 2026
☑	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 12, 2025	Jan. 11, 2026
☑	Test path	/	Path2: WIFI-2.4G 1-3GHz	/	Jul. 31, 2025	Jul. 30, 2026
☑	Test path	/	Path7: ALL PASS 1-18GHz	/	Jul. 31, 2025	Jul. 30, 2026
☑	Test path	/	Path9: 3GHz High PASS 3-18GHz	/	Jul. 31, 2025	Jul. 30, 2026
☑	Test path	/	Path16: 30MHz-1GHz ALL PASS NO AMP	/	Jul. 31, 2025	Jul. 30, 2026
☑	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Aug. 31, 2025	Aug. 30, 2026
☑	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	LISN	R&S	ENV216	102509	Aug. 01, 2025	Jul. 31, 2026

☒	EMI Receiver	R&S	ESR	102154	Aug. 01, 2025	Jul. 31, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Temperature & Humidity	Temperature	HTC-1	/	Sep. 20, 2025	Sep. 21, 2026

8. On Time and Duty Cycle

8.1. Block diagram of test setup

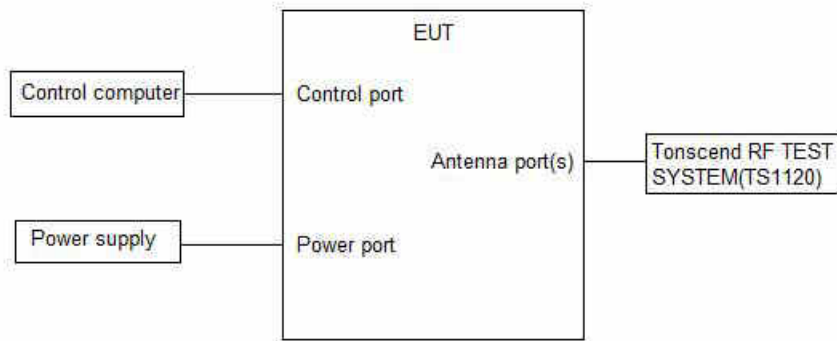

8.2. Limits

None; for reporting purposes only

8.3. Procedure

KDB 558074 Zero-Span Spectrum Analyzer Method

8.4. Results

Test Mode	Ant.	Freq. (MHz)	Transmission Duration (ms)	Transmission Period (ms)	Duty Cycle (%)
11B	Ant1	2412	8.38	8.74	95.88
	Ant2	2412	8.38	8.41	99.64
	Ant1	2437	8.39	8.42	99.64
	Ant2	2437	8.38	8.41	99.64
	Ant1	2462	8.39	8.42	99.64
	Ant2	2462	8.39	8.42	99.64
11G	Ant1	2412	1.39	1.43	97.20
	Ant2	2412	1.39	1.43	97.20
	Ant1	2437	1.39	1.43	97.20
	Ant2	2437	1.39	1.42	97.89
	Ant1	2462	1.39	1.42	97.89
	Ant2	2462	1.39	1.43	97.20
11N20MIMO	Ant1	2412	1.30	1.34	97.01
	Ant2	2412	1.30	1.33	97.74
	Ant1	2437	1.30	1.34	97.01
	Ant2	2437	1.30	1.33	97.74
	Ant1	2462	1.30	1.33	97.74
	Ant2	2462	1.30	1.34	97.01
11N40MIMO	Ant1	2422	0.65	0.68	95.59
	Ant2	2422	0.65	0.68	95.59
	Ant1	2437	0.64	0.68	94.12
	Ant2	2437	0.64	0.68	94.12
	Ant1	2452	0.65	0.68	95.59
	Ant2	2452	0.65	0.68	95.59
11AX20MIMO	Ant1	2412	1.02	1.05	97.14
	Ant2	2412	1.02	1.05	97.14
	Ant1	2437	1.01	1.05	96.19
	Ant2	2437	1.01	1.04	97.12
	Ant1	2462	1.01	1.05	96.19
	Ant2	2462	1.01	1.05	96.19

11AX40MIMO	Ant1	2422	0.06	0.08	75.00
	Ant2	2422	0.07	0.09	77.78
	Ant1	2437	0.07	0.09	77.78
	Ant2	2437	0.07	0.09	77.78
	Ant1	2452	0.07	0.09	77.78
	Ant2	2452	0.06	0.08	75.00

Note: Duty Cycle Correction Factor = $10\log(1/x)$.
Where: x is Duty Cycle (Linear)
Where: T is On Time
If that calculated VBW is not available on the analyzer, then the next higher value should be used.
For mode 11b, the duty cycle is greater than 98 %, so it can set VBW to 10 Hz.

8.5. Original test data





11B_Ant2_2437



11B_Ant1_2462



11B_Ant2_2462




11G_Ant1_2412



11G_Ant2_2412



11G_Ant1_2437

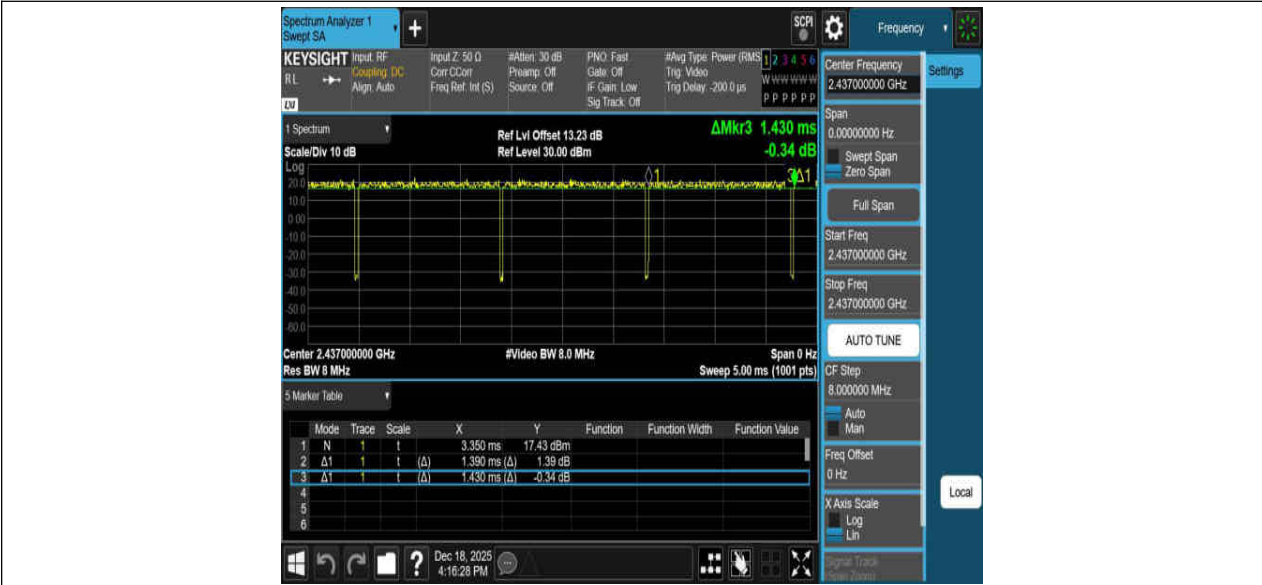

11G_Ant2_2437



11G_Ant1_2462



11G_Ant2_2462



11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412



11N20MIMO_Ant1_2437



11N20MIMO_Ant2_2437




11N20MIMO_Ant1_2462



11N20MIMO_Ant2_2462




11N40MIMO_Ant1_2422

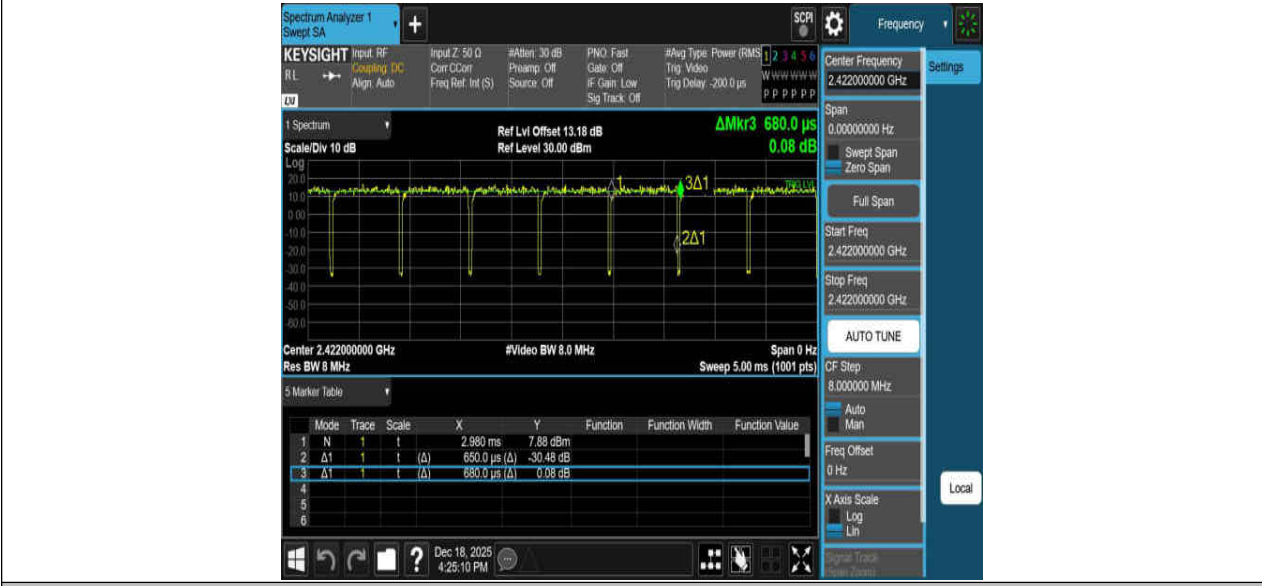


11N40MIMO_Ant2_2422



11N40MIMO_Ant1_2437

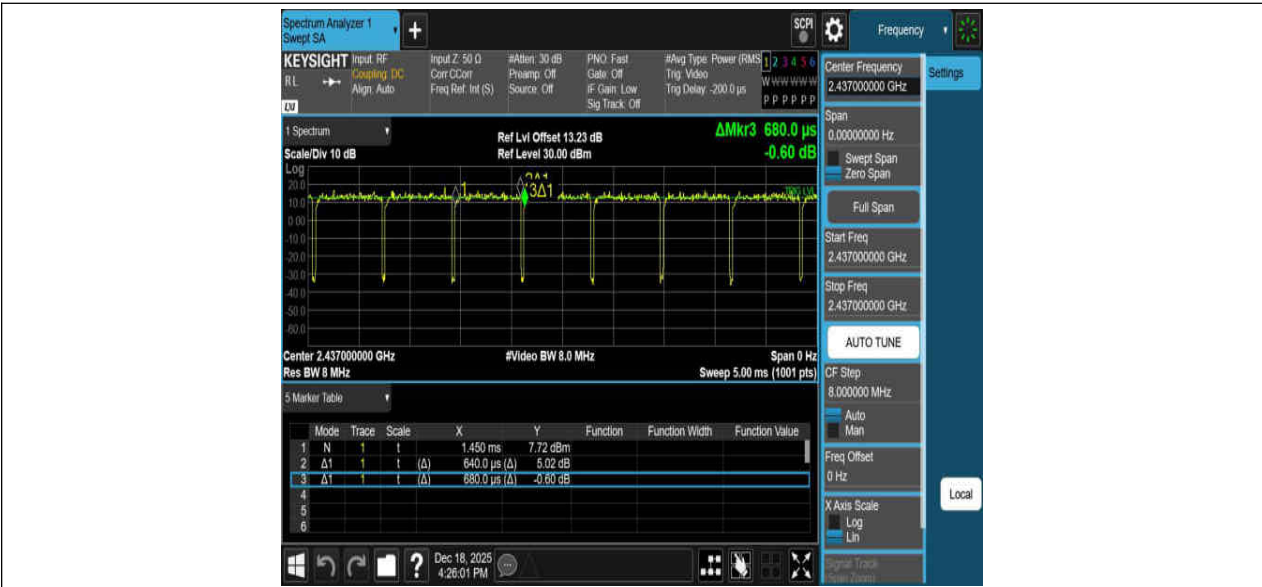

11N40MIMO_Ant2_2437

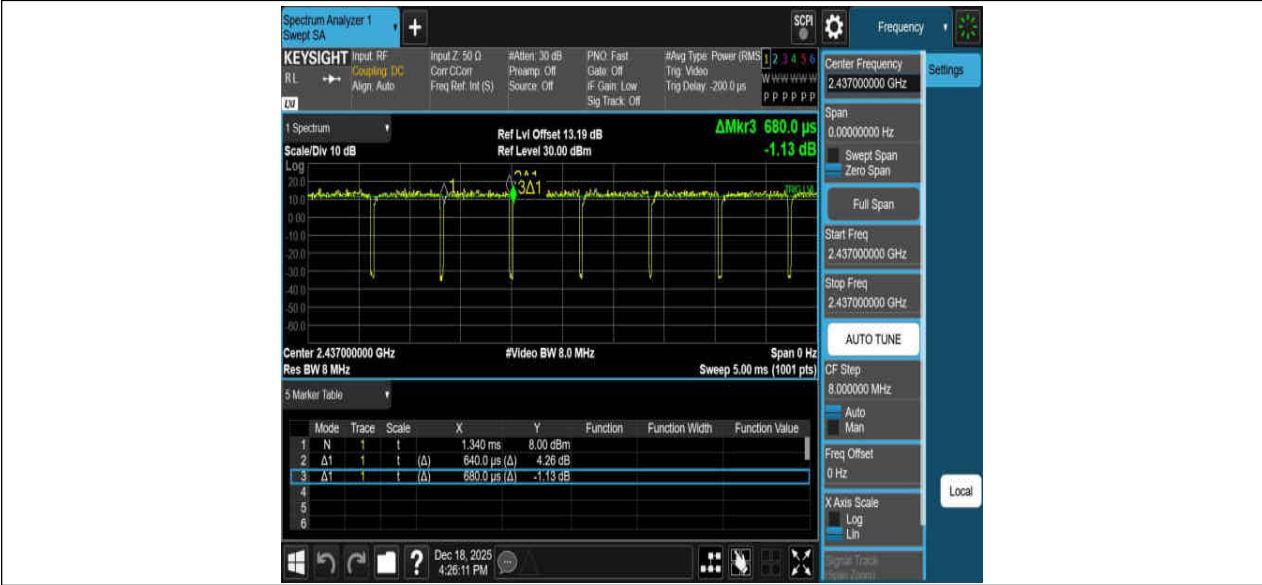


11N40MIMO_Ant1_2452



11N40MIMO_Ant2_2452




11AX20MIMO_Ant1_2412

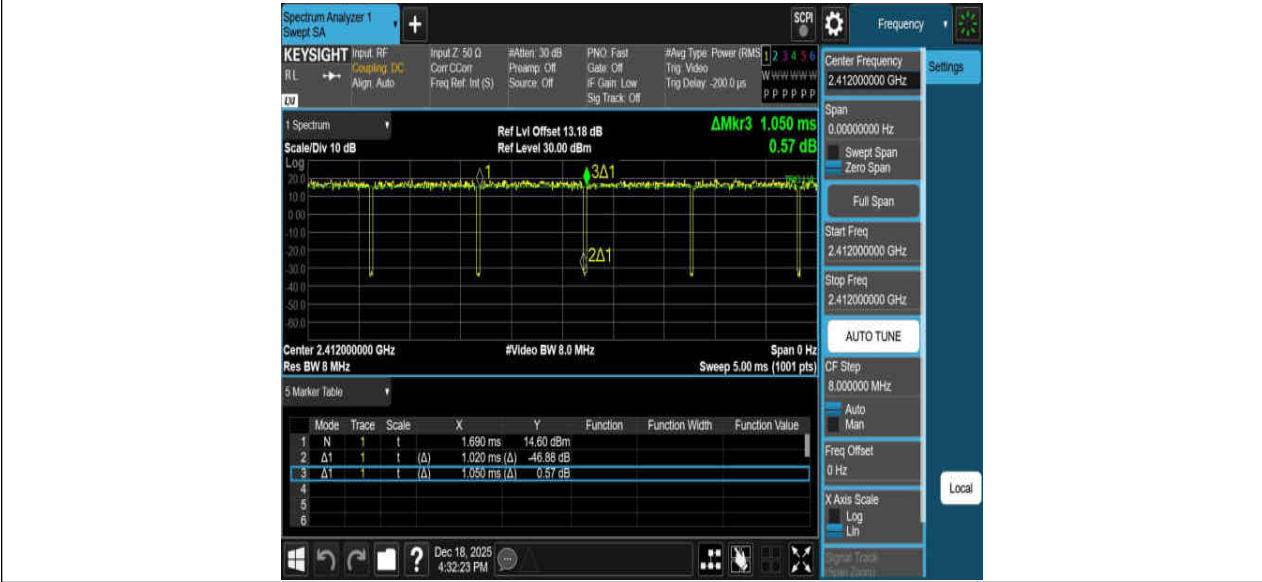

11AX20MIMO_Ant2_2412



11AX20MIMO_Ant1_2437

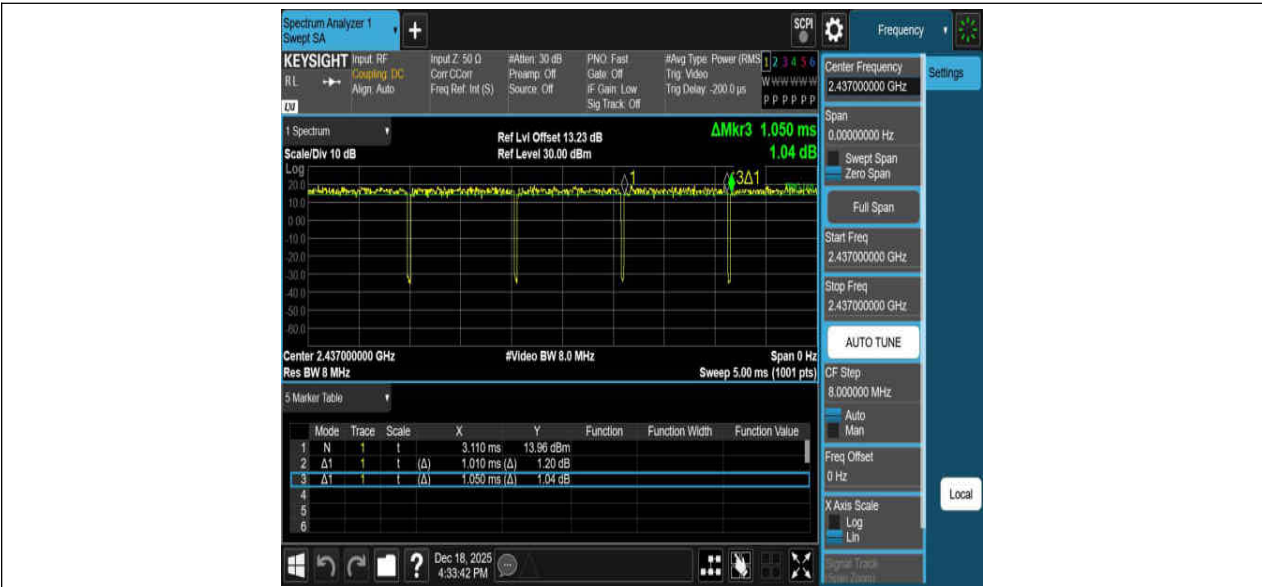

11AX20MIMO_Ant2_2437




11AX20MIMO_Ant1_2462



11AX20MIMO_Ant2_2462




11AX40MIMO_Ant1_2422

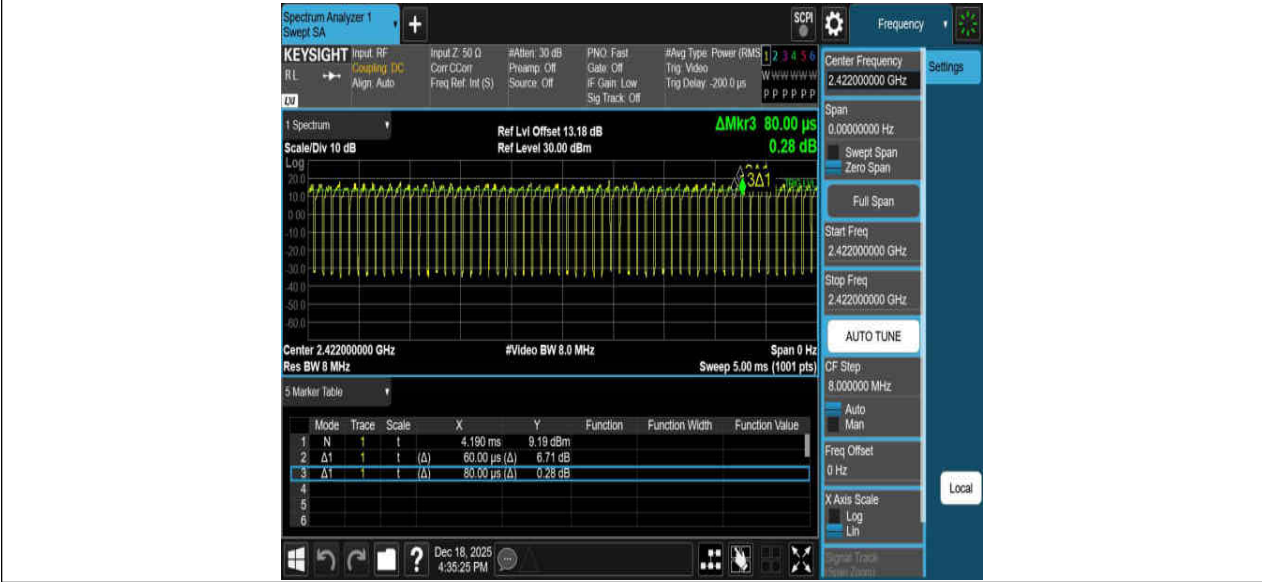


11AX40MIMO_Ant2_2422



11AX40MIMO_Ant1_2437

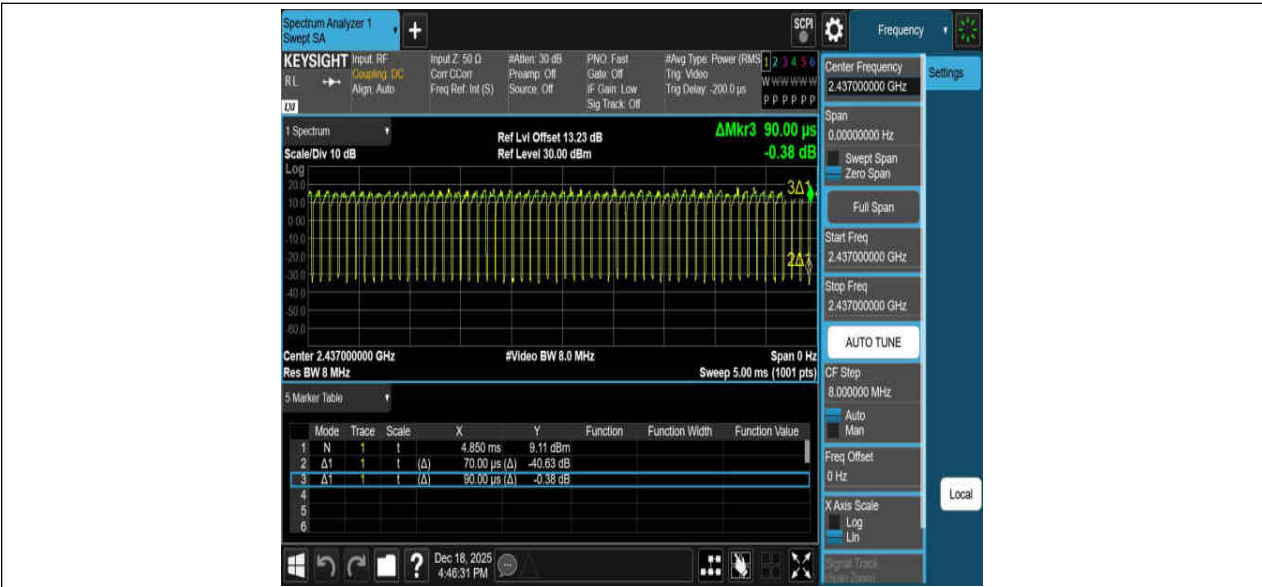


11AX40MIMO_Ant2_2437

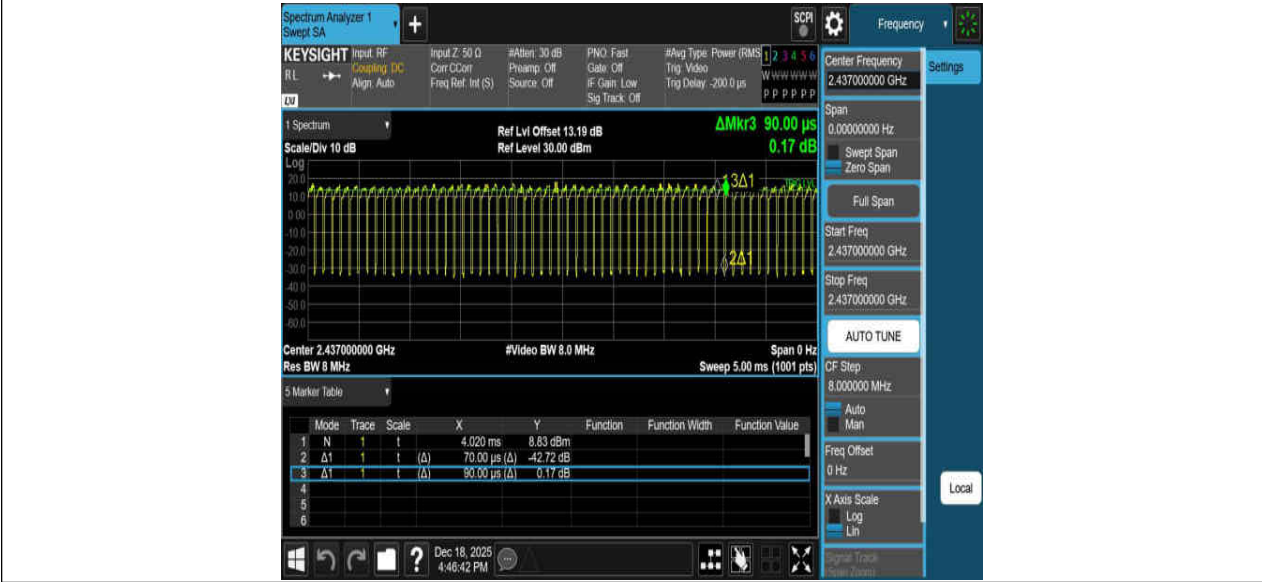

11AX40MIMO_Ant1_2452



11AX40MIMO_Ant2_2452

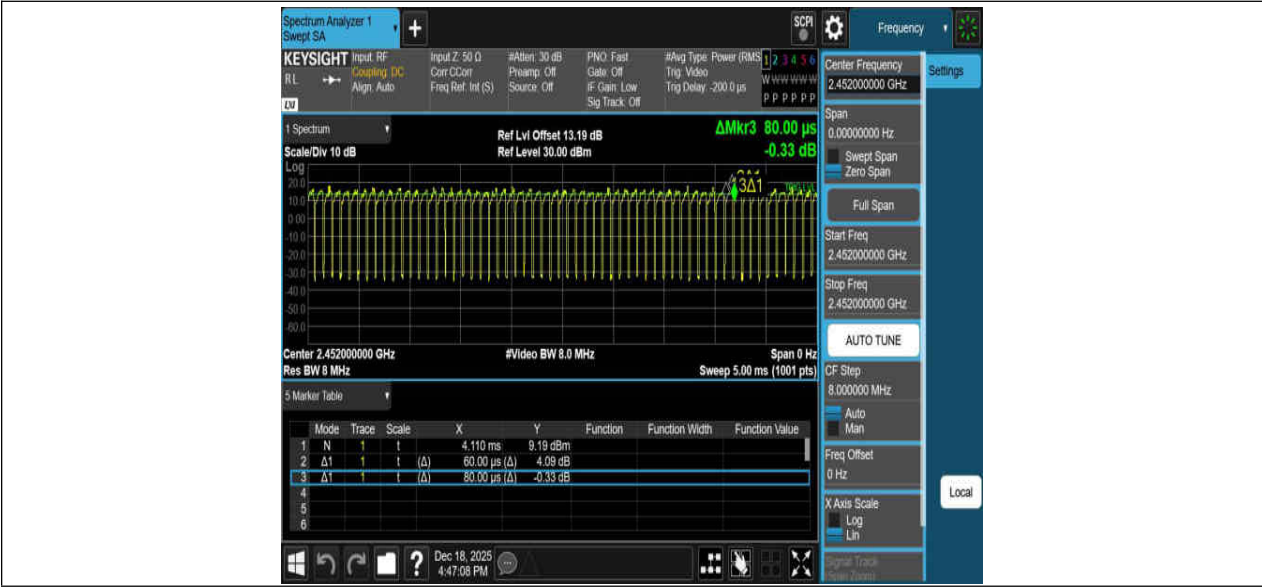

9. 6 dB DTS Bandwidth and 99 % Occupied Bandwidth

9.1. Block diagram of test setup

Same as section 8.1

9.2. Limits

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

9.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Bandwidth :100 kHz For 99 % Occupied Bandwidth :1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth : $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99 % relative to the maximum level measured in the fundamental emission.

9.4. Results

6dB bandwidth:

Test Mode	Ant.	Freq. (MHz)	DTS BW (MHz)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
11B	Ant1	2412	8.040	2407.960	2416.000	0.5	PASS
	Ant2	2412	8.000	2408.000	2416.000	0.5	PASS
	Ant1	2437	8.040	2432.960	2441.000	0.5	PASS
	Ant2	2437	8.080	2432.960	2441.040	0.5	PASS
	Ant1	2462	8.040	2457.960	2466.000	0.5	PASS
	Ant2	2462	7.560	2458.440	2466.000	0.5	PASS
11G	Ant1	2412	13.160	2405.080	2418.240	0.5	PASS
	Ant2	2412	15.640	2403.880	2419.520	0.5	PASS
	Ant1	2437	16.240	2428.880	2445.120	0.5	PASS
	Ant2	2437	16.320	2428.840	2445.160	0.5	PASS
	Ant1	2462	16.360	2453.800	2470.160	0.5	PASS
	Ant2	2462	16.040	2453.840	2469.880	0.5	PASS
11N20MIMO	Ant1	2412	16.080	2403.440	2419.520	0.5	PASS
	Ant2	2412	14.440	2404.440	2418.880	0.5	PASS
	Ant1	2437	16.520	2428.840	2445.360	0.5	PASS
	Ant2	2437	16.280	2429.480	2445.760	0.5	PASS
	Ant1	2462	17.000	2453.480	2470.480	0.5	PASS
	Ant2	2462	16.960	2453.200	2470.160	0.5	PASS
11N40MIMO	Ant1	2422	33.840	2404.480	2438.320	0.5	PASS
	Ant2	2422	36.320	2403.840	2440.160	0.5	PASS
	Ant1	2437	35.040	2419.480	2454.520	0.5	PASS

	Ant2	2437	28.800	2425.720	2454.520	0.5	PASS
	Ant1	2452	33.840	2435.680	2469.520	0.5	PASS
	Ant2	2452	35.040	2434.480	2469.520	0.5	PASS
11AX20MIMO	Ant1	2412	17.840	2402.960	2420.800	0.5	PASS
	Ant2	2412	16.920	2402.560	2419.480	0.5	PASS
	Ant1	2437	17.360	2427.720	2445.080	0.5	PASS
	Ant2	2437	16.960	2429.440	2446.400	0.5	PASS
	Ant1	2462	16.800	2454.400	2471.200	0.5	PASS
	Ant2	2462	15.120	2453.200	2468.320	0.5	PASS
11AX40MIMO	Ant1	2422	35.120	2404.400	2439.520	0.5	PASS
	Ant2	2422	37.520	2403.280	2440.800	0.5	PASS
	Ant1	2437	36.320	2418.200	2454.520	0.5	PASS
	Ant2	2437	36.400	2419.400	2455.800	0.5	PASS
	Ant1	2452	36.000	2434.400	2470.400	0.5	PASS
	Ant2	2452	35.040	2434.480	2469.520	0.5	PASS

99 % bandwidth:

Test Mode	Ant.	Channel Freq. (MHz)	OCB (MHz)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
11B	Ant1	2412	12.400	2405.7284	2418.1284	---	---
	Ant2	2412	12.869	2405.4992	2418.3682	---	---
	Ant1	2437	12.630	2430.6687	2443.2987	---	---
	Ant2	2437	13.083	2430.5532	2443.6362	---	---
	Ant1	2462	12.520	2455.7159	2468.2359	---	---
	Ant2	2462	12.937	2455.4402	2468.3772	---	---
11G	Ant1	2412	16.639	2403.5726	2420.2116	---	---
	Ant2	2412	16.625	2403.5716	2420.1966	---	---
	Ant1	2437	17.759	2428.0024	2445.7614	---	---
	Ant2	2437	17.838	2428.3250	2446.1630	---	---
	Ant1	2462	17.735	2453.0123	2470.7473	---	---
	Ant2	2462	17.716	2452.8928	2470.6088	---	---
11N20MIMO	Ant1	2412	17.694	2403.0750	2420.7690	---	---
	Ant2	2412	17.549	2403.1849	2420.7339	---	---
	Ant1	2437	18.528	2427.6648	2446.1928	---	---
	Ant2	2437	17.958	2428.1178	2446.0758	---	---
	Ant1	2462	18.485	2452.6865	2471.1715	---	---
	Ant2	2462	17.932	2452.9126	2470.8446	---	---
11N40MIMO	Ant1	2422	36.065	2403.9678	2440.0328	---	---
	Ant2	2422	36.607	2403.6865	2440.2935	---	---
	Ant1	2437	36.026	2418.9662	2454.9922	---	---
	Ant2	2437	35.761	2419.3485	2455.1095	---	---
	Ant1	2452	35.967	2433.9650	2469.9320	---	---
	Ant2	2452	35.854	2434.0200	2469.8740	---	---
11AX20MIMO	Ant1	2412	18.801	2402.5671	2421.3681	---	---
	Ant2	2412	18.757	2402.4802	2421.2372	---	---
	Ant1	2437	18.984	2427.4344	2446.4184	---	---
	Ant2	2437	18.976	2427.5845	2446.5605	---	---
	Ant1	2462	19.000	2452.4548	2471.4548	---	---
	Ant2	2462	18.957	2452.4740	2471.4310	---	---
11AX40MIMO	Ant1	2422	37.703	2403.1023	2440.8053	---	---
	Ant2	2422	38.014	2402.9710	2440.9850	---	---
	Ant1	2437	37.693	2417.8633	2455.5563	---	---
	Ant2	2437	37.716	2418.1367	2455.8527	---	---
	Ant1	2452	37.656	2433.1276	2470.7836	---	---
	Ant2	2452	37.527	2433.2306	2470.7576	---	---

9.5. Original test data

6dB bandwidth:





11B_Ant2_2437



11B_Ant1_2462



11B_Ant2_2462