



RADIO TEST REPORT

Applicant	:	SELVAS Healthcare, Inc.
Address of Applicant	:	155, Sinseong-ro, Yuseong-gu, Daejeon, Republic of Korea
Manufacturer	:	SELVAS Healthcare, Inc.
Address of Manufacturer	:	155, Sinseong-ro, Yuseong-gu, Daejeon, Republic of Korea
Equipment under Test	:	BrailleSense 7-32
Model No.	:	H732B, H720B
FCC ID	:	2AL4D-H732B
Test Standard(s)	:	FCC Rules and Regulations Part 15 Subpart C, ANSI C63.10-2020+Cor.1-2023
Report No.	:	DDT-RE26040120-1E05
Issue Date	:	2026/08/27
Issue By	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

Table of Contents

1.	Summary of Test Results	7
2.	General Test Information.....	8
2.1.	Description of EUT	8
2.2.	Accessories of EUT	9
2.3.	Block diagram of EUT configuration for test.....	9
2.4.	Decision of final test mode	9
2.5.	Deviations of test standard	10
2.6.	Test environment conditions	10
2.7.	Test laboratory	10
2.8.	Measurement uncertainty	11
3.	Equipment Used During Conductive Test	12
4.	20 dB Bandwidth	13
4.1.	Block diagram of test setup	13
4.2.	Limits	13
4.3.	Test procedure	13
4.4.	Test result.....	14
4.5.	Test graphs	15
5.	99% Bandwidth	18
5.1.	Block diagram of test setup	18
5.2.	Limits	18
5.3.	Test procedure	18
5.4.	Test result.....	19
5.5.	Test graphs	20
6.	Maximum Peak Output Power.....	23
6.1.	Block diagram of test setup	23
6.2.	Limits	23
6.3.	Test procedure	23
6.4.	Test result.....	24
6.5.	Test graphs	25
7.	Carrier Frequency Separation	28
7.1.	Block diagram of test setup	28
7.2.	Limits	28
7.3.	Test procedure	28
7.4.	Test result.....	29
7.5.	Test graphs	30
8.	Dwell Time.....	31

8.1.	Block diagram of test setup	31
8.2.	Limits	31
8.3.	Test procedure	31
8.4.	Test result.....	32
8.5.	Test graphs	33
9.	Number of Hopping Channel.....	36
9.1.	Block diagram of test setup	36
9.2.	Limits	36
9.3.	Test procedure	36
9.4.	Test result.....	37
9.5.	Test graphs	38
10.	Band Edge Compliance (Conducted Method).....	39
10.1.	Block diagram of test setup	39
10.2.	Limit.....	39
10.3.	Test procedure	39
10.4.	Test result.....	40
10.5.	Test graphs	41
11.	RF Conducted Spurious Emissions.....	45
11.1.	Block diagram of test setup	45
11.2.	Limits	45
11.3.	Test procedure	45
11.4.	Test result.....	46
11.5.	Test graphs	47
12.	Duty cycle.....	56
12.1.	Block diagram of test setup	56
12.2.	Limit.....	56
12.3.	Test procedure	56
12.4.	Test result.....	57
12.5.	Test graphs	58
13.	Antenna Requirements.....	61
13.1.	Limit.....	61
13.2.	Result	61
14.	Radiated Emission	62
14.1.	Test equipment.....	62
14.2.	Block diagram of test setup	63
14.3.	Limits	64
14.4.	Assistant equipment used for test	65
14.5.	Test procedure	65

14.6.	Test result.....	67
14.7.	Test data	68
15.	Band Edge Compliance.....	80
15.1.	Test equipment.....	80
15.2.	Block diagram of test setup	80
15.3.	Limits	81
15.4.	Assistant equipment used for test	81
15.5.	Test procedure	81
15.6.	Test result.....	81
15.7.	Test data	82
16.	Power Line Conducted Emissions.....	94
16.1.	Test equipment.....	94
16.2.	Block diagram of test setup	94
16.3.	Limits	94
16.4.	Assistant equipment used for test	94
16.5.	Test procedure	94
16.6.	Test result.....	95
16.7.	Test data	96
17.	Test Setup Photograph	100
18.	Photos of the EUT	105

Test Report Declare

Applicant	:	SELVAS Healthcare, Inc.
Address of Applicant	:	155, Sinseong-ro, Yuseong-gu, Daejeon, Republic of Korea
Equipment under Test	:	BrailleSense 7-32
Model No.	:	H732B, H720B
Manufacturer	:	SELVAS Healthcare, Inc.
Address of Manufacturer	:	155, Sinseong-ro, Yuseong-gu, Daejeon, Republic of Korea

Test Standard Used:
FCC Rules and Regulations Part 15 Subpart C,
ANSI C63.10-2020+Cor.1-2023

We Declare:
The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

Report No.:	DDT-RE26040120-1E05		
Date of Receipt:	2025/06/04	Date of Test:	2025/06/04 - 2026/08/22

Created: Johnson Huang	Reviewed: Tiger Mo	Approved: Ella Gong
		
2026/08/17	2026/08/27	2026/08/27

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

Revision History

Version	Revision Content	Issue Date	Approved
V0	Initial issue	2026/08/27	Ella Gong

1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	Maximum Peak Output Power	47 CFR Part 15 15.247(b)(1)	/	Pass
2	20 dB Bandwidth	47 CFR Part 15 15.247(a)(1)	/	Pass
3	Carrier Frequency Separation	47 CFR Part 15 15.247(a)(1)	/	Pass
4	Number of Hopping Channel	47 CFR Part 15 15.247(a)(1)(iii)	/	Pass
5	Dwell Time	47 CFR Part 15 15.247(a)(1)(iii)	/	Pass
6	RF Conducted Spurious Emissions	47 CFR Part 15 15.247(d)	/	Pass
7	Radiated Emission	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
8	Band Edge Compliance	47 CFR Part 15 15.205, 47 CFR Part 15 15.209, 47 CFR Part 15 15.247(d)	/	Pass
9	Power Line Conducted Emissions	47 CFR Part 15 15.207(a)	/	Pass
10	Antenna Requirement	47 CFR Part 15 15.203	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

2. General Test Information

2.1. Description of EUT

EUT Name	: BrailleSense 7-32
Model Number	: H732B, H720B
Difference of model number	: Above models are identical in schematic, structure, only the Model Number, keyboard is different for all the models, therefore the whole test performed on the model H732B. The emissions below 1G for testing, to verify that the H720B meets the standard requirements.
EUT Function Description	: Please reference user manual of this device
Power Supply	: Powered by DC 5V external adapter or built-in battery.
Antenna Type	: FPC
Max Antenna Gain(dBi)	: 1.6

Radio Specification	: Bluetooth BR/EDR
Operation Frequency	: 2402 MHz to 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK

Bluetooth BR/EDR Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475

20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	/	
26	2428	53	2455	/	

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
/	/	/	/

2.3. Block diagram of EUT configuration for test



2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: EngineerMode.exe

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5 dB (According to the manufacturer's claims)

Tested mode, Tx Power Setting, Channel, and Frequency			
Tested mode	Tx Power Setting	Channel	Frequency (MHz)
GFSK hopping on Tx mode	7	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	7	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	7	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	7	CH0	2402
	7	CH39	2441

	7	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	7	CH0	2402
	7	CH39	2441
	7	CH78	2480
8DPSK hopping off Tx mode	7	CH0	2402
	7	CH39	2441
	7	CH78	2480
Note: According exploratory test, EUT will have maximum output power in those data rate, worst-case data rates were: GFSK mode: DH5, $\pi/4$ -DQPSK mode: 2DH5, 8DPSK mode: 3DH5			

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	+15°C to +35 °C
Humidity range:	20% to 75%
Pressure range:	86 kPa to106 kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20240, G-20118

2.8. Measurement uncertainty


Test Item	Uncertainty
Bandwidth	1.9%
Peak Output Power (Conducted) (Spectrum analyzer)	0.98 dB
Peak Output Power (Conducted) (Power Sensor)	1.18 dB
Power Spectral Density (Base EIRP)	1.51 dB
Power Spectral Density (Spectrum analyzer)	0.98 dB
Frequencies Stability	1.9 kHz
Conducted spurious emissions	1.21 dB ($9\text{ kHz} \leq f < 7\text{ GHz}$);
	3.31 dB ($7\text{ GHz} \leq f < 40\text{ GHz}$)
Uncertainty for radio frequency (RBW < 20 kHz)	5.5×10^{-8}
Time	0.11%
Temperature	0.3 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.28 dB (Antenna Polarize: V)
	4.14 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.22 dB (1 - 6 GHz)
	4.52 dB (6 GHz - 18 GHz)
	4.58 dB (18 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☒ RF Connected Test (RF Measurement System 1#)				
SIGNAL ANALYZER	R&S	FSQ26	101272	2027/02/28
Wideband Radio Communication Tester	R&S	CMW500	117491	2027/02/28
MXG Vector Signal Generator	KEYSIGHT	N5182B	MY59100192	2027/02/28
MXG Vector Signal Generator	Agilent	N5182A	MY19060405	2027/02/28
RF Control Unit	Tonscend	JS0806-2	158060010	2027/02/28
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2027/02/28
Test Software	Tonscend	JS1120-3	V3.6.21	N/A

4. 20 dB Bandwidth

4.1. Block diagram of test setup

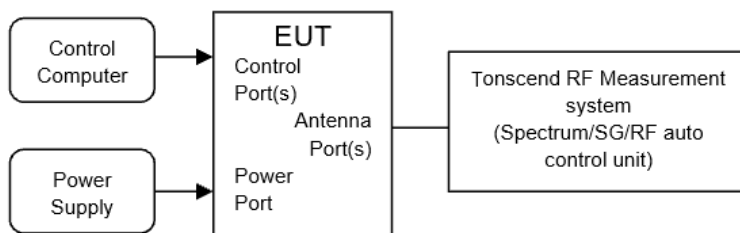

4.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.3. Test procedure

- (1) The test according to ANSI C63.10 clause 6.9.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 20 dB bandwidth measurement:

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 2 times and 5 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold


- (5) Measure and record the results in the report.


4.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

Test Mode	Antenna	Frequency [MHz]	20dB EBW[MHz]
DH5	Ant1	2402	0.86
		2441	0.86
		2480	0.86
2DH5	Ant1	2402	1.32
		2441	1.32
		2480	1.32
3DH5	Ant1	2402	1.30
		2441	1.32
		2480	1.31

4.5. Test graphs

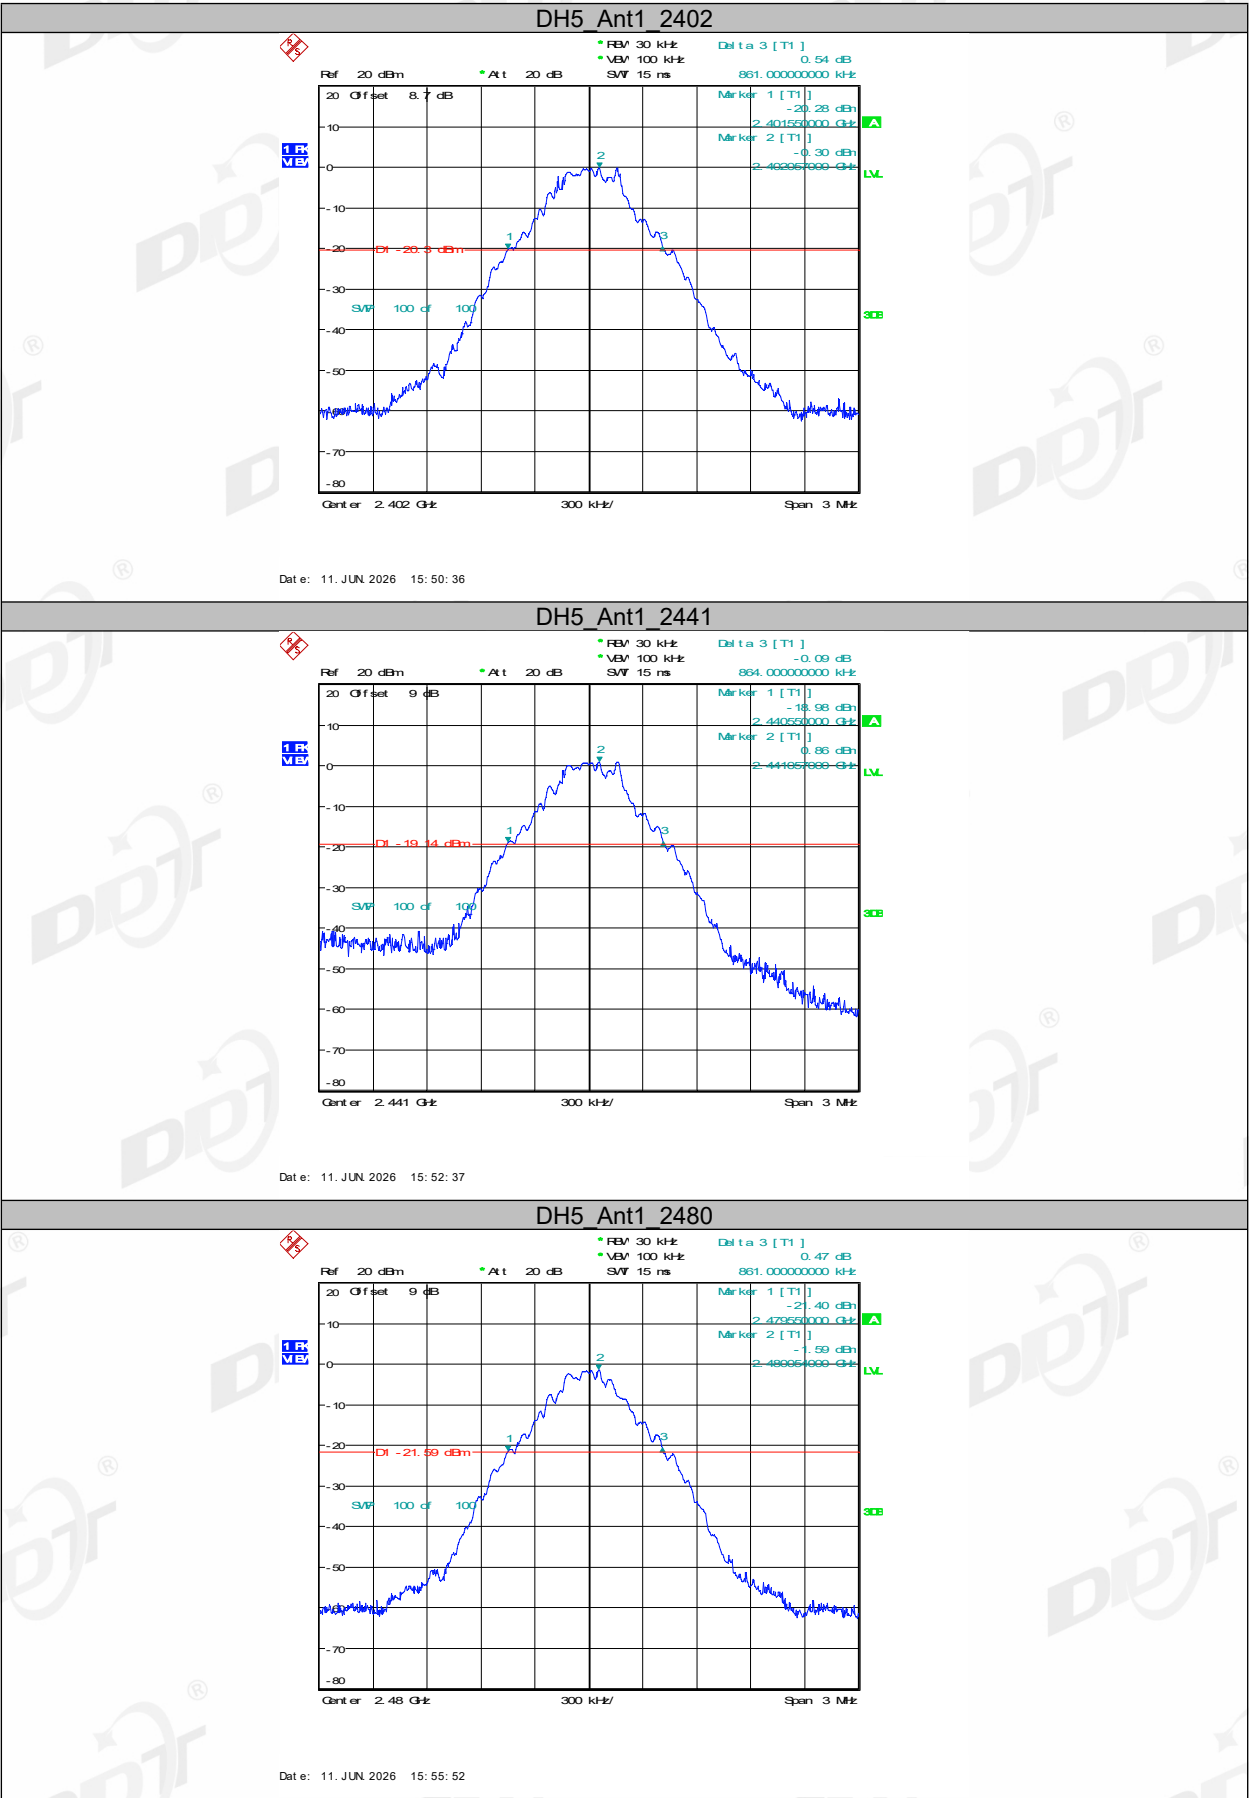


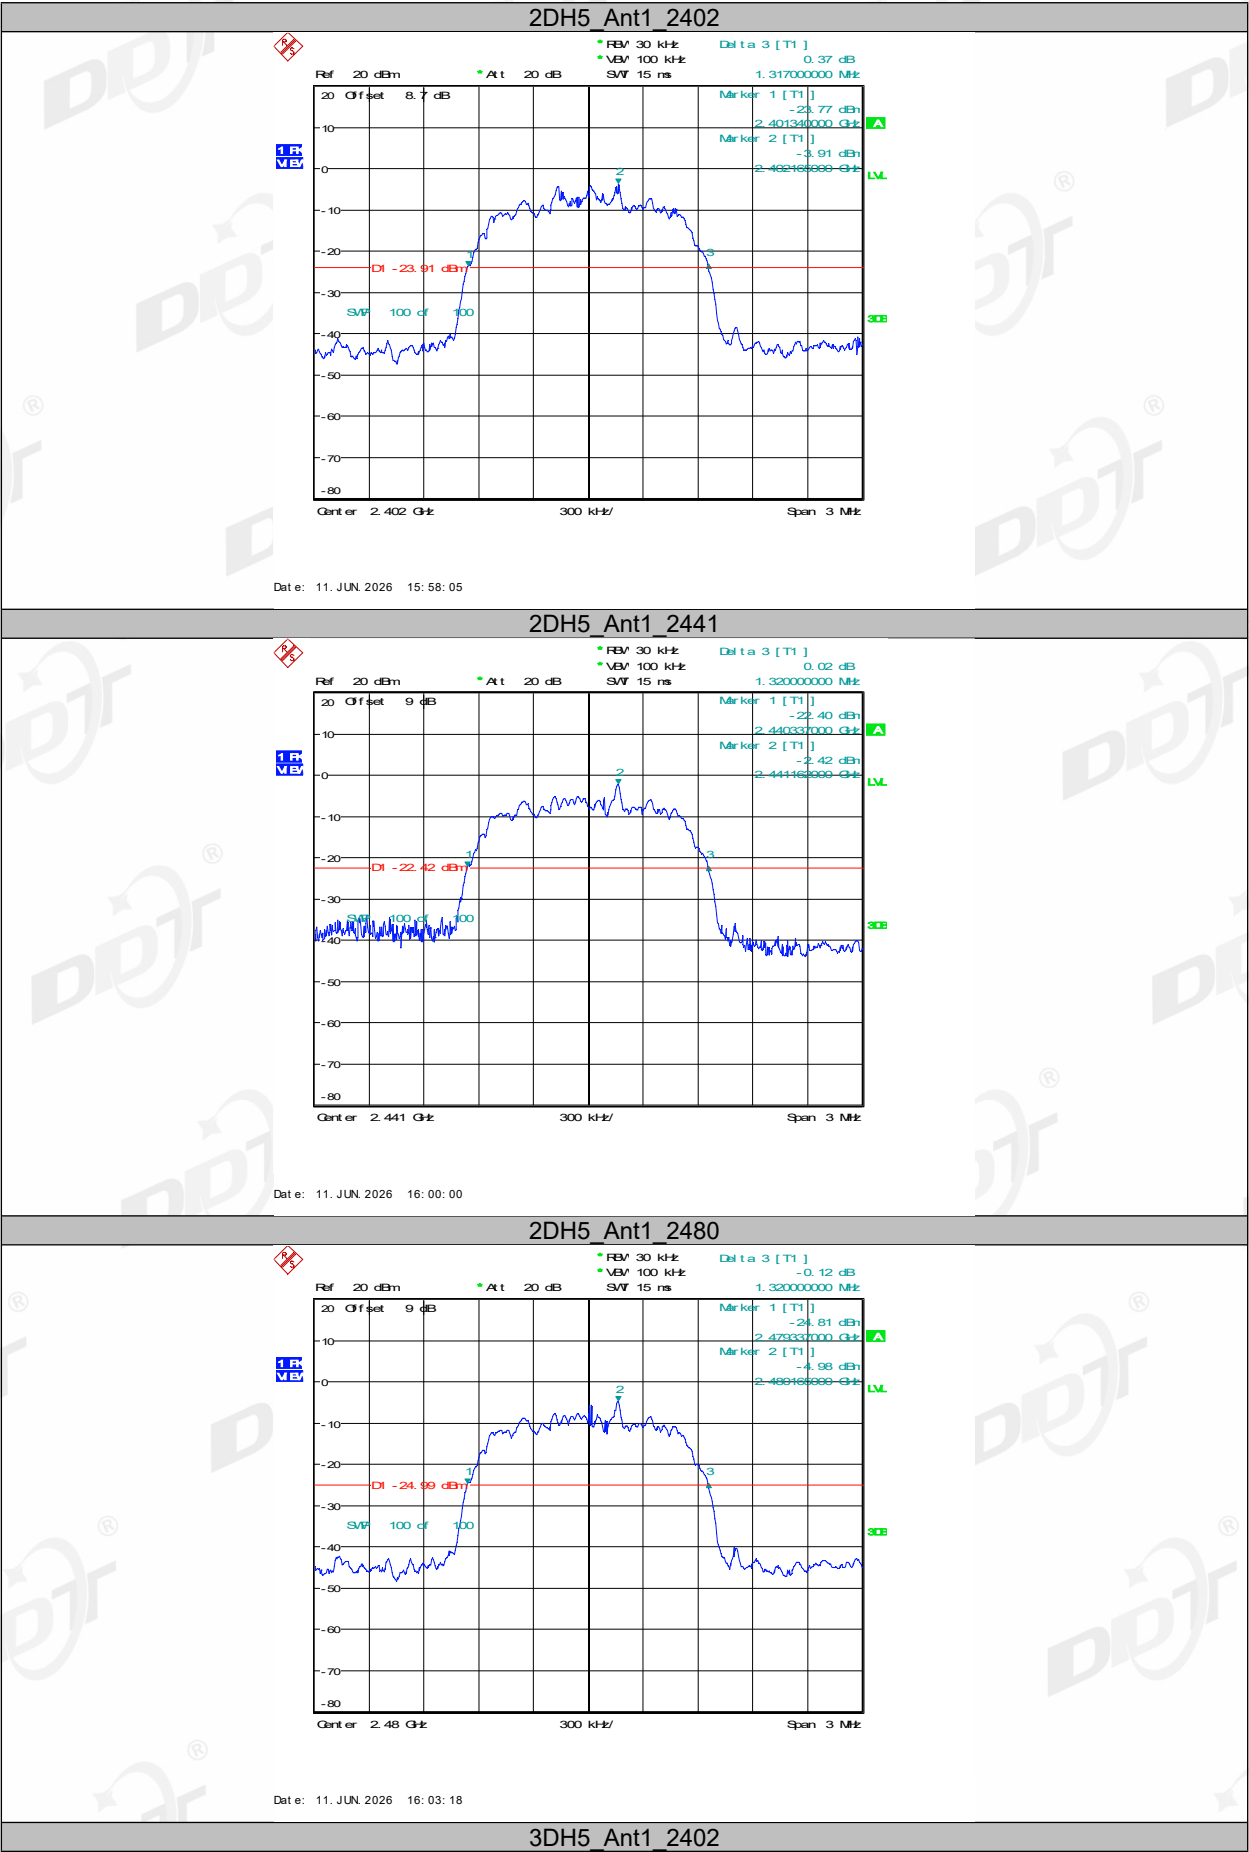

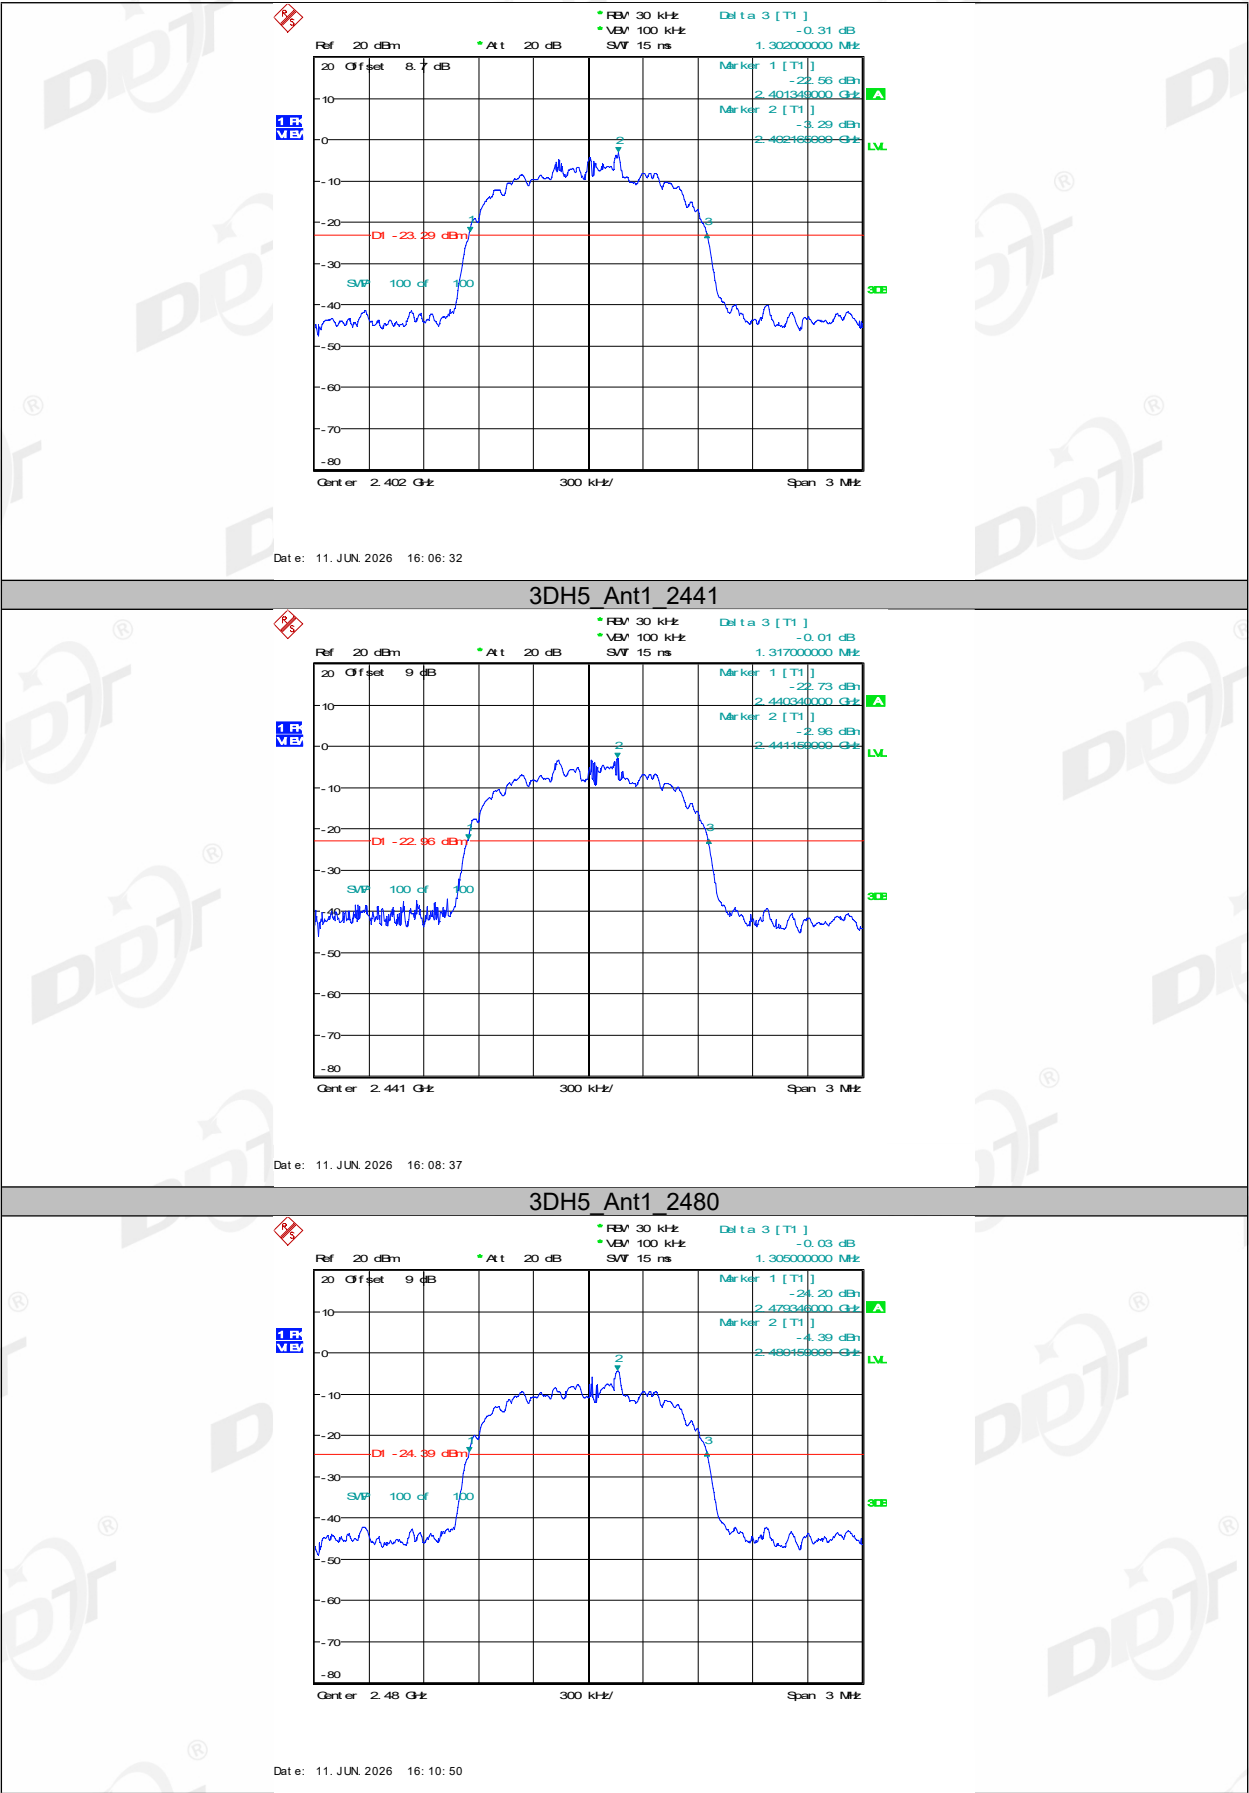

5. 99% Bandwidth

5.1. Block diagram of test setup

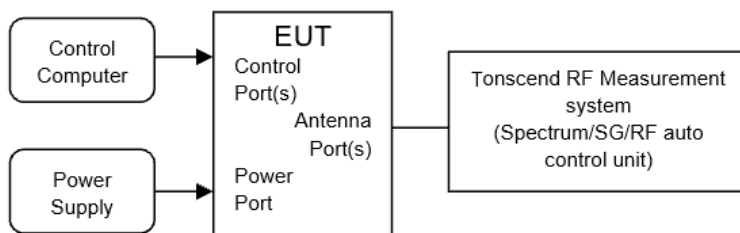

5.2. Limits

Just for Report.

5.3. Test procedure

- (1) The test according to ANSI C63.10 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% bandwidth measurement:


RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure and record the results in the report.


5.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
DH5	Ant1	2402	0.76500	2401.6190	2402.3840
		2441	0.76500	2440.6160	2441.3810
		2480	0.75900	2479.6190	2480.3780
2DH5	Ant1	2402	1.1850	2401.4060	2402.5910
		2441	1.1850	2440.4030	2441.5880
		2480	1.1820	2479.4030	2480.5850
3DH5	Ant1	2402	1.1910	2401.4030	2402.5940
		2441	1.1940	2440.4000	2441.5940
		2480	1.1880	2479.4030	2480.5910


5.5. Test graphs

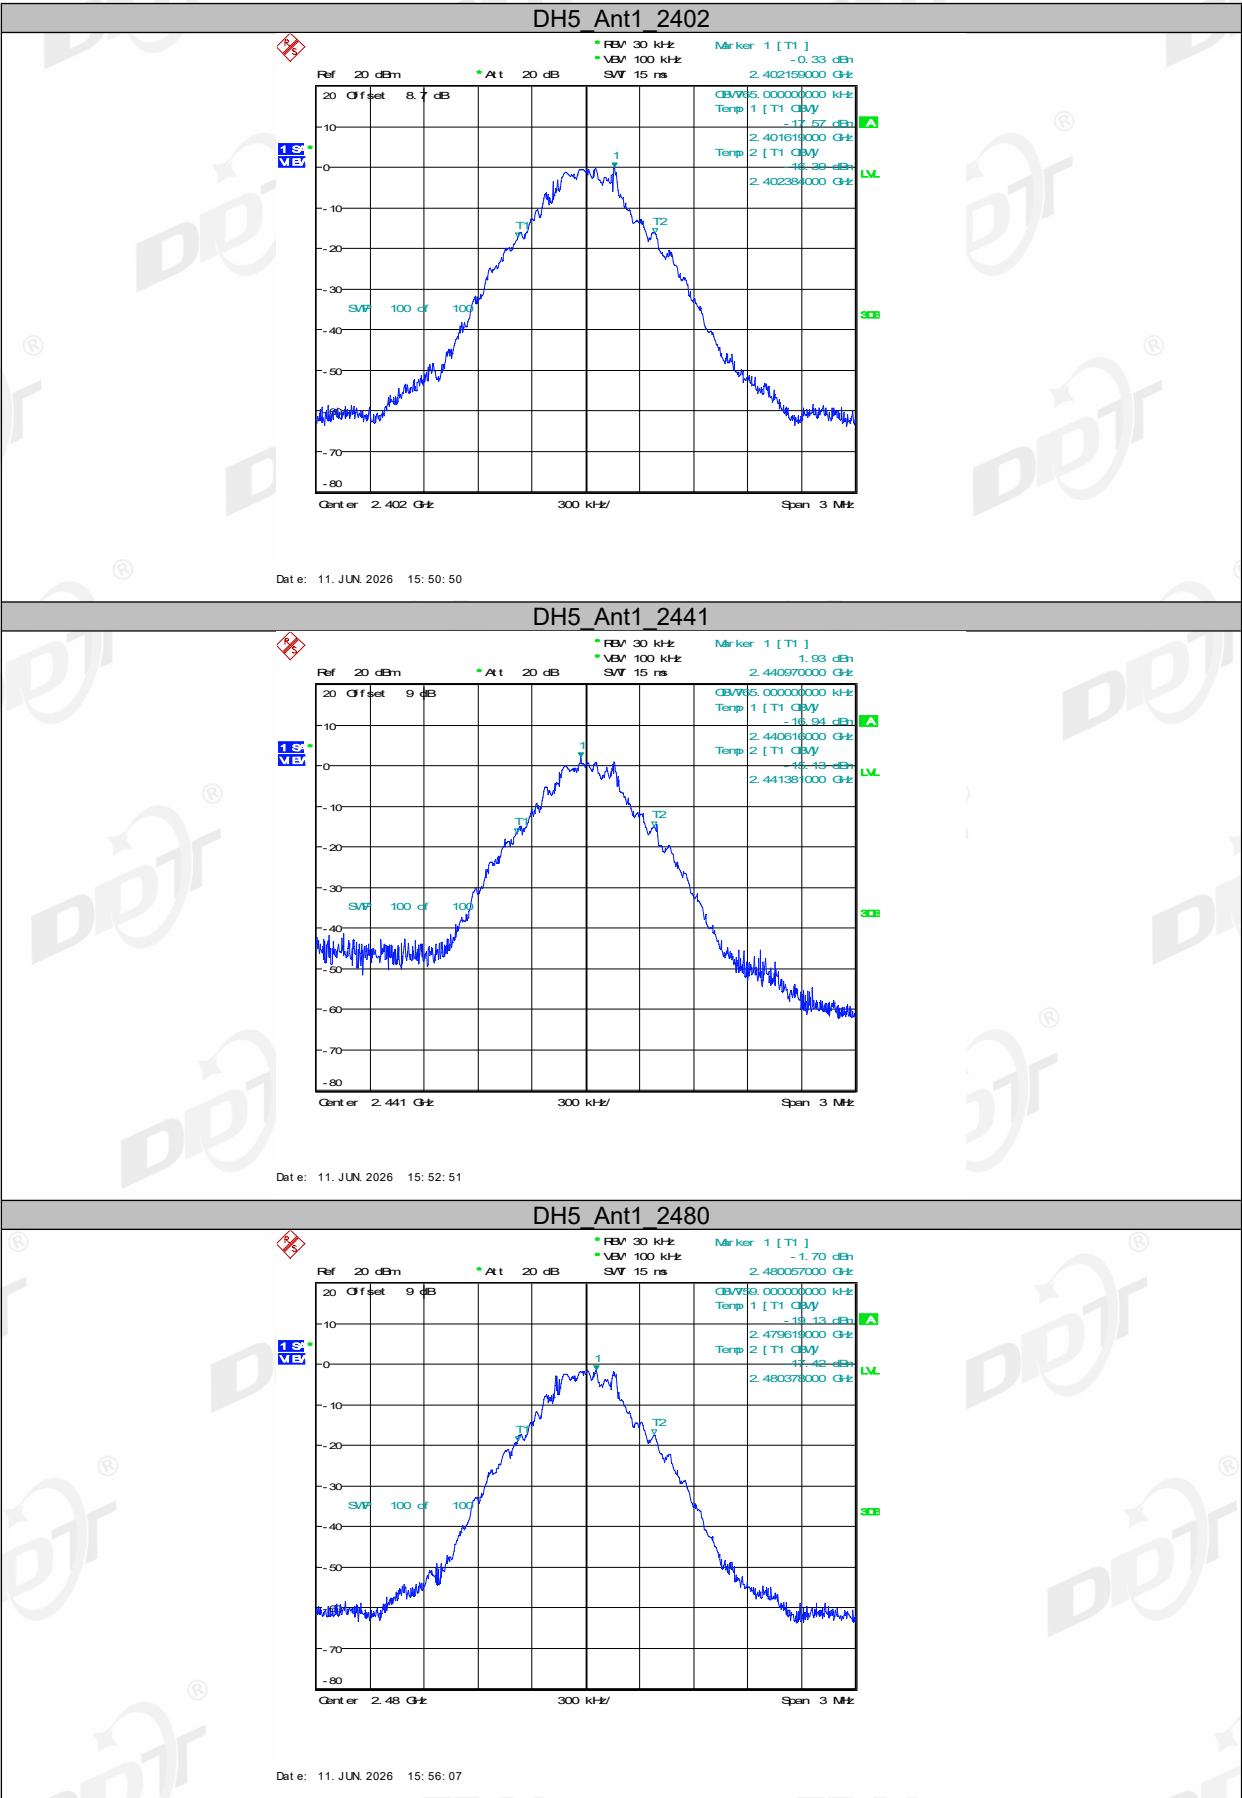

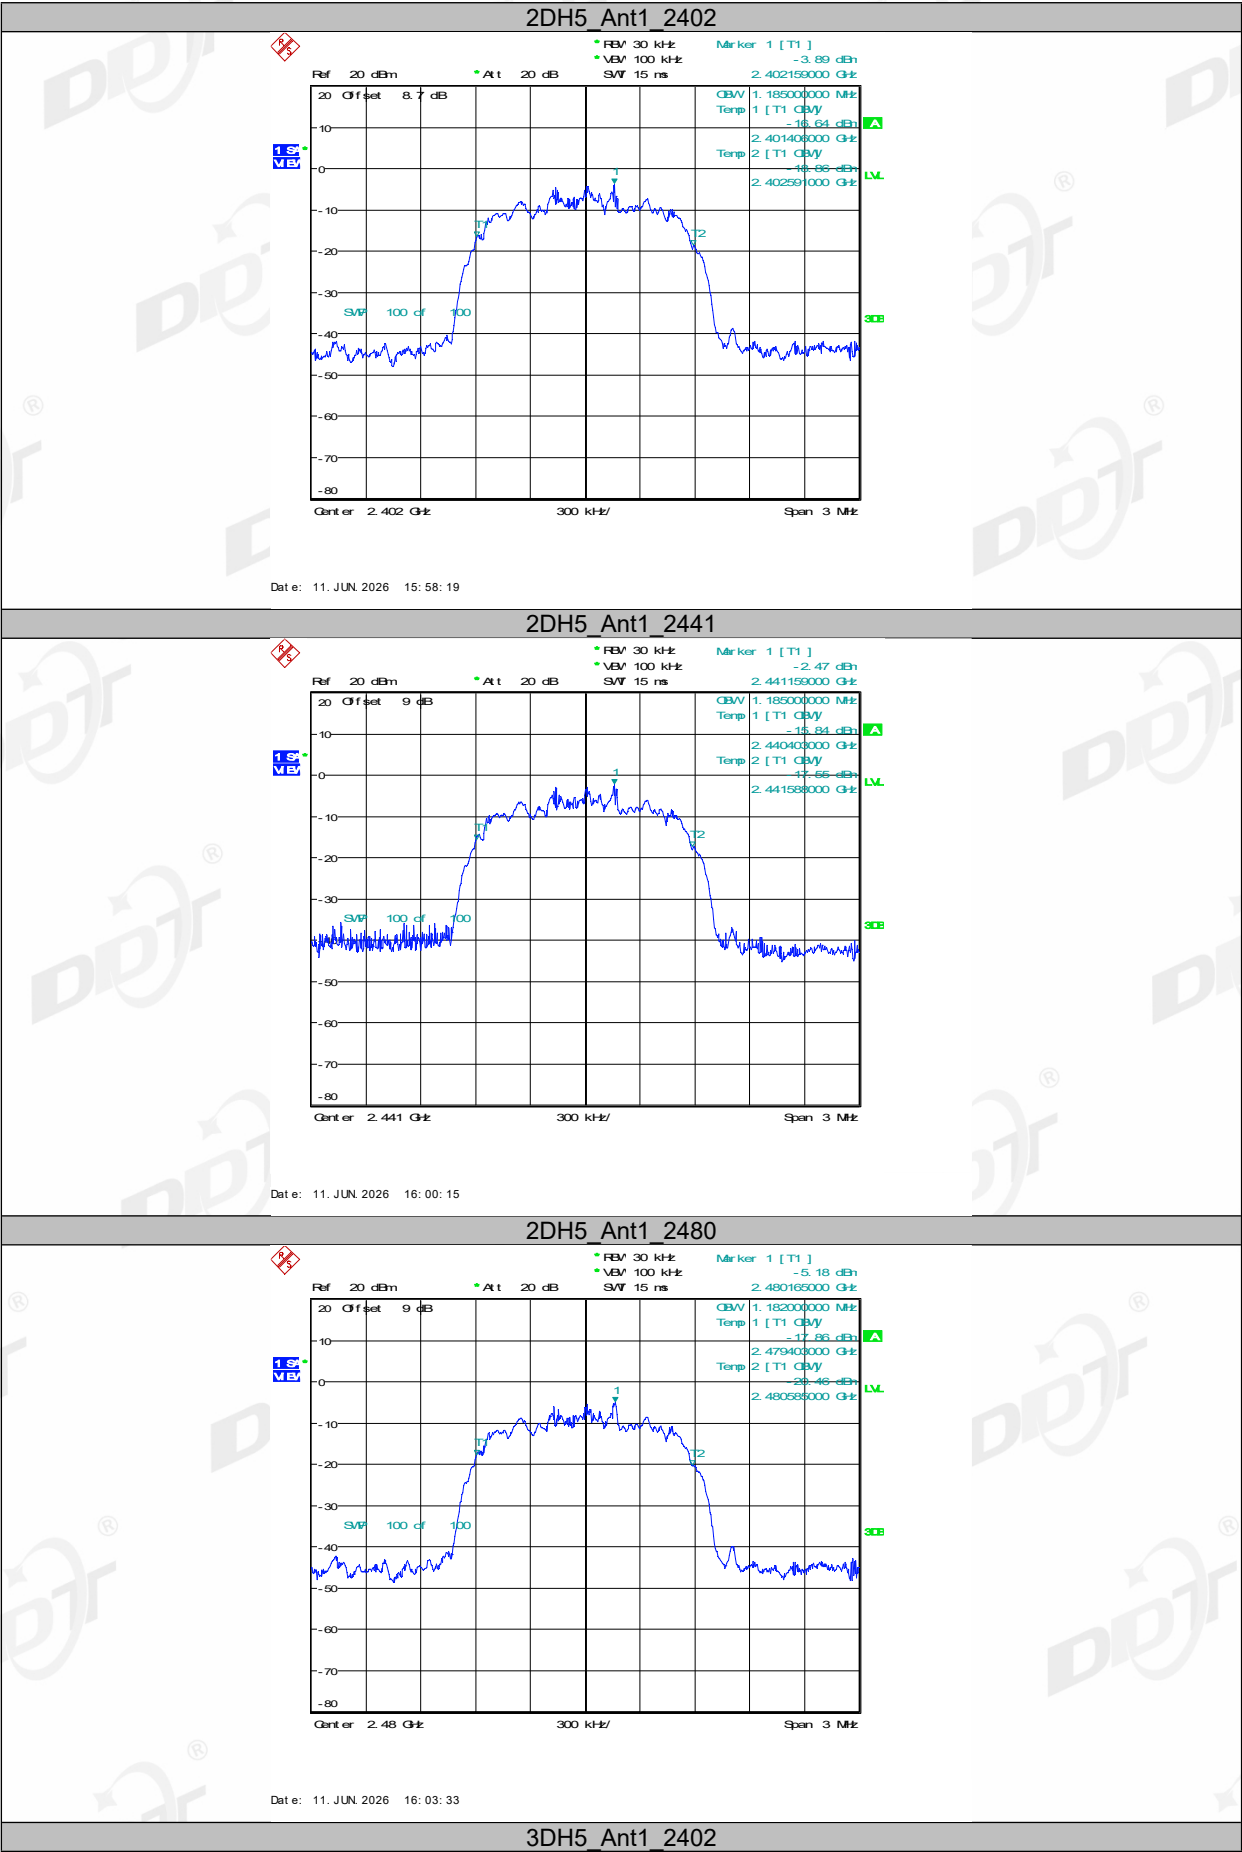


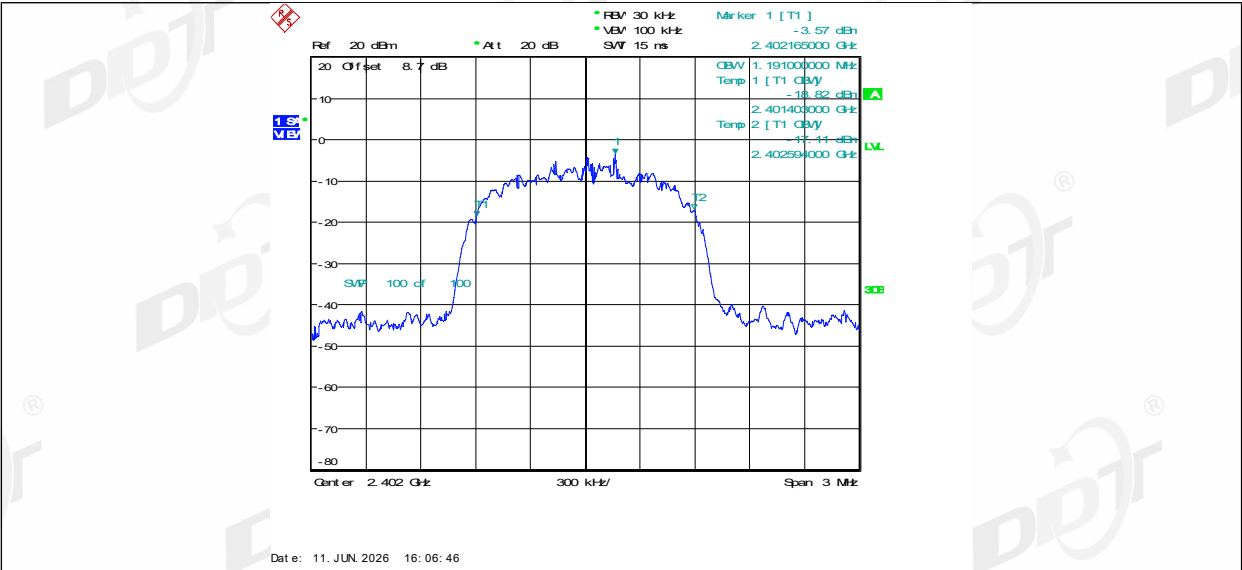

3DH5_Ant1_2441

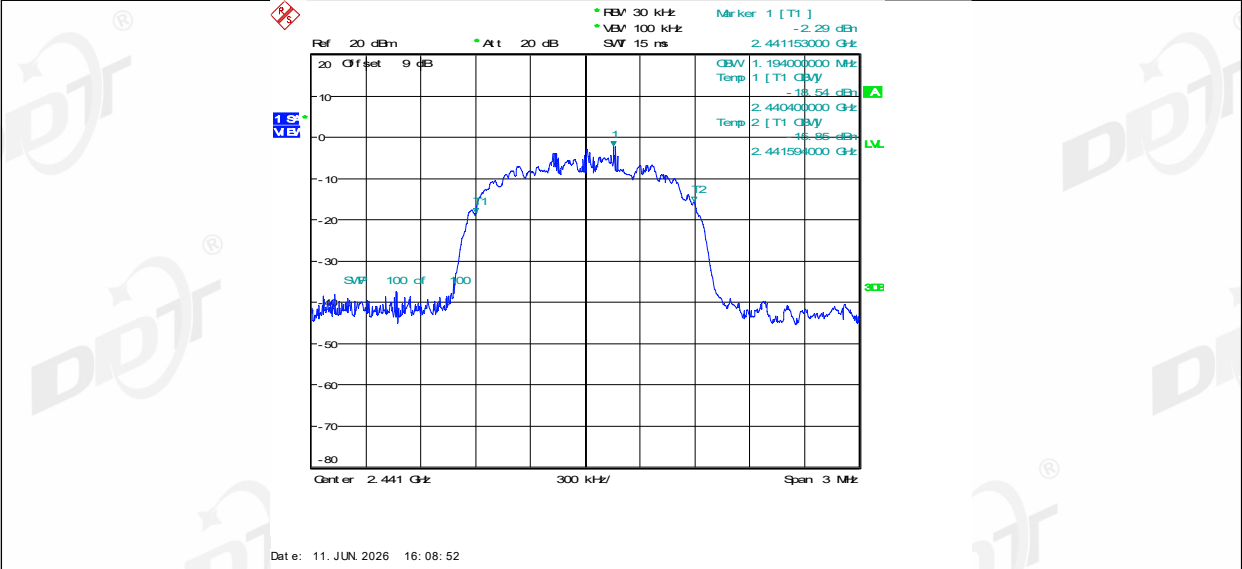


3DH5_Ant1_2480

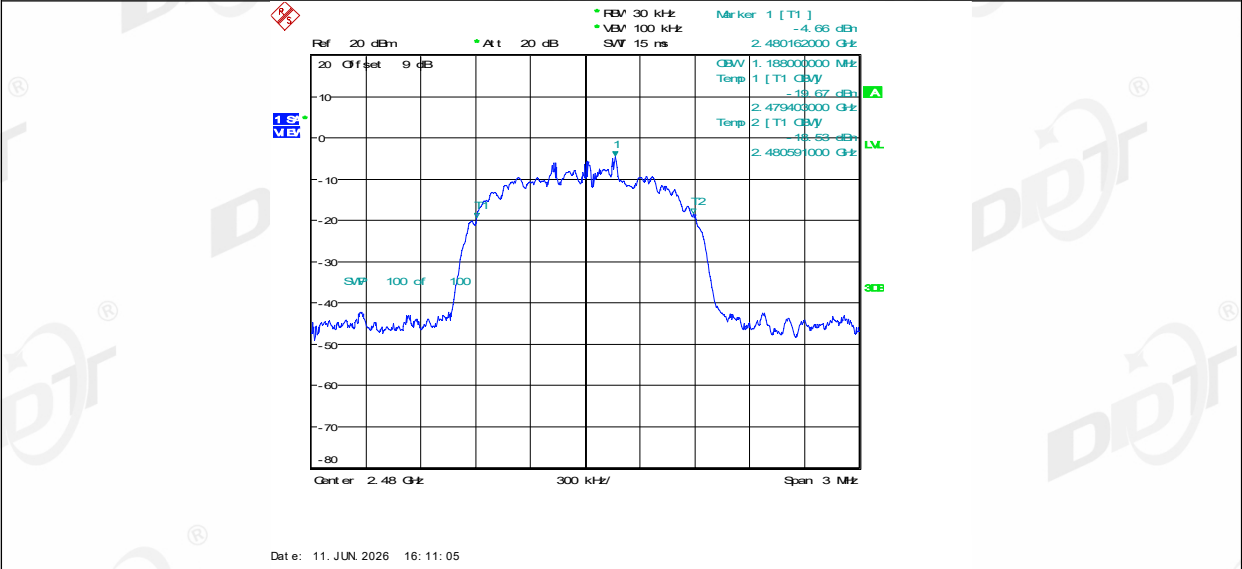

6. Maximum Peak Output Power

6.1. Block diagram of test setup

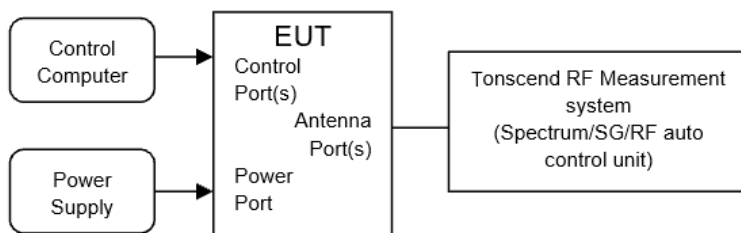

6.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

6.3. Test procedure

- (1) The test according to ANSI C63.10 clause 7.8.5.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:


RBW:	> 20 dB bandwidth of the emission being measured.
VBW:	VBW $\geq$ RBW.
Span:	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-to-peak function to set the marker to the peak of the emission and record the results in the report.

6.4. Test result




Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
DH5	Ant1	2402	4.87	≤20.97	6.47	≤36	PASS
		2441	5.75	≤20.97	7.35	≤36	PASS
		2480	5.82	≤20.97	7.42	≤36	PASS
2DH5	Ant1	2402	3.73	≤20.97	5.33	≤36	PASS
		2441	4.50	≤20.97	6.10	≤36	PASS
		2480	4.81	≤20.97	6.41	≤36	PASS
3DH5	Ant1	2402	4.10	≤20.97	5.70	≤36	PASS
		2441	5.03	≤20.97	6.63	≤36	PASS
		2480	5.25	≤20.97	6.85	≤36	PASS

6.5. Test graphs

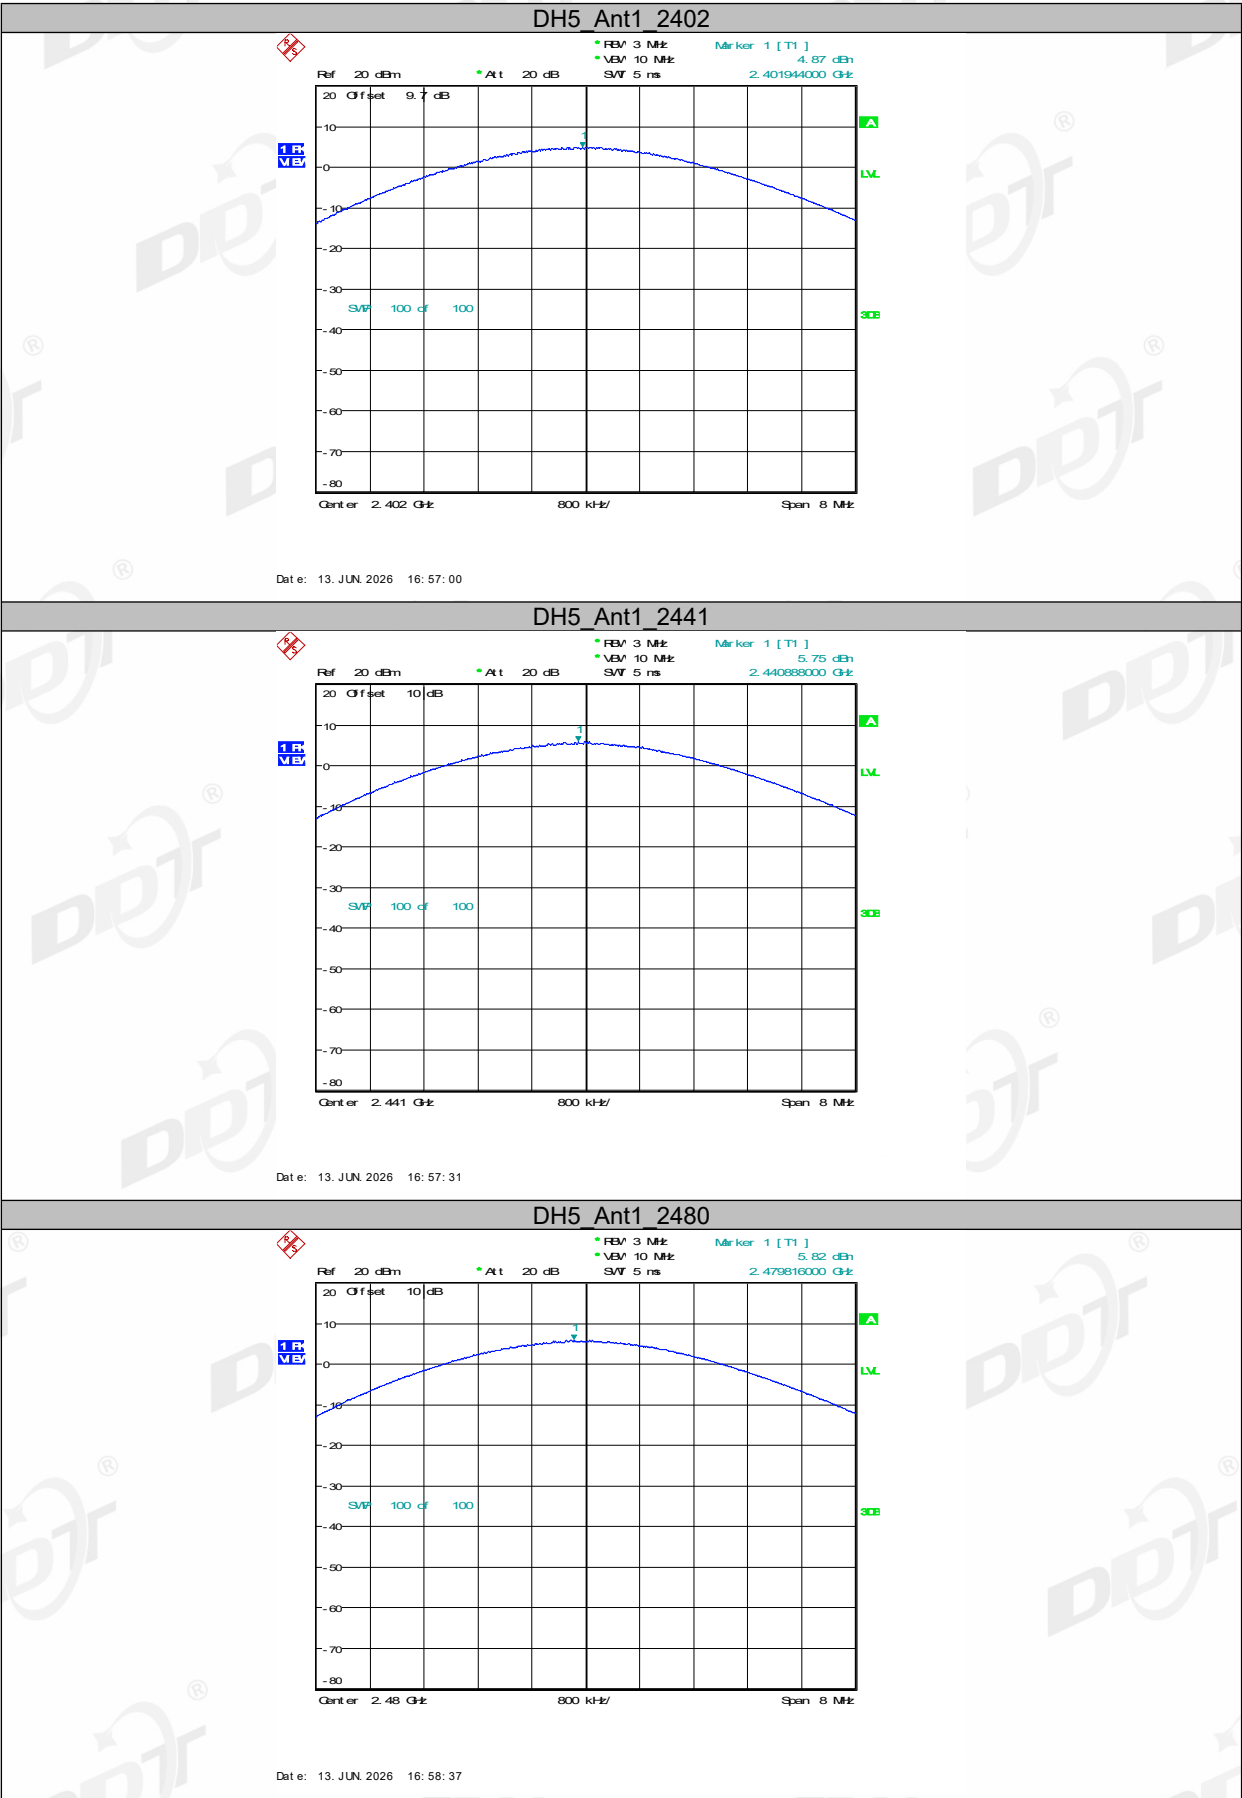




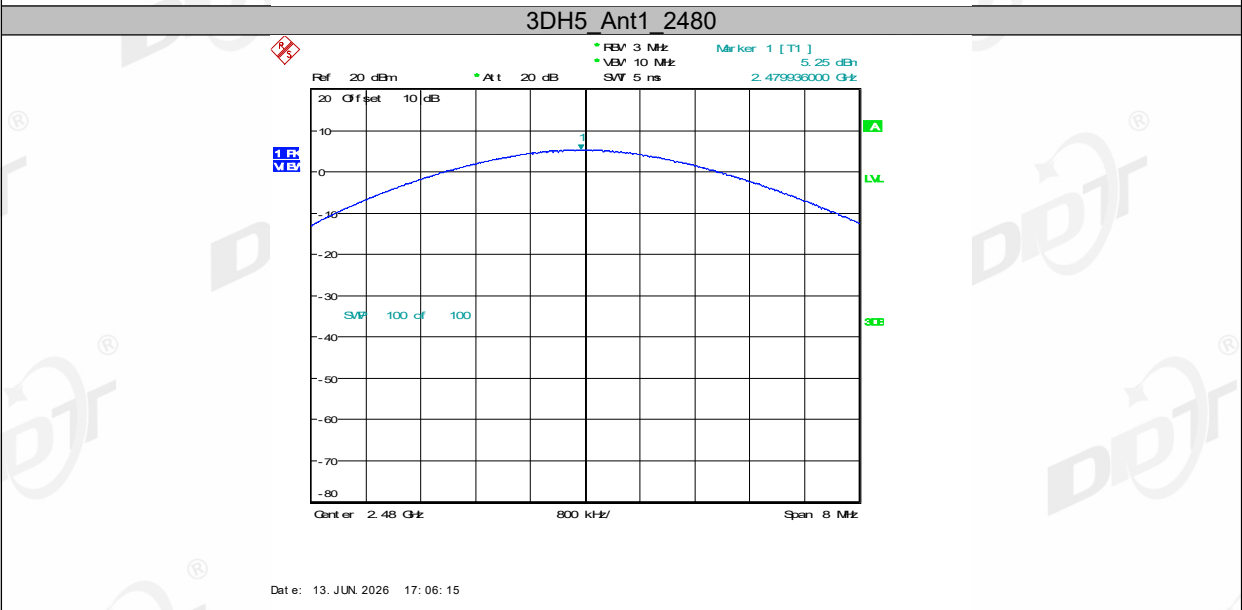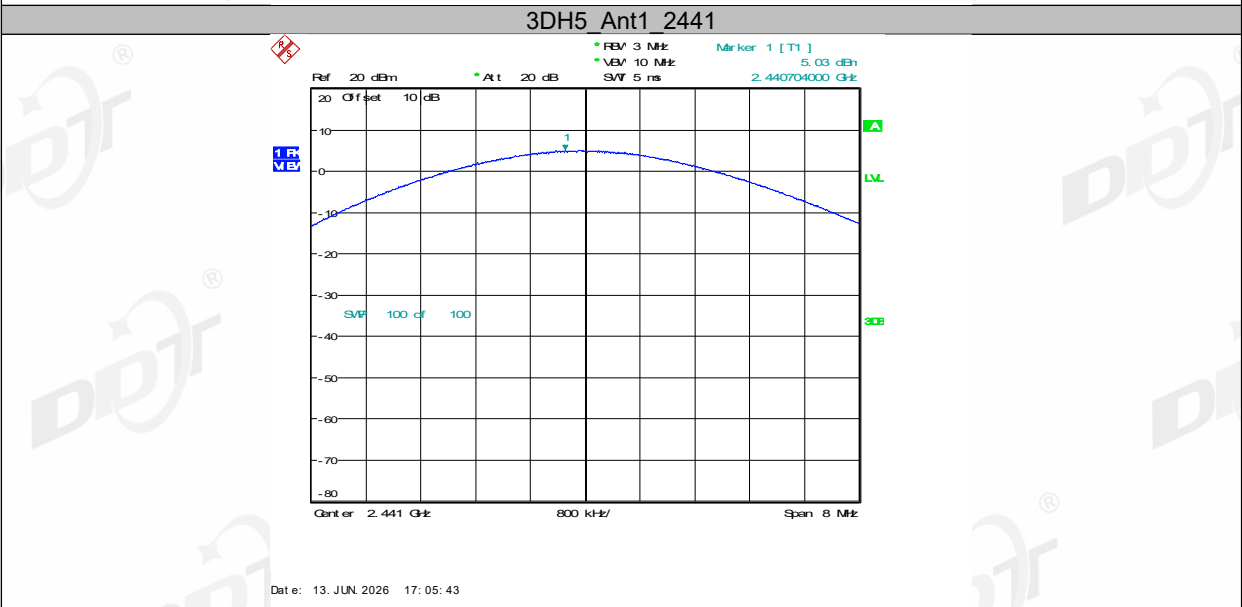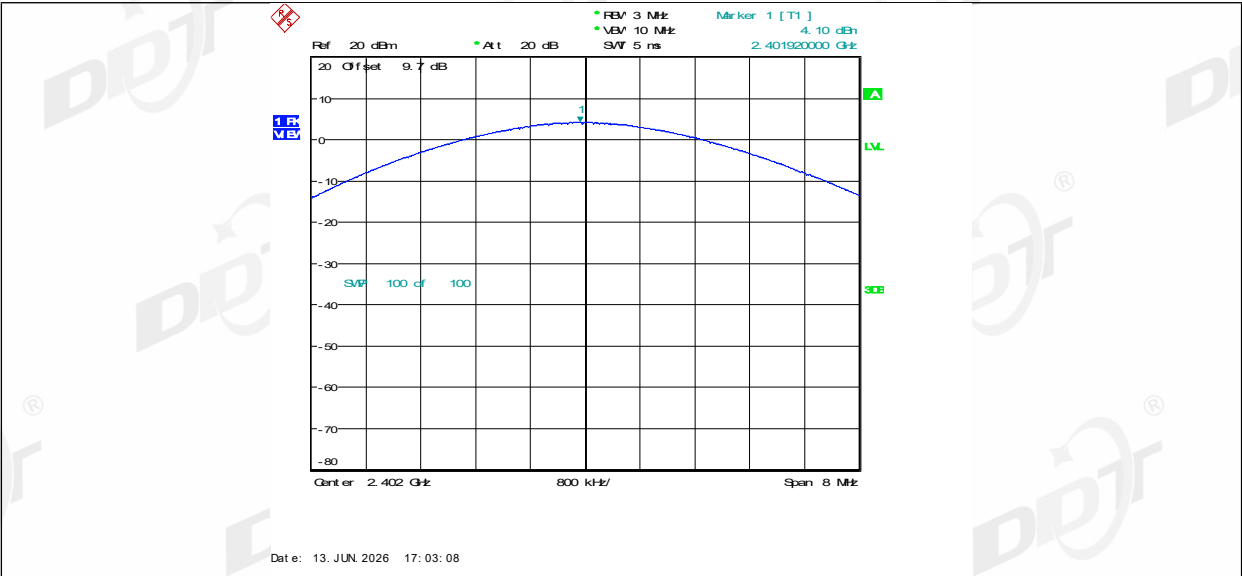

7. Carrier Frequency Separation

7.1. Block diagram of test setup

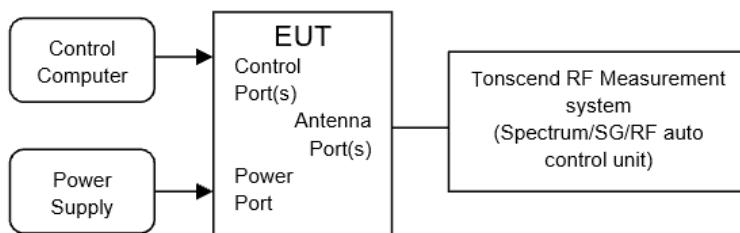

7.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

- (1) The test according to ANSI C63.10 clause 7.8.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	approximately 30% of the channel spacing
VBW:	$VBW \geq RBW$.
Span:	Wide enough to capture the peaks of two adjacent channels.
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Use the marker-delta function to determine the separation between the peaks of the adjacent channels and record the results in the report.

7.4. Test result

Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036


Test Mode	Antenna	Frequency [MHz]	Result [MHz]	Limit [MHz]	Verdict
DH5	Ant1	Hop	1.013	≥0.860	PASS
2DH5	Ant1	Hop	1.135	≥0.880	PASS
3DH5	Ant1	Hop	1.173	≥0.880	PASS

7.5. Test graphs



8. Dwell Time

8.1. Block diagram of test setup

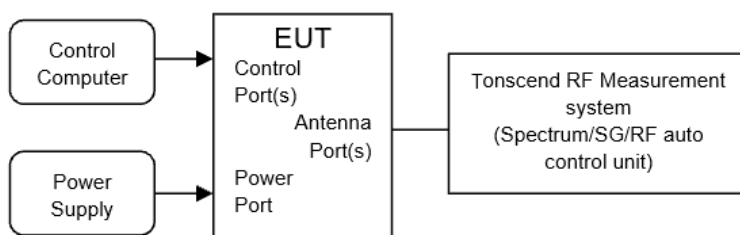

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) The test according to ANSI C63.10 clause 7.8.4.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:
 - RBW: $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$
 - VBW: $VBW \geq RBW$.
 - Span: Zero span, centered on a hopping channel.
 - Detector Mode: Peak
 - Sweep time: Auto
 - Trace mode: Clear Write.
- (5) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (6) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.
- (7) Measure and record the results in the report.

8.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

Test Mode	Antenna	Frequency [MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.350	320	0.112	≤0.4	PASS
DH3	Ant1	Hop	1.610	160	0.258	≤0.4	PASS
DH5	Ant1	Hop	2.870	106.67	0.306	≤0.4	PASS
2DH1	Ant1	Hop	0.370	320	0.118	≤0.4	PASS
2DH3	Ant1	Hop	1.620	160	0.259	≤0.4	PASS
2DH5	Ant1	Hop	2.880	106.67	0.307	≤0.4	PASS
3DH1	Ant1	Hop	0.360	320	0.115	≤0.4	PASS
3DH3	Ant1	Hop	1.620	160	0.259	≤0.4	PASS
3DH5	Ant1	Hop	2.870	106.67	0.306	≤0.4	PASS


8.5. Test graphs






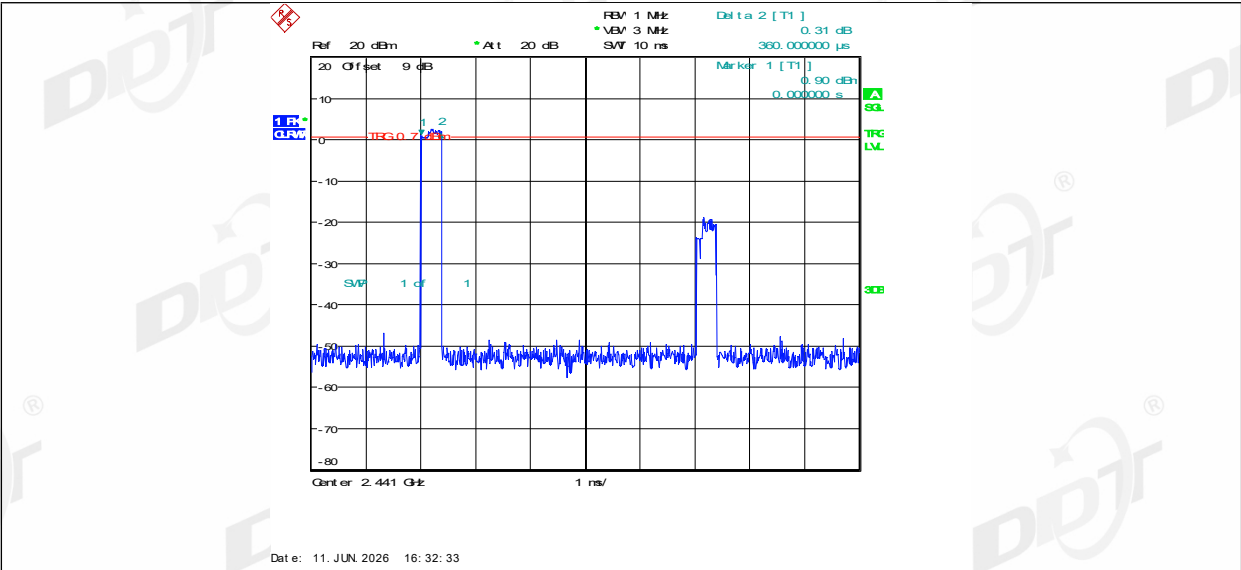

3DH3_Ant1_Hop

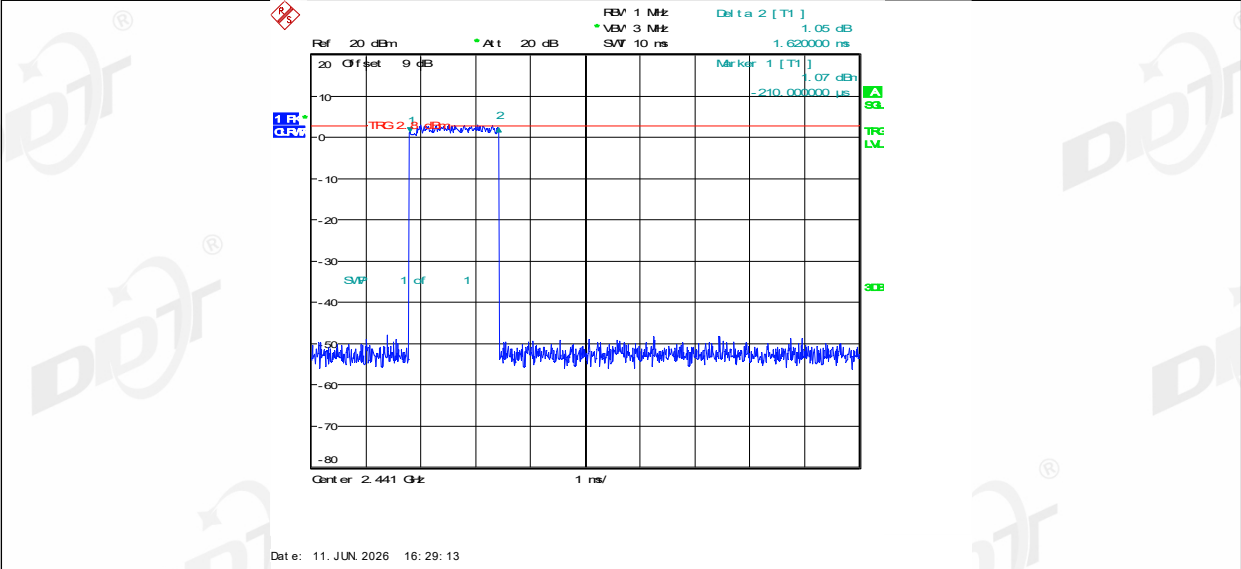


3DH5_Ant1_Hop

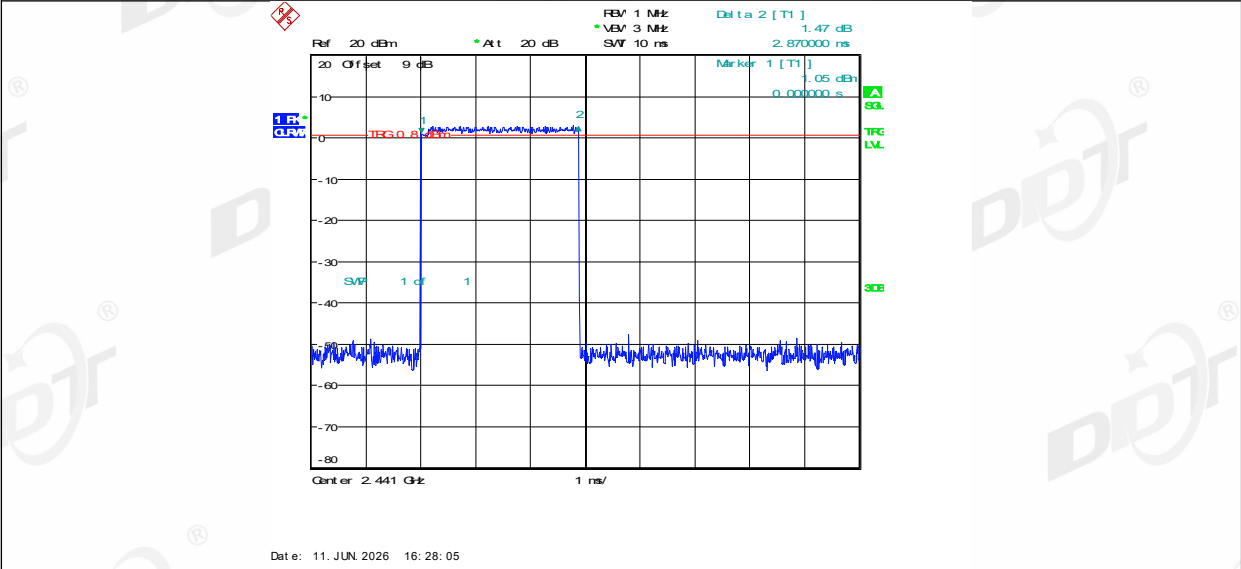

9. Number of Hopping Channel

9.1. Block diagram of test setup

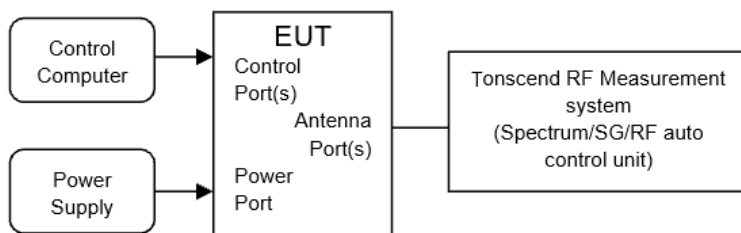

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	VBW $\geq$ RBW.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold
- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

9.4. Test result

Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

9.5. Test graphs



10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

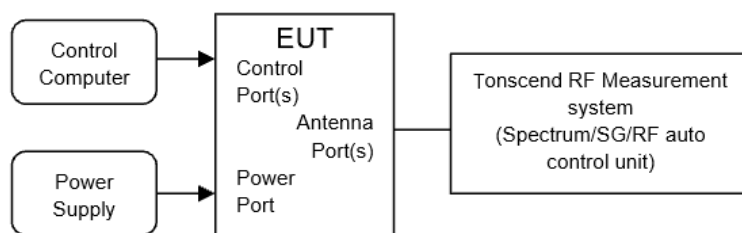

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.

10.4. Test result

Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs





2DH5_Ant1_High_2480

Ref 20 dBm

Offset 9 dB

Att 20 dB

RBW 100 kHz

VBW 300 kHz

SMF 10 ns

Marker 4 [T1]

-54.45 dBm

2.488597744 GHz

1

2

3

4

Marker 1 [T1]

-1.62 dBm

2.480000000 GHz

Marker 2 [T1]

-57.84 dBm

2.483699999 GHz

Marker 3 [T1]

-58.95 dBm

2.500000000 GHz




Start 2.47 GHz


8 MHz

Stop 2.55 GHz


Date: 11. JUN 2026 16:03:54

2DH5_Ant1_Low_Hop_2402

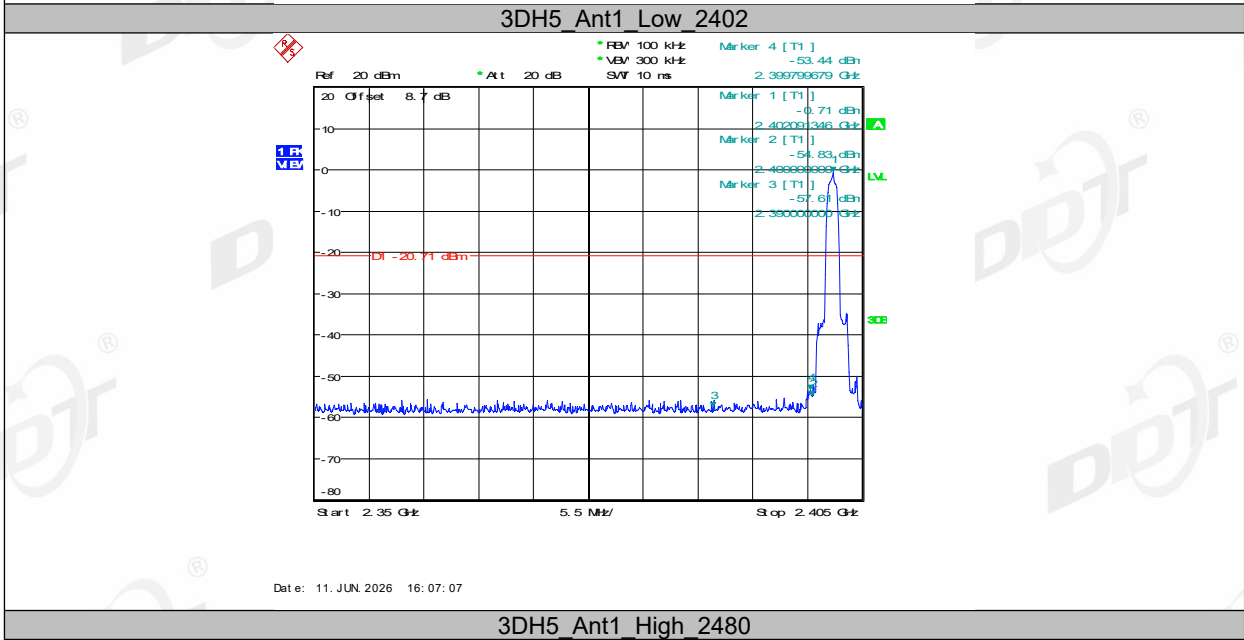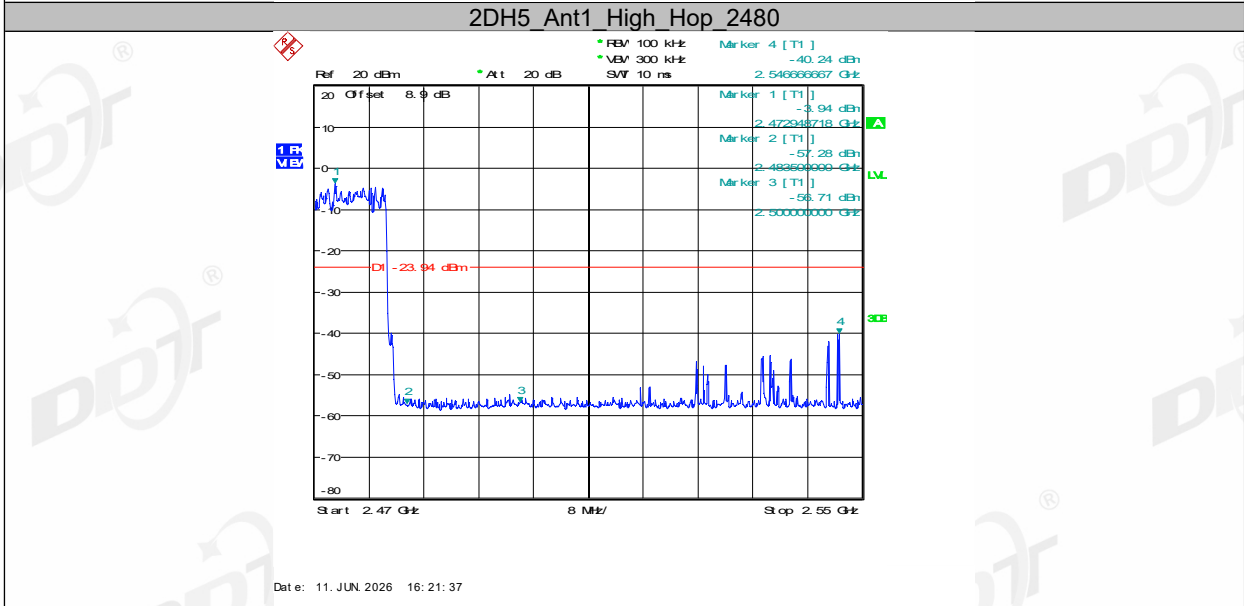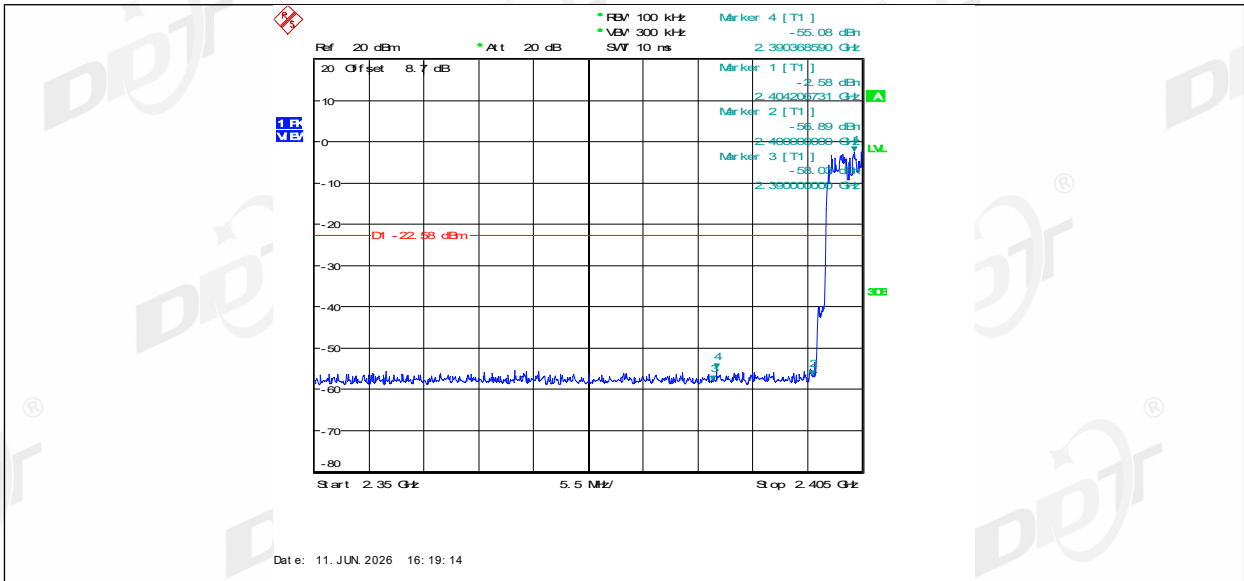


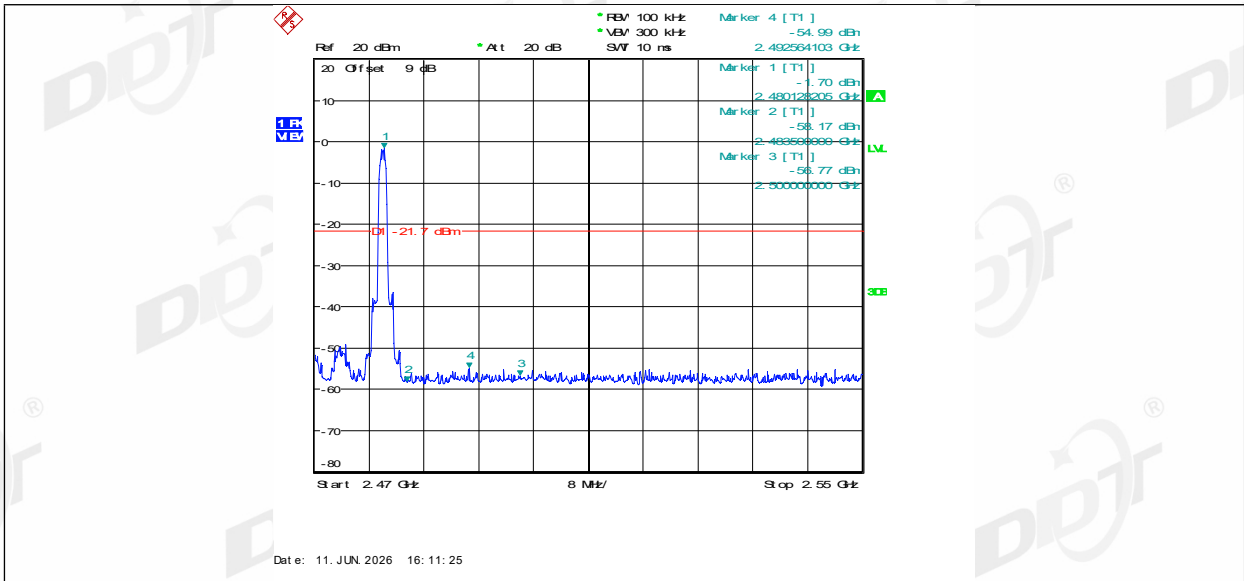

3DH5 Ant1 Low Hop 2402

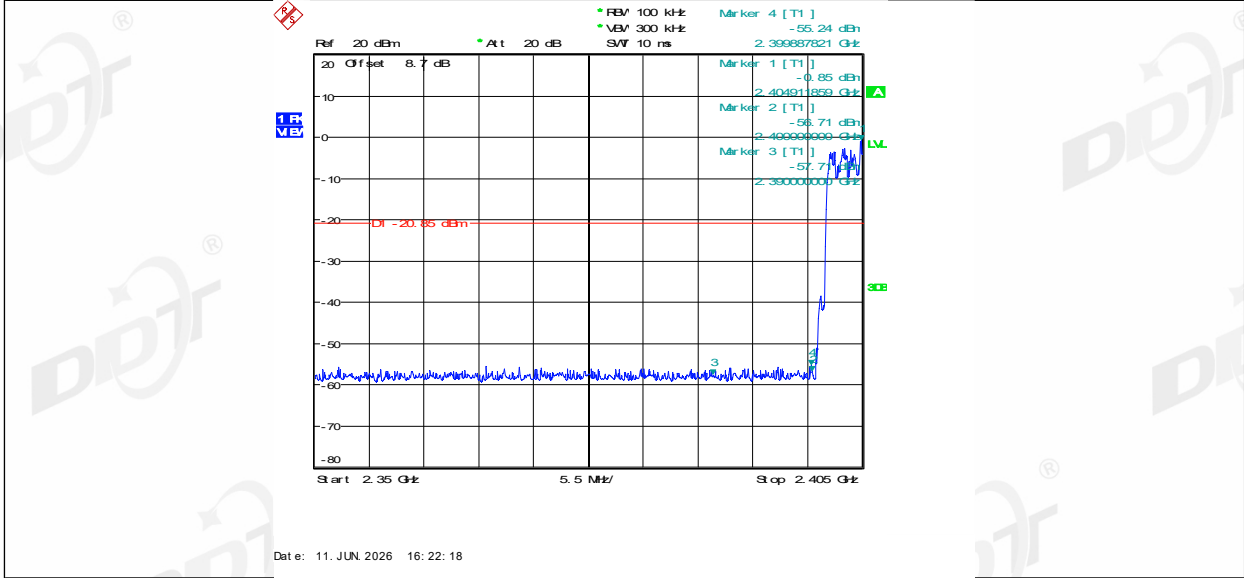


3DH5 Ant1 High Hop 2480

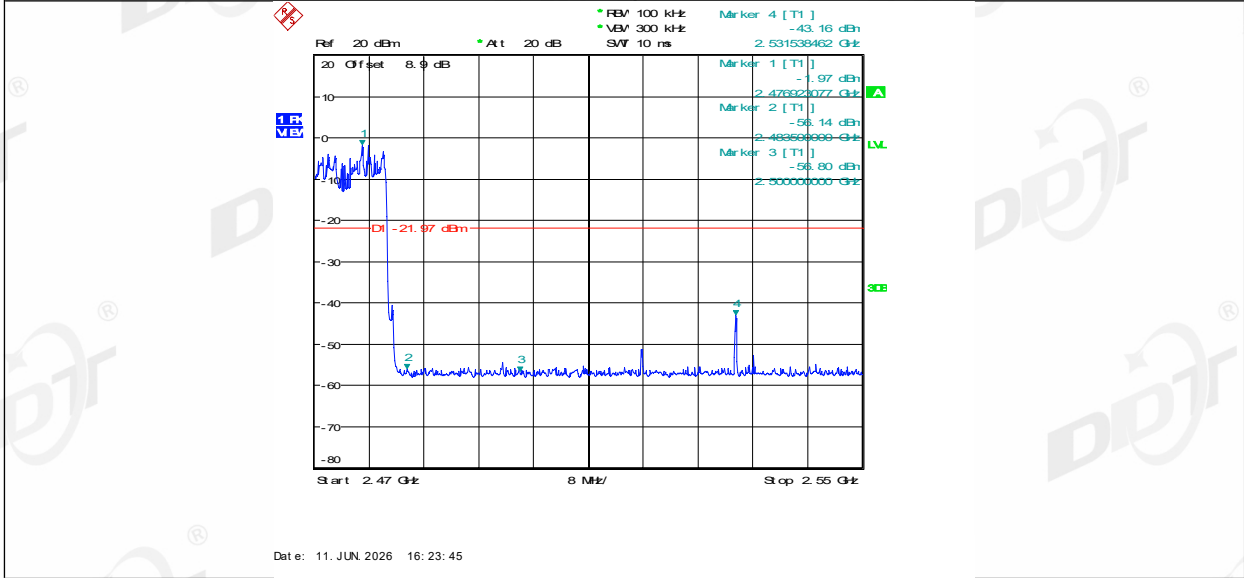

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

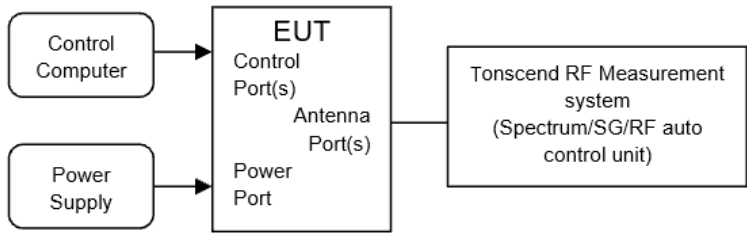

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	≥Span/RBW
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold

Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

11.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
π /4-DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass


11.5. Test graphs











DH5_Ant1_2480_30~1000









DH5_Ant1_2480_1000~26500




2DH5 Ant1 2402 0~Reference

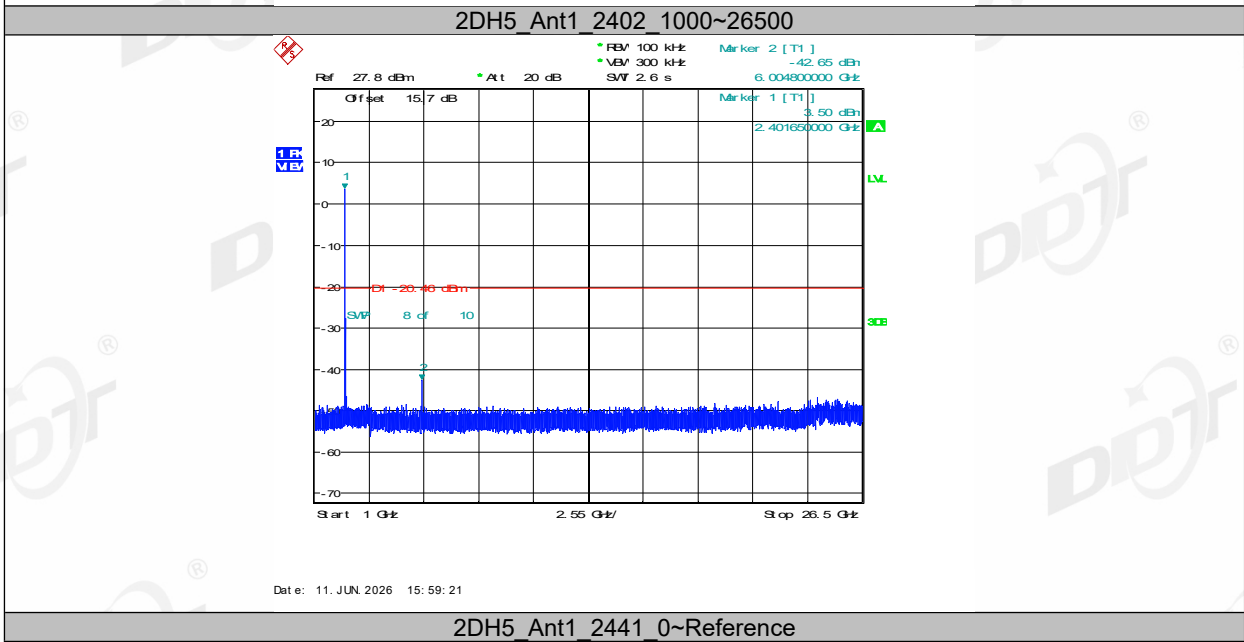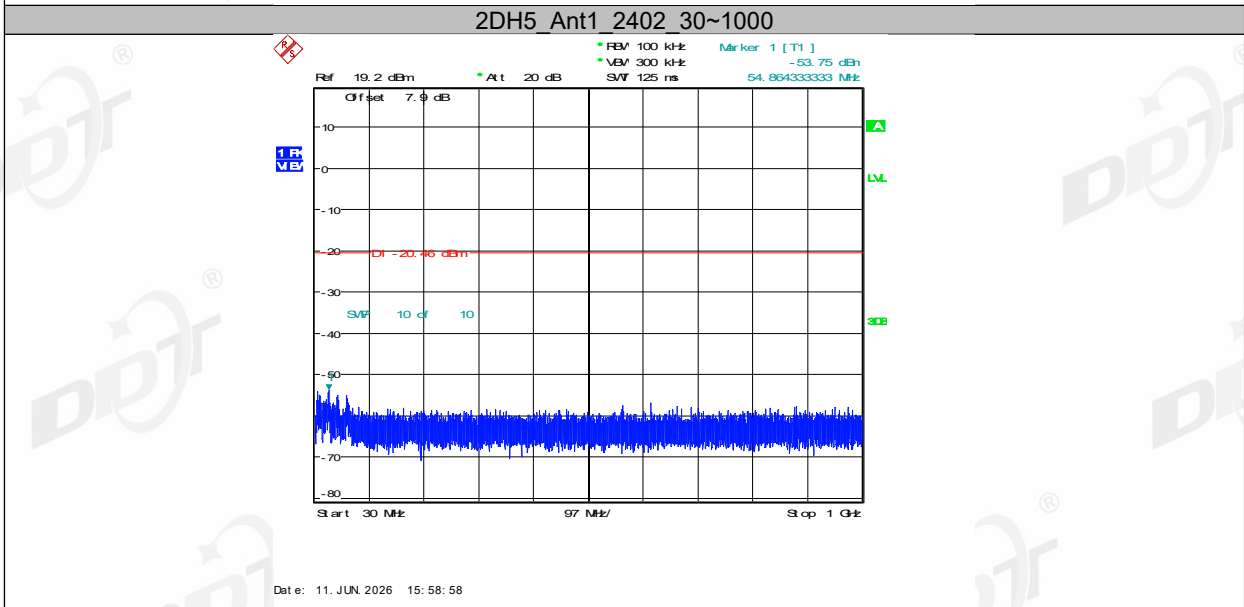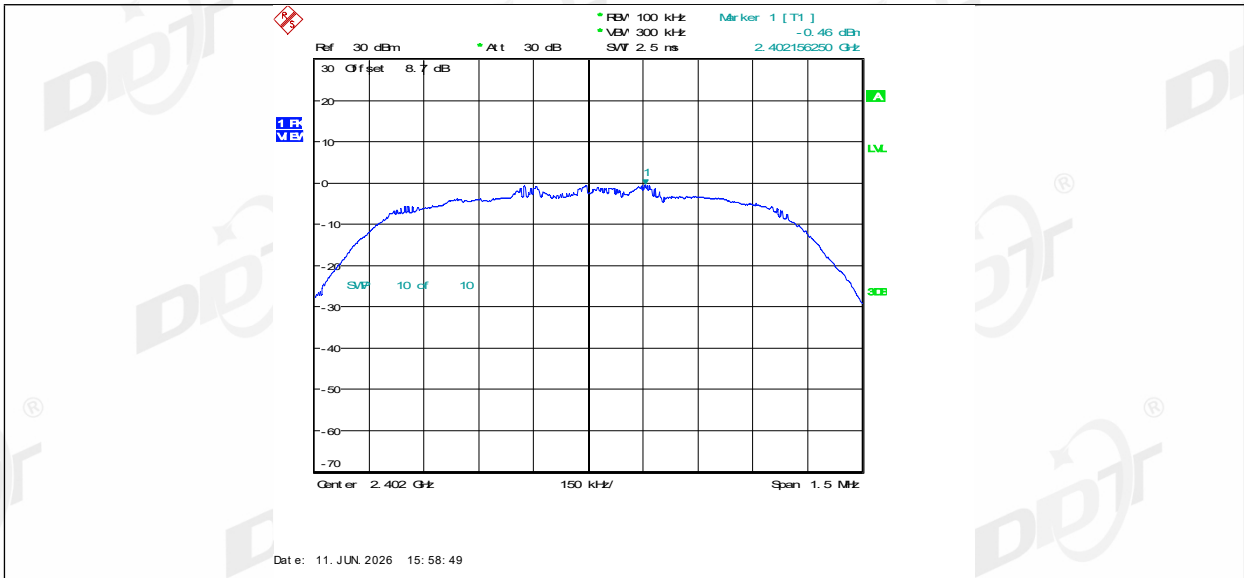


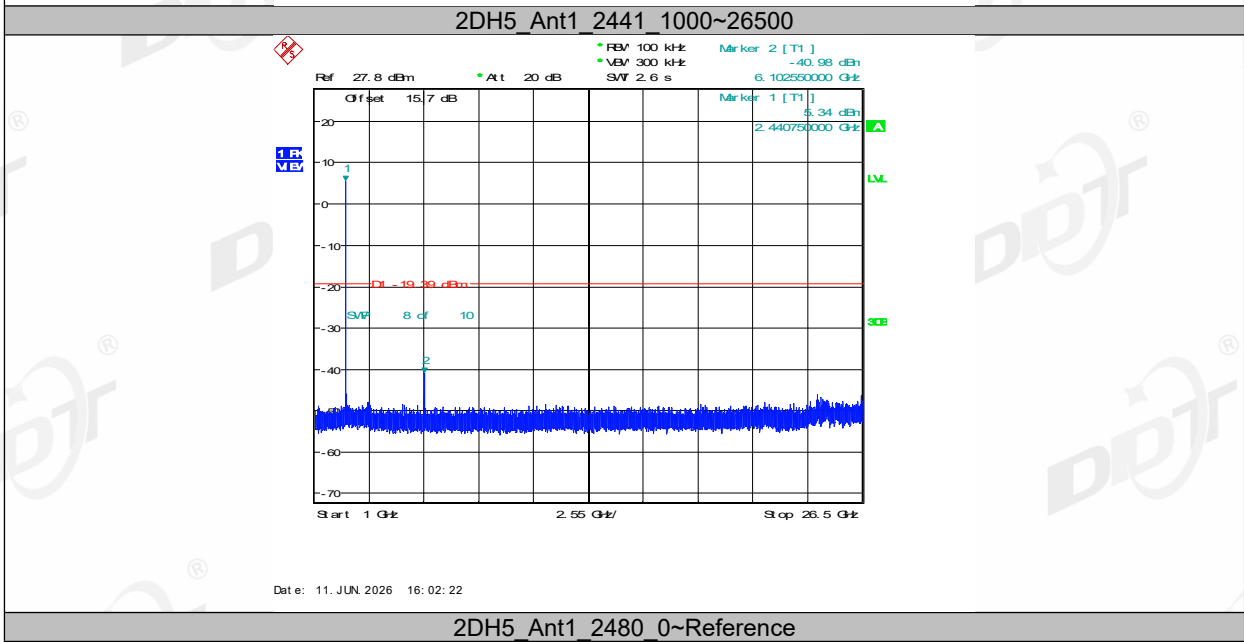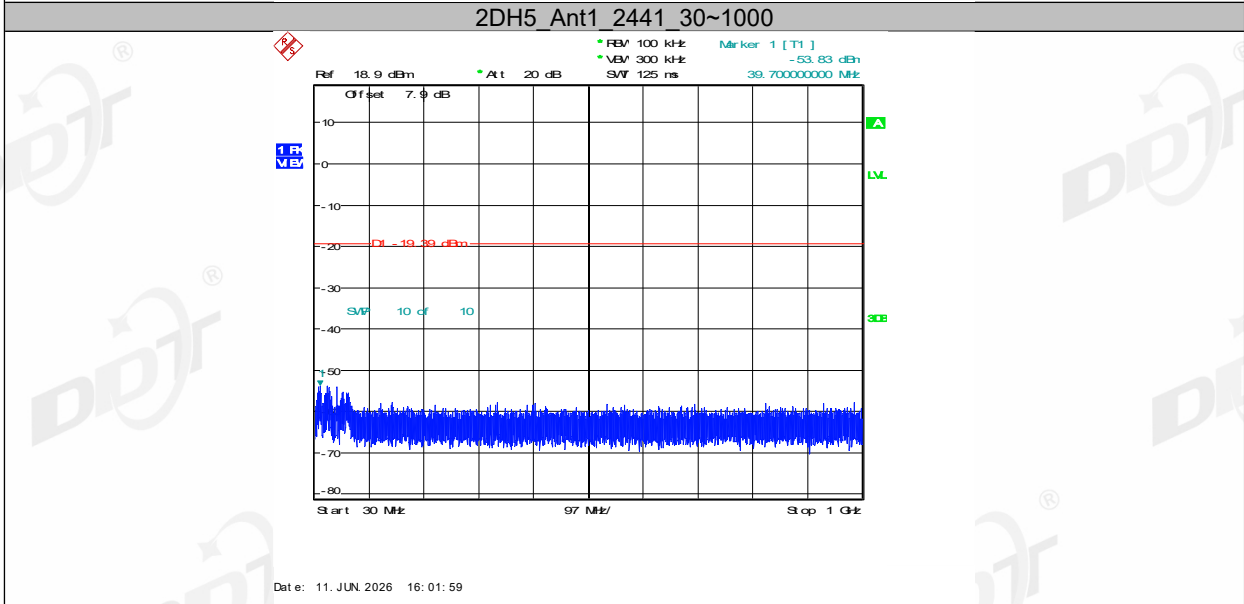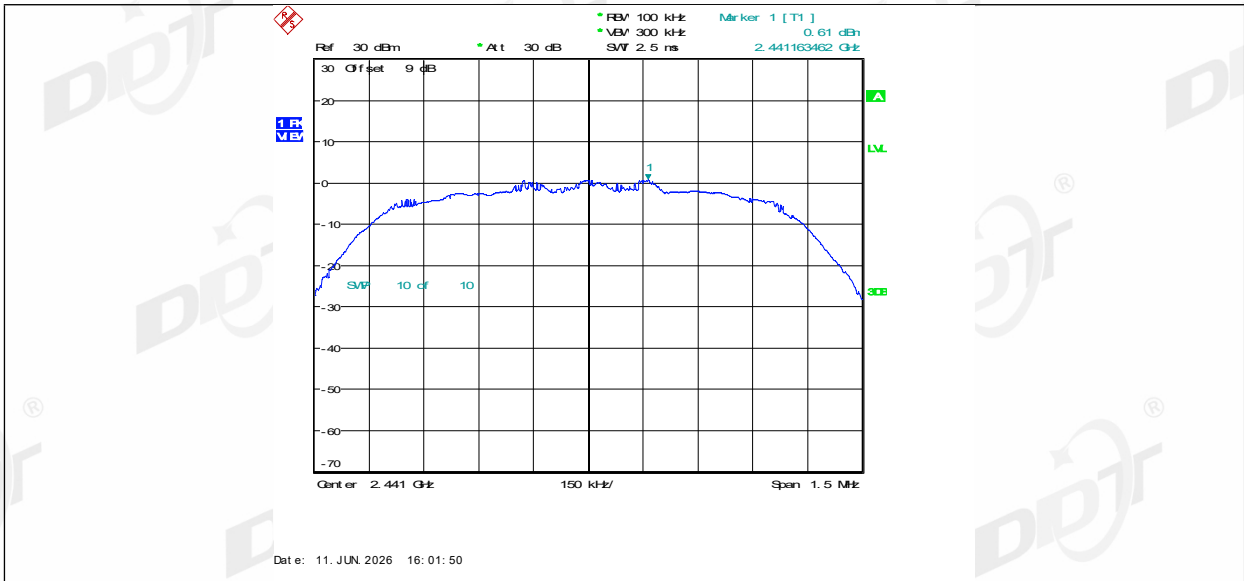

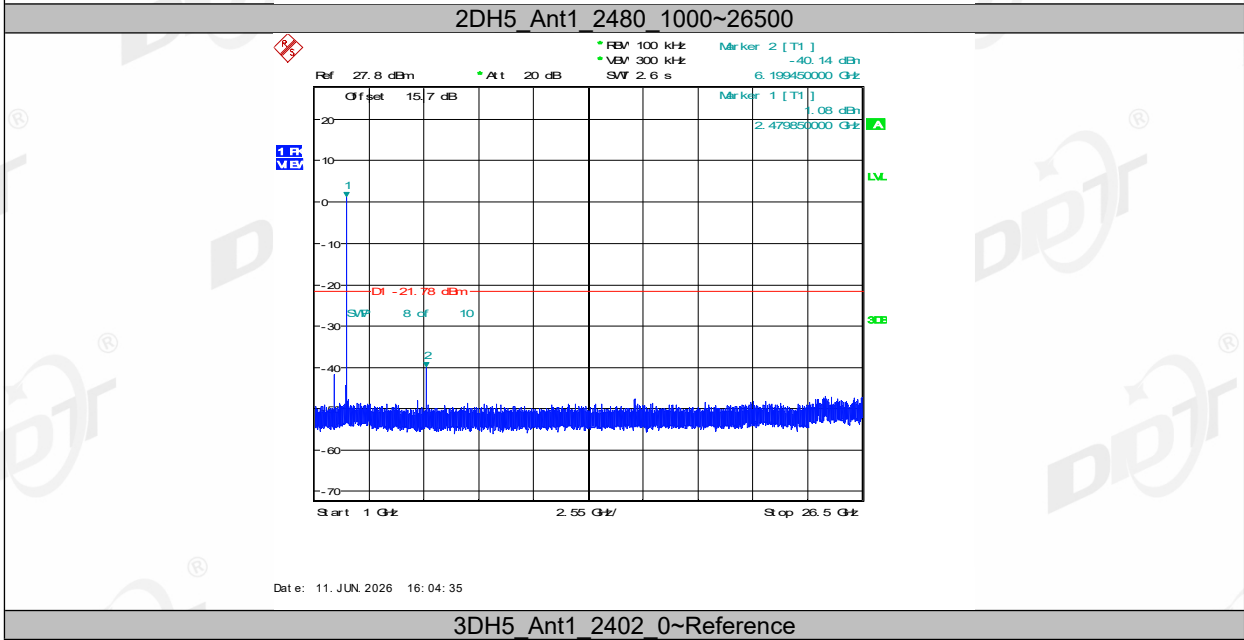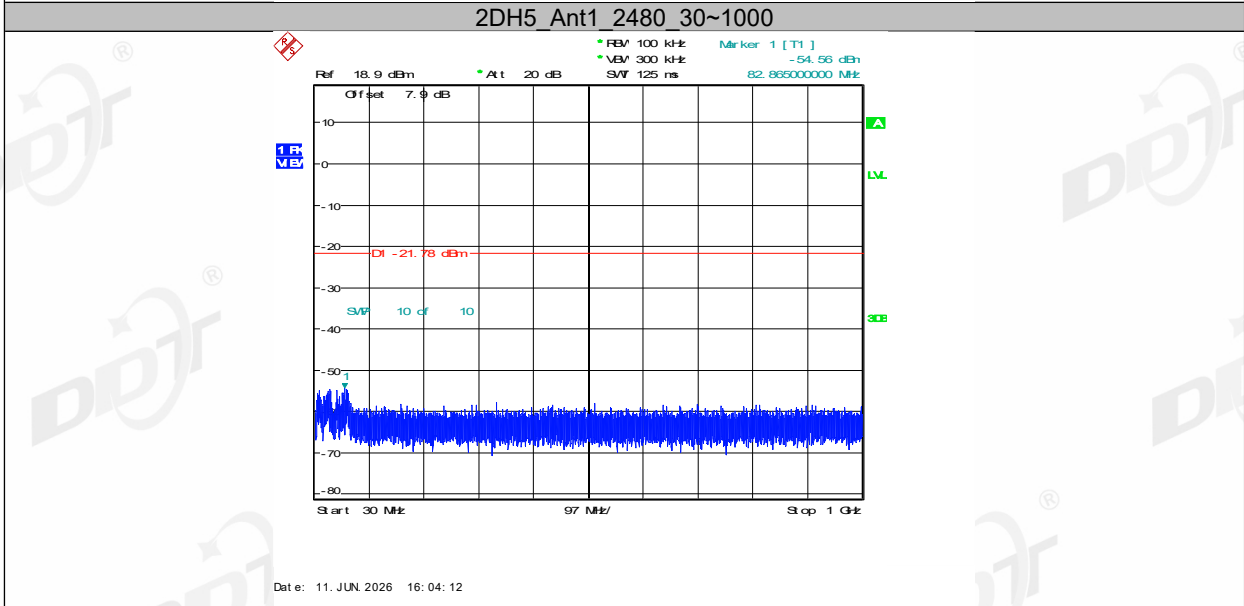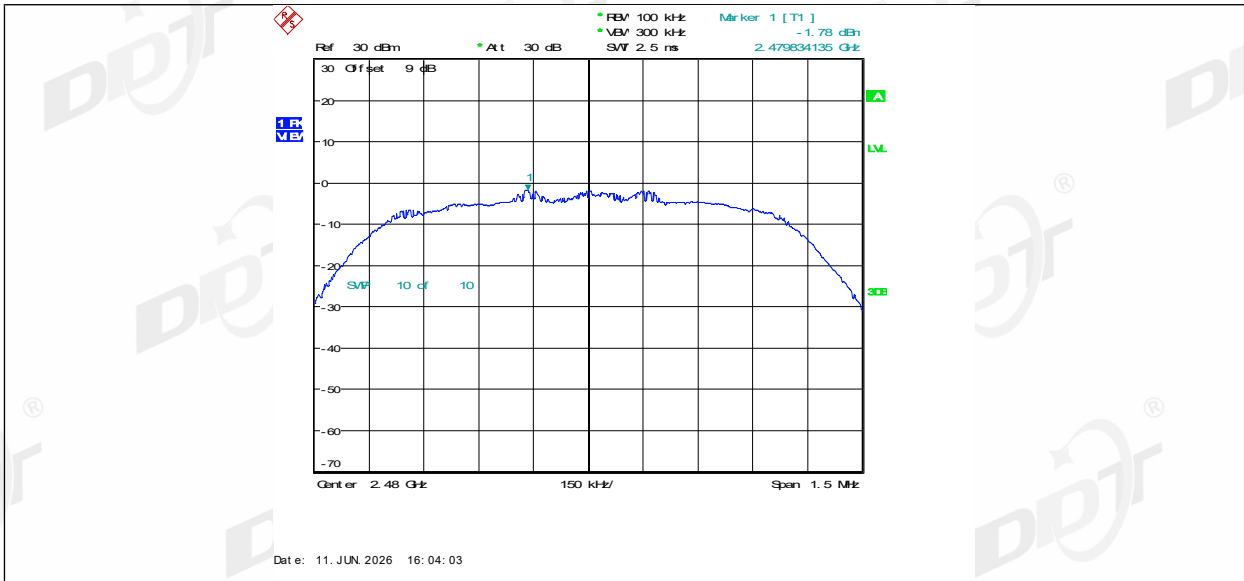


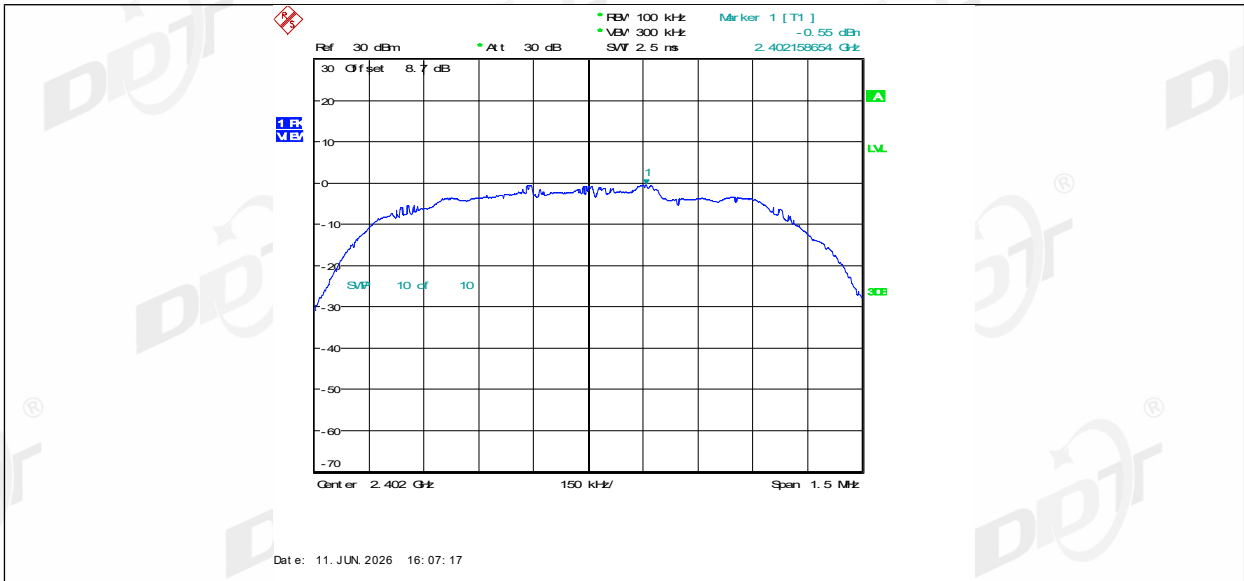


3DH5_Ant1_2402_30~1000

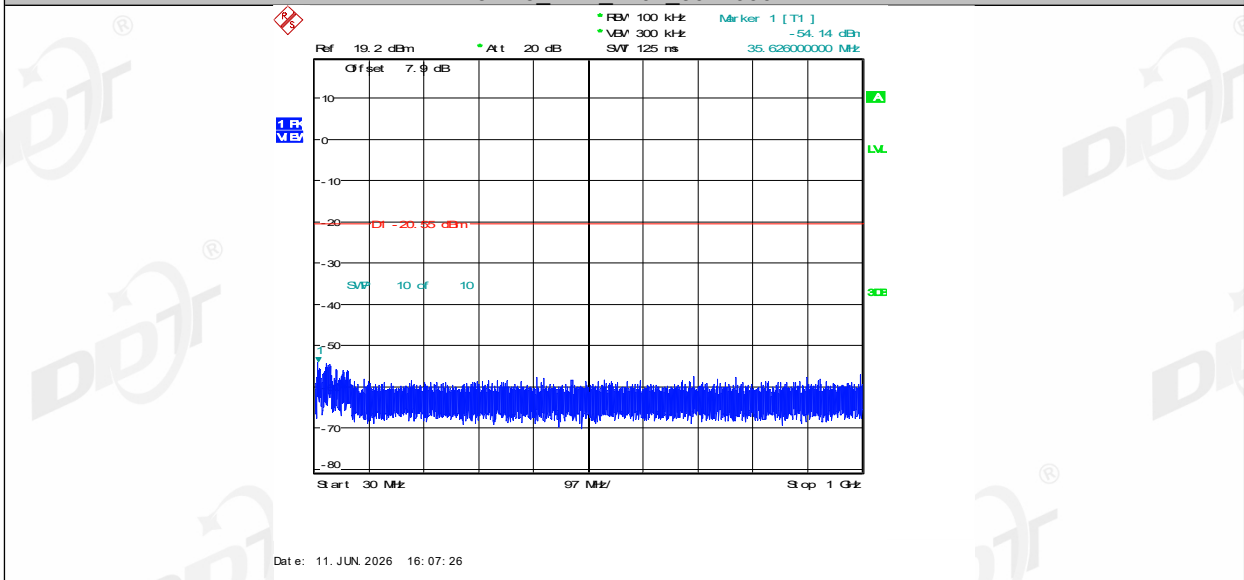


3DH5_Ant1_2402_1000~26500

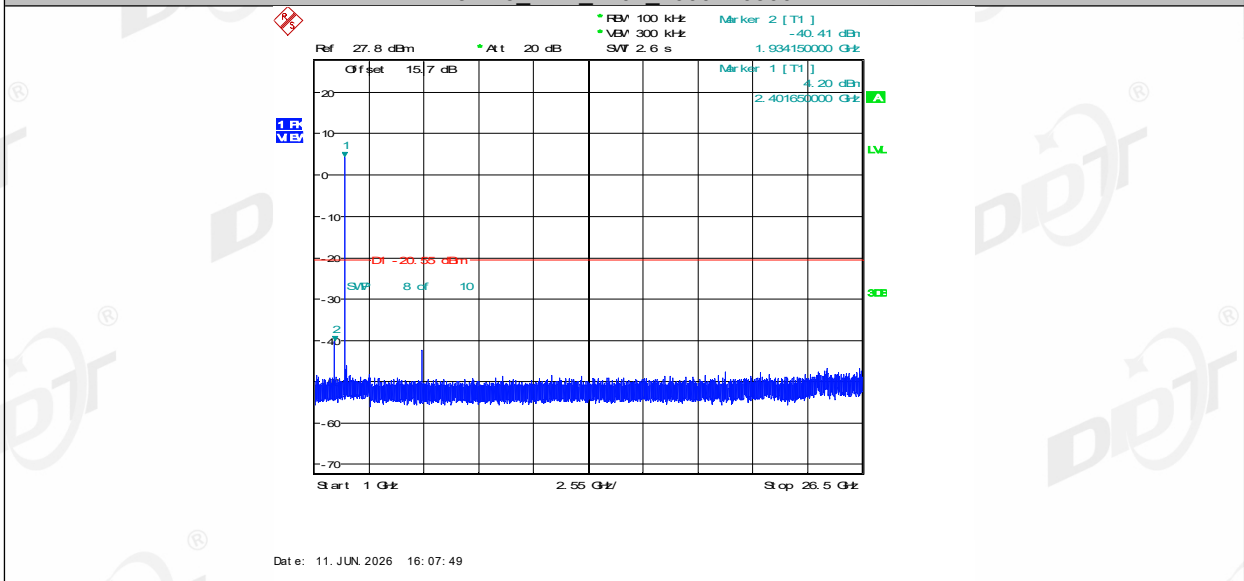


3DH5_Ant1_2441_0~Reference

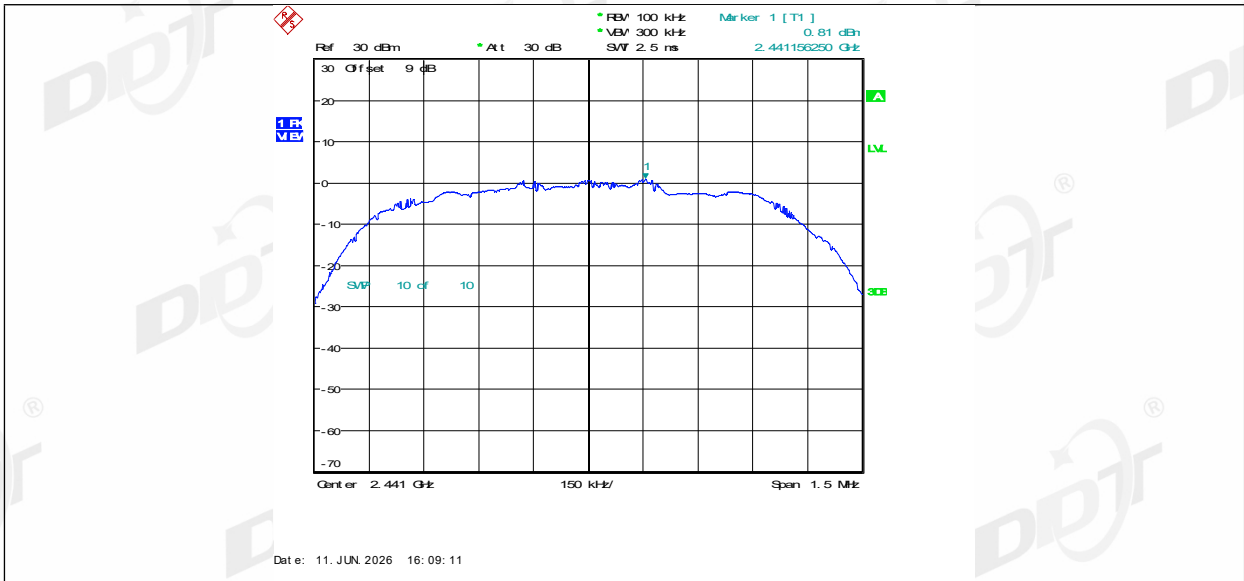


3DH5 Ant1 2441 30~1000

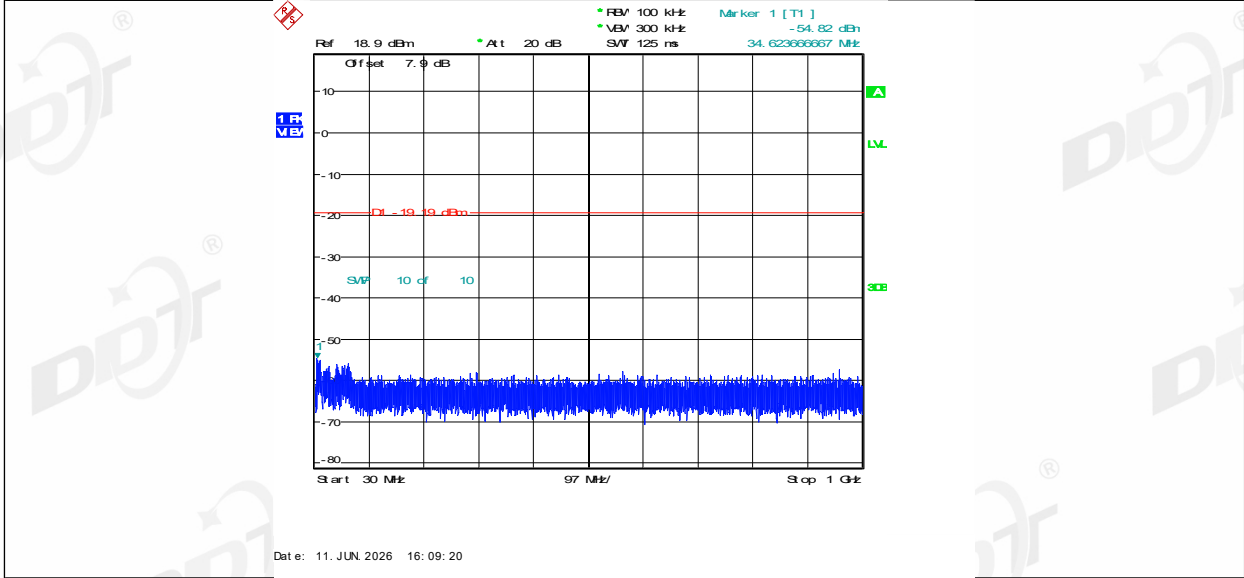

3DH5 Ant1 2441 1000~26500

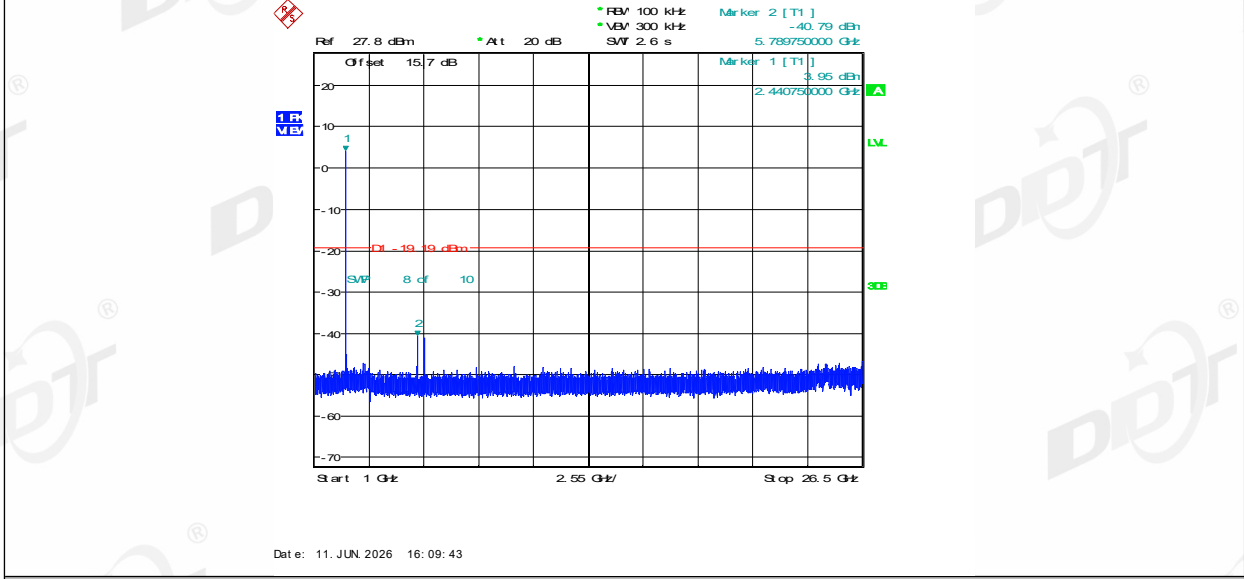

3DH5 Ant1 2480 0~Reference



Ref 18.9 dBm Att 20 dB RBW 100 kHz VBW 300 kHz S/F 125 ns Marker 1 [T1] -54.09 dBm

Offset 7.9 dB

1 P. VBW

Dir -21.62 dBm

S/F 10 of 10

Start 30 MHz 97 MHz/ Stop 1 GHz

Date: 11. JUN. 2026 16:11:44

1. P. VNA

Ref: 27.8 dBm * Att: 20 dB

Marker 2 [T1] -39.26 dBm 5.786350000 GHz

Marker 1 [T1] 2.46 dBm 2.478850000 GHz


Plot: S11 vs F

Start: 1 GHz 2.55 GHz Stop: 26.5 GHz

Date: 11. JUN. 2026 16:12:07

12. Duty cycle

12.1. Block diagram of test setup

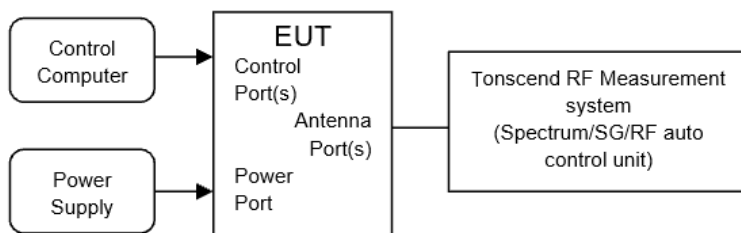

12.2. Limit

Just for Report.

12.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.
set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Clear Write.

Sweep: Video Trigger


- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.
- (3) Calculate dwell time follow below formula:
Duty cycle= Pulse's on time / Burst cycle


12.4. Test result


Test Engineer:	Tan Shaofeng	Test Site:	RF test system 5#
Ambient Condition:	25-26.3℃,29.7-33.9%RH	Test Date:	2026.6.11
Test Power Supply:	DC 5V	Sample Number:	S26040120-036

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.89	3.76	76.86	1.14
		2441	2.89	3.76	76.86	1.14
		2480	2.89	3.77	76.66	1.15
2DH5	Ant1	2402	2.90	3.76	77.13	1.13
		2441	2.90	3.77	76.92	1.14
		2480	2.89	3.76	76.86	1.14
3DH5	Ant1	2402	2.89	3.76	76.86	1.14
		2441	2.89	3.76	76.86	1.14
		2480	2.90	3.76	77.13	1.13


12.5. Test graphs

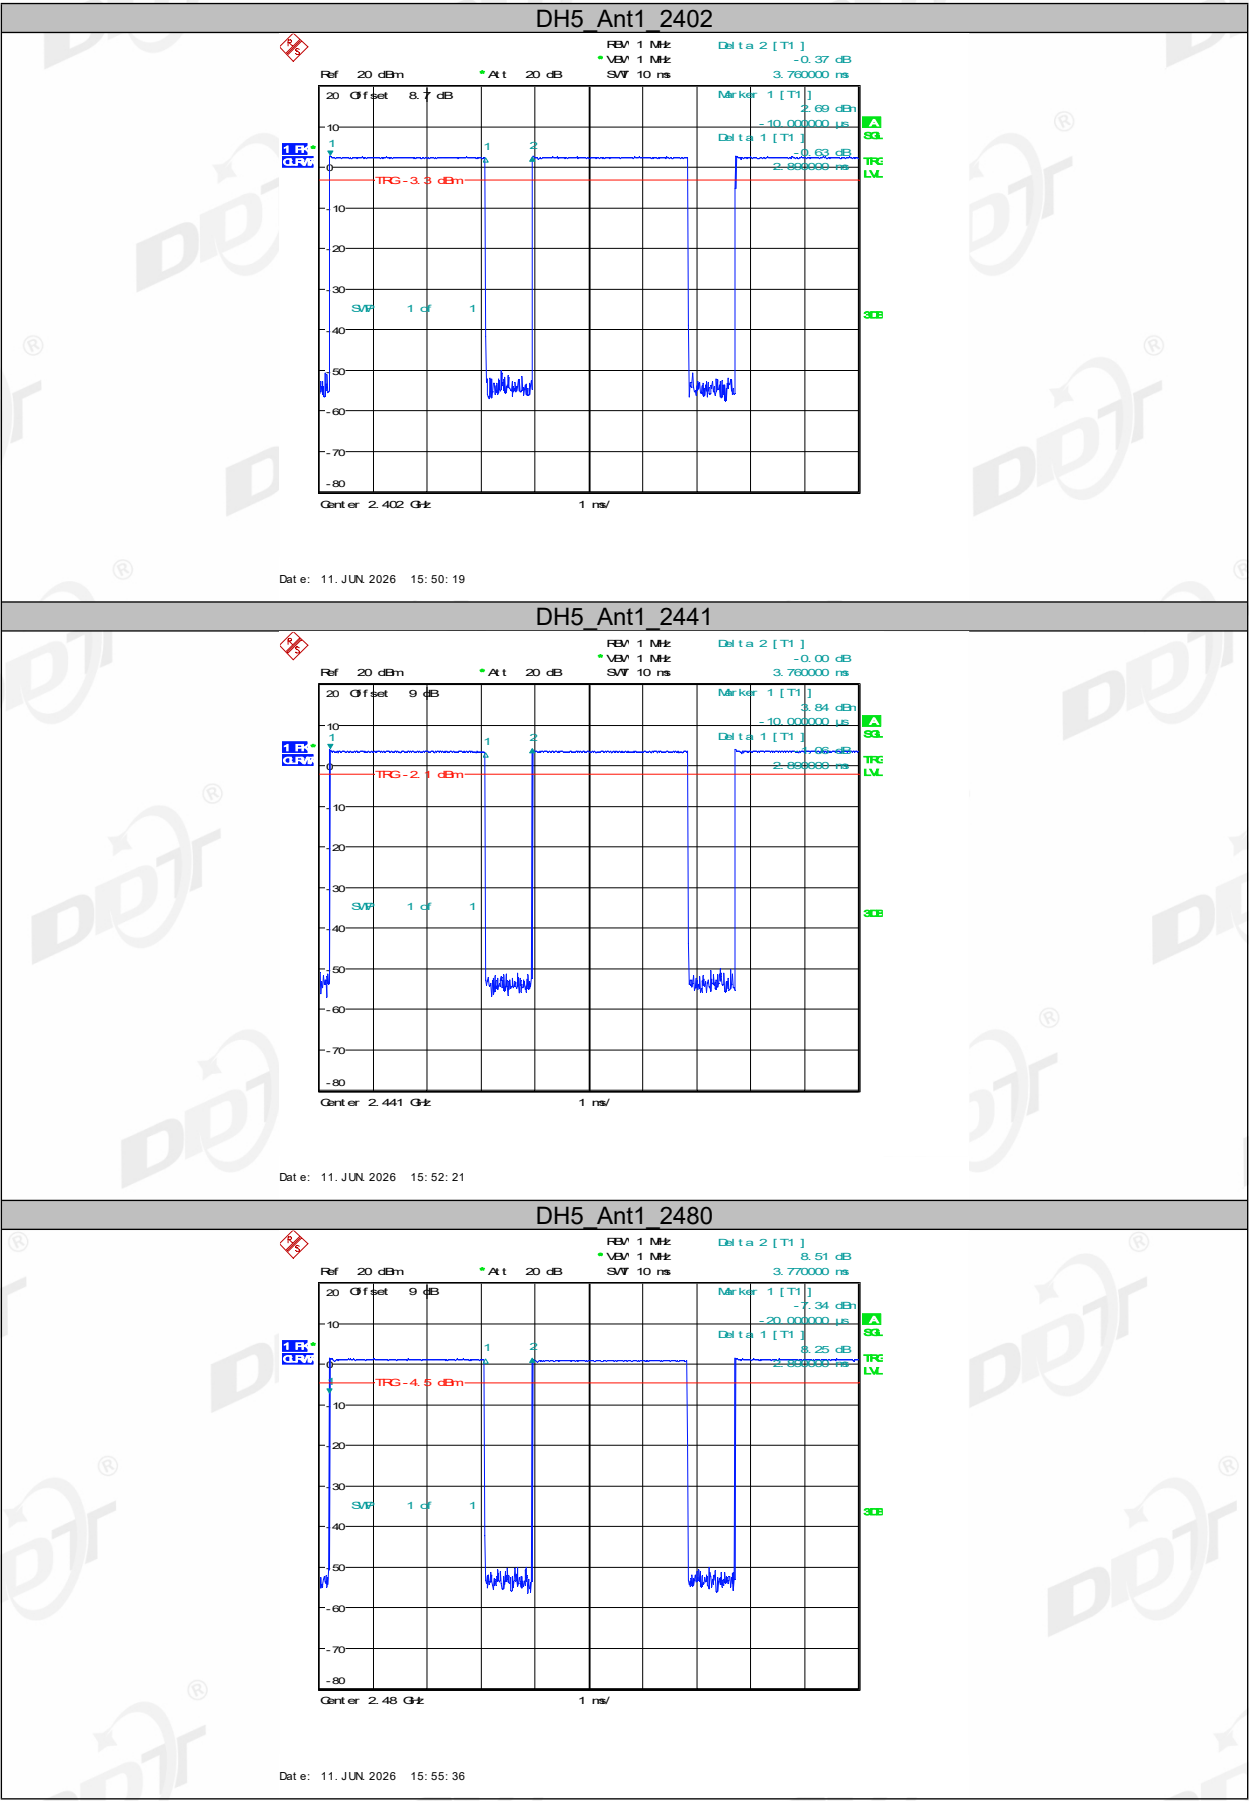

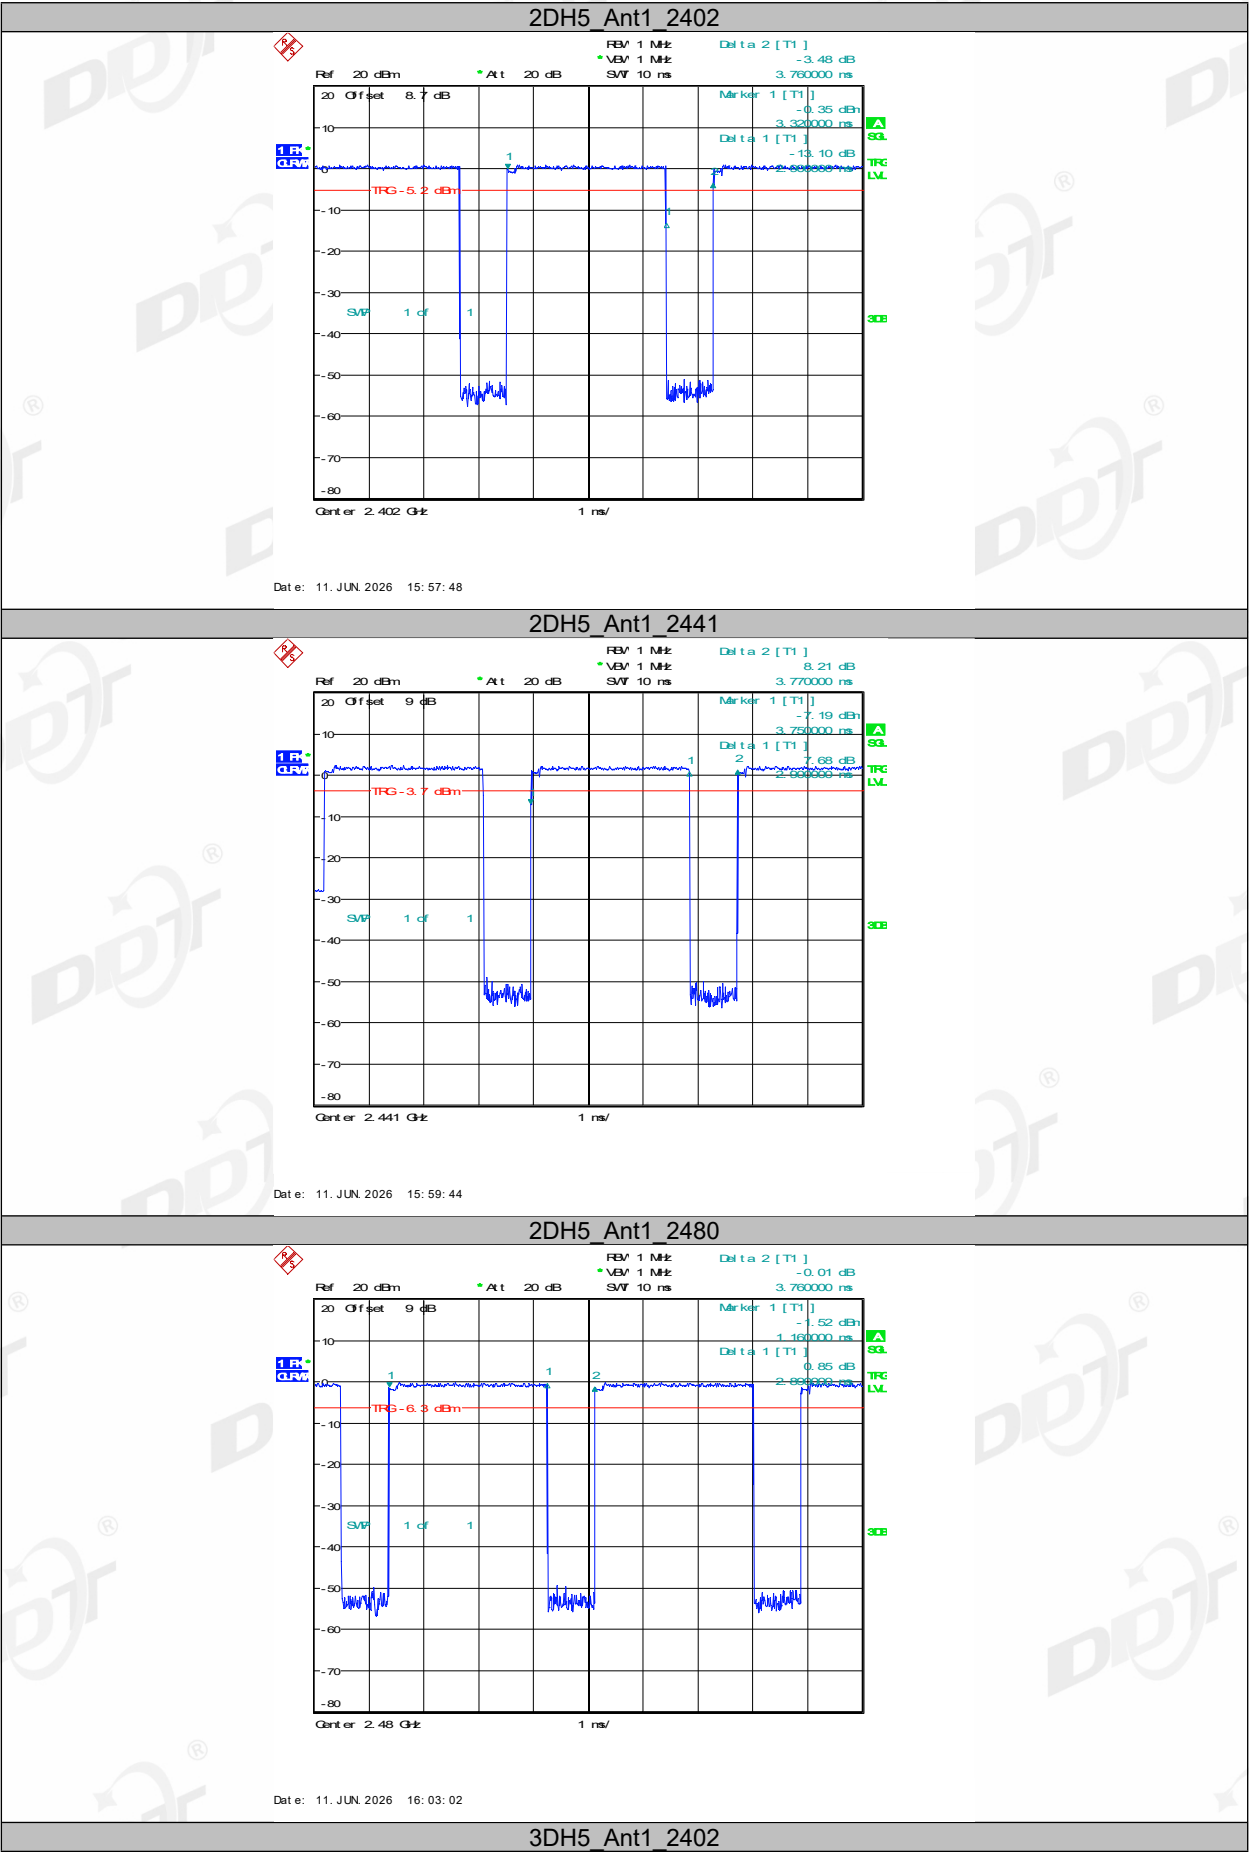


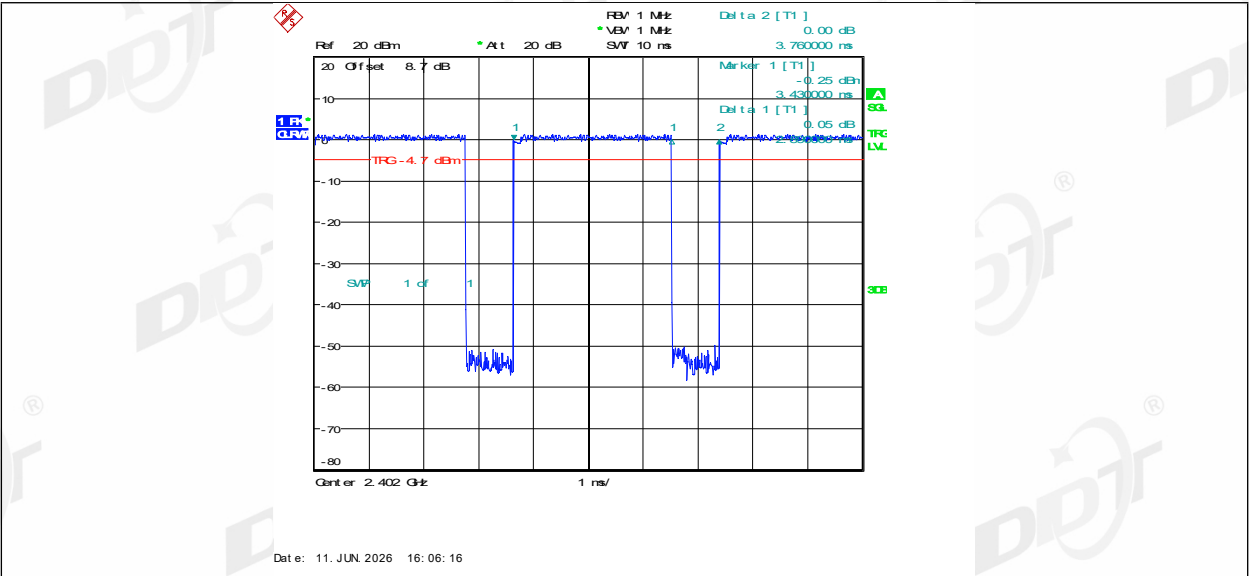

3DH5_Ant1_2441

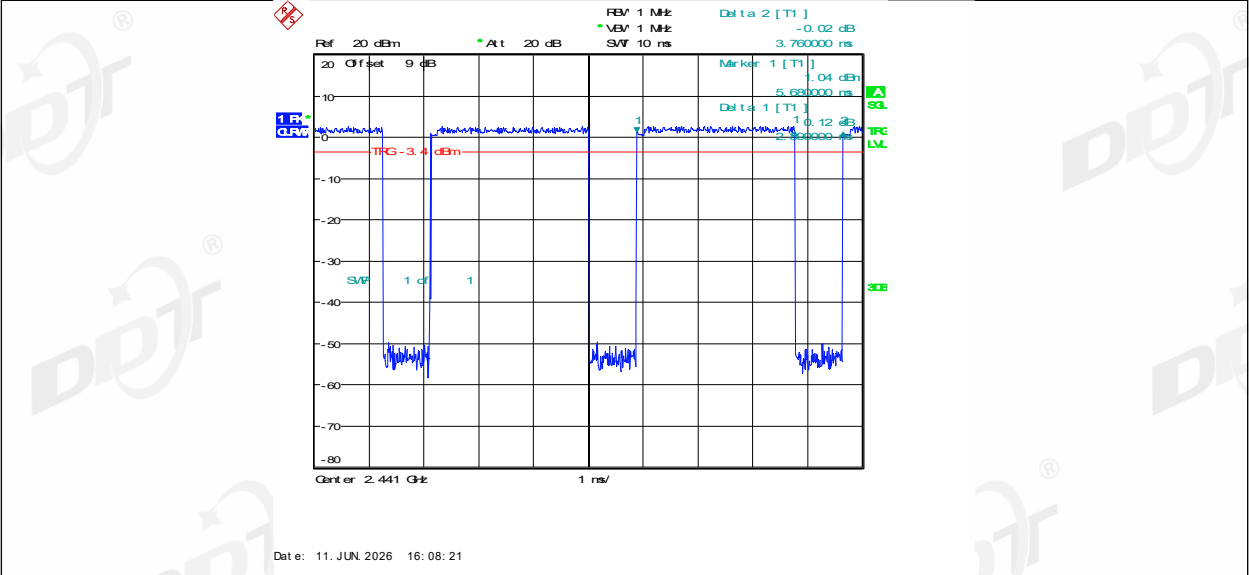

3DH5_Ant1_2480

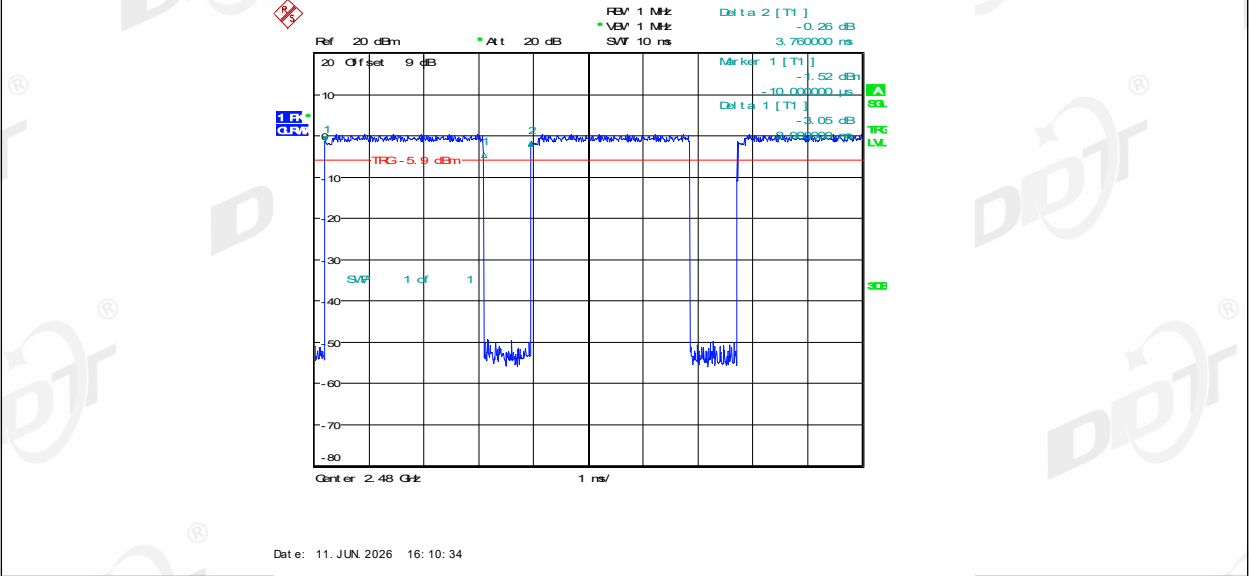

13. Antenna Requirements

13.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2. Result


The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.


14. Radiated Emission

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI TEST RECEIVER	R&S	ESU26	DDT-ZC01909	2027/02/27
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	DDT-ZC02050	2027/07/10
Active Loop Antenna	Schwarzbeck	FMZB1519	DDT-ZC00524	2027/07/10
Pre-amplifier	SONOMA	310N	DDT-ZC01969	2027/06/25
Radiation disturbance fully automated test software	Tonscend	JS32-RE (V5.0.0)	DDT-ZC02739	/
RF cable	Zhongke Junchuang	JCTB510-NJW-NJW-0.6M	DDT-ZC04595	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-3M	DDT-ZC05590	2026/10/10
RF cable	Zhongke Junchuang	Z805UF-NJ-NJ-10M	DDT-ZC05591	2026/10/10
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBECK	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

14.2. Block diagram of test setup

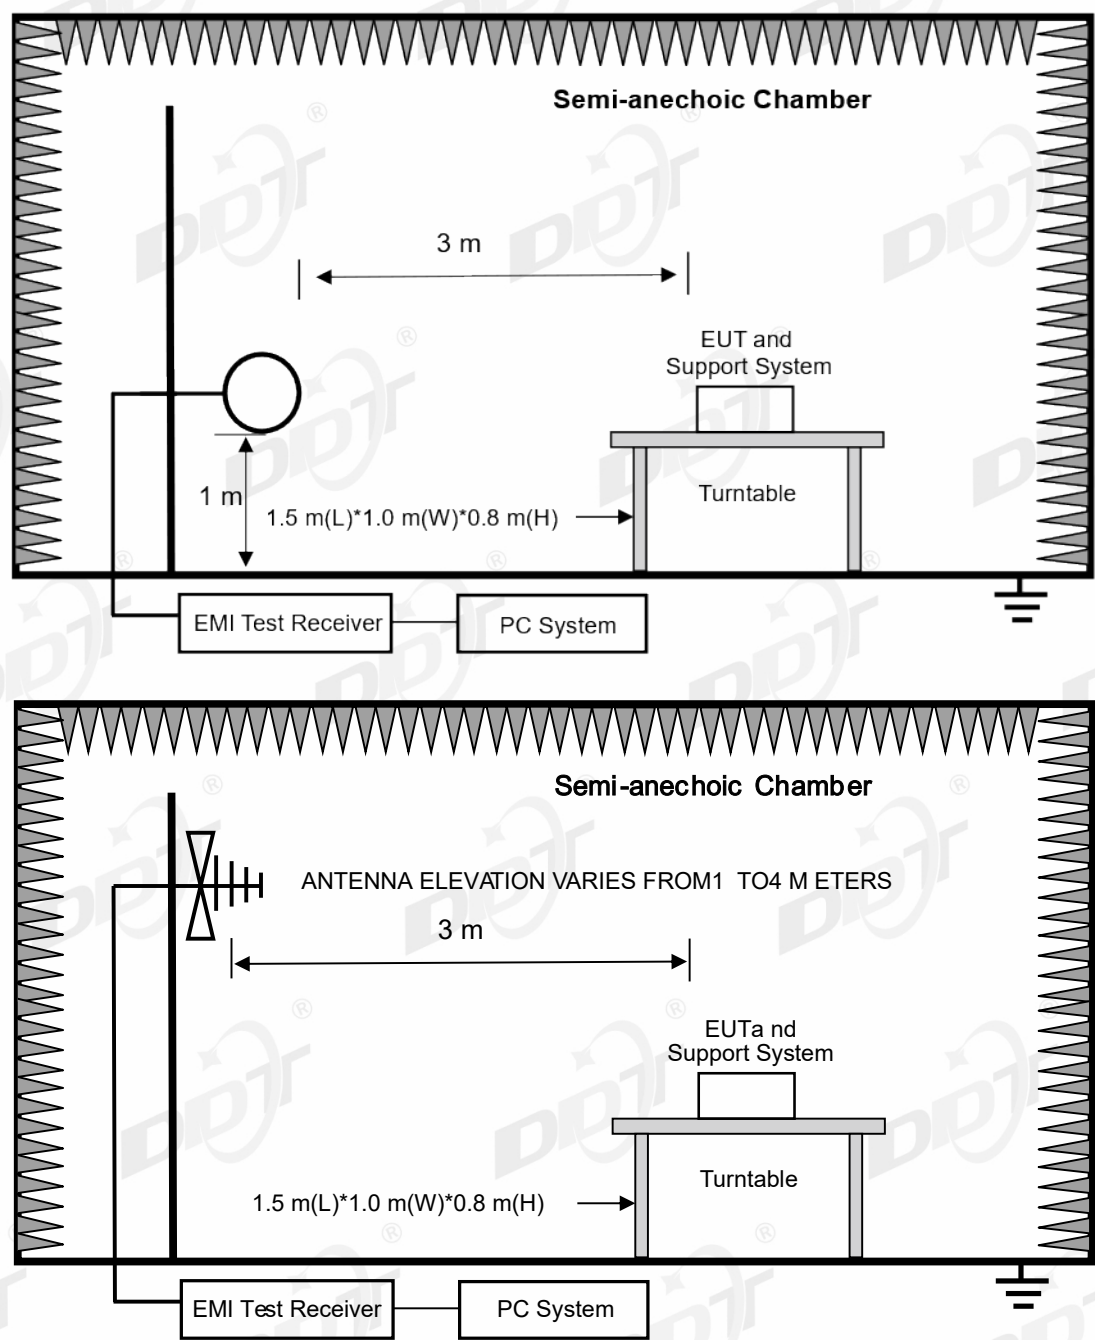

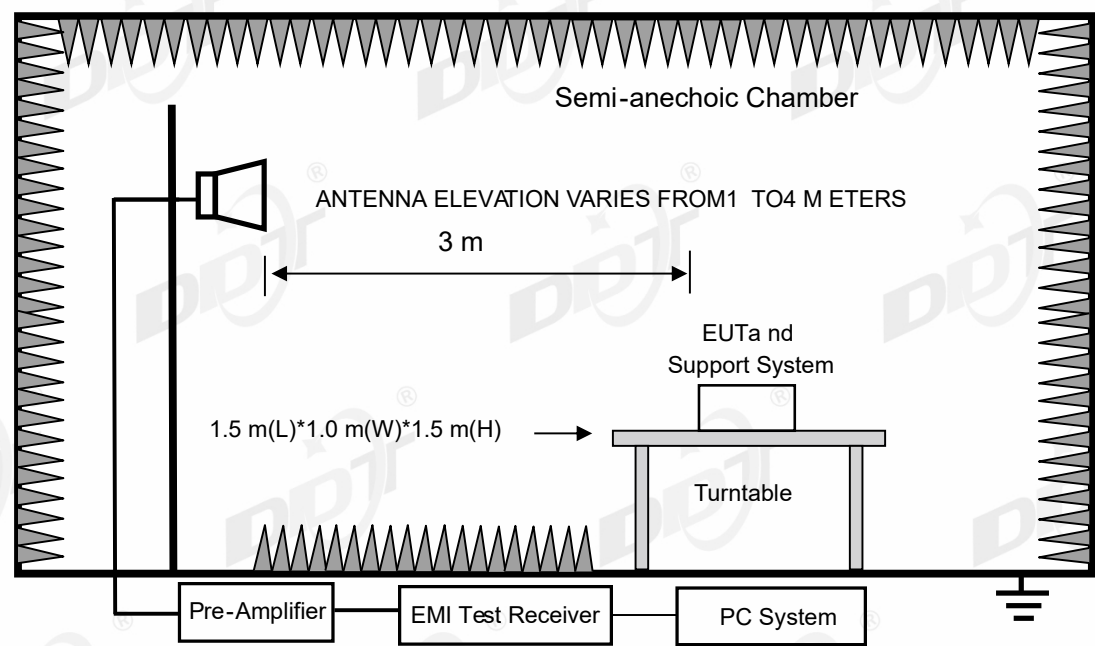

14.3. Limits

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

1Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		uV/m	dBuV/m
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dBuV/m (Peak) 54.0 dBuV/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3m}(\text{dBuV/m}) = \text{Limit}_{30m}(\text{dBuV/m}) + 40\text{Log}(30m/3m)$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limit.

14.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

14.5. Test procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.
- (2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m

1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10 clause 4.1.5.2.2 procedure for average measure.
- (8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.
- (9) According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.
- (10) For 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK and 8DPSK, the worst case is record and reported)
- (11) For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in worst mode.

14.6. Test result

PASS. (See below detailed test result)

14.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-30

Tested By:

Li Xiongbin

Test Mode:

DH5 TX Mode

Power Supply:

AC 120V/60Hz

Condition:

Temp:20.0°C;Humi:61.8%

Test Site:


DDT 3# Chamber

File Path:

d:\ts\2026 report data\Q26040120-20\FCC Below 1G\1

Memo:

Sample Number:S26040120-049

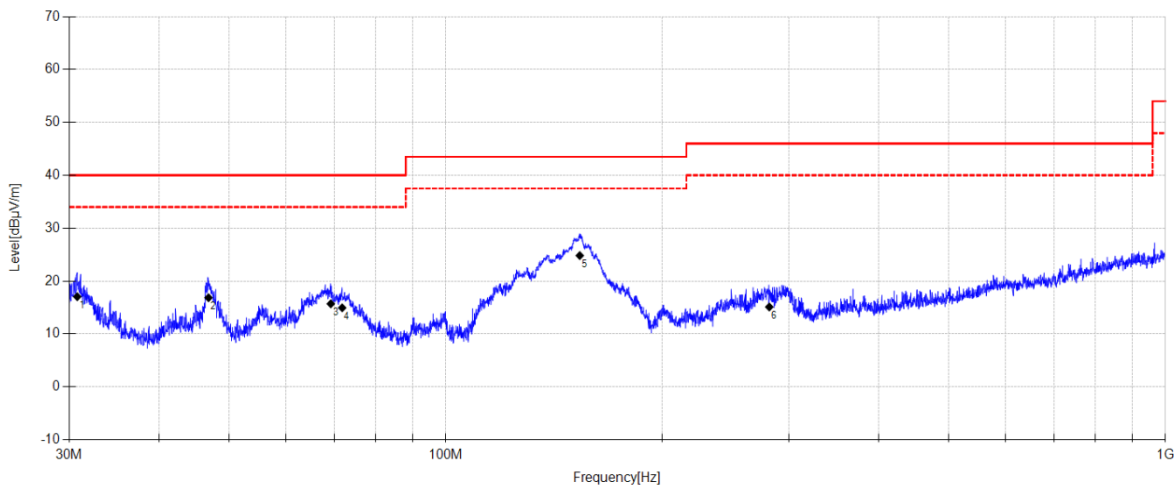


Final Data List									
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	30.767	35.19	10.35	3.79	17.03	40.00	22.97	QP	Horizontal
2	46.826	31.85	13.33	3.96	16.84	40.00	23.16	QP	Horizontal
3	69.248	33.53	10.30	4.16	15.69	40.00	24.31	QP	Horizontal
4	71.819	33.54	9.52	4.17	14.93	40.00	25.07	QP	Horizontal
5	153.581	43.63	8.92	4.61	24.81	43.50	18.69	QP	Horizontal
6	281.671	29.18	13.10	5.21	15.09	46.00	30.91	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

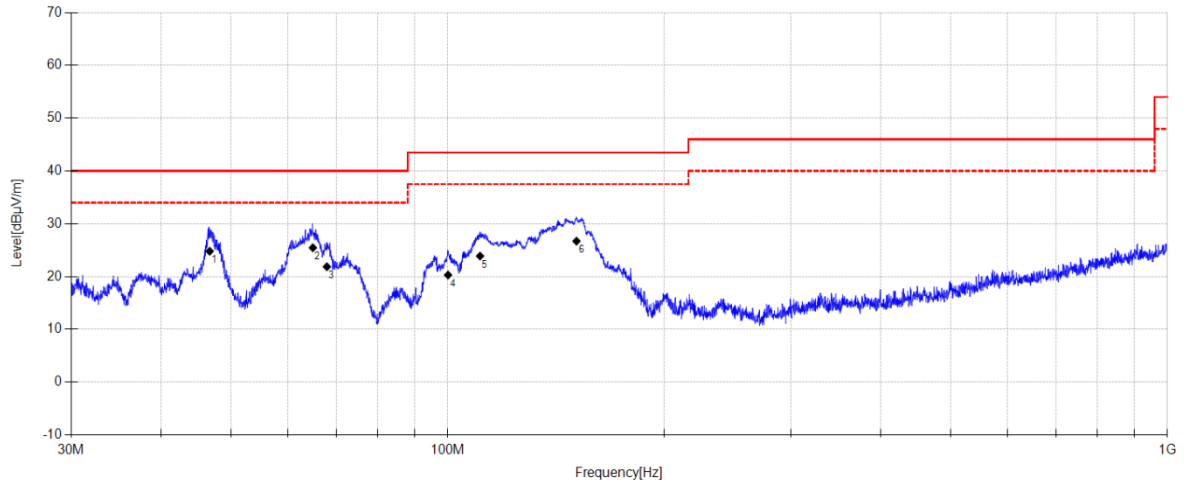
Test Date: 2026-06-30**Tested By:** Li Xiongbín**Test Mode:** DH5 TX Mode**Power Supply:** AC 120V/60Hz**Condition:** Temp:20.0°C;Humi:61.8%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26040120-20\FCC Below 1G\2**Memo:** Sample Number:S26040120-049**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.695	39.84	13.28	3.96	24.78	40.00	15.22	QP	Vertical
2	64.968	41.54	12.10	4.11	25.45	40.00	14.55	QP	Vertical
3	67.949	39.32	10.68	4.15	21.85	40.00	18.15	QP	Vertical
4	100.134	36.55	11.73	4.30	20.28	43.50	23.22	QP	Vertical
5	110.928	39.92	11.90	4.36	23.87	43.50	19.63	QP	Vertical
6	151.018	45.56	8.89	4.60	26.70	43.50	16.80	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

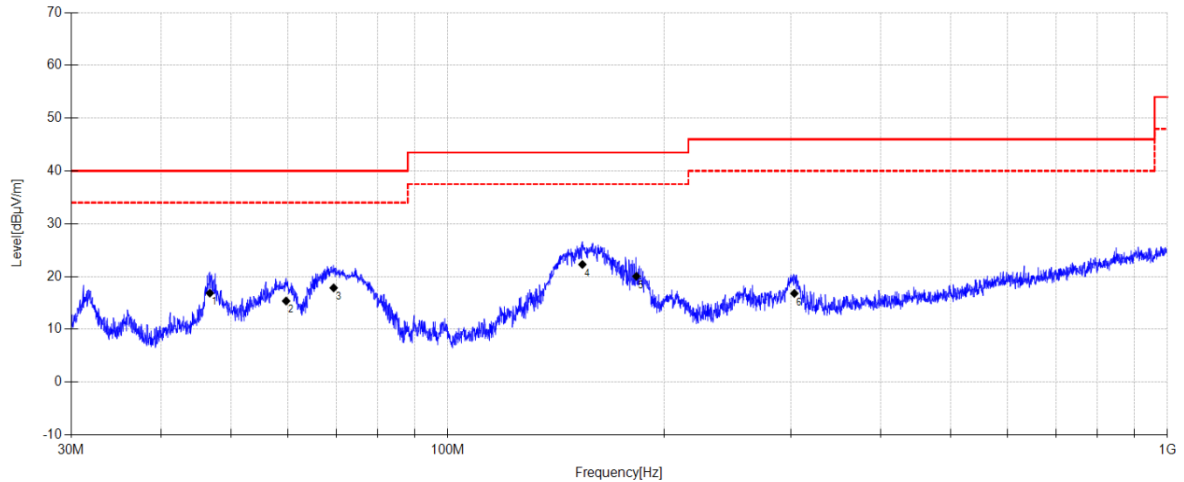
Test Date: 2026-06-30**Tested By:** Li Xiongbin**Test Mode:** DH5 TX Mode**Power Supply:** AC 120V/60Hz**Condition:** Temp:21.3°C;Humi:60.9%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26040120-1E\FCC Below 1G\11**Memo:** Sample Number:S26040120-037**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.728	31.89	13.29	3.96	16.84	40.00	23.16	QP	Horizontal
2	59.641	31.23	12.36	4.06	15.35	40.00	24.65	QP	Horizontal
3	69.443	35.83	10.15	4.16	17.84	40.00	22.16	QP	Horizontal
4	153.904	40.81	9.21	4.61	22.28	43.50	21.22	QP	Horizontal
5	182.878	38.03	9.60	4.78	20.03	43.50	23.47	QP	Horizontal
6	303.191	30.11	13.79	5.29	16.79	46.00	29.21	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

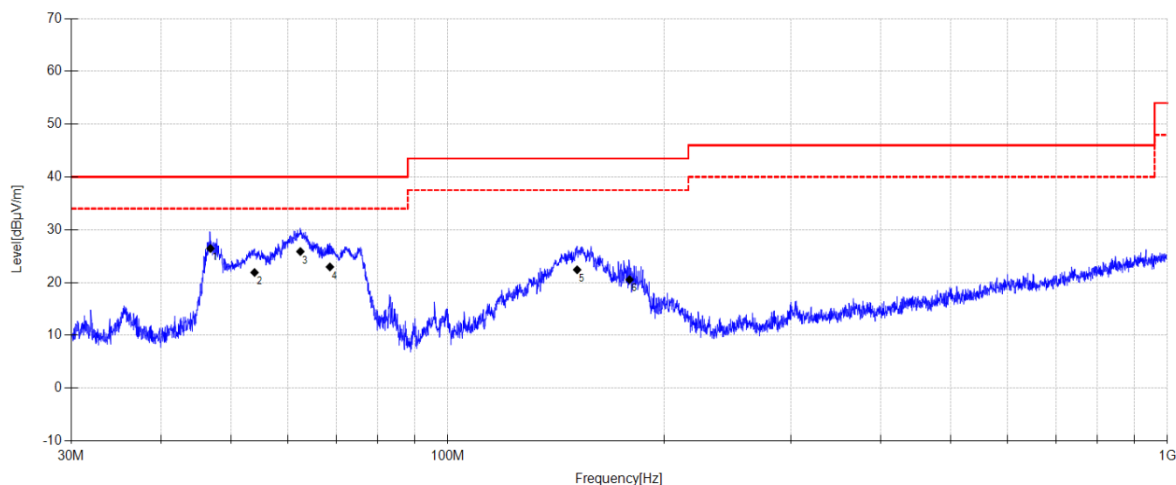Test Date: 2026-06-30**Tested By:** Li Xiongbín**Test Mode:** DH5 TX Mode**Power Supply:** AC 120V/60Hz**Condition:** Temp:21.3°C;Humi:60.9%**Test Site:** DDT 3# Chamber**File Path:** d:\ts\2026 report data\Q26040120-1E\FCC Below 1G\12**Memo:** Sample Number:S26040120-037**Final Data List**

NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	46.826	41.45	13.33	3.96	26.44	40.00	13.56	QP	Vertical
2	53.913	36.8	13.38	4.01	21.89	40.00	18.11	QP	Vertical
3	62.422	41.55	12.52	4.09	25.86	40.00	14.14	QP	Vertical
4	68.620	40.52	10.58	4.15	22.95	40.00	17.05	QP	Vertical
5	151.336	41.53	8.63	4.60	22.41	43.50	21.09	QP	Vertical
6	178.945	38.61	9.55	4.76	20.54	43.50	22.96	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\1

Memo:

Sample Number:S26040120-037 Power Setting:8

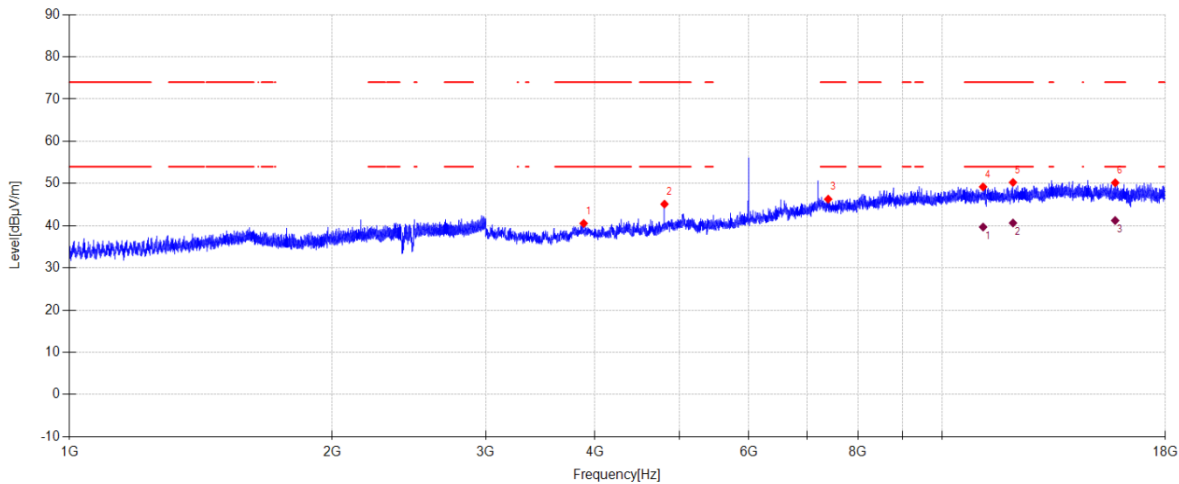

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3882.000	49.06	31.56	-40.08	40.54	74.00	33.46	PK	Horizontal
2	4804.500	52.32	33.22	-40.42	45.12	74.00	28.88	PK	Horizontal
3	7398.000	47.96	37.21	-38.88	46.29	74.00	27.71	PK	Horizontal
4	11131.500	44.80	39.76	-35.35	49.21	74.00	24.79	PK	Horizontal
5	12045.000	45.17	39.85	-34.76	50.26	74.00	23.74	PK	Horizontal
6	15769.500	42.35	39.13	-31.31	50.17	74.00	23.83	PK	Horizontal


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	11131.500	35.28	39.76	-35.35	39.69	54.00	14.31	AV	Horizontal
2	12045.000	35.56	39.85	-34.76	40.65	54.00	13.35	AV	Horizontal
3	15769.500	33.41	39.13	-31.31	41.23	54.00	12.77	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-23 **Tested By:** Nan Zhong
Test Mode: TX DH5 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\2
Memo: Sample Number:S26040120-037 Power Setting:8

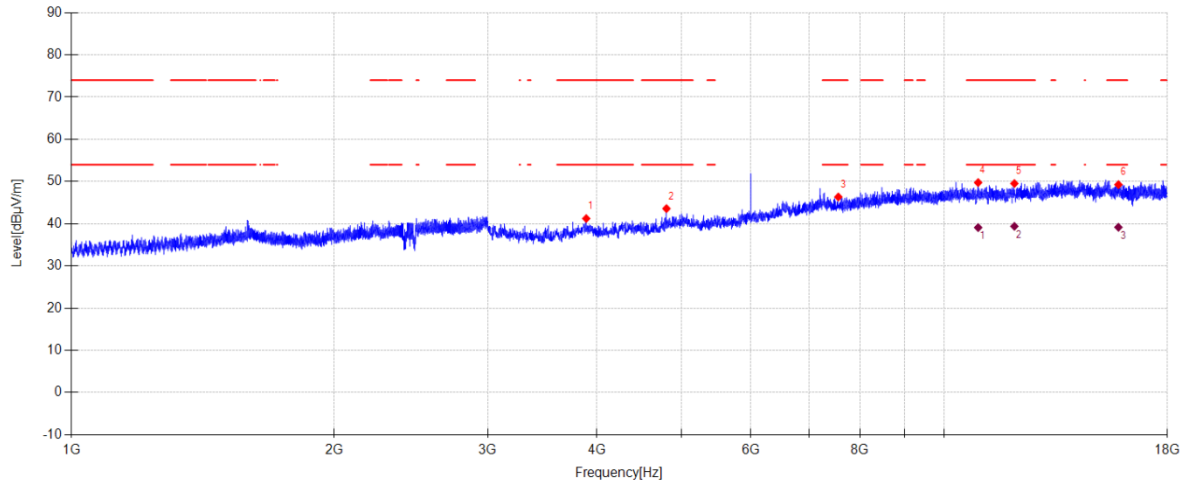**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3888.000	49.71	31.58	-40.06	41.23	74.00	32.77	PK	Vertical
2	4804.500	50.78	33.22	-40.42	43.58	74.00	30.42	PK	Vertical
3	7558.500	48.10	37.12	-38.88	46.34	74.00	27.66	PK	Vertical
4	10929.000	45.23	39.84	-35.32	49.75	74.00	24.25	PK	Vertical
5	12025.500	44.39	39.83	-34.70	49.52	74.00	24.48	PK	Vertical
6	15822.000	41.23	39.08	-31.05	49.26	74.00	24.74	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	10929.000	34.57	39.84	-35.32	39.09	54.00	14.91	AV	Vertical
2	12025.500	34.25	39.83	-34.70	39.38	54.00	14.62	AV	Vertical
3	15822.000	31.13	39.08	-31.05	39.16	54.00	14.84	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\3

Memo:

Sample Number:S26040120-037 Power Setting:8

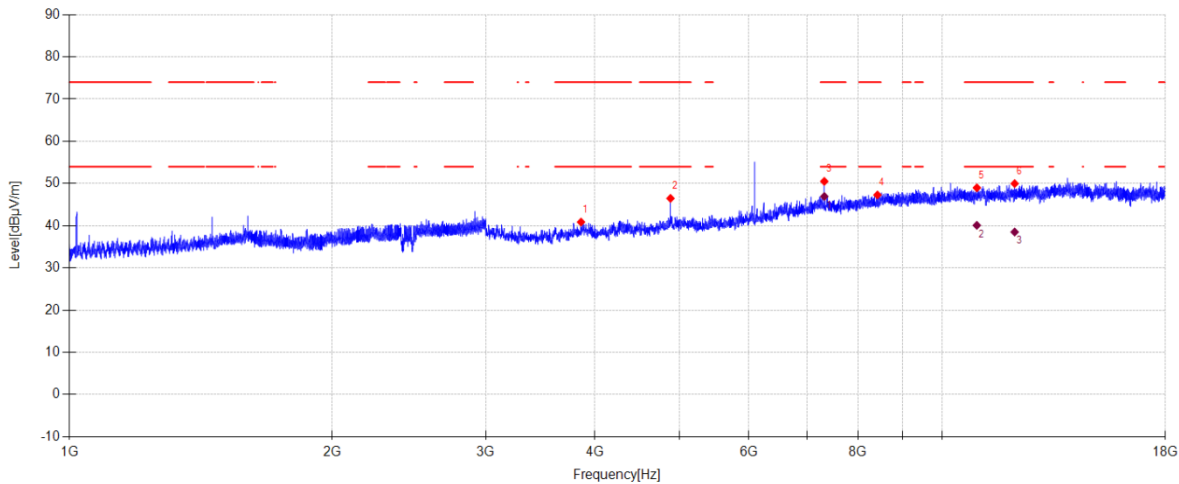

Suspected Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3855.000	49.52	31.51	-40.16	40.87	74.00	33.13	PK	Horizontal
2	4881.000	53.42	33.46	-40.40	46.48	74.00	27.52	PK	Horizontal
3	7323.000	52.01	37.56	-39.06	50.51	74.00	23.49	PK	Horizontal
4	8424.000	47.53	38.20	-38.44	47.29	74.00	26.71	PK	Horizontal
5	10950.000	44.45	39.80	-35.27	48.98	74.00	25.02	PK	Horizontal
6	12097.500	44.99	39.90	-34.91	49.98	74.00	24.02	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7323.000	48.44	37.56	-39.06	46.94	54.00	7.06	AV	Horizontal
2	10950.000	35.56	39.80	-35.27	40.09	54.00	13.91	AV	Horizontal
3	12097.500	33.52	39.90	-34.91	38.51	54.00	15.49	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2440MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\4

Memo:

Sample Number:S26040120-037 Power Setting:8

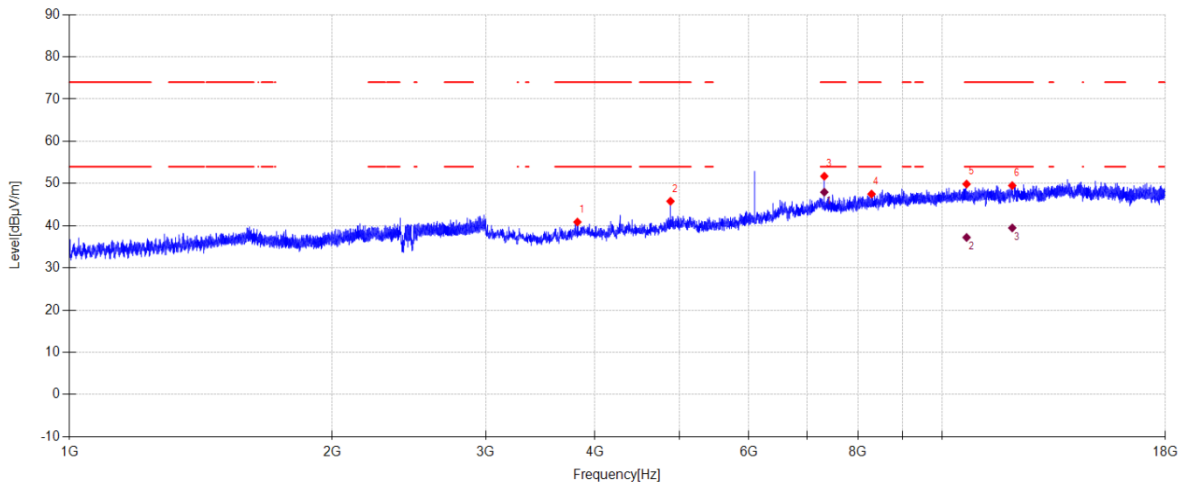

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3819.000	49.82	31.31	-40.26	40.87	74.00	33.13	PK	Vertical
2	4881.000	52.74	33.46	-40.40	45.80	74.00	28.20	PK	Vertical
3	7323.000	53.22	37.56	-39.06	51.72	74.00	22.28	PK	Vertical
4	8293.500	47.66	37.99	-38.15	47.50	74.00	26.50	PK	Vertical
5	10657.500	45.84	39.92	-35.89	49.87	74.00	24.13	PK	Vertical
6	12021.000	44.38	39.82	-34.69	49.51	74.00	24.49	PK	Vertical


Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7323.000	49.45	37.56	-39.06	47.95	54.00	6.05	AV	Vertical
2	10657.500	33.19	39.92	-35.89	37.22	54.00	16.78	AV	Vertical
3	12021.000	34.35	39.82	-34.69	39.48	54.00	14.52	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-23 **Tested By:** Nan Zhong
Test Mode: TX DH5 2480MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\5
Memo: Sample Number:S26040120-037 Power Setting:8

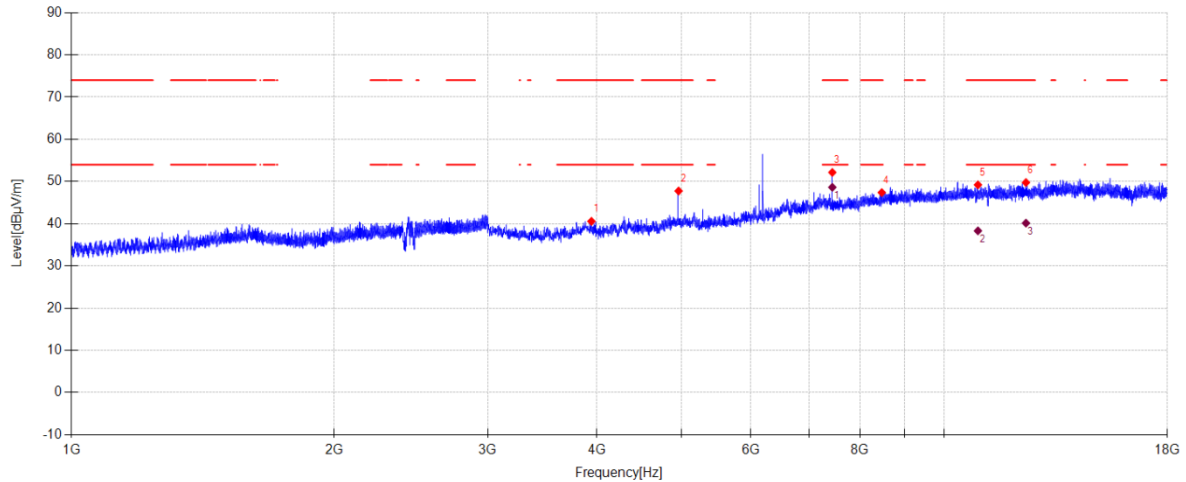**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3942.000	49.15	31.68	-40.26	40.57	74.00	33.43	PK	Horizontal
2	4960.500	54.54	33.74	-40.52	47.76	74.00	26.24	PK	Horizontal
3	7440.000	53.96	37.12	-38.92	52.16	74.00	21.84	PK	Horizontal
4	8476.500	47.27	38.30	-38.18	47.39	74.00	26.61	PK	Horizontal
5	10923.000	44.70	39.85	-35.34	49.21	74.00	24.79	PK	Horizontal
6	12397.500	44.93	39.70	-34.87	49.76	74.00	24.24	PK	Horizontal

Final Data List


NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	7440.000	50.43	37.12	-38.92	48.63	54.00	5.37	AV	Horizontal
2	10923.000	33.80	39.85	-35.34	38.31	54.00	15.69	AV	Horizontal
3	12397.500	35.31	39.70	-34.87	40.14	54.00	13.86	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-06-23 **Tested By:** Nan Zhong
Test Mode: TX DH5 2480MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\6
Memo: Sample Number:S26040120-037 Power Setting:8

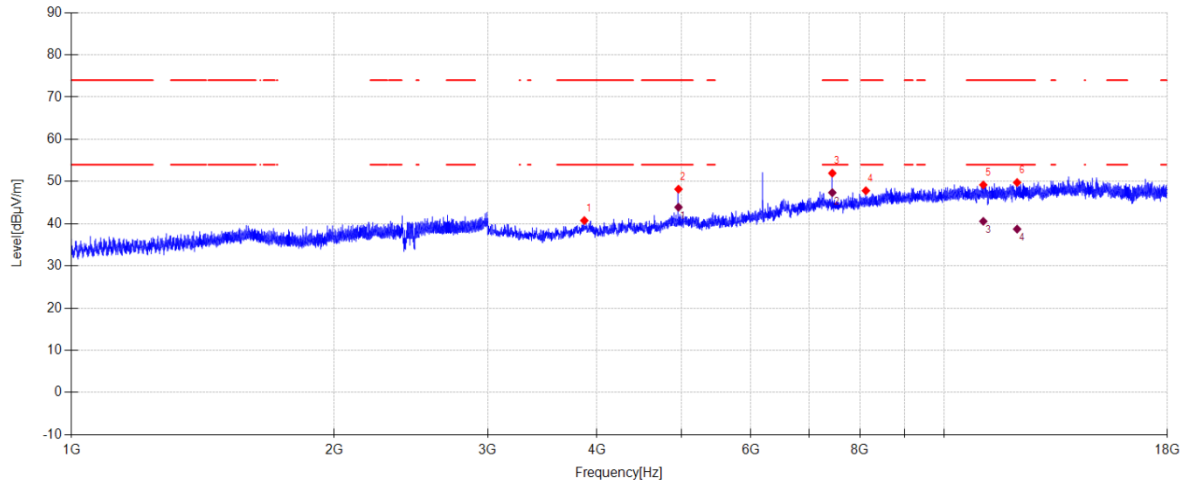**Suspected Data List**

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3868.500	49.33	31.54	-40.12	40.75	74.00	33.25	PK	Vertical
2	4959.000	54.95	33.74	-40.51	48.18	74.00	25.82	PK	Vertical
3	7440.000	53.77	37.12	-38.92	51.97	74.00	22.03	PK	Vertical
4	8128.500	48.34	37.90	-38.42	47.82	74.00	26.18	PK	Vertical
5	11079.000	44.78	39.70	-35.28	49.20	74.00	24.80	PK	Vertical
6	12112.500	44.79	39.90	-34.93	49.76	74.00	24.24	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4959.000	50.68	33.74	-40.51	43.91	54.00	10.09	AV	Vertical
2	7440.000	49.16	37.12	-38.92	47.36	54.00	6.64	AV	Vertical
3	11079.000	36.15	39.70	-35.28	40.57	54.00	13.43	AV	Vertical
4	12112.500	33.75	39.90	-34.93	38.72	54.00	15.28	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-07-13

Tested By:

Cao Jie

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 fcc report date\Q26040120-1E\FCC ABOVE1G BT\19

Memo:

Sample Number:S26040120-037 Power Setting:8

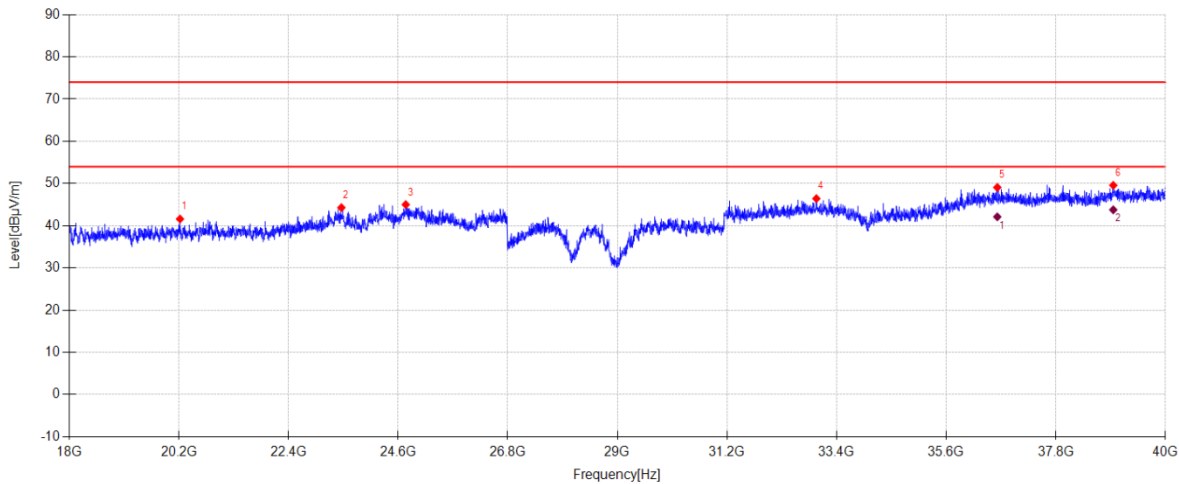

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	20221.218	49.50	38.17	3.77	41.60	74.00	32.40	PK	Horizontal
2	23460.383	51.24	39.21	4.68	44.29	74.00	29.71	PK	Horizontal
3	24752.289	50.73	39.48	4.70	45.00	74.00	29.00	PK	Horizontal
4	32995.239	47.41	41.60	5.36	46.43	74.00	27.57	PK	Horizontal
5	36626.541	49.13	42.86	6.35	49.07	74.00	24.93	PK	Horizontal
6	38955.195	47.14	45.81	6.52	49.57	74.00	24.43	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36626.541	42.17	42.86	6.35	42.11	54.00	11.89	AV	Horizontal
2	38955.195	41.34	45.81	6.52	43.77	54.00	10.23	AV	Horizontal


Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2026-07-13 **Tested By:** Cao Jie
Test Mode: TX DH5 2402MHz Mode **Power Supply:** Battery
Condition: Temp:24.7°C;Humi:49.6% **Test Site:** 4# Fully Anechoic Room
File Path: d:\ts\2026 fcc report date\Q26040120-1E\FCC ABOVE1G BT\20
Memo: Sample Number:S26040120-037 Power Setting:8

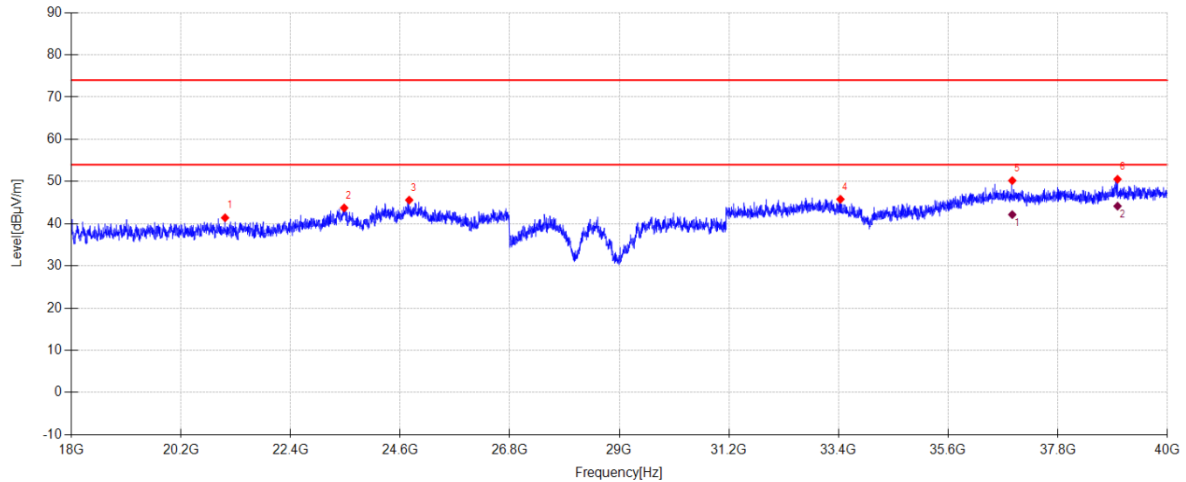**Suspected Data List**

NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	21086.070	49.89	38.41	3.70	41.40	74.00	32.60	PK	Vertical
2	23476.499	50.68	39.20	4.69	43.75	74.00	30.25	PK	Vertical
3	24781.834	51.32	39.49	4.70	45.60	74.00	28.40	PK	Vertical
4	33438.408	47.23	41.78	5.51	45.79	74.00	28.21	PK	Vertical
5	36887.071	50.51	42.89	6.13	50.21	74.00	23.79	PK	Vertical
6	39000.855	47.98	45.90	6.59	50.53	74.00	23.47	PK	Vertical

Final Data List

NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	36887.071	42.46	42.89	6.13	42.16	54.00	11.84	AV	Vertical
2	39000.855	41.62	45.90	6.59	44.17	54.00	9.83	AV	Vertical

Note:


1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Band Edge Compliance

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
Band Reject Filter Group	Tonscend	JS0806-F	DDT-ZC05733	/
Hochgewinn-Hornantenne	SCHWARZBEC K	BBHA 9120 D	DDT-ZC05922	2027/01/06
Broadband Preamplifier	HPX	BP-01G-18G	DDT-ZC05923	2027/01/06
Pre-amplifier	COM-POWER	PAM-840A	DDT-ZC01693	2027/03/05
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
Signal & Spectrum analyzer	R&S	FSV40-N	DDT-ZC04979	2027/07/10
SPECTRUM ANALYZER	R&S	FSU26	DDT-ZC00236	2027/06/25
RF Cable	Tonscend	7+1+1+0.5+0.5m	DDT-ZC05978	2027/01/29
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	DDT-ZC00506	2027/03/04
PSA Series Spectrum Analyzer	Agilent	E4447A	DDT-ZC00517	2027/02/27
RF cable	Zhongke Junchuang	JCT40P-2.92J-2.92J-1M	DDT-ZC03802	2026/10/10
Radiation disturbance fully automated test software	Tonscend	JS-RE&RSE (V5.0.0)	DDT-ZC06466	/

15.2. Block diagram of test setup

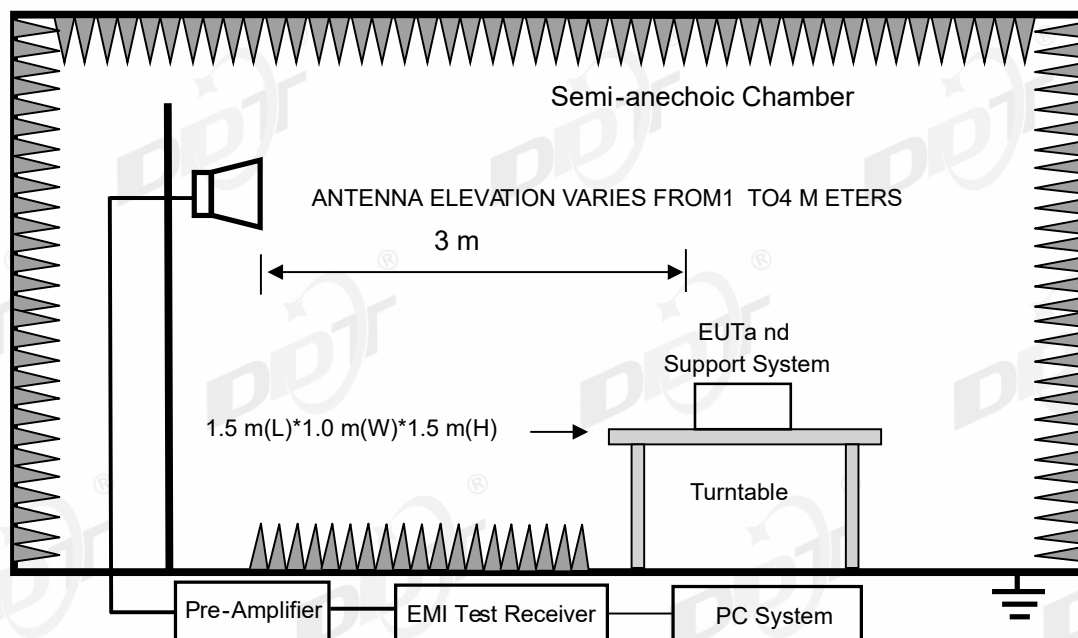

15.3. Limits

All restriction band should comply with 15.209 limits, other emission should be at least 20 dB below the fundamental.

15.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

15.5. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

15.6. Test result

PASS. (See below detailed test result)

15.7. Test data

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\7

Memo:

Sample Number:S26040120-037 Power Setting:8

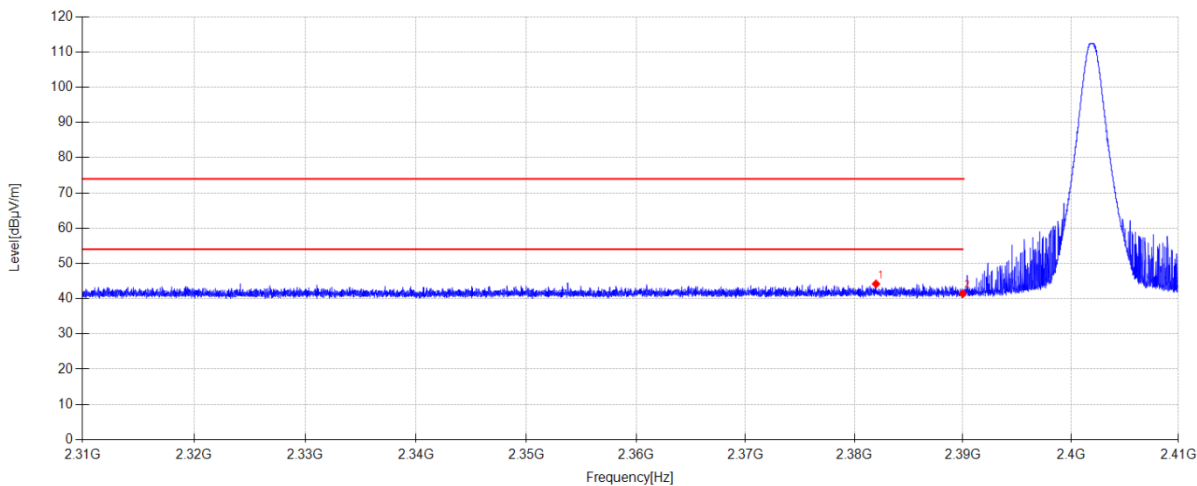

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2381.990	44.67	28.16	-28.65	44.18	74.00	29.82	PK	Horizontal
2	2390.000	41.86	28.18	-28.63	41.41	74.00	32.59	PK	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\8

Memo:

Sample Number:S26040120-037 Power Setting:8

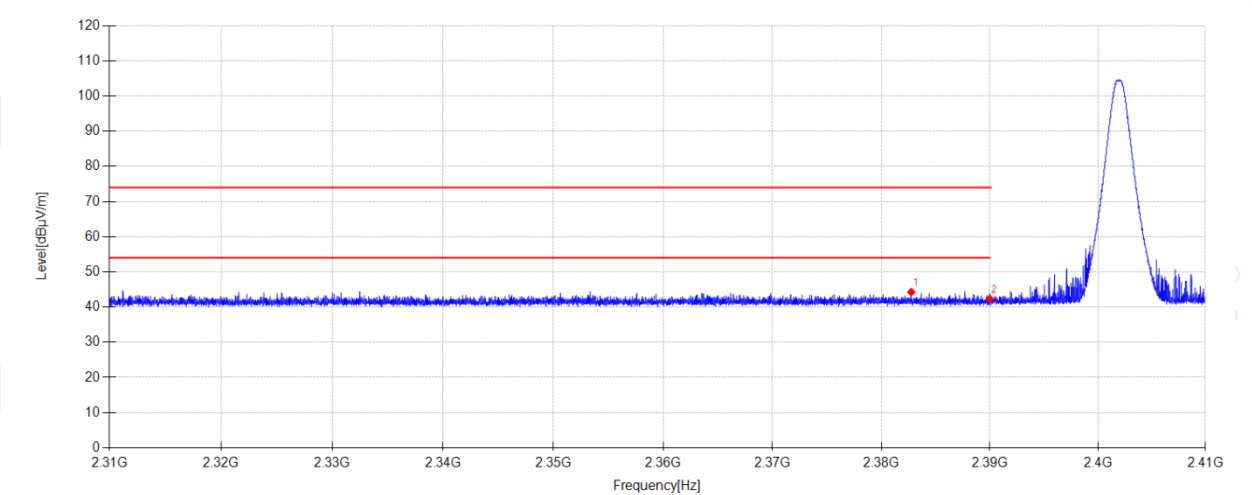

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2382.750	44.72	28.17	-28.65	44.24	74.00	29.76	PK	Vertical
2	2390.000	42.72	28.18	-28.63	42.27	74.00	31.73	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\9

Memo:

Sample Number:S26040120-037 Power Setting:8

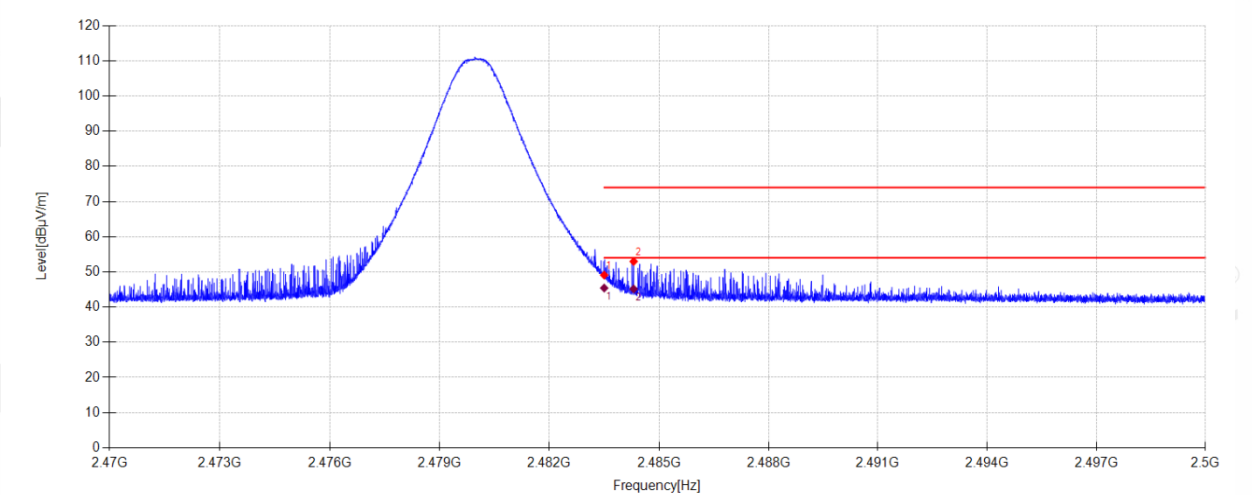

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	49.22	28.60	-28.72	49.10	74.00	24.90	PK	Horizontal
2	2484.307	53.08	28.61	-28.72	52.97	74.00	21.03	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.53	28.60	-28.72	45.41	54.00	8.59	AV	Horizontal
2	2484.307	45.26	28.61	-28.72	45.15	54.00	8.85	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\10

Memo:

Sample Number:S26040120-037 Power Setting:8

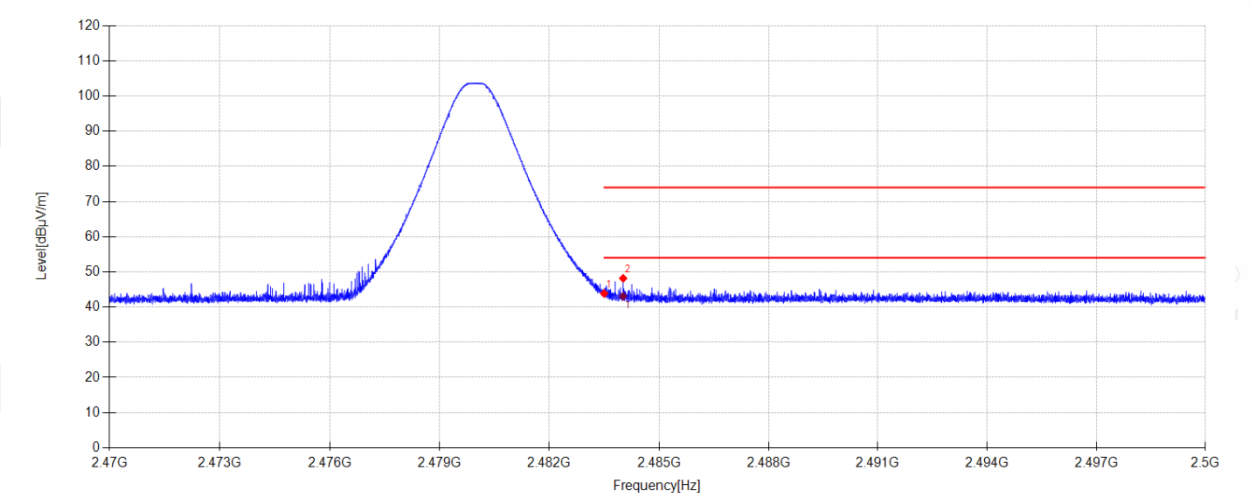

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	43.98	28.60	-28.72	43.86	74.00	30.14	PK	Vertical
2	2484.019	48.28	28.60	-28.72	48.16	74.00	25.84	PK	Vertical

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2484.019	43.18	28.60	-28.72	43.06	54.00	10.94	AV	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX 2DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\11

Memo:

Sample Number:S26040120-037 Power Setting:8

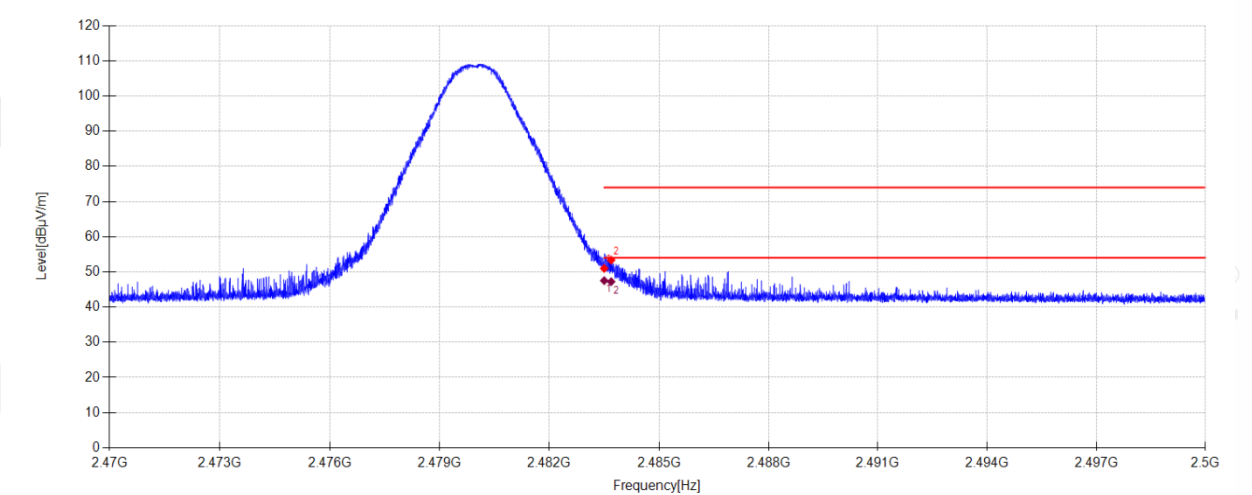

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	51.11	28.60	-28.72	50.99	74.00	23.01	PK	Horizontal
2	2483.692	53.48	28.60	-28.72	53.36	74.00	20.64	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	47.64	28.60	-28.72	47.52	54.00	6.48	AV	Horizontal
2	2483.692	47.34	28.60	-28.72	47.22	54.00	6.78	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX 2DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\12

Memo:

Sample Number:S26040120-037 Power Setting:8

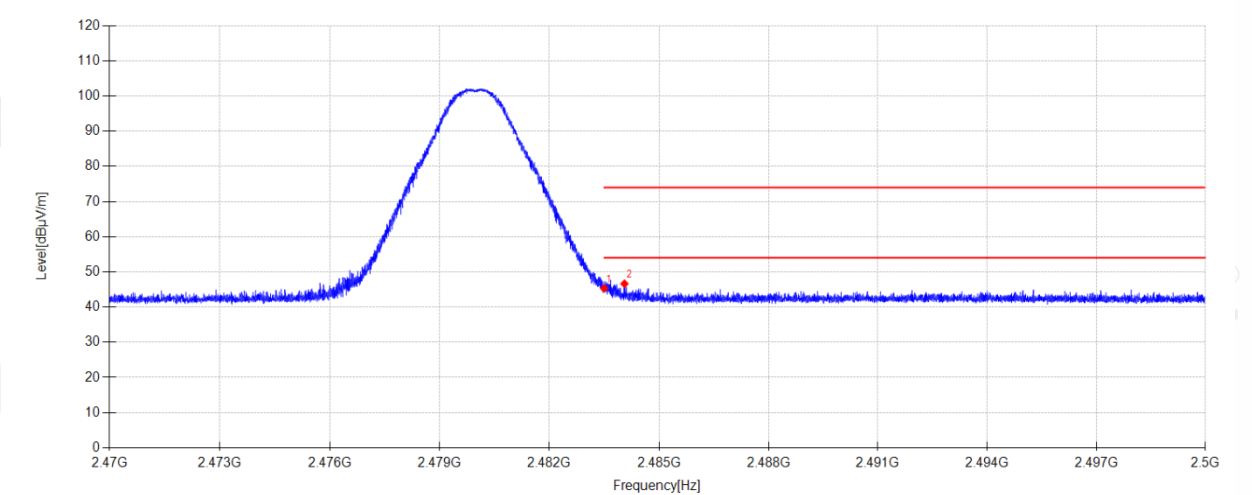

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.42	28.60	-28.72	45.30	74.00	28.70	PK	Vertical
2	2484.055	46.74	28.60	-28.72	46.62	74.00	27.38	PK	Vertical

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX 3DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\13

Memo:

Sample Number:S26040120-037 Power Setting:8

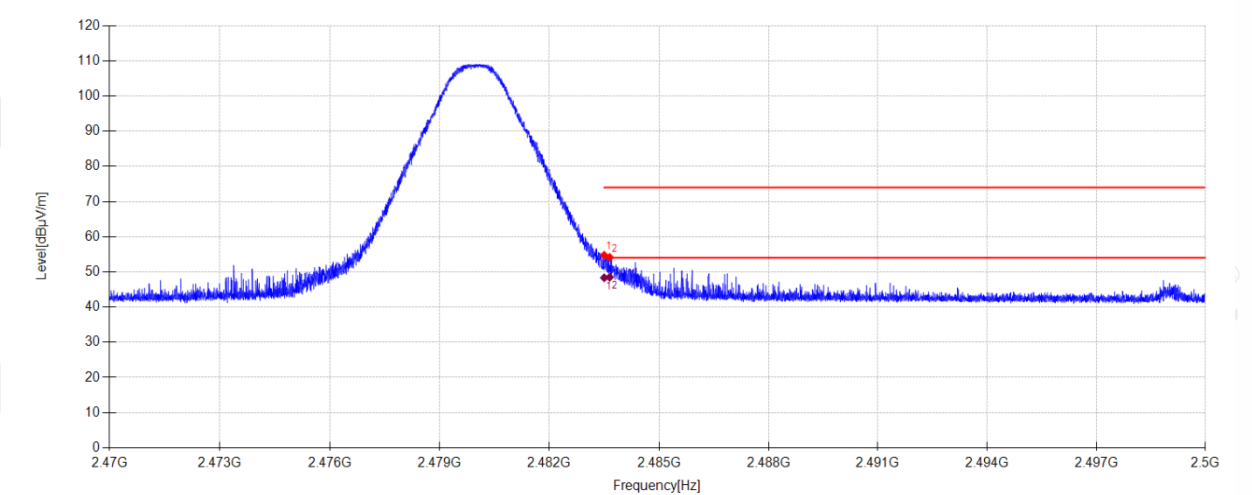

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	54.88	28.60	-28.72	54.76	74.00	19.24	PK	Horizontal
2	2483.650	54.25	28.60	-28.72	54.13	74.00	19.87	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	48.45	28.60	-28.72	48.33	54.00	5.67	AV	Horizontal
2	2483.650	48.61	28.60	-28.72	48.49	54.00	5.51	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX 3DH5 2480MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\14

Memo:

Sample Number:S26040120-037 Power Setting:8

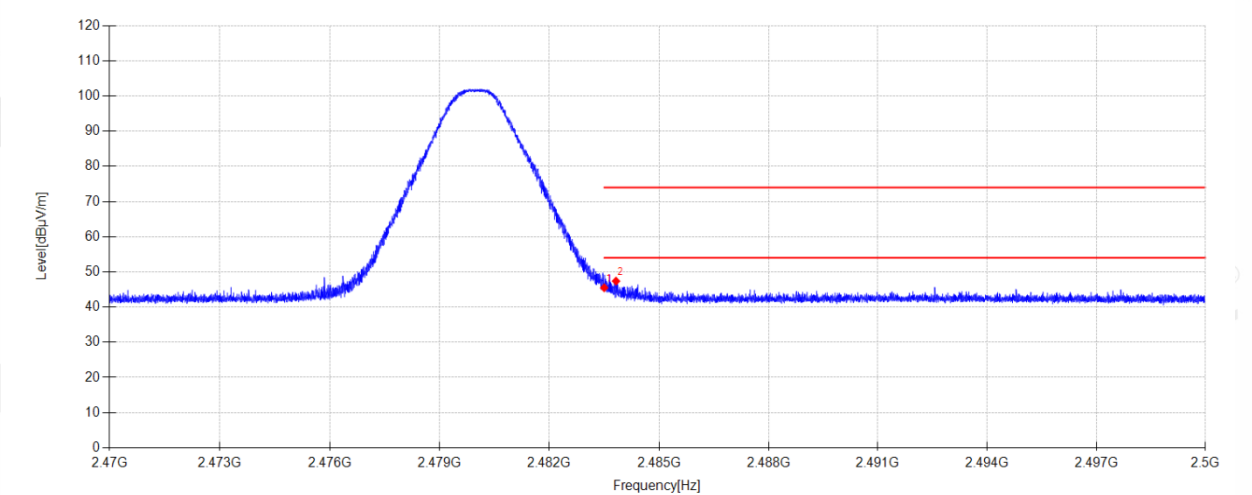

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.500	45.61	28.60	-28.72	45.49	74.00	28.51	PK	Vertical
2	2483.824	47.50	28.60	-28.72	47.38	74.00	26.62	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX 3DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\15

Memo:

Sample Number:S26040120-037 Power Setting:8

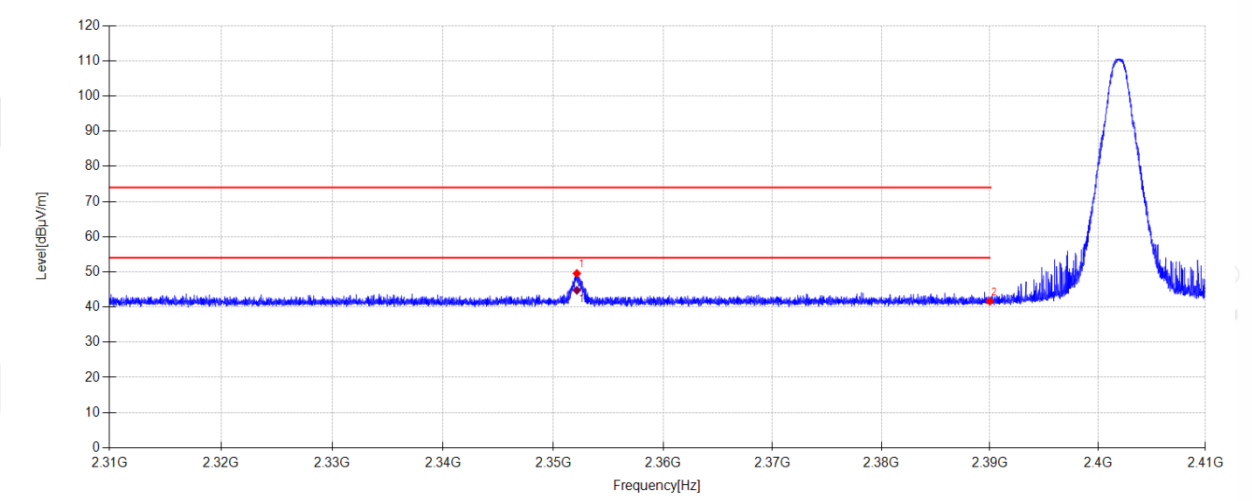

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2352.140	50.17	28.10	-28.72	49.55	74.00	24.45	PK	Horizontal
2	2390.000	42.10	28.18	-28.63	41.65	74.00	32.35	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2352.140	45.39	28.10	-28.72	44.77	54.00	9.23	AV	Horizontal

Note:

- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX 3DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\16

Memo:

Sample Number:S26040120-037 Power Setting:8

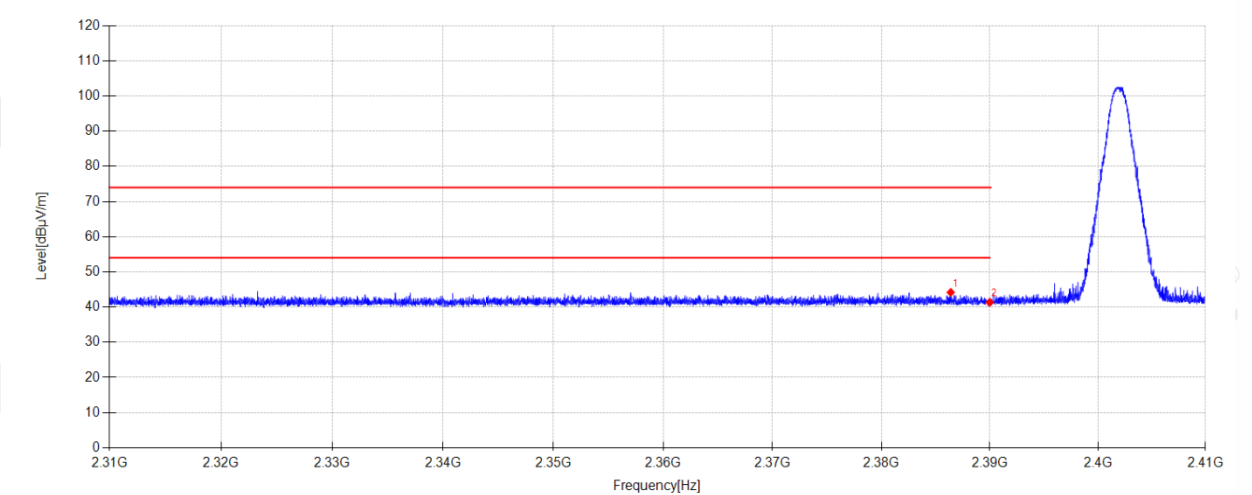

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.390	44.65	28.17	-28.64	44.18	74.00	29.82	PK	Vertical
2	2390.000	41.78	28.18	-28.63	41.33	74.00	32.67	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\17

Memo:

Sample Number:S26040120-037 Power Setting:8

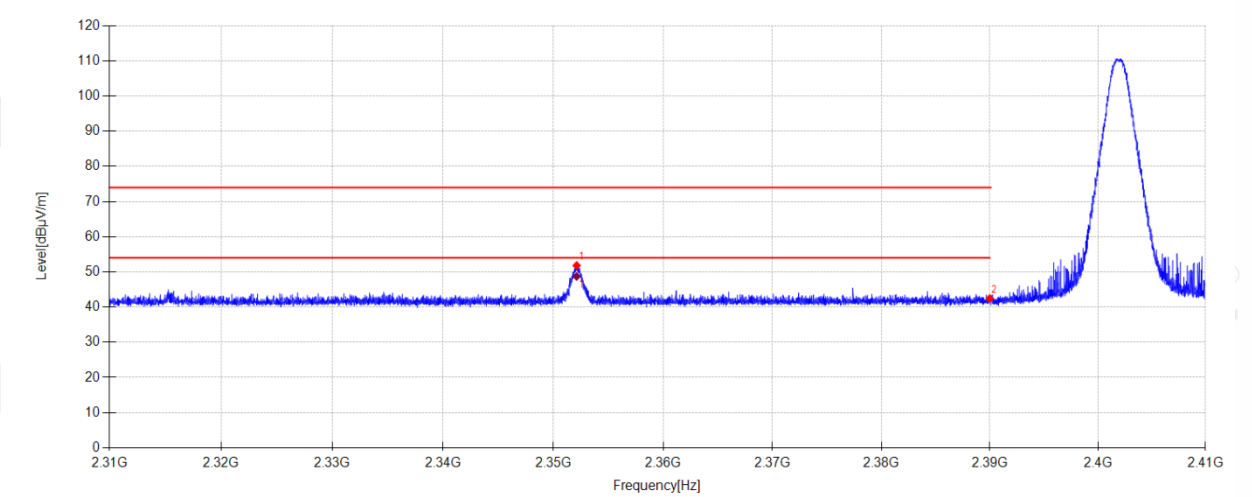

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2352.120	52.43	28.10	-28.72	51.81	74.00	22.19	PK	Horizontal
2	2390.000	42.89	28.18	-28.63	42.44	74.00	31.56	PK	Horizontal

Final Data List									
NO	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2352.120	49.34	28.10	-28.72	48.72	54.00	5.28	AV	Horizontal

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date:

2026-06-23

Tested By:

Nan Zhong

Test Mode:

TX DH5 2402MHz Mode

Power Supply:

Battery

Condition:

Temp:24.7°C;Humi:49.6%

Test Site:


4# Fully Anechoic Room

File Path:

d:\ts\2026 report date\Q26040120-1E\FCC ABOVE1G BT\18

Memo:

Sample Number:S26040120-037 Power Setting:8

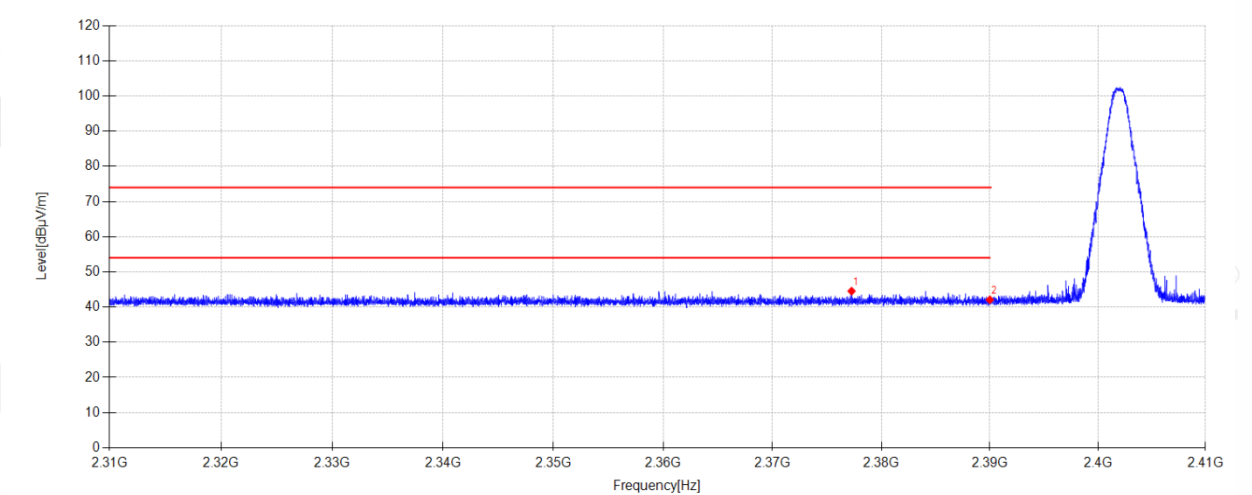

Suspected Data List									
NO	Freq. [MHz]	Reading [dBV/m]	Antenna Factor [dB]	Cable loss [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2377.260	45.05	28.15	-28.66	44.54	74.00	29.46	PK	Vertical
2	2390.000	42.53	28.18	-28.63	42.08	74.00	31.92	PK	Vertical

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

16. Power Line Conducted Emissions

16.1. Test equipment

Equipment	Manufacturer	Model No.	Serial No.	Cal Due To
EMI Test Receiver	R&S	ESCI 3	DDT-ZC00235	2027/06/10
Two Line V-Network	R&S	ENV216	DDT-ZC00535	2027/06/14
Pulse Limiter	SCHWARZBECK	ESH3-Z2	DDT-ZC00539	2027/06/10
CE Cable 1	R&S	ESU8/RF2	DDT-ZC00566	2027/06/21
Conducted & Radiated Software	Audix	e3	DDT-ZC00562	/
Two-line V-shaped artificial network	ROHDE&SCHWARZ	ENV216	DDT-ZC05693	2026/11/04
Artificial mains	R&S	ESH2-Z5	DDT-ZC00538	2027/06/09

16.2. Block diagram of test setup

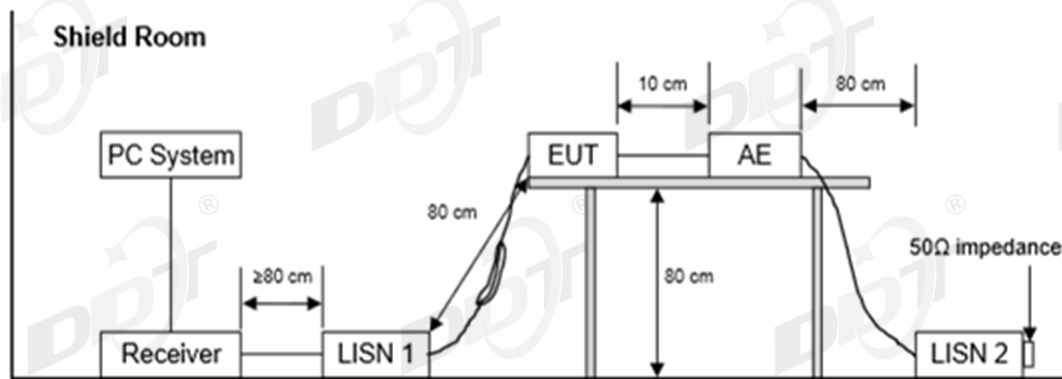

16.3. Limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz~500 kHz	66 ~ 56*	56 ~ 46*
500 kHz~5 MHz	56	46
5 MHz~30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

16.4. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	Description	other
/	/	/	/	/

16.5. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

16.6. Test result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

16.7. Test data

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2026 CE Report Data\Q26040120-1E\0625 CE.EM6
Test Date : 2026-07-02 Tested By : Li Xiongbin
Power Supply : AC 120V/60Hz Test Mode : DH5 TX Mode
Condition : TEMP:26.1°C, RH:65.4% LISN : 2025 1# 216/NEUTRAL
Memo : S26040120-049

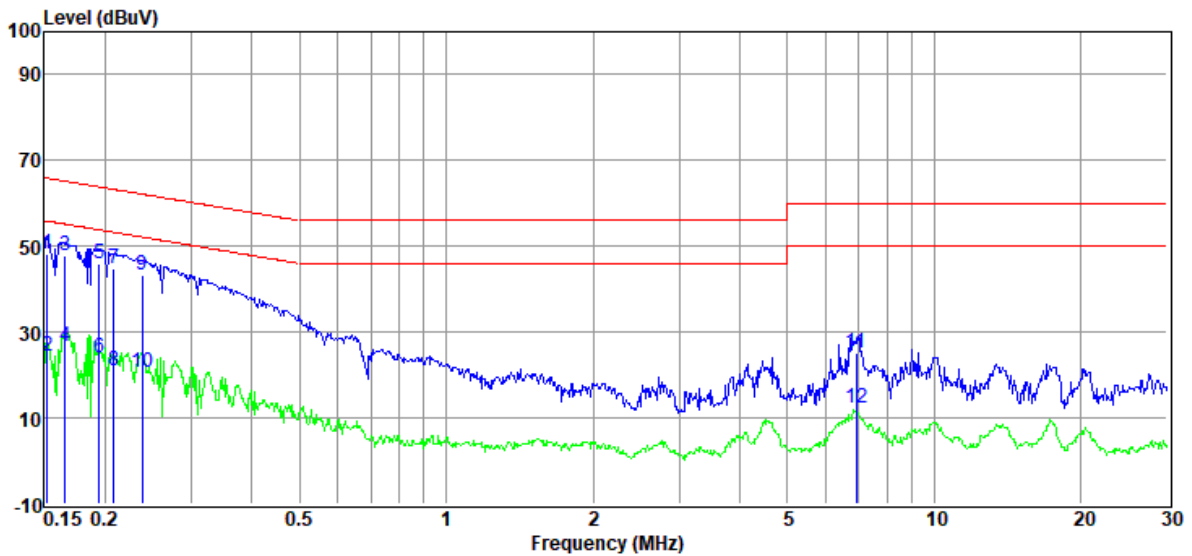

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	28.41	9.76	0.05	9.89	48.11	65.87	17.76	QP	NEUTRAL
2	0.15	4.79	9.76	0.05	9.89	24.49	55.87	31.38	Average	NEUTRAL
3	0.17	28.04	9.70	0.05	9.89	47.68	65.16	17.48	QP	NEUTRAL
4	0.17	7.06	9.70	0.05	9.89	26.70	55.16	28.46	Average	NEUTRAL
5	0.19	26.12	9.80	0.06	9.89	45.87	63.84	17.97	QP	NEUTRAL
6	0.19	4.37	9.80	0.06	9.89	24.12	53.84	29.72	Average	NEUTRAL
7	0.21	24.92	9.83	0.06	9.89	44.70	63.27	18.57	QP	NEUTRAL
8	0.21	1.15	9.83	0.06	9.89	20.93	53.27	32.34	Average	NEUTRAL
9	0.24	23.39	9.84	0.06	9.89	43.18	62.17	18.99	QP	NEUTRAL
10	0.24	0.85	9.84	0.06	9.89	20.64	52.17	31.53	Average	NEUTRAL
11	6.91	5.21	9.86	0.22	9.85	25.14	60.00	34.86	QP	NEUTRAL
12	6.91	-7.78	9.86	0.22	9.85	12.15	50.00	37.85	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2026 CE Report Data\Q26040120-1E\0625 CE.EM6

Test Date : 2026-07-02

Tested By : Li Xiongbín


Power Supply : AC 120V/60Hz

Test Mode : DH5 TX Mode

Condition : TEMP:26.1°C, RH:65.4%

LISN : 2025 1# 216/LINE

Memo : S26040120-049

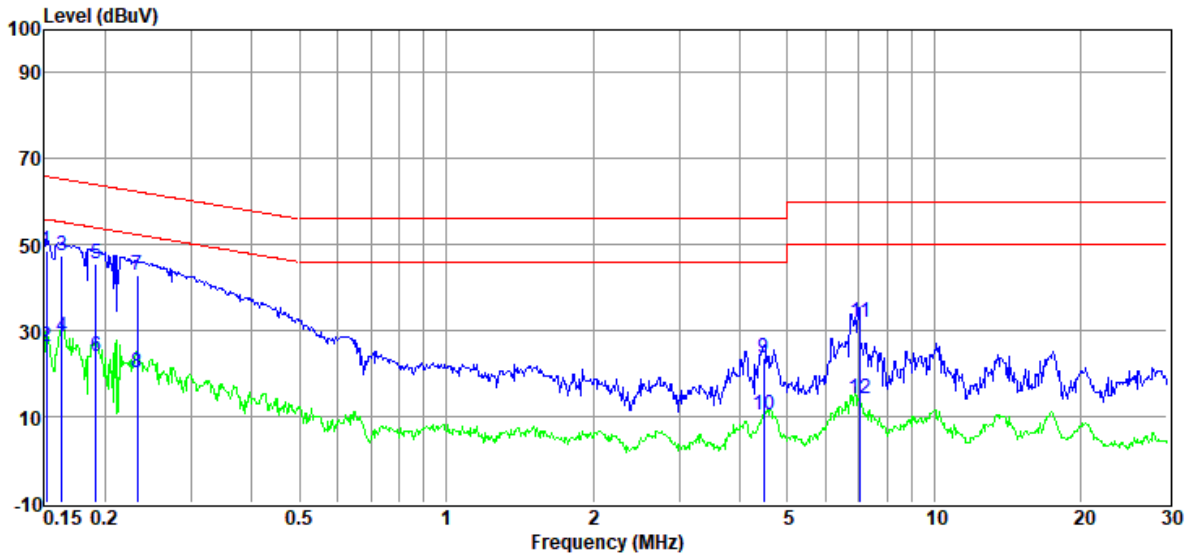

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	28.62	9.85	0.05	9.89	48.41	65.91	17.50	QP	LINE
2	0.15	6.33	9.85	0.05	9.89	26.12	55.91	29.79	Average	LINE
3	0.16	27.82	9.84	0.05	9.89	47.60	65.30	17.70	QP	LINE
4	0.16	8.65	9.84	0.05	9.89	28.43	55.30	26.87	Average	LINE
5	0.19	25.86	9.83	0.06	9.89	45.64	63.98	18.34	QP	LINE
6	0.19	4.24	9.83	0.06	9.89	24.02	53.98	29.96	Average	LINE
7	0.23	23.29	9.82	0.06	9.89	43.06	62.35	19.29	QP	LINE
8	0.23	3.31	9.82	0.06	9.89	20.08	52.35	32.27	Average	LINE
9	4.48	3.43	9.98	0.19	9.86	23.46	56.00	32.54	QP	LINE
10	4.48	-9.68	9.98	0.19	9.86	10.35	46.00	35.65	Average	LINE
11	7.06	11.91	9.93	0.22	9.85	31.91	60.00	28.09	QP	LINE
12	7.06	-5.81	9.93	0.22	9.85	14.19	50.00	35.81	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2026 CE Report Data\Q26040120-1E\0625 CE.EM6

Test Date : 2026-06-25

Tested By : Li Xiongbin


Power Supply : AC 120V/60Hz

Test Mode : DH5 TX Mode

Condition : TEMP:26.1°C, RH:65.4%

LISN : 2025 1# 216/NEUTRAL

Memo : S26040120-036

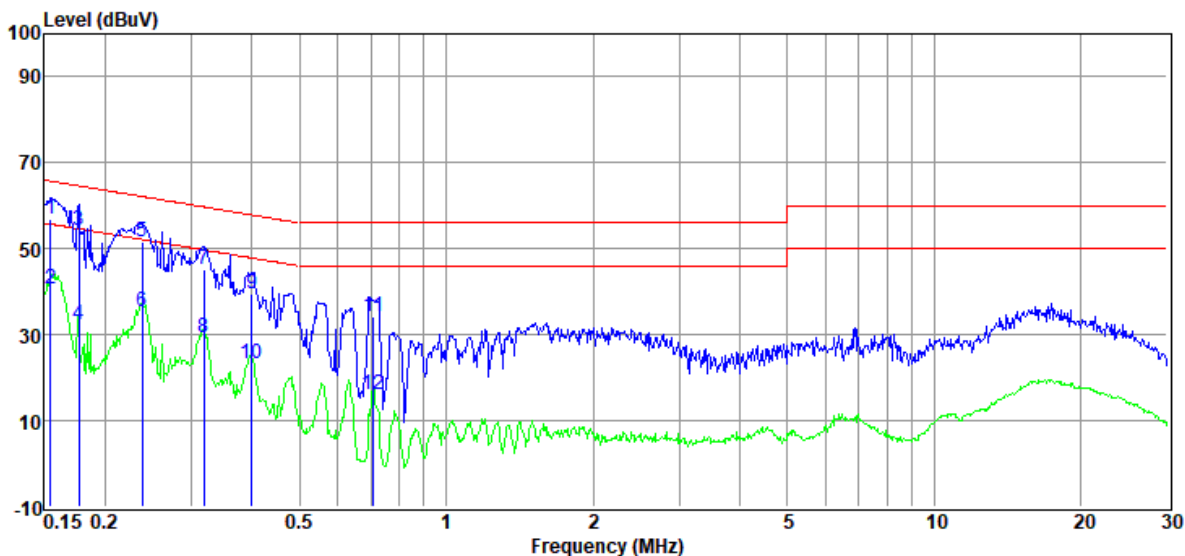

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	37.29	9.75	0.05	9.89	56.98	65.74	8.76	QP	NEUTRAL
2	0.15	20.96	9.75	0.05	9.89	40.65	55.74	15.09	Average	NEUTRAL
3	0.18	34.49	9.72	0.06	9.89	54.16	64.64	10.48	QP	NEUTRAL
4	0.18	12.63	9.72	0.06	9.89	32.30	54.64	22.34	Average	NEUTRAL
5	0.24	31.68	9.84	0.06	9.89	51.47	62.17	10.70	QP	NEUTRAL
6	0.24	15.75	9.84	0.06	9.89	35.54	52.17	16.63	Average	NEUTRAL
7	0.32	25.49	9.75	0.06	9.89	45.19	59.75	14.56	QP	NEUTRAL
8	0.32	9.66	9.75	0.06	9.89	29.36	49.75	20.39	Average	NEUTRAL
9	0.40	19.76	9.80	0.08	9.89	39.53	57.86	18.33	QP	NEUTRAL
10	0.40	3.56	9.80	0.08	9.89	23.33	47.86	24.53	Average	NEUTRAL
11	0.71	14.10	9.92	0.12	9.90	34.04	56.00	21.96	QP	NEUTRAL
12	0.71	-3.87	9.92	0.12	9.90	16.07	46.00	29.93	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room

D:\2026 CE Report Data\Q26040120-1E\0625 CE.EM6

Test Date : 2026-06-25

Tested By : Li Xiongbin


Power Supply : AC 120V/60Hz

Test Mode : DH5 TX Mode

Condition : TEMP:26.1°C, RH:65.4%

LISN : 2025 1# 216/LINE

Memo : S26040120-036

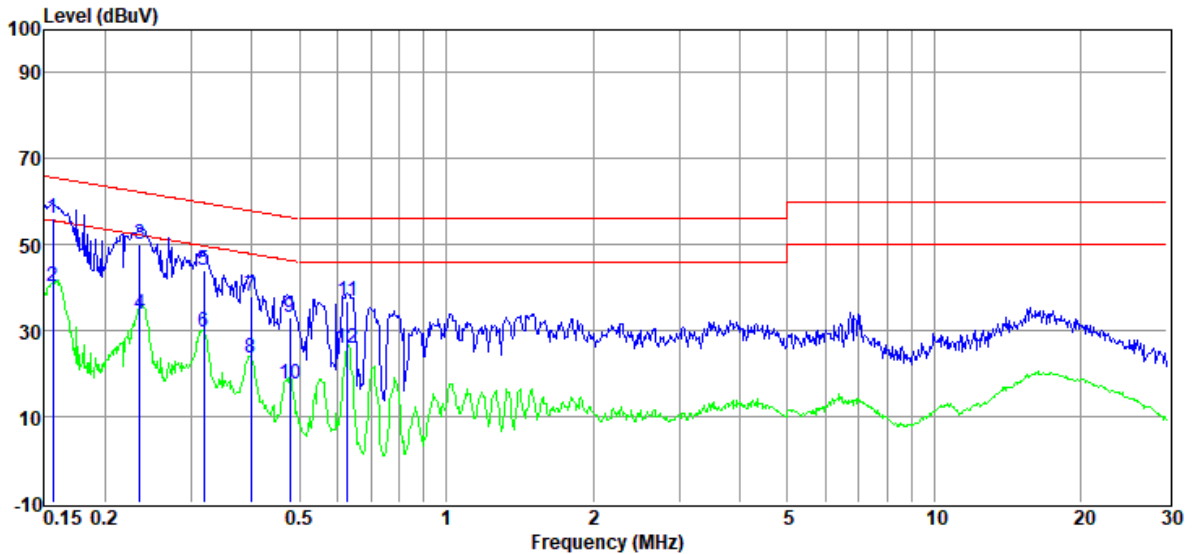

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Margin	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.16	36.42	9.85	0.05	9.89	56.21	65.65	9.44	QP	LINE
2	0.16	20.40	9.85	0.05	9.89	40.19	55.65	15.46	Average	LINE
3	0.24	30.17	9.82	0.06	9.89	49.94	62.26	12.32	QP	LINE
4	0.24	13.92	9.82	0.06	9.89	33.69	52.26	18.57	Average	LINE
5	0.32	24.24	9.68	0.06	9.89	43.87	59.75	15.88	QP	LINE
6	0.32	9.90	9.68	0.06	9.89	29.53	49.75	20.22	Average	LINE
7	0.40	18.34	9.69	0.08	9.89	38.00	57.90	19.90	QP	LINE
8	0.40	3.92	9.69	0.08	9.89	23.58	47.90	24.32	Average	LINE
9	0.48	13.54	9.75	0.09	9.89	33.27	56.36	23.09	QP	LINE
10	0.48	-1.99	9.75	0.09	9.89	17.74	46.36	28.62	Average	LINE
11	0.63	16.97	9.94	0.11	9.89	36.91	56.00	19.09	QP	LINE
12	0.63	6.07	9.94	0.11	9.89	26.01	46.00	19.99	Average	LINE

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

18. Photos of the EUT

Please refer to DDT-Q26040120-2E appendix I

-----End Report-----