

FCC REPORT

(GSM & WCDMA)

Applicant: SSB Trading Inc.

Address of Applicant: 1750 Regal Row Dallas,TX 75235

Equipment Under Test (EUT)

Product Name: mobile phone

Model No.: SSB-508E, SSB-508D

Trade mark: True Slim Phone

FCC ID: 2AL4OSSB-508

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L

Date of sample receipt: 07 Jul., 2018

Date of Test: 18 Jul., to 22 Aug., 2018

Date of report issued: 22 Aug., 2018

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	22 Aug., 2018	Original

Tested by:

YT Yang

Test Engineer

Date:

22 Aug., 2018

Reviewed by:

Wimer Zhang

Project Engineer

Date:

22 Aug., 2018

3. Contents

Page

1.	COVER PAGE.....	1
2.	VERSION.....	2
3.	CONTENTS.....	3
4.	TEST SUMMARY.....	4
5.	GENERAL INFORMATION.....	5
5.1	CLIENT INFORMATION.....	5
5.2	GENERAL DESCRIPTION OF E.U.T.....	5
5.3	TEST MODES.....	7
5.4	DESCRIPTION OF SUPPORT UNITS.....	7
5.5	MEASUREMENT UNCERTAINTY.....	7
5.6	LABORATORY FACILITY.....	7
5.7	LABORATORY LOCATION.....	8
5.8	TEST INSTRUMENTS LIST.....	8
6.	TEST RESULTS.....	9
6.1	CONDUCTED OUTPUT POWER.....	9
6.2	OCCUPY BANDWIDTH.....	12
6.3	PEAK-TO-AVERAGE POWER RATIO.....	27
6.4	MODULATION CHARACTERISTIC.....	30
6.5	OUT OF BAND EMISSION AT ANTENNA TERMINALS.....	30
6.6	ERP, EIRP MEASUREMENT.....	39
6.7	FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....	43
6.8	FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT.....	49
6.9	FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT.....	55
7	TEST SETUP PHOTO.....	59
8	EUT CONSTRUCTIONAL DETAILS.....	60

4. Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(2) Part 24.232 (c) Part 27.50 (d)(4)	Pass
Peak-to-Average Power Ratio	Part 24.232 (d) Part 27.50(d)(5)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53(h)	Pass
Spurious Emissions at Antenna Terminal	Part 2.1051 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Field Strength of Spurious Radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Out of band emission, Band Edge	Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Frequency stability vs. temperature	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(d)(2)	Pass
Pass: The EUT complies with the essential requirements in the standard.		

5. General Information

5.1 Client Information

Applicant:	SSB Trading Inc.
Address:	1750 Regal Row Dallas,TX 75235
Manufacturer	Shenzhen HKUNION Technology Co., Ltd.
Address:	Room 1912-1915, Block A, Weidonglong Business Building, Mellon Avenue, Longhua new district, Shenzhen City, Guangdong Province
Factory:	Xinxiang Super Grand Intelligent Technology Co., Ltd.
Address:	NEW AREA INDUSTRIAL AGGLOMERATION HONGQI DISTRICT OF XINXIANG CITY PIONEER PARK NO.9, XINXIANG CITY, HENAN PROVINCE, CHINA

5.2 General Description of E.U.T.

Product Name:	mobile phone
Model No.:	SSB-508E, SSB-508D
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V: 826.4MHz-846.6MHz WCDMA Band II: 1852.4 MHz-1907.6 MHz WCDMA Band IV: 1712.4 MHz-1752.6 MHz
Modulation type:	GSM/GPRS: GMSK, UMTS: QPSK
Antenna type:	Internal Antenna
Antenna gain:	GSM 850: 1.51 dBi PCS 1900: 1.45dBi WCDMA Band V: 1.51 dBi WCDMA Band II: 1.45 dBi WCDMA Band IV: 1.45 dBi
Power supply:	Rechargeable Li-ion Battery DC3.8V-1800mAh.
AC adapter:	Input: AC100-240V, 50/60Hz, Output: DC 5.0V, 700mA
Remark:	Model No.: SSB-508E,SSB-508D were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name

Operation Frequency List:

GSM 850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....			
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...	...	...	...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60
WCDMA Band IV			
Channel	Frequency (MHz)		
1312	1712.40		
1313	1712.60		
....			
1412	1732.40		
1413	1732.60		
1414	1732.80		
...	...		
1512	1752.40		
1513	1752.60		

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80
WCDMA Band V			WCDMA Band II		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60
WCDMA Band IV					
Channel		Frequency(MHz)			
Lowest channel	1312	1712.40			
Middle channel	1413	1732.60			
Highest channel	1513	1752.60			

5.3 Test modes

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.8Vdc, Extreme: Low 3.5 Vdc, High 4.35 Vdc
Test mode:	
GSM mode	Keep the EUT communication with simulated station in GSM mode
GPRS mode	Keep the EUT communication with simulated station in GPRS mode
RMC mode	Keep the EUT communication with simulated station in RMC mode
HSDPA	Keep the EUT communication with simulated station in HSDPA mode
HSUPA	Keep the EUT communication with simulated station in HSUPA mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes with power adaptor, earphone and Data cable. Just the worst case position (H mode) shown in report.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	±2.76 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.28 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.72 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±2.88 dB (k=2)

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location


Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

5.8 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-16-2018	03-15-2019
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-16-2018	03-15-2019
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2018	03-06-2019
Pre-amplifier	CD	PAP-1G18	11804	03-07-2018	03-06-2019
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-07-2018	03-06-2019
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-07-2018	03-06-2019
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-10-2017	11-09-2018
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-07-2018	03-06-2019
Signal Generator	R&S	SMR20	1008100050	03-07-2018	03-06-2019
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2018	03-06-2019
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2018	03-06-2019
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2018	03-06-2019
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	10-31-2017	10-30-2018
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	09-24-2017	09-23-2018
Simulated Station	Rohde & Schwarz	CMW500	140493	06-24-2017	06-23-2018
				06-24-2018	06-23-2019

6. Test results

6.1 Conducted Output Power

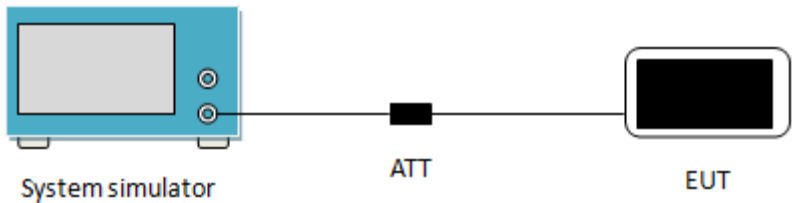
Test Requirement:	FCC part 22.913(a)(2), FCC part 24.232(c), FCC part 27.50(d)(4)
Test Method:	ANSI/TIA-603-D 2010
Limit:	GSM 850: 7W, PCS 1900: 2W WCDMA Band V: 7W, WCDMA Band II: 2W, WCDMA Band IV: 1W
Test setup:	 The diagram illustrates the test setup. On the left is a blue 'System simulator' with a screen and two ports. A cable connects one of its ports to a black 'ATT' (attenuator) block. Another cable connects the other side of the 'ATT' block to a black 'EUT' (Equipment Under Test) device.
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

EUT Mode	Burst Average power (dBm)			Limit(dBm)
	128	190	251	
	824.20MHz	836.60MHz	848.80MHz	
GSM 850	32.53	32.63	32.71	38.45
GPRS 850 (1 Uplink slot)	32.52	32.62	32.59	
GPRS 850 (2 Uplink slot)	31.63	31.69	31.78	
GPRS 850 (3 Uplink slot)	29.50	29.56	29.59	
GPRS 850 (4 Uplink slot)	28.50	28.53	28.58	
EUT Mode	Burst Average power (dBm)			Limit(dBm)
	512	661	810	
	1850.20MHz	1880.00MHz	1909.80MHz	
PCS 1900	29.19	28.93	28.95	33.00
GPRS 1900 (1 Uplink slot)	29.17	28.92	28.68	
GPRS 1900 (2 Uplink slot)	28.35	28.09	27.72	
GPRS 1900 (3 Uplink slot)	26.43	26.10	25.92	
GPRS 1900 (4 Uplink slot)	25.53	25.48	24.96	

EUT Mode		Burst Average power (dBm)			Limit(dBm)
		4132	4183	4233	
		826.40MHz	836.60MHz	846.60MHz	
UMTS 850 HSDPA	Subtest 1	22.35	22.71	22.39	38.45
	Subtest 2	21.92	22.26	22.02	
	Subtest 3	20.35	20.73	20.56	
	Subtest 4	20.49	20.80	20.62	
UMTS 850 HSUPA	Subtest 1	22.24	22.65	22.33	
	Subtest 2	22.25	22.60	22.30	
	Subtest 3	20.50	20.86	20.52	
	Subtest 4	22.35	22.70	22.40	
	Subtest 5	21.33	21.69	21.70	
UMTS 850 RMC	12.2kbps	23.35	23.67	23.30	
UMTS 850 AMR	12.2kbps	23.32	23.58	23.25	
EUT Mode		Burst Average power (dBm)			Limit(dBm)
		9262	9400	9538	
		1852.40MHz	1880.00MHz	1907.60MHz	
UMTS 1900 HSDPA	Subtest 1	20.78	21.06	20.48	33.00
	Subtest 2	20.41	20.66	19.89	
	Subtest 3	18.78	19.07	18.79	
	Subtest 4	18.82	19.22	18.75	
UMTS 1900 HSUPA	Subtest 1	20.70	21.03	20.42	
	Subtest 2	20.75	21.01	20.46	
	Subtest 3	19.03	19.23	18.60	
	Subtest 4	20.79	21.01	20.40	
	Subtest 5	19.91	20.19	19.65	
UMTS 1900 RMC	12.2kbps	21.73	22.07	21.47	
UMTS 1900 AMR	12.2kbps	21.57	22.07	21.46	
EUT Mode		Burst Average power (dBm)			Limit(dBm)
		1312	1412	1513	
		1712.40MHz	1732.40MHz	1752.60MHz	
UMTS 1700 HSDPA	Subtest 1	22.23	22.64	22.37	30.00
	Subtest 2	21.89	22.27	22.03	
	Subtest 3	20.56	20.81	20.61	
	Subtest 4	20.28	20.66	20.58	
UMTS 1700 HSUPA	Subtest 1	22.28	22.62	22.38	
	Subtest 2	22.25	22.60	22.32	
	Subtest 3	20.36	20.83	20.66	
	Subtest 4	22.37	22.61	22.39	
	Subtest 5	21.45	21.69	21.58	
UMTS 1700 RMC	12.2kbps	23.66	23.66	23.35	
UMTS 1700 AMR	12.2kbps	23.22	23.63	23.32	


6.2 Occupy Bandwidth

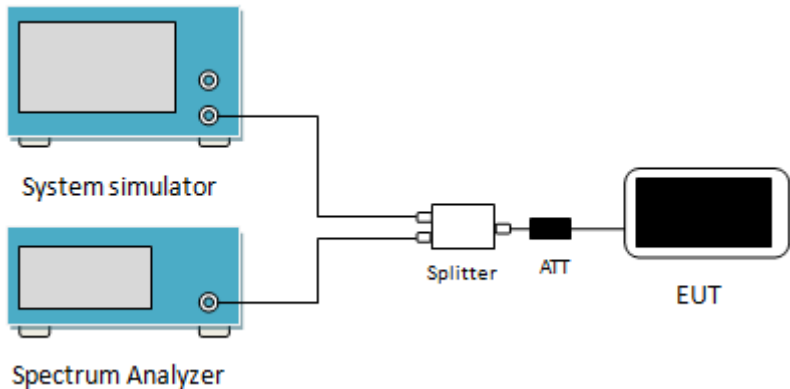
Test Requirement:	FCC part 22.917(b), FCC part 24.238(b), FCC Part 27.53(h)
Test Method:	ANSI/TIA-603-D 2010
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a white rectangular 'Splitter'. The other output port of the 'Splitter' is connected to a black rectangular 'ATT' (Attenuator). Finally, the output of the 'ATT' is connected to the input of a black rectangular 'EUT' (Equipment Under Test) on the right.
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850	128	824.2	248	324
	190	836.6	248	322
	251	848.8	242	326
GPRS 850	128	824.2	244	320
	190	836.6	248	318
	251	848.8	248	322
PCS 1900	512	1850.2	246	320
	661	1880.0	246	324
	810	1909.8	246	324
GPRS 1900	512	1850.2	244	320
	661	1880.0	248	316
	810	1909.8	248	314
UMTS 850 12.2k RMC	4132	826.4	4180	4720
	4183	836.6	4160	4680
	4233	846.6	4180	4780
UMTS 850 HSDPA	4132	826.4	4160	4680
	4183	836.6	4160	4720
	4233	846.6	4160	4700
UMTS 850 HSUPA	4132	826.4	4180	4680
	4183	836.6	4160	4680
	4233	846.6	4180	4720
UMTS 1900 12.2k RMC	9262	1852.4	4160	4700
	9400	1880.0	4180	4720
	9538	1907.6	4160	4740
UMTS 1900 HSDPA	9262	1852.4	4180	4700
	9400	1880.0	4180	4680
	9538	1907.6	4180	4720
UMTS 1900 HSUPA	9262	1852.4	4180	4720
	9400	1880.0	4180	4720
	9538	1907.6	4180	4720
UMTS 1700 12.2k RMC	1312	1712.40	4180	4700
	1413	1732.60	4180	4720
	1513	1752.60	4180	4680
UMTS 1700 HSDPA	1312	1712.40	4180	4700
	1413	1732.60	4160	4680
	1513	1752.60	4180	4700
UMTS 1700 HSUPA	1312	1712.40	4180	4700
	1413	1732.60	4160	4720
	1513	1752.60	4180	4720

Test plot as follows:

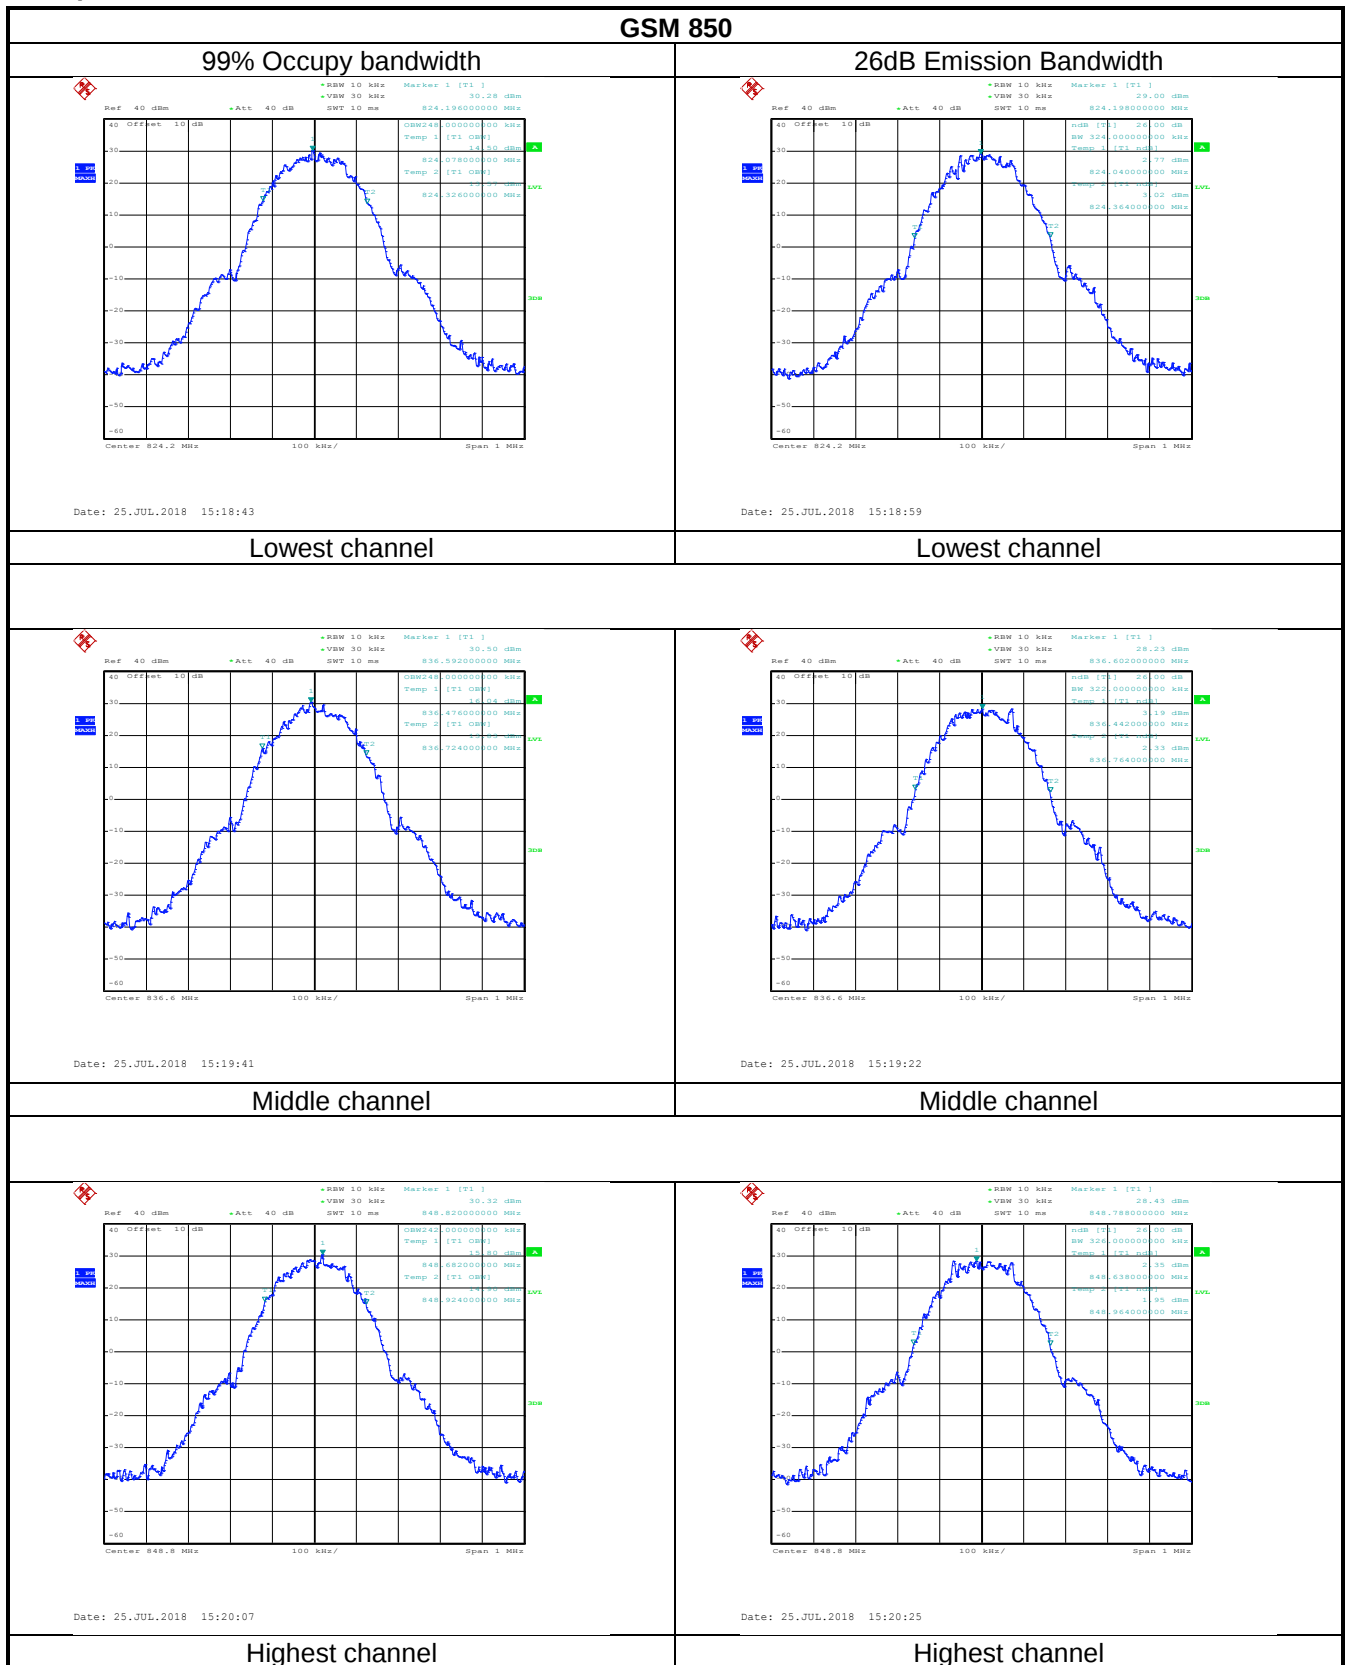


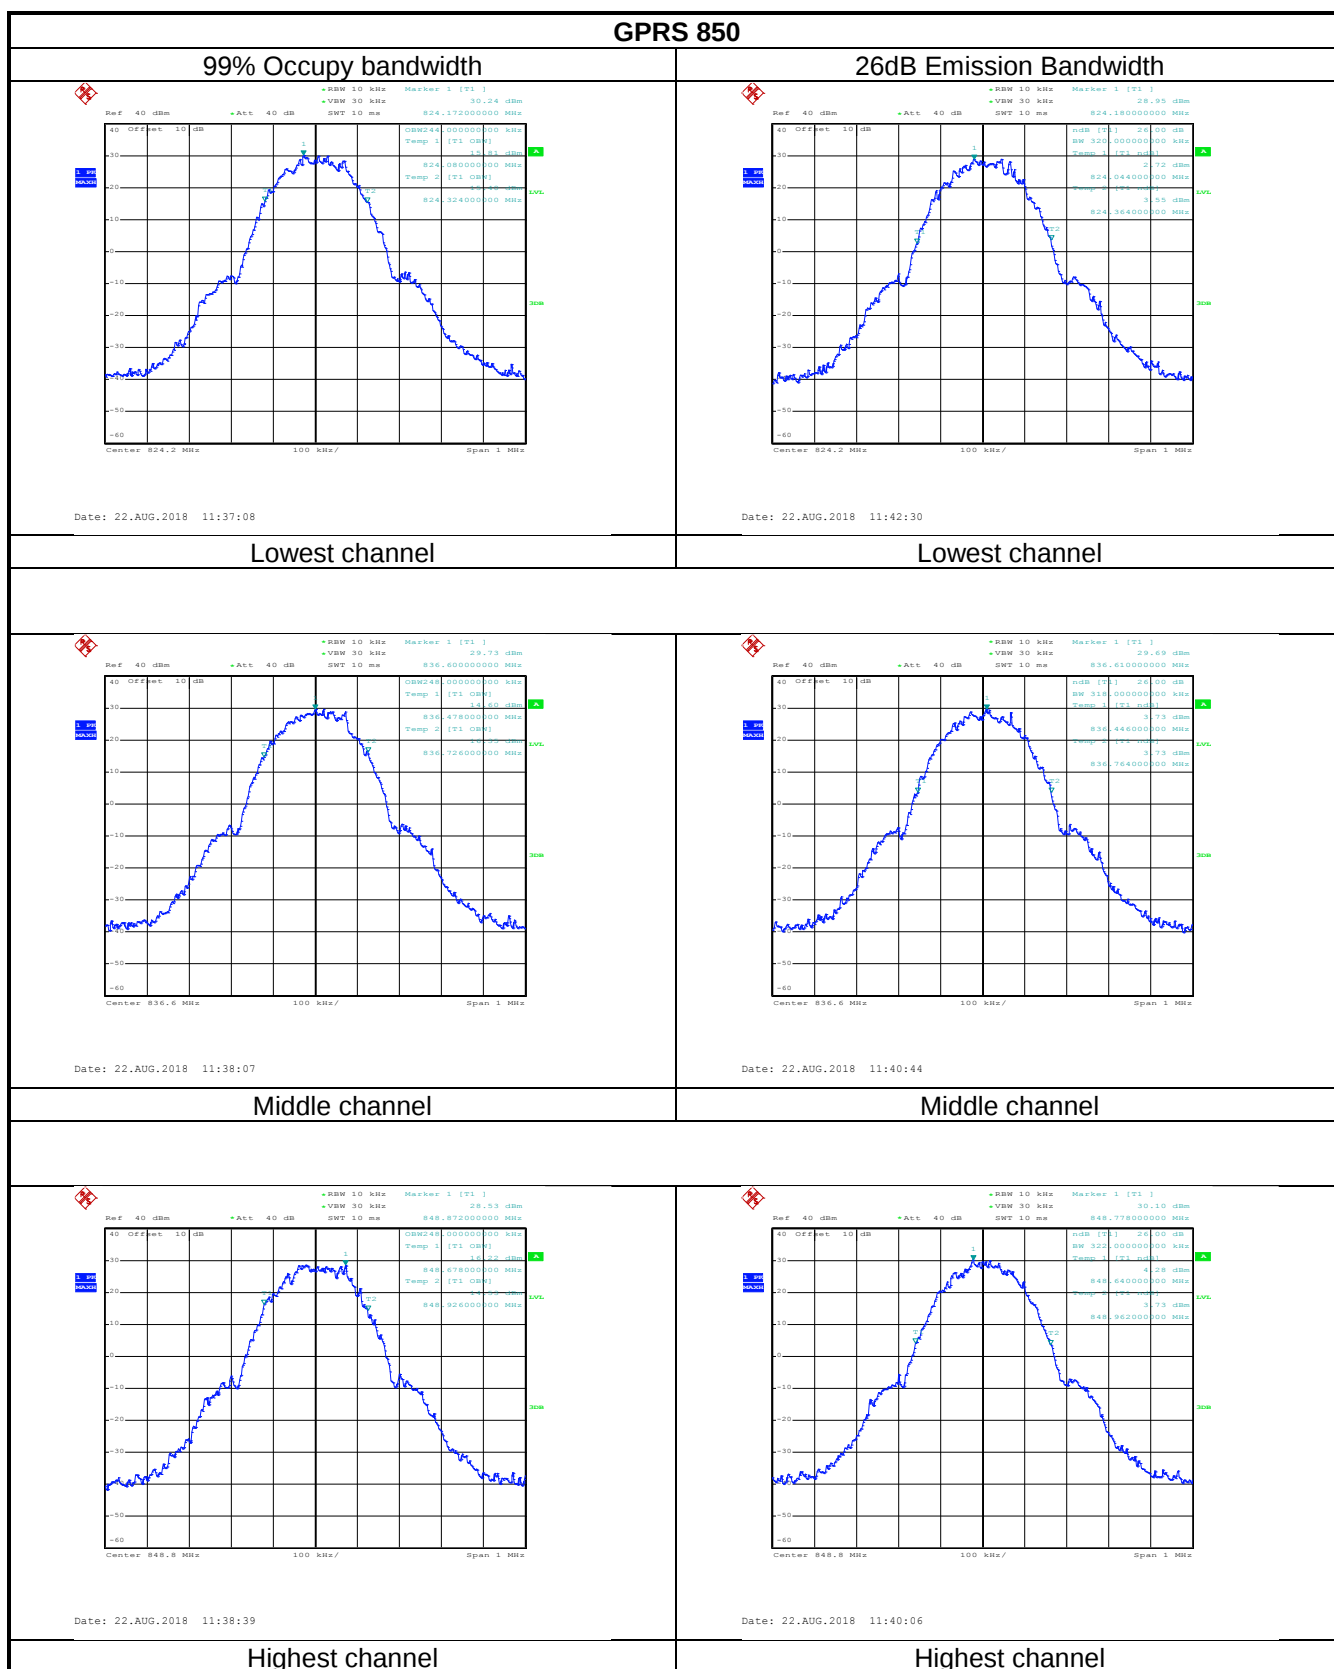

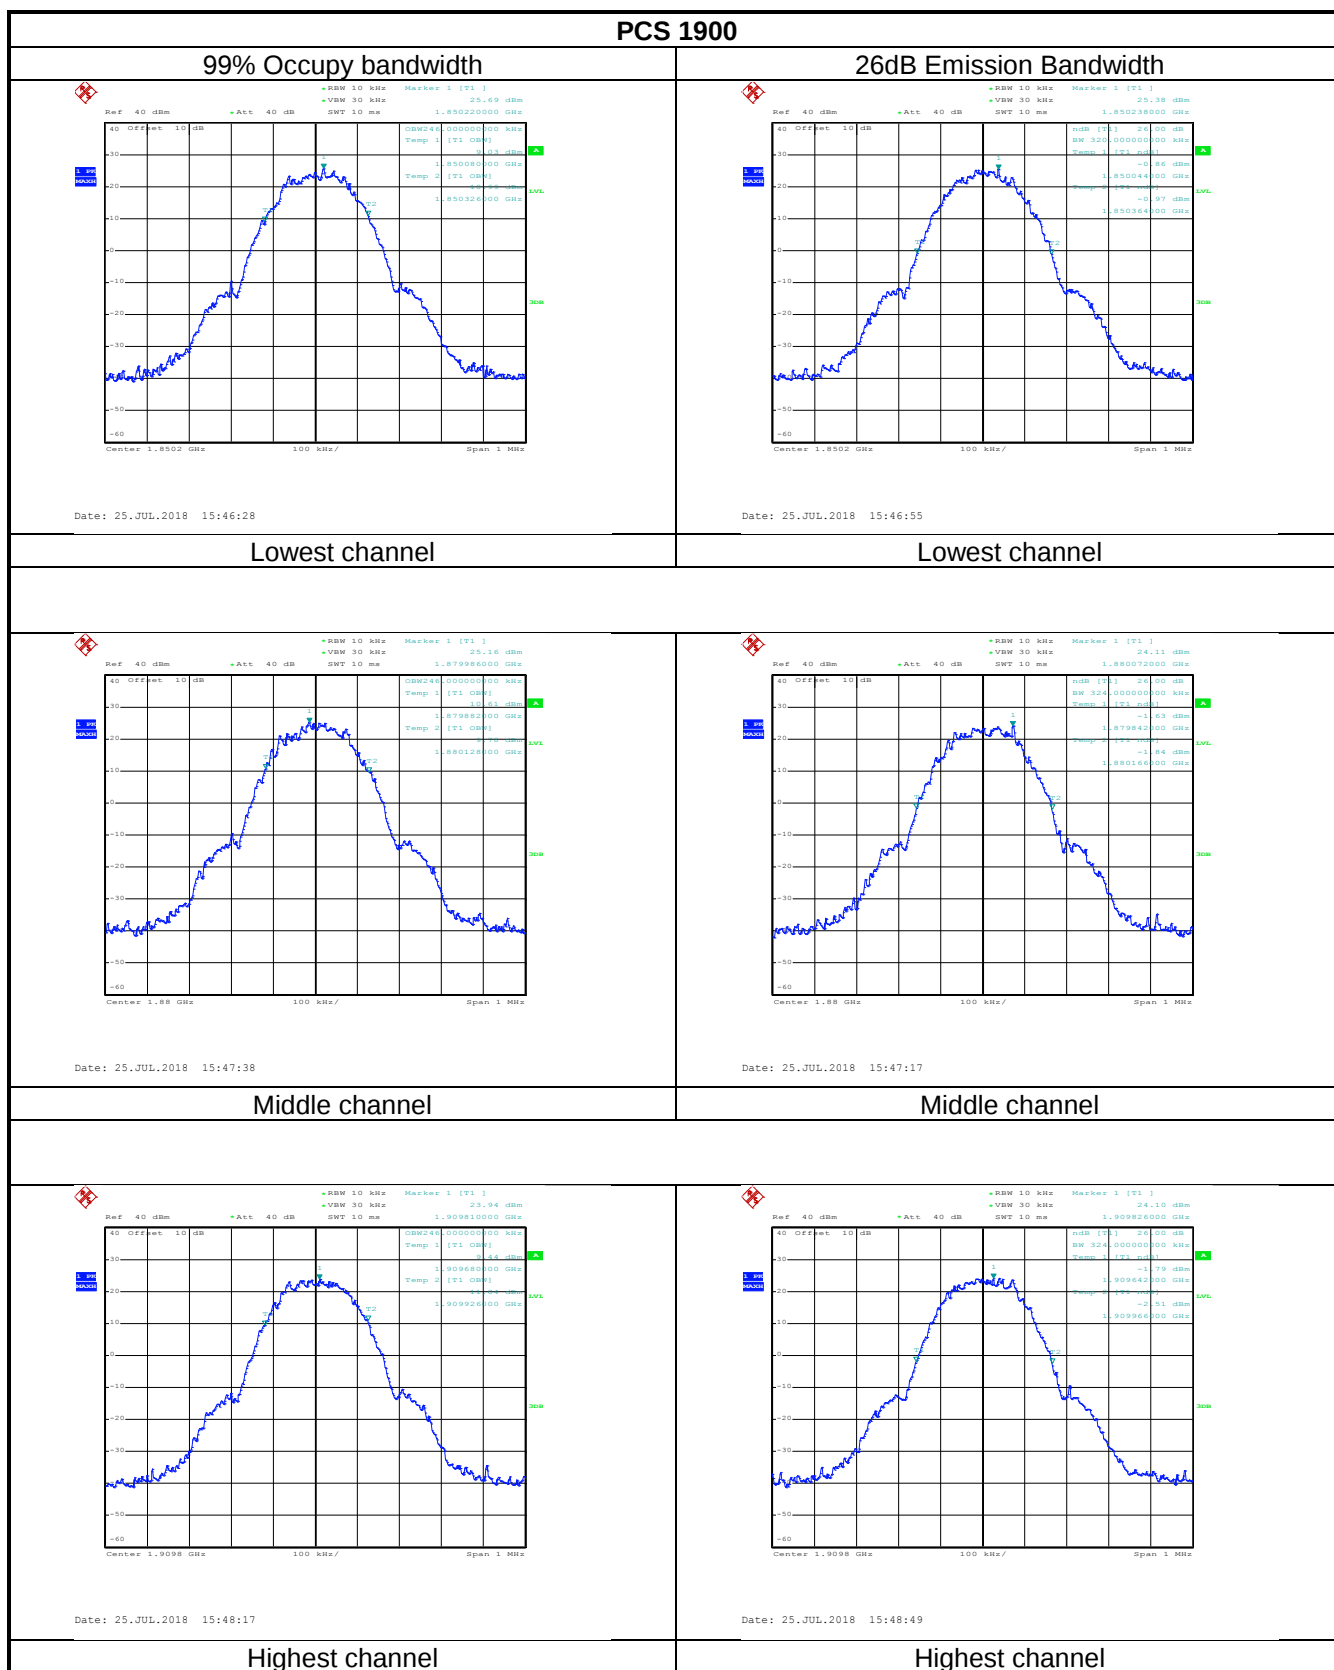


GPRS 1900

99% Occupancy bandwidth

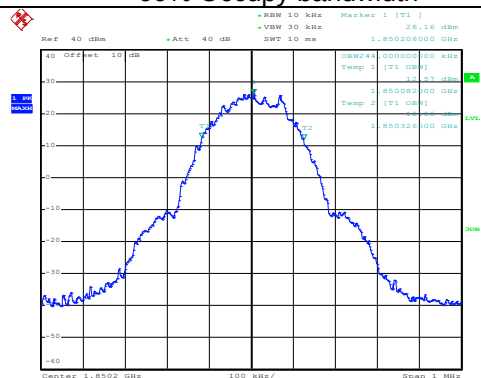

Date: 22.AUG.2018 11:48:03


26dB Emission Bandwidth

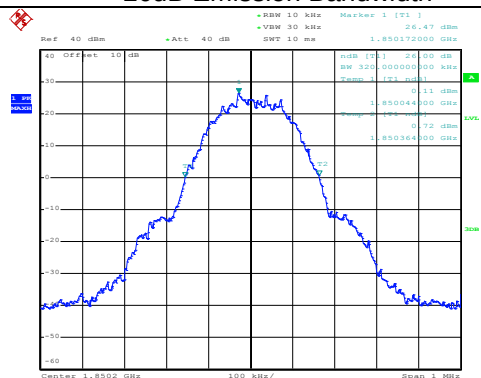


Date: 22.AUG.2018 11:45:08

Lowest channel

Lowest channel

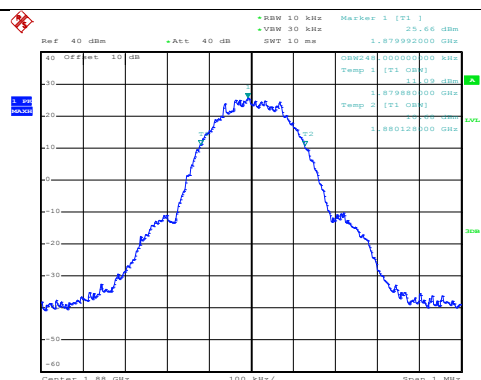


Date: 22.AUG.2018 11:46:16

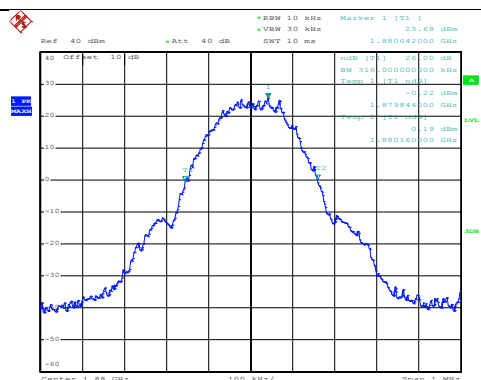


Date: 22.AUG.2018 11:45:37

Middle channel

Middle channel

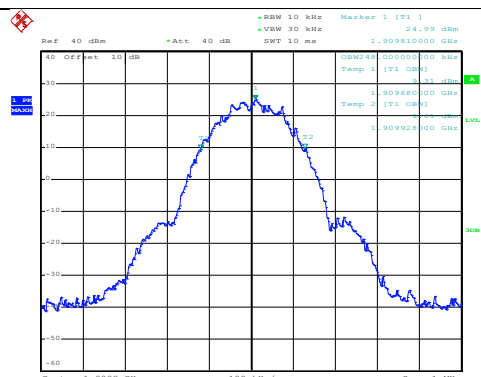


Date: 22.AUG.2018 11:46:42

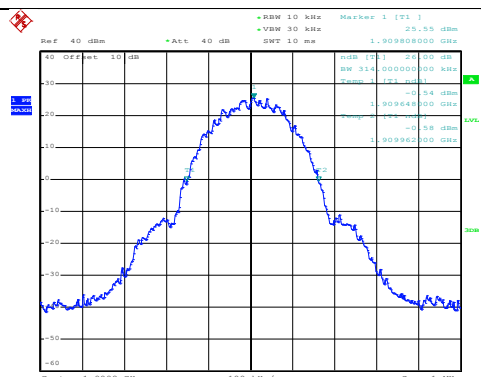

Date: 22.AUG.2018 11:47:09


Highest channel

Highest channel

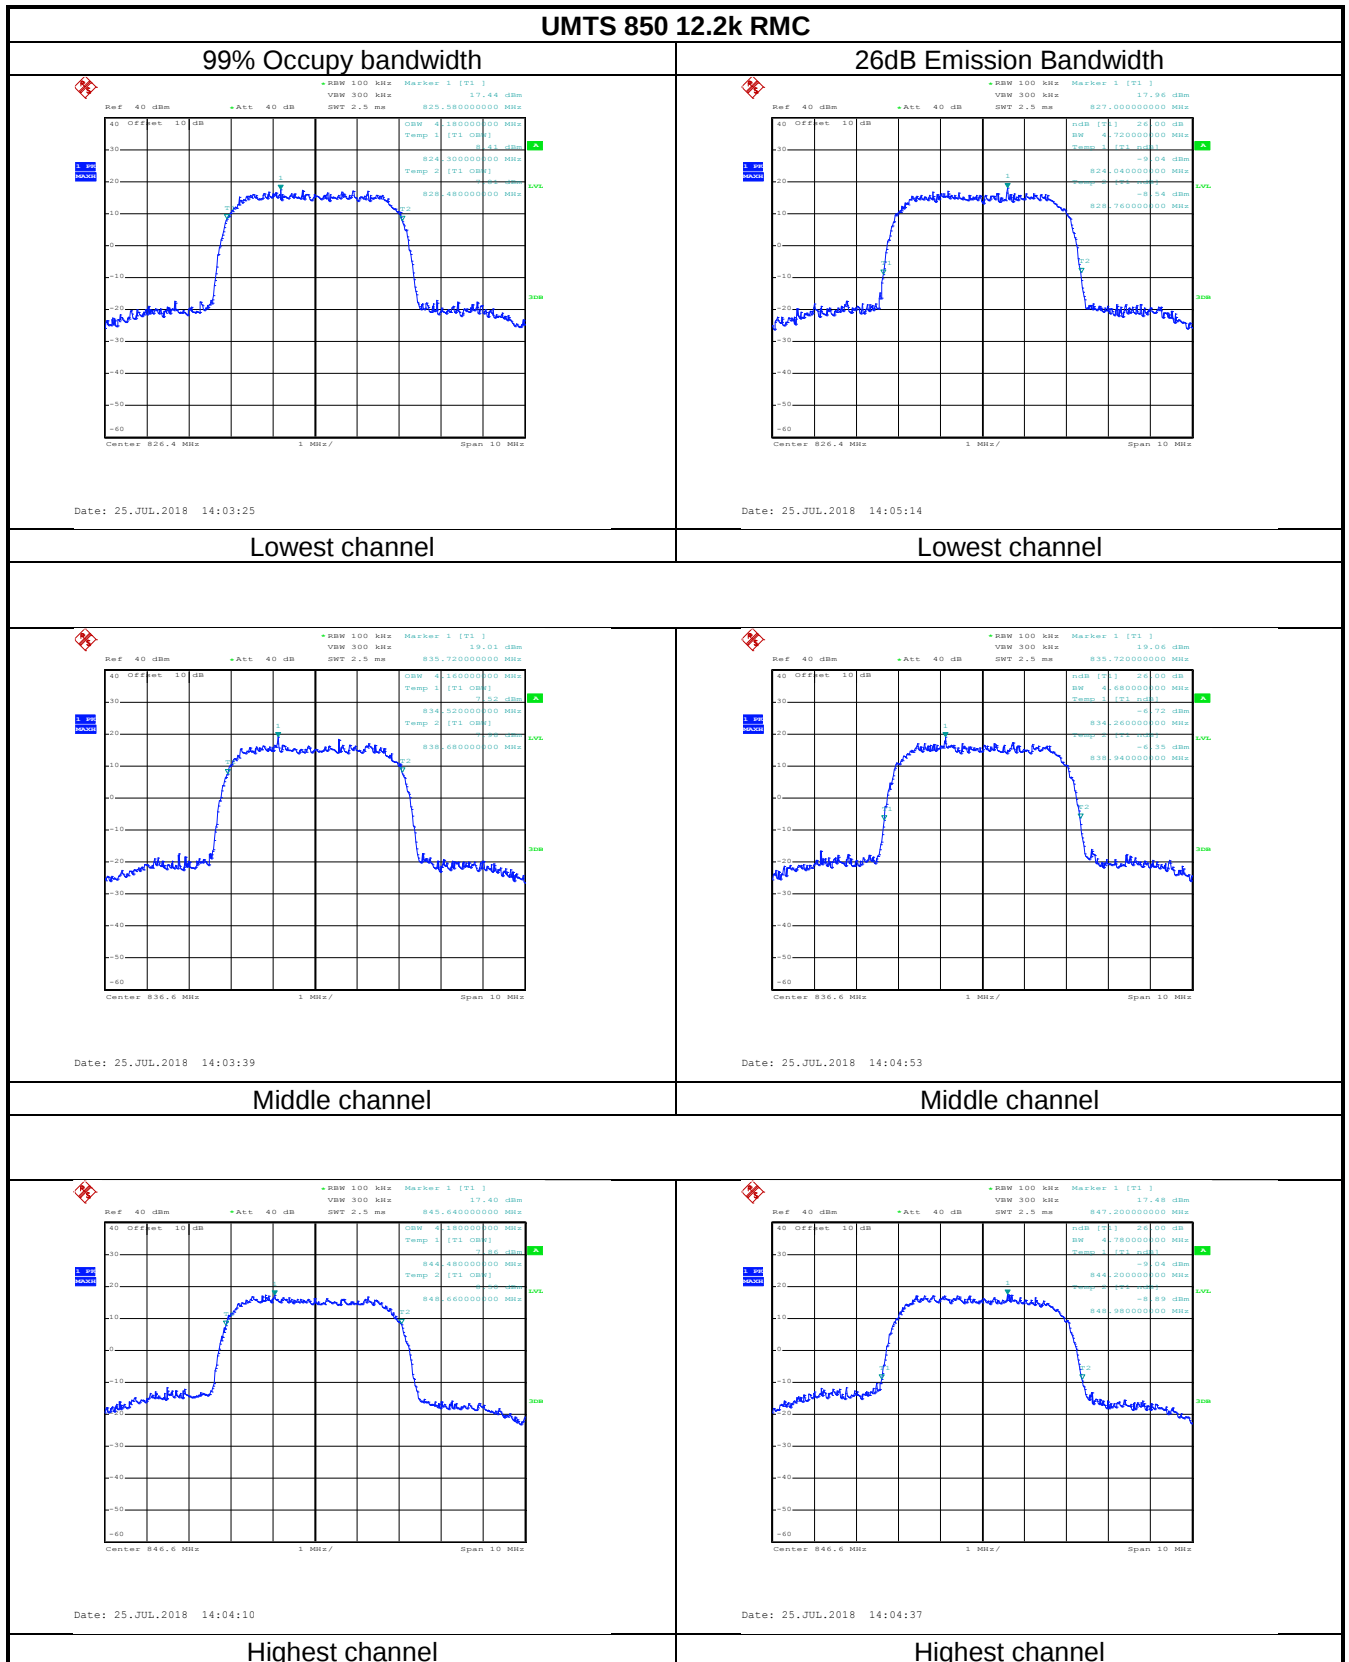


UMTS 850 HSDPA

99% Occupancy bandwidth

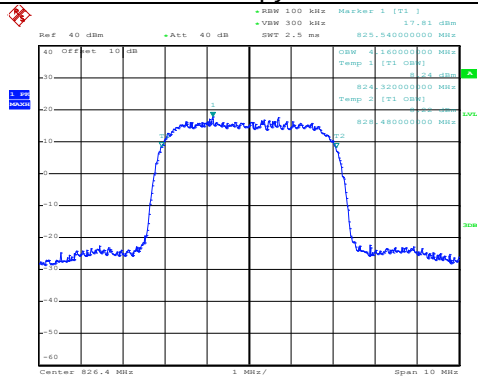

Date: 22.AUG.2018 13:38:23


26dB Emission Bandwidth

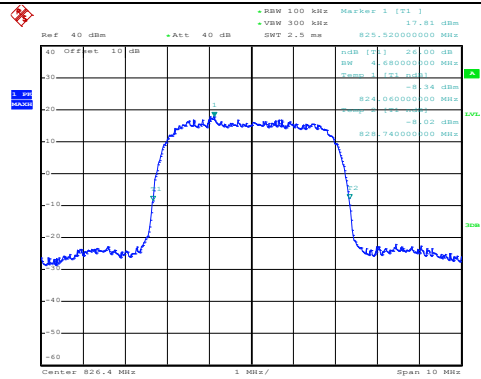


Date: 22.AUG.2018 13:38:05

Lowest channel

Lowest channel

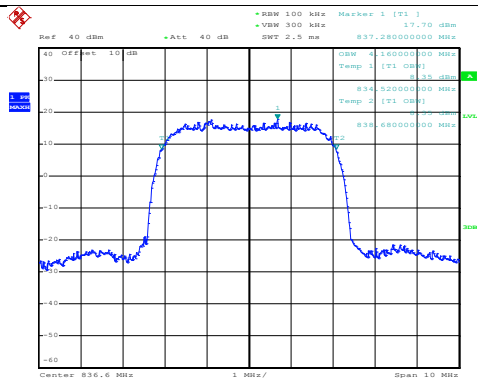


Date: 22.AUG.2018 13:38:57

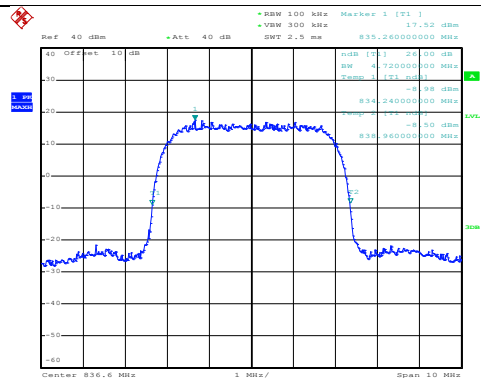


Date: 22.AUG.2018 13:39:15

Middle channel

Middle channel

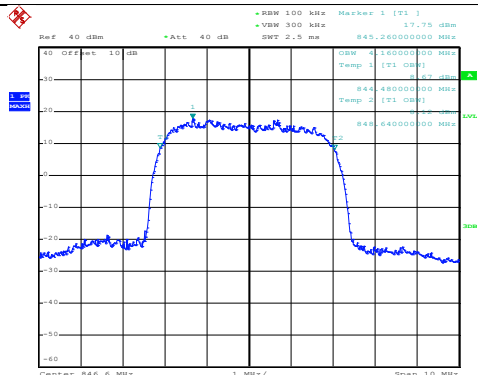


Date: 22.AUG.2018 13:39:58

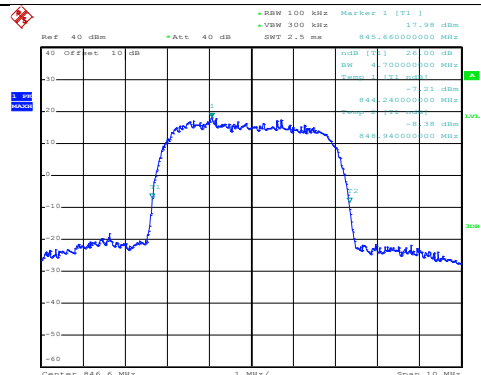

Date: 22.AUG.2018 13:39:42


Highest channel

Highest channel

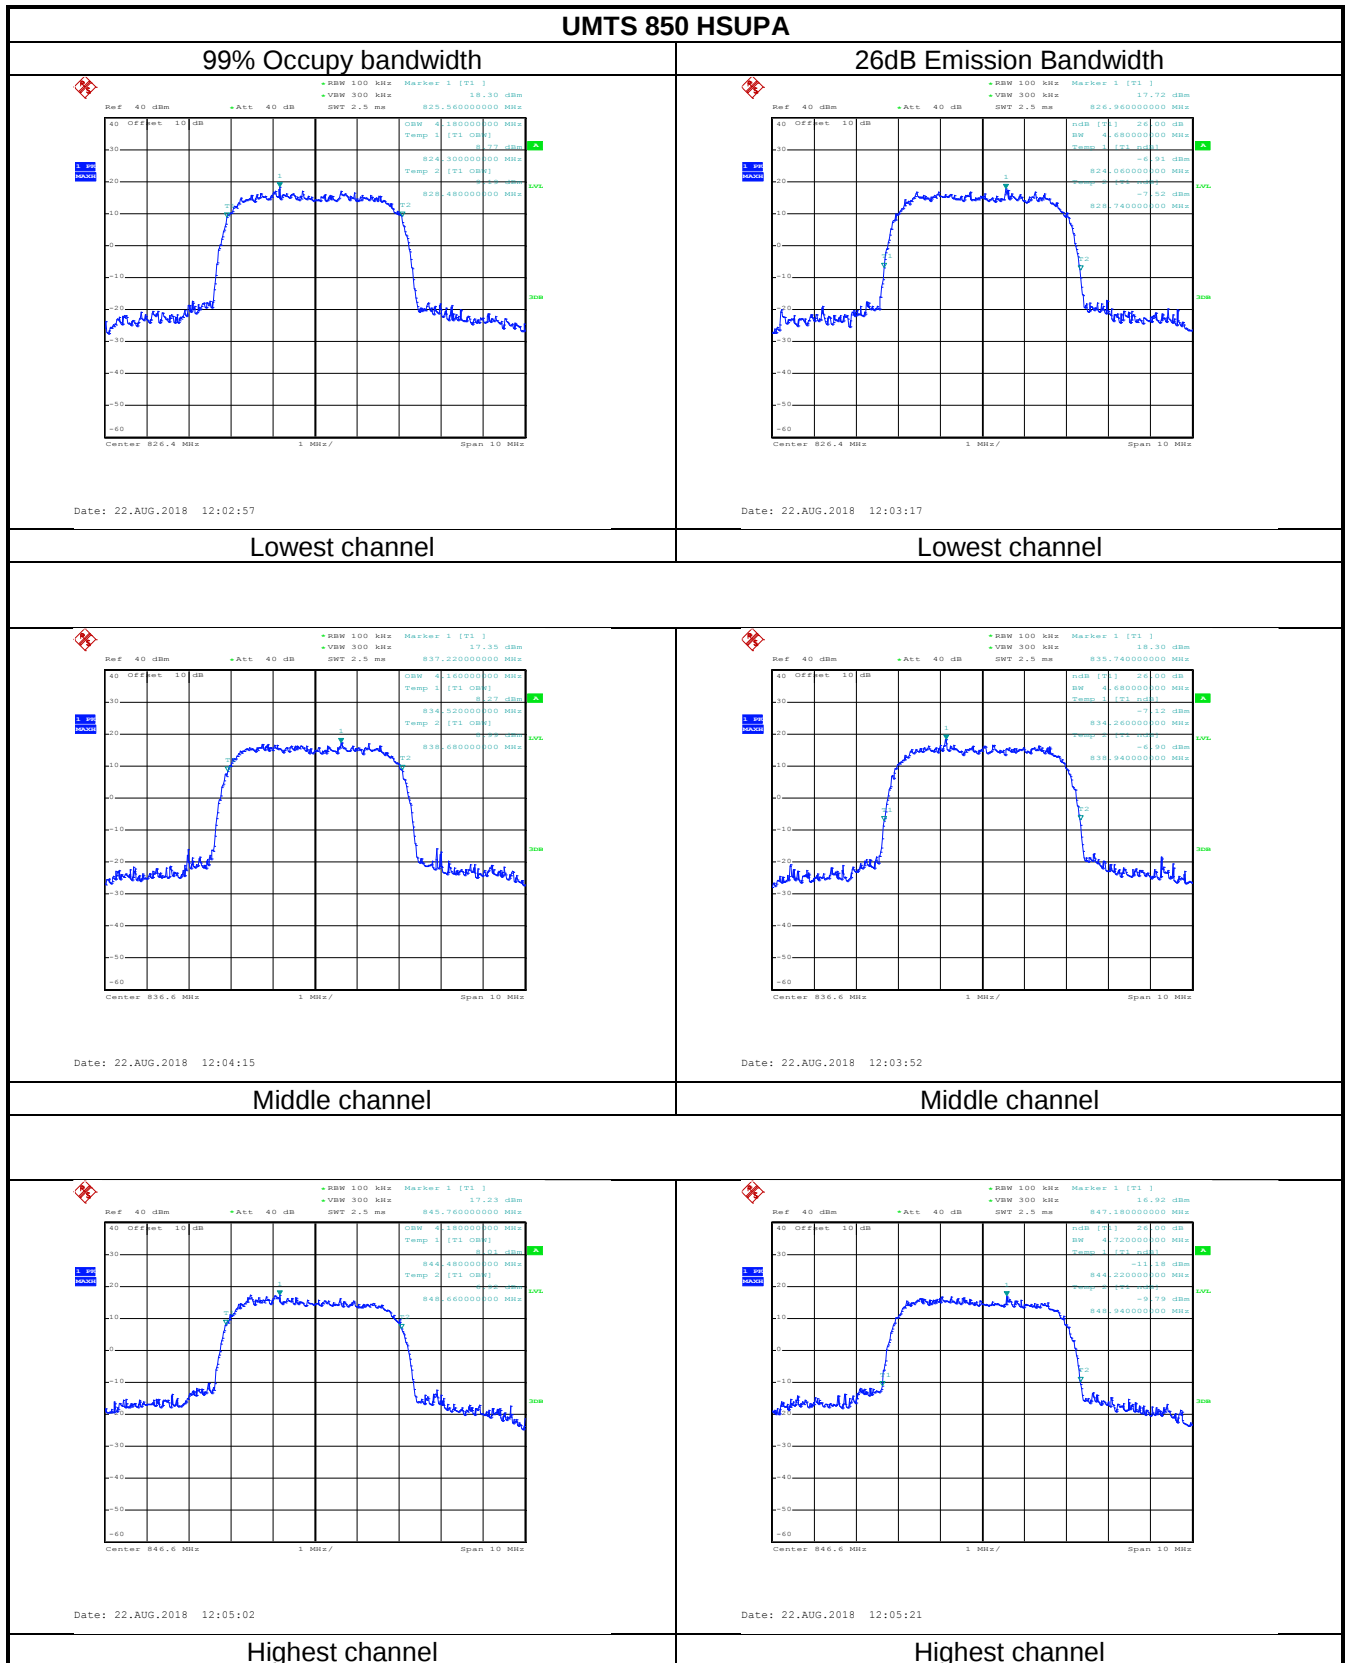


UMTS 1900 HSDPA

99% Occupancy bandwidth

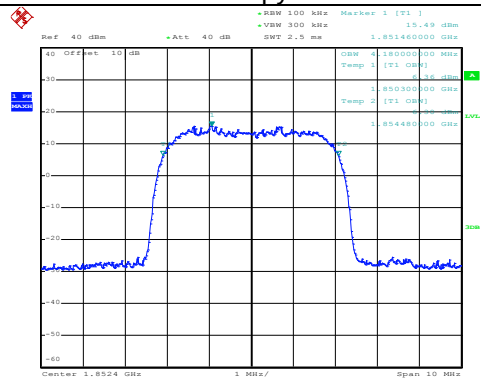

Date: 22.AUG.2018 11:53:48


26dB Emission Bandwidth

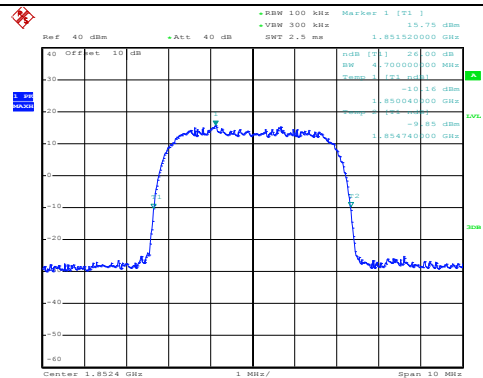


Date: 22.AUG.2018 11:54:23

Lowest channel

Lowest channel

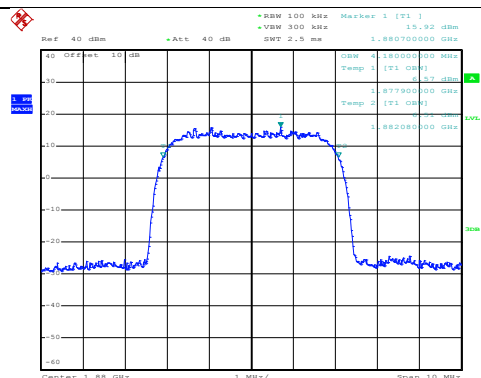


Date: 22.AUG.2018 11:55:32

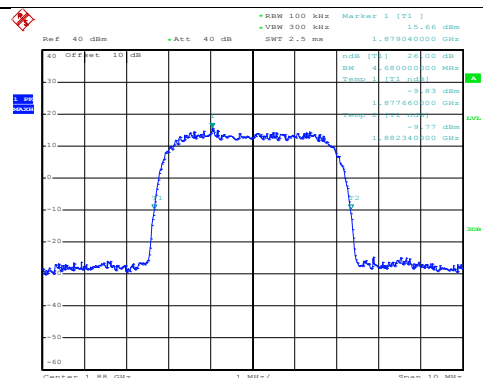


Date: 22.AUG.2018 11:55:03

Middle channel

Middle channel

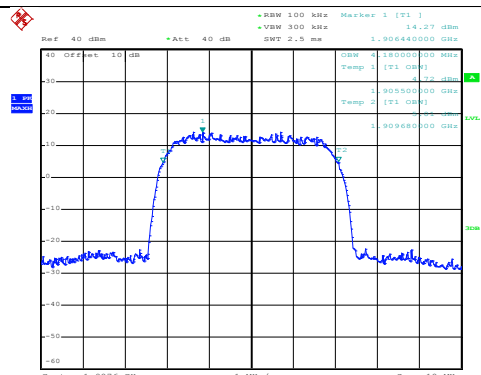


Date: 22.AUG.2018 11:55:58

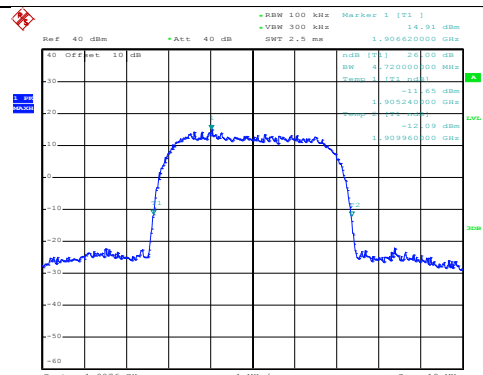


Date: 22.AUG.2018 11:56:16

Highest channel


Highest channel

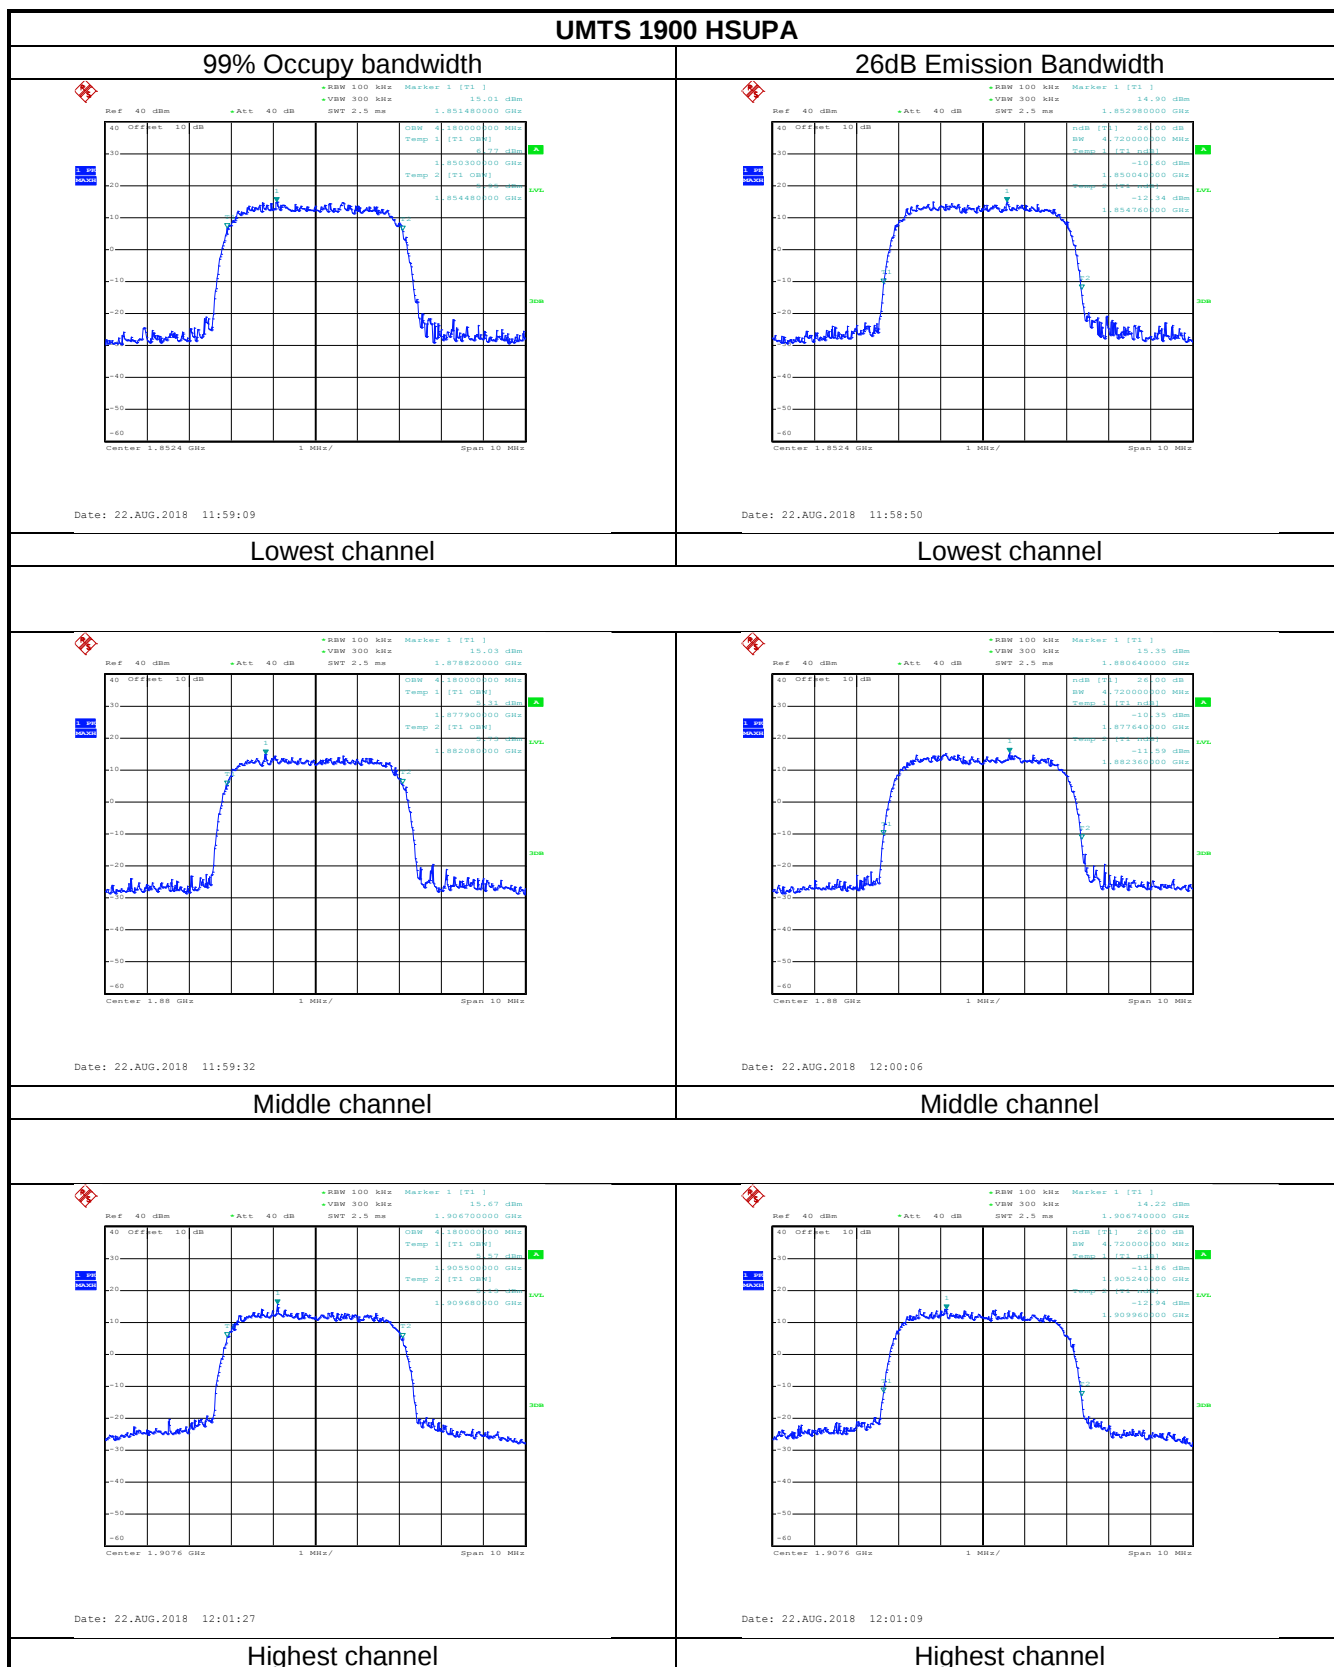

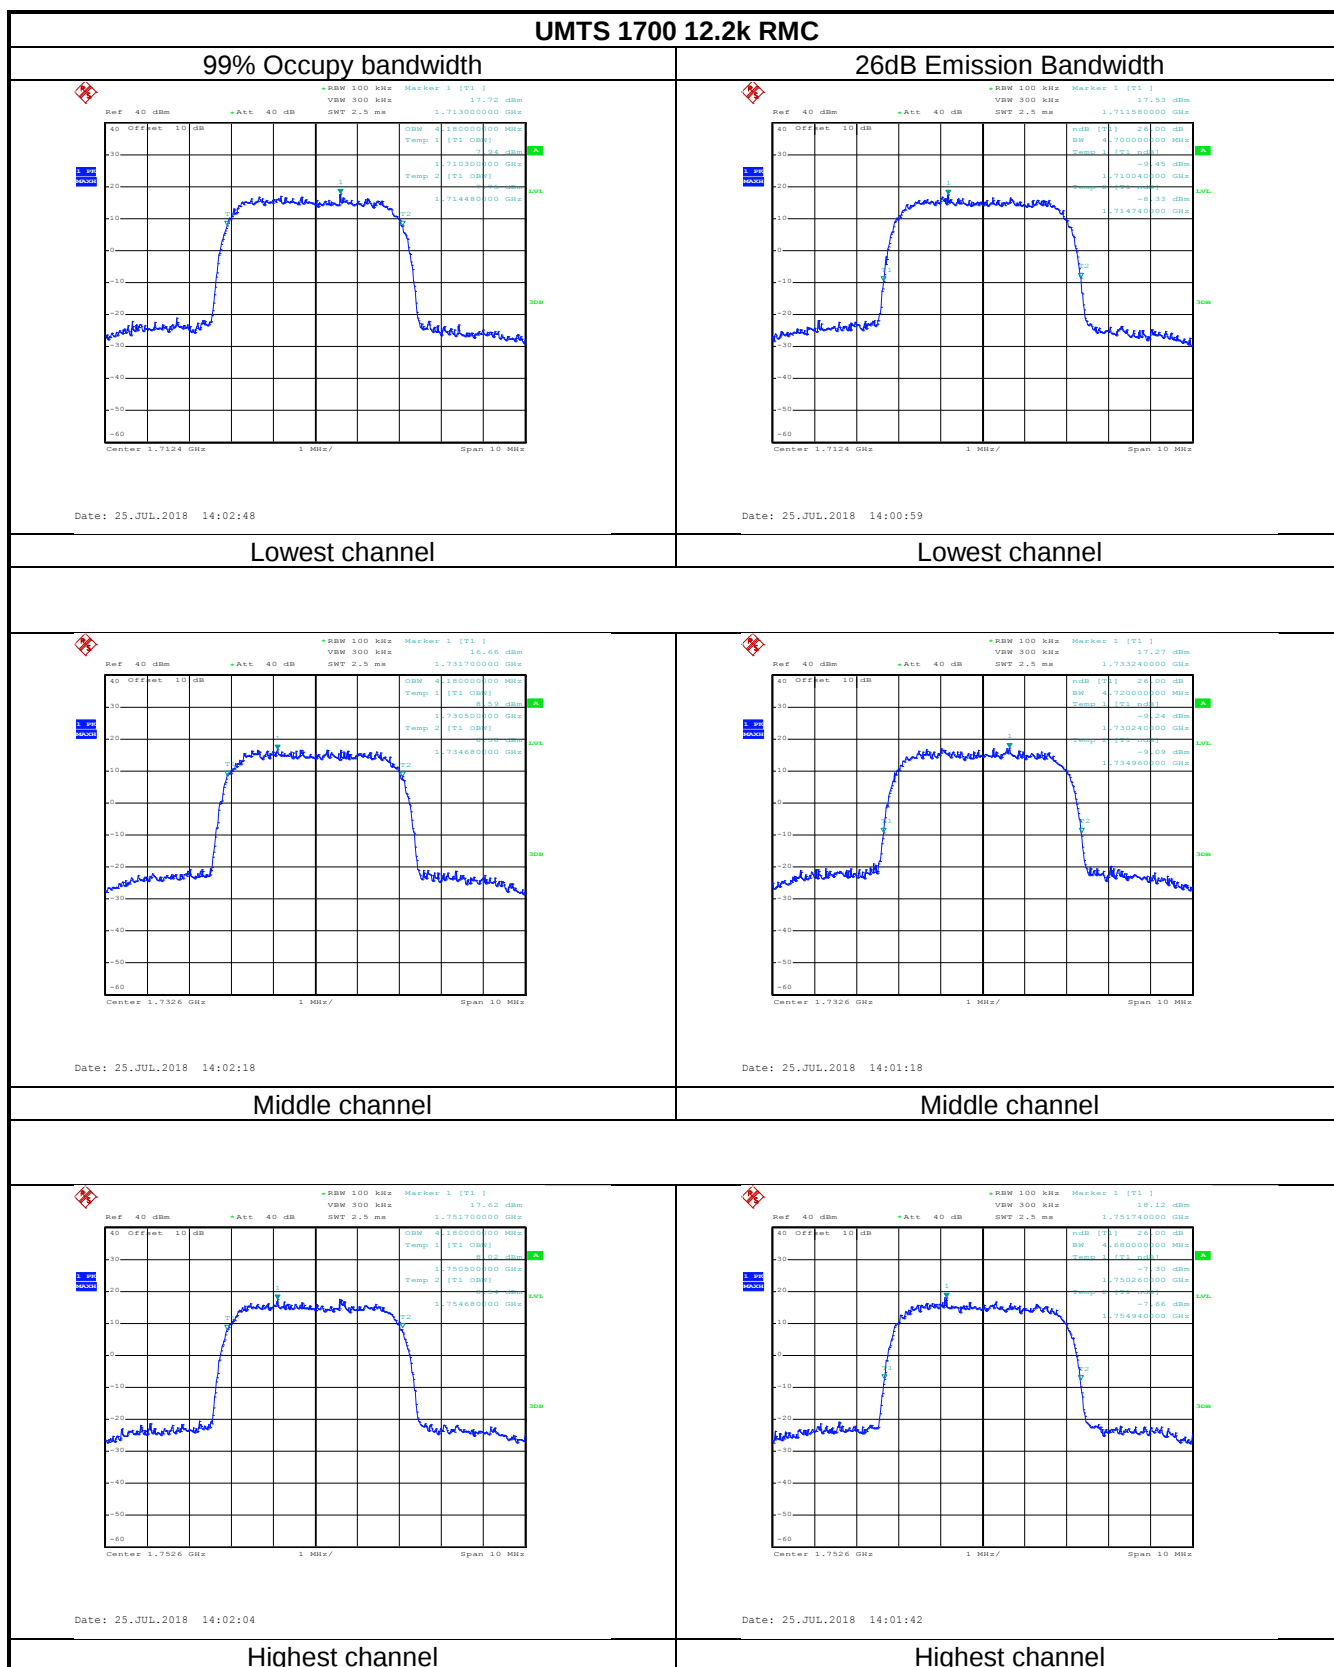


UMTS 1700 HSDPA

99% Occupy bandwidth

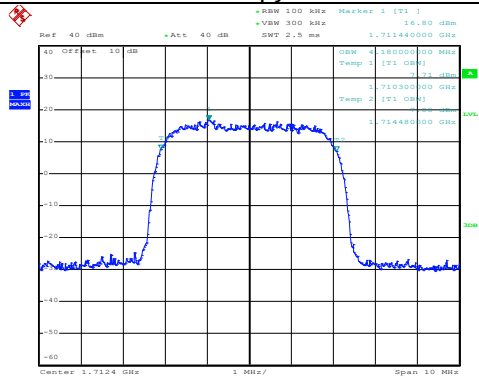

Date: 22.AUG.2018 13:40:47


26dB Emission Bandwidth

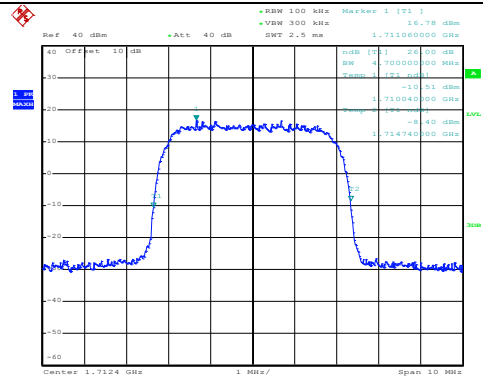


Date: 22.AUG.2018 13:41:08

Lowest channel

Lowest channel

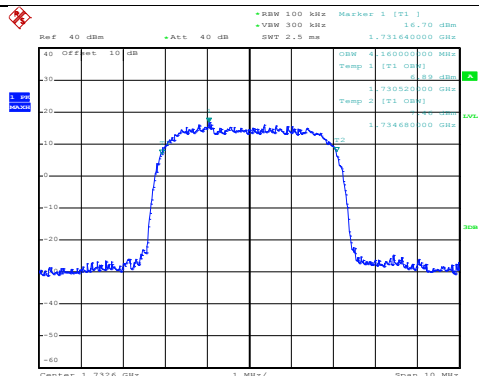


Date: 22.AUG.2018 13:41:53

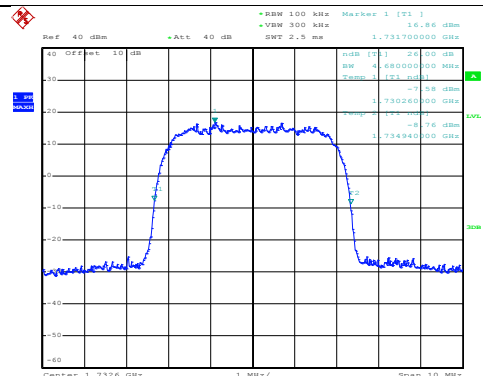


Date: 22.AUG.2018 13:41:40

Middle channel

Middle channel

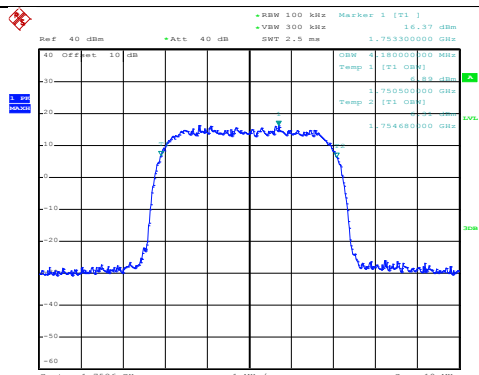

Date: 22.AUG.2018 13:42:18

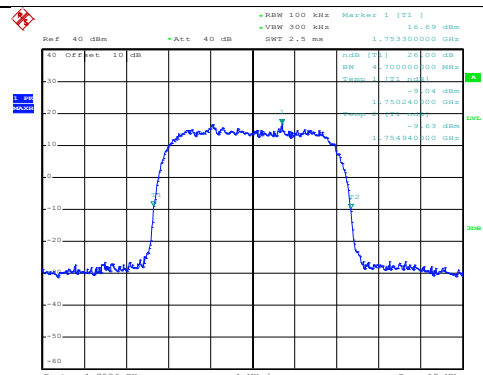


Date: 22.AUG.2018 13:42:36

Highest channel

Highest channel

UMTS 1700 HSUPA


99% Occupy bandwidth

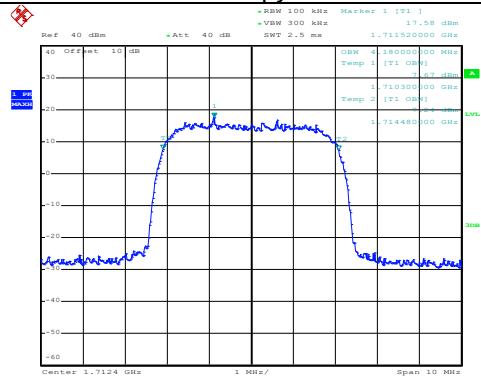

Date: 22.AUG.2018 13:46:36

Lowest channel


26dB Emission Bandwidth

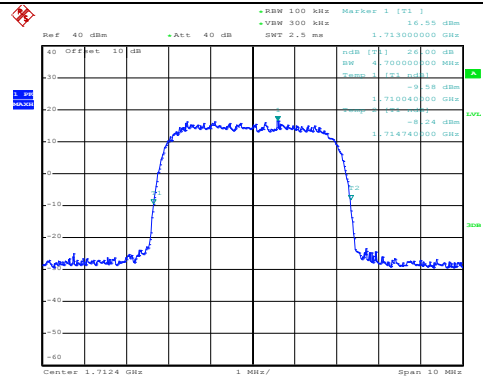

Date: 22.AUG.2018 13:45:56

Lowest channel


Middle channel

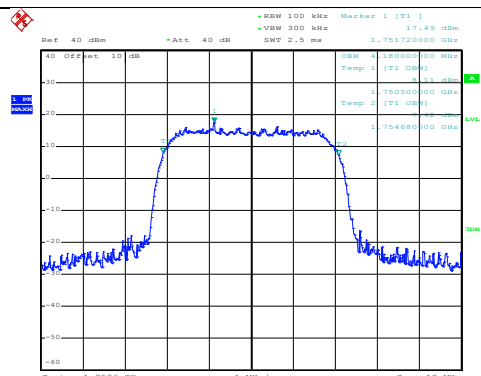

Date: 22.AUG.2018 13:45:06

Middle channel


Middle channel

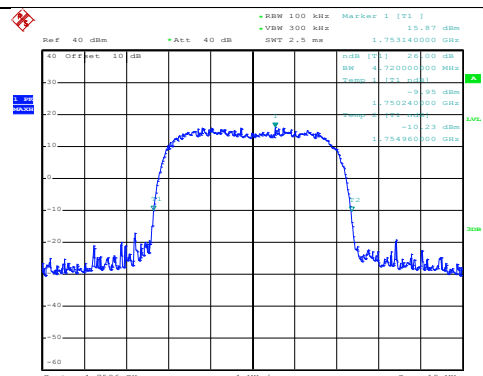

Date: 22.AUG.2018 13:43:32

Highest channel


6.3 Peak-to-Average Power Ratio



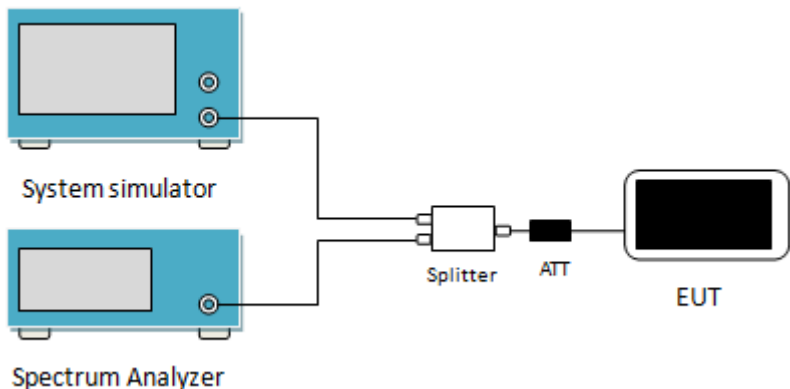
Test Requirement:	FCC part 24.232(d), FCC part 27.50(d)(5)
Test Method	ANSI/TIA-603-D 2010
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	 The diagram shows a test setup for measuring the Peak-to-Average Power Ratio (PAR). It includes a System simulator, a Spectrum Analyzer, a Splitter, an ATT (Attenuator), and the EUT (Equipment Under Test). The System simulator and Spectrum Analyzer are connected to the Splitter. The Splitter is connected to the ATT, which is then connected to the EUT.
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, $RBW \geq OBW$, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Modulation	Test channel	PAPR
GSM 850	190	0.13
PCS 1900	661	0.03
UMTS 850 RMC	4183	2.64
UMTS 1900 RMC	9400	2.80
UMTS1700 RMC	1413	2.68

Test plots as below:

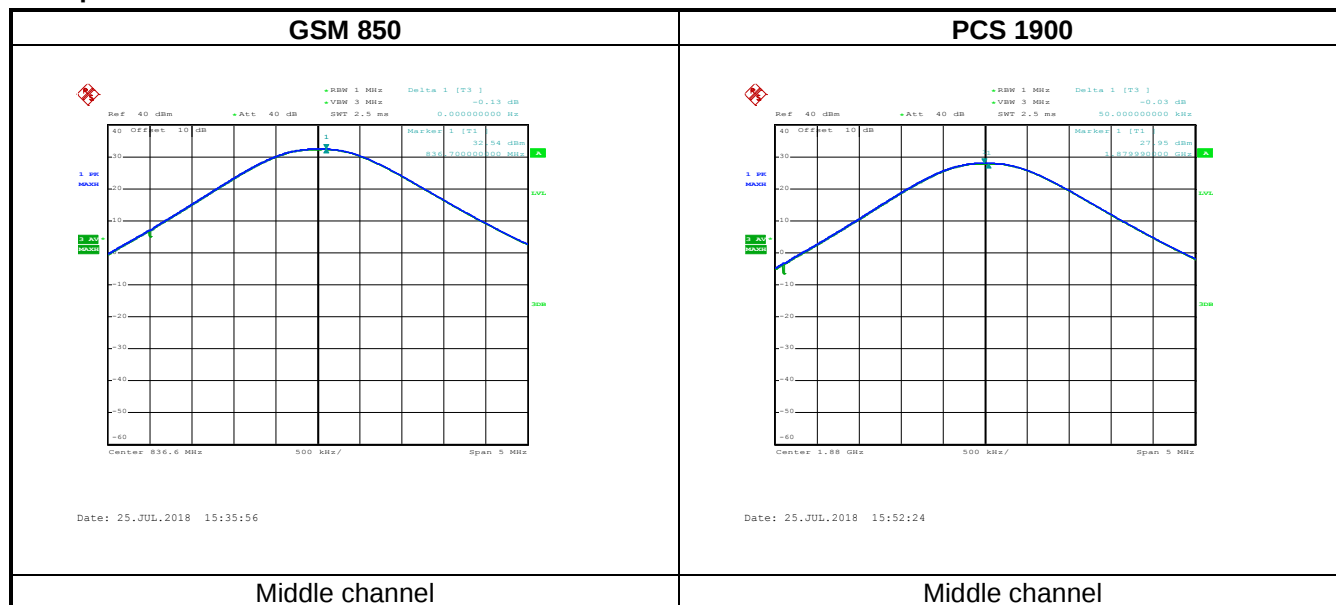


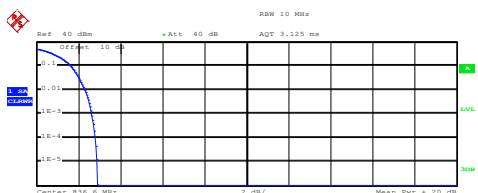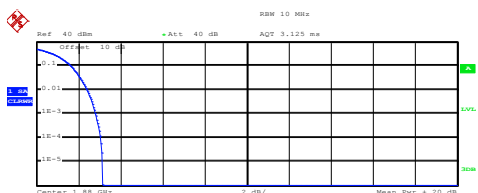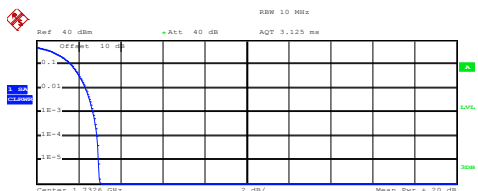UMTS 850 RMC	UMTS 1900 RMC
 Ref: 40 dBm +Att: 40 dB RBW: 10 MHz AQT: 3.125 ms Center: 836.0 MHz Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.86 dBm Peak: 25.75 dBm Crest: 2.89 dB 10 %: 1.64 dB 1 %: 2.32 dB .1 %: 2.64 dB .01 %: 2.80 dB Date: 25.JUL.2018 14:48:24	 Ref: 40 dBm +Att: 40 dB RBW: 10 MHz AQT: 3.125 ms Center: 1.86 GHz Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 20.48 dBm Peak: 23.63 dBm Crest: 3.15 dB 10 %: 1.64 dB 1 %: 2.40 dB .1 %: 2.80 dB .01 %: 3.04 dB Date: 25.JUL.2018 14:49:48
Middle channel	Middle channel
UMTS1700 RMC	
 Ref: 40 dBm +Att: 40 dB RBW: 10 MHz AQT: 3.125 ms Center: 1.7326 GHz Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 22.39 dBm Peak: 25.40 dBm Crest: 3.01 dB 10 %: 1.64 dB 1 %: 2.32 dB .1 %: 2.68 dB .01 %: 2.88 dB Date: 25.JUL.2018 14:49:15	
Middle channel	


6.4 Modulation Characteristic


According to FCC § 2.1047(d), Part 22H & 24E & 27L there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


6.5 Out of band emission at antenna terminals

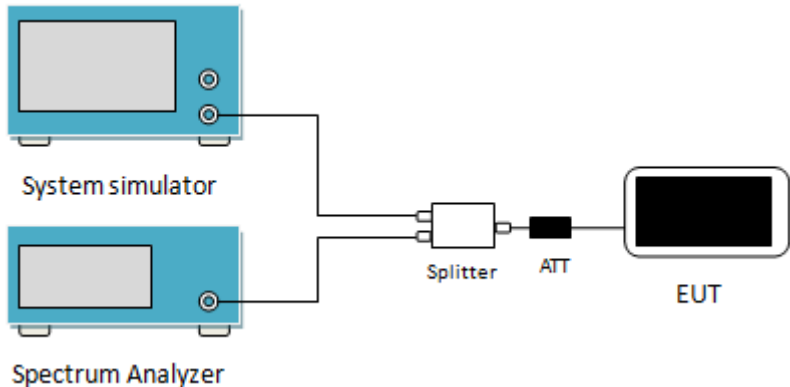
Test Requirement:	FCC part 22.917(a), FCC part 24.238(a), FCC Part 27.53 (h)
Test Method:	ANSI/TIA-603-D 2010
Limit:	-13dBm
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a 'Splitter' (a white rectangular unit). The Splitter has two output ports. One output port is connected to an 'ATT' (Attenuator, a small black rectangular unit). The other output port is connected to the 'EUT' (Equipment Under Test, a black rectangular unit with a screen).
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follows (Spurious emission):

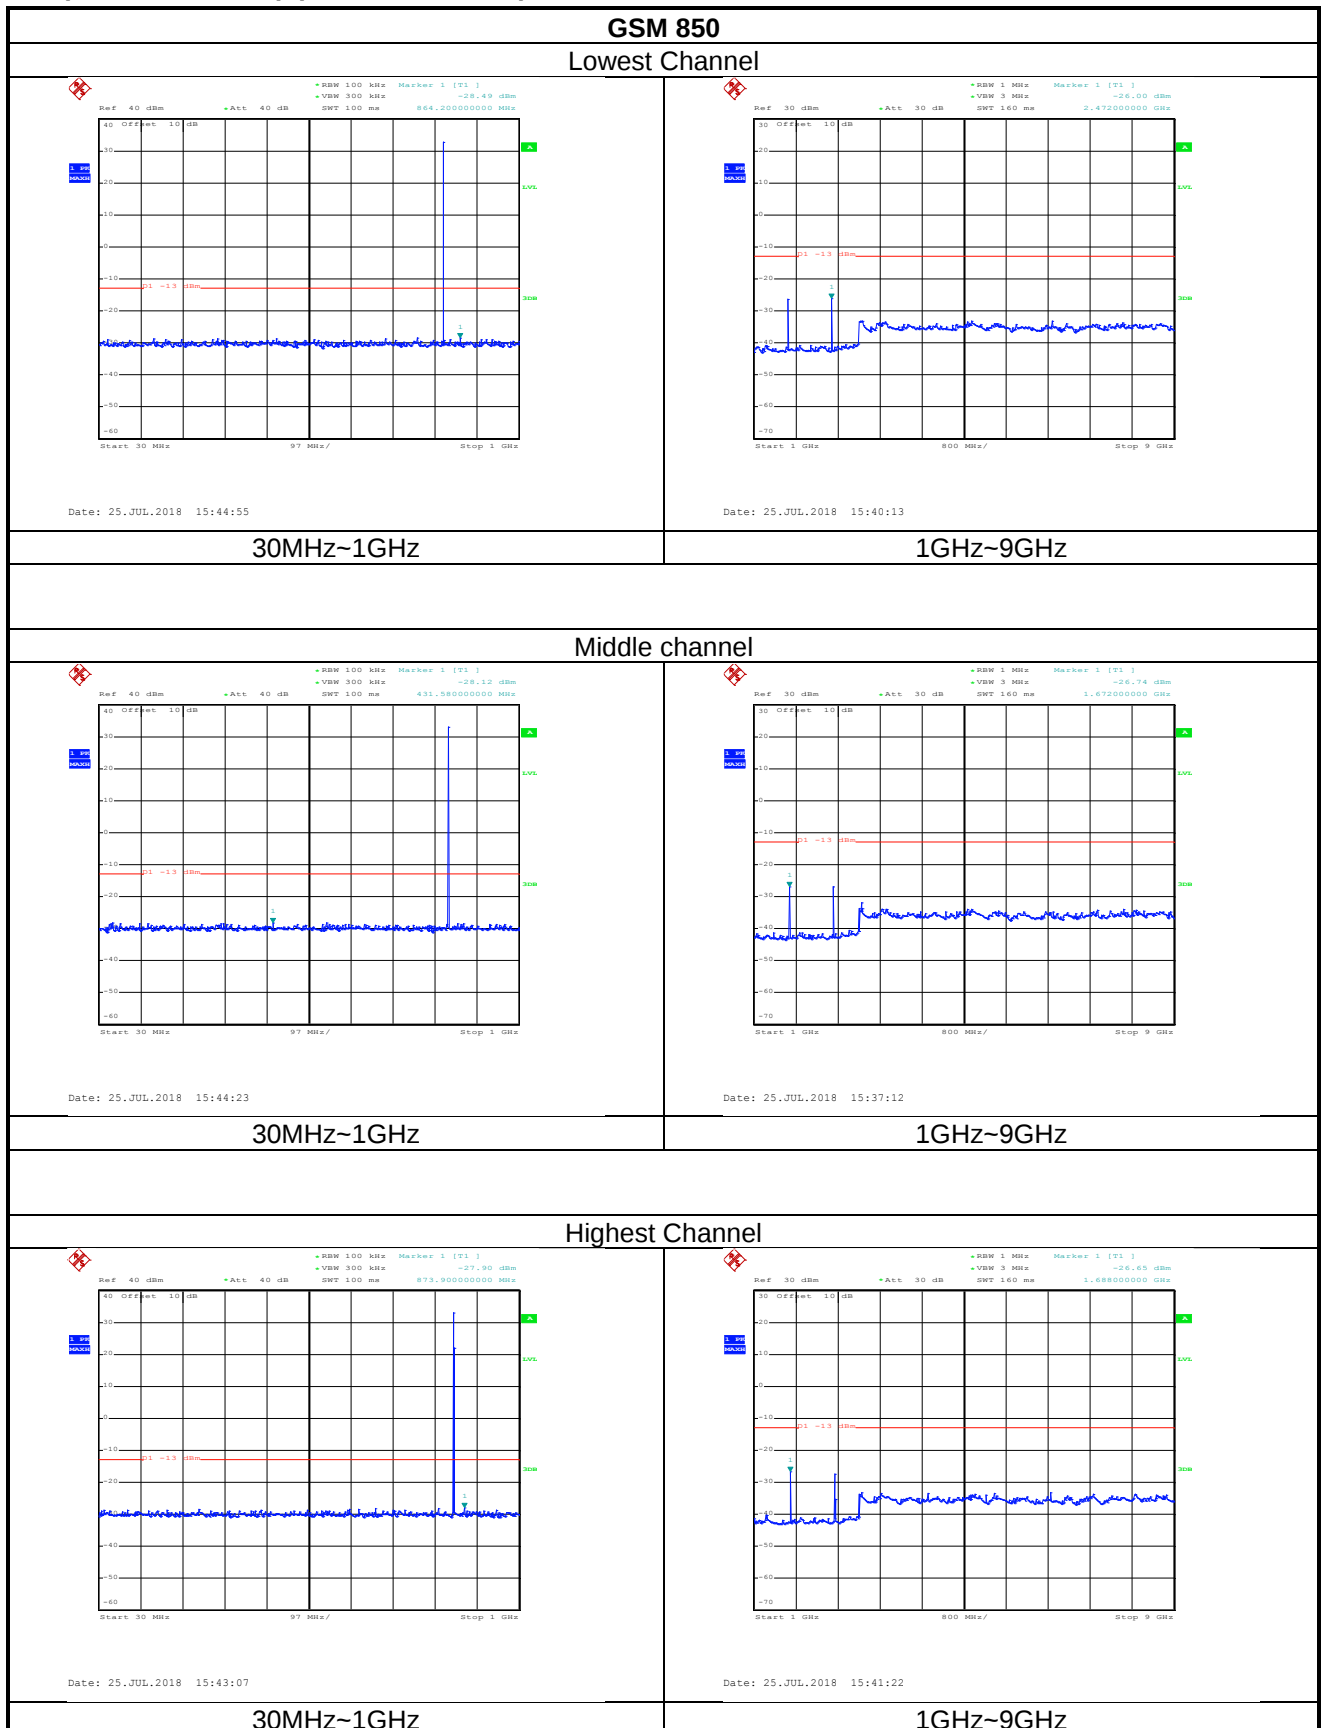

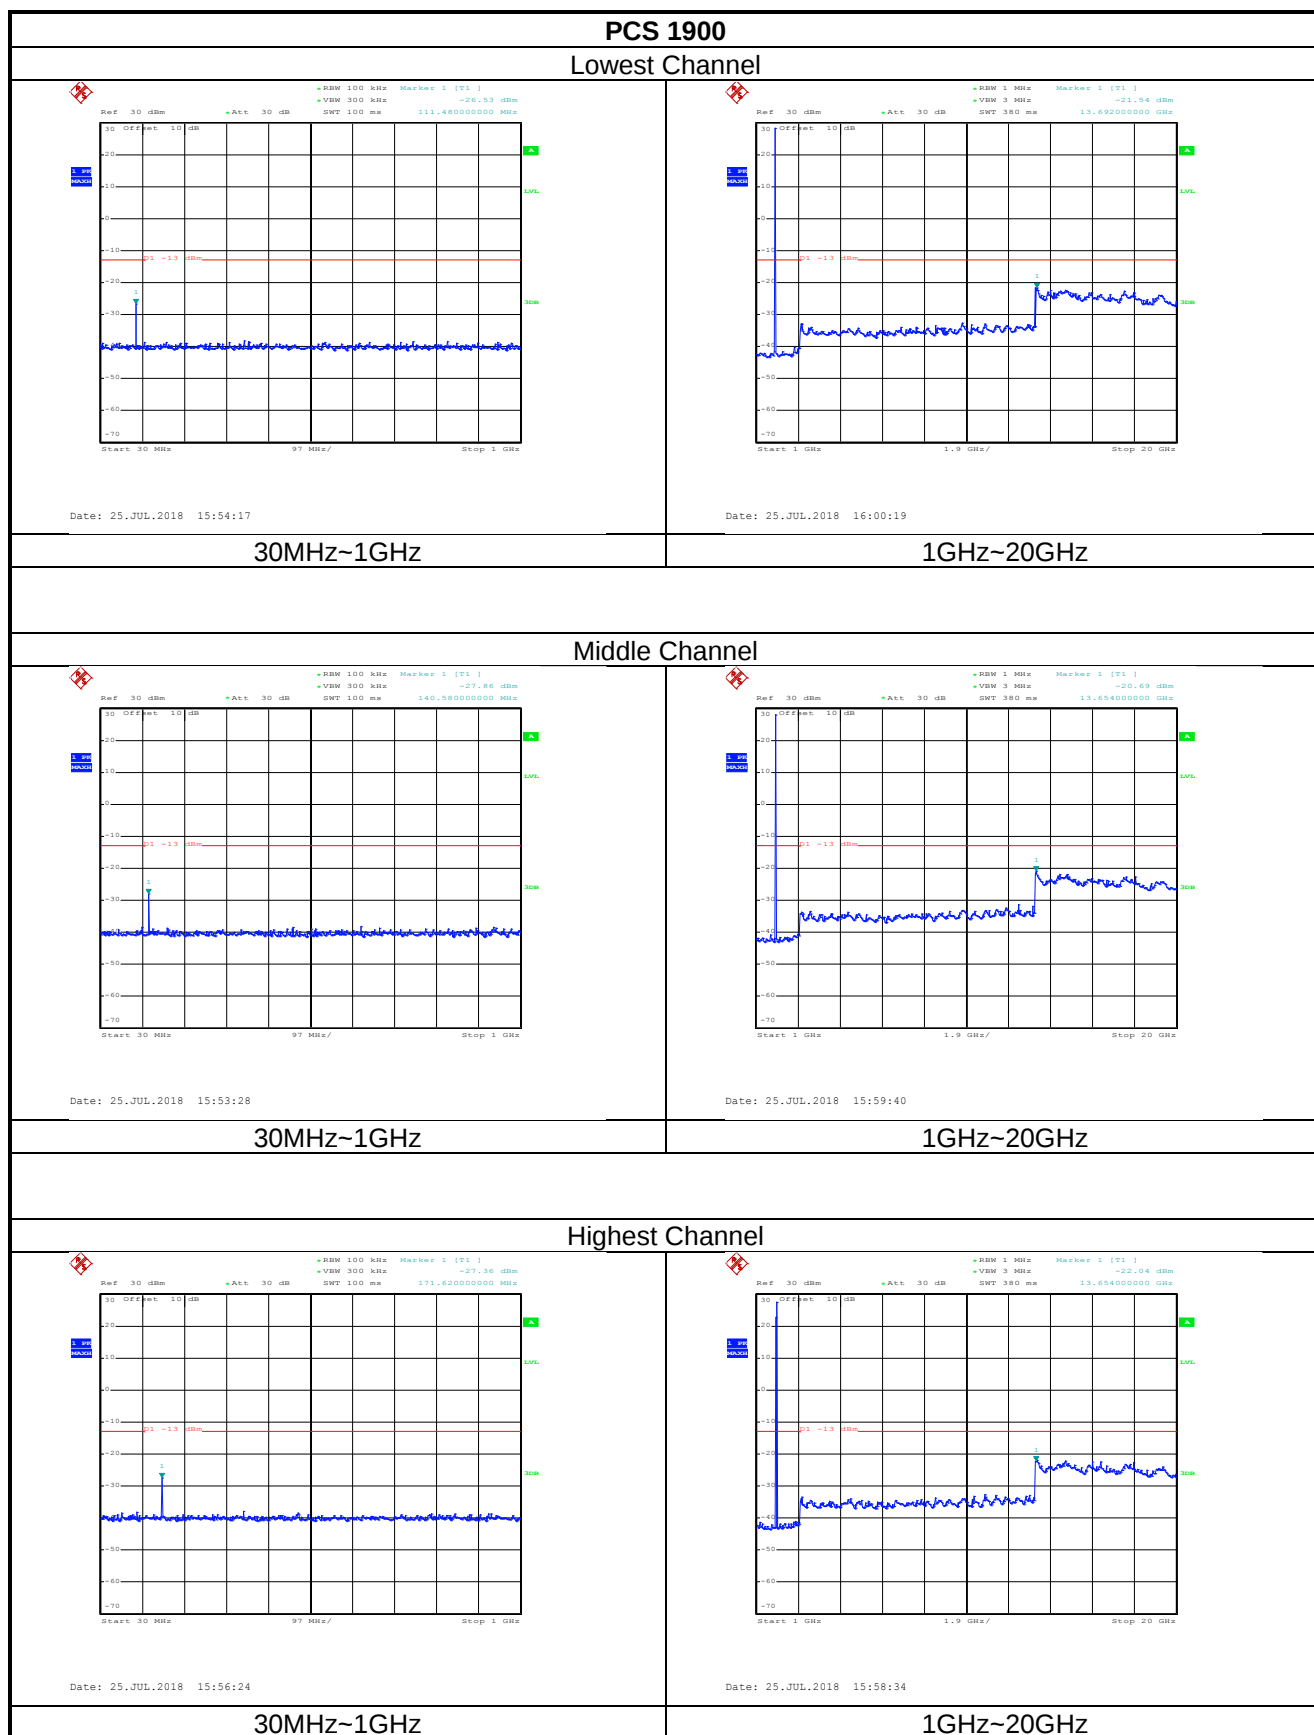


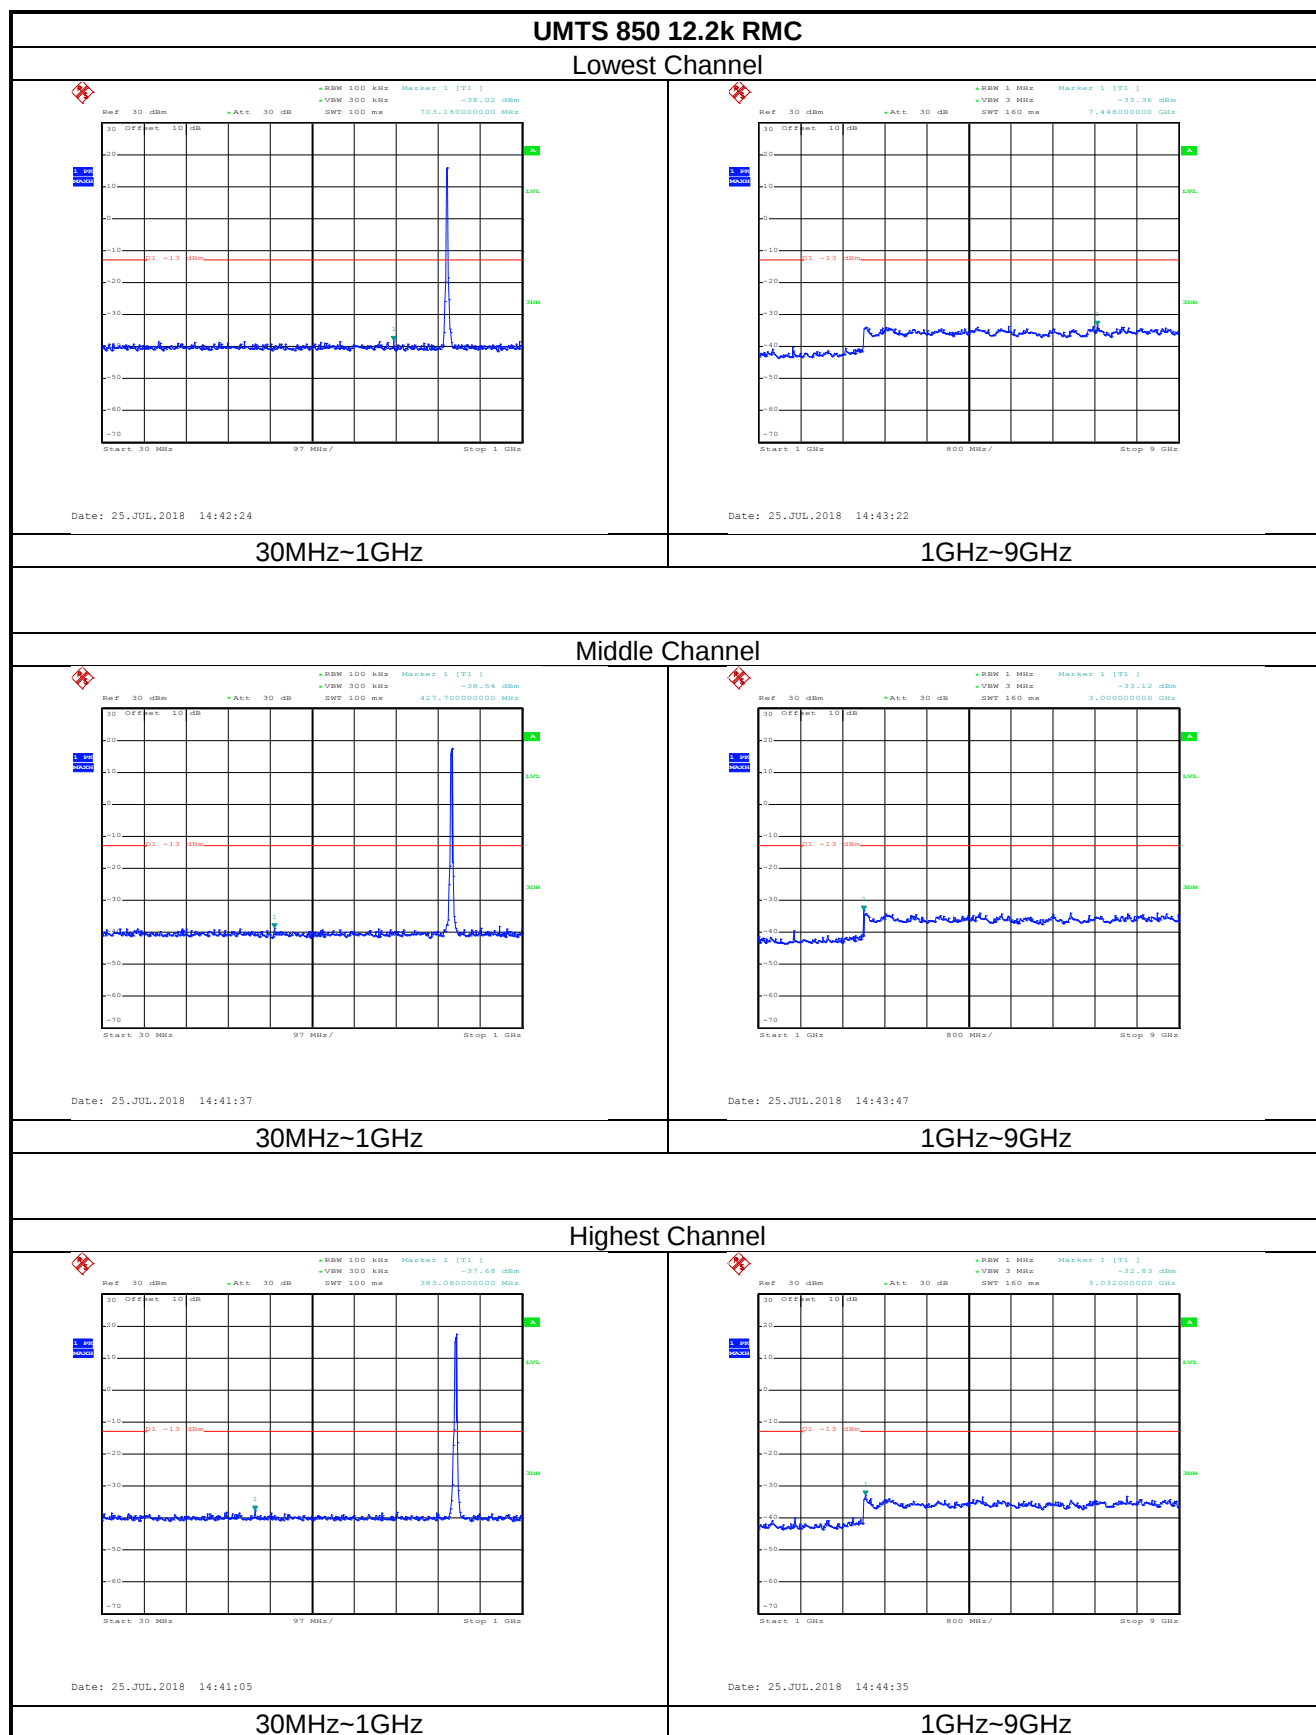

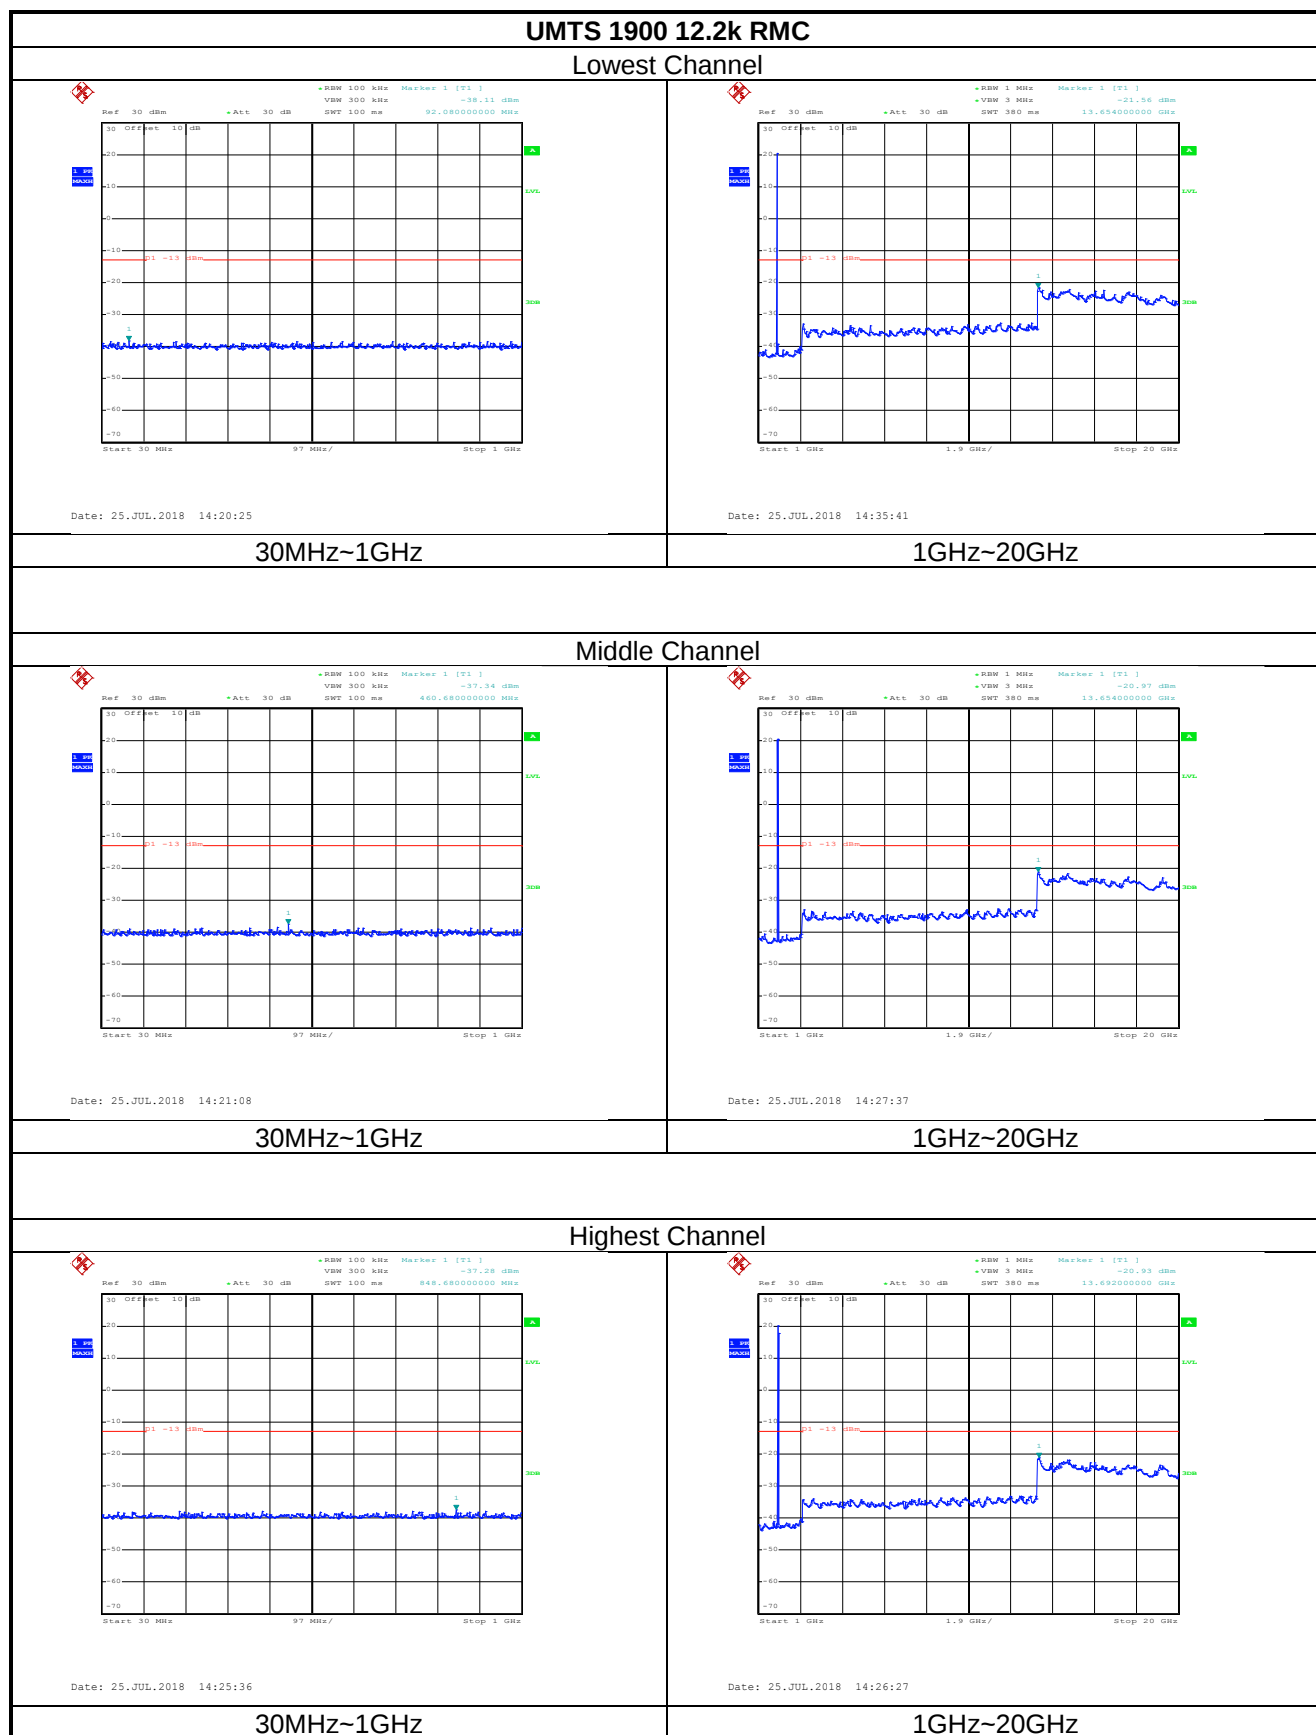


UMTS 1700 12.2k RMC

Lowest Channel

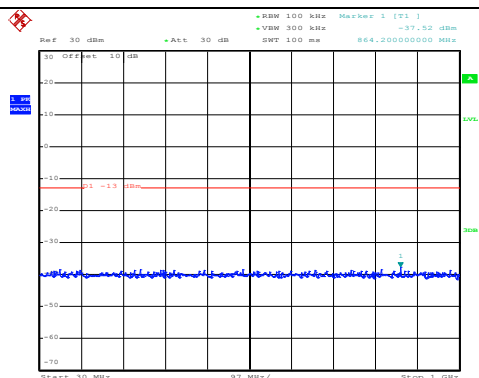

Date: 25.JUL.2018 14:39:34


30MHz~1GHz

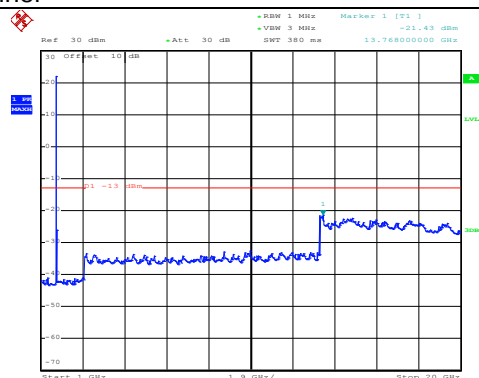

Date: 25.JUL.2018 14:29:39


1GHz~20GHz

Middle Channel

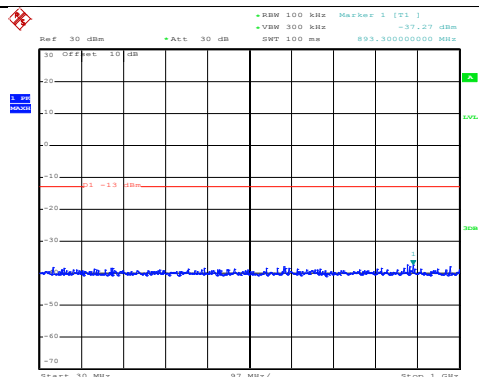

Date: 25.JUL.2018 14:37:59


30MHz~1GHz

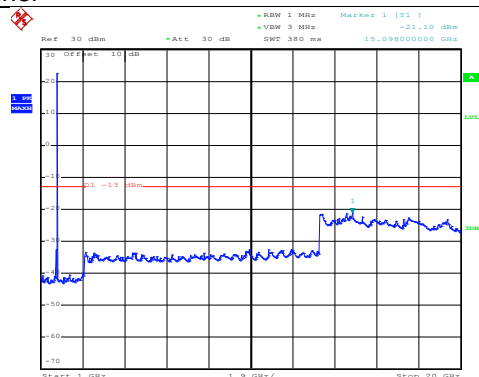

Date: 25.JUL.2018 14:30:56


1GHz~20GHz

Highest Channel

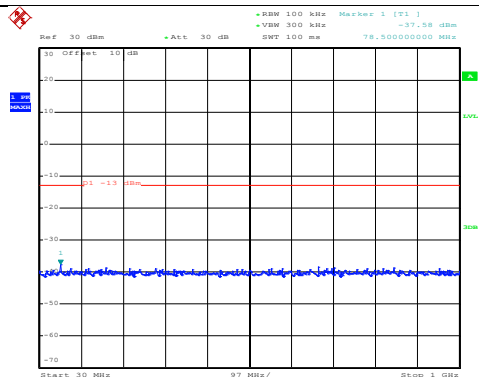

Date: 25.JUL.2018 14:36:39


30MHz~1GHz

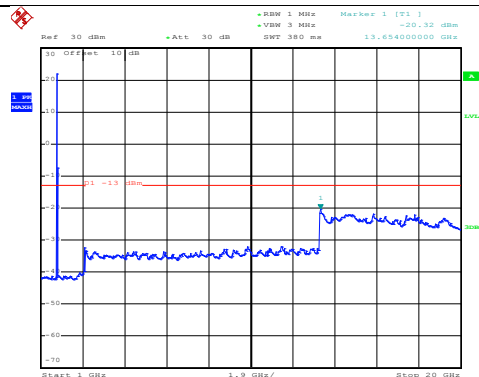


Date: 25.JUL.2018 14:34:46

1GHz~20GHz

Band edge emission:

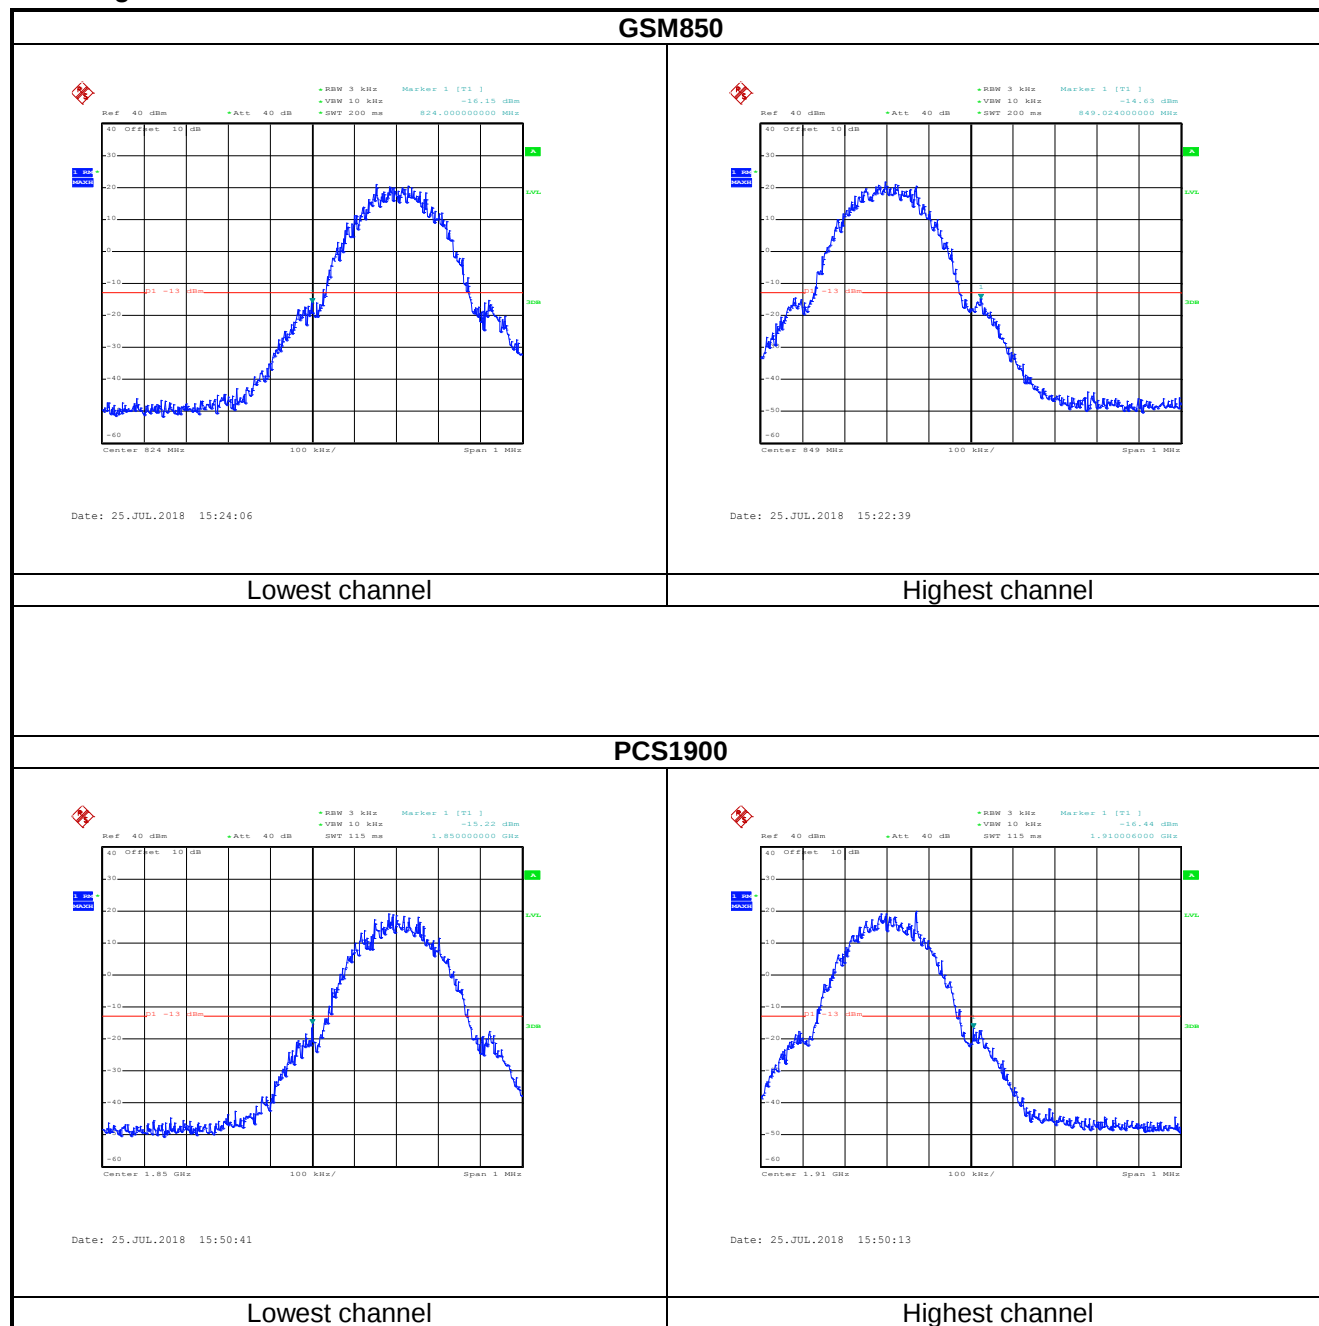


UMTS 850 RMC 12.2kbps

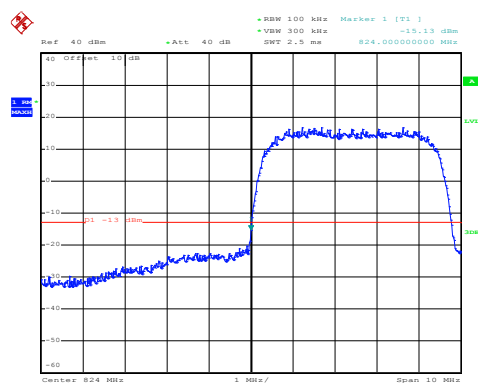

Date: 25.JUL.2018 16:18:34


Lowest channel

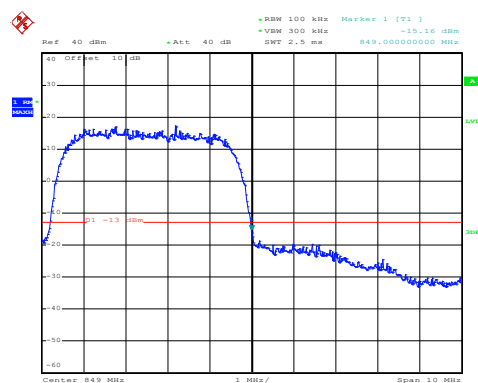

Date: 25.JUL.2018 16:19:00


Highest channel

UMTS 1900 RMC 12.2kbps

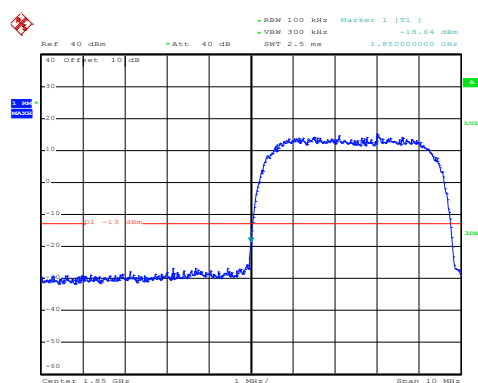


Date: 25.JUL.2018 16:15:50

Lowest channel


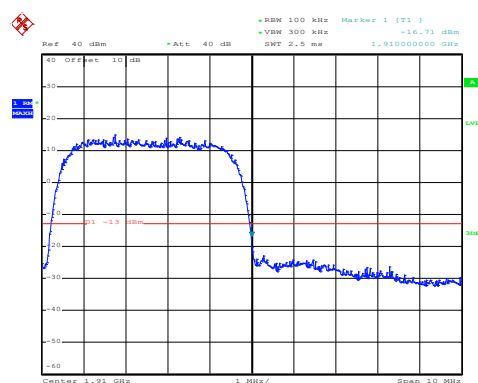


Date: 25.JUL.2018 16:16:30

Highest channel

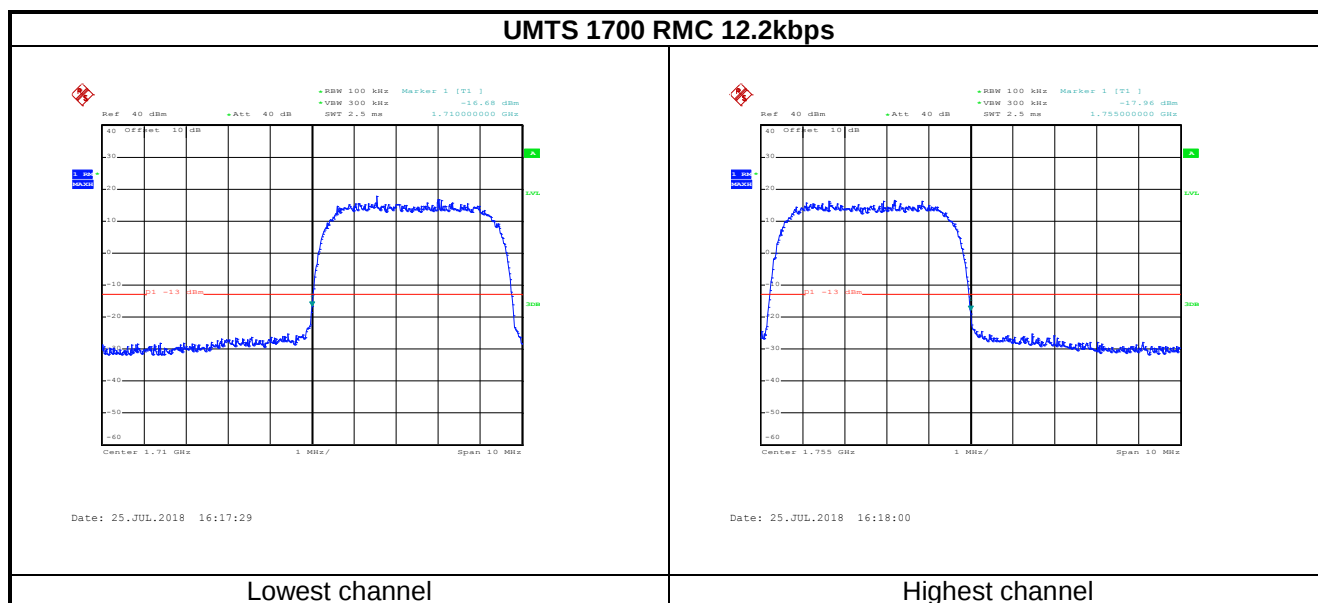

6.6 ERP, EIRP Measurement

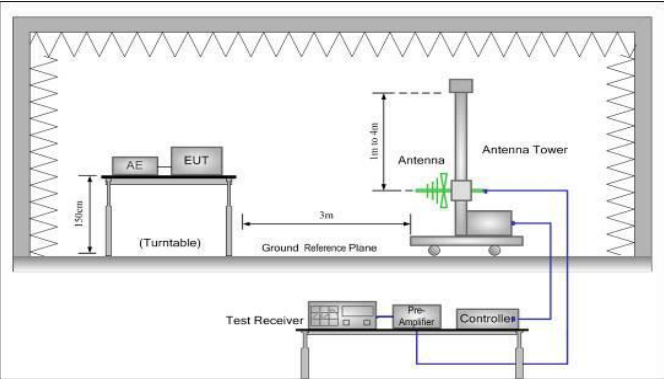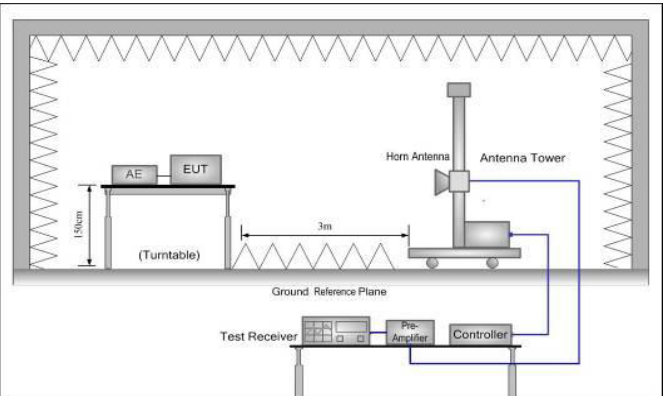Test Requirement:	FCC part 22.913(a)(2), FCC part 24.232(c), FCC part 27.50(d)(4)
Test Method:	ANSI/TIA-603-D 2010
Limit:	GSM850 7W: ERP, PCS1900 2W: EIRP UMTS 850: 7W ERP, UMTS1900: 2W EIRP, UMTS1700: 1W EIRP
Test setup:	Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated. 3. ERP in frequency band 824.2 –848.80MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows: $\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$ 4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows: $\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$ 5. The worst case was relating to the conducted output power.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed



Measurement Data (worst case):

EUT mode	Channel	EUT Pol.	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	ERP(dBm)	Limit (dBm)	Result
GSM850	128	H	V	-6.75	31.06	0.5	23.81	38.45	Pass
			H	-17.21	31.06	0.5	13.35		
	190	H	V	-6.79	31.06	0.5	23.77		
			H	-17.17	31.06	0.5	13.39		
	251	H	V	-6.68	31.06	0.5	23.88		
			H	-17.23	31.06	0.5	13.33		
GPRS850	128	H	V	-6.81	31.06	0.5	23.75		
			H	-17.53	31.06	0.5	13.03		
	190	H	V	-6.97	31.06	0.5	23.59		
			H	-17.52	31.06	0.5	13.04		
	251	H	V	-6.88	31.06	0.5	23.68		
			H	-17.42	31.06	0.5	13.14		
UMTS 850 12.2k RMC	4132	H	V	-11.22	30.91	0.5	19.19		
			H	-19.21	30.91	0.5	11.20		
	4183	H	V	-11.24	30.91	0.5	19.17		
			H	-19.25	30.91	0.5	11.16		
	4233	H	V	-11.26	30.91	0.5	19.15		
			H	-19.27	30.91	0.5	11.14		
UMTS 850 HSDPA	4132	H	V	-11.29	30.91	0.5	19.12		
			H	-19.24	30.91	0.5	11.17		
	4183	H	V	-11.36	30.91	0.5	19.05		
			H	-19.27	30.91	0.5	11.14		
	4233	H	V	-11.35	30.91	0.5	19.06		
			H	-19.32	30.91	0.5	11.09		
UMTS 850 HSUPA	4132	H	V	-11.26	30.91	0.5	19.15		
			H	-19.28	30.91	0.5	11.13		
	4183	H	V	-11.30	30.91	0.5	19.11		
			H	-19.32	30.91	0.5	11.09		
	4233	H	V	-11.31	30.91	0.5	19.10		
			H	-19.34	30.91	0.5	11.07		
EUT mode	Channel	EUT Pol.	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP(dBm)	Limit (dBm)	Result
PCS1900	512	H	V	-19.06	37.22	0.8	17.36	33	Pass
			H	-18.85	37.22	0.8	17.57		
	661	H	V	-19.12	37.22	0.8	17.30		
			H	-18.95	37.22	0.8	17.47		
	810	H	V	-19.16	37.22	0.8	17.26		
			H	-18.96	37.22	0.8	17.46		

GPRS1900	512	H	V	-20.03	37.22	0.8	16.39		
			H	-19.22	37.22	0.8	17.20		
	661	H	V	-19.58	37.22	0.8	16.81		
			H	-19.05	37.22	0.8	17.37		
	810	H	V	-19.26	37.22	0.8	17.16		
			H	-18.99	37.22	0.8	17.43		
UMTS 1900 12.2k RMC	9262	H	V	-25.76	37.22	0.8	10.66		
			H	-24.14	37.22	0.8	12.28		
	9400	H	V	-25.86	37.22	0.8	10.56		
			H	-24.32	37.22	0.8	12.10		
	9538	H	V	-25.88	37.22	0.8	10.54		
			H	-24.39	37.22	0.8	12.03		
UMTS 1900 HSDPA	9262	H	V	-25.81	37.22	0.8	10.61		
			H	-24.17	37.22	0.8	12.25		
	9400	H	V	-25.98	37.22	0.8	10.44		
			H	-24.26	37.22	0.8	12.16		
	9538	H	V	-25.93	37.22	0.8	10.49		
			H	-24.30	37.22	0.8	12.12		
UMTS 1900 HSUPA	9262	H	V	-25.77	37.22	0.8	10.65		
			H	-24.18	37.22	0.8	12.24		
	9400	H	V	-25.86	37.22	0.8	10.56		
			H	-24.39	37.22	0.8	12.03		
	9538	H	V	-25.84	37.22	0.8	10.58		
			H	-24.40	37.22	0.8	12.02		
EUT mode	Channel	EUT Pol.	Antenna Pol.	S.G. output (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	EIRP(dBm)	Limit (dBm)	Result
UMTS 1700 12.2k RMC	1312	H	V	-18.60	37.17	0.8	17.77	33.00	Pass
			H	-22.58	37.17	0.8	13.79		
	1413	H	V	-18.77	37.17	0.8	17.60		
			H	-22.65	37.17	0.8	13.72		
	1513	H	V	-18.79	37.17	0.8	17.58		
			H	-22.63	37.17	0.8	13.74		
UMTS 1700 HSDPA	1312	H	V	-18.62	37.17	0.8	17.75		
			H	-22.64	37.17	0.8	13.73		
	1413	H	V	-18.84	37.17	0.8	17.53		
			H	-22.79	37.17	0.8	13.58		
	1513	H	V	-18.86	37.17	0.8	17.51		
			H	-22.80	37.17	0.8	13.57		
UMTS 1700 HSUPA	1312	H	V	-18.61	37.17	0.8	17.76		
			H	-22.63	37.17	0.8	13.74		
	1413	H	V	-18.78	37.17	0.8	17.59		
			H	-22.75	37.17	0.8	13.62		

	1513	H	V	-18.79	37.17	0.8	17.58		
			H	-22.71	37.17	0.8	13.66		

6.7 Field strength of spurious radiation measurement

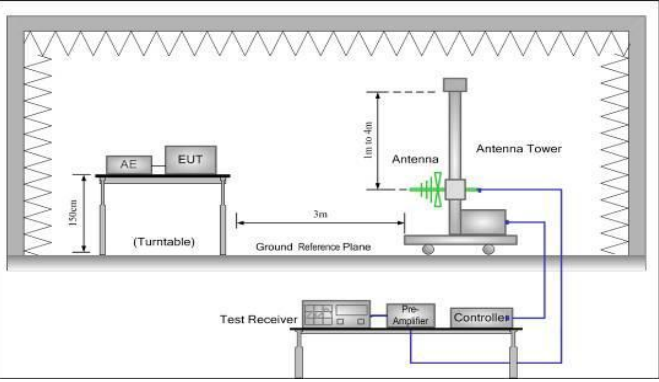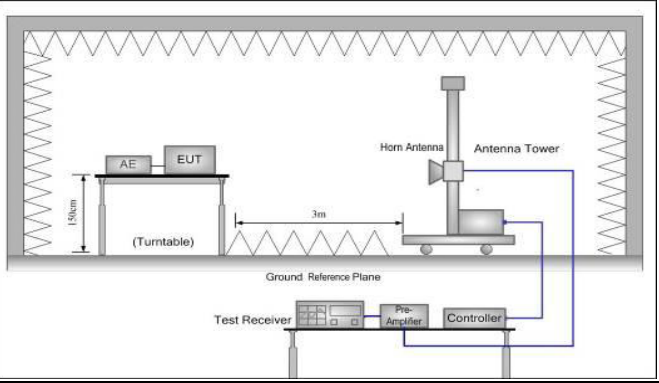Test Requirement:	FCC part 22.917(a), FCC part 24.238(a), FCC part 27.53(h)
Test Method:	ANSI/TIA-603-D 2010
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $ERP / EIRP = S.G. \text{ output (dBm) } + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed

Measurement Data (worst case):

GSM850							
Lowest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
1648.40	Vertical	-83.37	37.15	0.8	-47.02	-13.00	Pass
2472.60	V	-89.22	39.70	0.8	-50.32		
3296.80	V	-92.79	42.25	0.8	-51.34		
1648.40	Horizontal	-85.97	37.15	0.8	-49.62	-13.00	Pass
2472.60	H	-89.96	39.70	0.8	-51.06		
3296.80	H	-93.60	42.25	0.8	-52.15		
Middle channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
1673.20	Vertical	-83.60	37.16	0.8	-47.24	-13.00	Pass
2509.80	V	-87.06	39.88	0.8	-47.98		
3346.40	V	-93.02	42.31	0.8	-51.51		
1673.20	Horizontal	-86.49	37.16	0.8	-50.13	-13.00	Pass
2509.80	H	-87.83	39.88	0.8	-48.75		
3346.40	H	-92.88	42.31	0.8	-51.37		
Highest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
1697.60	Vertical	-85.19	37.17	0.8	-48.82	-13.00	Pass
2546.40	V	-87.44	40.03	0.8	-48.21		
3395.20	V	-92.45	42.37	0.8	-50.88		
1697.60	Horizontal	-87.38	37.17	0.8	-51.01	-13.00	Pass
2546.40	H	-86.70	40.03	0.8	-47.47		
3395.20	H	-93.26	42.37	0.8	-51.69		
Remark:							
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.							

PCS1900							
Lowest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3700.40	Vertical	-92.94	42.58	0.8	-51.16	-13.00	Pass
5550.60	V	-91.07	47.17	0.8	-44.70		
3700.40	Horizontal	-92.48	42.58	0.8	-50.70	-13.00	Pass
5550.60	H	-90.76	47.17	0.8	-44.39		
Middle channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3760.00	Vertical	-91.73	42.61	0.8	-49.92	-13.00	Pass
5640.00	V	-90.19	47.11	0.8	-43.88		
3760.00	Horizontal	-92.34	42.61	0.8	-50.53	-13.00	Pass
5640.00	H	-90.40	47.11	0.8	-44.09		
Highest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3819.60	Vertical	-92.37	42.63	0.8	-50.54	-13.00	Pass
5729.40	V	-89.61	47.06	0.8	-43.35		
3819.60	Horizontal	-92.08	42.63	0.8	-50.25	-13.00	Pass
5729.40	H	-90.28	47.06	0.8	-44.02		
Remark:							
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.							

WCDMA BAND V 12.2k RMC							
Lowest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
1652.80	Vertical	-91.90	37.15	0.8	-55.55	-13.00	Pass
2479.20	V	-91.41	39.72	0.8	-52.49		
3305.60	V	-92.97	42.26	0.8	-51.51		
1652.80	Horizontal	-93.02	37.15	0.8	-56.67	-13.00	Pass
2479.20	H	-93.38	39.72	0.8	-54.46		
3305.60	H	-92.70	42.26	0.8	-51.24		
Middle channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
1673.20	Vertical	-92.43	37.16	0.8	-56.07	-13.00	Pass
2509.80	V	-92.69	39.88	0.8	-53.61		
3346.40	V	-92.75	42.31	0.8	-51.24		
1673.20	Horizontal	-92.47	37.16	0.8	-56.11	-13.00	Pass
2509.80	H	-92.93	39.88	0.8	-53.85		
3346.40	H	-93.03	42.31	0.8	-51.52		
Highest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
1693.20	Vertical	-89.26	37.17	0.8	-52.89	-13.00	Pass
2539.80	V	-93.40	40.01	0.8	-54.19		
3386.40	V	-92.69	42.36	0.8	-51.13		
1693.20	Horizontal	-91.80	37.17	0.8	-55.43	-13.00	Pass
2539.80	H	-93.33	40.01	0.8	-54.12		
3386.40	H	-92.61	42.36	0.8	-51.05		
Remark:							
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.							

WCDMA Band II 12.2k RMC							
Lowest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3704.80	Vertical	-86.23	42.59	0.8	-44.44	-13.00	Pass
5557.20	V	-85.15	47.17	0.8	-38.78		
3704.80	Horizontal	-84.36	42.59	0.8	-42.57	-13.00	Pass
5557.20	H	-80.23	47.17	0.8	-33.86		
Middle channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3760.00	Vertical	-85.41	42.61	0.8	-43.60	-13.00	Pass
5640.00	V	-81.07	47.11	0.8	-34.76		
3760.00	Horizontal	-85.38	42.61	0.8	-43.57	-13.00	Pass
5640.00	H	-80.04	47.11	0.8	-33.73		
Highest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3815.20	Vertical	-81.37	42.63	0.8	-39.54	-13.00	Pass
5722.80	V	-78.46	47.06	0.8	-32.20		
3815.20	Horizontal	-84.06	42.63	0.8	-42.23	-13.00	Pass
5722.80	H	-72.87	47.06	0.8	-26.61		
Remark:							
1. The emission levels of below 1 GHz are very lower than the limit and not show in test report.							

WCDMA Band IV 12.2k RMC							
Lowest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3424.40	Vertical	-92.28	42.41	0.8	-50.67	-13.00	Pass
5136.60	V	-91.51	45.89	0.8	-46.42		
3424.40	Horizontal	-92.08	42.41	0.8	-50.47	-13.00	Pass
5136.60	H	-90.73	45.89	0.8	-45.64		
Middle channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3464.80	Vertical	-91.77	42.45	0.8	-50.12	-13.00	Pass
5197.20	V	-88.84	46.11	0.8	-43.53		
3464.80	Horizontal	-91.84	42.45	0.8	-50.19	-13.00	Pass
5197.20	H	-87.53	46.11	0.8	-42.22		
Highest channel							
Frequency (MHz)	Spurious Emission					Limit (dBm)	Result
	Polarization	S.G. output (dBm)	Antenna Gain(dB/dBi)	Cable Loss (dB)	Level (dBm)		
3505.20	Vertical	-91.99	42.49	0.8	-50.30	-13.00	Pass
5257.80	V	-89.48	46.34	0.8	-43.94		
3505.20	Horizontal	-92.49	42.49	0.8	-50.80	-13.00	Pass
5257.80	H	-87.54	46.34	0.8	-42.00		
Remark:							
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.							

6.8 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 27.54, FCC Part 2.1055(a)(1)(b)
Test Method:	ANSI/TIA-6-3-D 2010
Limit:	±2.5 ppm
Test setup:	
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	174	0.207985	±2.5	Pass
	-20	155	0.185274		
	-10	136	0.162563		
	0	125	0.149414		
	10	114	0.136266		
	20	142	0.169735		
	30	139	0.166149		
	40	128	0.153000		
	50	117	0.139852		
Reference Frequency: GPRS850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	198	0.236672	±2.5	Pass
	-20	156	0.186469		
	-10	180	0.215157		
	0	174	0.207985		
	10	145	0.173321		
	20	133	0.158977		
	30	121	0.144633		
	40	105	0.125508		
	50	114	0.136266		
Note: Only the worst case shown in the report.					


Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
3.80	-30	179	0.095213	±2.5	Pass
	-20	156	0.082979		
	-10	142	0.075532		
	0	130	0.069149		
	10	126	0.067021		
	20	117	0.062234		
	30	108	0.057447		
	40	139	0.073936		
	50	147	0.078191		
Reference Frequency: GPRS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
3.80	-30	187	0.099468	±2.5	Pass
	-20	156	0.082979		
	-10	132	0.070213		
	0	125	0.066489		
	10	145	0.077128		
	20	170	0.090426		
	30	100	0.053191		
	40	140	0.074468		
	50	116	0.061702		
Note: Only the worst case shown in the report.					

Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
3.80	-30	169	0.202008	±2.5	Pass
	-20	142	0.169735		
	-10	135	0.161367		
	0	122	0.145828		
	10	108	0.129094		
	20	160	0.191250		
	30	162	0.193641		
	40	138	0.164953		
	50	145	0.173321		
Reference Frequency: WCDMA BAND V HSDPA Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	187	0.223524	±2.5	Pass
	-20	123	0.147024		
	-10	136	0.162563		
	0	151	0.180492		
	10	174	0.207985		
	20	115	0.137461		
	30	145	0.173321		
	40	104	0.124313		
	50	170	0.203203		
Reference Frequency: WCDMA BAND V HSUPA Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	174	0.207985	±2.5	Pass
	-20	123	0.147024		
	-10	131	0.156586		
	0	165	0.197227		
	10	124	0.148219		
	20	144	0.172125		
	30	170	0.203203		
	40	150	0.179297		
	50	146	0.174516		
Note: Only the worst case shown in the report.					

Reference Frequency: WCDMA BAND II 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
3.80	-30	190	0.101064	±2.5	Pass
	-20	152	0.080851		
	-10	143	0.076064		
	0	166	0.088298		
	10	145	0.077128		
	20	127	0.067553		
	30	148	0.078723		
	40	136	0.072340		
	50	152	0.080851		
Reference Frequency: WCDMA BAND II HSDPA Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	181	0.096277	±2.5	Pass
	-20	123	0.065426		
	-10	136	0.072340		
	0	150	0.079787		
	10	121	0.064362		
	20	145	0.077128		
	30	102	0.054255		
	40	115	0.061170		
	50	170	0.090426		
Reference Frequency: WCDMA BAND II HSUPA Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.80	-30	165	0.087766	±2.5	Pass
	-20	123	0.065426		
	-10	136	0.072340		
	0	133	0.070745		
	10	125	0.066489		
	20	104	0.055319		
	30	114	0.060638		
	40	108	0.057447		
	50	117	0.062234		
Note: Only the worst case shown in the report.					

Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
3.80	-30	172	0.099273	±2.5	Pass
	-20	142	0.081958		
	-10	143	0.082535		
	0	126	0.072723		
	10	108	0.062334		
	20	144	0.083112		
	30	168	0.096964		
	40	158	0.091192		
	50	129	0.074455		
Reference Frequency: UMTS1700 HSDPA Middle channel=1413 channel=1732.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
3.80	-30	181	0.104467	±2.5	Pass
	-20	123	0.070992		
	-10	136	0.078495		
	0	180	0.103890		
	10	171	0.098696		
	20	125	0.072146		
	30	144	0.083112		
	40	102	0.058871		
	50	106	0.061180		
Reference Frequency: UMTS1700 HSUPA Middle channel=1413 channel=1732.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
3.80	-30	171	0.098696	±2.5	Pass
	-20	151	0.087152		
	-10	160	0.092347		
	0	132	0.076186		
	10	136	0.078495		
	20	142	0.081958		
	30	104	0.060025		
	40	140	0.080803		
	50	118	0.068106		
Note: Only the worst case shown in the report.					

6.9 Frequency stability V.S. Voltage measurement

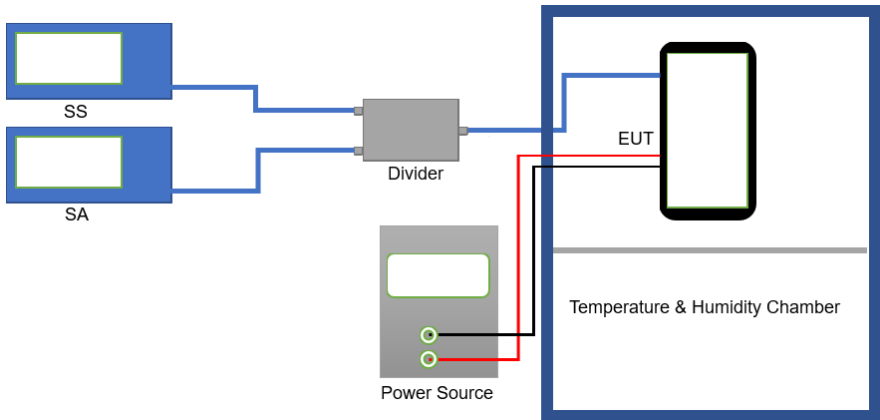Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 27.54, FCC Part 2.1055(d)(2)
Test Method:	ANSI/TIA-603-D 2010
Limit:	±2.5ppm
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular blocks labeled 'SS' (Signal Source) and 'SA' (Spectrum Analyzer). Blue lines connect them to a central grey block labeled 'Divider'. From the 'Divider', a blue line connects to a black rectangular block labeled 'EUT' (Equipment Under Test) inside a larger blue-bordered box labeled 'Temperature & Humidity Chamber'. Below the chamber, there is a grey block labeled 'Power Source' with two green circular terminals. Red lines connect these terminals to the 'EUT' inside the chamber.
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.35	85	0.101602	±2.5	Pass
	3.80	78	0.093235		
	3.50	68	0.081281		
Reference Frequency: GPRS850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.35	99	0.118336	±2.5	Pass
	3.80	80	0.095625		
	3.50	74	0.088453		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	90	0.047872	±2.5	Pass
	3.80	74	0.039362		
	3.50	80	0.042553		
Reference Frequency: GPRS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	90	0.047872	±2.5	Pass
	3.80	86	0.045745		
	3.50	50	0.026596		

Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	84	0.100406	±2.5	Pass
	3.80	90	0.107578		
	3.50	63	0.075305		
Reference Frequency: UMTS 850 HSDPA Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	88	0.105188	±2.5	Pass
	3.80	74	0.088453		
	3.50	60	0.071719		
Reference Frequency: UMTS 850 HSUPA Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	90	0.107578	±2.5	Pass
	3.80	86	0.102797		
	3.50	74	0.088453		
Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	78	0.041489	±2.5	Pass
	3.80	81	0.043085		
	3.50	69	0.036702		
Reference Frequency: UMTS 1900 HSDPA Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	87	0.046277	±2.5	Pass
	3.80	90	0.047872		
	3.50	74	0.039362		
Reference Frequency: UMTS 1900 HSUPA Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	69	0.036702	±2.5	Pass
	3.80	90	0.047872		
	3.50	74	0.039362		

Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	90	0.051945	2.5	Pass
	3.80	84	0.048482		
	3.50	57	0.032899		
Reference Frequency: UMTS1700 HSDPA Middle channel=1413 channel=1732.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	88	0.050791	2.5	Pass
	3.80	90	0.051945		
	3.50	74	0.042710		
Reference Frequency: UMTS1700 HSUPA Middle channel=1413 channel=1732.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	Ppm		
25	4.35	84	0.048482	2.5	Pass
	3.80	90	0.051945		
	3.50	73	0.042133		
Note: Only the worst case shown in the report.					