



# **BL-R7603NU3**


**802.11n 300Mbps WiFi**

**USB Module Specification**

**SHENZHEN BILIAN ELECTRONIC CO., LTD**

Add: 10~11/F, Building 1A, Huaqiang idea park, Guangming district, Shenzhen. Guangdong, China

Web: [www.b-link.net.cn](http://www.b-link.net.cn)

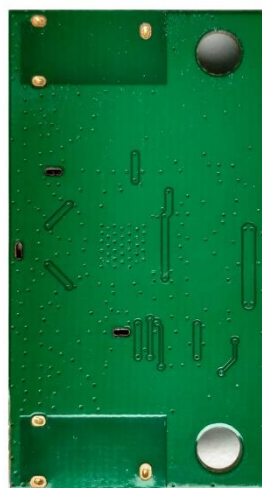

|                                                       |       |
|-------------------------------------------------------|-------|
| Module Name: BL-R7603NU3                              |       |
| Module Type: 802.11b/g/n 300Mbps 2T2R WiFi USB Module |       |
| Revision: V1.0                                        |       |
| Customer Approval:                                    |       |
| Company:                                              |       |
| Title:                                                |       |
| Signature:                                            | Date: |
| BL-link Approval:                                     |       |
| Title:                                                |       |
| Signature:                                            | Date: |

## Revision History

| Revision | Summary          | Release Date |
|----------|------------------|--------------|
| 1.0      | Official release | 2020-07-17   |
|          |                  |              |
|          |                  |              |
|          |                  |              |


## 1. Introduction

BL-R7603NU3 wireless module is designed base on MT7603U . It is a wifi module which can support far than 100M communication. It operates at 2.4~2.4835GHz and supports IEEE802.11b/g/n 2T2R , wireless data rate can reach up to 300Mbps.

### 1.1 Features

- Operating Frequencies: 2.4~2.4835GHz
- Host Interface is USB 2.0
- IEEE Standards: IEEE 802.11b/g/n
- Wireless data rate can reach up to 300Mbps
- PIFA antenna
- Power Supply: 5V±0.25V main power supply


### 1.2 Block Diagram

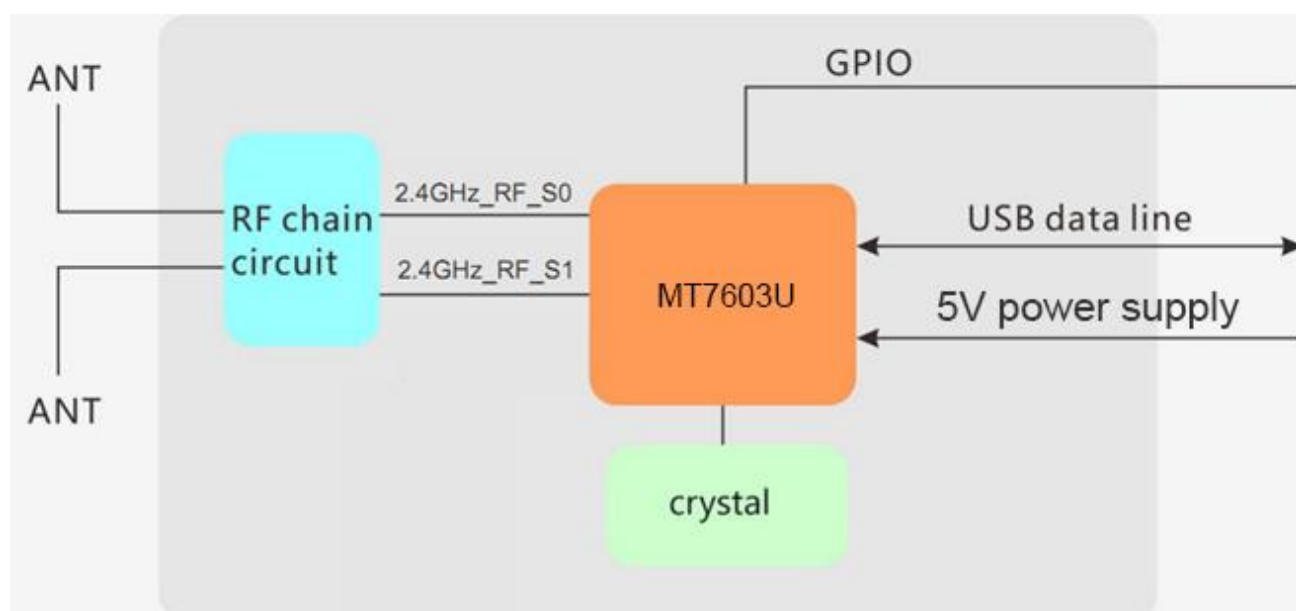

## 1.3 General Specifications

|                       |                                                    |
|-----------------------|----------------------------------------------------|
| Module Name           | IEEE 802.11b/g/n 300Mbps WiFi USB Module           |
| Chipset               | MT7603U                                            |
| WiFi Standards        | IEEE802.11b/g/n/, 2T2R MIMO, 2.4GHz, 300Mbps (Max) |
| Host Interface        | USB2.0                                             |
| Antenna               | PCB antenna                                        |
| Dimension             | 45*25*5.5mm (L*W*H)                                |
| Power Supply          | 5V±0.25V @ 600 mA (Max)                            |
| Operation Temperature | -20°C to +70°C                                     |
| Operation Humidity    | 10% to 95% RH (Non-Condensing)                     |
| Storage Temperature   | -45°C to +85°C                                     |
| Storage Humidity      | 10% to 95% RH (Non-Condensing)                     |

## 2. Pin Assignments

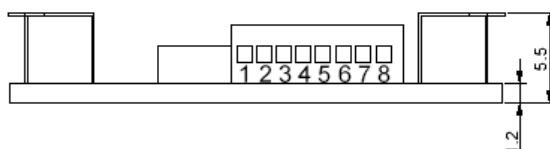

### 2.1 Pin Defi

| No | Pin Name     | Type | Description                    | Supply |
|----|--------------|------|--------------------------------|--------|
| 1  | NC           | -    | No connection                  |        |
| 2  | GND          | P    | GND                            |        |
| 3  | HOST_WAEK_WL | I    | Host wake up WLAN              | VDD33  |
| 4  | RST          | I    | System reset                   | VDD33  |
| 5  | GND          | P    | GND                            |        |
| 6  | USB+         | I/O  | USB 2.0 differential data line |        |
| 7  | USB-         | I/O  | USB 2.0 differential data line |        |
| 8  | USB_5V       | P    | Power supply, 5V±0.25V         |        |

P: Power, I: Input, O: Output, I/O: In/Output, RF: Analog RF Port

### 3. Electrical and Thermal Specifications

#### 3.1 Recommended Operating Conditions

| Parameters                    |       | Min  | Typ | Max  | Units |
|-------------------------------|-------|------|-----|------|-------|
| Ambient Operating Temperature |       | -20  | 25  | 70   | °C    |
| External Antenna VSWR         |       | 1    | 1.7 | 1.9  | 1     |
| Supply Voltage                | VDD5V | 4.75 | 5   | 5.25 | V     |

#### 3.2 Digital I/O DC Specifications

| Symbol | Parameter           | Min  | Typ | Max  | Units |
|--------|---------------------|------|-----|------|-------|
| VIH    | Input High Voltage  | 2.0  | 3.3 | 3.6  | V     |
| VIL    | Input Low Voltage   | --   | 0   | 0.9  | V     |
| VOH    | Output High Voltage | 2.97 | --  | 3.3  | V     |
| VOL    | Output Low Voltage  | 0    | --  | 0.33 | V     |

#### 3.3 Current Consumption

| Conditions : VDD=5V ; Ta:25°C |                         |     |       |
|-------------------------------|-------------------------|-----|-------|
| Use Case                      | VDD33 Current (average) |     |       |
|                               | Typ                     | Max | Units |
| 2.4G 1Mbps TX (RF-Test)       | 480                     | 483 | mA    |
| 2.4G 1Mbps RX (RF-Test)       | 68                      | 69  | mA    |
| 2.4G 11Mbps TX (RF-Test)      | 475                     | 480 | mA    |
| 2.4G 11Mbps RX (RF-Test)      | 68                      | 69  | mA    |
| 2.4G 6Mbps TX (RF-Test)       | 392                     | 395 | mA    |
| 2.4G 6Mbps RX (RF-Test)       | 67                      | 68  | mA    |
| 2.4G 54Mbps TX (RF-Test)      | 198                     | 202 | mA    |
| 2.4G 54Mbps RX (RF-Test)      | 67                      | 68  | mA    |

|                               |     |     |    |
|-------------------------------|-----|-----|----|
| 2.4G MCS0(HT20) TX (RF-Test)  | 430 | 431 | mA |
| 2.4G MCS0(HT20) RX (RF-Test)  | 67  | 68  | mA |
| 2.4G MCS7(HT20) TX (RF-Test)  | 208 | 210 | mA |
| 2.4G MCS7(HT20) RX (RF-Test)  | 68  | 69  | mA |
| 2.4G MCS7(HT40) TX (RF-Test)  | 375 | 380 | mA |
| 2.4G MCS7(HT40) RX (RF-Test)  | 77  | 79  | mA |
| 2.4G MCS15(HT40) TX (RF-Test) | 167 | 172 | mA |
| 2.4G MCS15(HT40) RX (RF-Test) | 78  | 80  | mA |

## 4. WiFi RF Specifications


### 4.1 2.4G WiFi RF Specification

| Conditions : VDD=5V ; Ta:25°C |                                                                                                                                                                                                                                                                                                   |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Features                      | Description                                                                                                                                                                                                                                                                                       |
| WLAN Standard                 | IEEE 802.11b/g/n CSMA/CA                                                                                                                                                                                                                                                                          |
| Frequency Range               | 2.4~2.4835GHz (2.4GHz ISM Band)                                                                                                                                                                                                                                                                   |
| Channels                      | Ch1~Ch13 (For 20MHz Channels)                                                                                                                                                                                                                                                                     |
| Modulation                    | 802.11b (DSSS): DBPSK, DQPSK, CCK;<br>802.11g (OFDM): BPSK, QPSK, 16QAM, 64QAM;<br>802.11n (OFDM): BPSK, QPSK, 16QAM, 64QAM;                                                                                                                                                                      |
| Date Rate                     | 802.11b: 1, 2, 5.5, 11Mbps;<br>802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps;<br>802.11n (HT20): MCS0~MCS7(1T1R_SISO) 6.5~72.2Mbps;<br>802.11n (HT20): MCS8~MCS15(2T2R_MIMO) 13~144.4Mbps;<br>802.11n (HT40): MCS0~MCS7(1T1R_SISO) 13.5~150Mbps;<br>802.11n (HT40): MCS8~MCS15(2T2R_MIMO) 27~300Mbps; |
| Frequency Tolerance           | $\leq \pm 15\text{ppm}$                                                                                                                                                                                                                                                                           |


| 2.4G Receiver Specifications |                      |                      |       |
|------------------------------|----------------------|----------------------|-------|
| RX Rate                      | Min Input Level(Typ) | Max Input Level(Typ) | PER   |
| 802.11b@1Mbps                | -93dBm               | -10dBm               | < 8%  |
| 802.11b@11Mbps               | -87dBm               | -10dBm               | < 8%  |
| 802.11g@6Mbps                | -89dBm               | -10dBm               | < 10% |
| 802.11g@54Mbps               | -73dBm               | -10dBm               | < 10% |
| 802.11n@HT20_MCS0            | -88dBm               | -10dBm               | < 10% |
| 802.11n@HT20_MCS7            | -68dBm               | -10dBm               | < 10% |
| 802.11n@HT40_MCS0            | -86dBm               | -10dBm               | < 10% |
| 802.11n@HT40_MCS7            | -68dBm               | -10dBm               | < 10% |

## 5. Mechanical Specifications

### 5.1 Module Outline Drawing

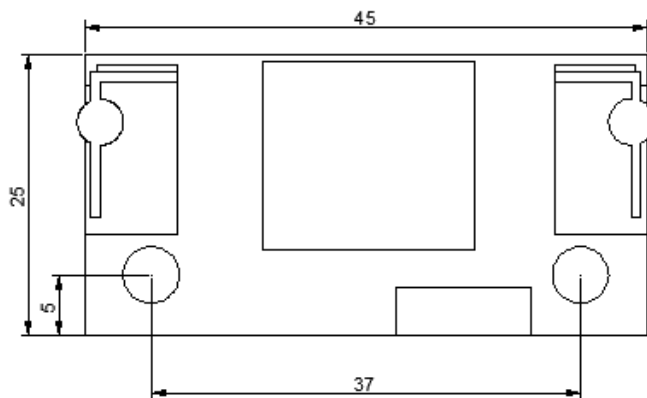


Top view

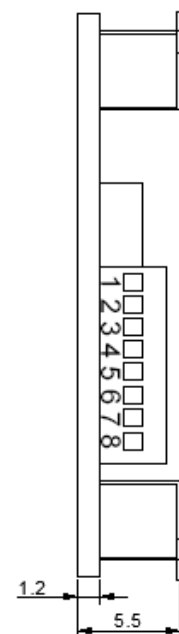

Side view


Module dimension: 45\*25\*5.5mm (L\*W\*H; Tolerance:  $\pm 0.15$ mm)

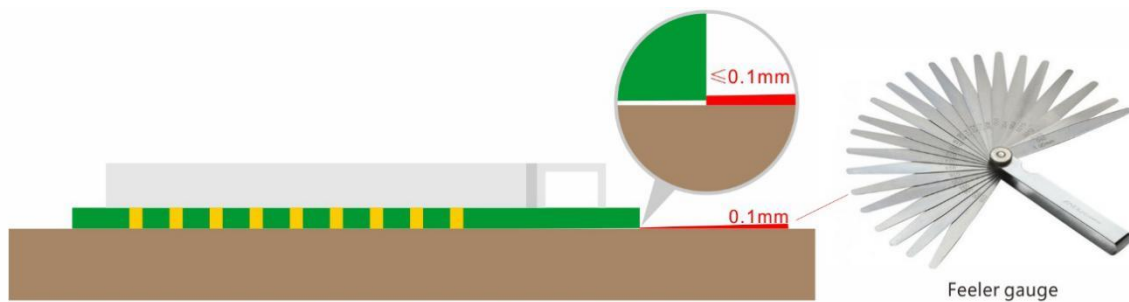

Module Bow and Twist:  $\leq 0.1\text{mm}$

## 6. Package and Storage Information

### 6.1 Package Dimensions

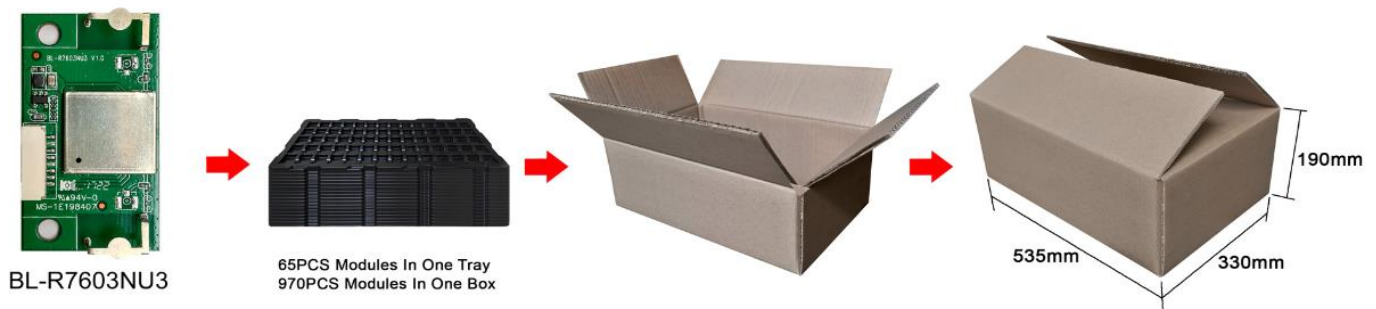

### 6.2 Storage Conditions

Absolute Maximum Ratings:

Storage temperature:  $-45^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

Storage humidity: 10% to 95% RH (Non-Condensing)

Recommended Storage Conditions:

Storage temperature:  $5^{\circ}\text{C}$  to  $+40^{\circ}\text{C}$

Storage humidity: 20% to 90% RH

Please use this Module within 12month after vacuum-packaged.

The Module shall be stored without opening the packing.

After the packing opened, the Module shall be used within 72hours.

When the color of the humidity indicator in the packing changed, the Module shall be baked before soldering.

Baking condition:  $60^{\circ}\text{C}$ , 24hours, 1time.

ESD Sensitivity:

The Module is a static-sensitive electronic device.

Do not operate or store near strong electrostatic fields.

Take proper ESD precautions!

**FCC Statement**

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help important announcement

Important Note:

**Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Country Code selection feature to be disabled for products marketed to the US/Canada.

This device is intended only for OEM integrators under the following conditions:

1. The antenna must be installed such that 20 cm is maintained between the antenna and users, and
2. The transmitter module may not be co-located with any other transmitter or antenna,
3. For all products market in US, OEM has to limit the operation channels in CH1 to CH11 for 2.4G band by supplied firmware programming tool. OEM shall not supply any tool or info to the end-user regarding to Regulatory Domain change. (if modular only test Channel 1-11)

As long as the three conditions above are met, further transmitter testing will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

**Important Note:**

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

**End Product Labeling**

The final end product must be labeled in a visible area with the following" Contains FCC ID: **2AL6KBL-R7603NU3**"

**Manual Information to the End User**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

## Integration instructions for host product manufacturers according to KDB 996369 D03 OEM Manual v01

### 2.2 List of applicable FCC rules

CFR 47 FCC PART 15 SUBPART C has been investigated. It is applicable to the modular transmitter

### 2.3 Specific operational use conditions

This module is stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, host manufacturer have to consult with module manufacturer for the installation method in end system.

### 2.4 Limited module procedures

Not applicable

### 2.5 Trace antenna designs

Not applicable

### 2.6 RF exposure considerations

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

### 2.7 Antennas

This radio transmitter **2AL6KBL-R7603NU3** has been approved by Federal Communications Commission to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

| Model              | Type                | Connector | Peak gain ( dBi )  |                  |                  |                  |                  |
|--------------------|---------------------|-----------|--------------------|------------------|------------------|------------------|------------------|
|                    |                     |           | 2400-2483.5<br>MHz | 5150-5250<br>MHz | 5250-5350<br>MHz | 5470-5725<br>MHz | 5725-5850<br>MHz |
| 2400-2483.5<br>MHz | External<br>Antenna | /         | 2.0dBi             | /                | /                | /                | /                |

### 2.8 Label and compliance information

The final end product must be labeled in a visible area with the following" Contains FCC ID:2AL6KBL-R7603NU3".

### 2.9 Information on test modes and additional testing requirements

Host manufacturer is strongly recommended to confirm compliance with FCC requirements for the transmitter when the module is installed in the host.

### 2.10 Additional testing, Part 15 Subpart B disclaimer

Host manufacturer is responsible for compliance of the host system with module installed with all other applicable requirements for the system such as Part 15 B.