


FCC Test Report

FCC ID : 2AL6XWAP581
Equipment : 802.11ax 2x2 2-Streams Dual Concurrent
Dual radios Wall Plate Access Point
(Please refer to section 1.1.1 for more details)
Model No. : WAP581
(Please refer to section 1.1.1 for more details)
Brand Name : Emplus
(Please refer to section 1.1.1 for more details)
Applicant : Emplus Technologies, Inc
Address : Bld B, 10F, No.209, Sec.1, Nangang Rd. Taipei
City Taiwan
Standard : 47 CFR FCC Part 15.247
Received Date : Dec. 08, 2021
Tested Date : Apr. 25 ~ May 09, 2022


We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:



Along Chen / Assistant Manager



Gary Chang / Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	9
1.4	The Equipment List	10
1.5	Test Standards	11
1.6	Reference Guidance	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty	11
2	TEST CONFIGURATION.....	12
2.1	Testing Facility	12
2.2	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	6dB and Occupied Bandwidth.....	13
3.2	Conducted Output Power	14
3.3	Power Spectral Density	15
3.4	Unwanted Emissions into Restricted Frequency Bands	16
3.5	Emissions in Non-Restricted Frequency Bands.....	18
3.6	AC Power Line Conducted Emissions	19
4	TEST LABORATORY INFORMATION	20

Appendix A. 6dB and Occupied Bandwidth

Appendix B. Conducted Output Power

Appendix C. Power Spectral Density

Appendix D. Unwanted Emissions into Restricted Frequency Bands

Appendix E. Emissions in Non-Restricted Frequency Bands

Appendix F. AC Power Line Conducted Emissions

Release Record

Report No.	Version	Description	Issued Date
FR1D0803AC	Rev. 01	Initial issue	Jun. 02, 2022

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emission	[dBuV]: 0.521MHz 39.60 (Margin -6.40dB) - AV	Pass
15.247(d) 15.209	Unwanted Emissions	[dBuV/m at 3m]: 2390.00MHz 53.85 (Margin -0.15dB) - AV	Pass
15.247(b)(3)	Conducted Output Power	Max Power [dBm]: Non-beamforming mode 27.80 Beamforming mode 24.79	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name	Description
Emplus	WAP581	802.11ax 2x2 2-Streams Dual Concurrent Dual radios Wall Plate Access Point	For marketing purpose.
EnGenius	ECW215	802.11ax Cloud Managed AP	
✦ All models are electrically identical, different model names are for marketing purpose. ✦ The above models, model WAP581 was selected as a representative one for the final test and only its data was recorded in this report.			

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15
2400-2483.5	ax (HE20)	2412-2462	1-11 [11]	2	MCS 0-11
2400-2483.5	ax (HE40)	2422-2452	3-9 [7]	2	MCS 0-11
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power. Note 2: DSSS-DBPSK, DQPSK, CCK modulation OFDM/OFDMA- BPSK, QPSK, 16QAM, 64QAM, 256QAM and 1024QAM modulation. Note 3: 802.11ax supports beamforming function.					

1.1.3 Antenna Details

Ant. No.	Model	Type	Connector	Gain (dBi)
1	2.4G-1	Dipole	UFL	4.7
2	2.4G-2	Dipole	UFL	4.2

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	12V _{DC} from AC adapter 54V _{DC} from POE
-------------------	---

1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20 / ax HE20		802.11n HT40 / ax HE40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	QPSR, Version: V5.0-00197		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	67.68%	1.70
	11g	95.37%	0.21
	ax HE20-OFDMA	91.94%	0.36
	ax HE40-OFDMA	86.32%	0.64

1.1.7 Power Index of Test Tool



Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	17.5
11b	2437	17
11b	2462	17.5
11g	2412	17
11g	2437	19.5
11g	2462	17
ax HE20-OFDMA	2412	16
ax HE20-OFDMA	2437	19
ax HE20-OFDMA	2462	15.5
ax HE40-OFDMA	2422	14.5
ax HE40-OFDMA	2437	16.5
ax HE40-OFDMA	2452	14

1.2 Local Support Equipment List

Support Equipment List (Adapter Mode)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	Notebook	DELL	Latitude E5470	DoC	---
3	RJ45 Load	ICC	DTSE9	---	---
4	Power Adapter	LEADER	MU18D1120150 -A1	---	Remarks: I/P: 100-240V~, 50-60Hz, 0.5A Max. O/P: 12V=1.5A (Provided by applicant.)

Support Equipment List (POE Mode)					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	Notebook	DELL	Latitude E5470	DoC	---
3	POE	Engenius	EPA5006GAT	---	Remarks: I/P: 100-240V~, 50-60Hz, 0.8A O/P: 54V=0.6A (Provided by applicant.)
4	POE load	Emplus	WAP581	---	Provided by applicant.

1.3 Test Setup Chart

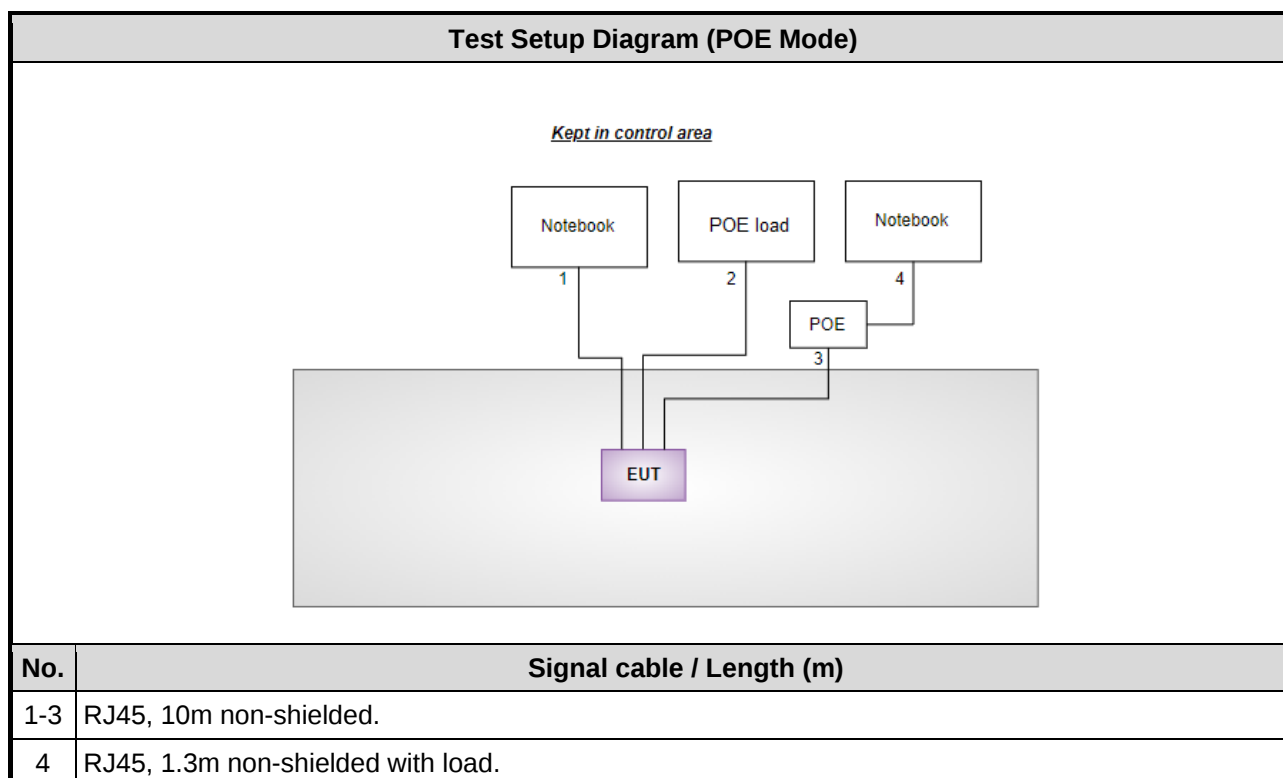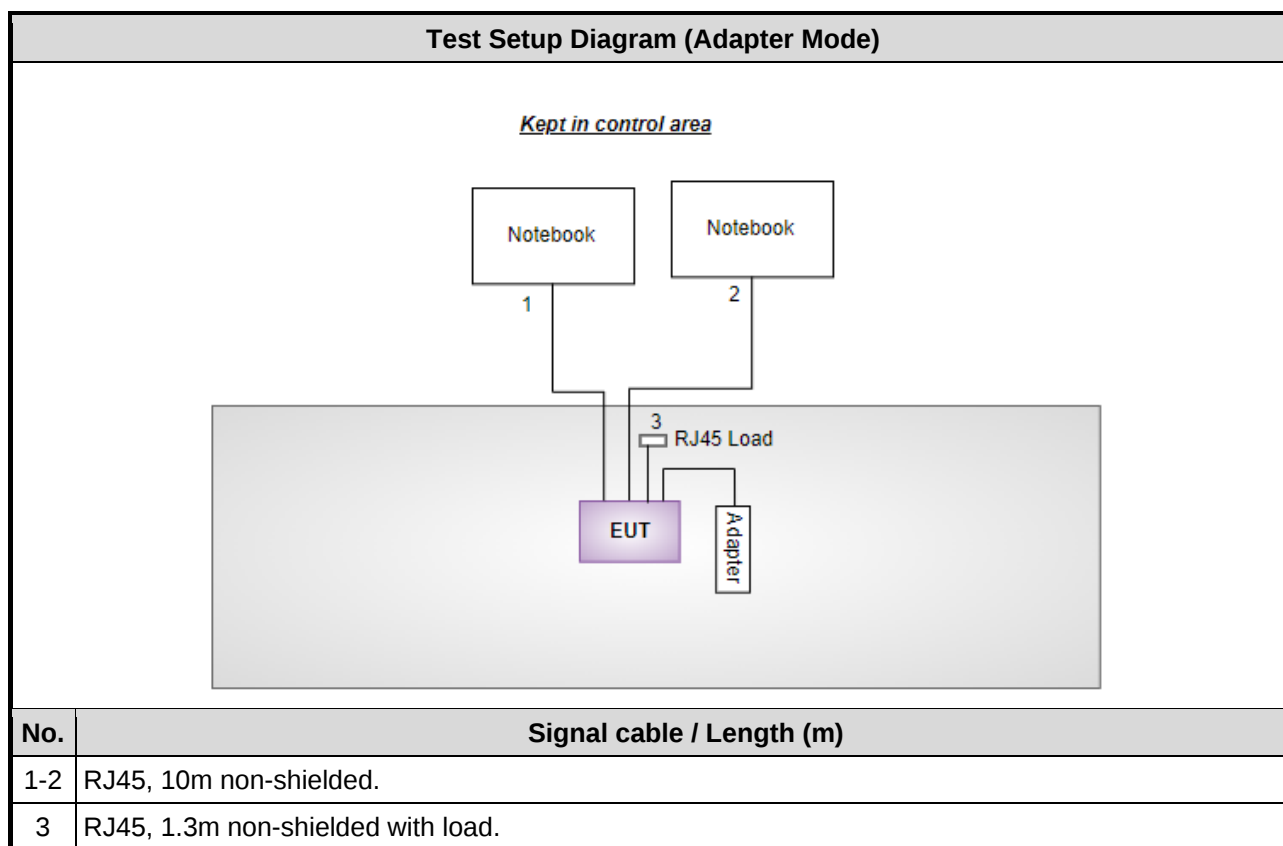

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	May 04, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 16, 2022	Feb. 15, 2023
LISN	R&S	ENV216	101579	Apr. 21, 2022	Apr. 20, 2023
LISN (Support Unit)	SCHWARZBECK	NSLK 8127	8127667	Jan .07, 2022	Jan .06, 2023
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 19, 2021	Oct. 18, 2022
50 ohm terminal (Support Unit)	NA	50	04	May 25, 2021	May 24, 2022
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Apr. 25 ~ Apr. 29, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023
Spectrum Analyzer	R&S	FSV40	101499	Mar. 08, 2022	Mar. 07, 2023
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	May 06, 2021	May 05, 2022
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 20, 2021	Dec. 19, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023
Preamplifier	EMC	EMC02325	980187	Jul. 26, 2021	Jul. 25, 2022
Preamplifier	Agilent	83017A	MY39501309	Sep. 06, 2021	Sep. 05, 2022
Preamplifier	EMC	EMC184045B	980192	Jul. 14, 2021	Jul. 13, 2022
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 24, 2021	Sep. 23, 2022
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 24, 2021	Sep. 23, 2022
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 24, 2021	Sep. 23, 2022
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 24, 2021	Sep. 23, 2022
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 24, 2021	Sep. 23, 2022
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	May .03, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 18, 2022	Apr. 17, 2023
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022
Measurement Software	Sporton	SENSE-15247_DTS	V5.10.7.18	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

47 CFR FCC Part 15.247
ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02
FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Unwanted Emission ≤ 1GHz	±3.96 dB
Unwanted Emission > 1GHz	±4.51 dB

2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Non-beamforming mode				
AC Power Line Conducted Emission	ax HE20-OFDMA	2437	MCS 0	1, 2
Unwanted Emissions ≤ 1GHz	ax HE20-OFDMA	2437	MCS 0	1, 2
Unwanted Emissions >1GHz	11b 11g ax HE20-OFDMA ax HE40-OFDMA	2412 / 2437 / 2462	1 Mbps	1
Conducted Output Power		2412 / 2437 / 2462	6 Mbps	
6dB bandwidth		2412 / 2437 / 2462	MCS 0	
Power spectral density		2422 / 2437 / 2452	MCS 0	
Beamforming mode				
Conducted Output Power	ax HE20-OFDMA ax HE40-OFDMA	2412 / 2437 / 2462 2422 / 2437 / 2452	MCS 0 MCS 0	1
NOTE: 1. Test configurations are listed as below: 1) Configuration 1: Adapter mode 2) Configuration 2: POE mode				

3 Transmitter Test Results

3.1 6dB and Occupied Bandwidth

3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.1.2 Test Procedures


6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

3.1.3 Test Setup



3.1.4 Test Results

Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Refer to Appendix A.

3.2 Conducted Output Power

3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain $\leq 6\text{dBi}$, no any corresponding reduction is in output power limit.

Antenna gain $> 6\text{dBi}$

Non Fixed, point to point operations.

The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB


Fixed, point to point operations

Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.2.3 Test Setup



3.2.4 Test Results

Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Refer to Appendix B.

3.3 Power Spectral Density

3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.3.2 Test Procedures

Peak PSD

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.


Average PSD, duty cycle $\geq 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz.
2. Detector = RMS, Sweep time = auto couple.
3. Sweep time = auto couple.
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

Average PSD, duty cycle $< 98\%$

1. Set the RBW = 30 kHz, VBW = 100 kHz. Detector = RMS.
2. Set the sweep time to: ≥ 10 (number of measurement points in sweep) $\times$ (total on/off period of the transmitted signal).
3. Perform the measurement over a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add $10 \log (1/x)$, where x is the duty cycle.

3.3.3 Test Setup



3.3.4 Test Results

Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Refer to Appendix C.

3.4 Unwanted Emissions into Restricted Frequency Bands

3.4.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.4.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.4.3 Test Setup

Radiated Emissions below 1 GHz

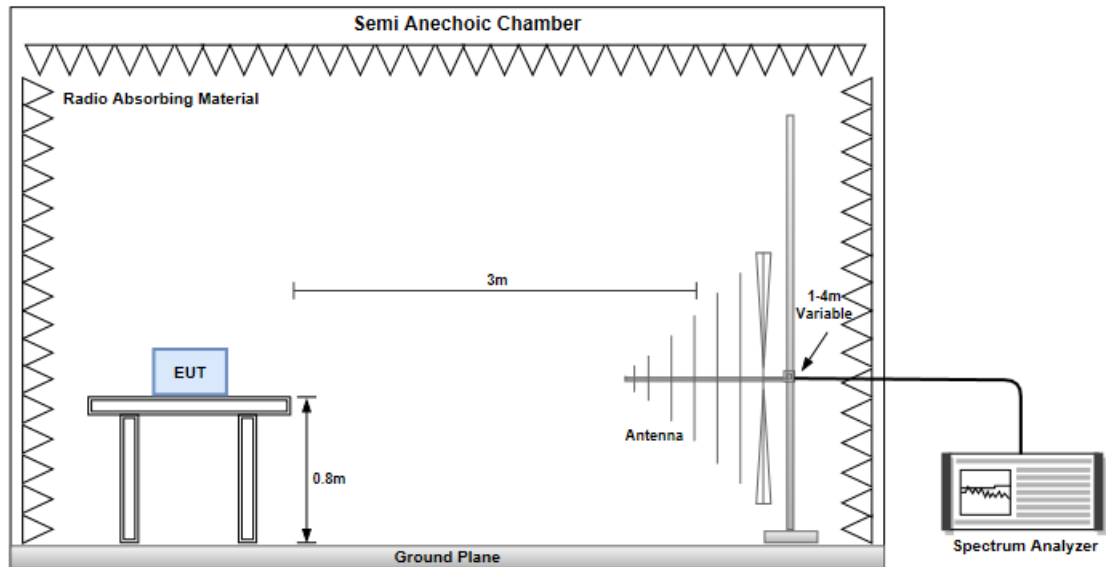

Radiated Emissions above 1 GHz

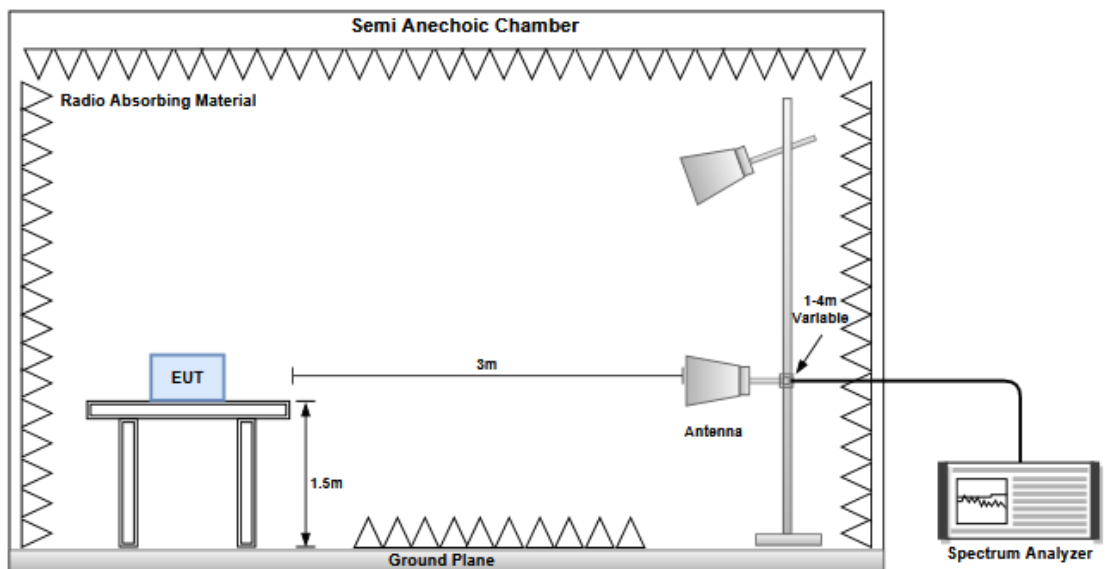

3.4.4 Test Results

Refer to Appendix D.

3.5 Emissions in Non-Restricted Frequency Bands

3.5.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.5.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.5.3 Test Setup



3.5.4 Test Results

Ambient Condition	24°C / 67%	Tested By	Aska Huang
-------------------	------------	-----------	------------

Refer to Appendix E.

3.6 AC Power Line Conducted Emissions

3.6.1 Limit of AC Power Line Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.6.3 Test Setup

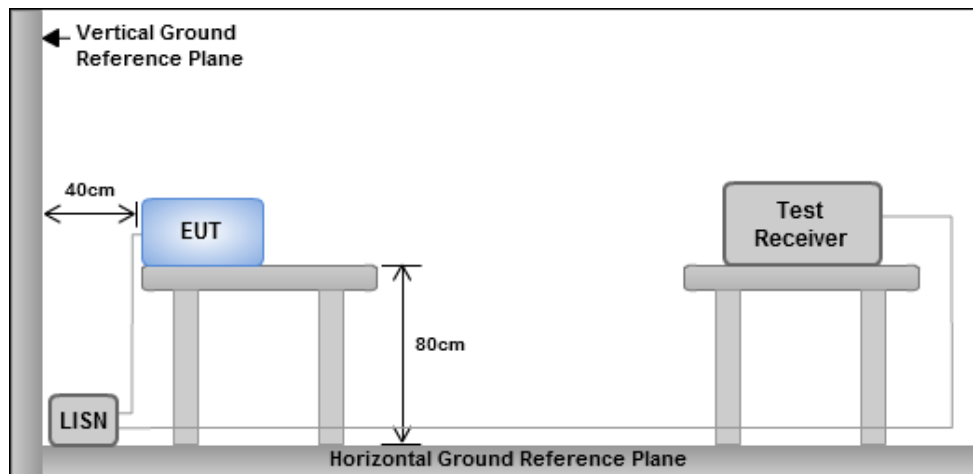

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.6.4 Test Results

Refer to Appendix F.

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan
(R.O.C.)

Kwei Shan

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)
No.2-1, Lane 6, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd
St., Kwei Shan Dist., Tao Yuan
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC_Service@icertifi.com.tw

==END==

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	8.5M	13.118M	13M1G1D	8.025M	13.018M
802.11g_Nss1,(6Mbps)_2TX	15.025M	16.342M	16M3D1D	13.725M	16.292M
802.11ax HEW20-OFDMA _Nss1,(MCS0)_2TX	17.725M	18.841M	18M8D1D	14.975M	18.766M
802.11ax HEW40-OFDMA _Nss1,(MCS0)_2TX	35.05M	37.681M	37M7D1D	33.75M	37.531M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	8.025M	13.043M	8.075M	13.018M
2437MHz	Pass	500k	8.5M	13.118M	8.025M	13.093M
2462MHz	Pass	500k	8.075M	13.068M	8.025M	13.068M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	15.025M	16.292M	13.725M	16.342M
2437MHz	Pass	500k	13.825M	16.317M	13.725M	16.342M
2462MHz	Pass	500k	15M	16.292M	15M	16.317M
802.11ax HEW20-OFDMA _Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	14.975M	18.816M	15M	18.816M
2437MHz	Pass	500k	15.025M	18.841M	17.725M	18.841M
2462MHz	Pass	500k	15.075M	18.841M	15.1M	18.766M
802.11ax HEW40-OFDMA _Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	35.05M	37.531M	33.85M	37.631M
2437MHz	Pass	500k	35M	37.631M	33.85M	37.581M
2452MHz	Pass	500k	35.05M	37.631M	33.75M	37.681M

Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

802.11b_Nss1,(1Mbps)_2TX

EBW


2412MHz

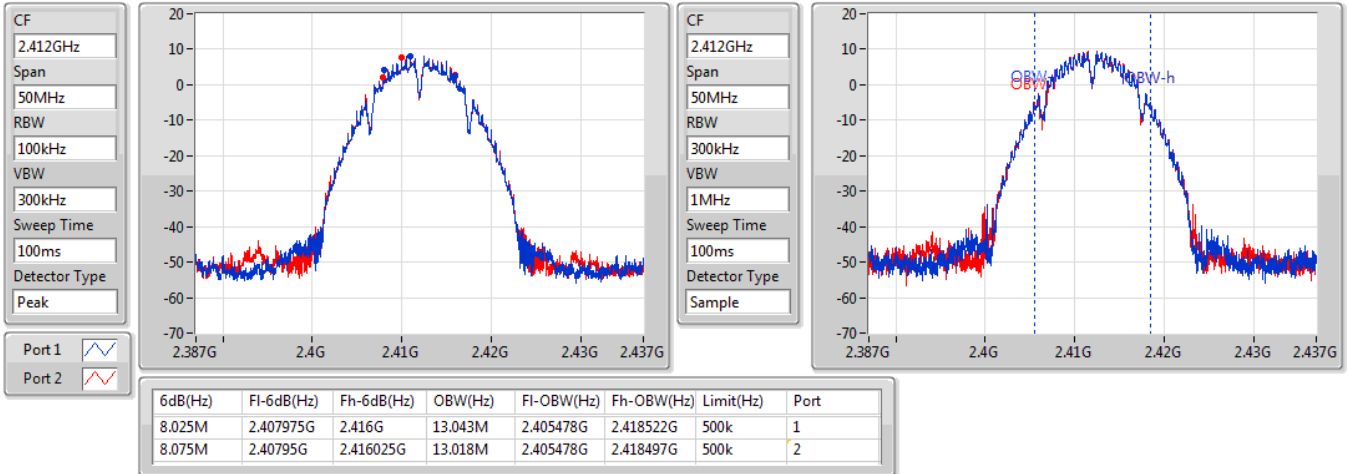

802.11b_Nss1,(1Mbps)_2TX

EBW


2437MHz

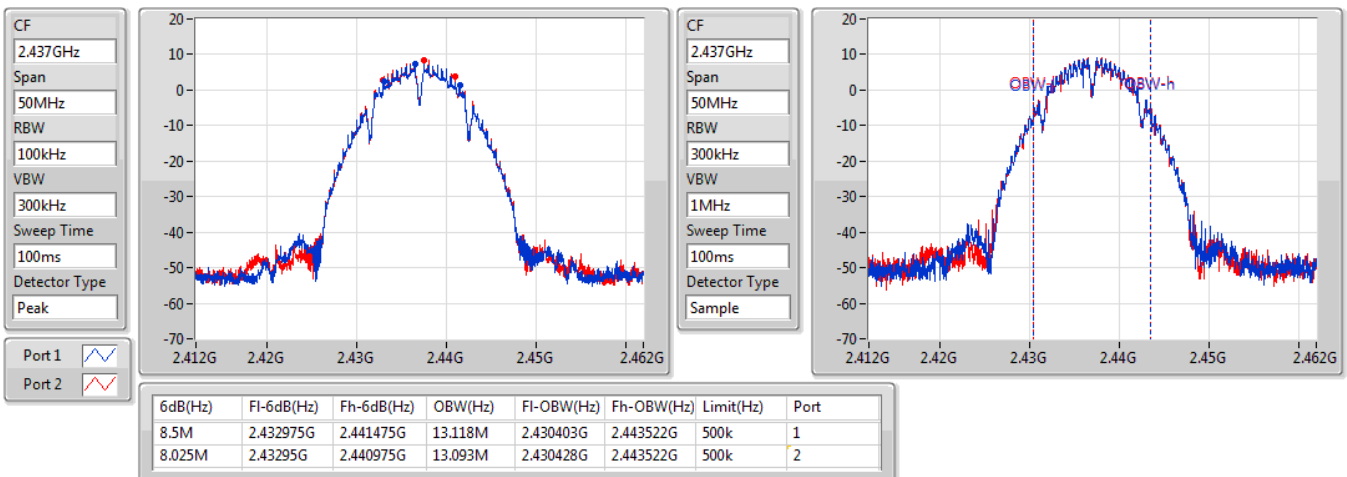

802.11b_Nss1,(1Mbps)_2TX

EBW


2462MHz

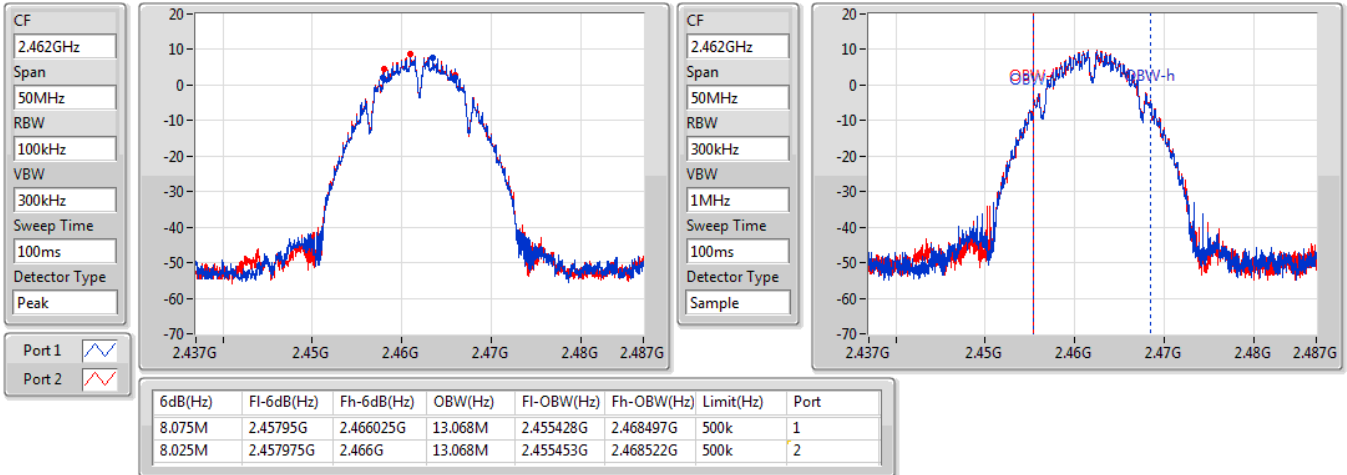

802.11g_Nss1,(6Mbps)_2TX

EBW


2412MHz

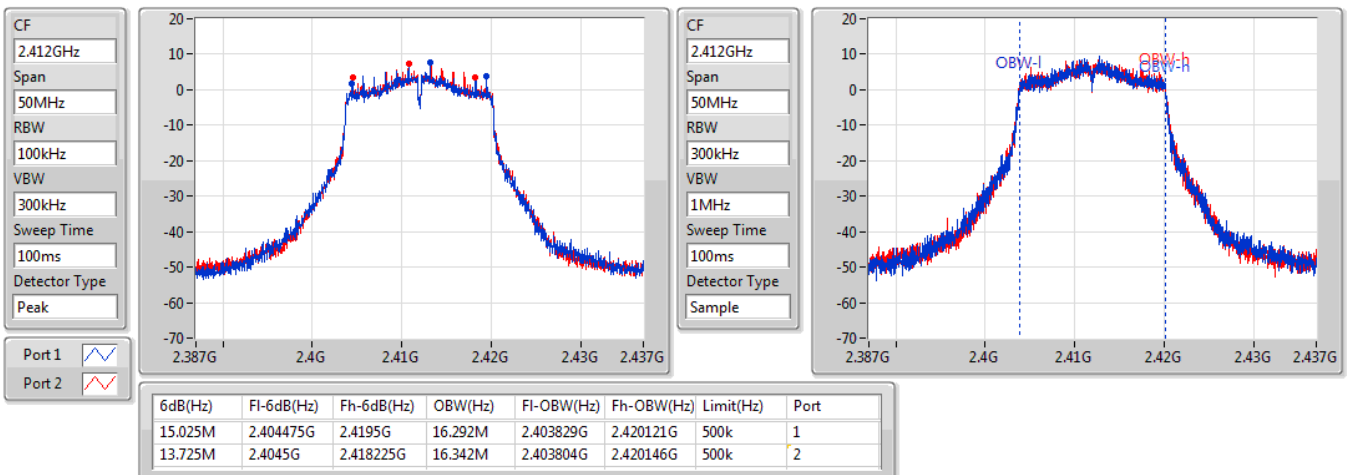

802.11g_Nss1,(6Mbps)_2TX

EBW


2437MHz

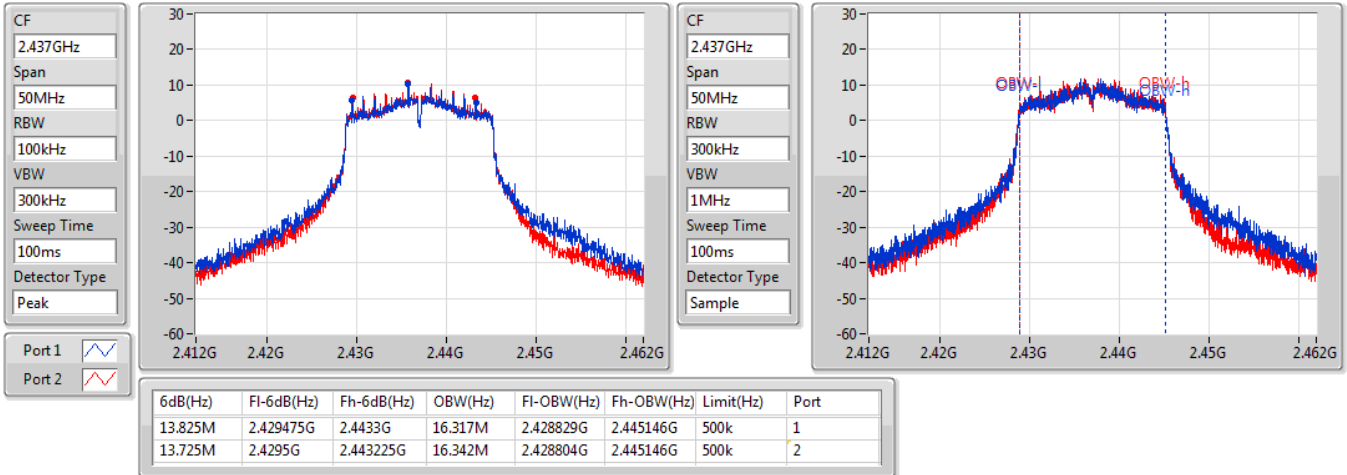

802.11g_Nss1,(6Mbps)_2TX

EBW


2462MHz

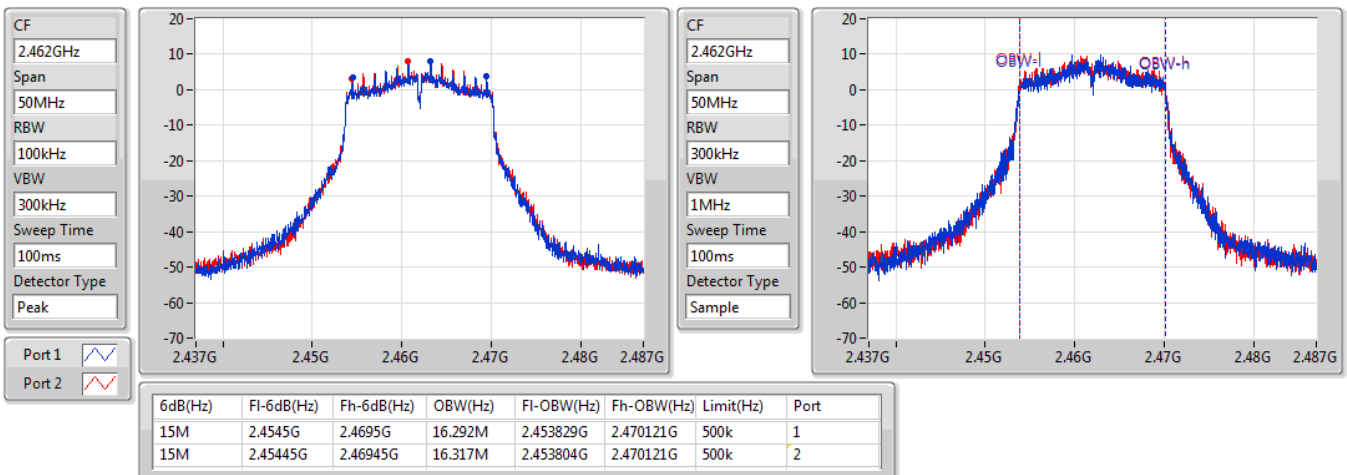

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


2412MHz

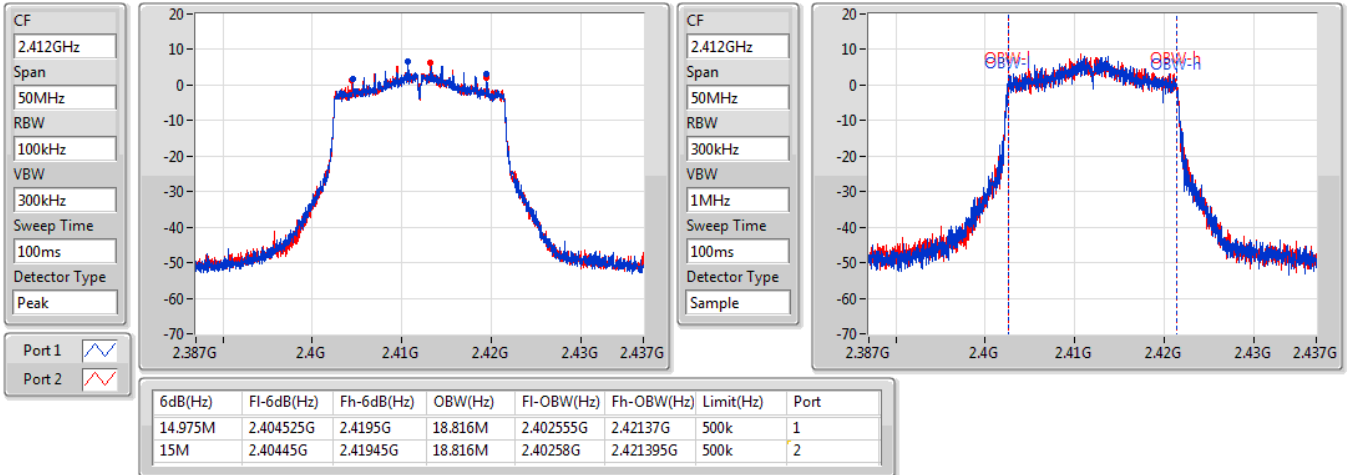

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


2437MHz

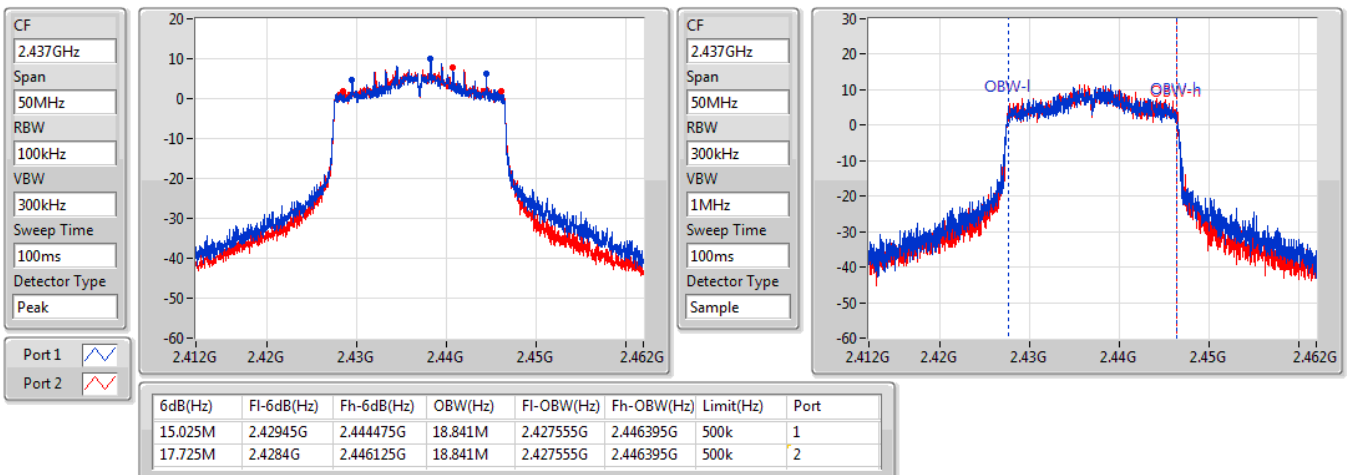

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


2462MHz

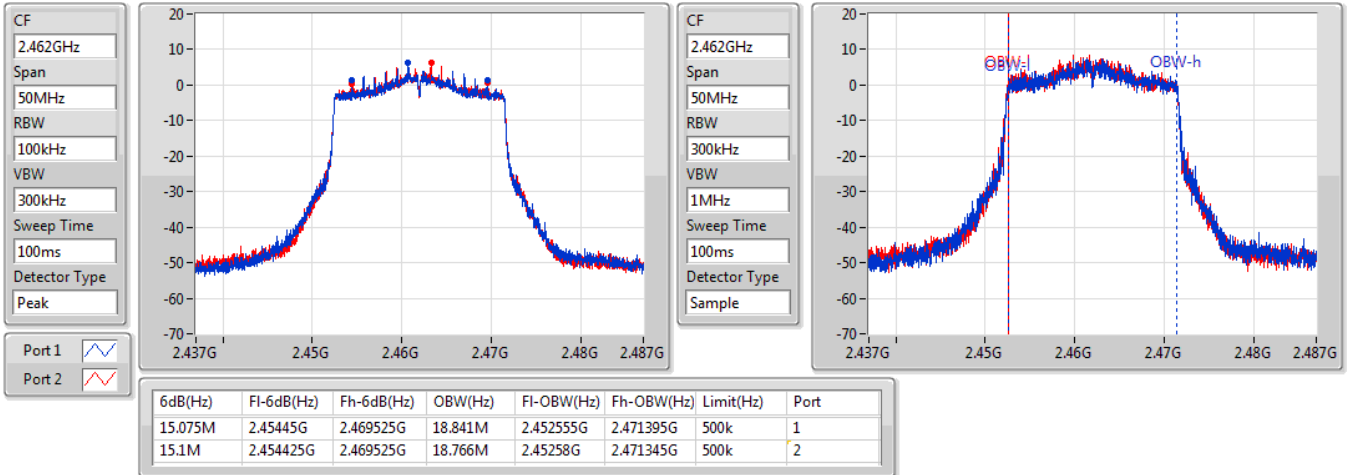

802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


2422MHz

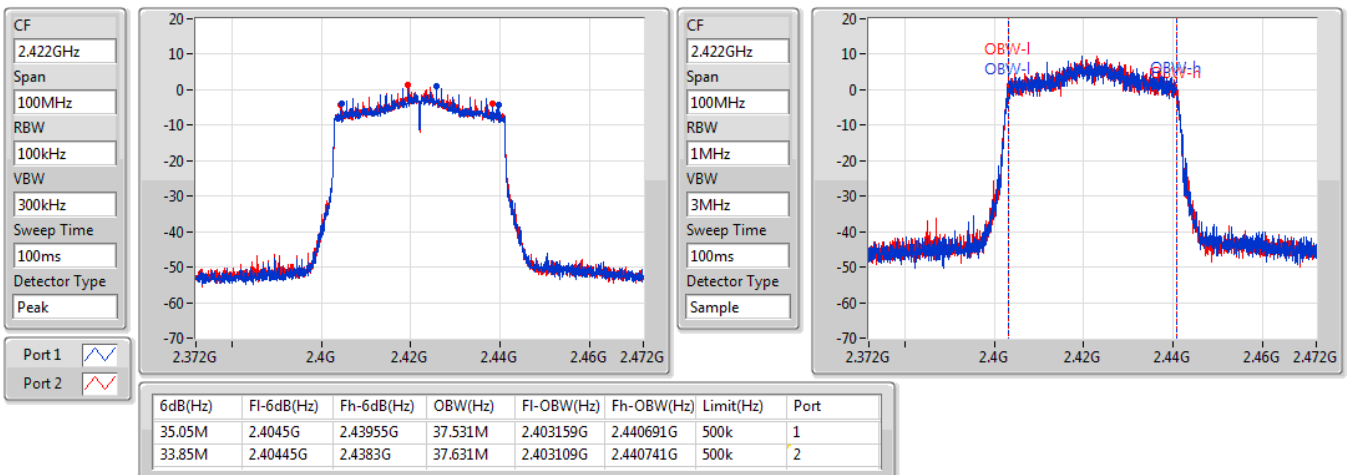

802.11ax HEW40_Nss1,(MCS0)_2TX

EBW


2437MHz

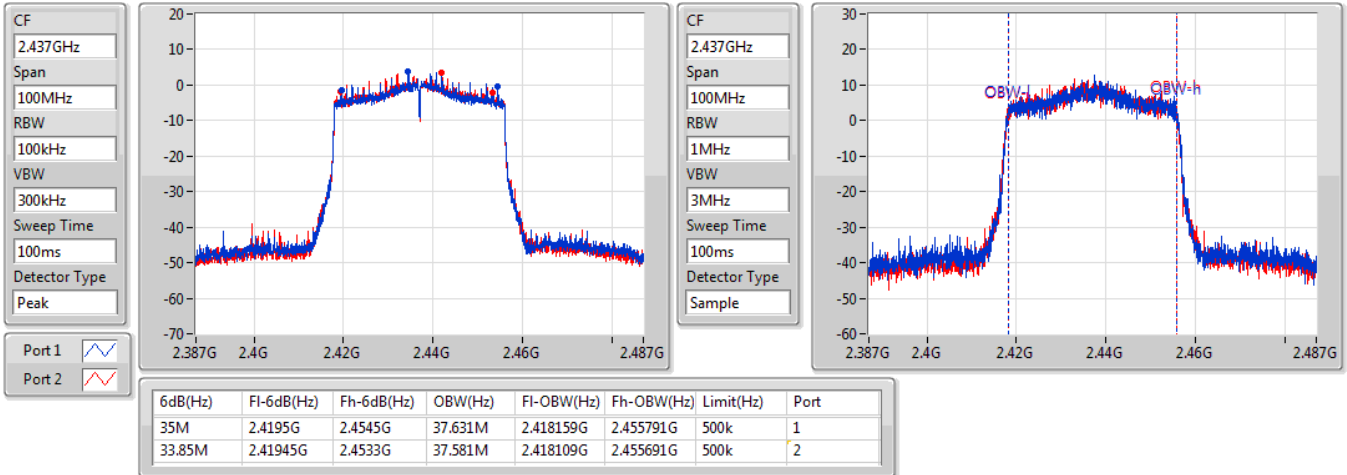

802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

2452MHz

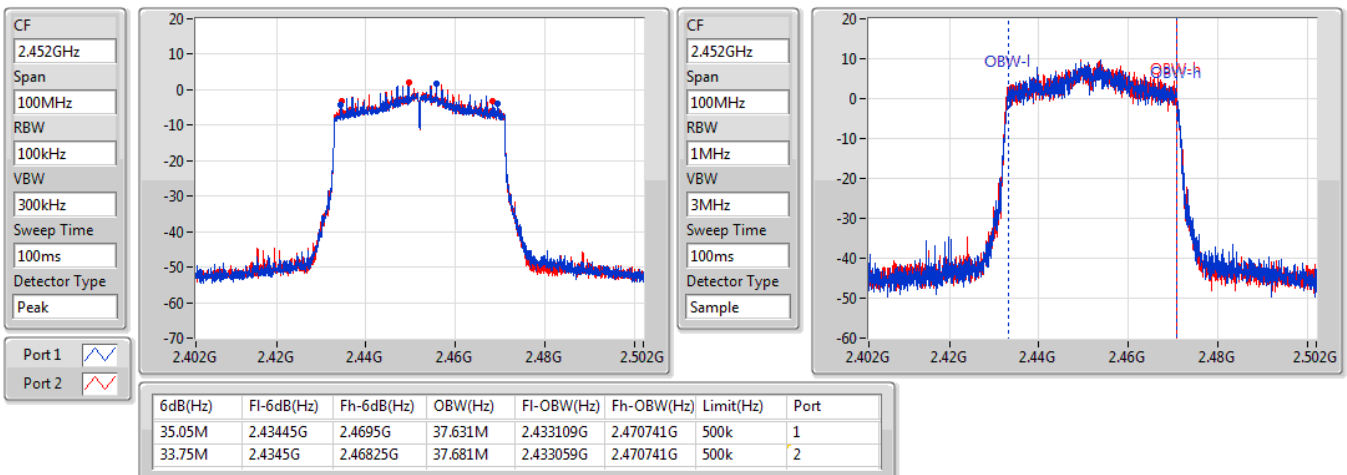

Non-beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	23.17	0.20749
802.11g_Nss1,(6Mbps)_2TX	27.46	0.55719
802.11ax HEW20-OFDMA_Nss1,(MCS0)_2TX	27.80	0.60256
802.11ax HEW40-OFDMA_Nss1,(MCS0)_2TX	26.15	0.41210

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.70	19.68	19.86	22.78	30.00	27.48	36.00
2437MHz	Pass	4.70	19.62	19.71	22.68	30.00	27.38	36.00
2462MHz	Pass	4.70	19.96	20.36	23.17	30.00	27.87	36.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.70	22.12	22.51	25.33	30.00	30.03	36.00
2437MHz	Pass	4.70	24.21	24.67	27.46	30.00	32.16	36.00
2462MHz	Pass	4.70	22.49	22.86	25.69	30.00	30.39	36.00
802.11ax HEW20-OFDMA_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.70	22.34	22.49	25.43	30.00	30.13	36.00
2437MHz	Pass	4.70	24.43	25.12	27.80	30.00	32.50	36.00
2462MHz	Pass	4.70	22.29	22.34	25.33	30.00	30.03	36.00
802.11ax HEW40-OFDMA_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.70	19.92	20.01	22.98	30.00	27.68	36.00
2437MHz	Pass	4.70	22.95	23.32	26.15	30.00	30.85	36.00
2452MHz	Pass	4.70	20.38	20.64	23.52	30.00	28.22	36.00

DG = Directional Gain; Port X = Port X output power

**Beamforming mode****Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ax HEW20-OFDMA-BF_Nss1,(MCS0)_2TX	24.79	0.30130
802.11ax HEW40-OFDMA-BF_Nss1,(MCS0)_2TX	23.14	0.20606

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20-OFDMA-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	7.46	19.33	19.48	22.42	28.54	29.88	36.00
2437MHz	Pass	7.46	21.42	22.11	24.79	28.54	32.25	36.00
2462MHz	Pass	7.46	19.28	19.33	22.32	28.54	29.78	36.00
802.11ax HEW40-OFDMA-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	7.46	16.91	17	19.97	28.54	27.43	36.00
2437MHz	Pass	7.46	19.94	20.31	23.14	28.54	30.60	36.00
2452MHz	Pass	7.46	17.37	17.63	20.51	28.54	27.97	36.00

Port X = Port X output power

DG = Directional Gain = $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$

Ant. No.	Antenna Gain (dBi)
1	4.7
2	4.2
Directional Gain (dBi)	7.46

Non-beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	20.66	0.11641
802.11g_Nss1,(6Mbps)_2TX	22.53	0.17906
802.11ax HEW20-OFDMA_Nss1,(MCS0)_2TX	21.88	0.15417
802.11ax HEW40-OFDMA_Nss1,(MCS0)_2TX	19.56	0.09036

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.70	17.05	17.33	20.20	-	24.90	-
2437MHz	Pass	4.70	17.01	17.19	20.11	-	24.81	-
2462MHz	Pass	4.70	17.48	17.82	20.66	-	25.36	-
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.70	16.65	17.02	19.85	-	24.55	-
2437MHz	Pass	4.70	19.41	19.62	22.53	-	27.23	-
2462MHz	Pass	4.70	17.12	17.34	20.24	-	24.94	-
802.11ax HEW20-OFDMA_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	4.70	15.65	15.72	18.70	-	23.40	-
2437MHz	Pass	4.70	18.71	19.02	21.88	-	26.58	-
2462MHz	Pass	4.70	15.42	15.68	18.56	-	23.26	-
802.11ax HEW40-OFDMA_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	4.70	13.82	13.93	16.89	-	21.59	-
2437MHz	Pass	4.70	16.45	16.65	19.56	-	24.26	-
2452MHz	Pass	4.70	14.26	14.56	17.42	-	22.12	-

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference

Beamforming mode
Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ax HEW20-OFDMA-BF_Nss1,(MCS0)_2TX	18.87	0.07709
802.11ax HEW40-OFDMA-BF_Nss1,(MCS0)_2TX	16.55	0.04519

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20-OFDMA-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	7.46	12.64	12.71	15.69	-	23.15	-
2437MHz	Pass	7.46	15.7	16.01	18.87	-	26.33	-
2462MHz	Pass	7.46	12.41	12.67	15.55	-	23.01	-
802.11ax HEW40-OFDMA-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	7.46	10.81	10.92	13.88	-	21.34	-
2437MHz	Pass	7.46	13.44	13.64	16.55	-	24.01	-
2452MHz	Pass	7.46	11.25	11.55	14.41	-	21.87	-

Port X = Port X output power

DG = Directional Gain = $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$

Ant. No.	Antenna Gain (dBi)
1	4.7
2	4.2
Directional Gain (dBi)	7.46

Note : Conducted average output power is for reference

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-3.05
802.11g_Nss1,(6Mbps)_2TX	-4.01
802.11ax HEW20-OFDMA_Nss1,(MCS0)_2TX	-3.33
802.11ax HEW40-OFDMA_Nss1,(MCS0)_2TX	-7.46

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-5.67	-5.22	-3.26	6.54
2437MHz	Pass	7.46	-6.04	-6.18	-3.27	6.54
2462MHz	Pass	7.46	-4.88	-5.91	-3.05	6.54
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-9.14	-9.16	-6.57	6.54
2437MHz	Pass	7.46	-6.73	-6.42	-4.01	6.54
2462MHz	Pass	7.46	-9.85	-8.16	-6.43	6.54
802.11ax HEW20-OFDMA_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-9.74	-8.65	-6.32	6.54
2437MHz	Pass	7.46	-5.92	-6.28	-3.33	6.54
2462MHz	Pass	7.46	-9.68	-9.37	-6.68	6.54
802.11ax HEW40-OFDMA_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.46	-13.25	-12.48	-10.49	6.54
2437MHz	Pass	7.46	-9.64	-9.39	-7.46	6.54
2452MHz	Pass	7.46	-12.73	-11.55	-9.92	6.54

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

RBW = 3kHz;


DG = Directional Gain = $10 \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$

Ant. No.	Antenna Gain (dBi)
1	4.7
2	4.2
Directional Gain (dBi)	7.46

802.11b_Nss1,(1Mbps)_2TX

PSD


2412MHz

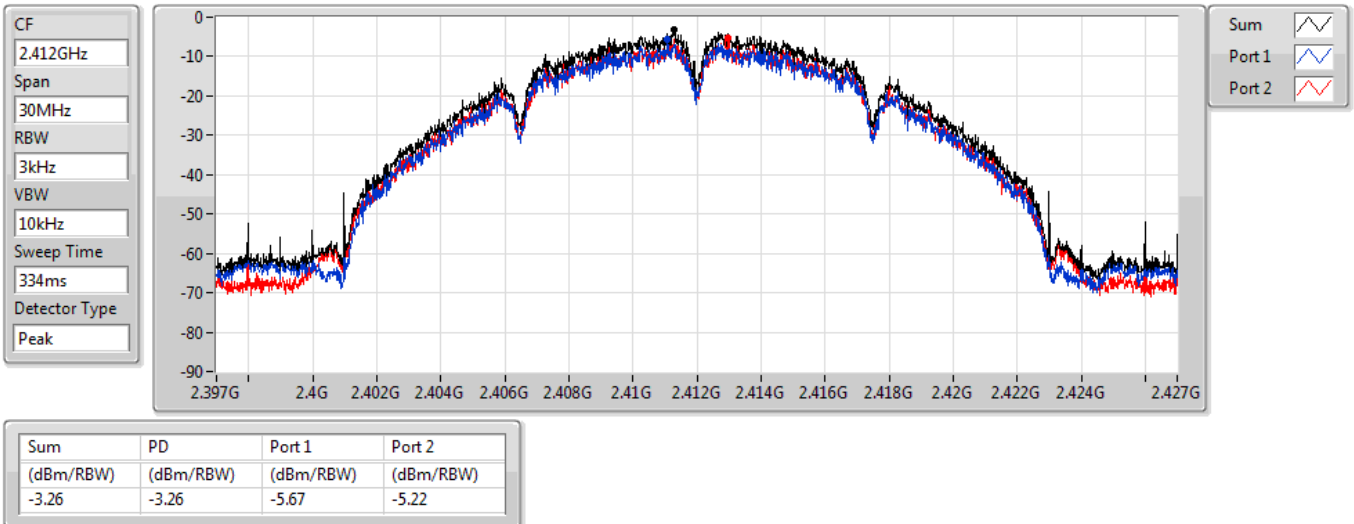

802.11b_Nss1,(1Mbps)_2TX

PSD


2437MHz

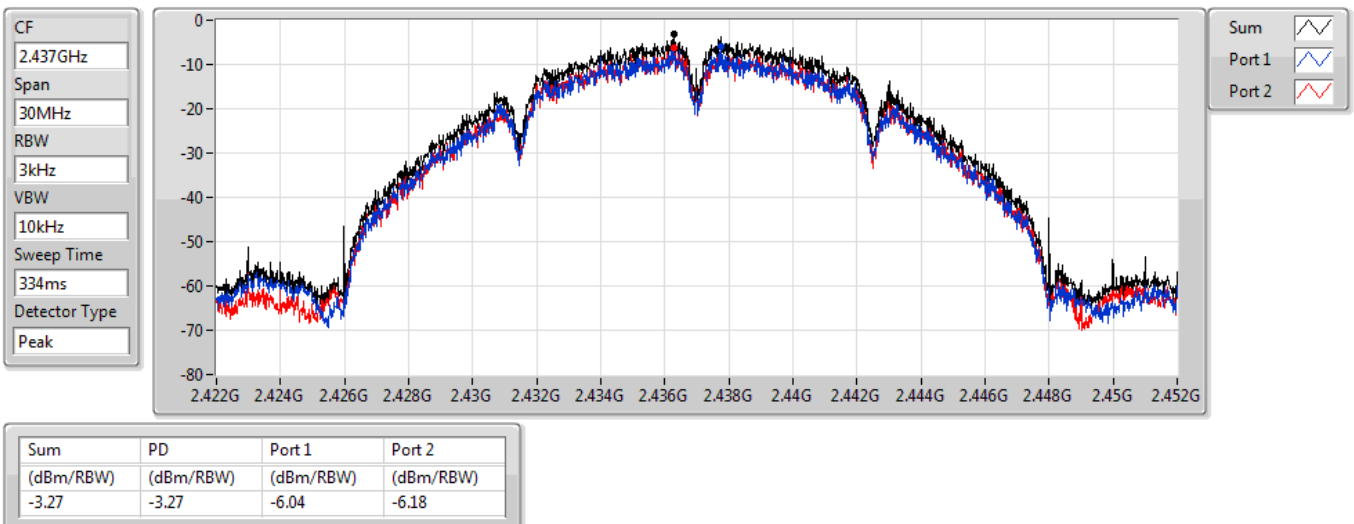

802.11b_Nss1,(1Mbps)_2TX

PSD


2462MHz

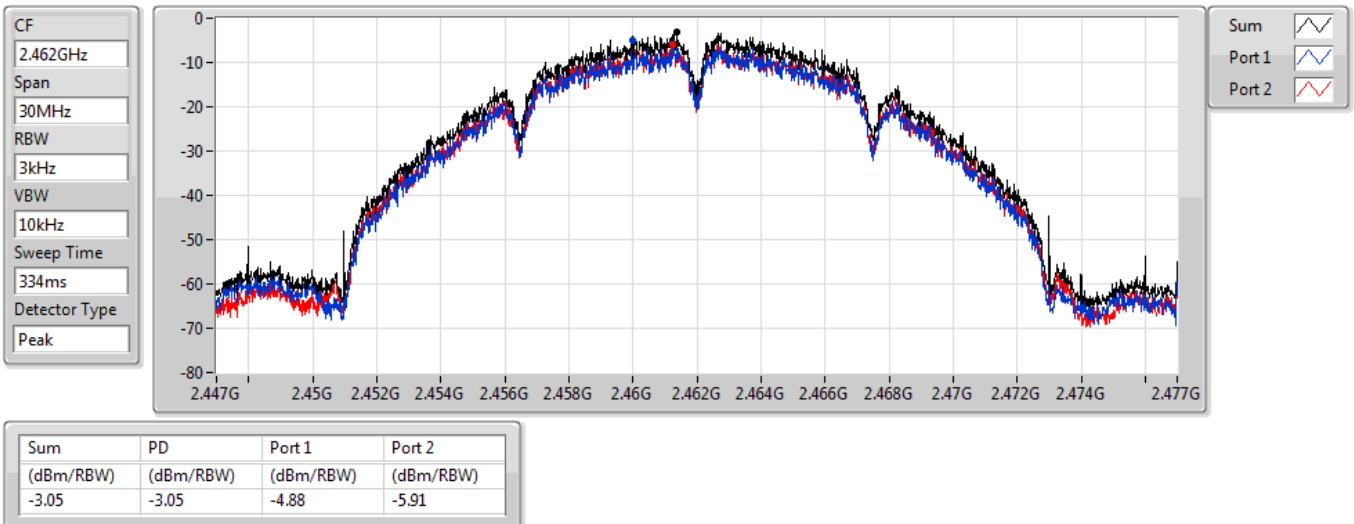

802.11g_Nss1,(6Mbps)_2TX

PSD


2412MHz

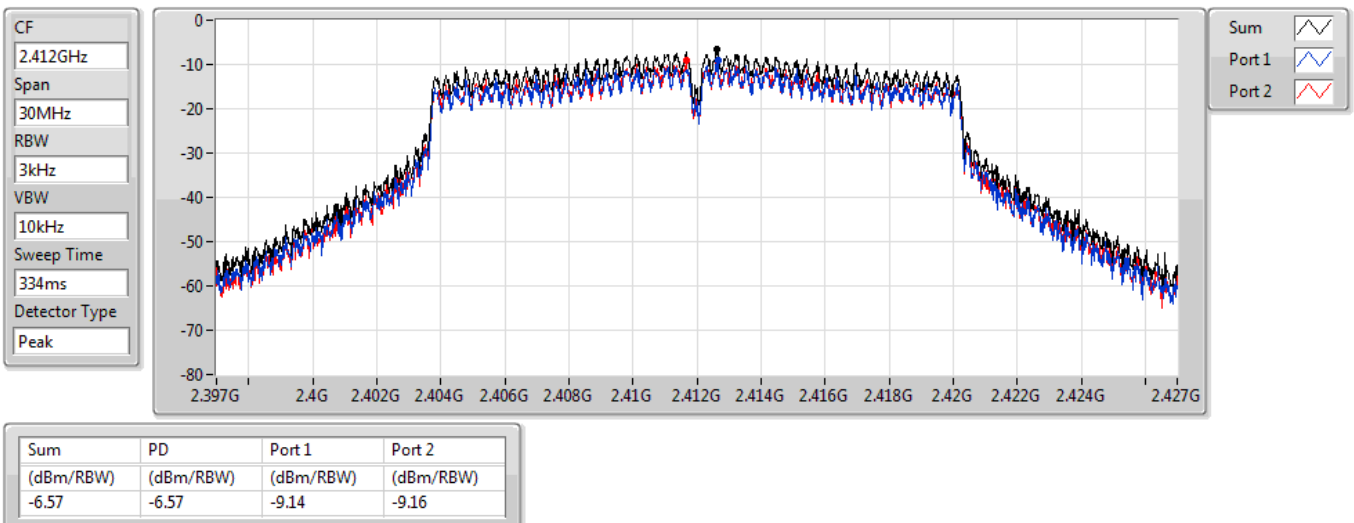

802.11g_Nss1,(6Mbps)_2TX

PSD


2437MHz

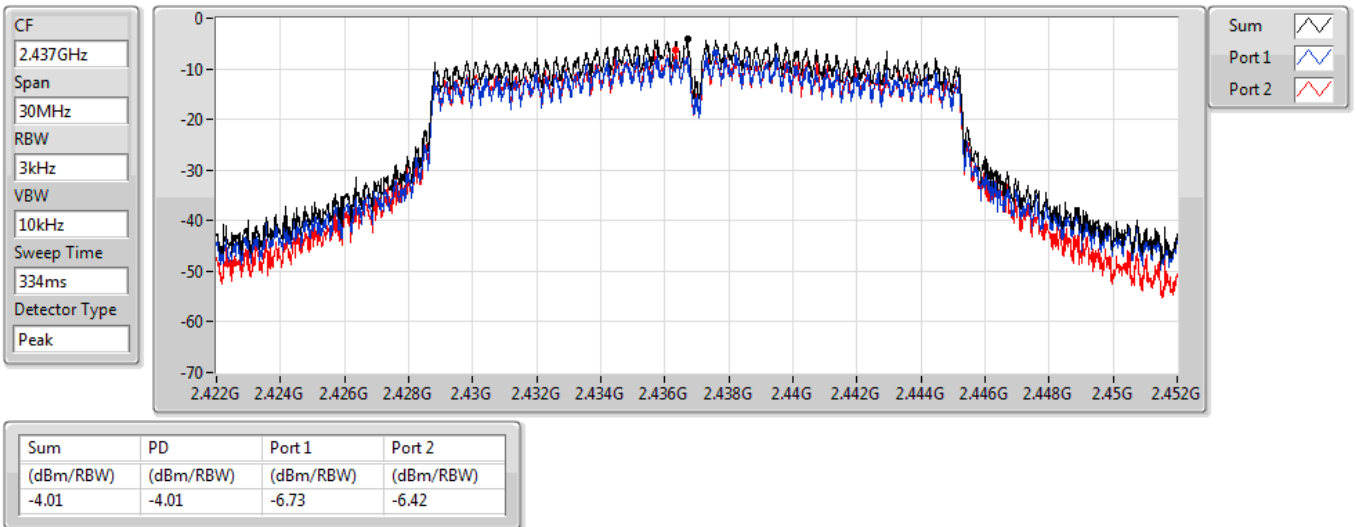

802.11g_Nss1,(6Mbps)_2TX

PSD


2462MHz

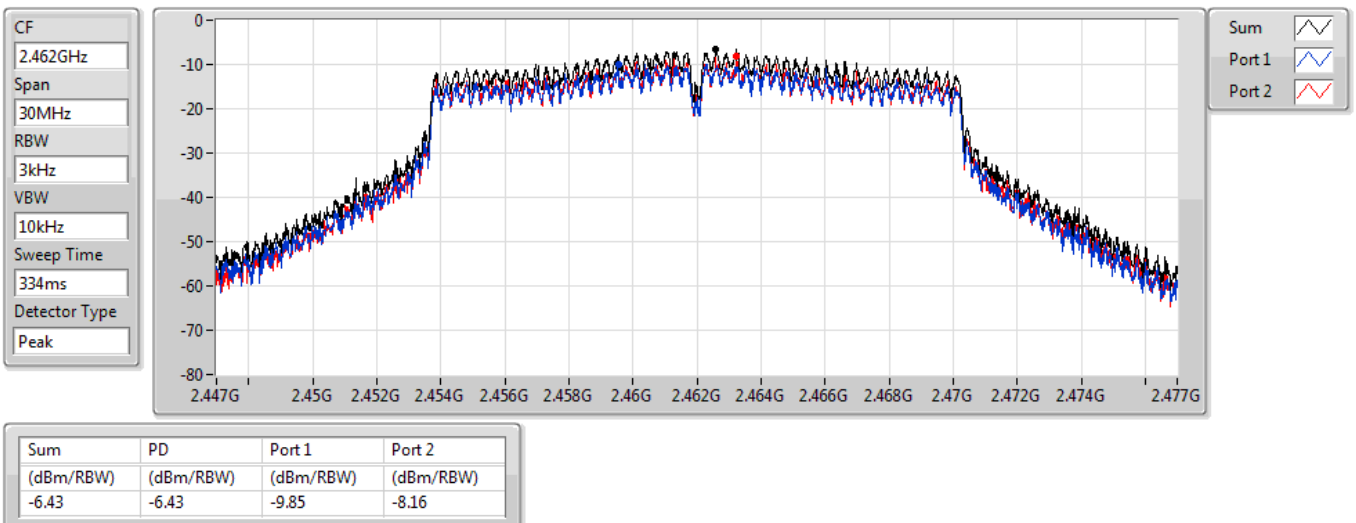

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


2412MHz

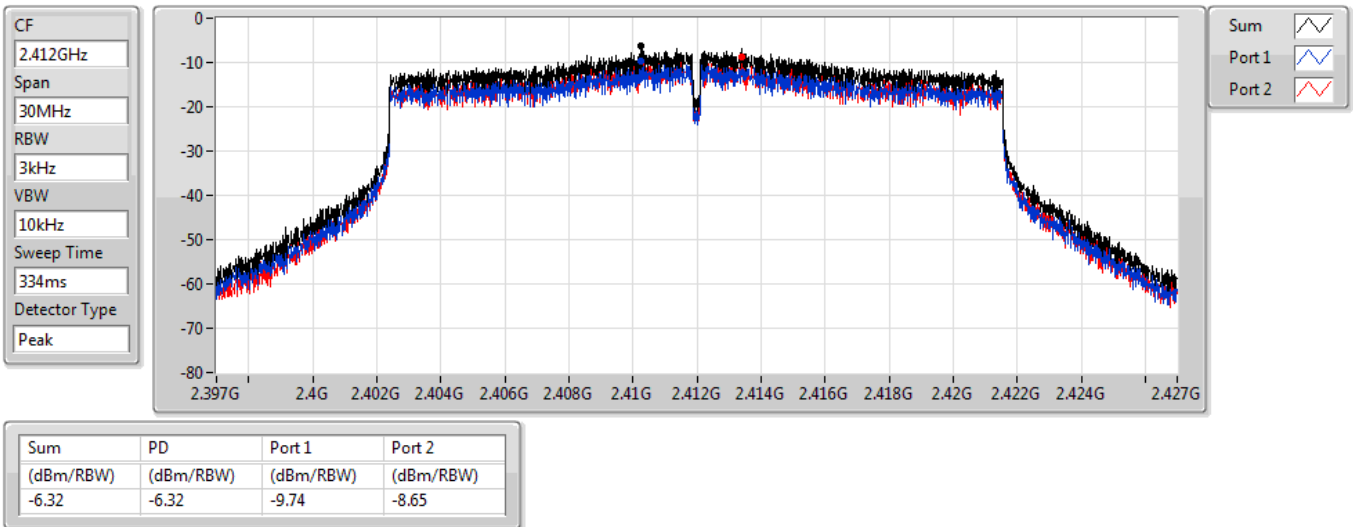

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


2437MHz

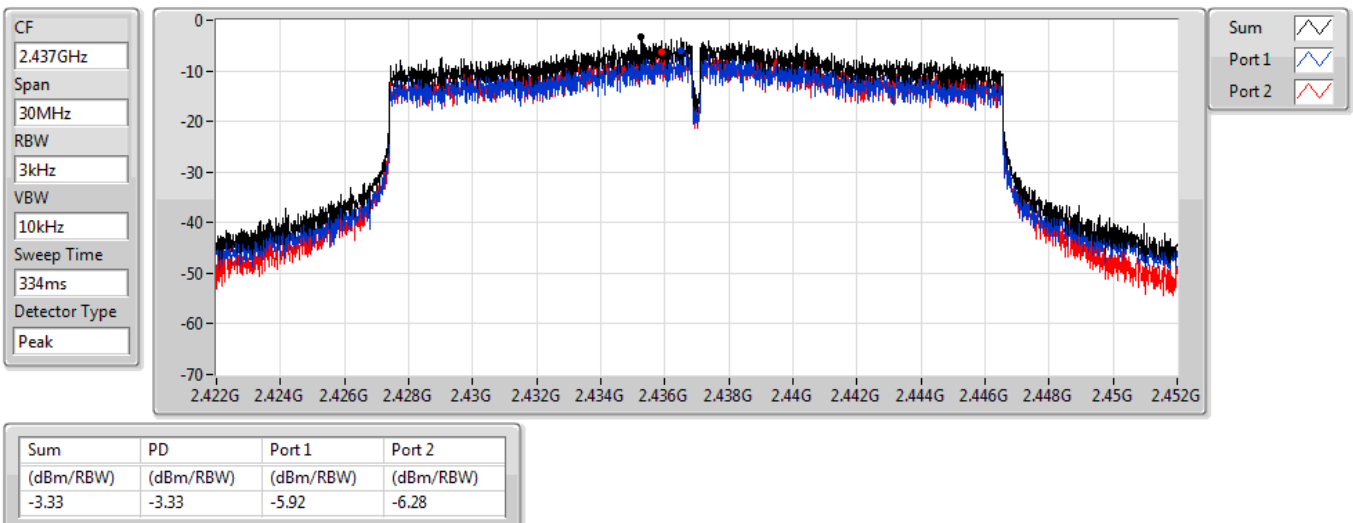

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


2462MHz

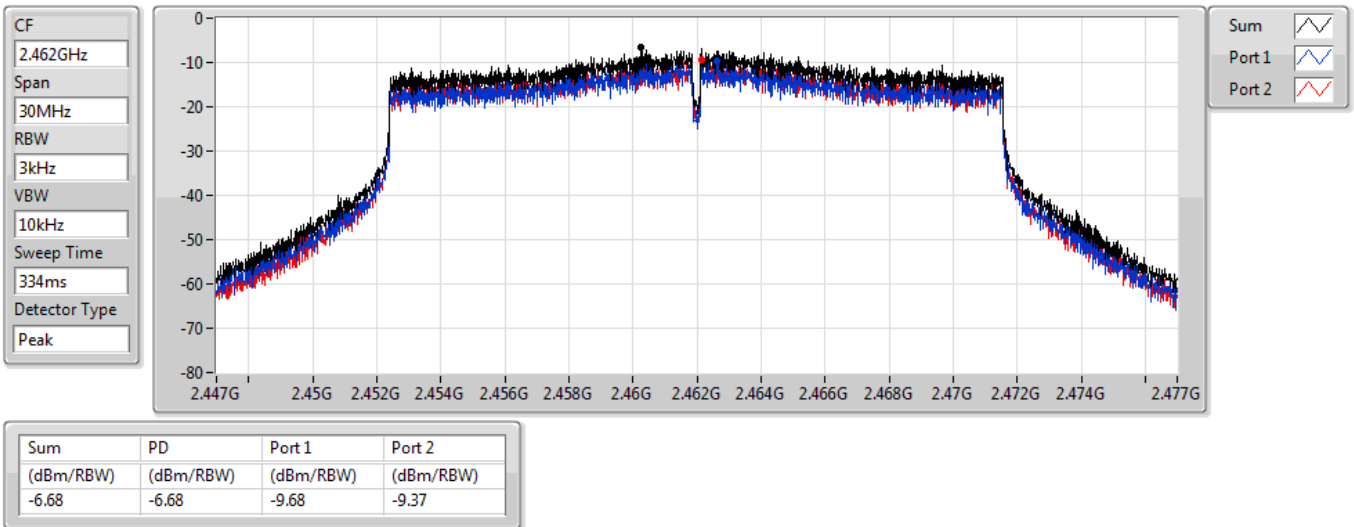

802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


2422MHz

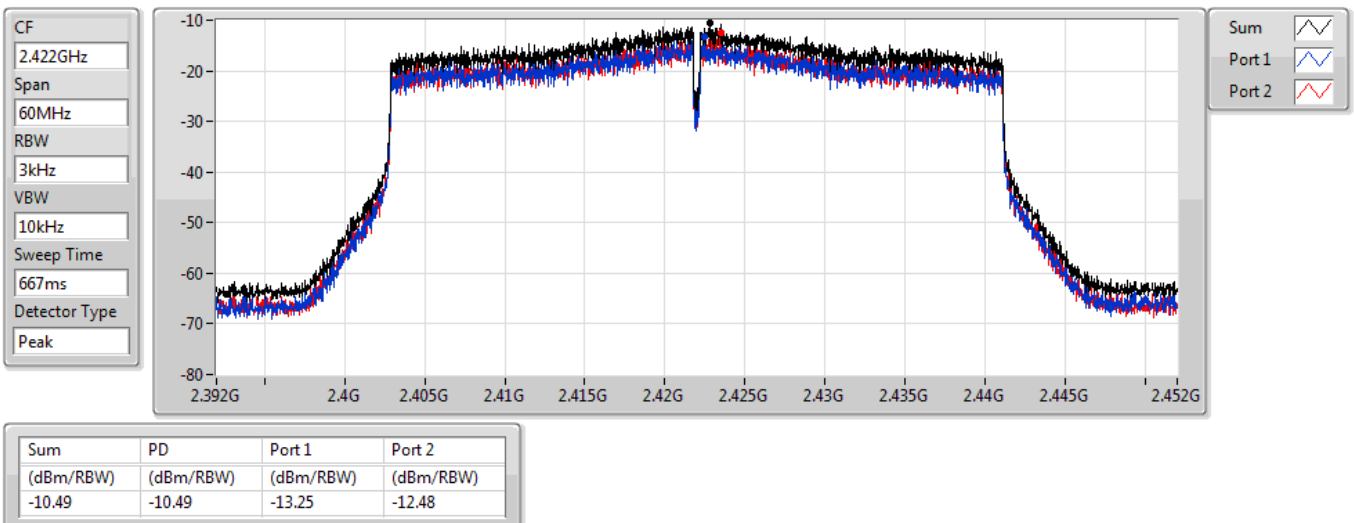

802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


2437MHz

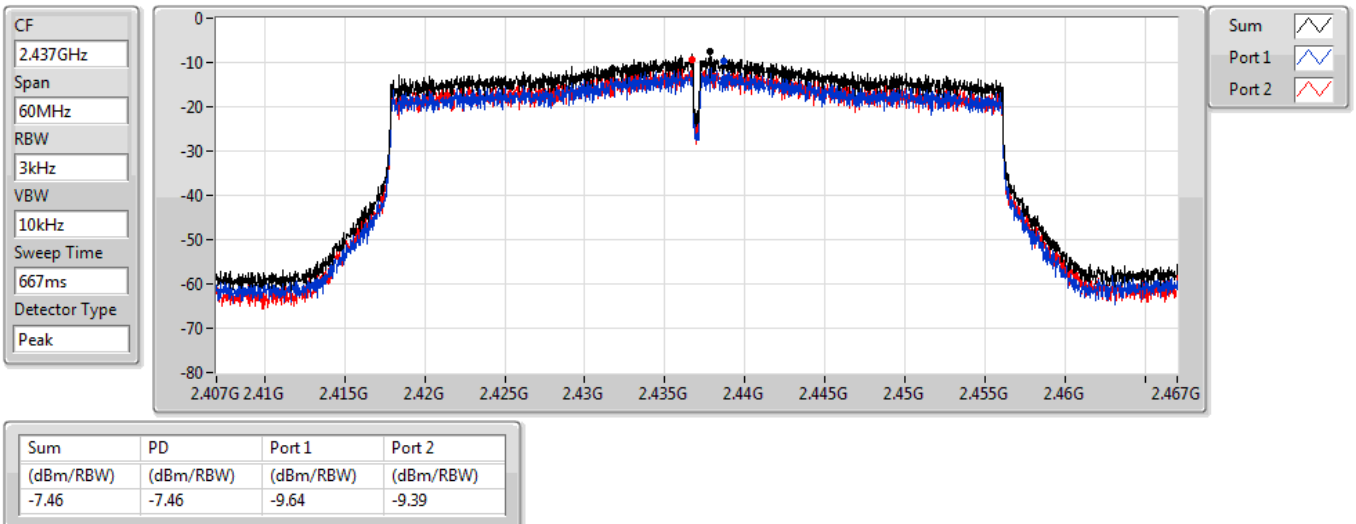

802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

2452MHz

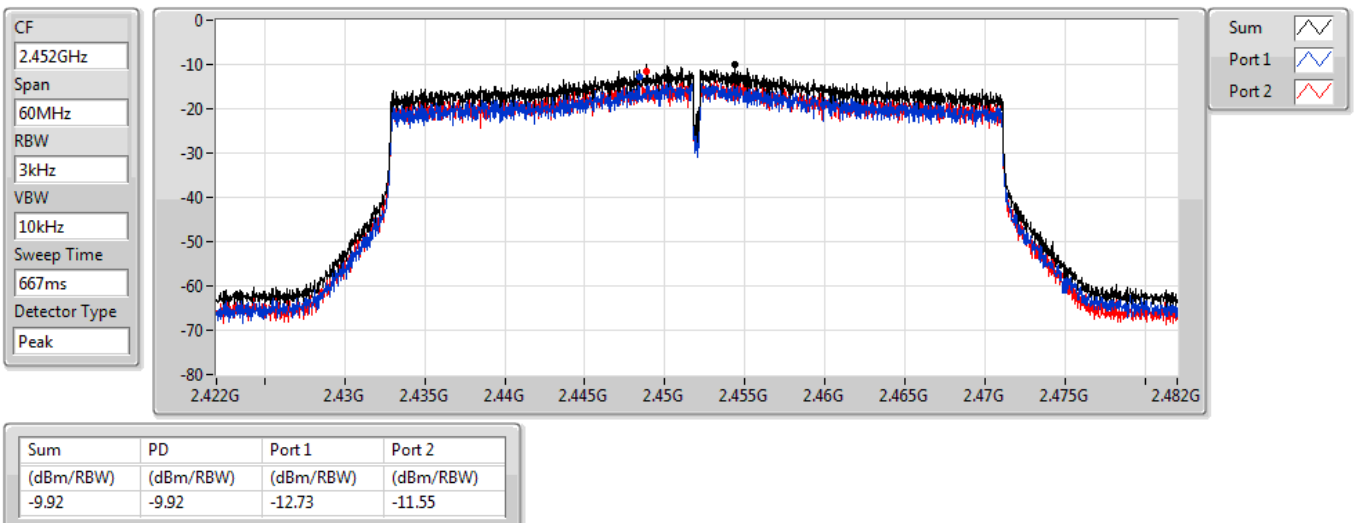



Configuration 1: Adapter mode

Unwanted Emissions (Below 1GHz)

Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2437																																																																						
Polarization	Horizontal																																																																								
Test By :Brad Wu Temperature(°C):24 Humidity(%):63																																																																									
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>125.11</td><td>34.41</td><td>43.50</td><td>-9.09</td><td>44.82</td><td>-10.41</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>2</td><td>248.85</td><td>34.24</td><td>46.00</td><td>-11.76</td><td>44.06</td><td>-9.82</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>3</td><td>444.88</td><td>35.39</td><td>46.00</td><td>-10.61</td><td>39.27</td><td>-3.88</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>4</td><td>500.11</td><td>34.71</td><td>46.00</td><td>-11.29</td><td>37.46</td><td>-2.75</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>5</td><td>625.25</td><td>34.28</td><td>46.00</td><td>-11.72</td><td>34.04</td><td>0.24</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>875.74</td><td>39.13</td><td>46.00</td><td>-6.87</td><td>34.63</td><td>4.50</td><td>Peak</td><td>---</td><td>---</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	125.11	34.41	43.50	-9.09	44.82	-10.41	Peak	---	---	2	248.85	34.24	46.00	-11.76	44.06	-9.82	Peak	---	---	3	444.88	35.39	46.00	-10.61	39.27	-3.88	Peak	---	---	4	500.11	34.71	46.00	-11.29	37.46	-2.75	Peak	---	---	5	625.25	34.28	46.00	-11.72	34.04	0.24	Peak	---	---	6	875.74	39.13	46.00	-6.87	34.63	4.50	Peak	---	---
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	125.11	34.41	43.50	-9.09	44.82	-10.41	Peak	---	---																																																																
2	248.85	34.24	46.00	-11.76	44.06	-9.82	Peak	---	---																																																																
3	444.88	35.39	46.00	-10.61	39.27	-3.88	Peak	---	---																																																																
4	500.11	34.71	46.00	-11.29	37.46	-2.75	Peak	---	---																																																																
5	625.25	34.28	46.00	-11.72	34.04	0.24	Peak	---	---																																																																
6	875.74	39.13	46.00	-6.87	34.63	4.50	Peak	---	---																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																									



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			



Unwanted Emission (Above 1GHz) for 11b

Modulation	11b	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Modulation	11b	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Modulation	11b	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			



Modulation	11b	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			



Modulation	11b	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Unwanted Emissions (Above 1GHz) for 11g

Modulation	11g	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			



Modulation	11g		Test Freq. (MHz)		2412	
Polarization	Vertical					
Test By :Brad Wu Temperature(°C):24 Humidity(%):65						
Level (dBUV/m) </						



Modulation	11g	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	11g	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Modulation	11g	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Unwanted Emissions (Above 1GHz) for ax HE20-OFDMA

Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2412
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			




Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2412
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			

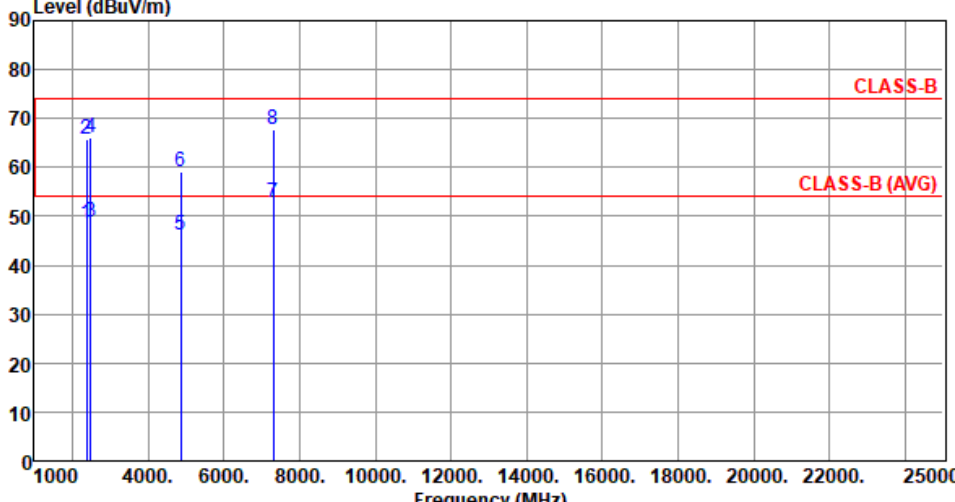

Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2437						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):24 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	2390.00	48.55	54.00	-5.45	50.04	-1.49	Average	119	6
2	2390.00	65.59	74.00	-8.41	67.08	-1.49	Peak	119	6
3	2483.50	48.71	54.00	-5.29	50.29	-1.58	Average	119	6
4	2483.50	66.00	74.00	-8.00	67.58	-1.58	Peak	119	6
5	4874.00	46.03	54.00	-7.97	40.70	5.33	Average	233	5
6	4874.00	59.02	74.00	-14.98	53.69	5.33	Peak	233	5
7	7311.00	52.67	54.00	-1.33	41.78	10.89	Average	242	345
8	7311.00	67.62	74.00	-6.38	56.73	10.89	Peak	242	345

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2462
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			



Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2462
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m)			



Unwanted Emissions (Above 1GHz) for ax HE40-OFDMA

Modulation	ax HE40-OFDMA	Test Freq. (MHz)	2422
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			



Modulation	ax HE40-OFDMA	Test Freq. (MHz)	2422
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE40-OFDMA	Test Freq. (MHz)	2437
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m) </			



Modulation	ax HE40-OFDMA	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE40-OFDMA	Test Freq. (MHz)	2452
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) <			



Modulation	ax HE40-OFDMA	Test Freq. (MHz)	2452
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):65			
Level (dBUV/m) </			



Configuration 2: POE mode

Unwanted Emissions (Below 1GHz)

Modulation	ax HE20-OFDMA		Test Freq. (MHz)		2437	
Polarization	Horizontal					
Test By :Brad Wu Temperature(°C):24 Humidity(%):63						
Level (dBUV/m)						




Modulation	ax HE20-OFDMA	Test Freq. (MHz)	2437
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):24 Humidity(%):63			
Level (dBuV/m) </			

802.11b_Nss1,(1Mbps)_2TX

CSENdB


2412MHz

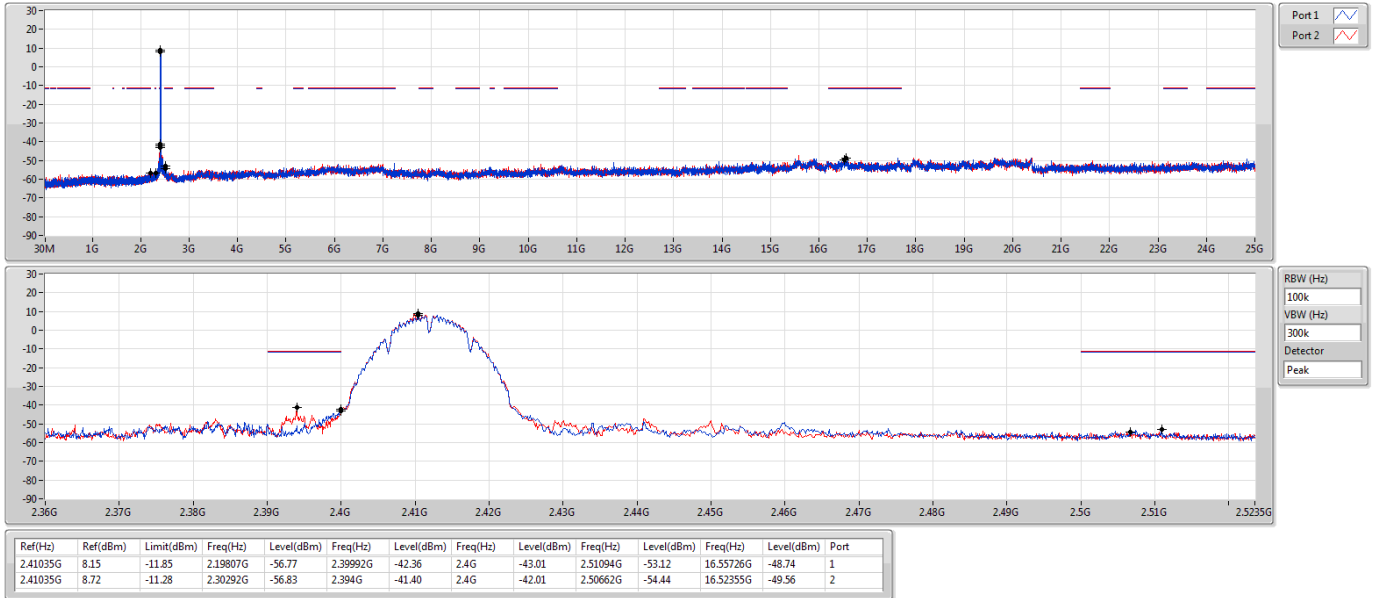

802.11b_Nss1,(1Mbps)_2TX

CSENdB


2437MHz

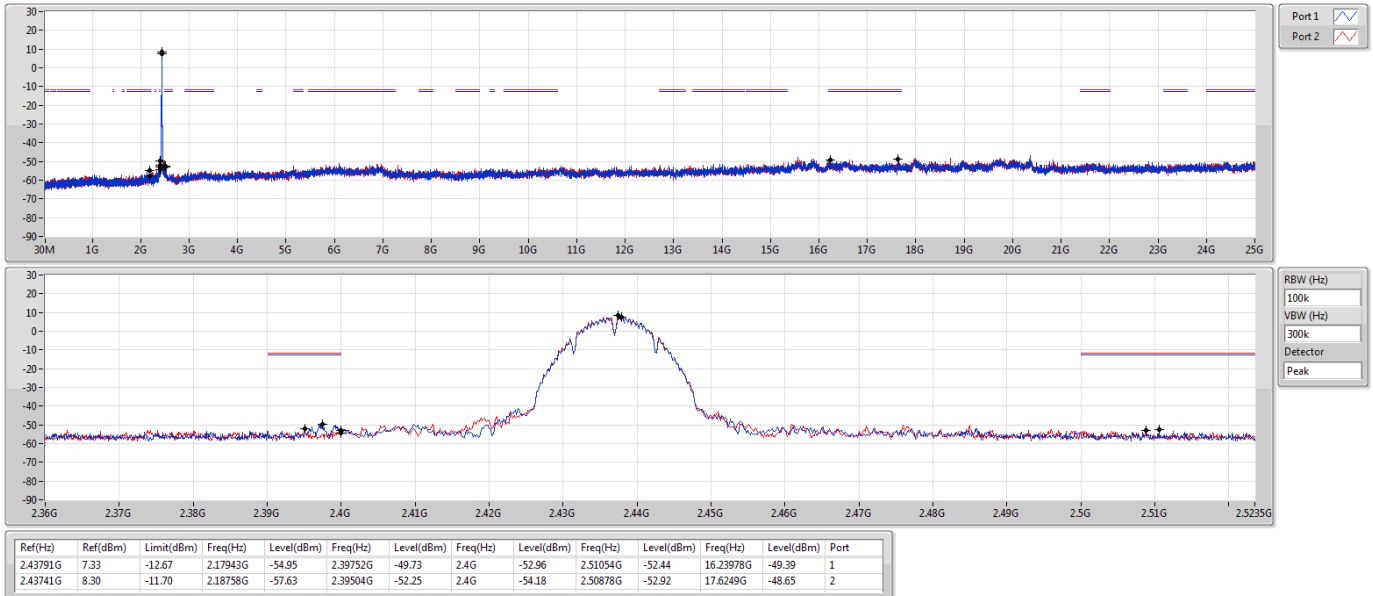

802.11b_Nss1,(1Mbps)_2TX

CSEndB


2462MHz

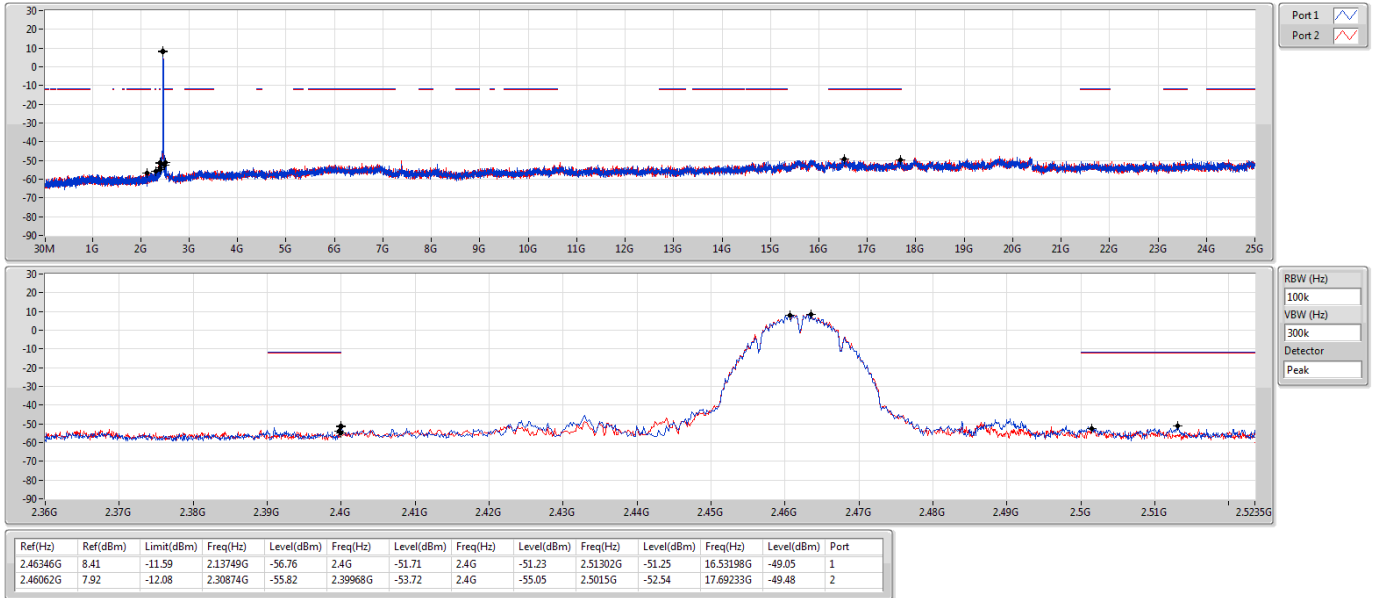

802.11g_Nss1,(6Mbps)_2TX

CSEndB


2412MHz

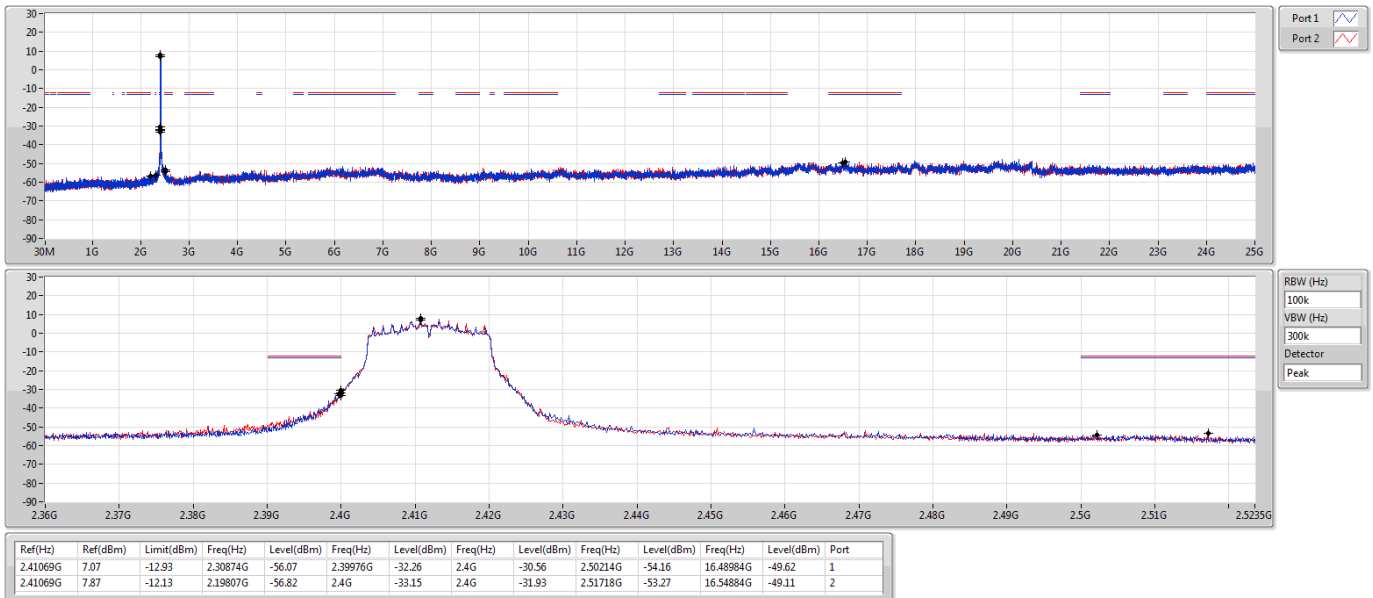

802.11g_Nss1,(6Mbps)_2TX

CSEndB


2437MHz

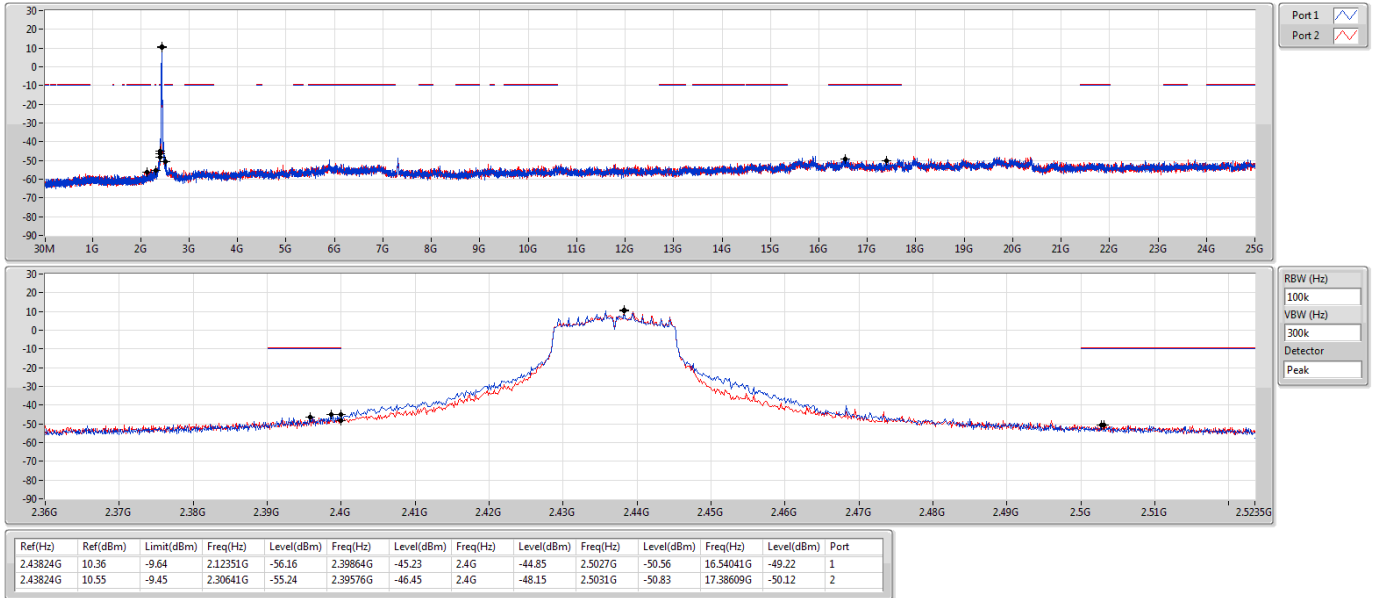

802.11g_Nss1,(6Mbps)_2TX

CSEndB


2462MHz

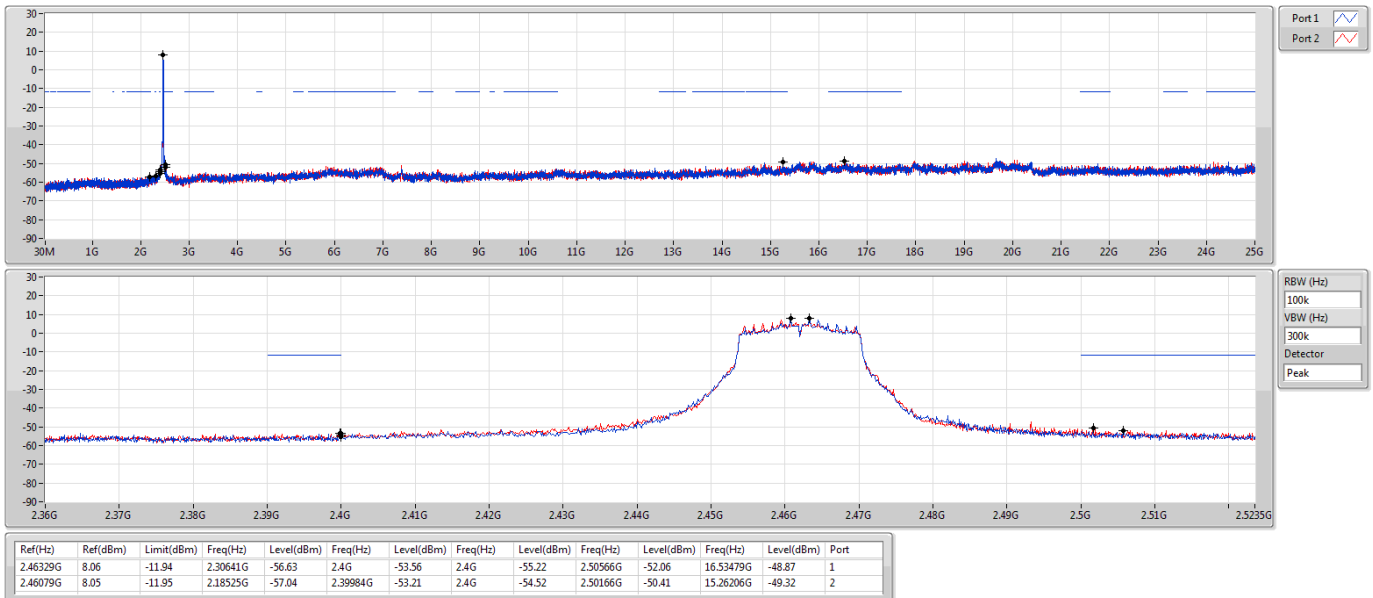

802.11ax HEW20_Nss1,(MCS0)_2TX

CSEndB


2412MHz

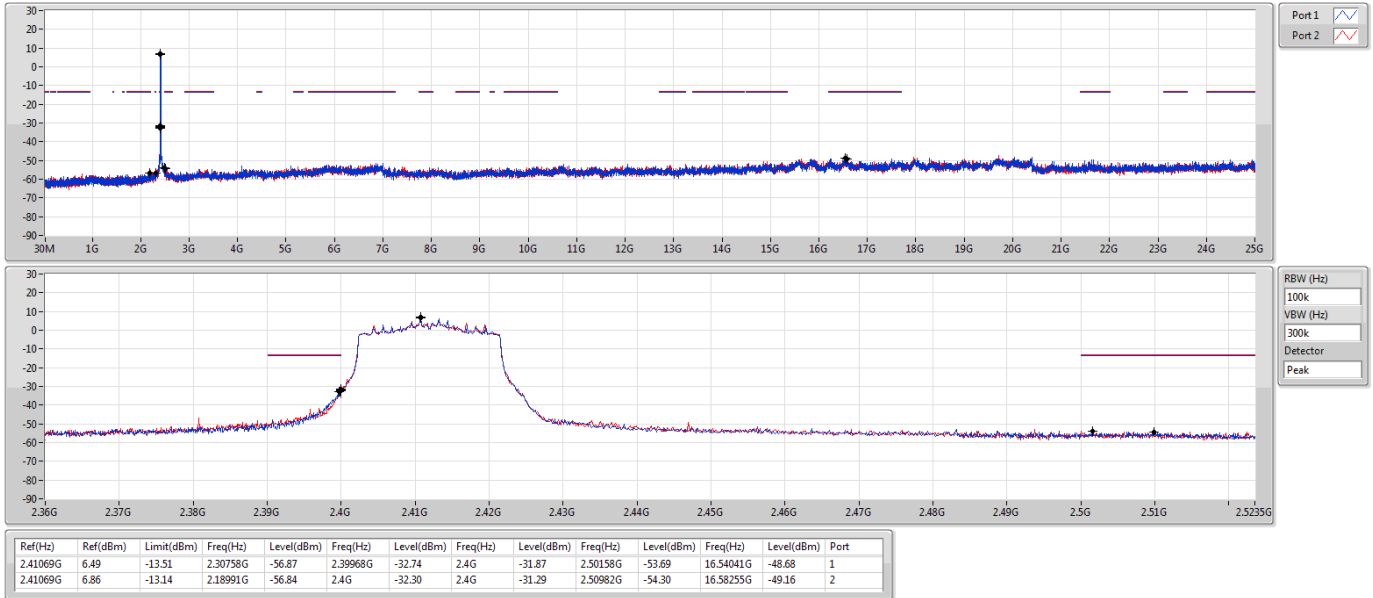

802.11ax HEW20_Nss1,(MCS0)_2TX

CSEndB

2437MHz

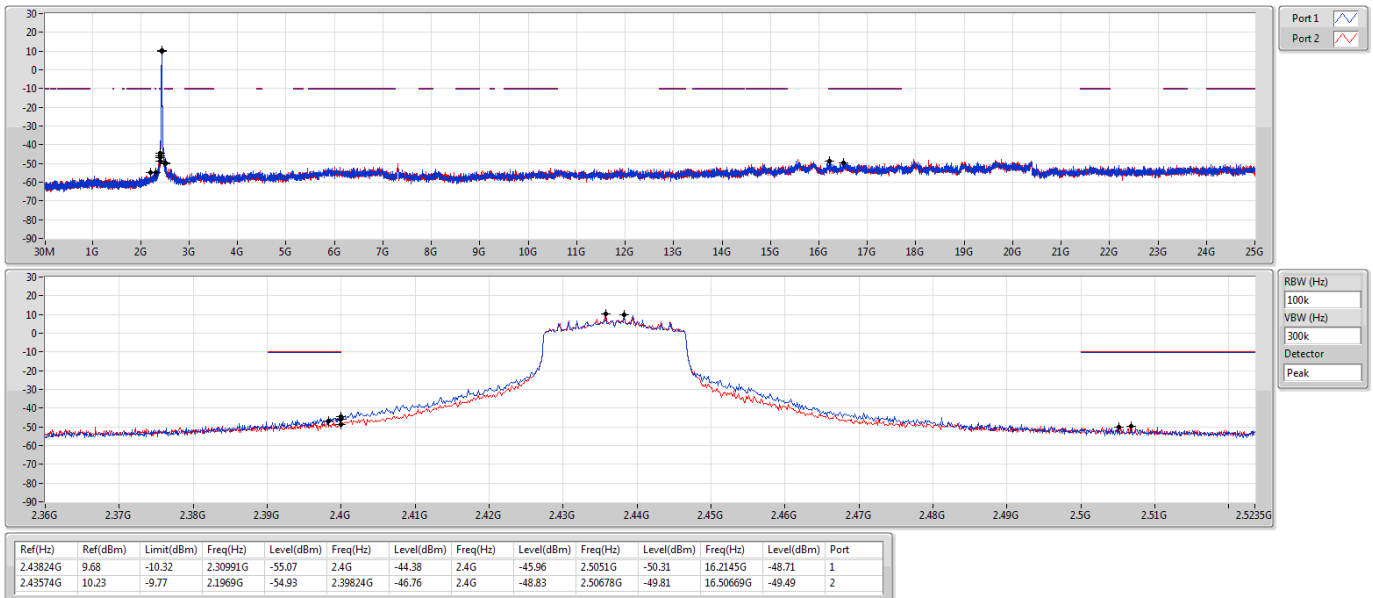




802.11ax HEW20_Nss1,(MCS0)_2TX

CSEndB


2462MHz

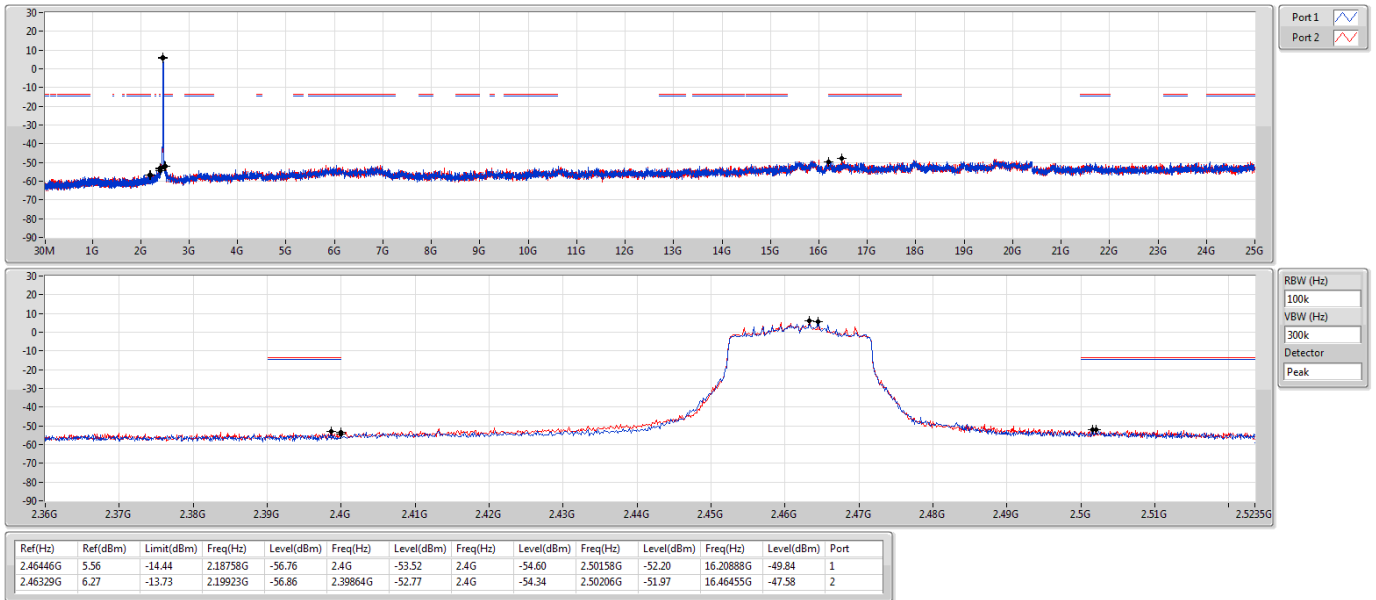

802.11ax HEW40_Nss1,(MCS0)_2TX

CSEndB

2422MHz

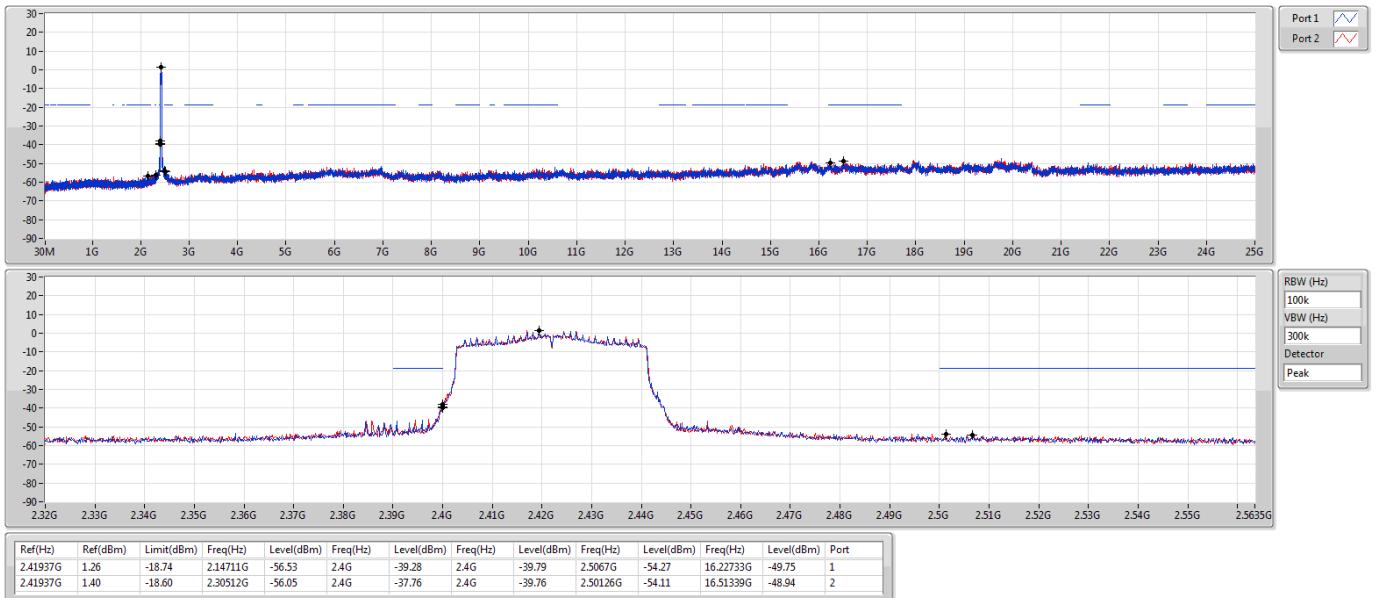




802.11ax HEW40_Nss1,(MCS0)_2TX

CSEndB


2437MHz

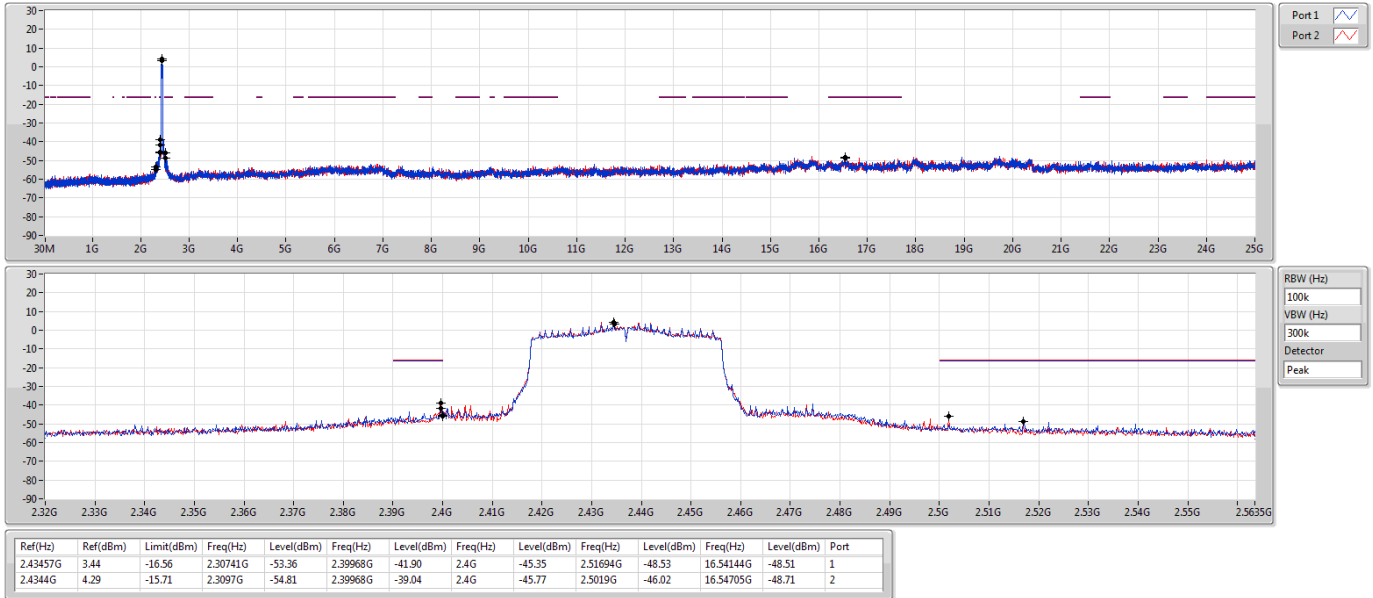

802.11ax HEW40_Nss1,(MCS0)_2TX

CSEndB

2452MHz

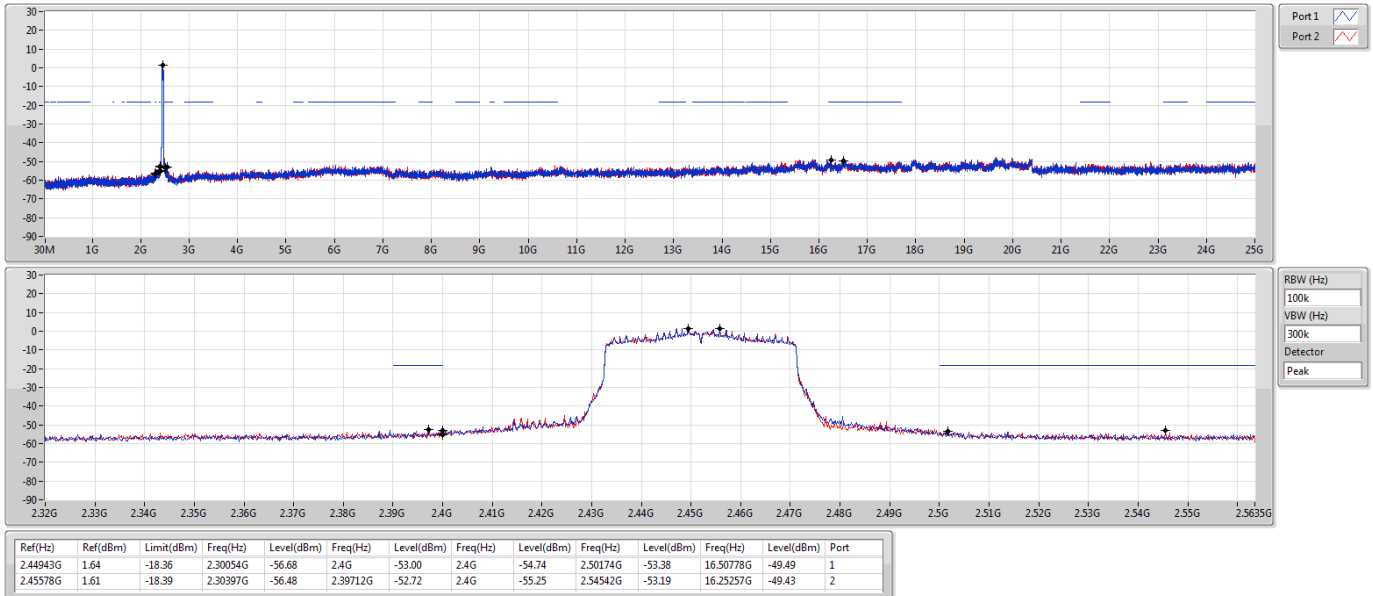




Configuration 1: Adapter mode

Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao

Temperature: 20°C

Humidity: 59%

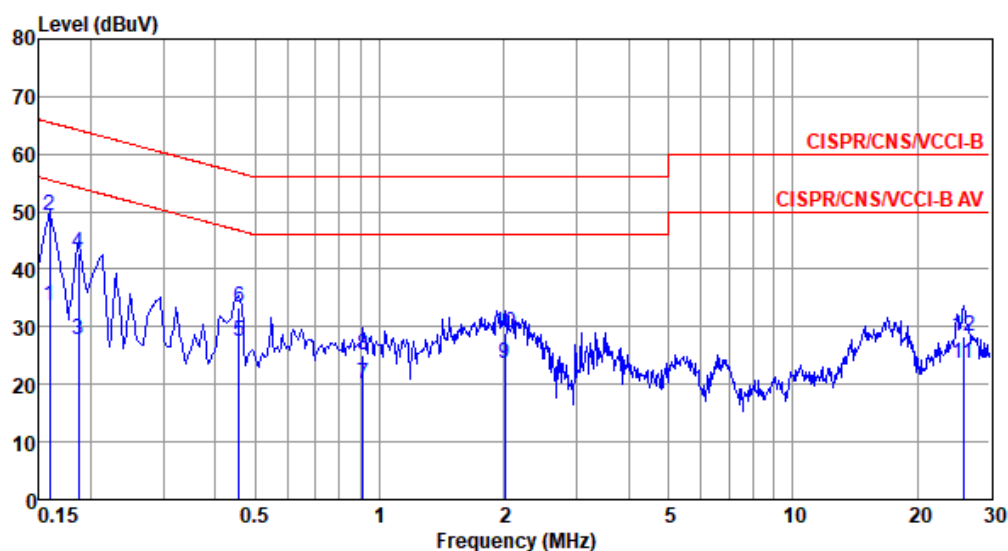

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
			dBuV	dB	dBuV		dB		
1	0.159	33.74	55.52	-21.78	23.78	9.68	0.08	0.20	Average
2*	0.159	49.41	65.52	-16.11	39.45	9.68	0.08	0.20	QP
3	0.186	27.71	54.20	-26.49	17.74	9.68	0.08	0.21	Average
4	0.186	42.94	64.20	-21.26	32.97	9.68	0.08	0.21	QP
5	0.456	27.31	46.76	-19.45	17.19	9.67	0.09	0.36	Average
6	0.456	33.31	56.76	-23.45	23.19	9.67	0.09	0.36	QP
7	0.914	20.02	46.00	-25.98	9.82	9.68	0.15	0.37	Average
8	0.914	25.08	56.00	-30.92	14.88	9.68	0.15	0.37	QP
9	2.012	23.55	46.00	-22.45	13.27	9.69	0.20	0.39	Average
10	2.012	28.91	56.00	-27.09	18.63	9.69	0.20	0.39	QP
11	25.864	23.76	50.00	-26.24	12.64	9.69	0.71	0.72	Average
12	25.864	28.45	60.00	-31.55	17.33	9.69	0.71	0.72	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



AC Power Line Conducted Emissions


Appendix F

Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	2437
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 20°C

Humidity: 59%

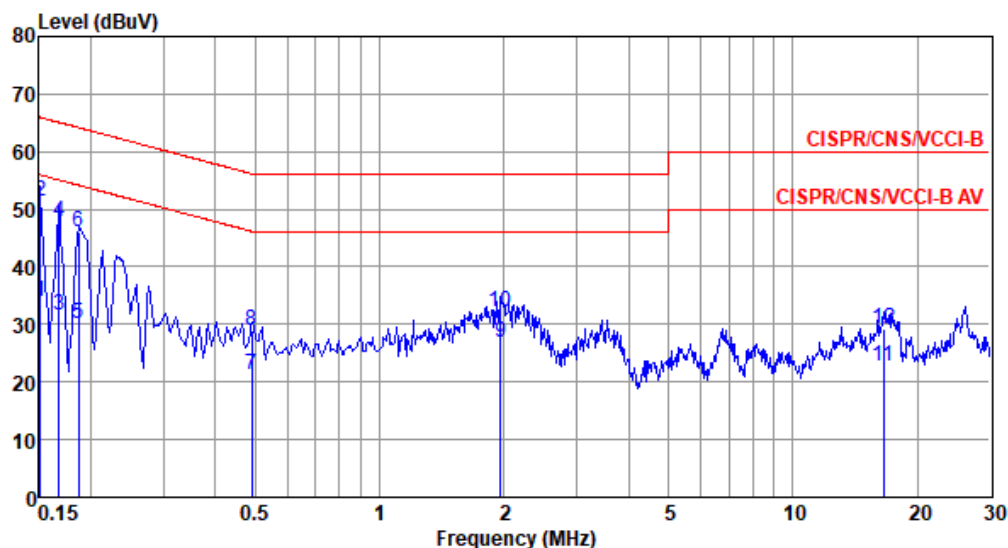

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.151	33.98	55.96	-21.98	24.13	9.61	0.08	0.16	Average
2*	0.151	51.46	65.96	-14.50	41.61	9.61	0.08	0.16	QP
3	0.168	31.52	55.08	-23.56	21.66	9.61	0.08	0.17	Average
4	0.168	47.88	65.08	-17.20	38.02	9.61	0.08	0.17	QP
5	0.186	30.08	54.20	-24.12	20.22	9.61	0.08	0.17	Average
6	0.186	46.01	64.20	-18.19	36.15	9.61	0.08	0.17	QP
7	0.491	21.33	46.14	-24.81	11.41	9.61	0.10	0.21	Average
8	0.491	28.80	56.14	-27.34	18.88	9.61	0.10	0.21	QP
9	1.959	26.77	46.00	-19.23	16.65	9.62	0.20	0.30	Average
10	1.959	32.30	56.00	-23.70	22.18	9.62	0.20	0.30	QP
11	16.573	22.82	50.00	-27.18	12.01	9.76	0.59	0.46	Average
12	16.573	29.30	60.00	-30.70	18.49	9.76	0.59	0.46	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Configuration 2: POE mode

Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	2437
Power Phase	Line		

Test by : Joe Liao

Temperature: 20°C

Humidity: 59%

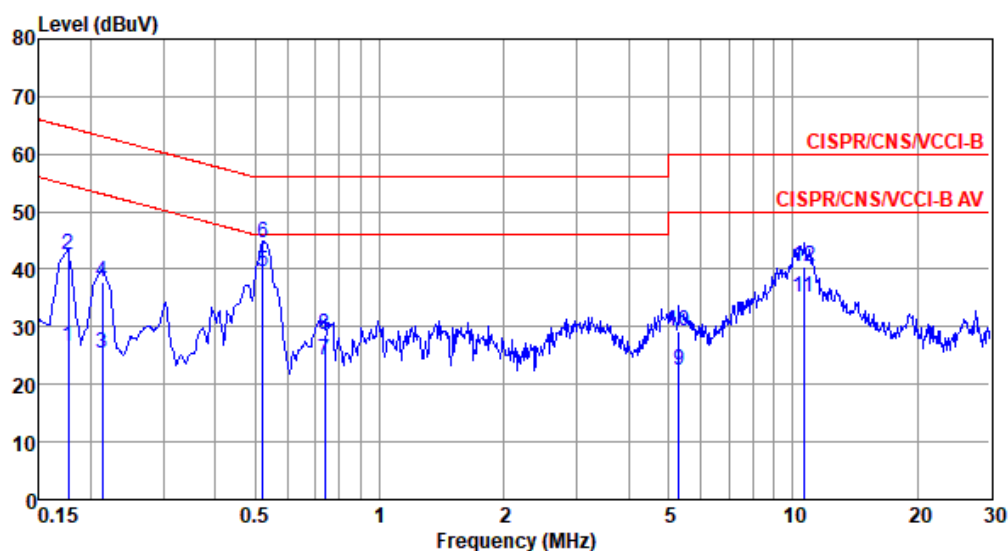

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.177	26.65	54.64	-27.99	16.89	9.68	0.08	0.00	Average
2	0.177	42.38	64.64	-22.26	32.62	9.68	0.08	0.00	QP
3	0.213	25.36	53.10	-27.74	15.60	9.68	0.08	0.00	Average
4	0.213	37.68	63.10	-25.42	27.92	9.68	0.08	0.00	QP
5*	0.521	39.60	46.00	-6.40	29.83	9.67	0.10	0.00	Average
6	0.521	44.72	56.00	-11.28	34.95	9.67	0.10	0.00	QP
7	0.735	24.06	46.00	-21.94	14.25	9.68	0.13	0.00	Average
8	0.735	28.64	56.00	-27.36	18.83	9.68	0.13	0.00	QP
9	5.305	22.49	50.00	-27.51	12.50	9.71	0.28	0.00	Average
10	5.305	29.08	60.00	-30.92	19.09	9.71	0.28	0.00	QP
11	10.620	35.17	50.00	-14.83	24.96	9.74	0.47	0.00	Average
12	10.620	40.51	60.00	-19.49	30.30	9.74	0.47	0.00	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	ax HE20-OFDMA	Test Freq. (MHz)	2437
Power Phase	Neutral		

Test by : Joe Liao Temperature: 20°C Humidity: 59%

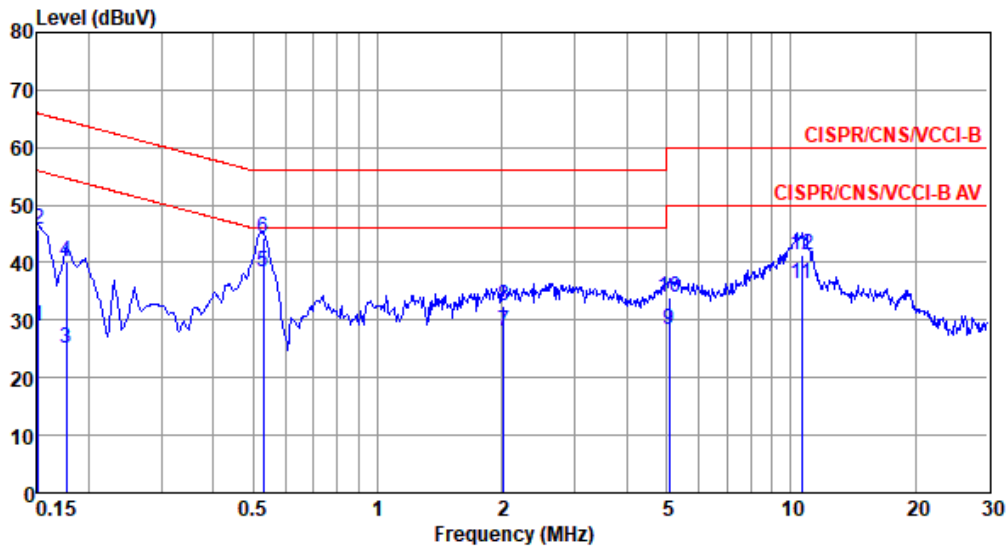

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.151	29.07	55.96	-26.89	19.38	9.61	0.08	0.00	Average
2	0.151	45.69	65.96	-20.27	36.00	9.61	0.08	0.00	QP
3	0.177	25.09	54.64	-29.55	15.40	9.61	0.08	0.00	Average
4	0.177	40.23	64.64	-24.41	30.54	9.61	0.08	0.00	QP
5*	0.529	38.42	46.00	-7.58	28.71	9.61	0.10	0.00	Average
6	0.529	44.26	56.00	-11.74	34.55	9.61	0.10	0.00	QP
7	2.023	27.95	46.00	-18.05	18.13	9.62	0.20	0.00	Average
8	2.023	32.61	56.00	-23.39	22.79	9.62	0.20	0.00	QP
9	5.085	28.32	50.00	-21.68	18.40	9.65	0.27	0.00	Average
10	5.085	33.84	60.00	-26.16	23.92	9.65	0.27	0.00	QP
11	10.620	36.40	50.00	-13.60	26.23	9.70	0.47	0.00	Average
12	10.620	41.47	60.00	-18.53	31.30	9.70	0.47	0.00	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).