
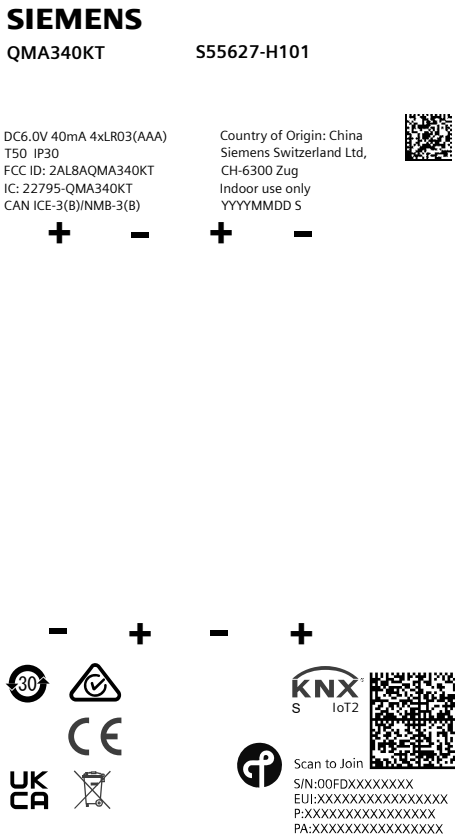


Revision	Description
001	Initial release

Laser marking content:

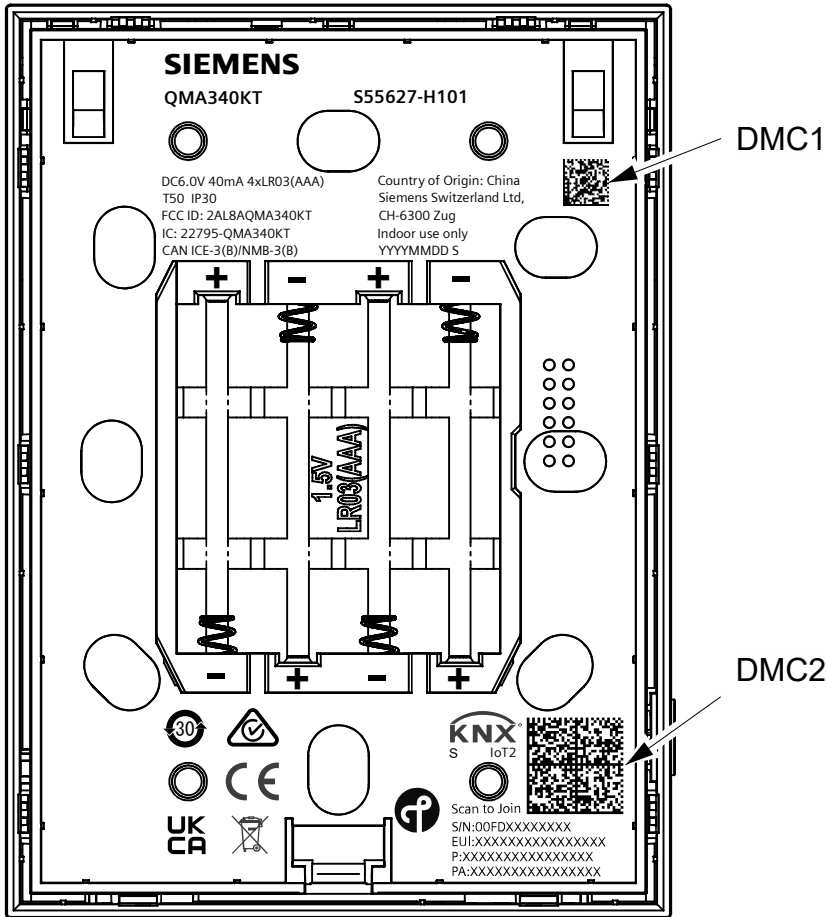

Notes:

1. Font requirement:

SIEMENS Logo: 11pt, reference height=2.7mm
QMA340KT, S55627-H101: Siemens Sans black 7pt, reference height=1.7mm
Others texts: Siemens Sans 6pt, reference height=1.5mm

2. YYYYMMDD S

YYYY: Year, 4 digits; MM: Month, 2 digits; DD: Day, 2 digits;
S: Product version(Mass product version refer to product survey Doc. ; Z for 0-series build;
MS1, MS2... for MS build; ES 1,ES2... for ES build)

3. DMC1(5X5mm) content: 1PSSN+31PASN+2PFSS+16DYYYYMMDD

4. DMC2 (13x13mm) content:

31PASN+41S00FDXXXXXXXXXX+3ZEUI:XXXXXXXXXXXXXXXXXX.P:XXXXXXXXXXXXXXXXXX.PA:XXXXXXXXXXXXXXXXXX

- 1)41S00FDXXXXXXXXXX: S/N, 12-character hexadecimal KNX serial number.
- 2)3ZEUI:XXXXXXXXXXXXXXXXXX.P:XXXXXXXXXXXXXXXXXX.PA: XXXXXXXXXXXXXXXXXXXX
EUI-64: IPv6 Network Identifier;
P: joining device credential;
PA: initial application password.
EUI, P and PA field 16 characters. P and PA are composition of both: only capital letters and numbers (0-9 and A-Y) can be used, for the sake of readability, the letters I,O,Q,Z are not allowed to be used.

3)S/N, EUI, P and PA are read from software.

5. Color: PANTONE Cool Gray 9C

6. Laser marking must be clearly

Created by Li.Linna	QMA340KT Rear Cover Label				
Approved by					
Date 2025.10.10	Document type	organization SI BP BSCE R&D MDI			
SIEMENS © Siemens Switzerland Ltd	Document number A5W02936372A	Revision state AA	Revision 001	Release status WORKING	Page 01