



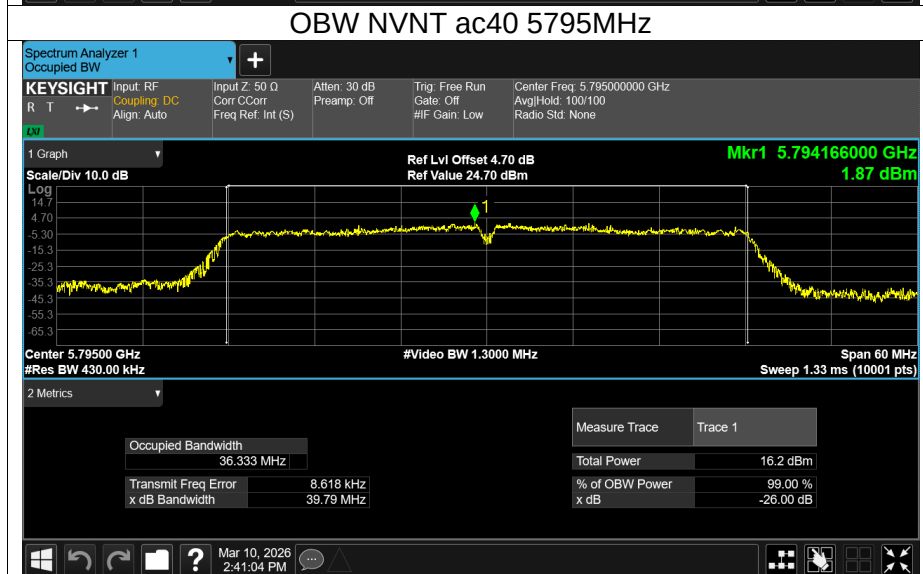
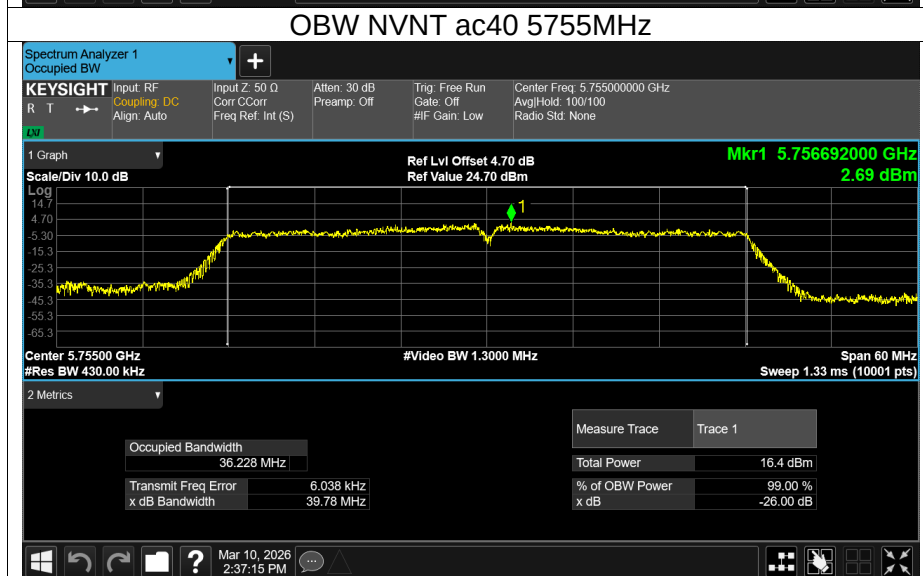
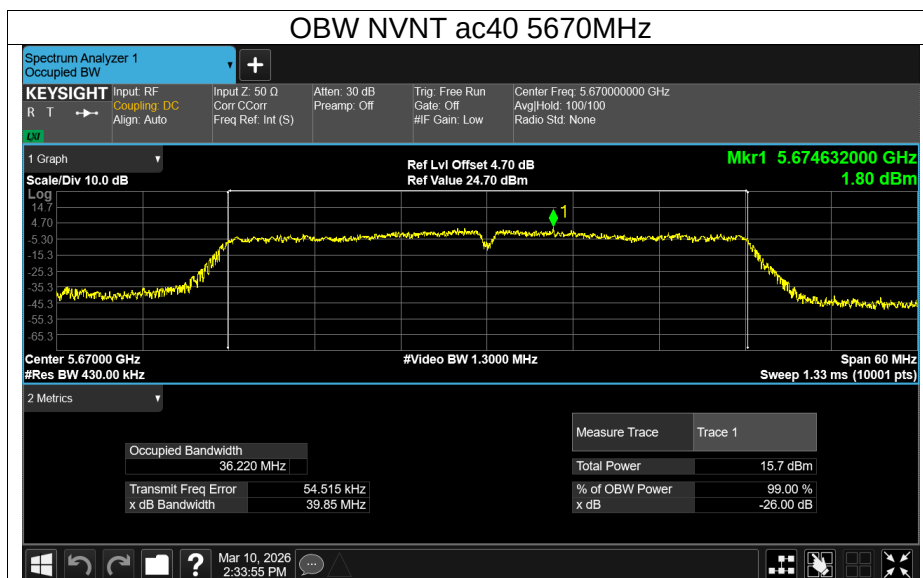


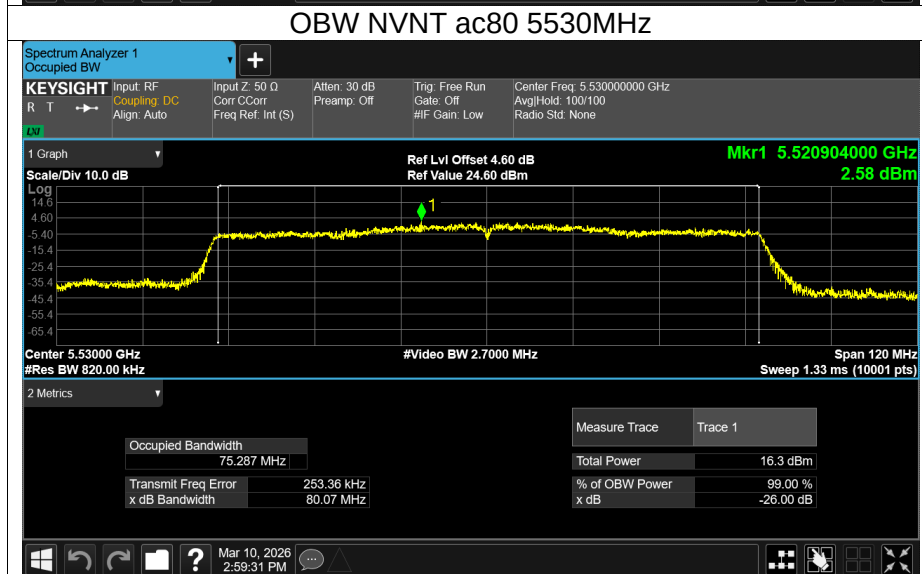

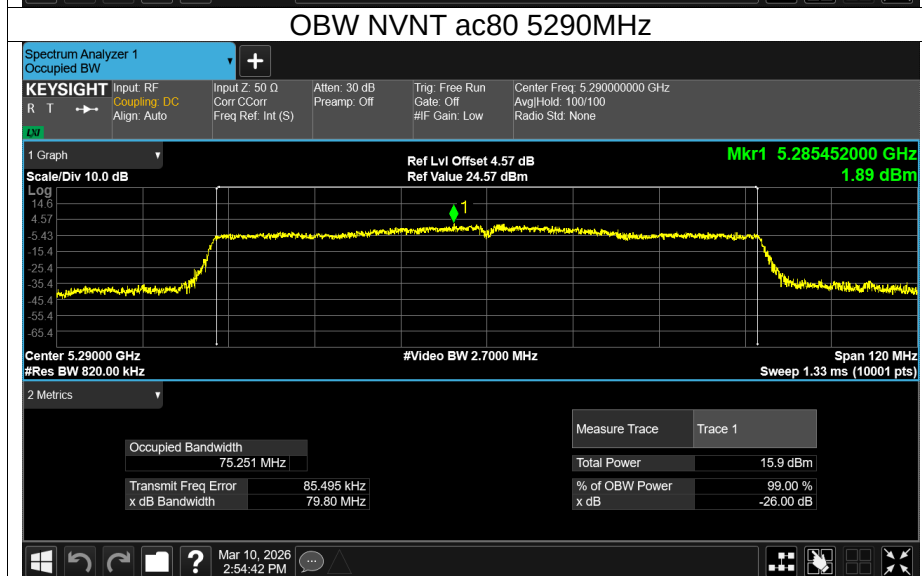

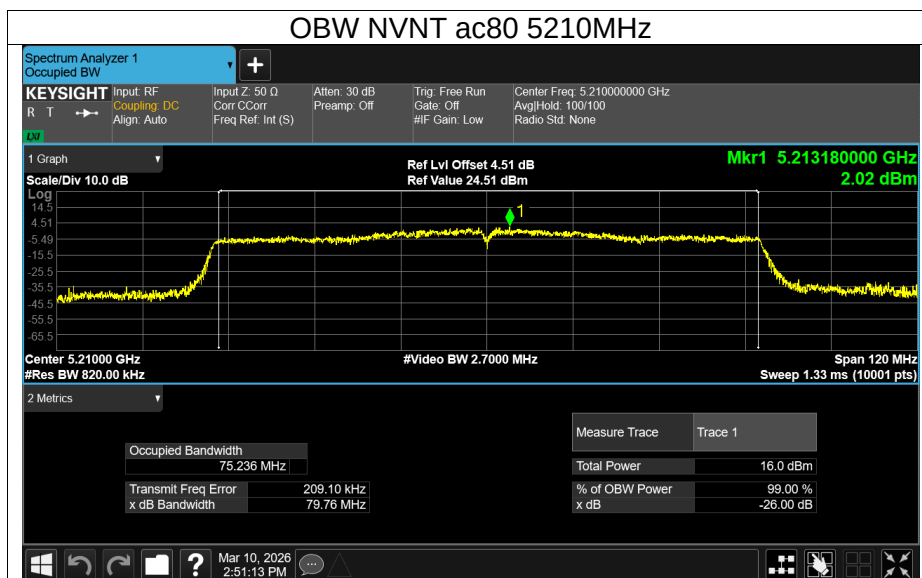

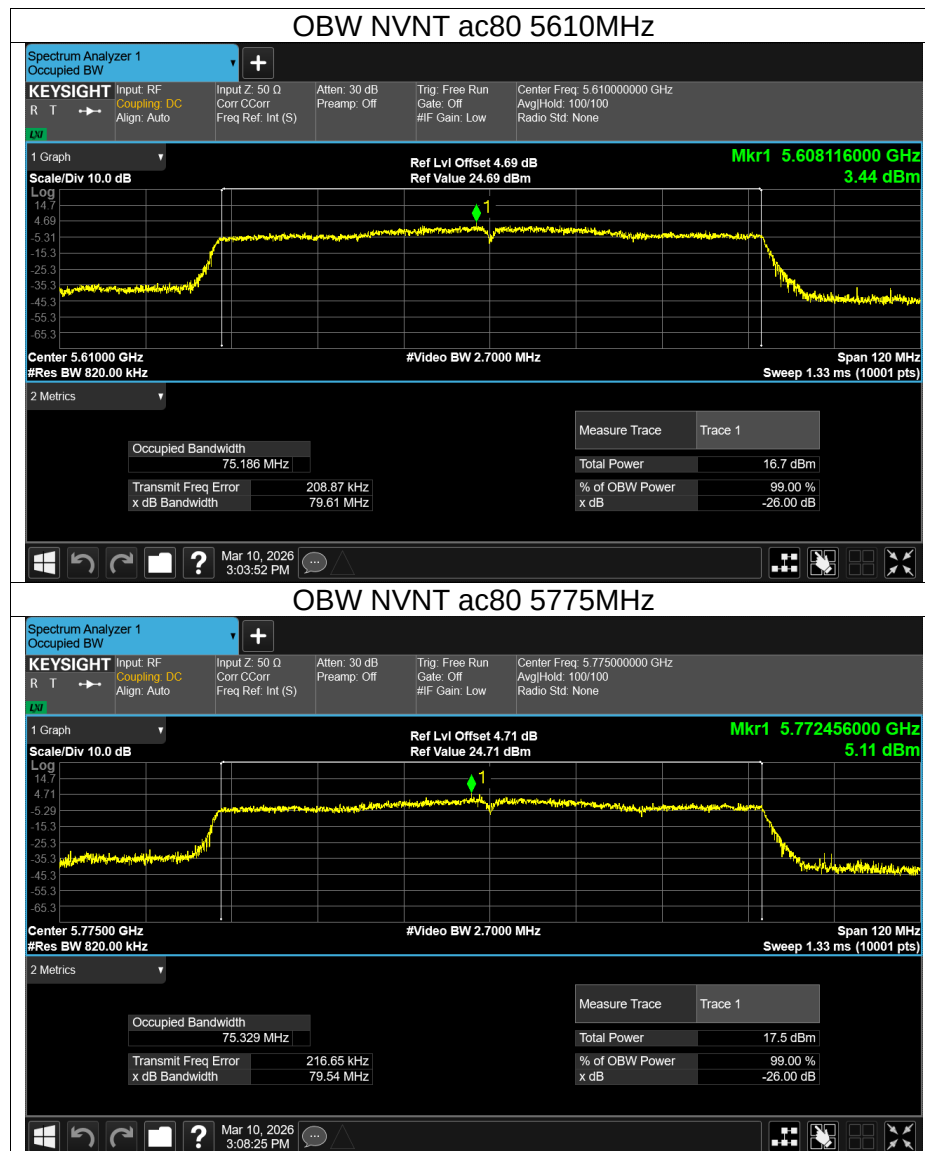


Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	1.66	0.13	1.79	11	Pass
NVNT	a	5200	2.08	0.13	2.21	11	Pass
NVNT	a	5240	2.37	0.13	2.5	11	Pass
NVNT	a	5260	2.13	0.13	2.26	11	Pass
NVNT	a	5300	2.46	0.13	2.59	11	Pass
NVNT	a	5320	1.94	0.13	2.07	11	Pass
NVNT	a	5500	2.19	0.13	2.32	11	Pass
NVNT	a	5580	3.02	0.13	3.15	11	Pass
NVNT	a	5700	2.62	0.13	2.75	11	Pass
NVNT	n20	5180	0.54	0.13	0.67	11	Pass
NVNT	n20	5200	0.7	0.13	0.83	11	Pass
NVNT	n20	5240	0.9	0.13	1.03	11	Pass
NVNT	n20	5260	1.28	0.13	1.41	11	Pass
NVNT	n20	5300	0.94	0.13	1.07	11	Pass
NVNT	n20	5320	0.89	0.13	1.02	11	Pass
NVNT	n20	5500	1.36	0.13	1.49	11	Pass
NVNT	n20	5580	1.83	0.13	1.96	11	Pass
NVNT	n20	5700	1.65	0.13	1.78	11	Pass
NVNT	n40	5190	-2.45	0.26	-2.19	11	Pass
NVNT	n40	5230	-2	0.26	-1.74	11	Pass
NVNT	n40	5270	-1.95	0.26	-1.69	11	Pass
NVNT	n40	5310	-2.17	0.25	-1.92	11	Pass
NVNT	n40	5510	-2.44	0.26	-2.18	11	Pass
NVNT	n40	5550	-1.88	0.26	-1.62	11	Pass
NVNT	n40	5670	-1.5	0.26	-1.24	11	Pass
NVNT	ac20	5180	-0.33	0.92	0.59	11	Pass
NVNT	ac20	5200	0.03	0.94	0.97	11	Pass
NVNT	ac20	5240	0.24	0.94	1.18	11	Pass
NVNT	ac20	5260	0.28	0.94	1.22	11	Pass
NVNT	ac20	5300	0.19	0.94	1.13	11	Pass
NVNT	ac20	5320	0.07	0.92	0.99	11	Pass
NVNT	ac20	5500	0.47	0.92	1.39	11	Pass
NVNT	ac20	5580	1.16	0.94	2.1	11	Pass
NVNT	ac20	5700	0.81	0.94	1.75	11	Pass
NVNT	ac40	5190	-3.8	0.09	-3.71	11	Pass
NVNT	ac40	5230	-4.08	1.54	-2.54	11	Pass
NVNT	ac40	5270	-4.03	1.54	-2.49	11	Pass
NVNT	ac40	5310	-4.88	1.54	-3.34	11	Pass
NVNT	ac40	5510	-4.53	1.54	-2.99	11	Pass
NVNT	ac40	5550	-4.12	1.55	-2.57	11	Pass
NVNT	ac40	5670	-3.69	1.51	-2.18	11	Pass
NVNT	ac80	5210	-6.76	2.12	-4.64	11	Pass
NVNT	ac80	5290	-6.74	2.12	-4.62	11	Pass
NVNT	ac80	5530	-6.82	2.12	-4.7	11	Pass
NVNT	ac80	5610	-6.3	2.06	-4.24	11	Pass


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/510kHz)	Duty Factor (dB)	Total PSD (dBm/510kHz)	Limit (dBm/510kHz)	Verdict
NVNT	a	5745	0.58	0.13	0.71	30	Pass
NVNT	a	5785	0.08	0.13	0.21	30	Pass





NVNT	a	5825	0.19	0.13	0.32	30	Pass
NVNT	n20	5745	-0.65	0.13	-0.52	30	Pass
NVNT	n20	5785	-1.13	0.13	-1	30	Pass
NVNT	n20	5825	-1.19	0.13	-1.06	30	Pass
NVNT	n40	5755	-3.36	0.26	-3.1	30	Pass
NVNT	n40	5795	-3.74	0.26	-3.48	30	Pass
NVNT	ac20	5745	-0.78	0.92	0.14	30	Pass
NVNT	ac20	5785	-1.41	0.94	-0.47	30	Pass
NVNT	ac20	5825	-1.77	0.95	-0.82	30	Pass
NVNT	ac40	5755	-6.16	1.51	-4.65	30	Pass
NVNT	ac40	5795	-6.23	1.55	-4.68	30	Pass
NVNT	ac80	5775	-7.94	2.06	-5.88	30	Pass



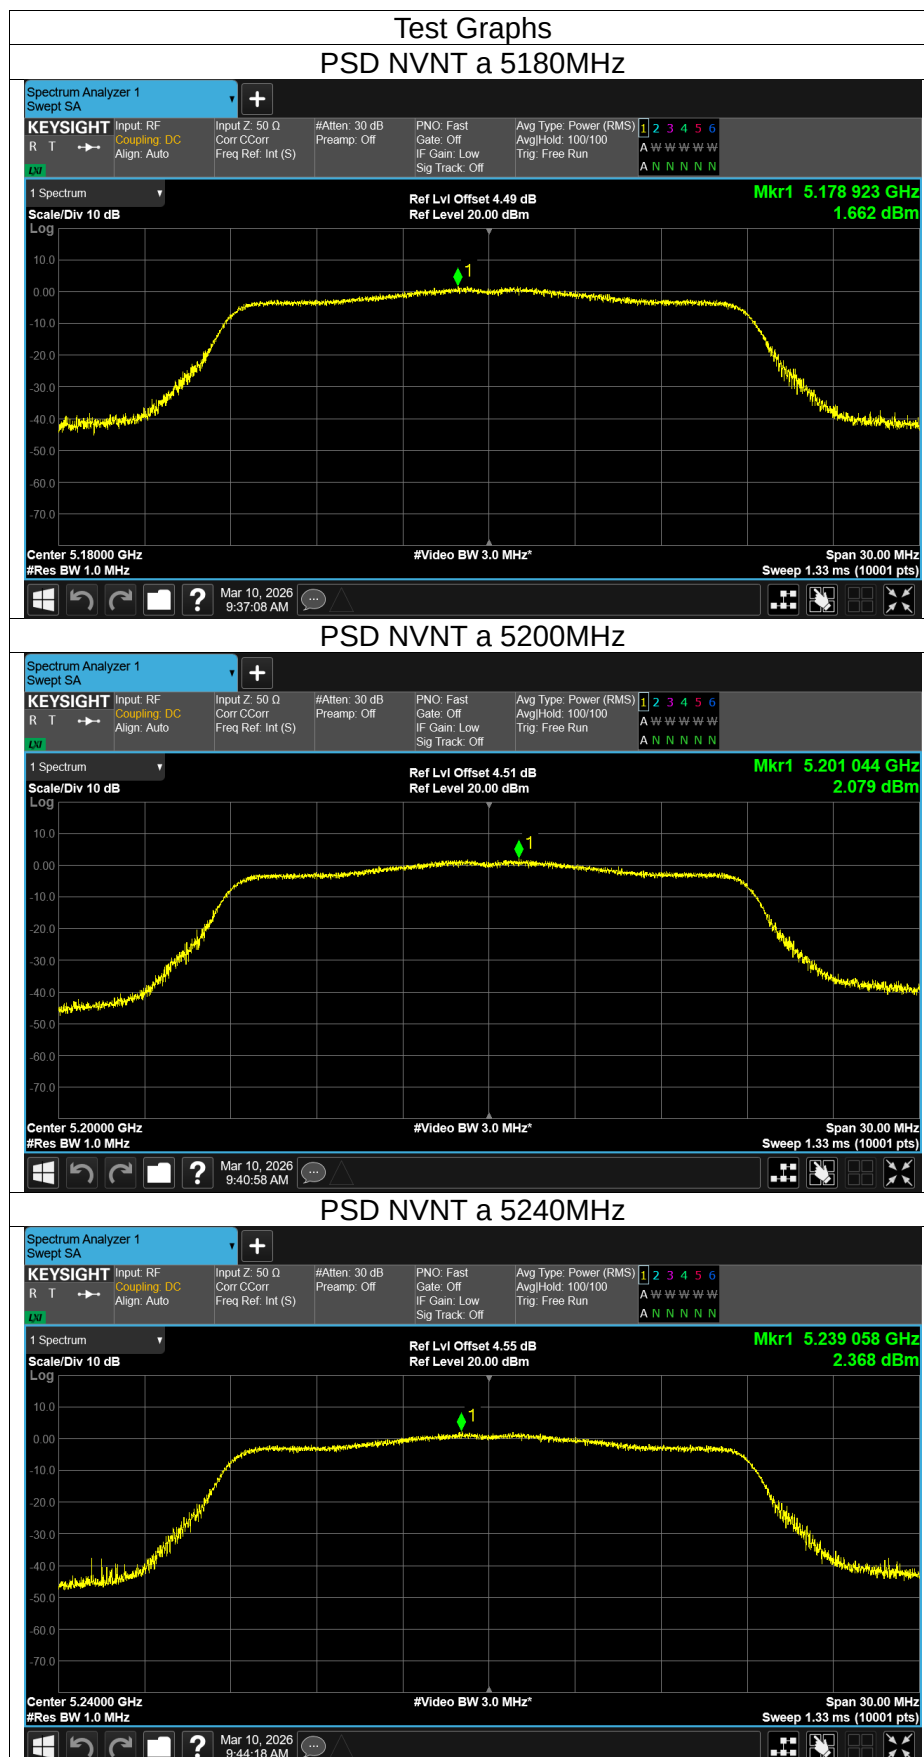


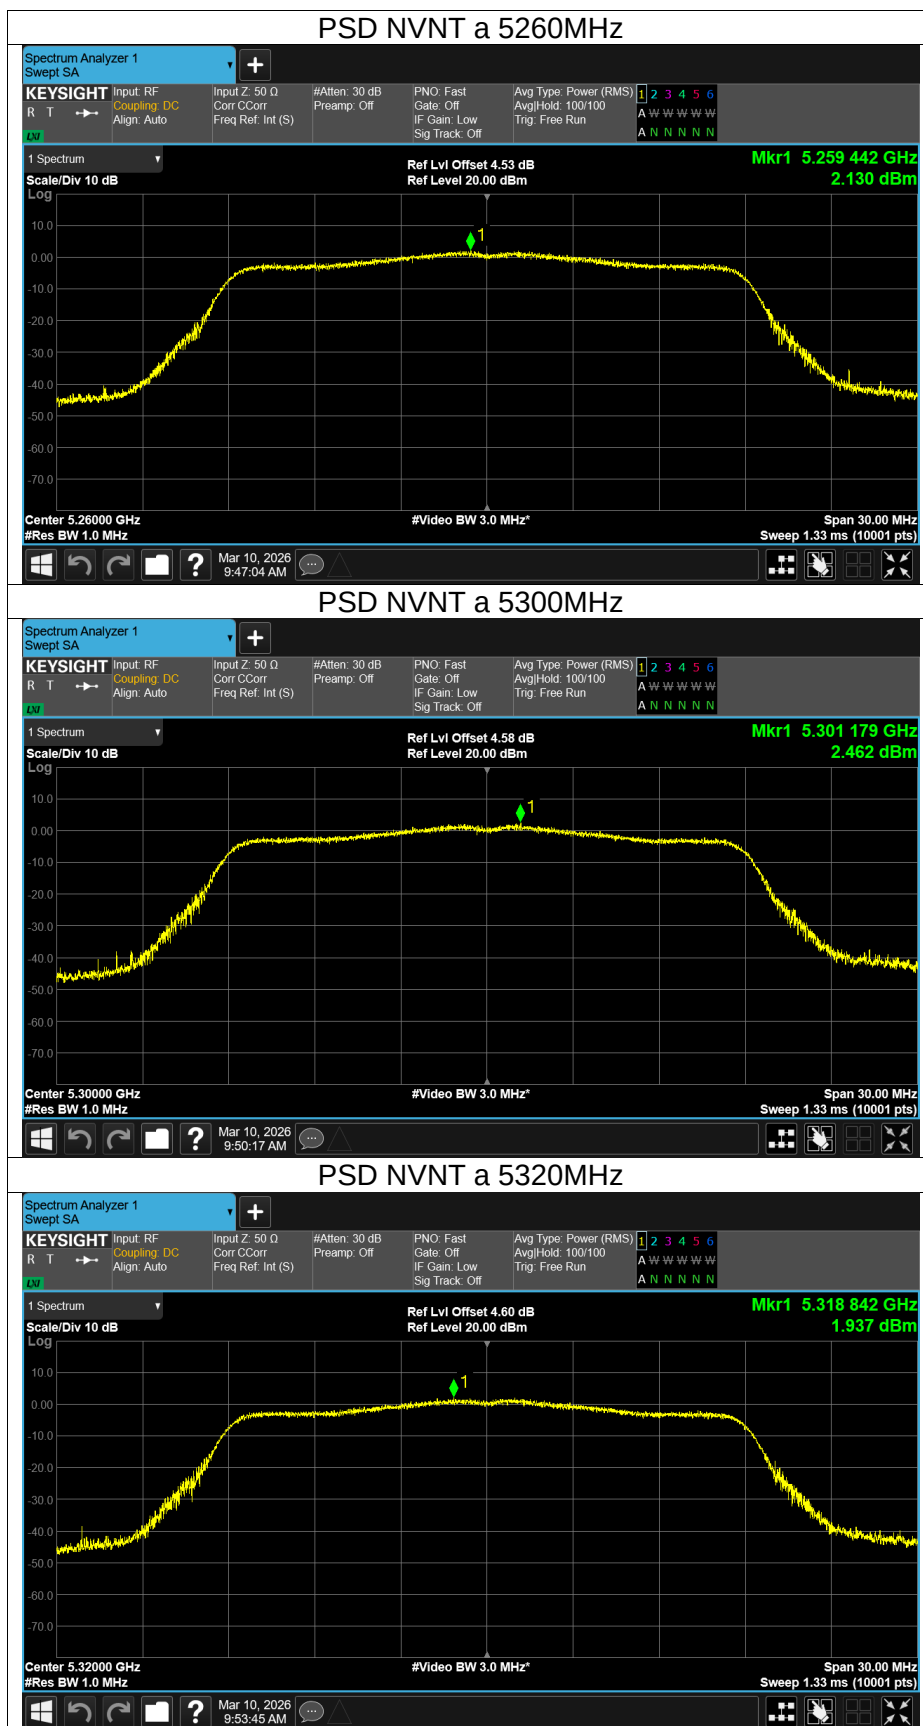


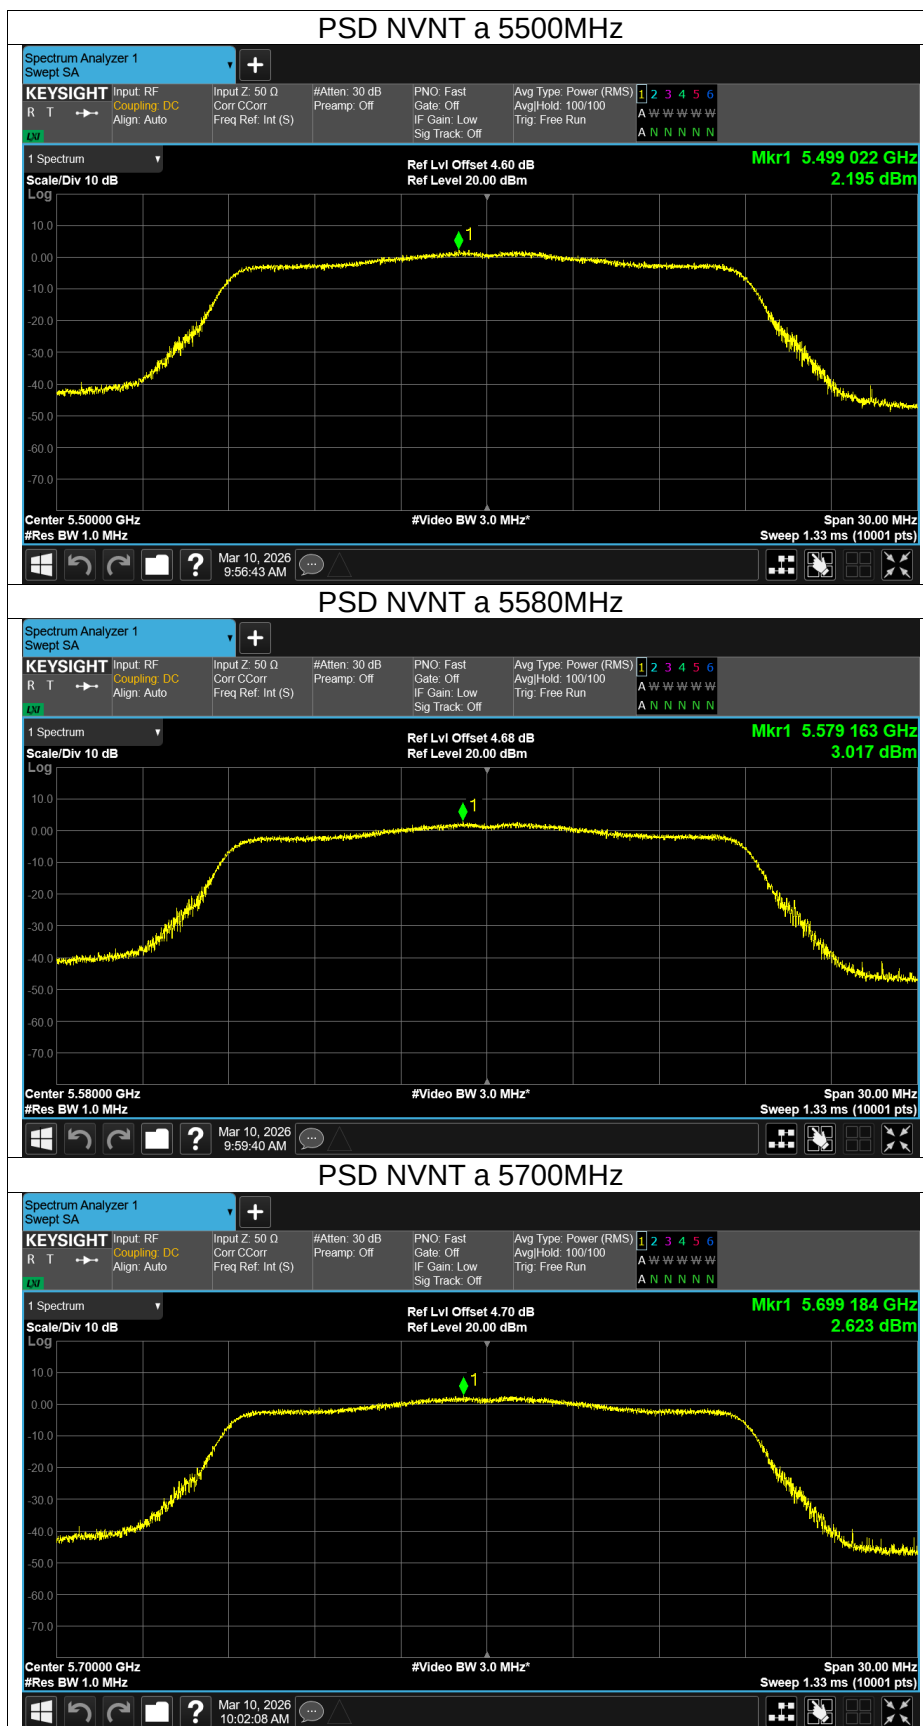


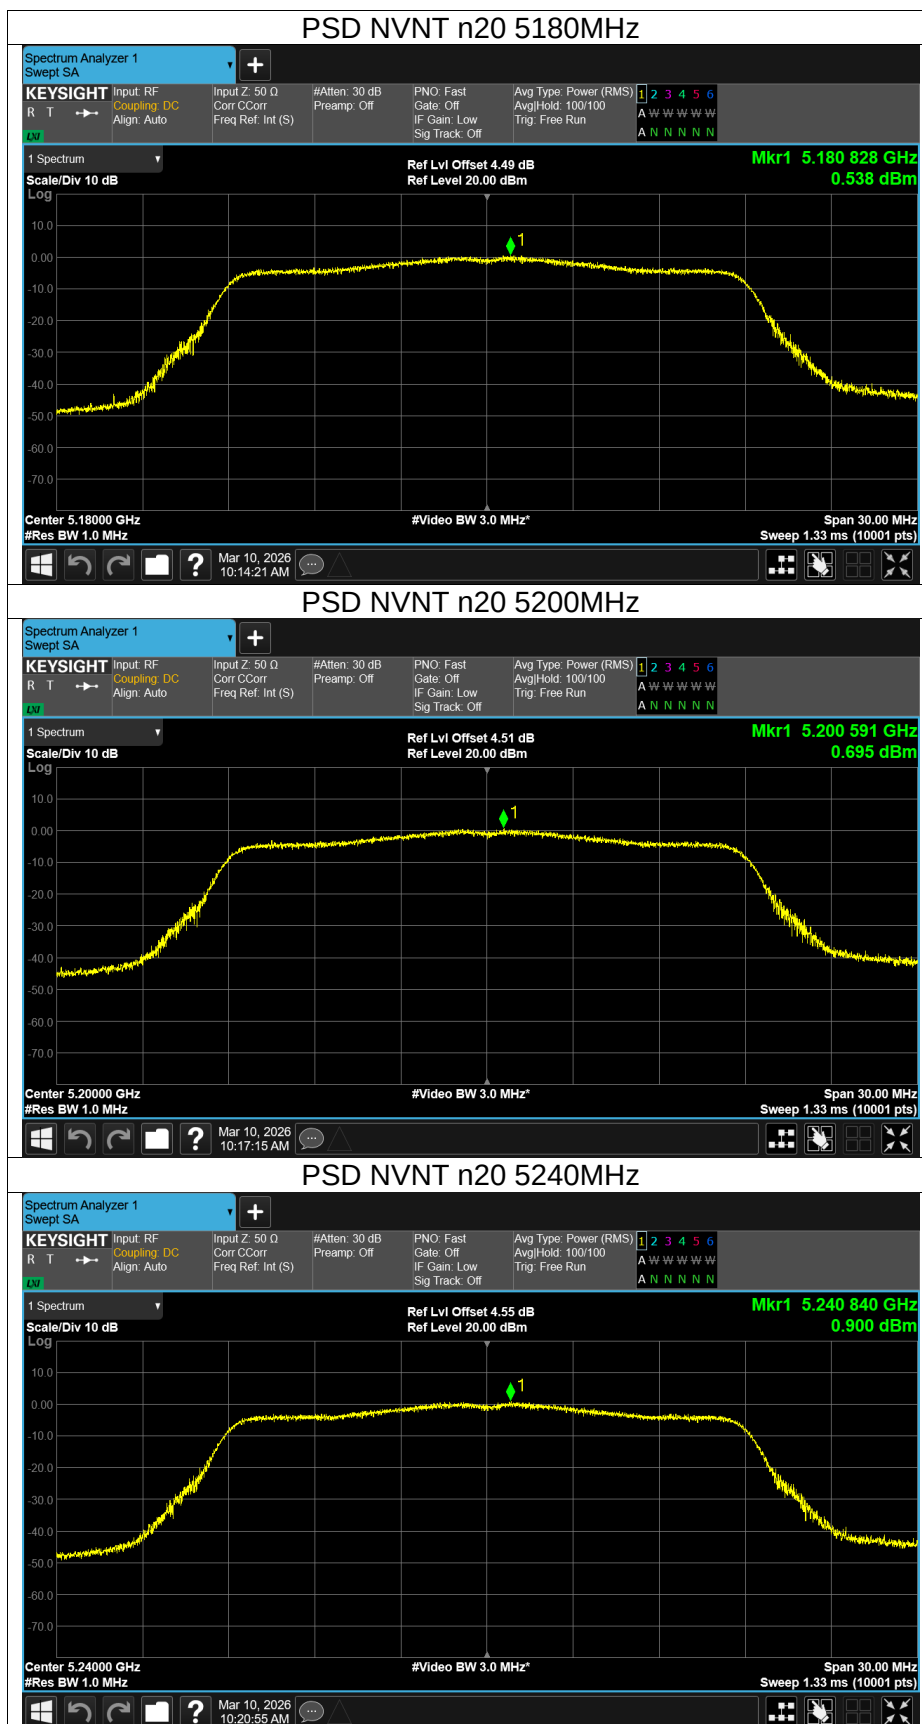


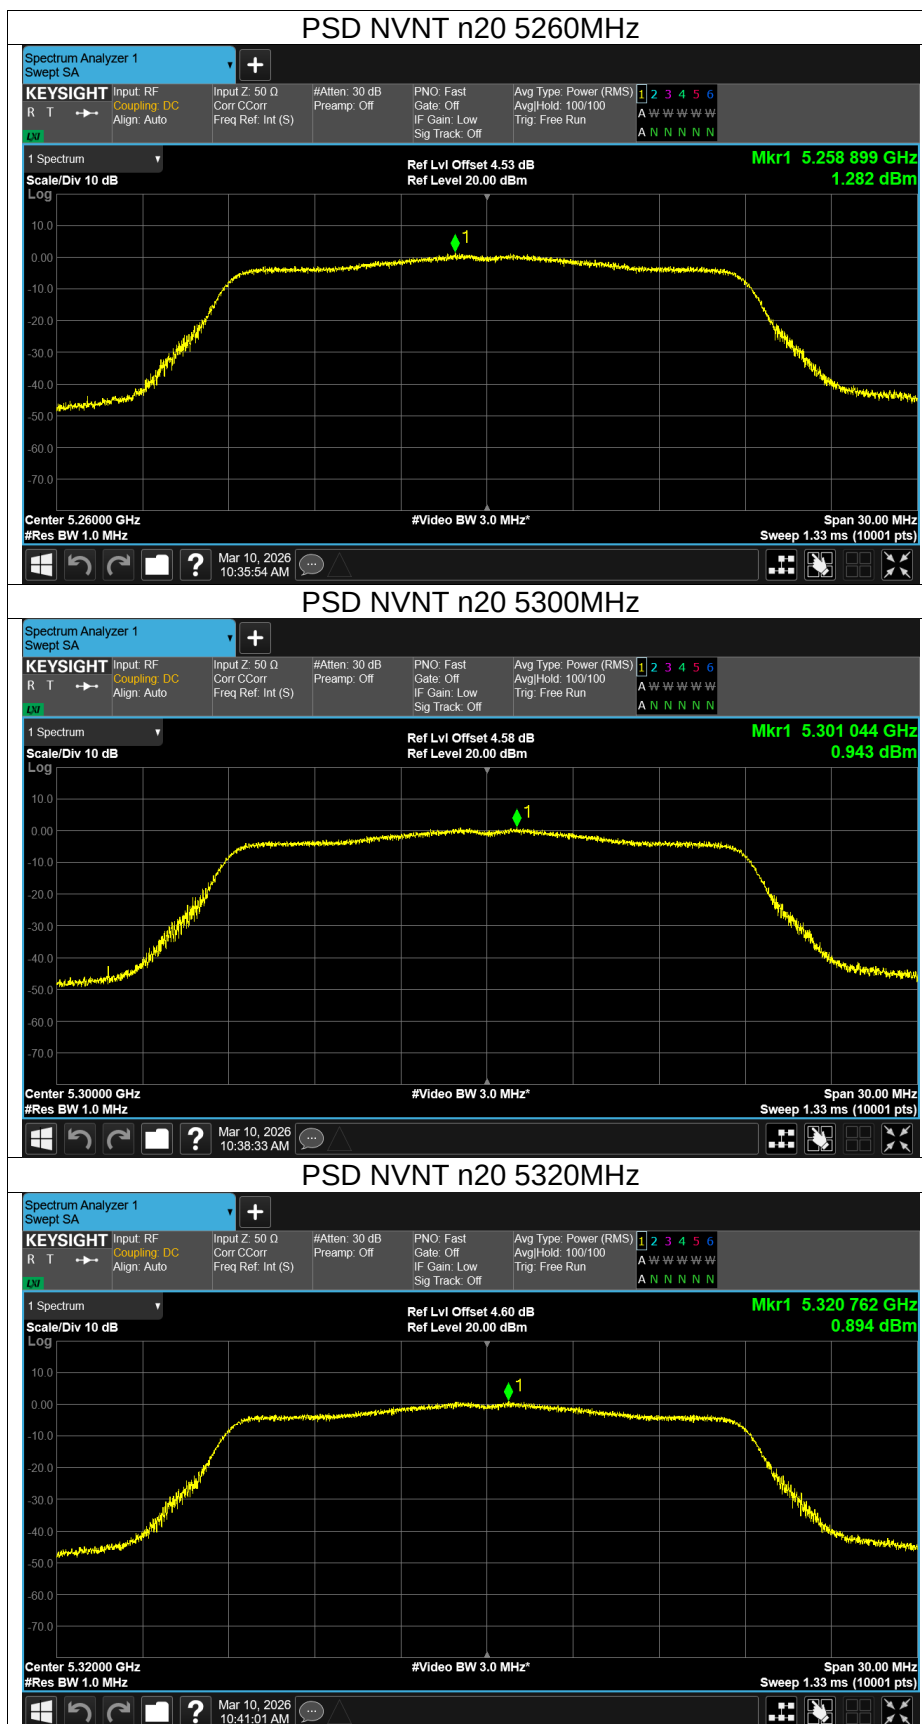


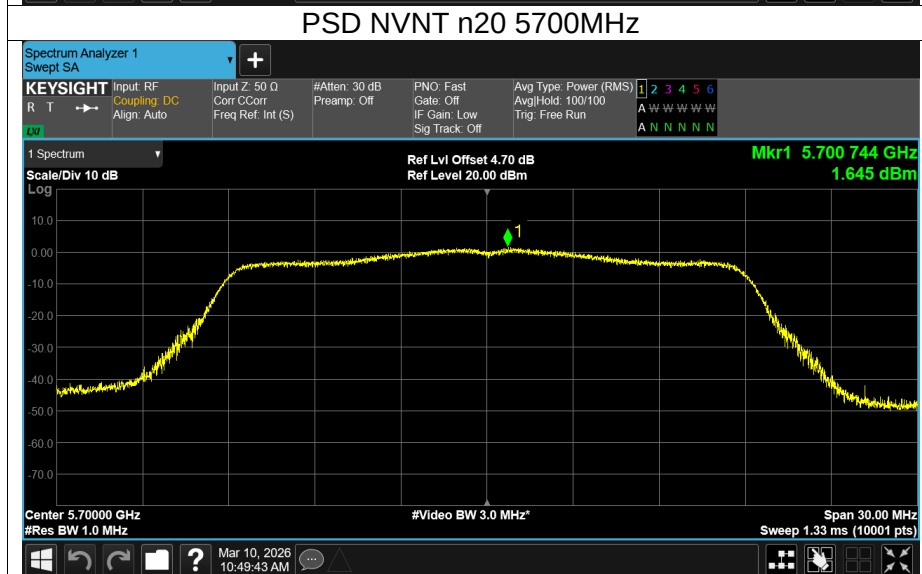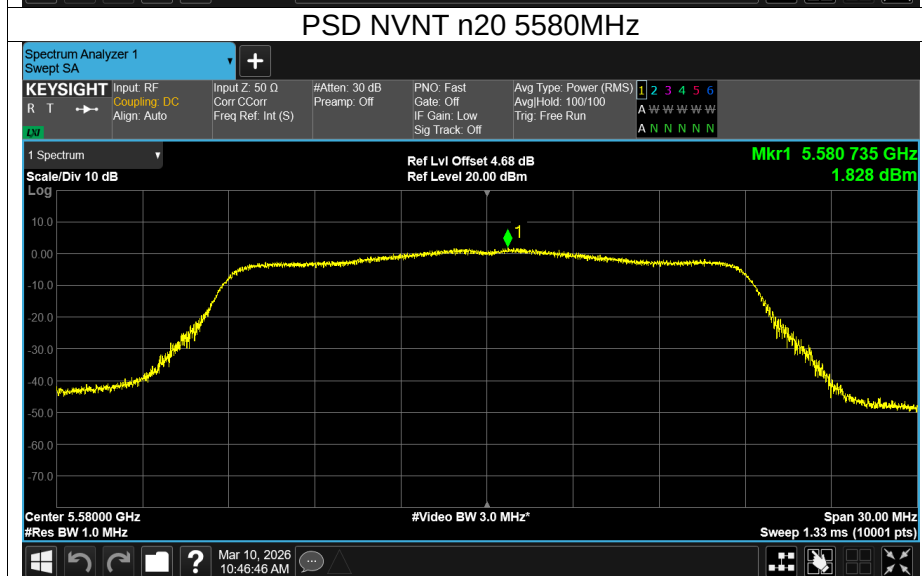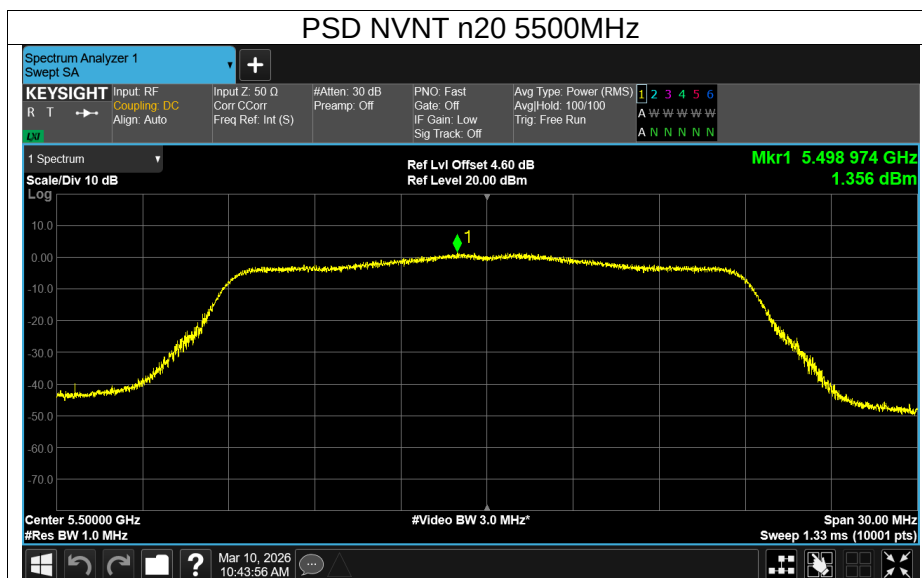


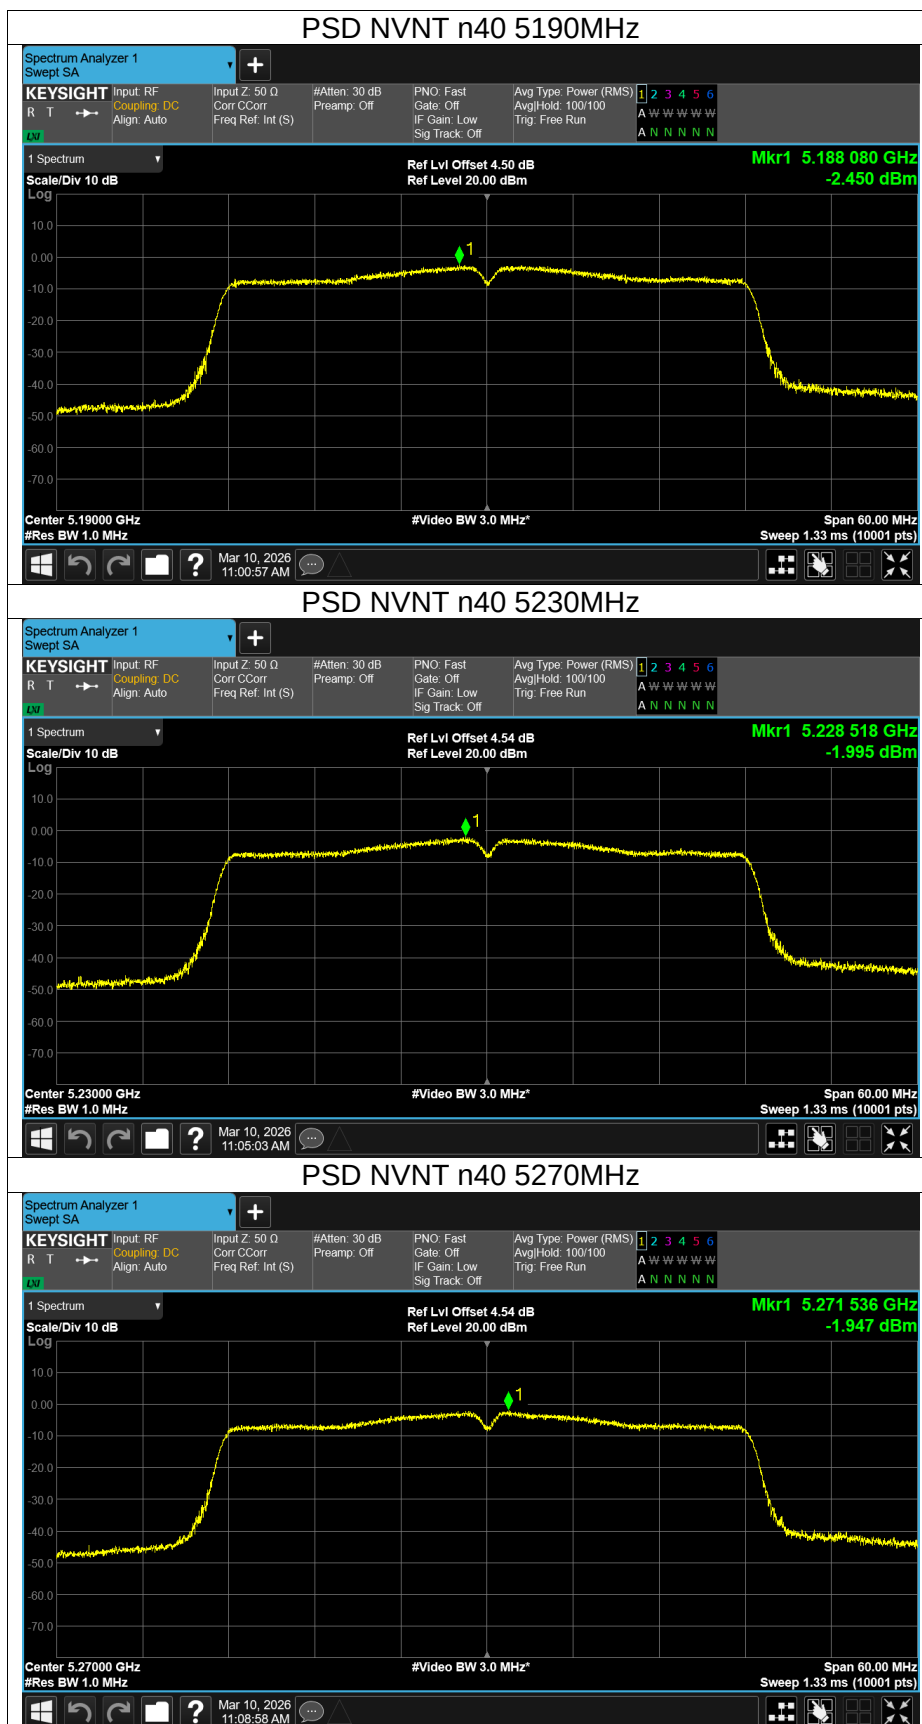


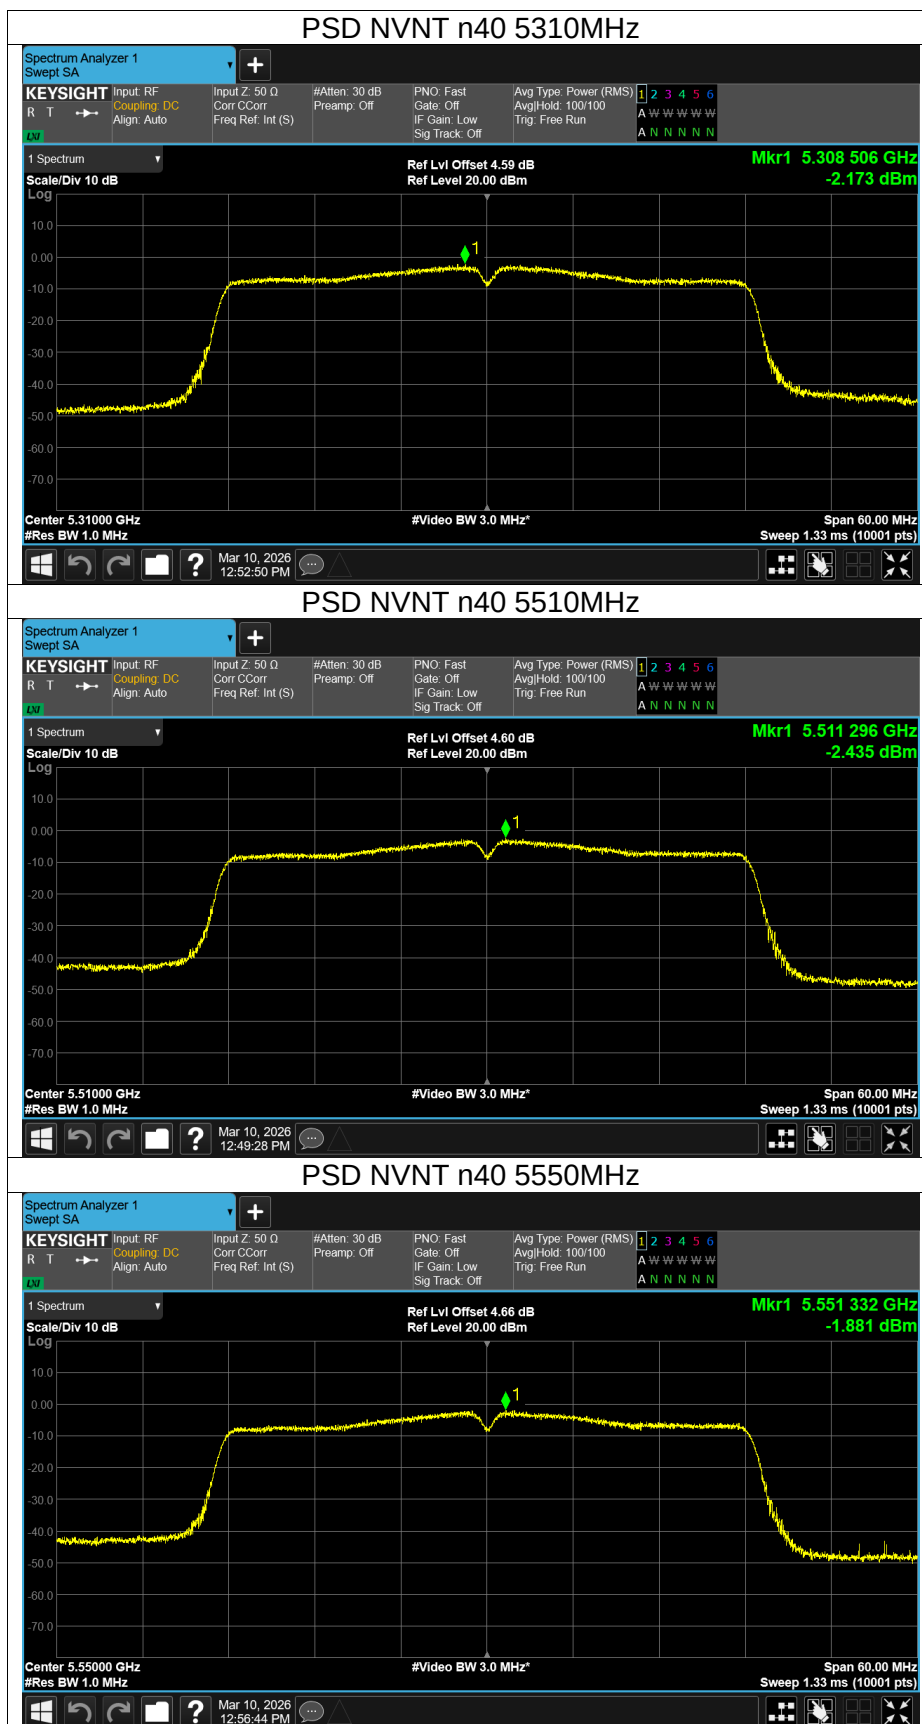


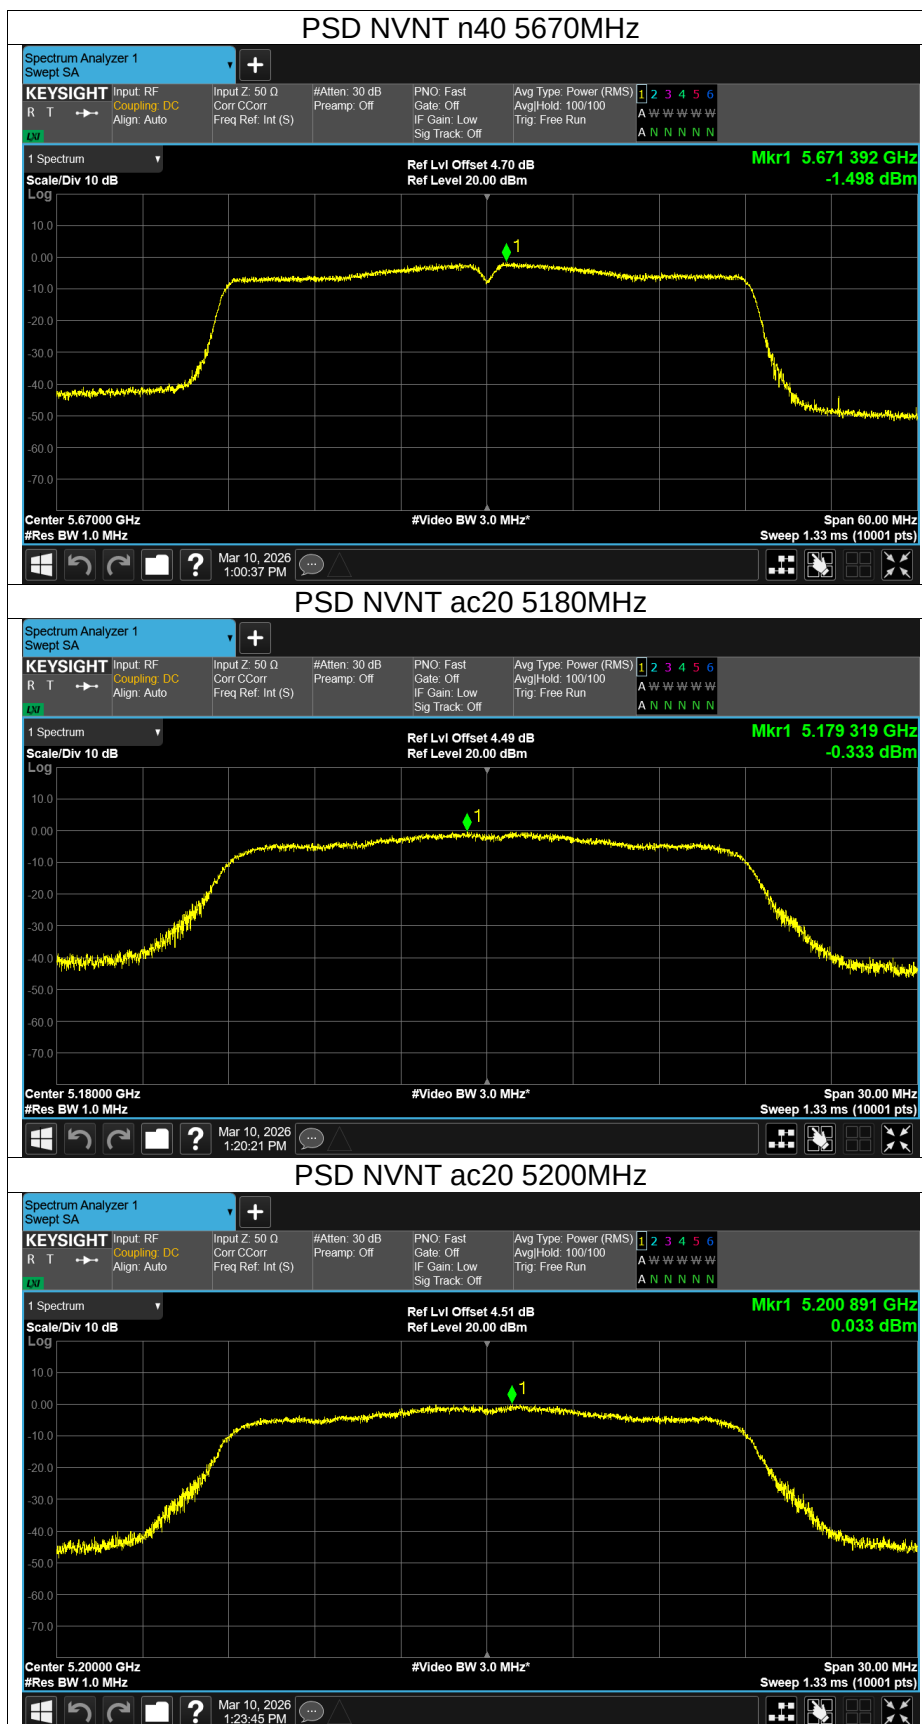


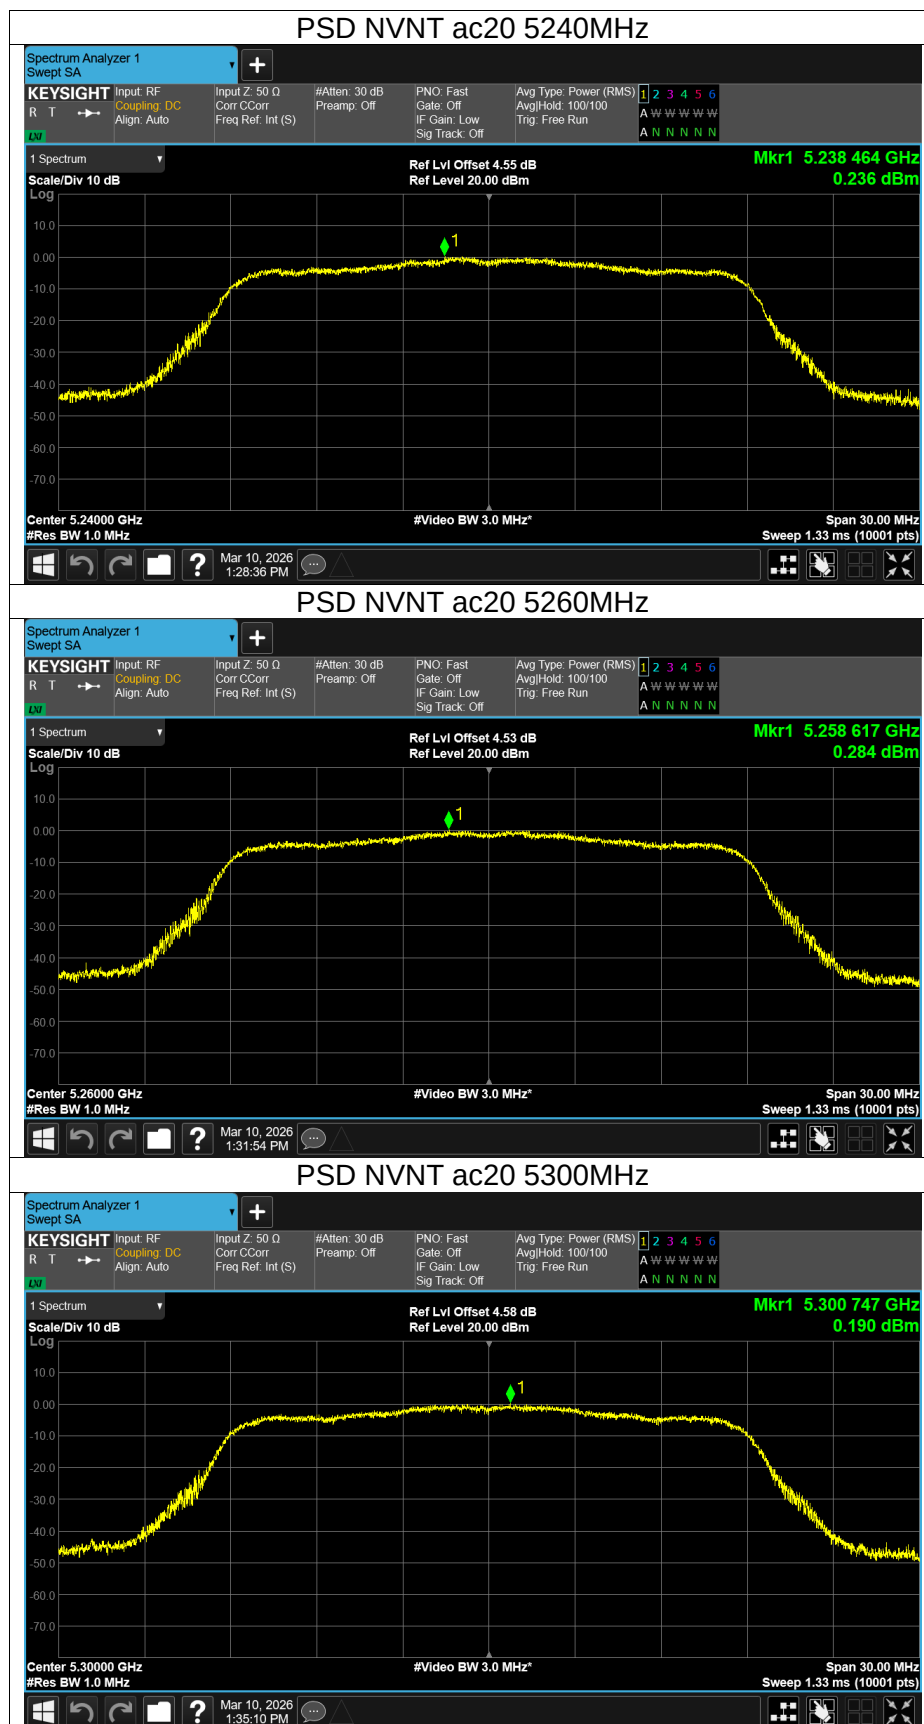


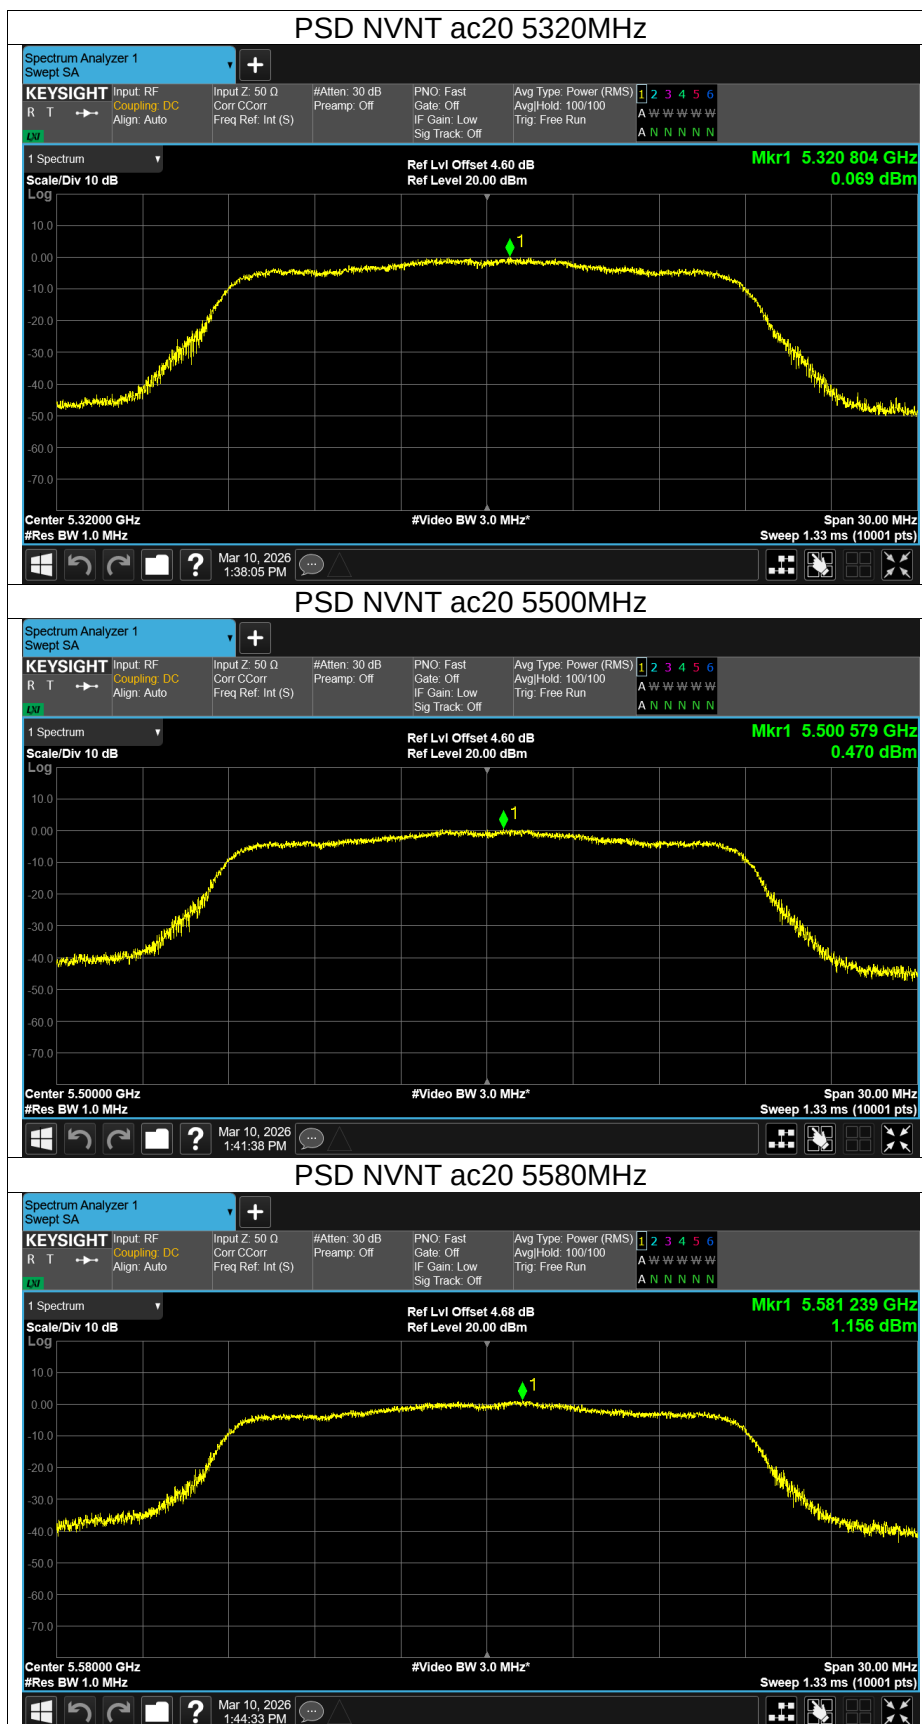

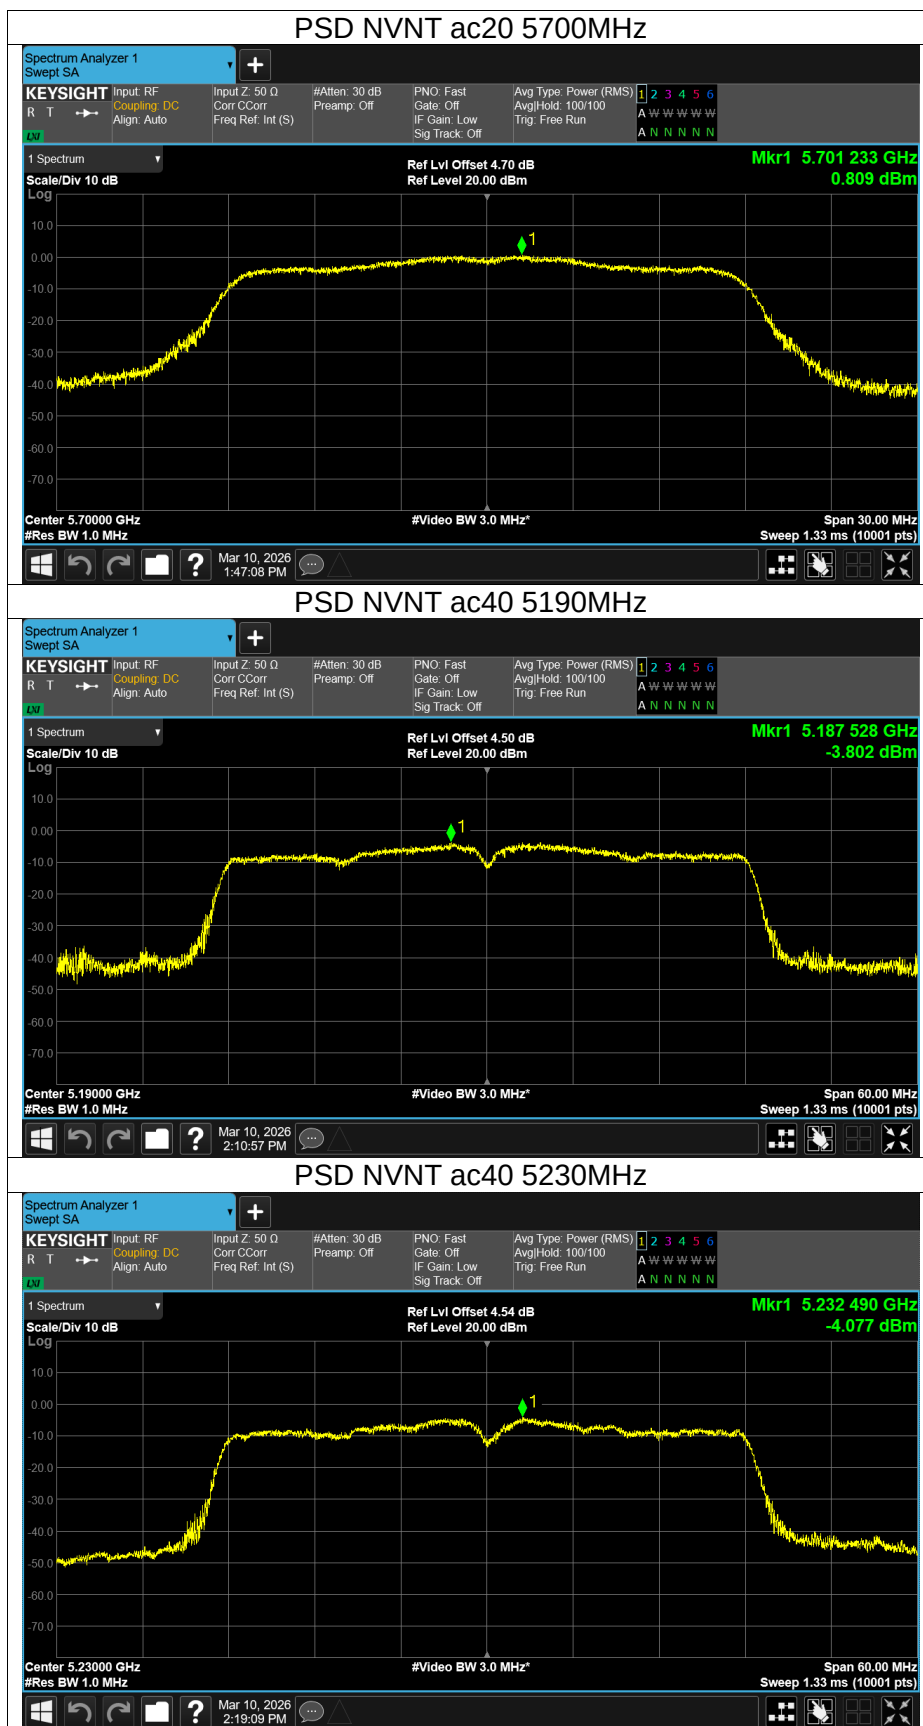




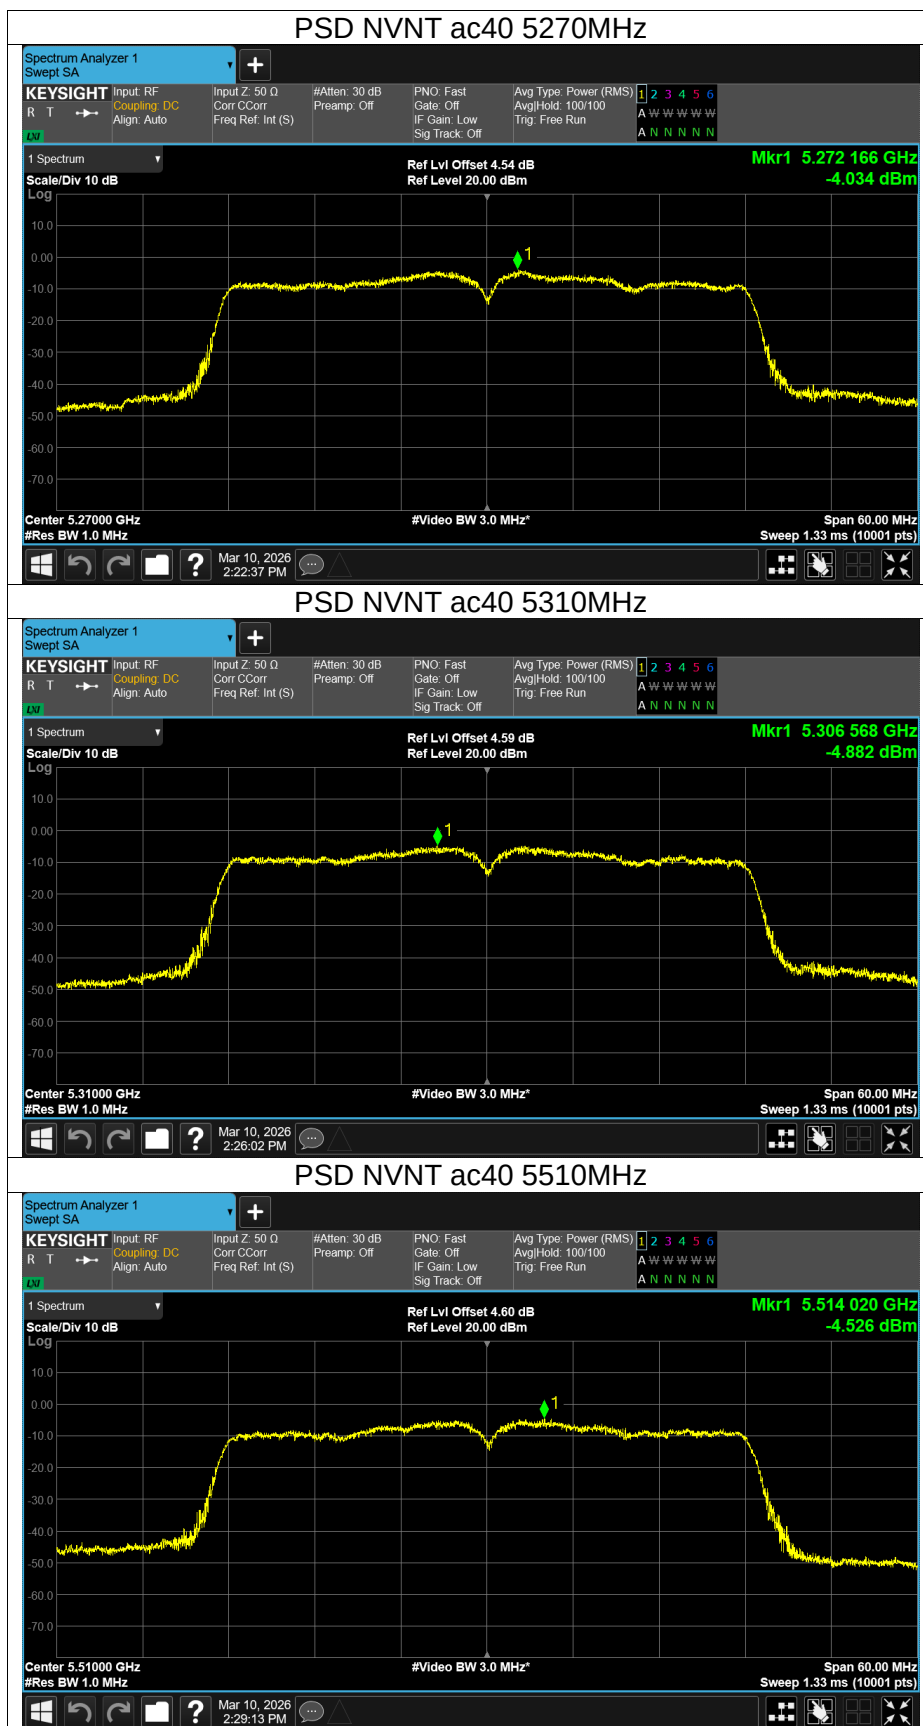


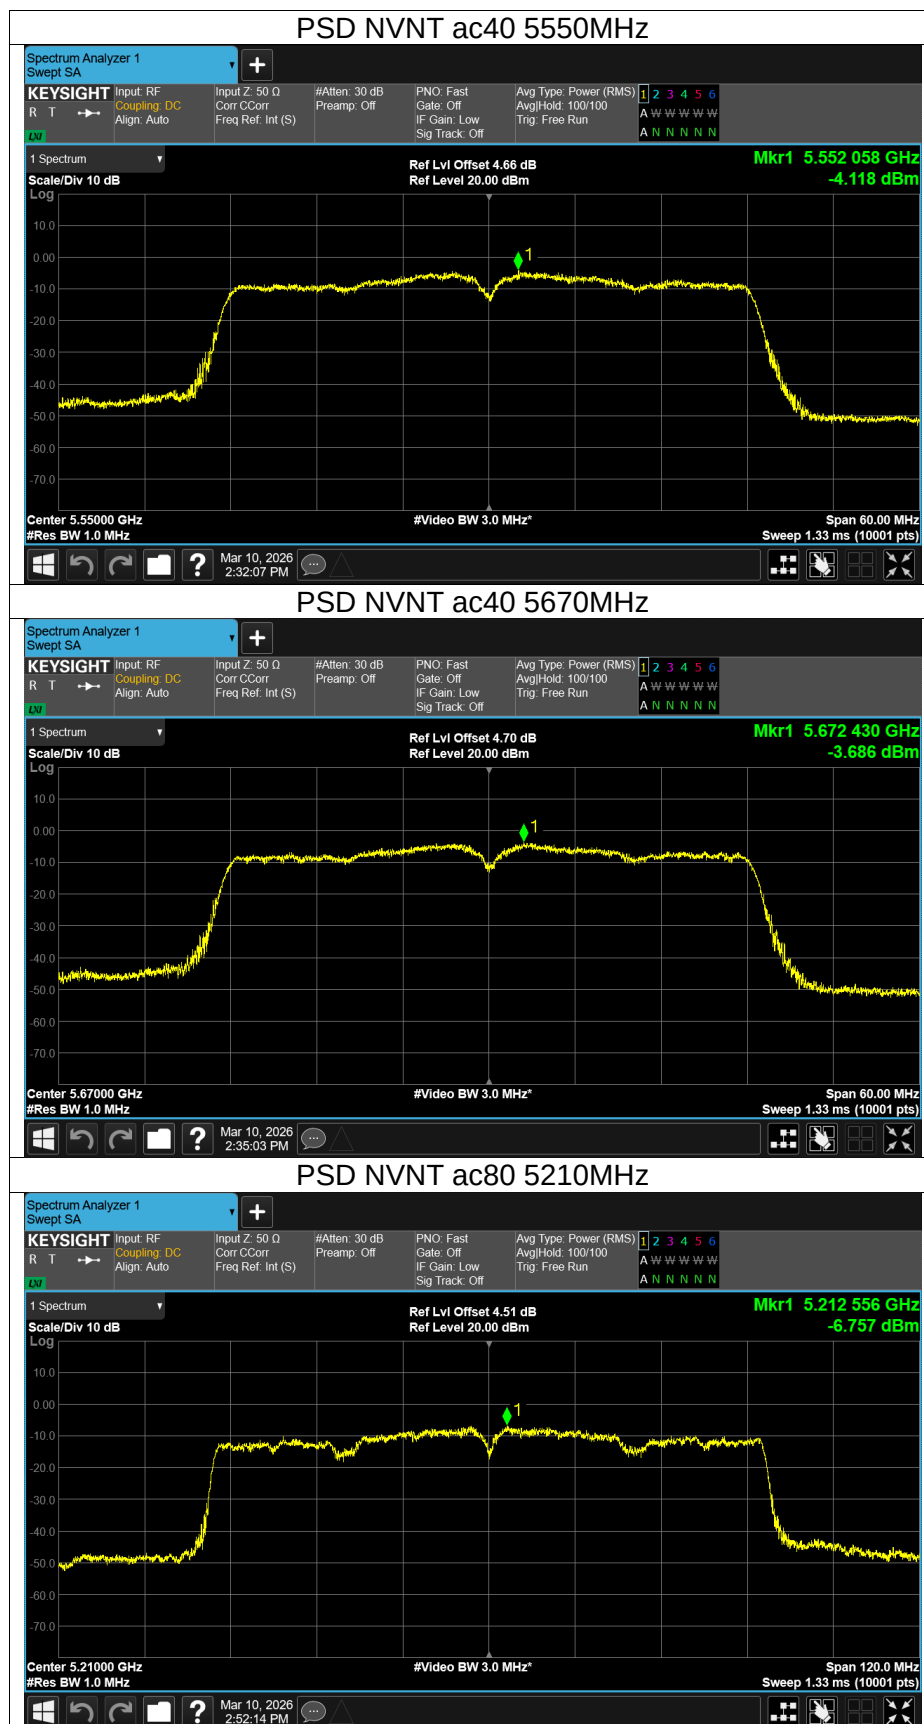


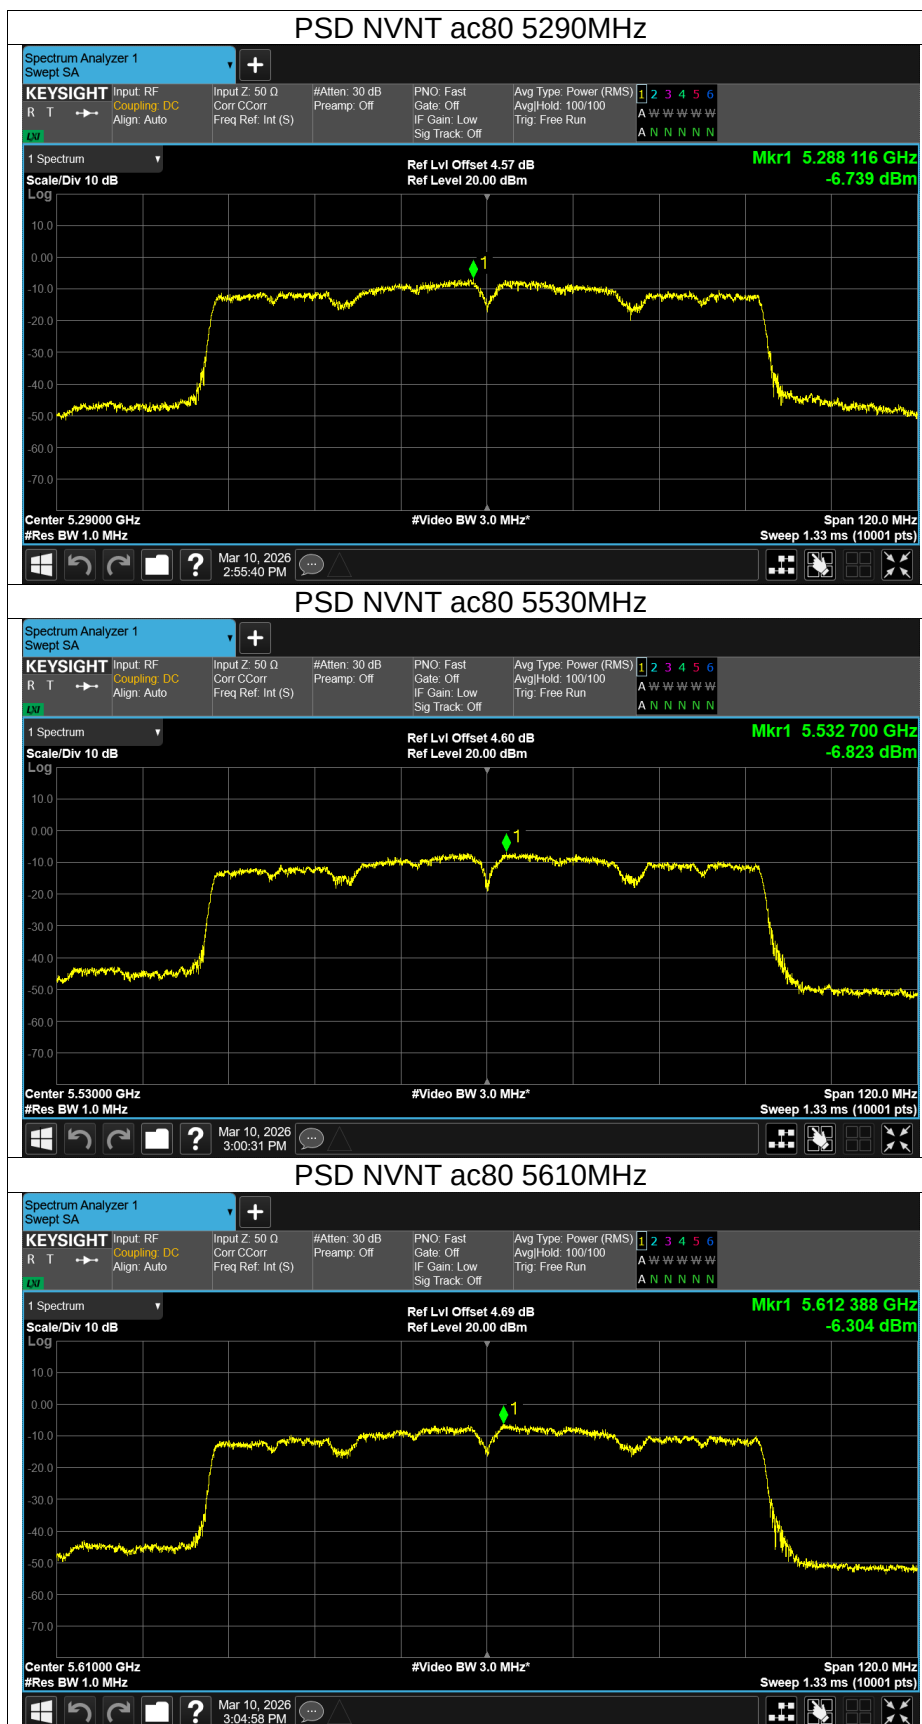



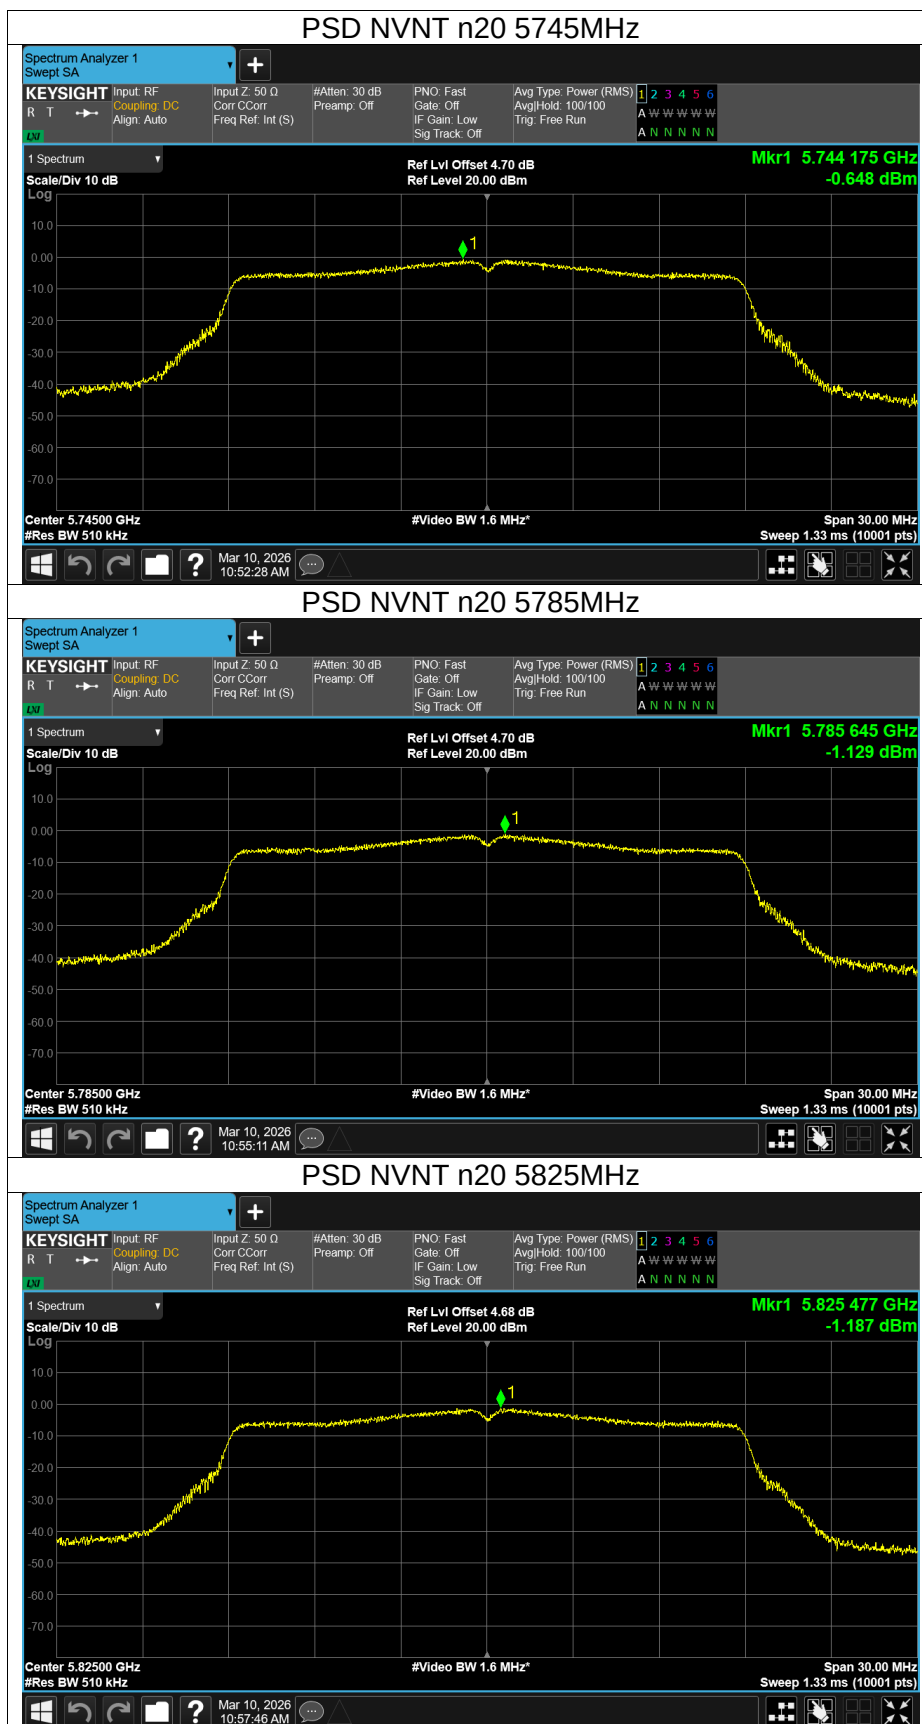

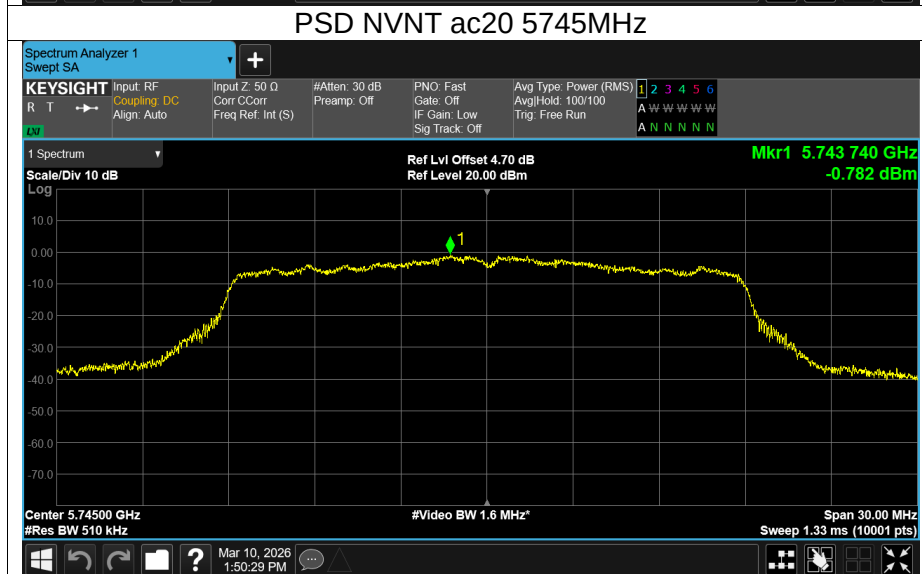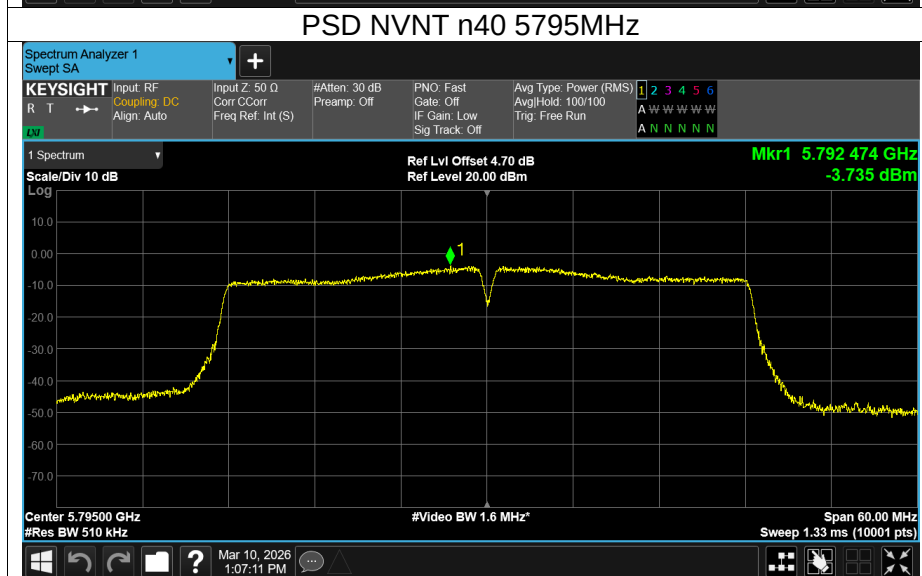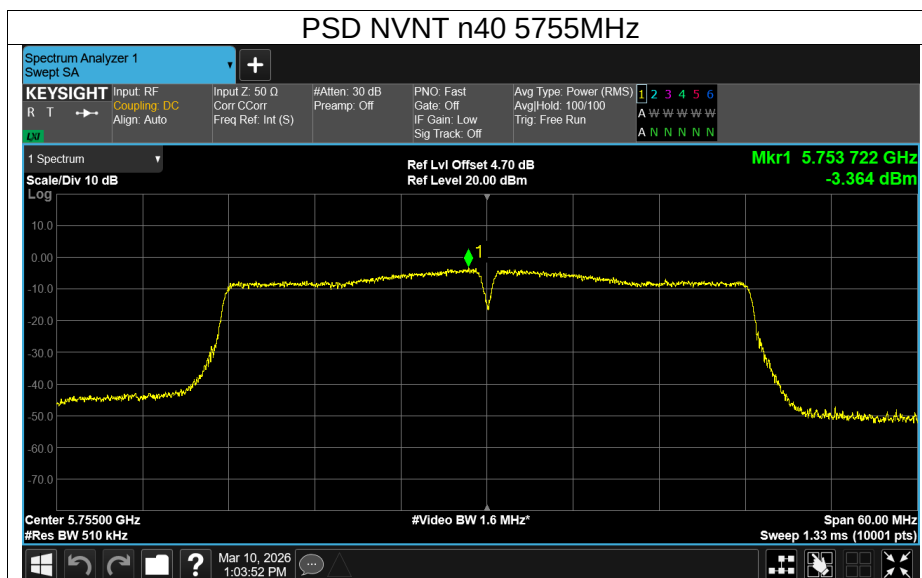

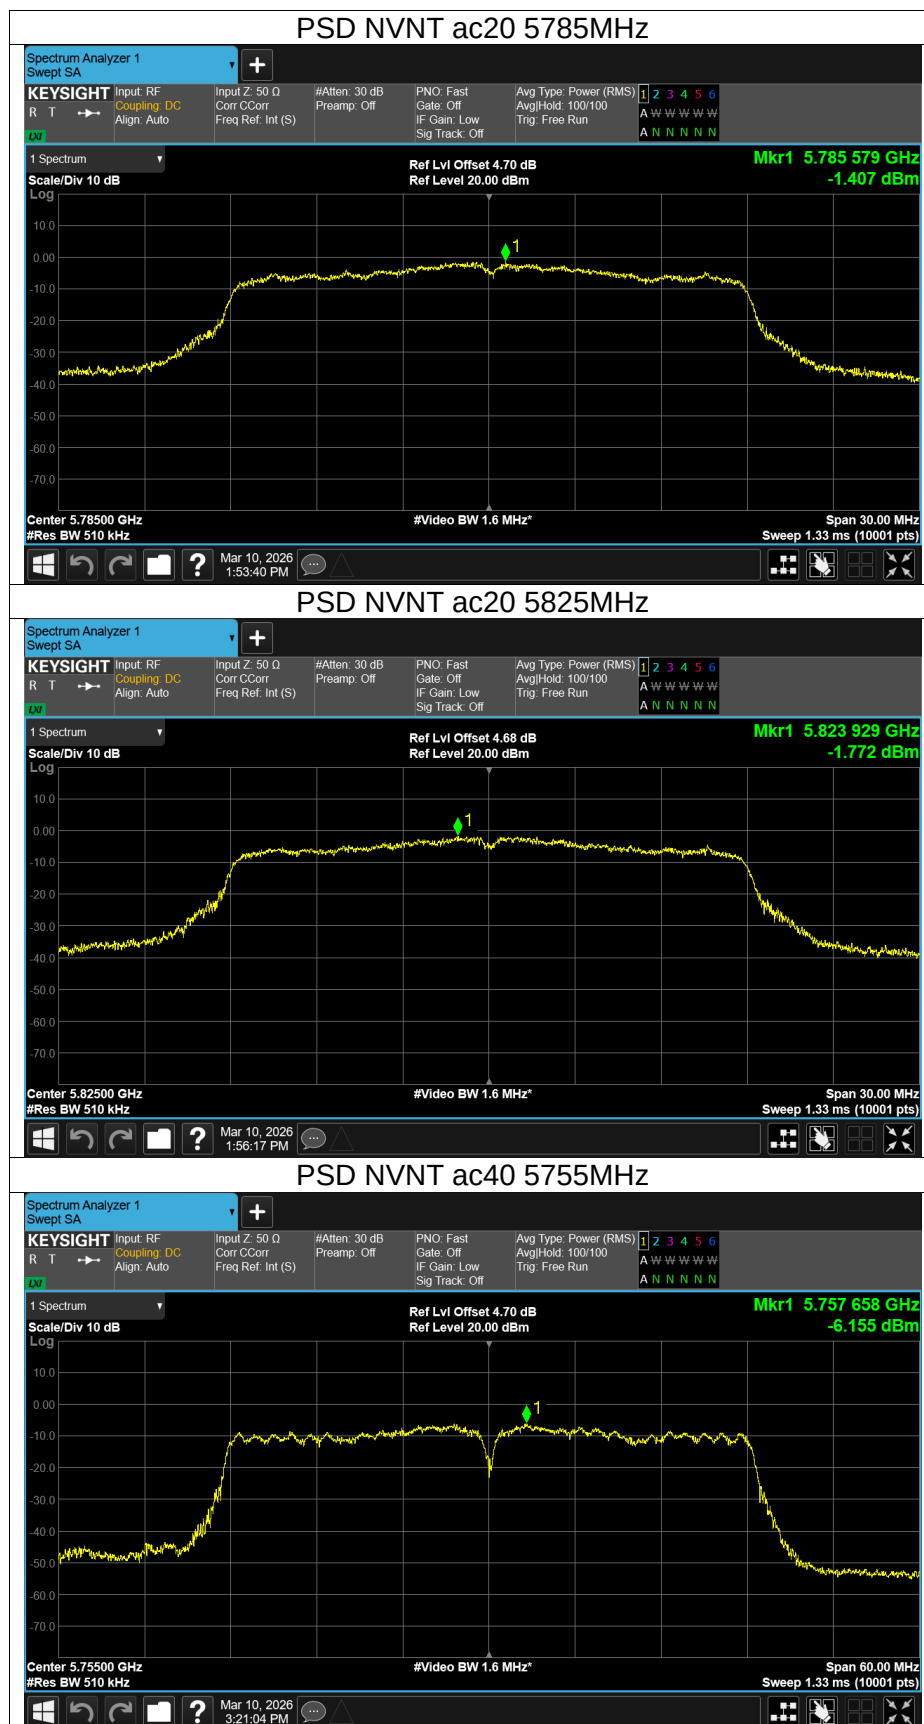





Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	-28.6	-27	Pass
NVNT	a	5240	-41.72	-27	Pass
NVNT	a	5260	-40.15	-27	Pass
NVNT	a	5320	-36.92	-27	Pass
NVNT	a	5500	-34.34	-27	Pass
NVNT	a	5700	-30.85	-27	Pass
NVNT	n20	5180	-38.86	-27	Pass
NVNT	n20	5240	-41.99	-27	Pass
NVNT	n20	5260	-39.64	-27	Pass
NVNT	n20	5320	-38.51	-27	Pass
NVNT	n20	5500	-37.69	-27	Pass
NVNT	n20	5700	-34.22	-27	Pass
NVNT	n40	5190	-32.89	-27	Pass
NVNT	n40	5230	-41.54	-27	Pass
NVNT	n40	5270	-39.76	-27	Pass
NVNT	n40	5310	-35.28	-27	Pass
NVNT	n40	5510	-33.64	-27	Pass
NVNT	n40	5670	-37.06	-27	Pass
NVNT	ac20	5180	-27.84	-27	Pass
NVNT	ac20	5240	-41.11	-27	Pass
NVNT	ac20	5260	-40	-27	Pass
NVNT	ac20	5320	-35.15	-27	Pass
NVNT	ac20	5500	-31.89	-27	Pass
NVNT	ac20	5700	-28.39	-27	Pass
NVNT	ac40	5190	-33.74	-27	Pass
NVNT	ac40	5230	-41.9	-27	Pass
NVNT	ac40	5270	-40.21	-27	Pass
NVNT	ac40	5310	-36.23	-27	Pass
NVNT	ac40	5510	-34.07	-27	Pass
NVNT	ac40	5670	-38.16	-27	Pass
NVNT	ac80	5210	-34.5	-27	Pass
NVNT	ac80	5290	-32.85	-27	Pass
NVNT	ac80	5530	-30.05	-27	Pass
NVNT	ac80	5610	-40.13	-27	Pass

Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	-20.87	15.6	Pass
NVNT	a	5825	-27.29	15.6	Pass
NVNT	n20	5745	-22.27	15.6	Pass
NVNT	n20	5825	-27.09	15.6	Pass
NVNT	n40	5755	-27.48	15.6	Pass
NVNT	n40	5795	-34.97	15.6	Pass
NVNT	ac20	5745	-19.67	15.6	Pass
NVNT	ac20	5825	-24.12	15.6	Pass
NVNT	ac40	5755	-27.41	15.6	Pass
NVNT	ac40	5795	-33.83	15.6	Pass
NVNT	ac80	5775	-27.65	15.6	Pass

