

Prüfbericht-Nr.: Test Report No.:	50070038 001	Auftrags-Nr.: Order No.:	164082351	Seite 1 von 24 Page 1 of 24
Kunden-Referenz-Nr.: Client Reference No.:	N/A	Auftragsdatum: Order date:	18.01.2017	
Auftraggeber: Client:	Oxstren Wearable Technologies Private Limited 25-26 Green Heritage, Sector 20, Kharghar, Navi Mumbai 410210, India			
Prüfgegenstand: Test item:	Fitness tracker			
Bezeichnung / Typ-Nr.: Identification / Type No.:	Actofit 612 (ACTOFIT)			
Auftrags-Inhalt: Order content:	FCC Certification			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 FCC KDB Publication 447498 v06 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109			
Wareneingangsdatum: Date of receipt:	18.01.2017			
Prüfmuster-Nr.: Test sample No.:	A000490556-007,008,009,010			
Prüfzeitraum: Testing period:	25.02.2017 - 27.02.2017			
Ort der Prüfung: Place of testing:	Shenzhen Accurate Technology Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von / tested by: <i>Alex Lan</i> 09.03.2017 Alex Lan / Project Engineer		kontrolliert von / reviewed by: <i>Winnie Hou</i> 10.03.2017 Winnie Hou / Technical Certifier		
Datum Date	Name / Stellung Name / Position	Unterschrift Signature	Datum Date	Name / Stellung Name / Position
Sonstiges / Other:		FCC ID: 2ALB9-A612		
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				



TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Passed

5.1.2 PEAK OUTPUT POWER

RESULT: Passed

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Passed

5.1.4 -6dB BANDWIDTH

RESULT: Passed

5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHz BANDWIDTH

RESULT: Passed

5.1.6 SPURIOUS EMISSION

RESULT: Passed

5.1.7 CONDUCTED EMISSIONS

RESULT: Passed

5.1.8 RADIATED EMISSION

RESULT: Passed

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	8
3.5	SUBMITTED DOCUMENTS	8
4.	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5	TEST SETUP DIAGRAM	10
5.	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>Peak Output Power</i>	<i>13</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>14</i>
5.1.4	<i>-6dB Bandwidth.....</i>	<i>15</i>
5.1.5	<i>Conducted spurious emissions measured in 100kHz Bandwidth.....</i>	<i>16</i>
5.1.6	<i>Spurious Emission</i>	<i>17</i>
5.1.7	<i>Conducted emissions.....</i>	<i>18</i>
5.1.8	<i>Radiated Emission</i>	<i>19</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	20
7.	LIST OF TABLES	24
8.	LIST OF PHOTOGRAPHS	24

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix 1: Test Result

2. Test Sites

2.1 Test Facilities

Shenzhen Accurate Technology Co., Ltd.

F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China

FCC Registration No.: 752051

Test site Industry Canada No.: 5077A-2

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Spurious emission and Radiated emission				
Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	06-01-2018
Test Receiver	Rohde&Schwarz	ESCS30	100307	06-01-2018
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	09-01-2018
Loop Antenna	Schwarzbeck	FMZB1516	1516131	09-01-2018
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	09-01-2018
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	09-01-2018
RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	06-01-2018
Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	06-01-2018
Radio Spectrum Test				
Spectrum Analyzer	Rohde & Schwarz	ESPI3	100396/003	06-01-2018
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	100307	06-01-2018
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	06-01-2018
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	06-01-2018
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	06-01-2018

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The Shenzhen Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a fitness tracker (wrist band) with Bluetooth low energy technology.

3.2 Ratings and System Details

Table 2: Rating of EUT

Kind of Equipment:	Fitness tracker
Type Designation:	Actofit 612
FCC ID	2ALB9-A612

Table 3: Technical Specification of EUT

Technical Specification	Value
Operating Frequency band	2402 – 2480 MHz
Bluetooth Core Version	4.1
Channel separation	2MHz
Extreme Temperature Range	0°C to +40°C
Operation Voltage	DC3.7V via lithium Battery
Modulation	GFSK
Antenna Type	Internal Antenna, Non-User Replaceable
Antenna Gain	0dBi
RF Output Power	0.00061W (-2.16dBm)

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Charging
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|-------------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - PCB Layout | - Instruction Manual |
| - Photo Document | - Rating Label |
| - Technical Description | |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2014 and ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested with following accessories

Description	Manufacturer	Type	S/N
Notebook	Lenovo	4290-RT8	R9-FW93G
Iphone6	Apple	MG4J2 CH/A	F17NTK2QG5MV

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

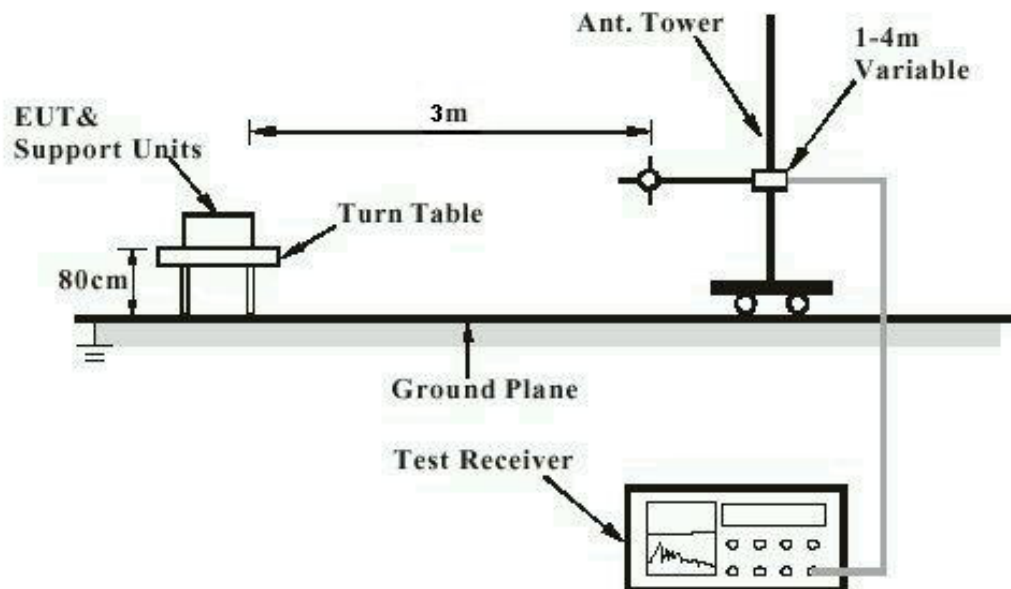


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

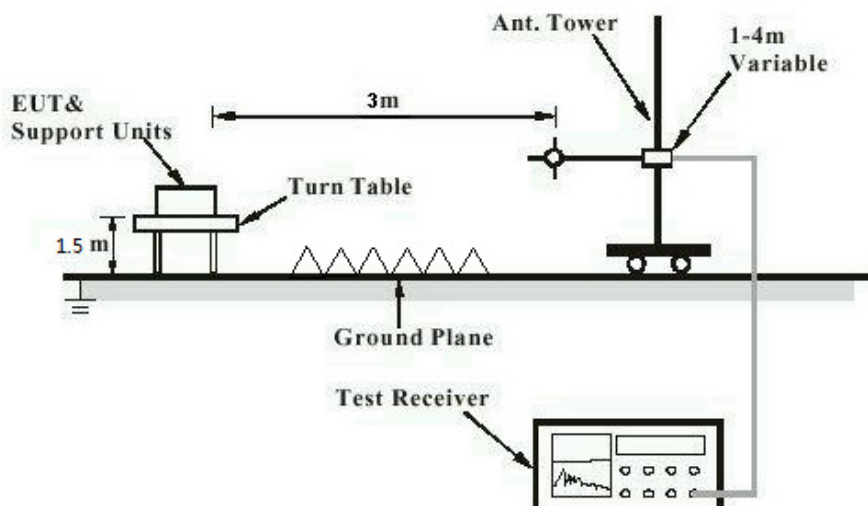


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement


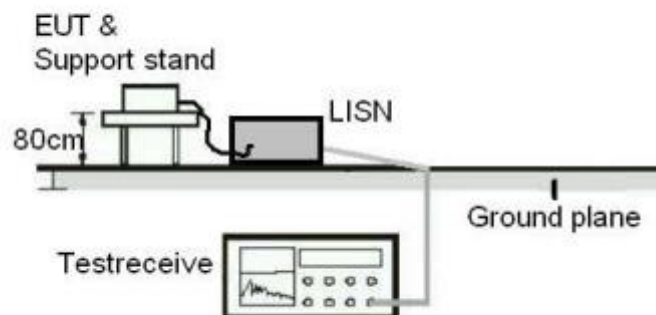


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

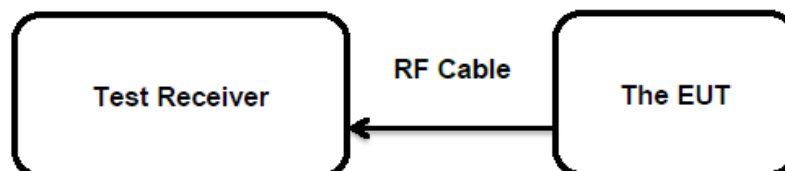

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test standard	:	FCC Part 15.247(b)(4) and Part 15.203
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 0dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT photo for details.

5.1.2 Peak Output Power

RESULT:**Passed**

Test date : 2017-02-25
Test standard : FCC Part 15.247(b)(3)
Basic standard : ANSI C63.10: 2013
Limit : 1 Watt
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 4: Test result of Peak Output Power

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (W)
		(dBm)	(W)	
Low Channel	2402	-2.16	0.00061	1
Middle Channel	2440	-2.84	0.00052	1
High Channel	2480	-3.58	0.00044	1

5.1.3 Conducted Power Spectral Density

RESULT:**Passed**

Test date : 2017-02-25
Test standard : FCC Part 15.247(e)
Basic standard : ANSI C63.10: 2013
Limit : 8dBm/3kHz
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 5: Test result of Conducted Power Spectral Density

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2402	-15.61	8
Middle Channel	2440	-15.33	8
High Channel	2480	-14.19	8

5.1.4 -6dB Bandwidth

RESULT:**Passed**

Date of testing : 2017-02-25
Test standard : FCC Part 15.247(a)(2)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 6: Test result of -6dB Bandwidth

Channel	Channel Frequency (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	759.8	500	Pass
Mid Channel	2440	759.8	500	Pass
High Channel	2480	746.8	500	Pass

5.1.5 Conducted spurious emissions measured in 100kHz Bandwidth

RESULT:**Passed**

Date of testing	:	2017-02-25
Test standard	:	FCC part 15.247(d)
Basic standard	:	ANSI C63.10: 2013
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

All emissions are more than 20dB below fundamental, details refer to Appendix 1.

5.1.6 Spurious Emission

RESULT:**Passed**

Date of testing	:	2017-02-25 to 2017-02-27
Test standard	:	FCC part 15.247(d) FCC Part 15.205
Basic standard	:	ANSI C63.10: 2013
Limits	:	Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

Remark:

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test setup photos.

Testing was carried out within frequency range 9kHz to the tenth harmonics.

For details refer to Appendix 1.

5.1.7 Conducted emissions

RESULT:**Passed**

Date of testing	:	2017-02-25
Test standard	:	FCC Part 15.107(a) & FCC Part 15.207(a)
Basic standard	:	ANSI C63.10: 2013 & ANSI C63.4: 2014
Frequency range	:	0.15 – 30MHz
Limits	:	FCC Part 15.107(a) & FCC Part 15.207(a)
Kind of test site	:	Shield room

Test setup

Input Voltage	:	AC 120V, 60Hz via AC input of Notebook
Operation Mode	:	A, B
Earthing	:	Not connected
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

For details refer to Appendix 1.

5.1.8 Radiated Emission

RESULT:**Passed**

Date of testing	:	2017-02-25
Test standard	:	FCC Part 15.109(a) & FCC Part 15.209(a)
Basic standard	:	ANSI C63.4: 2014
Frequency range	:	30 - 6000MHz
Classification	:	Class B
Limit	:	FCC Part 15.109(a) & FCC Part 15.209(a)
Kind of test site	:	3m Semi-Anechoic Chamber


Test setup

Input Voltage	:	AC 120V, 60Hz via AC input of Notebook
Operation mode	:	B
Earthing	:	Not connected
Ambient temperature	:	Refer to Appendix 1
Relative humidity	:	Refer to Appendix 1
Atmospheric pressure	:	Refer to Appendix 1


Test data refer to Appendix 1.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Radio Spectrum Test

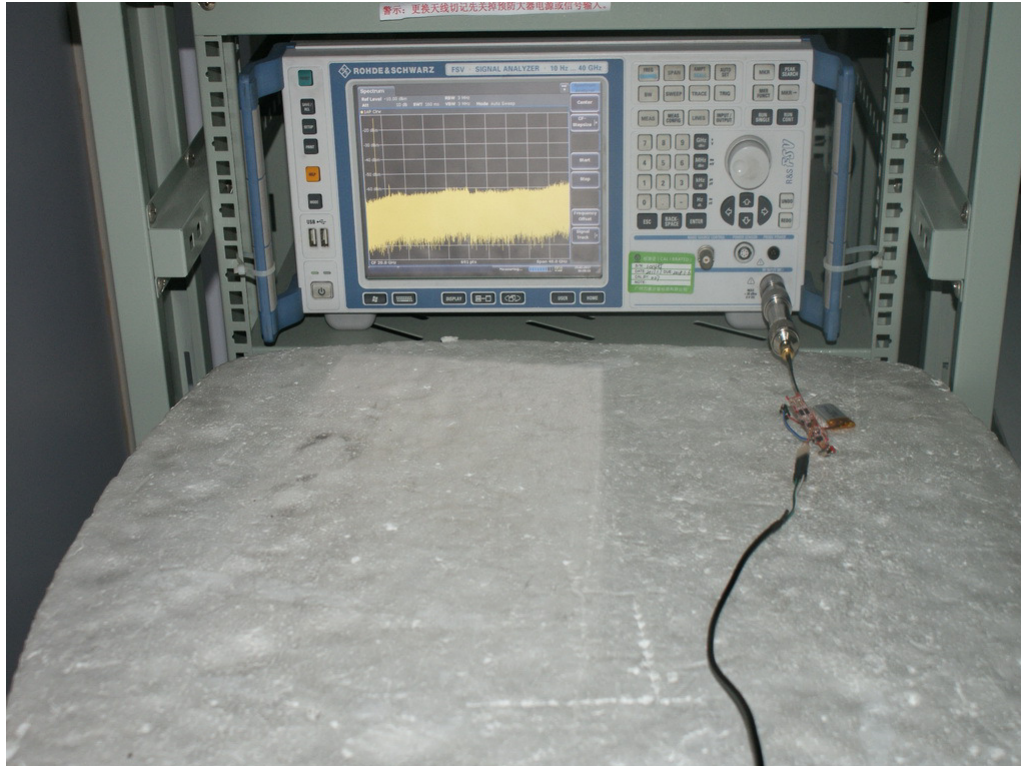


Photograph 2: Set-up for Spurious Emissions (9kHz-30MHz)

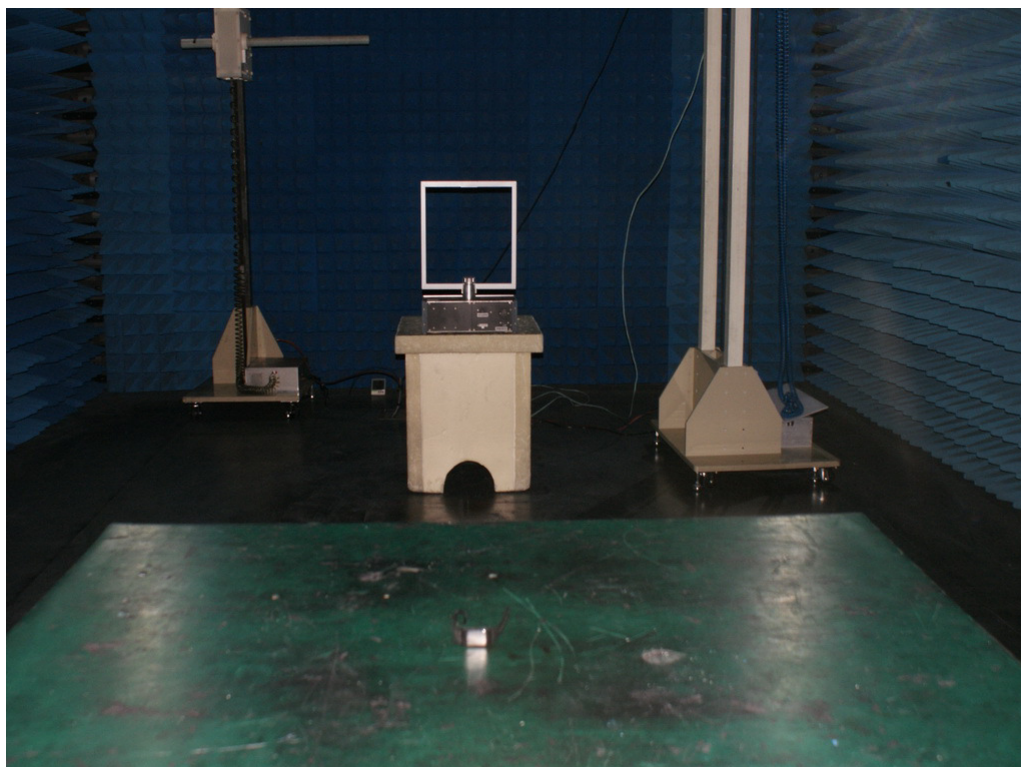


Photograph 3: Set-up for Spurious Emissions (30MHz-1GHz)

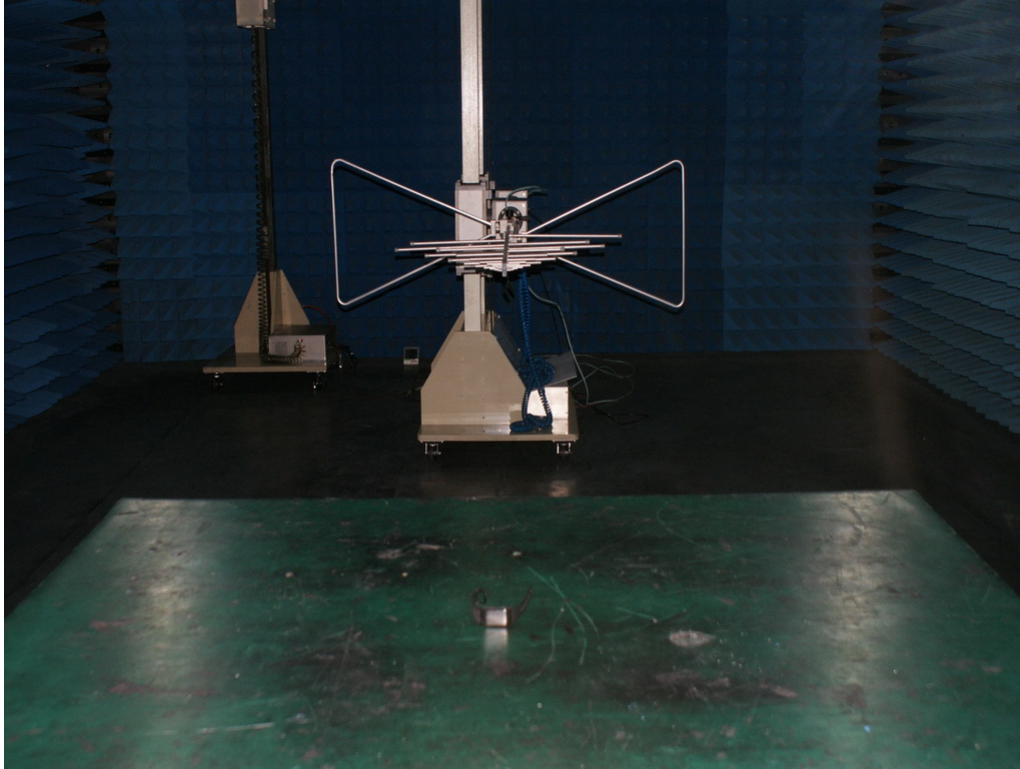

Photograph 4: Set-up for Spurious Emissions (1GHz-18GHz)

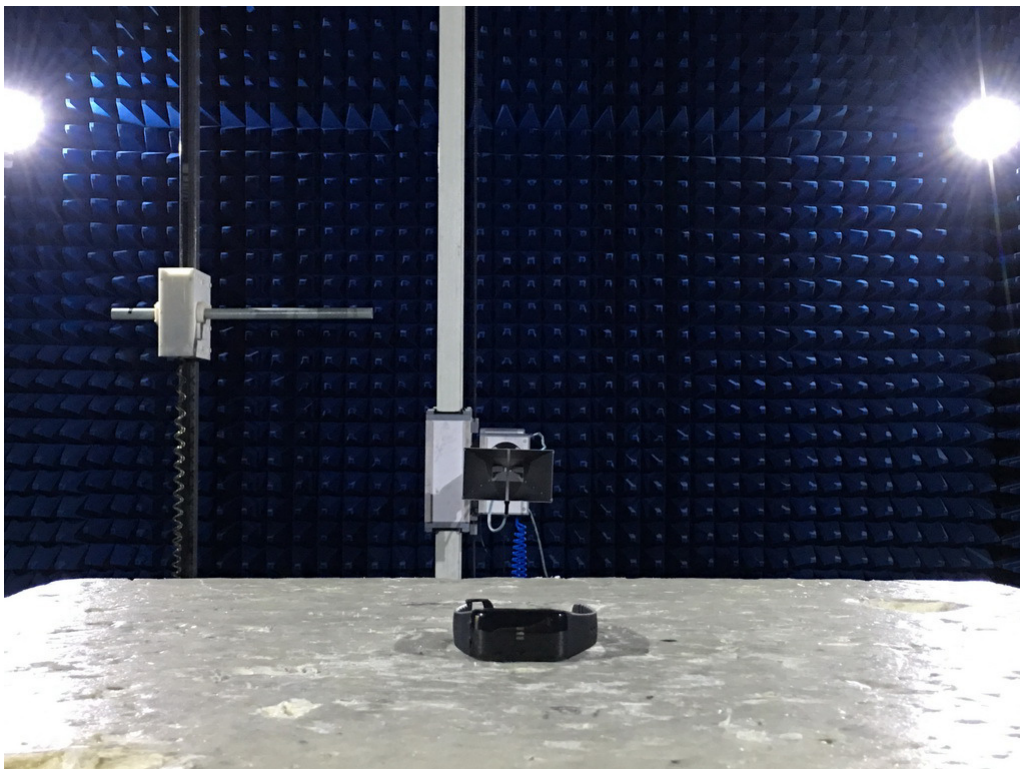


Photograph 5: Set-up for Spurious Emissions (18GHz-26GHz)

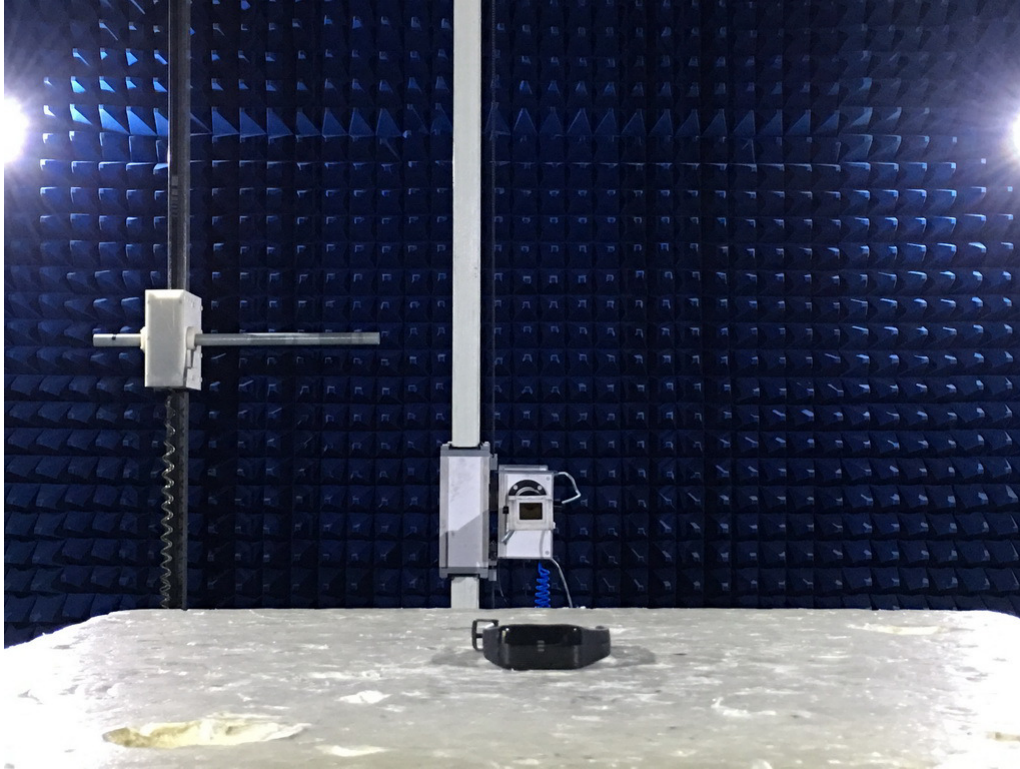


Photograph 6: Set-up for Conducted Emissions



Photograph 7: Set-up for Radiated Emissions, below 1GHz

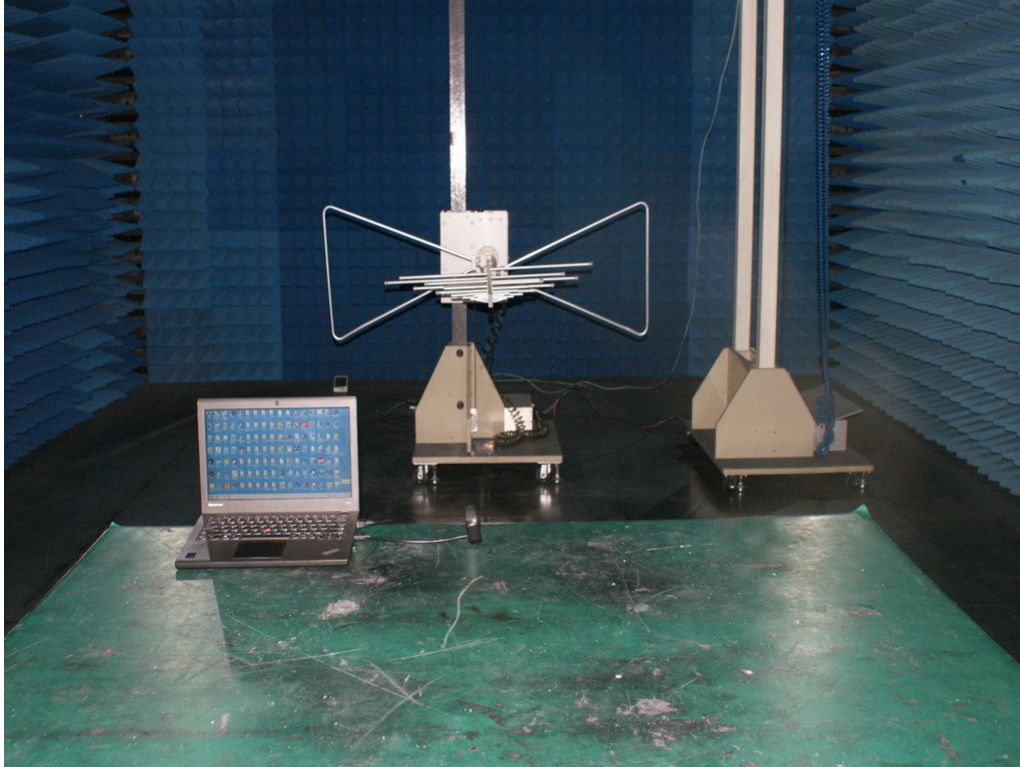

Photograph 8: Set-up for Radiated Emissions, above 1GHz

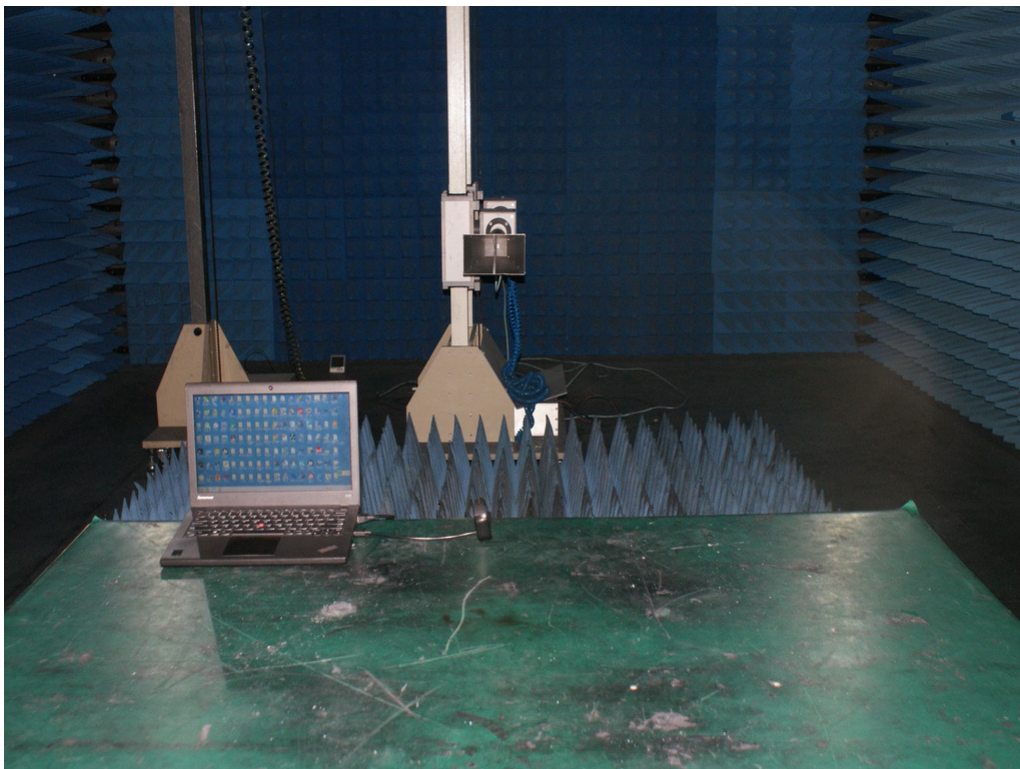

7. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Rating of EUT	7
Table 3: Technical Specification of EUT	7
Table 4: Test result of Peak Output Power	13
Table 5: Test result of Conducted Power Spectral Density	14
Table 6: Test result of -6dB Bandwidth	15

8. List of Photographs

Photograph 1: Set-up for Radio Spectrum Test	20
Photograph 2: Set-up for Spurious Emissions (9kHz-30MHz)	20
Photograph 3: Set-up for Spurious Emissions (30MHz-1GHz)	21
Photograph 4: Set-up for Spurious Emissions (1GHz-18GHz)	21
Photograph 5: Set-up for Spurious Emissions (18GHz-26GHz)	22
Photograph 6: Set-up for Conducted Emissions	22
Photograph 7: Set-up for Radiated Emissions, below 1GHz	23
Photograph 8: Set-up for Radiated Emissions, above 1GHz	23

List of Figures

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz),	2
Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)	2
Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)	4
Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)	5
Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz – 18GHz)	6
Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)	7
Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz – 25GHz)	8
Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)	9
Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)	10
Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz)	11
Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)	12
Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)	13
Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)	14
Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)	15
Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)	16
Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)	17
Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)	18
Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz)	19
Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)	20
Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)	21
Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz – 18GHz)	22
Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)	23
Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz – 25GHz)	24
Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)	25
Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal	25
Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical	27
Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal	28
Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical	29
Figure 57: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.1	30
Figure 58: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.2	31
Figure 59: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.3	32
Figure 63: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.1	33
Figure 64: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.3	34
Figure 29: Test figure of Conducted emissions, Mode A, line live	34
Figure 29: Test figure of Conducted emissions, Mode A, line neutral	36
Figure 29: Test figure of Conducted emissions, Mode B, line live	37
Figure 30: Test figure of Conducted emissions, Mode B, line neutral	38
Figure 31: Test figure of Radiated emissions, Mode B, Below 1GHz, Horizontal	39
Figure 32: Test figure of Radiated emissions, Mode B, Below 1GHz, Vertical	40
Figure 33: Test figure of Radiated emissions, Mode B, Above 1GHz, Horizontal	41
Figure 34: Test figure of Radiated emissions, Mode B, Above 1GHz, Vertical	42

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz),

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: X
Start of Test: 2017-2-27 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

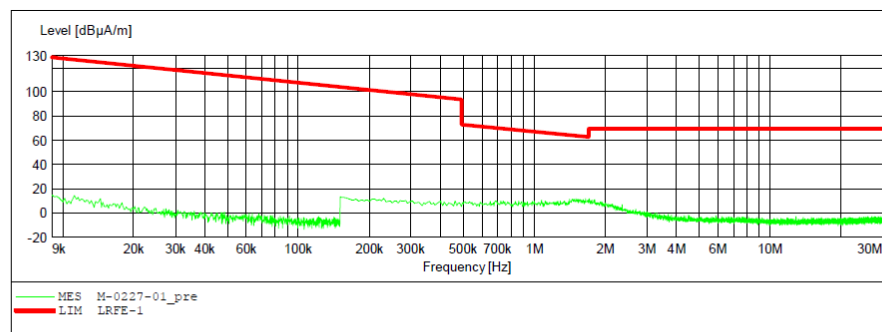


Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: TX 2402MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: Y
Start of Test: 2017-2-27 /

SCAN TABLE: "LFRE Fin"

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

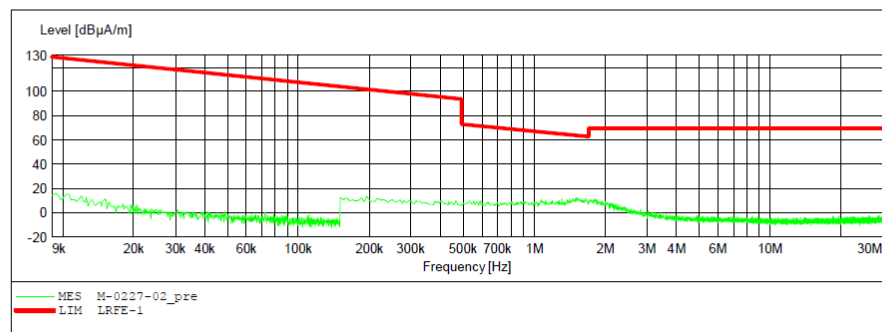


Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1506

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2402MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

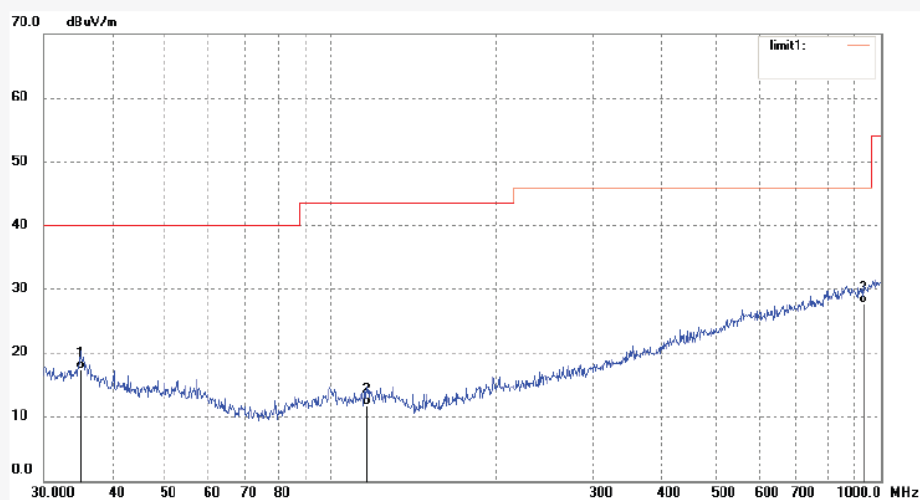

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.0048	27.78	-10.41	17.37	40.00	-22.63	QP			
2	116.1320	24.83	-13.06	11.77	43.50	-31.73	QP			
3	929.0081	24.94	2.75	27.69	46.00	-18.31	QP			

Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1507
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2402MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Vertical
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

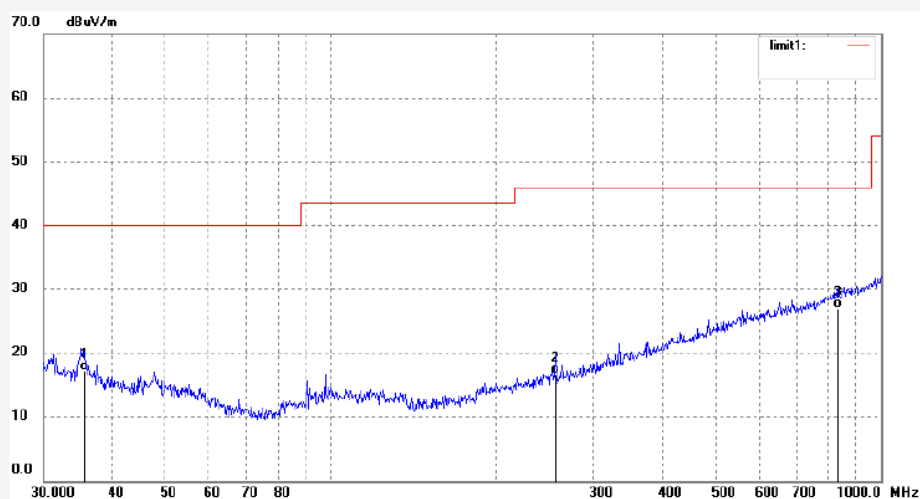

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.6240	27.71	-10.55	17.16	40.00	-22.84	QP			
2	255.6230	27.30	-10.52	16.78	46.00	-29.22	QP			
3	833.3170	25.68	1.42	27.10	46.00	-18.90	QP			

Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz –18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1490

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2402MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

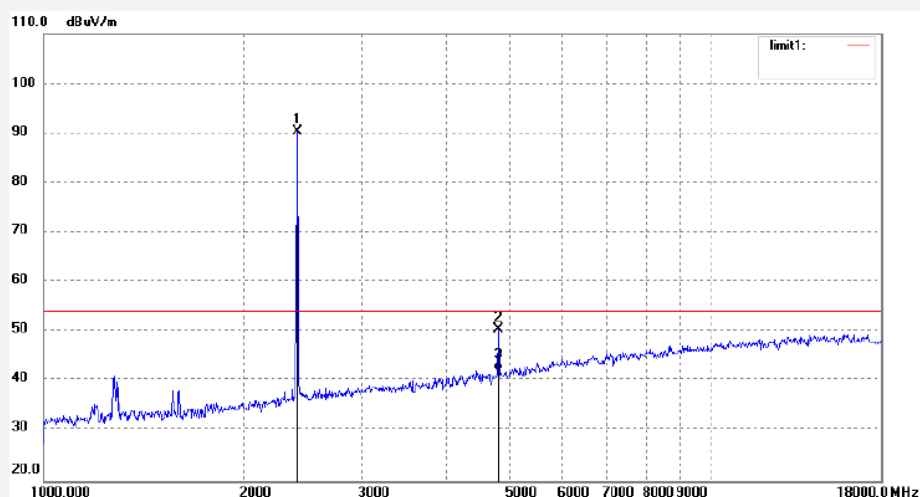

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	91.83	-1.61	90.22	/	/	peak			
2	4804.027	45.54	4.90	50.44	74.00	-23.56	peak			
3	4804.027	37.24	4.90	42.14	54.00	-11.86	AVG			

Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1491

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2402MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

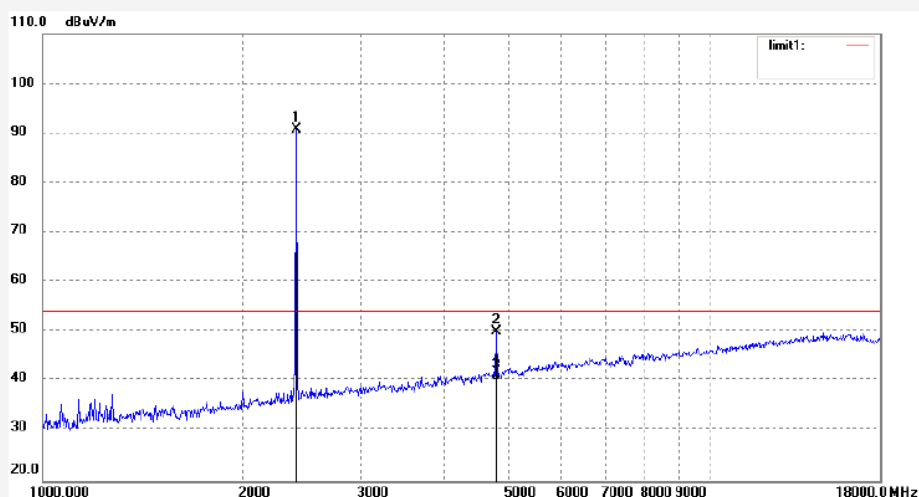

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	92.41	-1.61	90.80	/	/	peak			
2	4804.026	45.03	4.90	49.93	74.00	-24.07	peak			
3	4804.026	35.34	4.90	40.24	54.00	-13.76	AVG			

Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz –25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1501
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2402MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Horizontal
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

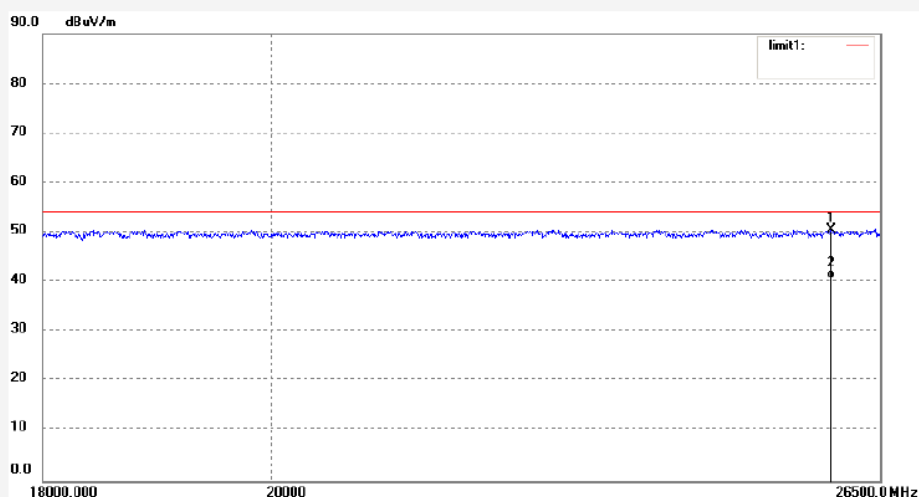

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25912.148	10.27	40.20	50.47	74.00	-23.53	peak			
2	25912.148	0.37	40.20	40.57	54.00	-13.43	AVG			

Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1500	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 17/02/25/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: Smart bracelet	Engineer Signature: WADE
Mode: TX 2402MHz	Distance: 3m
Model: Actofit 612	
Manufacturer: MILLION	

Note:

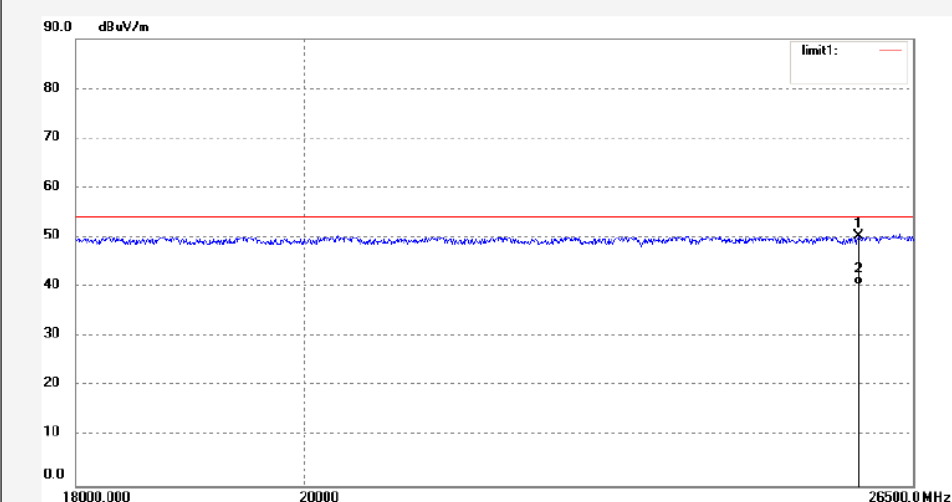

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25842.088	9.21	41.01	50.22	74.00	-23.78	peak			
2	25842.088	-0.65	41.01	40.36	54.00	-13.64	AVG			

Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Smart bracelet M/N:Actofit 612
 Manufacturer: MILLION
 Operating Condition: TX 2440MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2017-2-27 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

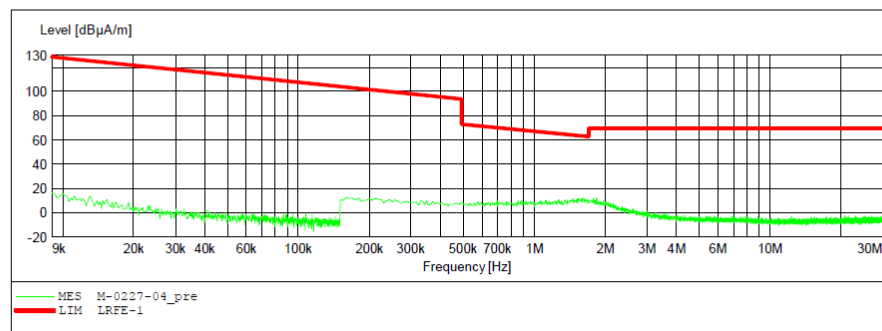

**Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity
(9kHz – 30MHz)**

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: TX 2440MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: Y
Start of Test: 2017-2-27 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

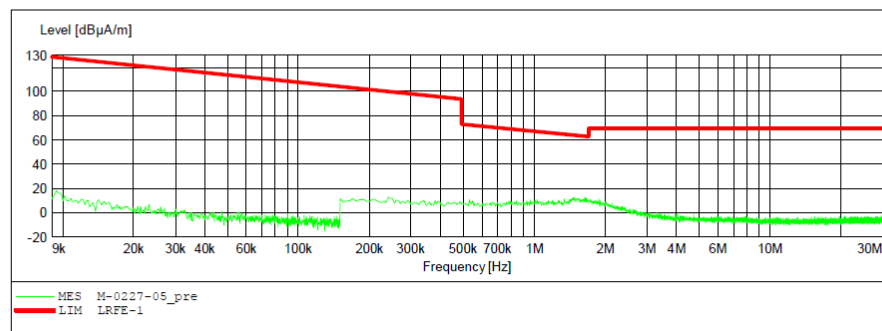


Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1509
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2440MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Horizontal
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

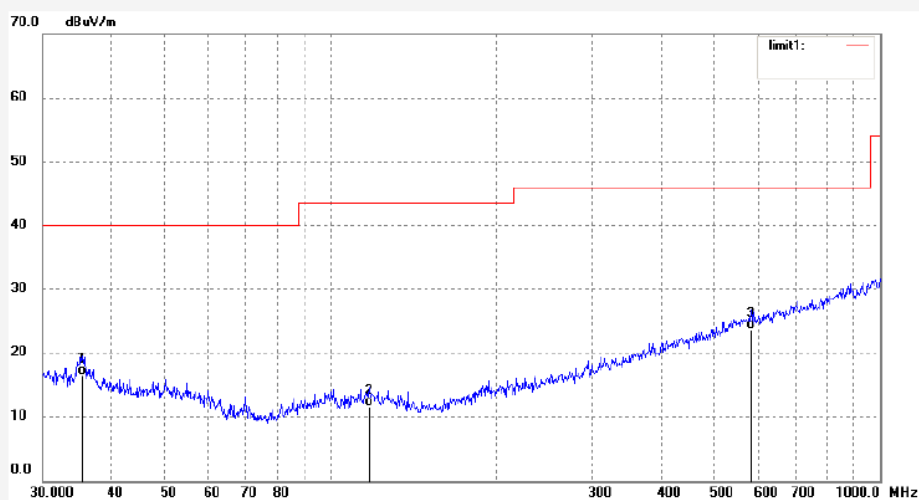

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.3750	27.08	-10.49	16.59	40.00	-23.41	QP			
2	117.7724	24.75	-13.05	11.70	43.50	-31.80	QP			
3	582.7424	26.32	-2.53	23.79	46.00	-22.21	QP			

Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1508

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2440MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

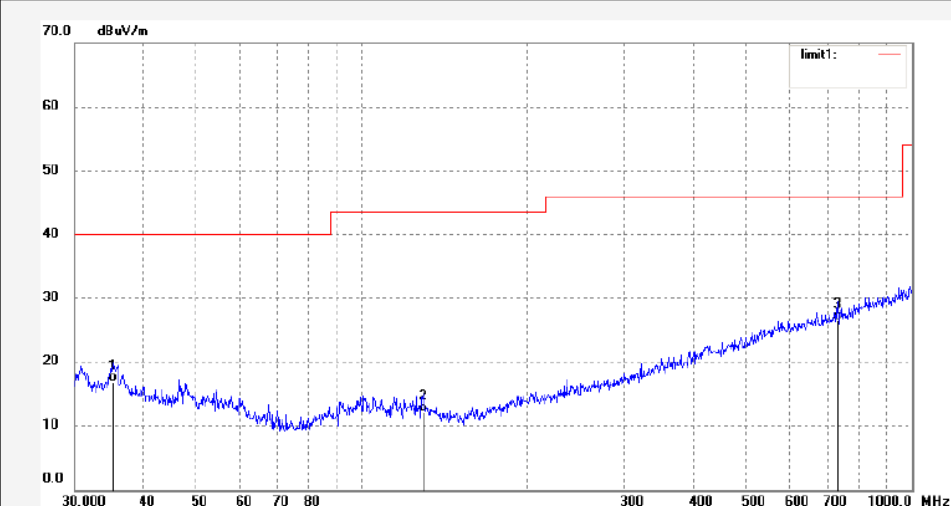

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2511	27.32	-10.47	16.85	40.00	-23.15	QP			
2	129.0146	25.84	-13.74	12.10	43.50	-31.40	QP			
3	731.9202	27.04	-0.61	26.43	46.00	-19.57	QP			

Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1494
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2440MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Horizontal
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

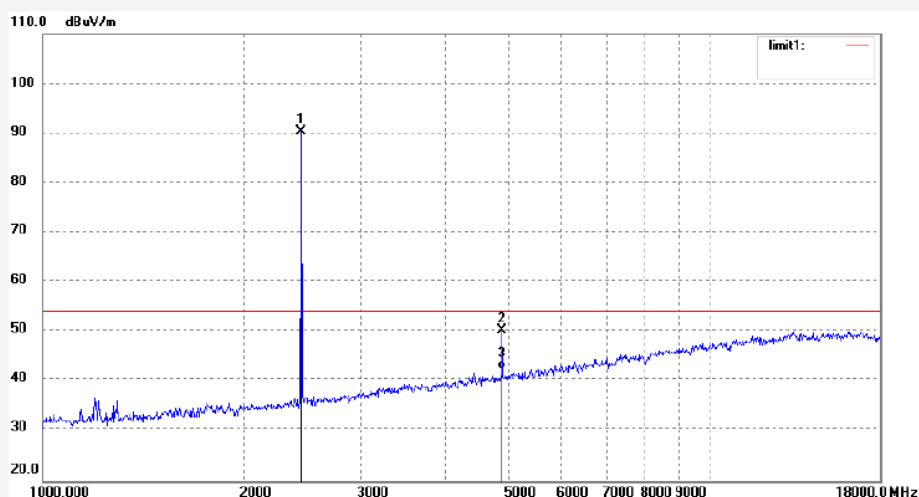

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	91.78	-1.46	90.32	/	/	peak			
2	4880.028	44.77	5.60	50.37	74.00	-23.63	peak			
3	4880.028	36.76	5.60	42.36	54.00	-11.64	AVG			

Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1495

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2440MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

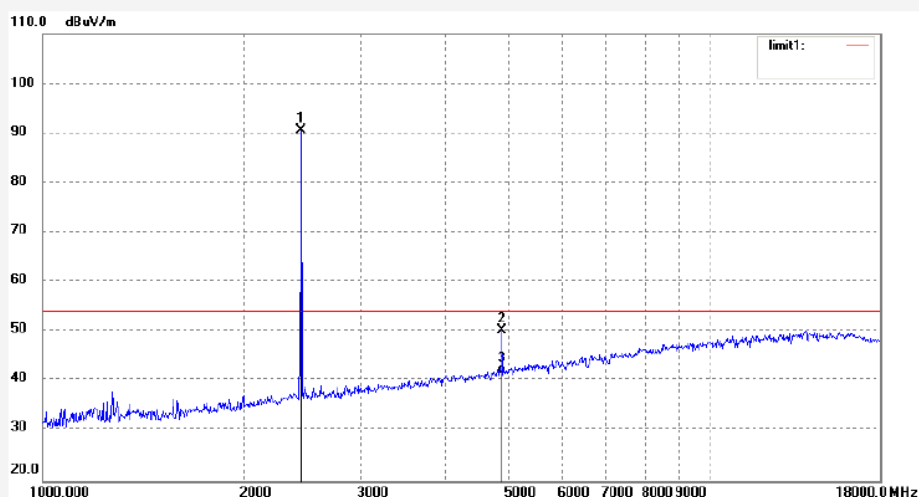

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	91.91	-1.46	90.45	/	/	peak			
2	4880.025	44.72	5.60	50.32	74.00	-23.68	peak			
3	4880.025	35.85	5.60	41.45	54.00	-12.55	AVG			

Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1502
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2440MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Horizontal
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

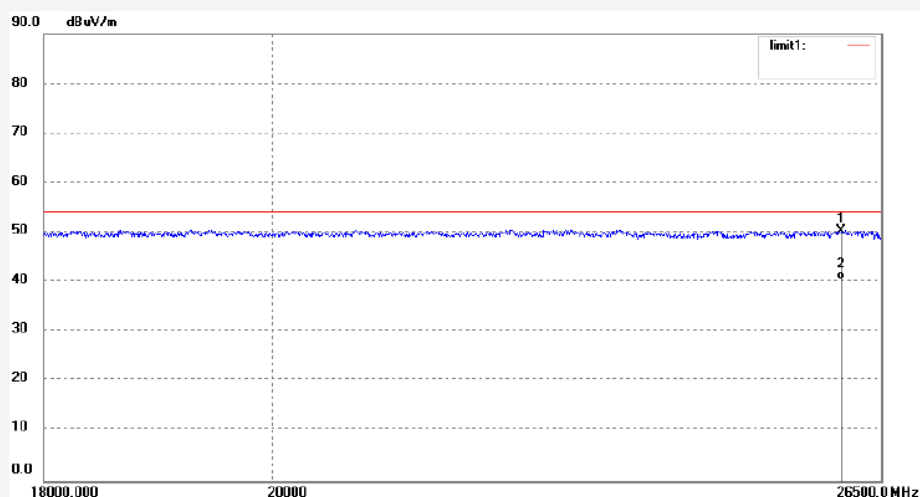

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26022.626	10.01	40.26	50.27	74.00	-23.73	peak			
2	26022.626	0.05	40.26	40.31	54.00	-13.69	AVG			

Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1503
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2440MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Vertical
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

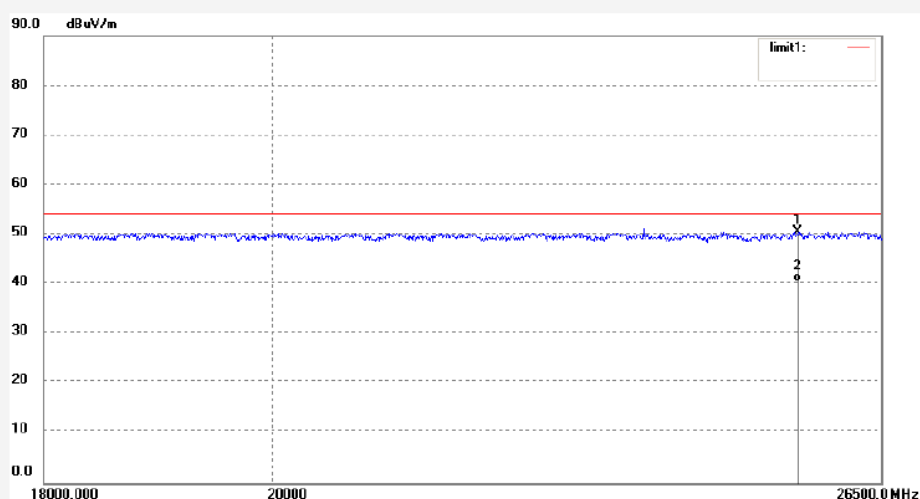

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25504.482	9.49	41.06	50.55	74.00	-23.45	peak			
2	25504.482	-0.72	41.06	40.34	54.00	-13.66	AVG			

Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)


ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Smart bracelet M/N:Actofit 612
 Manufacturer: MILLION
 Operating Condition: TX 2480MHz
 Test Site: 2# Chamber
 Operator: LGWADE
 Test Specification: DC 3.7V
 Comment: X
 Start of Test: 2017-2-27 /

SCAN TABLE: "LFRE Fin"

Short Description:				_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

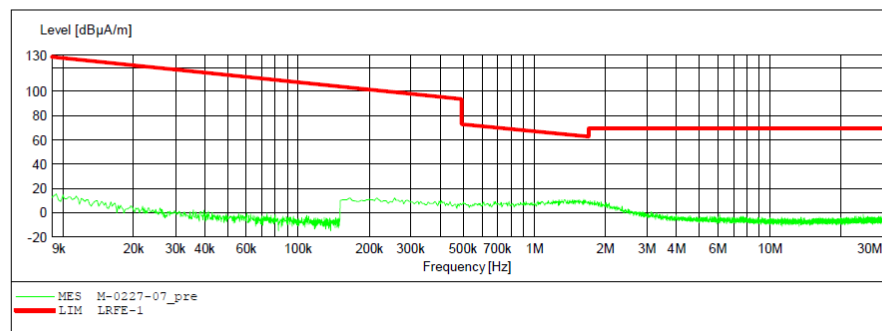

**Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity
(9kHz – 30MHz)**

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: TX 2480MHz
Test Site: 2# Chamber
Operator: LGWADE
Test Specification: DC 3.7V
Comment: Y
Start of Test: 2017-2-27 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

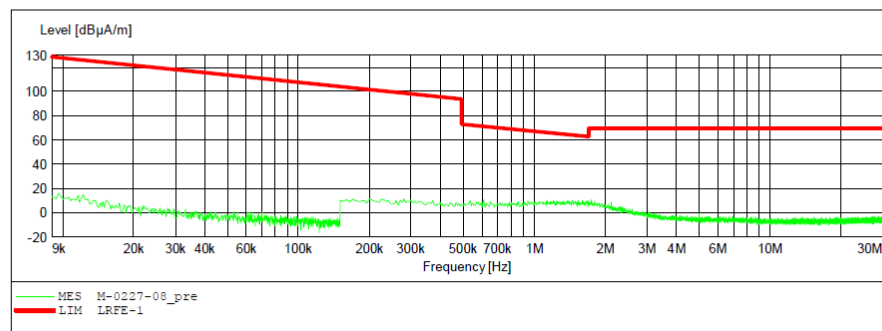


Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1510

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2480MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

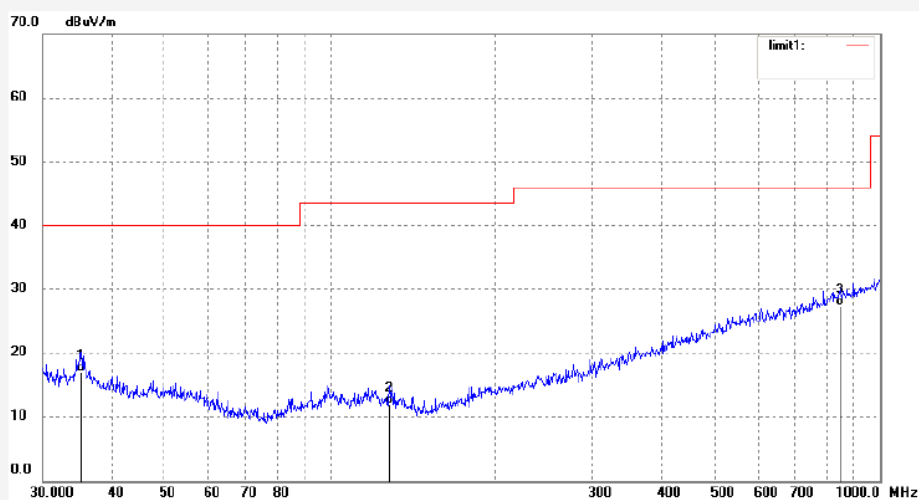

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2511	27.60	-10.47	17.13	40.00	-22.87	QP			
2	128.1129	25.64	-13.71	11.93	43.50	-31.57	QP			
3	848.0562	25.84	1.54	27.38	46.00	-18.62	QP			

Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1511

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2480MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

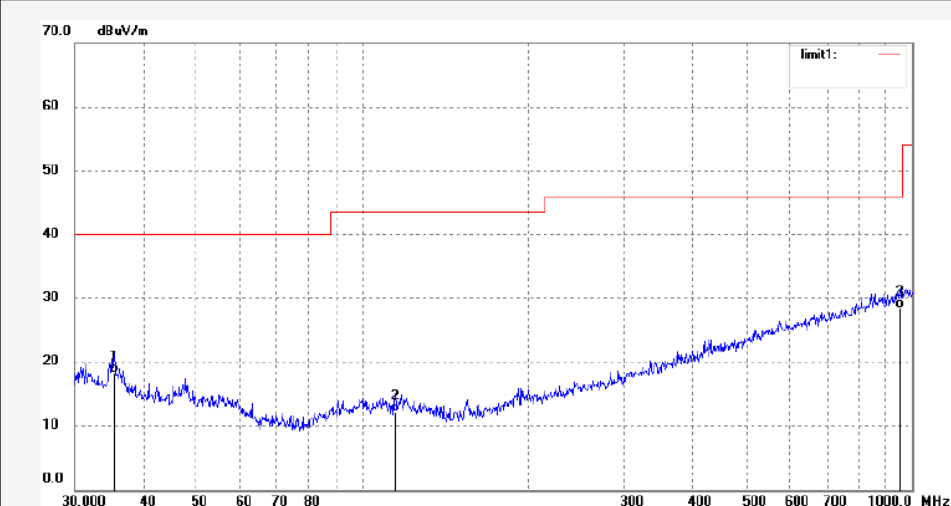

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.3750	28.79	-10.49	18.30	40.00	-21.70	QP			
2	114.9167	25.16	-13.08	12.08	43.50	-31.42	QP			
3	952.0937	25.34	3.16	28.50	46.00	-17.50	QP			

Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz –18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1497

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2480MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

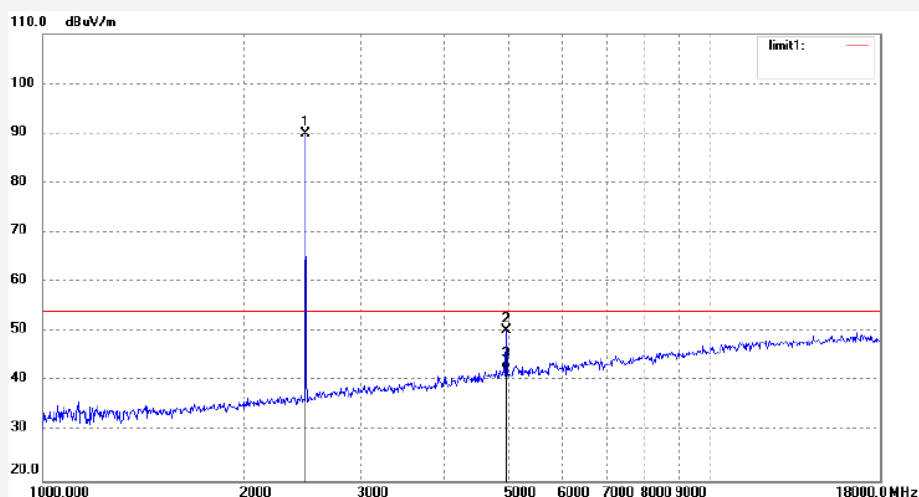

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	91.34	-1.40	89.94	/	/	peak			
2	4960.028	44.27	6.10	50.37	74.00	-23.63	peak			
3	4960.028	36.38	6.10	42.48	54.00	-11.52	AVG			

Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1496

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2480MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Vertical

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

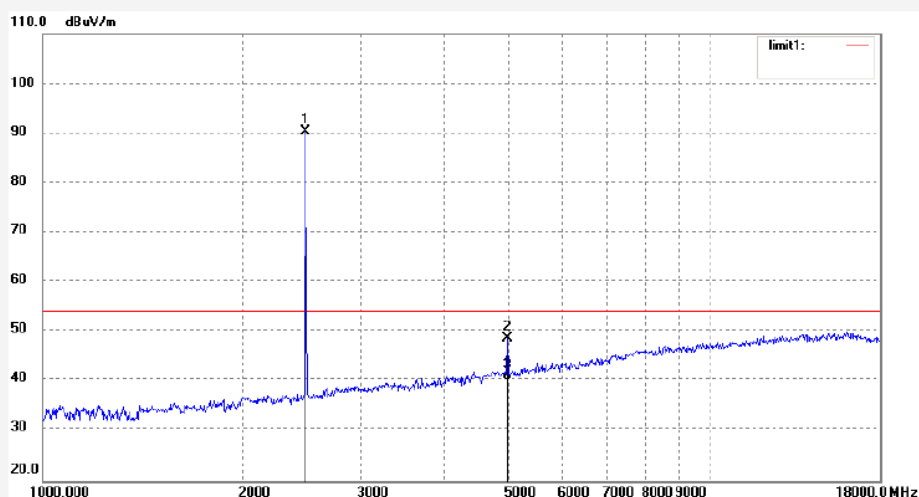

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	91.61	-1.40	90.21	/	/	peak			
2	4960.029	42.48	6.10	48.58	74.00	-25.42	peak			
3	4960.029	34.14	6.10	40.24	54.00	-13.76	AVG			

Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz –25GHz)



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1505

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: TX 2480MHz

Model: Actofit 612

Manufacturer: MILLION

Polarization: Horizontal

Power Source: DC 3.7V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

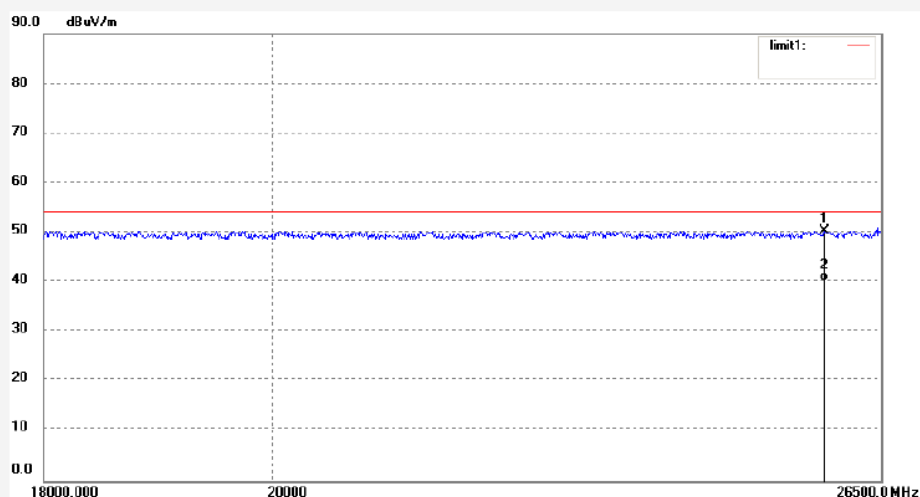

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	25812.121	10.06	40.15	50.21	74.00	-23.79	peak			
2	25812.121	0.10	40.15	40.25	54.00	-13.75	AVG			

Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)

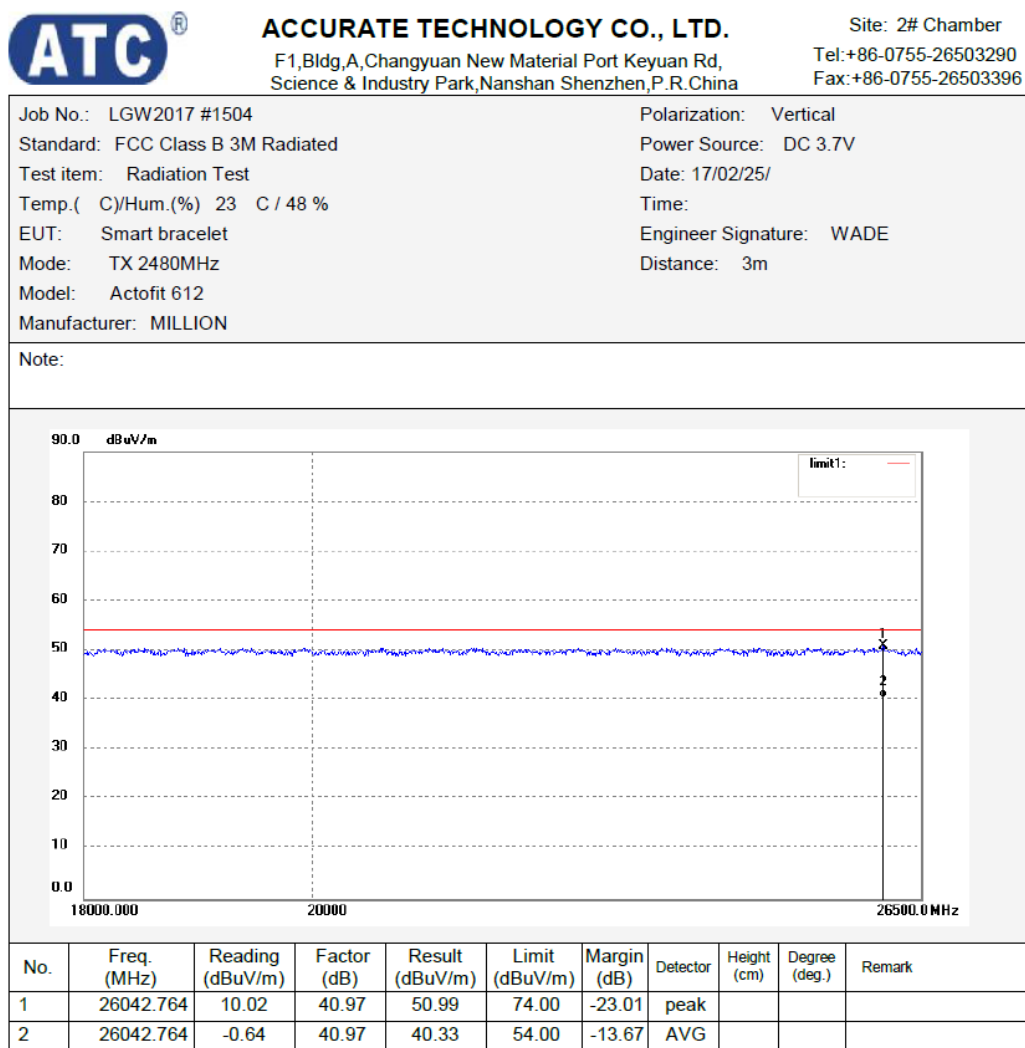


Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1493
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2402MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Horizontal
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

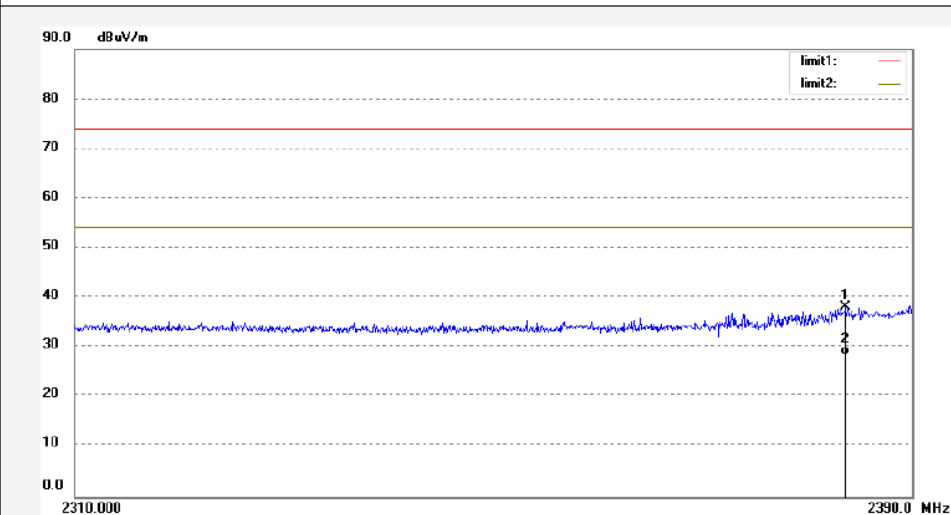

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2383.600	39.81	-1.76	38.05	74.00	-35.95	peak			
2	2383.600	30.32	-1.76	28.56	54.00	-25.44	AVG			

Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1492
Standard: FCC (Band Edge)
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: TX 2402MHz
Model: Actofit 612
Manufacturer: MILLION

Polarization: Vertical
Power Source: DC 3.7V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

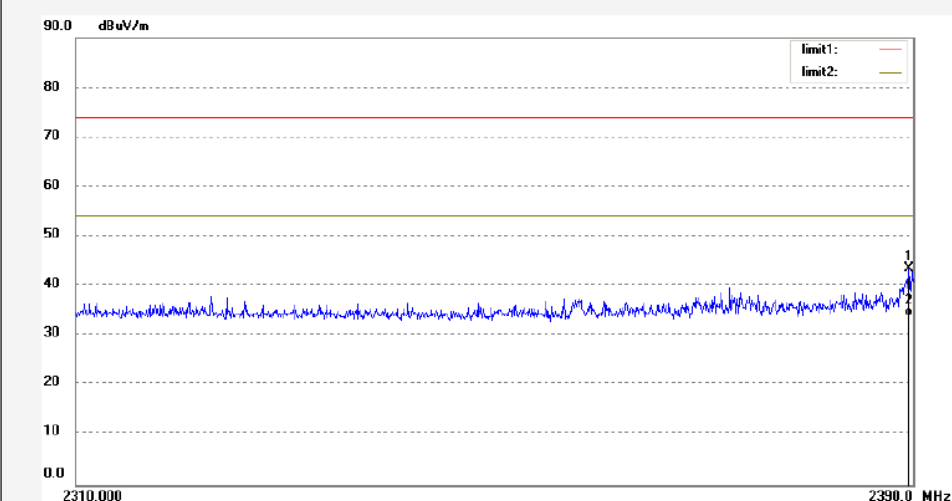

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2389.600	45.16	-1.71	43.45	74.00	-30.55	peak			
2	2389.600	35.50	-1.71	33.79	54.00	-20.21	AVG			

Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal

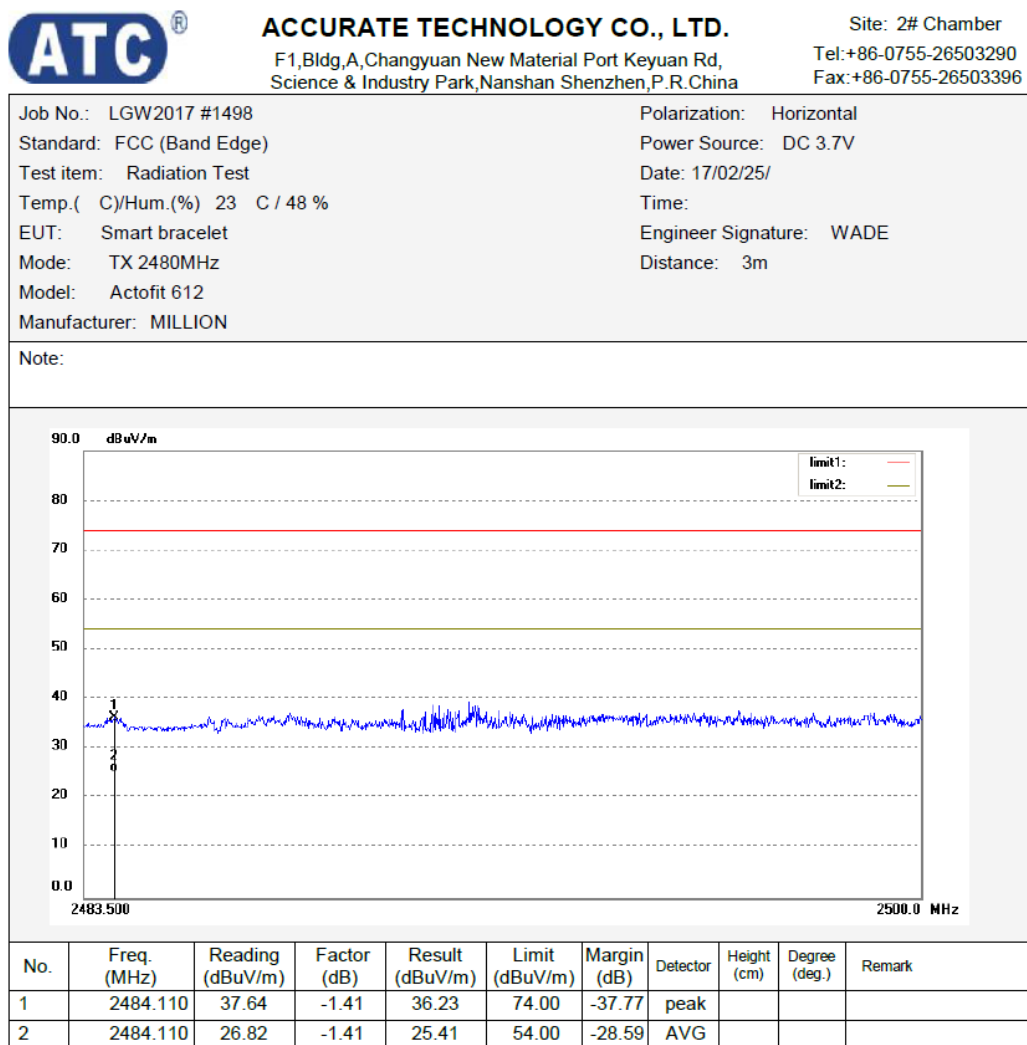


Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical



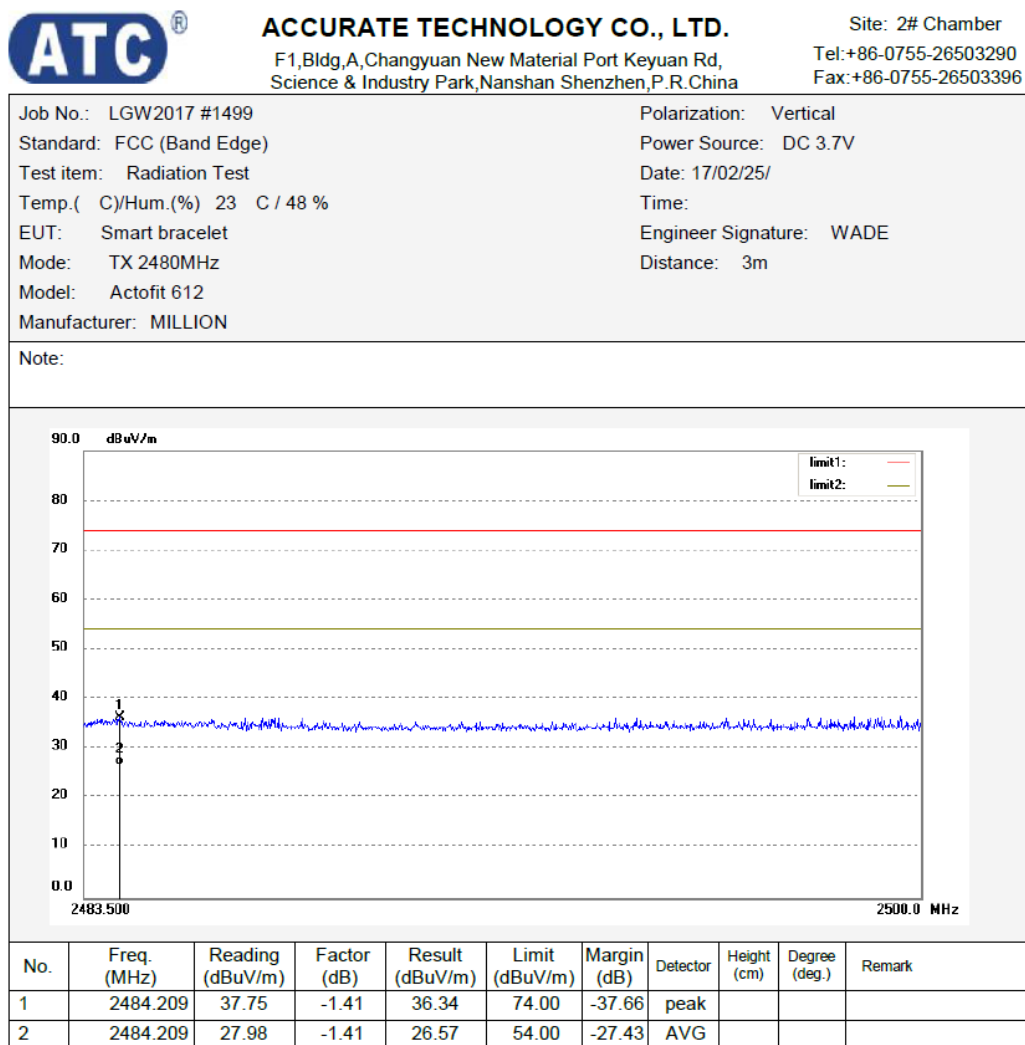


Figure 29: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.1

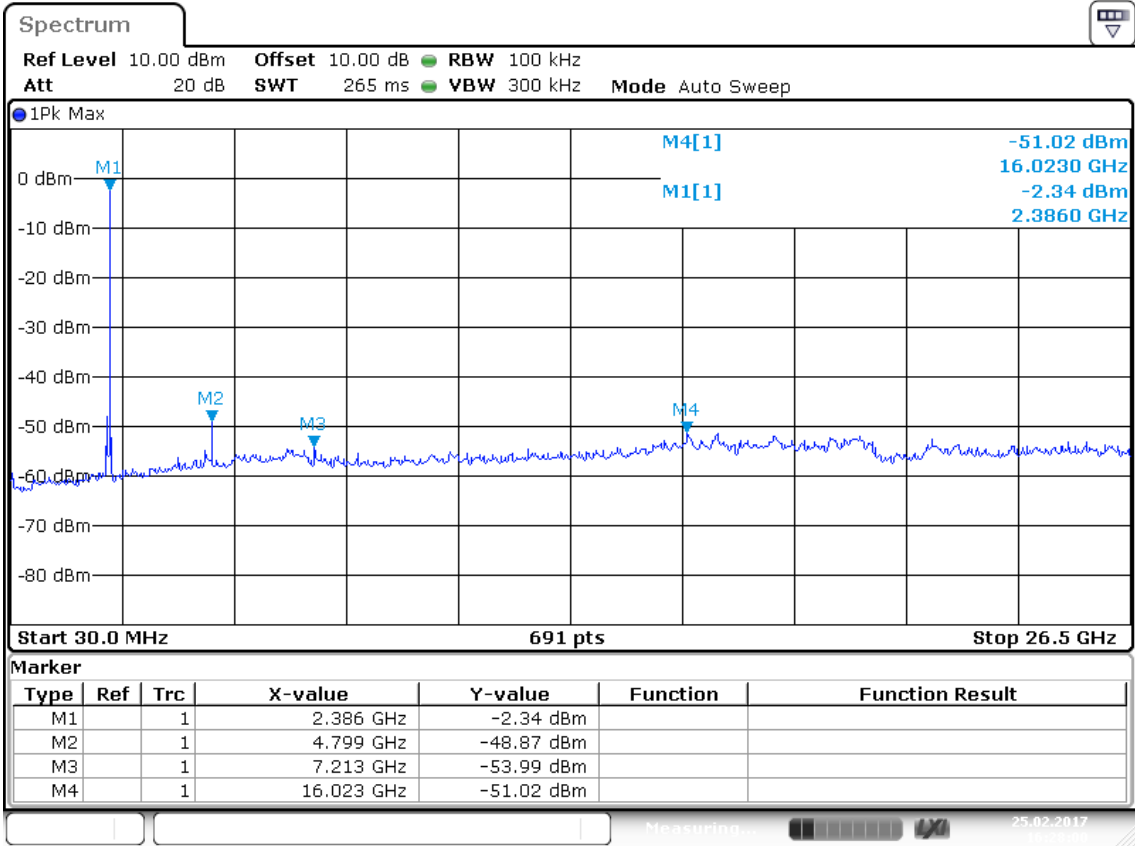


Date: 25.FEB.2017 16:28:01

Figure 30: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.2

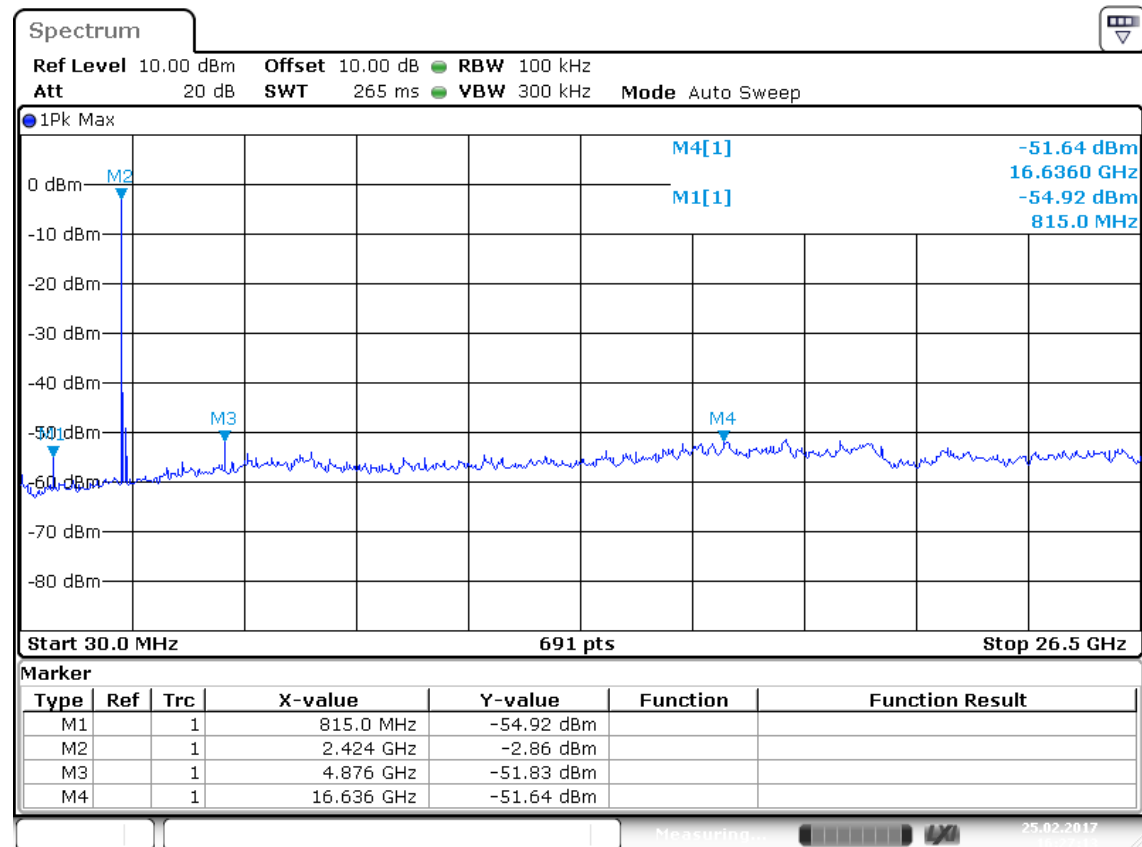


Date: 25.FEB.2017 16:27:13

Figure 31: Test figure of conducted emissions in 100kHz Bandwidth, Mode A.3

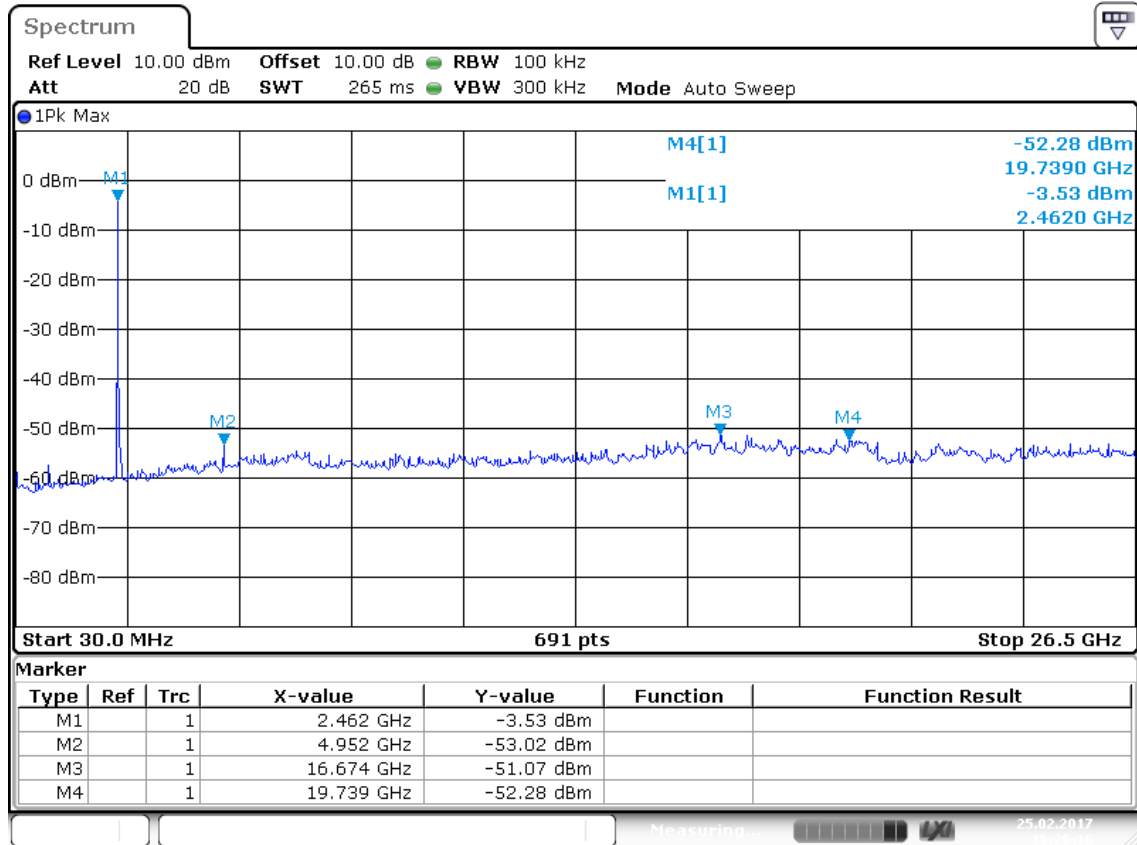


Date: 25.FEB.2017 16:26:17

Figure 32: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.1

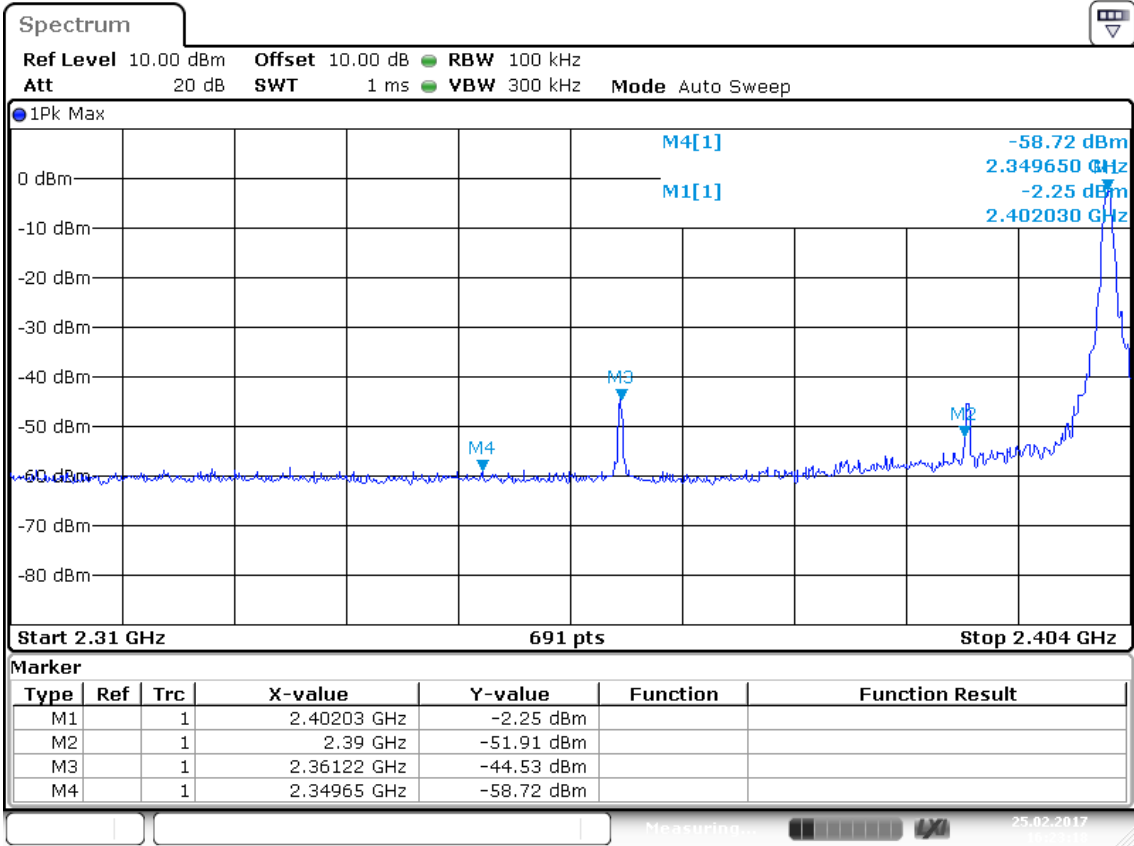

Date: 25.FEB.2017 16:23:18

Figure 33: Test figure of Frequency Band Edge in 100kHz Bandwidth, Mode A.3

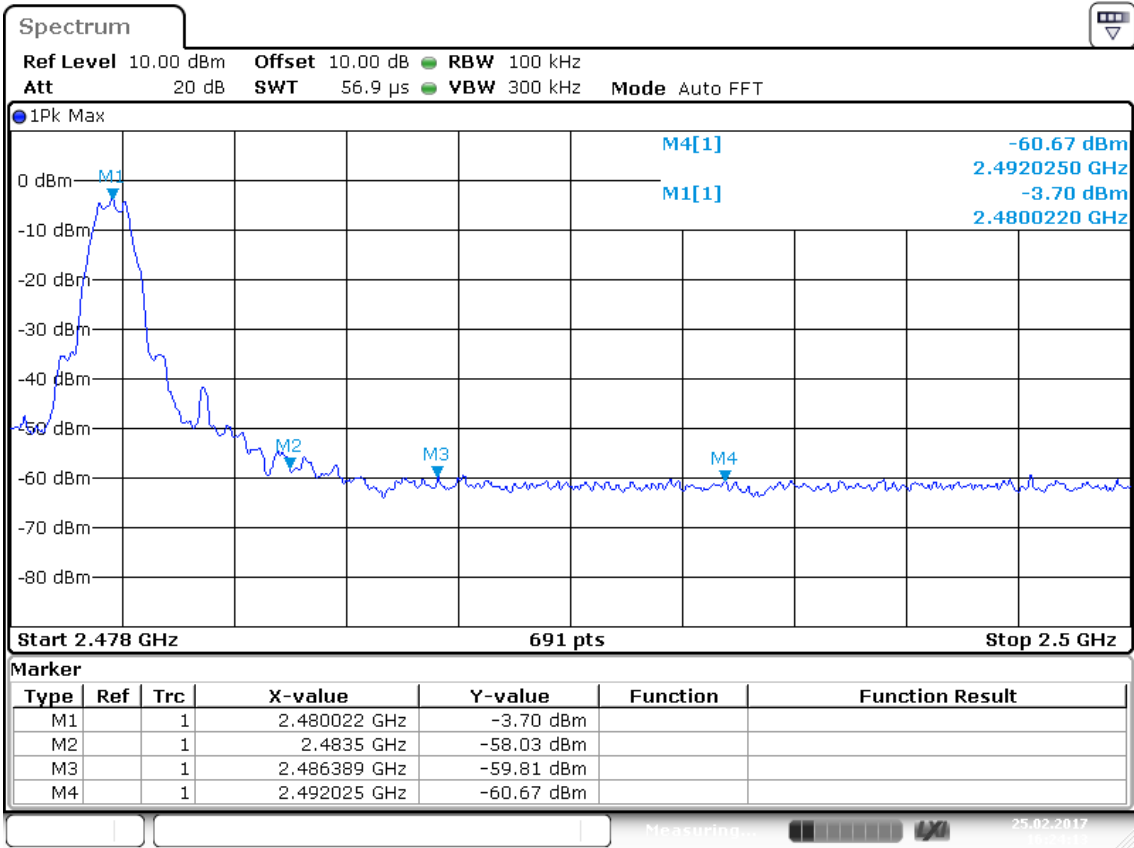

Date: 25.FEB.2017 16:24:13

Figure 34: Test figure of Conducted emissions, Mode A, line live


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: TX
Test Site: 1#Shielding Room
Operator: WADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 2/25/2017 /

SCAN TABLE: "V 9K-30MHz fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	NSLK8126 2008
150.0 kHz	30.0 MHz	5.0 kHz	Average			
			QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
			Average			

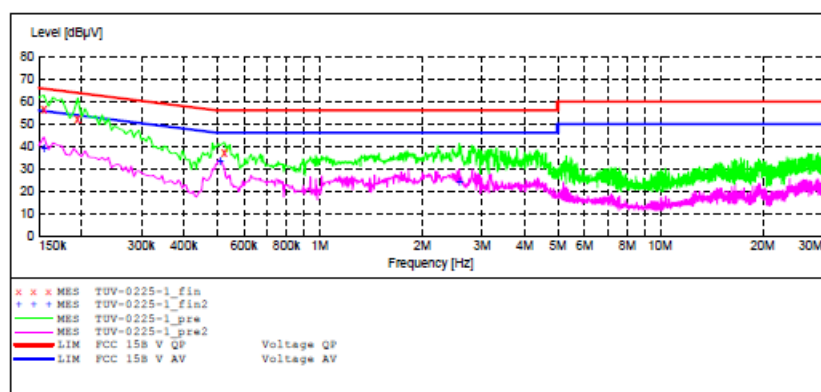

MEASUREMENT RESULT: "TUV-0225-1_fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.155000	56.10	10.5	66	9.6	QP	L1	GND
0.195000	51.90	10.5	64	11.9	QP	L1	GND
0.525000	37.20	10.7	56	18.8	QP	L1	GND

MEASUREMENT RESULT: "TUV-0225-1_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.155000	39.10	10.5	56	16.6	AV	L1	GND
0.510000	33.20	10.7	46	12.8	AV	L1	GND
2.570000	24.20	11.0	46	21.8	AV	L1	GND

Figure 35: Test figure of Conducted emissions, Mode A, line neutral


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: TX
Test Site: 1#Shielding Room
Operator: WADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 2/25/2017 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
Average
150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

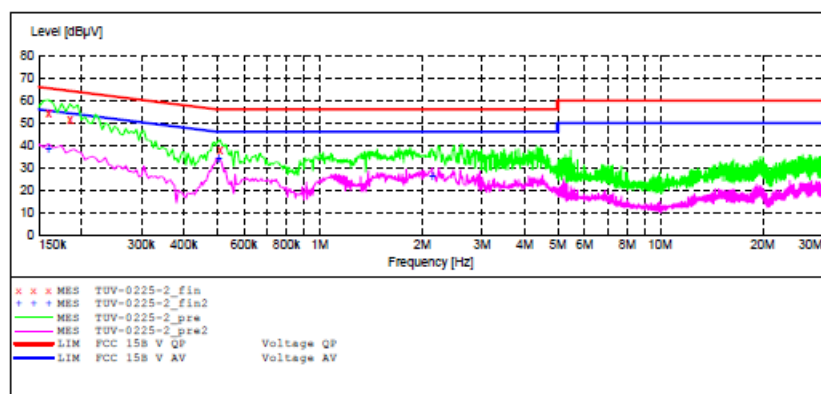

MEASUREMENT RESULT: "TUV-0225-2_fin"

2/25/2017

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.160000	54.10	10.5	66	11.4	QP	N	GND
0.185000	51.40	10.5	64	12.9	QP	N	GND
0.510000	37.90	10.7	56	18.1	QP	N	GND

MEASUREMENT RESULT: "TUV-0225-2_fin2"

2/25/2017

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.160000	38.20	10.5	56	17.3	AV	N	GND
0.505000	34.00	10.7	46	12.0	AV	N	GND
2.140000	26.20	11.0	46	19.8	AV	N	GND

Figure 36: Test figure of Conducted emissions, Mode B, line live


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: Charging
Test Site: 1#Shielding Room
Operator: WADE
Test Specification: L 120V/60Hz
Comment: Mains Port
Start of Test: 2/25/2017 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
Average
150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

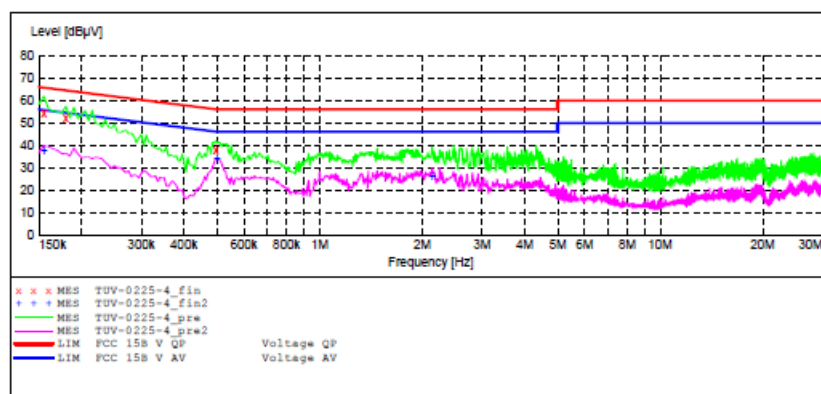

MEASUREMENT RESULT: "TUV-0225-4_fin"

2/25/2017

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	54.40	10.5	66	11.3	QP	L1	GND
0.180000	51.80	10.5	65	12.7	QP	L1	GND
0.495000	38.10	10.7	56	18.0	QP	L1	GND

MEASUREMENT RESULT: "TUV-0225-4_fin2"

2/25/2017

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.155000	37.80	10.5	56	17.9	AV	L1	GND
0.500000	34.10	10.7	46	11.9	AV	L1	GND
2.140000	26.00	11.0	46	20.0	AV	L1	GND

Figure 37: Test figure of Conducted emissions, Mode B, line neutral


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: Smart bracelet M/N:Actofit 612
Manufacturer: MILLION
Operating Condition: Charging
Test Site: 1#Shielding Room
Operator: WADE
Test Specification: N 120V/60Hz
Comment: Mains Port
Start of Test: 2/25/2017 /

SCAN TABLE: "V 9K-30MHz fin"

Short Description: _SUB STD_VTERM2 1.70
Start Stop Step Detector Meas. IF Transducer
Frequency Frequency Width Time Bandw.
9.0 kHz 150.0 kHz 100.0 Hz QuasiPeak 1.0 s 200 Hz NSLK8126 2008
Average
150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
Average

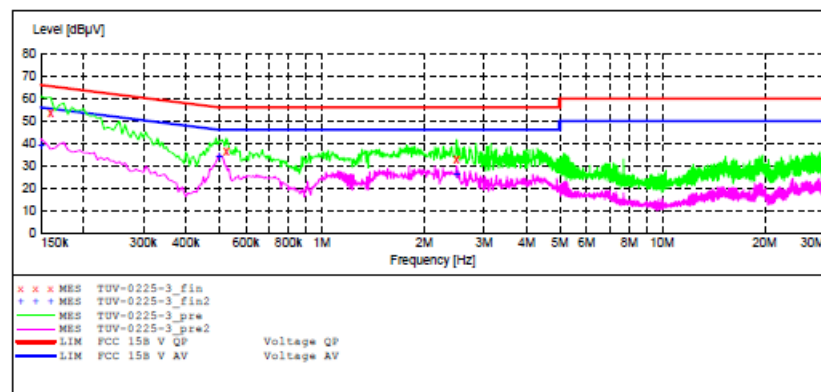

MEASUREMENT RESULT: "TUV-0225-3_fin"

2/25/2017

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.160000	53.70	10.5	66	11.8	QP	N	GND
0.525000	36.70	10.7	56	19.3	QP	N	GND
2.490000	33.00	11.0	56	23.0	QP	N	GND

MEASUREMENT RESULT: "TUV-0225-3_fin2"

2/25/2017

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	39.00	10.5	56	17.0	AV	N	GND
0.500000	34.10	10.7	46	11.9	AV	N	GND
2.490000	26.10	11.0	46	19.9	AV	N	GND

Figure 38: Test figure of Radiated emissions, Mode B, Below 1GHz, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1522
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: Charging
Model: Actofit 612
Manufacturer: MILLION

Polarization: Horizontal
Power Source: DC 5V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

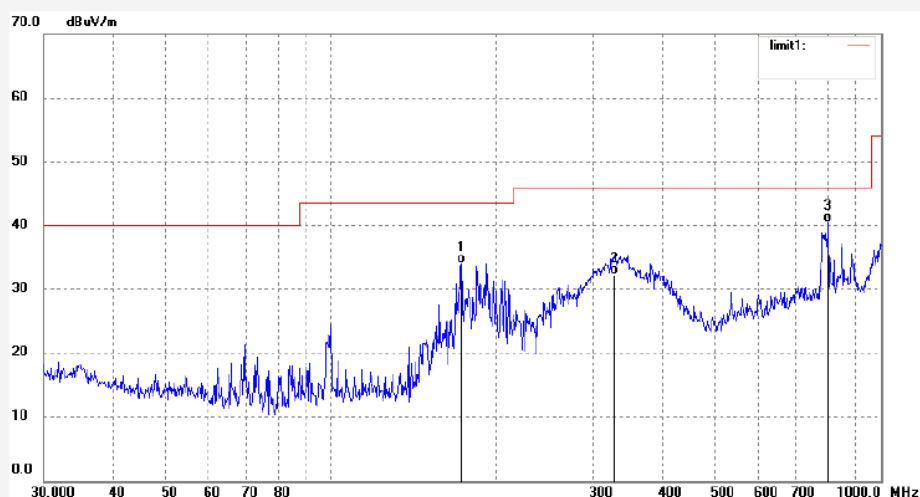

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	172.5988	47.52	-13.50	34.02	43.50	-9.48	QP			
2	327.8872	40.35	-8.12	32.23	46.00	-13.77	QP			
3	801.7862	39.72	0.87	40.59	46.00	-5.41	QP			

Figure 39: Test figure of Radiated emissions, Mode B, Below 1GHz, Vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1523
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: Charging
Model: Actofit 612
Manufacturer: MILLION

Polarization: Vertical
Power Source: DC 5V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

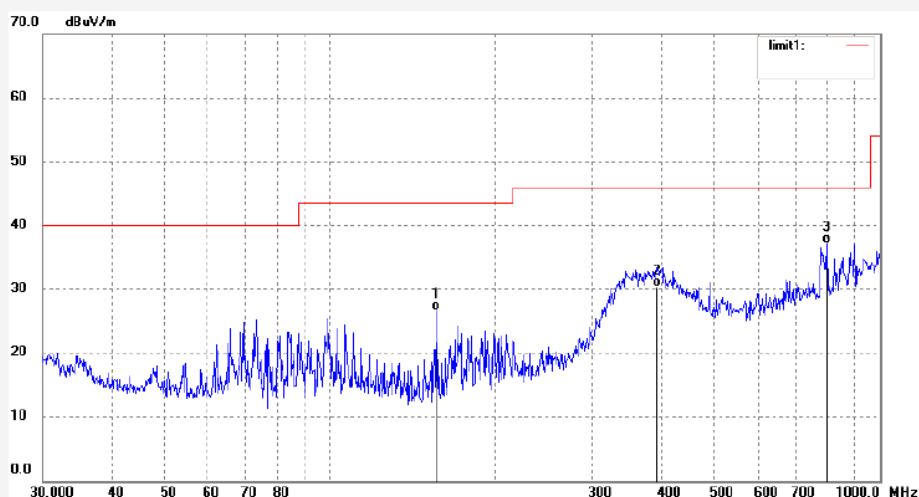

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	155.9099	41.55	-14.87	26.68	43.50	-16.82	QP			
2	393.4723	37.10	-6.71	30.39	46.00	-15.61	QP			
3	798.9796	36.38	0.81	37.19	46.00	-8.81	QP			

Figure 40: Test figure of Radiated emissions, Mode B, Above 1GHz, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LGW2017 #1525
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 23 C / 48 %
EUT: Smart bracelet
Mode: Charging
Model: Actofit 612
Manufacturer: MILLION

Polarization: Horizontal
Power Source: DC 5V
Date: 17/02/25/
Time:
Engineer Signature: WADE
Distance: 3m

Note:

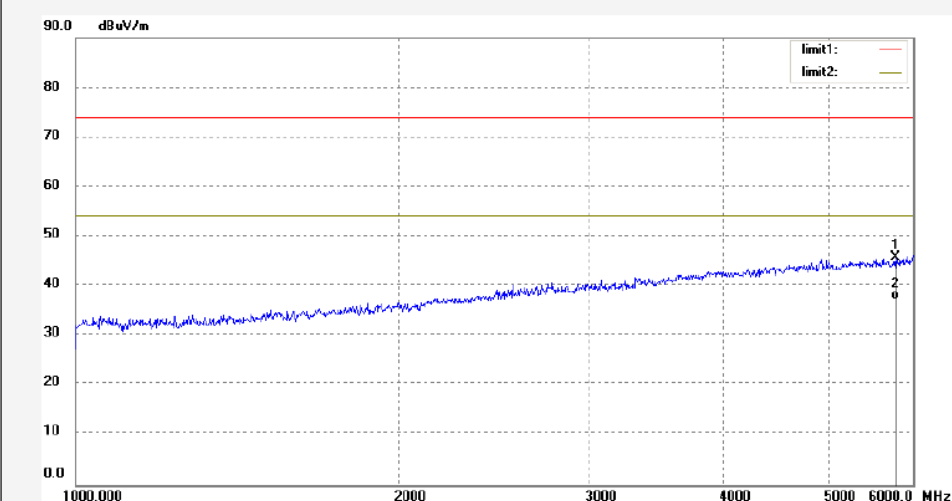

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5778.433	37.84	7.97	45.81	74.00	-28.19	peak			
2	5778.433	29.27	7.97	37.24	54.00	-16.76	AVG			

Figure 41: Test figure of Radiated emissions, Mode B, Above 1GHz, Vertical



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LGW2017 #1524

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 23 C / 48 %

EUT: Smart bracelet

Mode: Charging

Model: Actofit 612

Manufacturer: MILLION

Polarization: Vertical

Power Source: DC 5V


Date: 17/02/25/

Time:

Engineer Signature: WADE

Distance: 3m

Note:

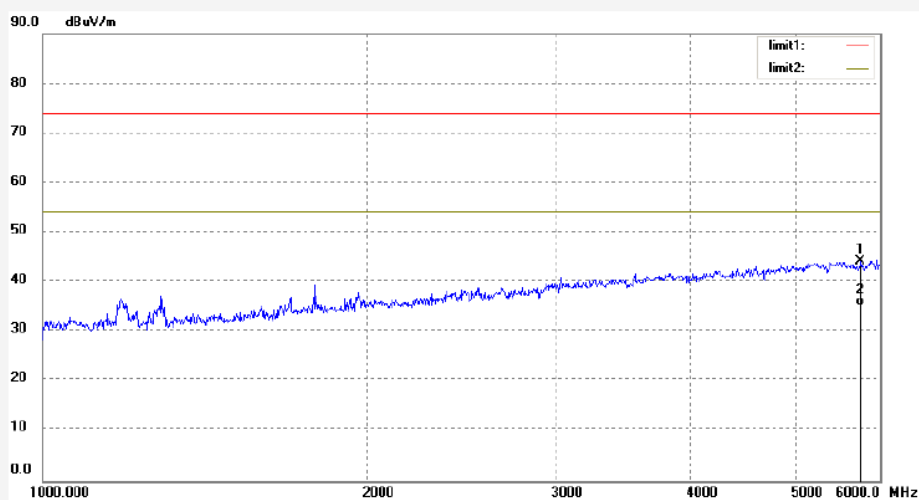

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	5757.763	36.31	7.84	44.15	74.00	-29.85	peak			
2	5757.763	27.40	7.84	35.24	54.00	-18.76	AVG			