

FCC TEST REPORT

FCC ID: 2ALCFXO-9331

Product : Spin-It Widget Bluetooth Speaker

Model Name : XO-9331

Brand : N/A

Report No. : PTCDQ01170710303-FC01

Prepared for

Dongguan Xing Yue Electronic co., Ltd

#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China

Prepared by

DongGuan Precise Testing Service Co.,Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community

Dongcheng District, Dongguan, Guangdong, China

TEST RESULT CERTIFICATION

Applicant's name : Dongguan Xing Yue Electronic co., Ltd

Address : #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China

Manufacture's name : Dongguan Xing Yue Electronic co., Ltd

Address : #98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China

Product name : Spin-It Widget Bluetooth Speaker

Model name : XO-9331

Standards : FCC Part 15 Subpart C Section 15.249

Test procedure : ANSI C63.10:2013

Test Date : Jun.22, 2017 to Jun.27, 2017

Date of Issue : Jun.30, 2017

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Authorized Signatory

Chris Du





TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION.....	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCIES	7
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION.....	11
5.1 GENERAL DESCRIPTION OF EUT	11
5.2. EQUIPMENT USED IN EUT SYSTEM	11
5.3. SUMMARY OF TEST RESULTS.....	11
6. TEST FACILITY	12
7.TEST METHOD.....	13
8.TEST EQUIPMENT LIST.....	14
9.RADIATED EMISSION	16
9.1TEST LIMIT	16
9.2. MEASUREMENT PROCEDURE	17
9.3 TEST SETUP	19
9.4. TEST RESULT	20
10. BAND EDGE EMISSION.....	35
10.1. MEASUREMENT PROCEDURE	35
10.2 TEST SETUP	35
10.3 RADIATED TEST RESULT	36
11. 20DB BANDWIDTH	40
11.1. MEASUREMENT PROCEDURE	40
11.2. TEST SET-UP.....	40
11.3. LIMITS AND MEASUREMENT RESULTS	40
12. FCC LINE CONDUCTED EMISSION TEST	47
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	47
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	47
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	48
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	48
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	49



APPENDIX A: PHOTOGRAPHS OF TEST SETUP	51
APPENDIX B: PHOTOGRAPHS OF EUT	54

1. VERIFICATION OF CONFORMITY

Applicant	Dongguan Xing Yue Electronic co., Ltd
Address	#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China
Manufacturer	Dongguan Xing Yue Electronic co., Ltd
Address	#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan, Guang Dong, China
Product Designation	Spin-It Widget Bluetooth Speaker
Brand Name	N/A
Test Model	XO-9331
Date of test	Jun.22, 2017 to Jun.27, 2017
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	-2.32dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	GFSK , π /4-DQPSK, 8DPSK
Number of channels	79 for BR/EDR
Hardware Version	REV1.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	0dBi
Power Supply	DC 3.7V by battery
Note: 1. The USB port only be used for charging and can't be used to transfer data with PC. 2. The EUT didn't support BLE. 3. The tested model has two kinds of color samples, including black and white.	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.18\text{dB}$
2	All emissions, radiated	$\pm 3.91\text{dB}$
3	Temperature	$\pm 0.5^{\circ}\text{C}$
4	Humidity	$\pm 2\%$

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.



Software Setting

AppoTech RF Control Kit V4.0

IC Model: CW66xx

COM Port Info: Port: COM1 Rate: 921600

DUT MODE: FCC Mode

RF Trim: ☐ Fix_RX_24xx ☐ SingleTone Hopping: OFF

☒ Channel 41 (2-80) Tx Modulation: ON

☒ Power 6 (0-7) Packet Type: 3DH5

Test scenario: 3 Transmitter test - 1010 pattern

Specification:

FIX RX mode: (1)check FIX_RX_24xx (2)check channel to set channel number

FIX TX mode: (1)unchecked FIX_RX_24xx (2)check channel to set channel number (3)check power to set TX signal amplitude (4)Modulation Enable OFF

TX Modulation mode: (1)unchecked FIX_RX_24xx (2)check channel to set channel number (3)check power to set TX signal amplitude (4)Modulation Enable ON (5)select Packet Type

Hopping mode: (1)unchecked FIX_RX_24xx (2)unchecked channel to enable Hopping ON and TX Modulation OFF (3)check power (4)select Packet Type

语言

RF: R12 60BD Write Read Address: 0206 Val: 04 Write_xSFR Read_xSFR

01 19 FC 40 0F 40 B2 41 04 06 A0 40 00 81 00 00 80 0

04 0E 04 01 19 FC 00

01 08 FC 03 68 4F 00

04 0E 04 01 08 FC 00

01 0F FC 0A 02 03 00 27 00 06 28 2F FD 03

04 0E 04 01 0F FC 00

01 09 FC 01 0C

04 0E 07 01 09 FC 00 0C BD 60

☒ Show HCI Clear Save Read MROM

Enable Patch 1: 00C845 00C0CF 019E68 019E69

048280 0482AE 048040 048073

Enable Patch 2


PFile

Send

5. SYSTEM TEST CONFIGURATION


5.1 GENERAL DESCRIPTION OF EUT

Configure 1: (Normal hopping)

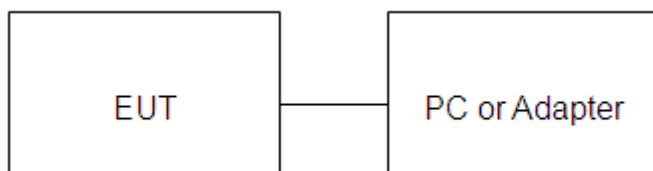

Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)

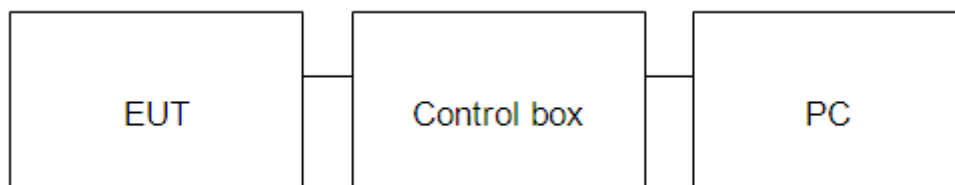

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Spin-It Widget Bluetooth Speaker	Xing Yue	XO-9331	EUT
2	Battery	Aun	401020	Accessory
3	PC	Sony	E1412AYCW	A.E
4	PC Adapter	Sony	VGP-AC19V36	A.E
5	Control box	DOFLY	LY-USB-TIL V2.2	A.E
6	Adapter	IPRO	NTR-S01	A.E
7	USB Cable	N/A	1m unshielded	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

7.TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8.TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2017	June 5, 2018
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2017	June 5, 2018
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018

FOR RADIATED EMISSION TEST (1GHz ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2017	June 5, 2018
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2017	June 5, 2018
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018



Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017
Shielded Room	CHENGYU	843	PTS-002	June 6, 2017	June 5, 2018
Conduction Cable	MXT	SE1	S003	June 6, 2017	June 5, 2018

9. RADIATED EMISSION

9.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other: 74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

9.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 1.5MHz/10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

9.3 TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

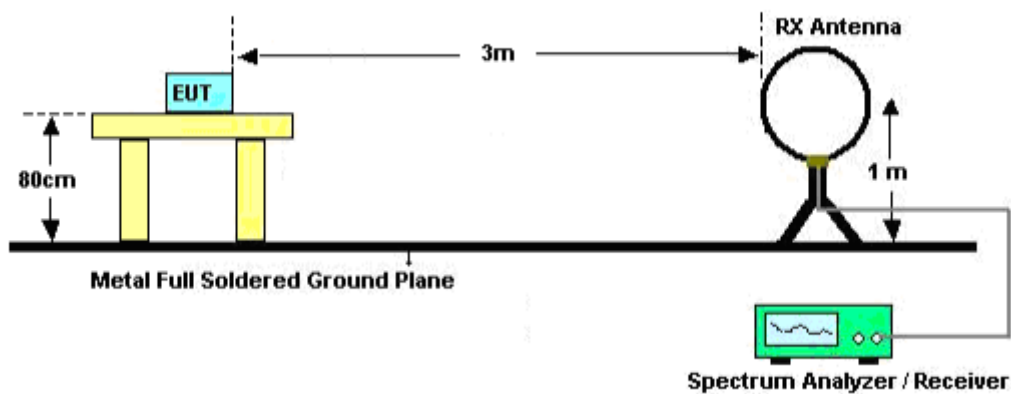

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

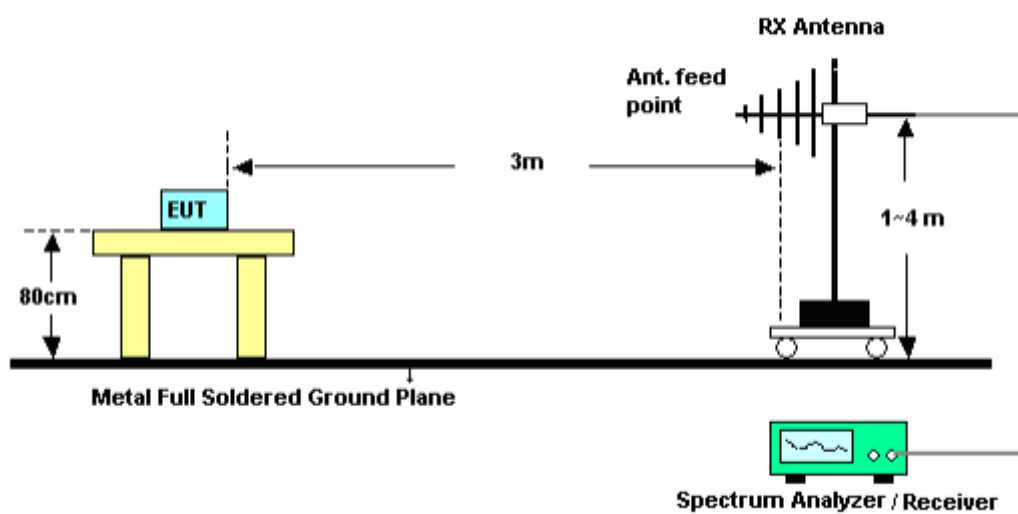

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

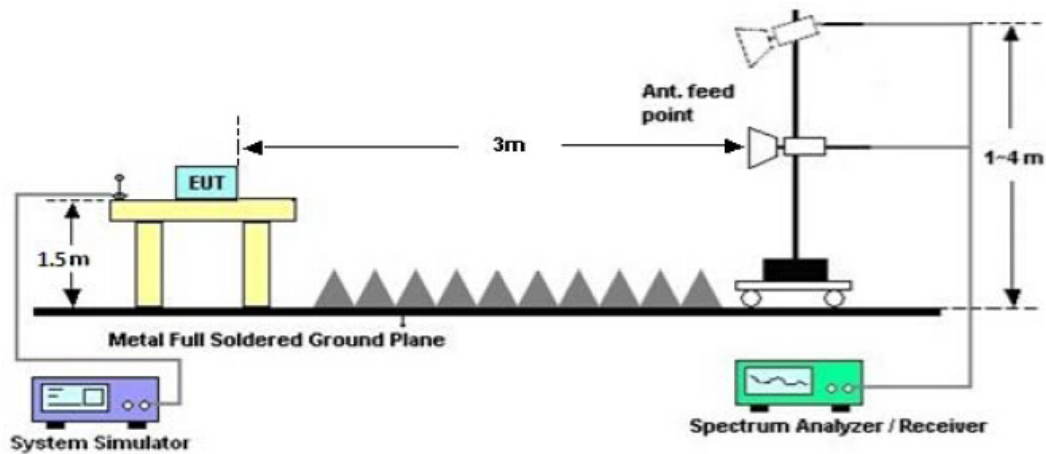

9.4. TEST RESULT

(Worst modulation:GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

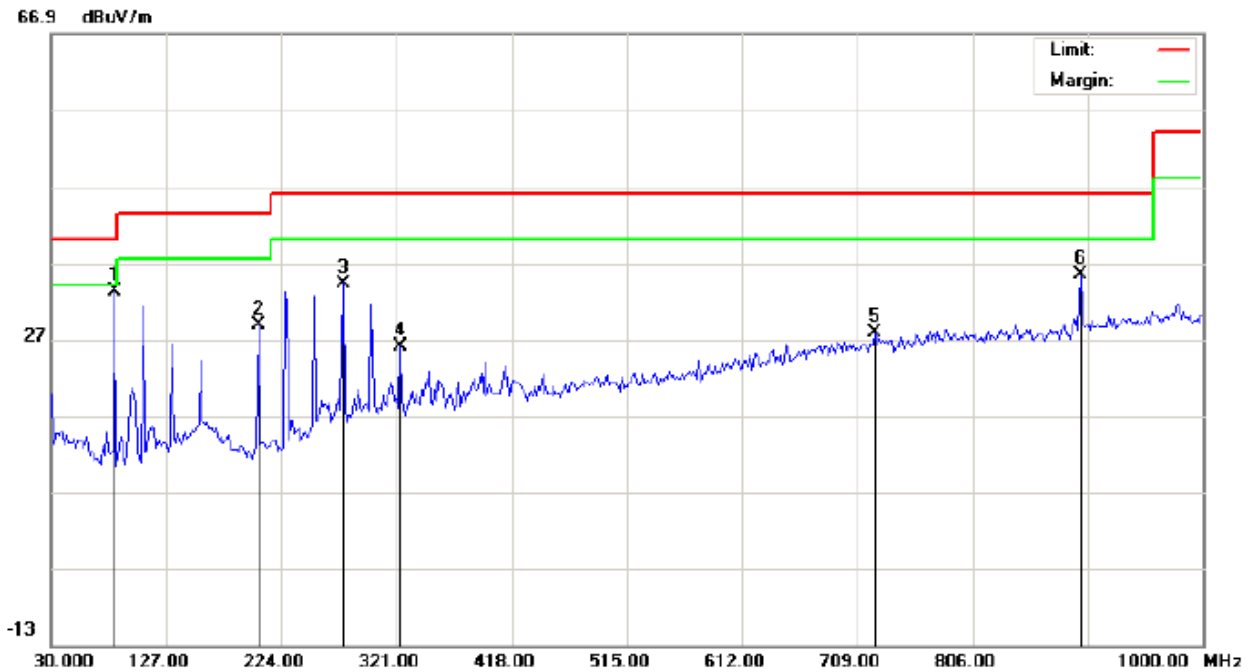


Site: site #1	Polarization: Horizontal	Temperature: 22.4
Limit: FCC Class B 3M Radiation	Power:	Humidity: 52.5 %
EUT:Spin-It Widget Bluetooth Speaker	Distance:	
M/N:XO-9331		
Mode:Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	83.3500	22.46	10.80	33.26	40.00	-6.74	peak			
2		204.6000	15.39	13.36	28.75	43.50	-14.75	peak			
3		275.7333	18.83	15.47	34.30	46.00	-11.70	peak			
4		324.2333	8.66	17.28	25.94	46.00	-20.06	peak			
5		723.5500	1.28	26.54	27.82	46.00	-18.18	peak			
6		896.5333	6.90	28.43	35.33	46.00	-10.67	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)-LOW CHANNEL -VERTICAL

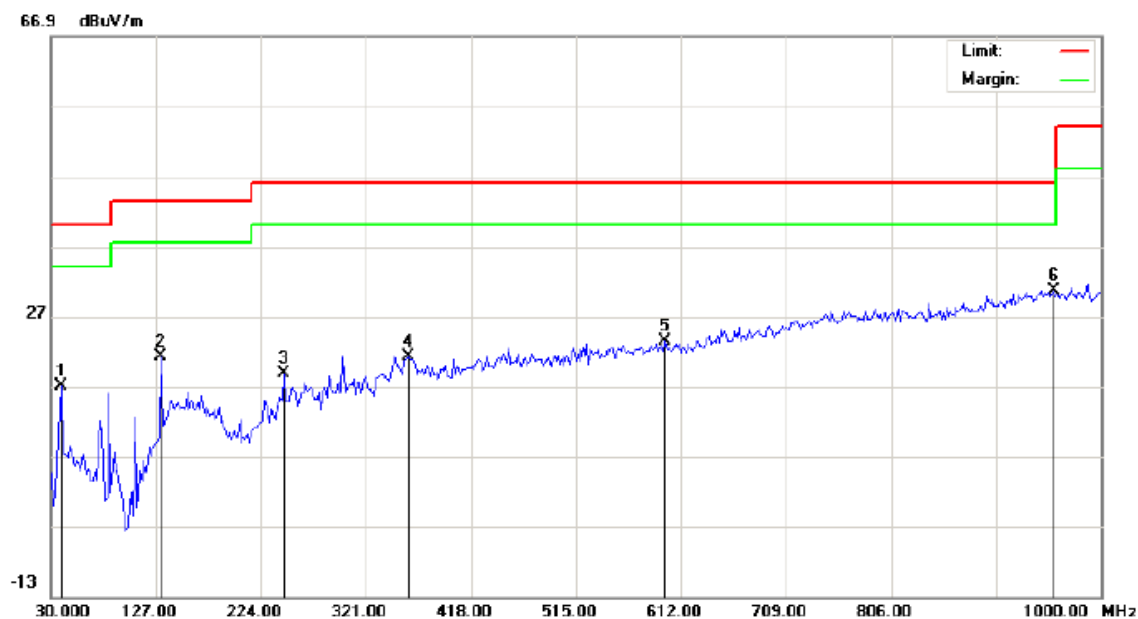

Site: site #1
Limit: FCC Class B 3M Radiation
EUT: Spin-It Widget Bluetooth Speaker
M/N: XO-9331
Mode: Low Channel TX
Note:

Polarization: **Vertical**
Power:
Distance:

Temperature: 22.4
Humidity: 52.5 %


No.	Mk	Freq. MHz	Reading dBuV	Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		39.7000	8.54	8.51	17.05	40.00	-22.95	peak			
2		131.8500	9.46	11.80	21.26	43.50	-22.24	peak			
3		245.0167	5.43	13.41	18.84	46.00	-27.16	peak			
4		359.8000	2.37	18.80	21.17	46.00	-24.83	peak			
5		597.4500	0.62	22.72	23.34	46.00	-22.66	peak			
6	*	956.3500	0.70	29.94	30.64	46.00	-15.36	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

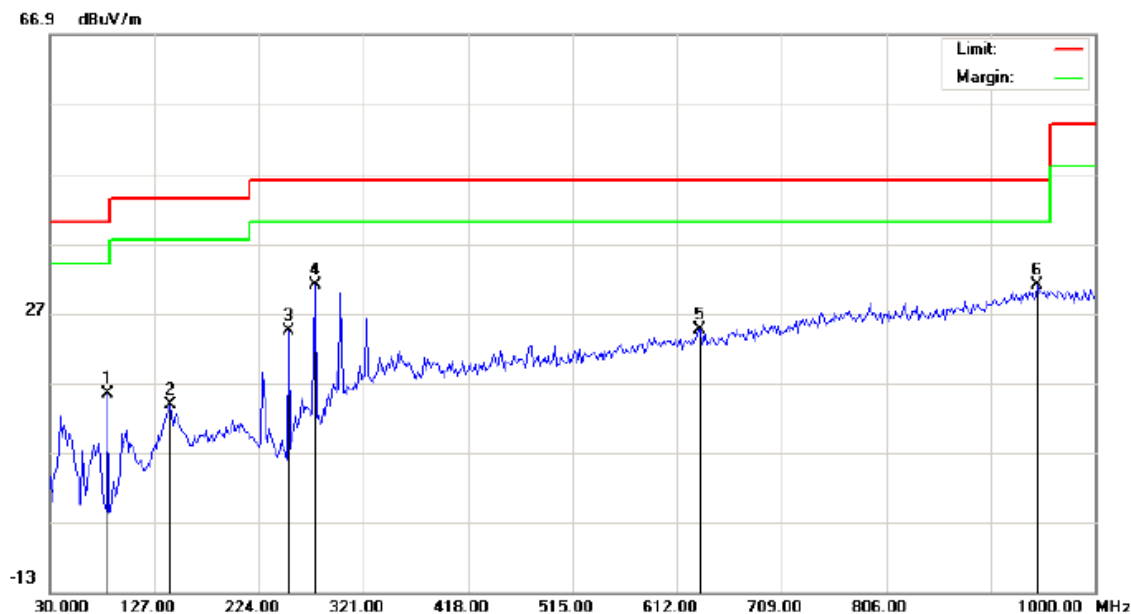

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Spin-It Widget Bluetooth Speaker
M/N:XO-9331
Mode:Middle Channel TX
Note:


Polarization: *Horizontal*
Power:
Distance:

Temperature: 22.4
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		83.3500	14.87	0.50	15.37	40.00	-24.63	peak			
2		141.5500	-1.03	14.82	13.79	43.50	-29.71	peak			
3		251.4833	17.19	7.15	24.34	46.00	-21.66	peak			
4		275.7333	19.71	11.28	30.99	46.00	-15.01	peak			
5		633.0167	0.72	23.81	24.53	46.00	-21.47	peak			
6	*	946.6500	1.14	29.91	31.05	46.00	-14.95	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL –VERTICAL

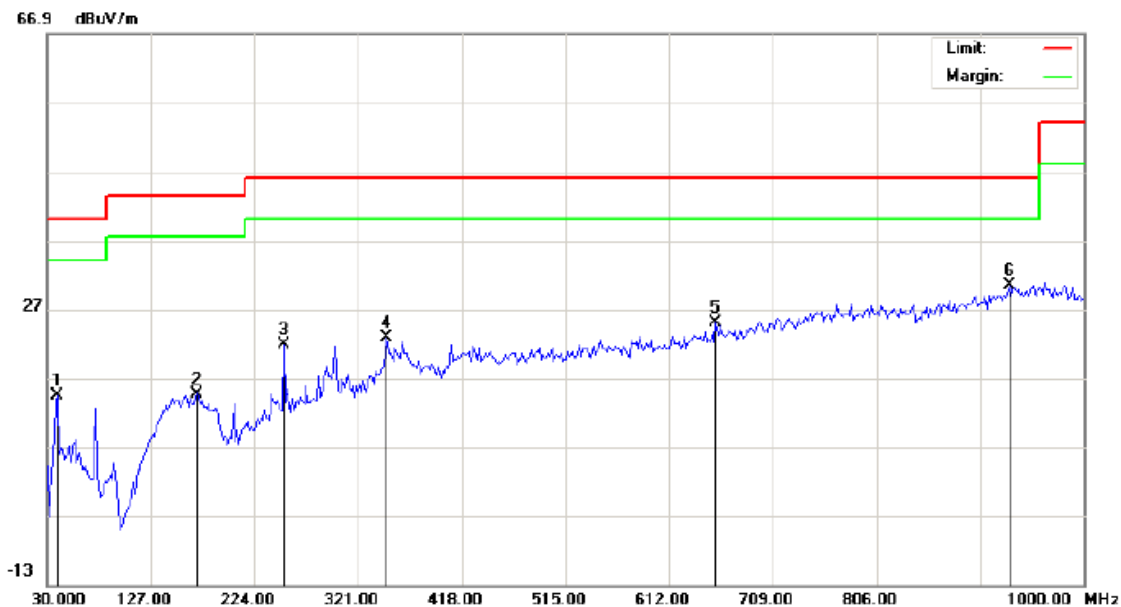

Site: site #1 Polarization: **Vertical** Temperature: 22.4
Limit: FCC Class B 3M Radiation Power: Humidity: 52.5 %
EUT:Spin-It Widget Bluetooth Speaker Distance:
M/N:XO-9331
Mode:Middle Channel TX
Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		39.7000	5.98	8.51	14.49	40.00	-25.51	peak			
2		170.6500	0.04	14.66	14.70	43.50	-28.80	peak			
3		251.4833	7.84	13.94	21.78	46.00	-24.22	peak			
4		346.8667	4.33	18.53	22.86	46.00	-23.14	peak			
5		655.6500	1.03	24.00	25.03	46.00	-20.97	peak			
6	*	930.4833	1.04	29.46	30.50	46.00	-15.50	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

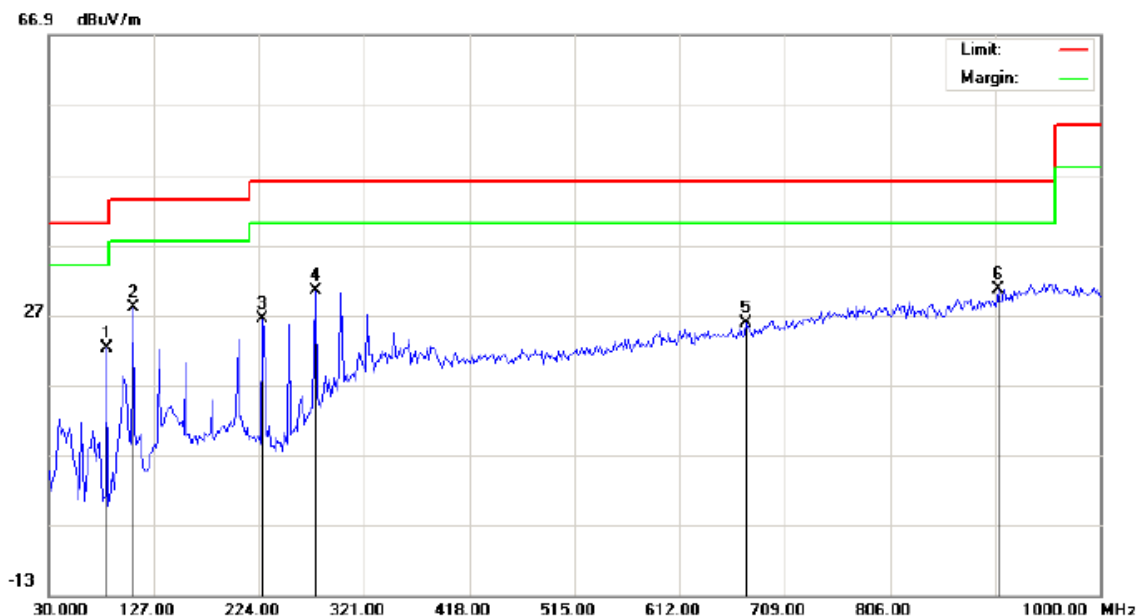

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Spin-It Widget Bluetooth Speaker
M/N:XO-9331
Mode:High Channel TX
Note:


Polarization: **Horizontal**
Power:
Distance:

Temperature: 22.4
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		83.3500	21.74	0.50	22.24	40.00	-17.76	peak			
2		107.6000	19.25	8.72	27.97	43.50	-15.53	peak			
3		227.2333	17.23	9.22	26.45	46.00	-19.55	peak			
4		275.7333	19.21	11.28	30.49	46.00	-15.51	peak			
5		673.4333	1.29	24.48	25.77	46.00	-20.23	peak			
6	*	906.2333	1.88	28.78	30.66	46.00	-15.34	peak			

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL –VERTICAL

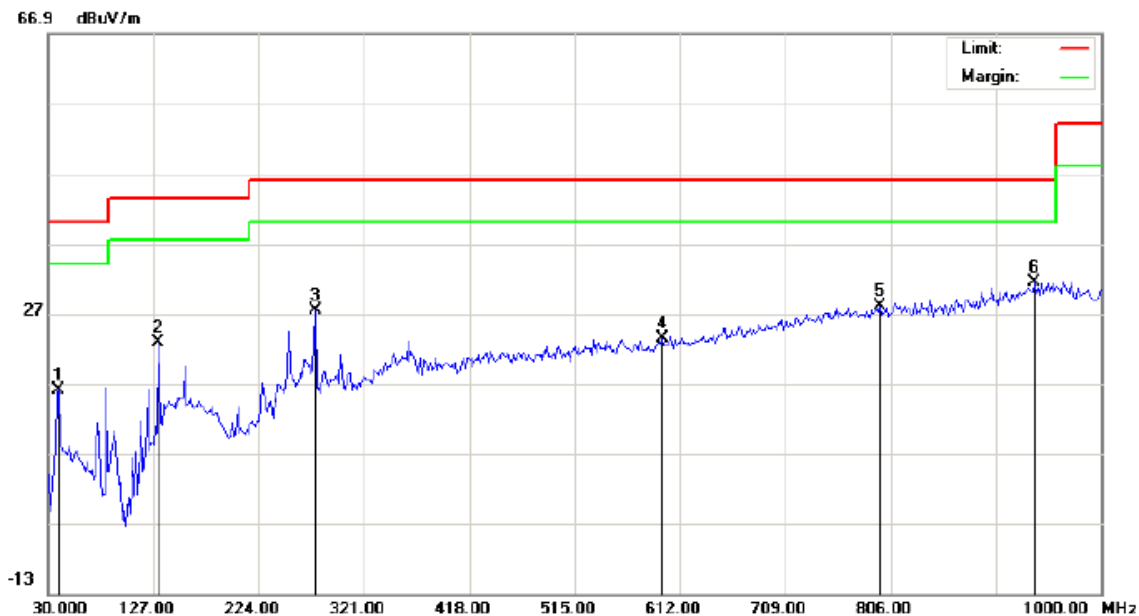

Site: site #1
Limit: FCC Class B 3M Radiation
EUT:Spin-It Widget Bluetooth Speaker
M/N:XO-9331
Mode:High Channel TX
Note:

Polarization: **Vertical**
Power:
Distance:

Temperature: 22.4
Humidity: 52.5 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		39.7000	7.59	8.51	16.10	40.00	-23.90	peak			
2		131.8500	10.95	11.80	22.75	43.50	-20.75	peak			
3		275.7333	12.73	14.68	27.41	46.00	-18.59	peak			
4		595.8333	0.72	22.71	23.43	46.00	-22.57	peak			
5		796.3000	0.80	27.27	28.07	46.00	-17.93	peak			
6	*	938.5667	1.78	29.68	31.46	46.00	-14.54	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

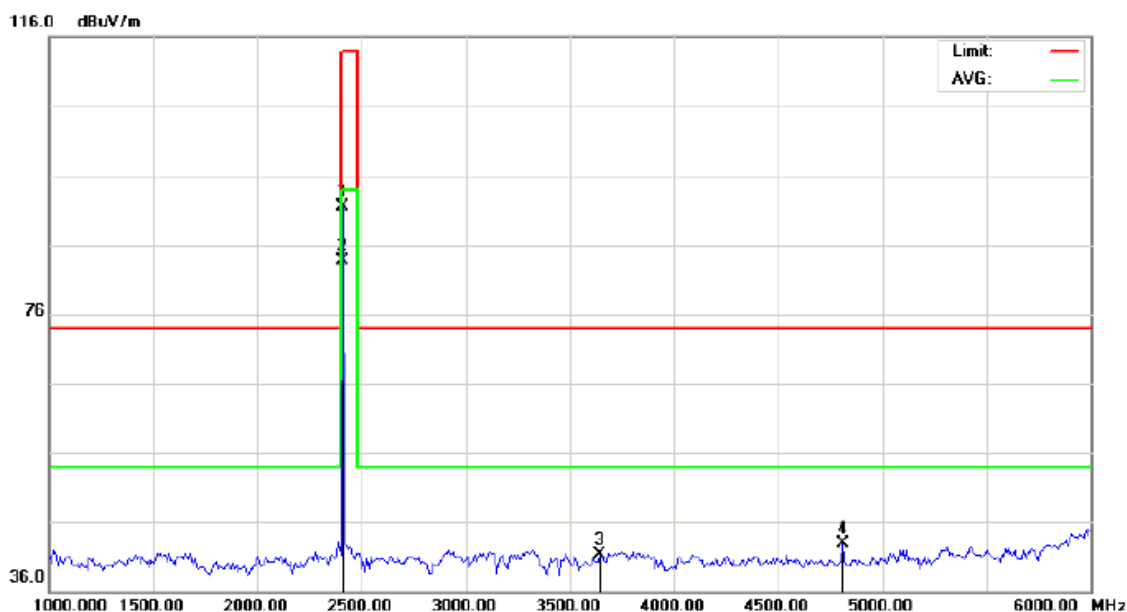


Site: site #1 Polarization: **Horizontal** Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Spin-It widget Bluetooth speaker Distance:
M/N: XO-9331
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	81.20	10.32	91.52	114.00	-22.48	peak			
2	*	2402.000	73.29	10.32	83.61	94.00	-10.39	AVG	100	52	
3		3641.667	28.37	12.98	41.35	74.00	-32.65	peak			
4		4808.333	35.23	7.70	42.93	74.00	-31.07	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

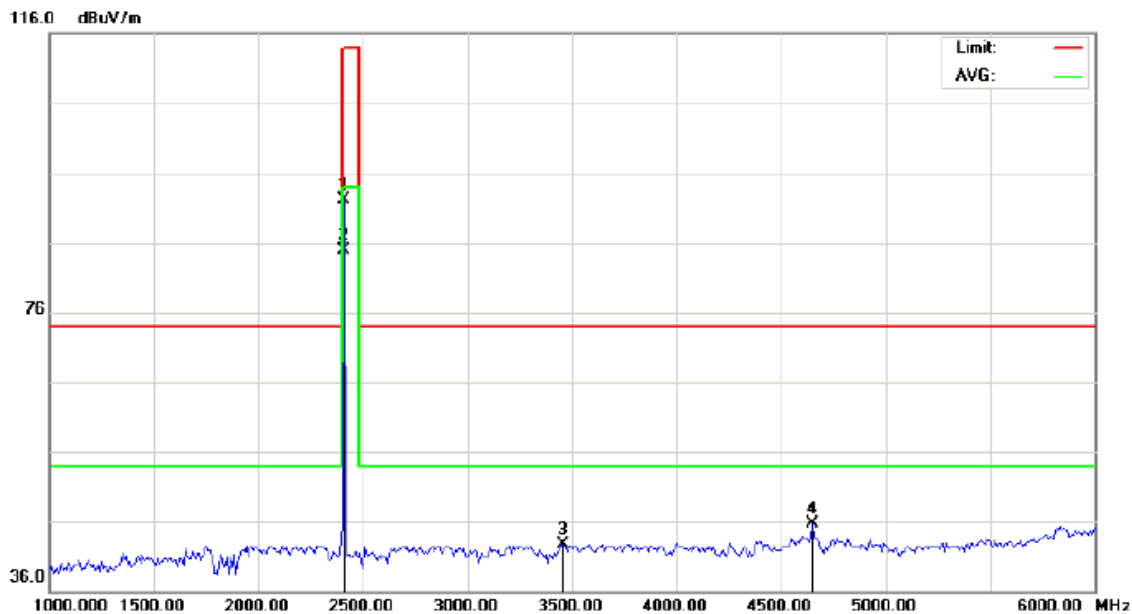

Site: site #1

Polarization: **Vertical**

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Humidity: 53.6 %

EUT: Spin-It widget Bluetooth speaker

Distance:

M/N: XO-9331


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	81.81	10.32	92.13	114.00	-21.87	peak			
2	*	2402.000	74.62	10.32	84.94	94.00	-9.06	AVG	100	34	
3		3458.345	30.59	12.07	42.66	74.00	-31.34	peak			
4		4650.000	38.50	7.28	45.78	74.00	-28.22	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

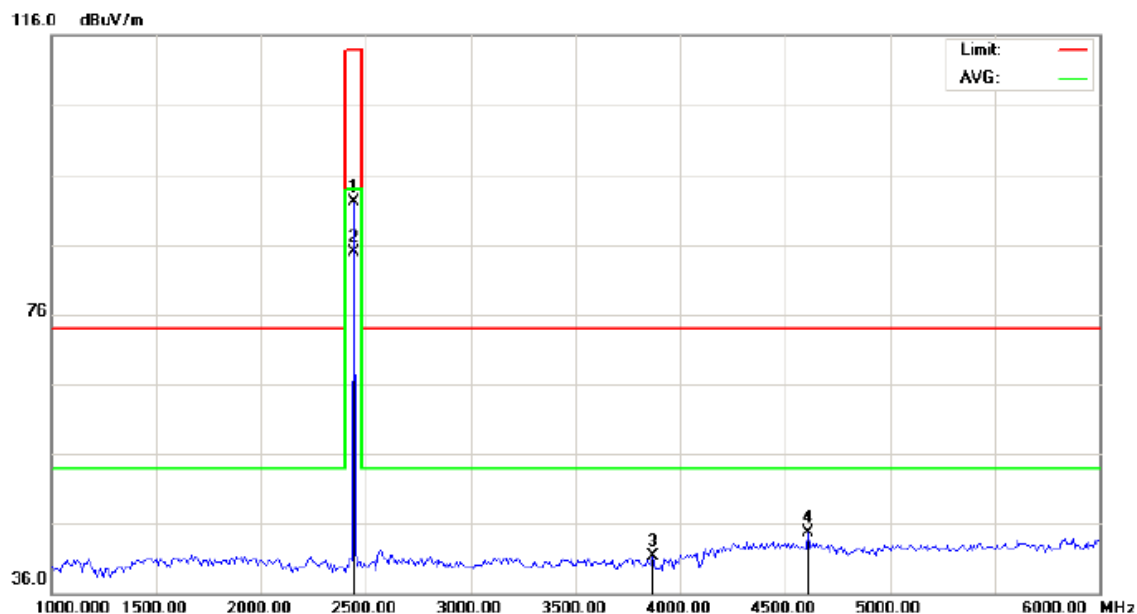


Site: site #1 Polarization: *Horizontal* Temperature: 22.7
 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
 EUT: Spin-It widget Bluetooth speaker Distance:
 M/N: XO-9331
 Mode: Middle Channel TX
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	81.73	10.36	92.09	114.00	-21.91	peak			
2	*	2441.000	74.61	10.36	84.97	94.00	-9.03	AVG	100	56	
3		3866.667	27.00	14.37	41.37	74.00	-32.63	peak			
4		4608.333	37.62	7.17	44.79	74.00	-29.21	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

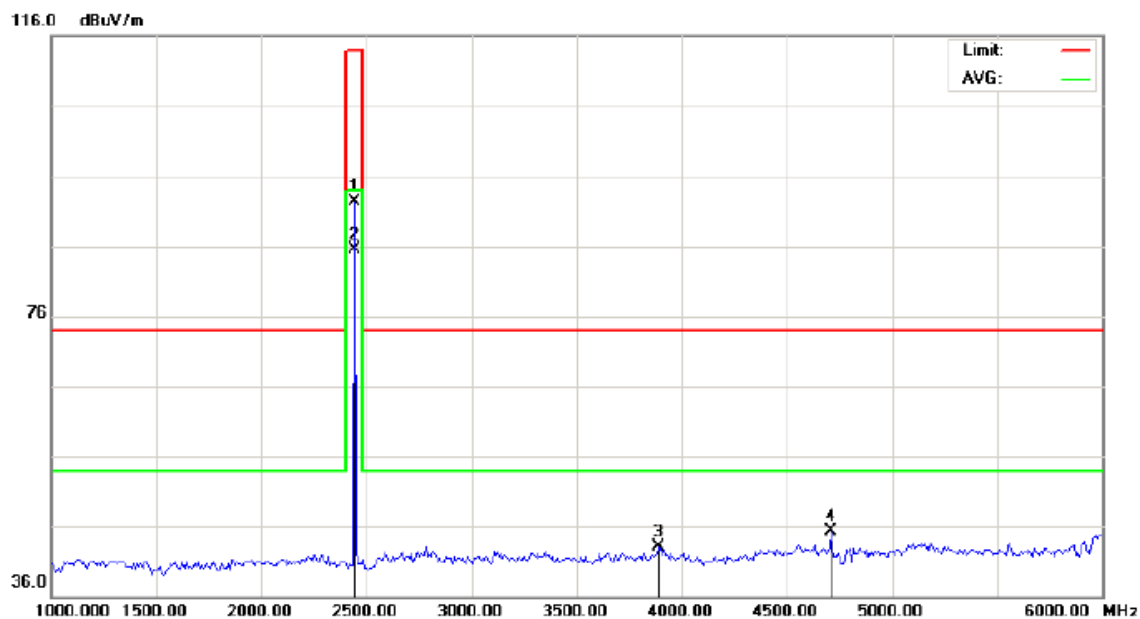


Site: site #1 Polarization: **Vertical** Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Spin-It widget Bluetooth speaker Distance:
M/N: XO-9331
Mode: Middle Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	81.98	10.36	92.34	114.00	-21.66	peak			
2	*	2441.000	75.03	10.36	85.39	94.00	-8.61	AVG	100	33	
3		3891.667	28.65	14.52	43.17	74.00	-30.83	peak			
4		4708.333	37.80	7.44	45.24	74.00	-28.76	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

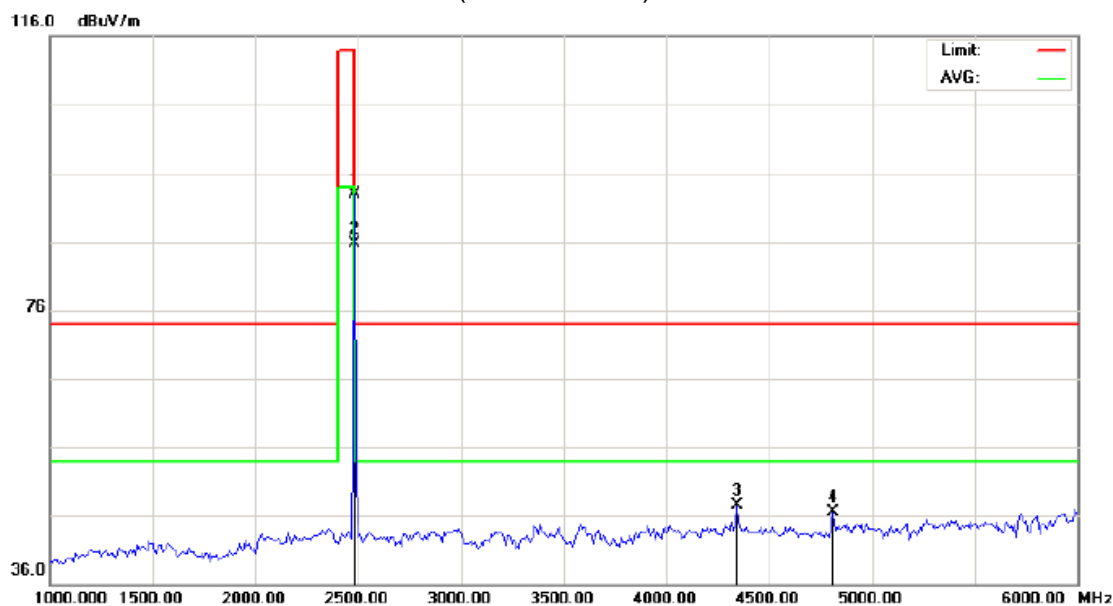


Site: site #1 Polarization: **Horizontal** Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Spin-It widget Bluetooth speaker Distance:
M/N: XO-9331
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	82.47	10.41	92.88	114.00	-21.12	peak			
2	*	2480.000	75.31	10.41	85.72	94.00	-8.28	AVG	100	52	
3		4341.667	38.03	9.52	47.55	74.00	-26.45	peak			
4		4808.333	38.72	7.70	46.42	74.00	-27.58	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

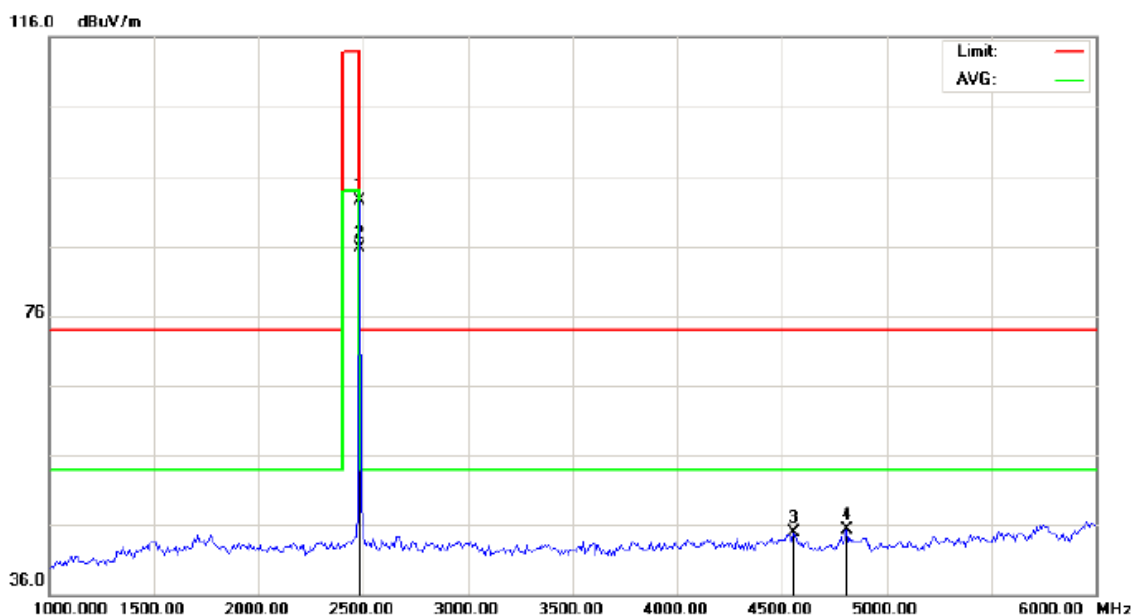

Site: site #1 Polarization: **Vertical** Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %
EUT: Spin-It widget Bluetooth speaker Distance:
M/N: XO-9331
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	82.19	10.41	92.60	114.00	-21.40	peak			
2	*	2480.000	75.34	10.41	85.75	94.00	-8.25	AVG	100	35	
3		4558.333	37.81	7.04	44.85	74.00	-29.15	peak			
4		4808.346	37.59	7.70	45.29	74.00	-28.71	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.20	10.32	91.52	114	-22.48	Horizontal
2402	81.81	10.32	92.13	114	-21.87	Vertical
2441	81.73	10.36	92.09	114	-21.91	Horizontal
2441	81.98	10.36	92.34	114	-21.66	Vertical
2480	82.47	10.41	92.88	114	-21.12	Horizontal
2480	82.19	10.41	92.60	114	-21.40	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.29	10.32	83.61	94	-10.39	Horizontal
2402	74.62	10.32	84.94	94	-9.06	Vertical
2441	74.61	10.36	84.97	94	-9.03	Horizontal
2441	75.03	10.36	85.39	94	-8.61	Vertical
2480	75.31	10.41	85.72	94	-8.28	Horizontal
2480	75.34	10.41	85.75	94	-8.25	Vertical

**2Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.11	10.32	91.43	114	-22.57	Horizontal
2402	81.77	10.32	92.09	114	-21.91	Vertical
2441	81.67	10.36	92.03	114	-21.97	Horizontal
2441	81.93	10.36	92.29	114	-21.71	Vertical
2480	82.40	10.41	92.81	114	-21.19	Horizontal
2480	82.11	10.41	92.52	114	-21.48	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.20	10.32	83.52	94	-10.48	Horizontal
2402	74.54	10.32	84.86	94	-9.14	Vertical
2441	74.55	10.36	84.91	94	-9.09	Horizontal
2441	74.96	10.36	85.32	94	-8.68	Vertical
2480	75.22	10.41	85.63	94	-8.37	Horizontal
2480	75.27	10.41	85.68	94	-8.32	Vertical



3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.04	10.32	91.36	114	-22.64	Horizontal
2402	81.69	10.32	92.01	114	-21.99	Vertical
2441	81.59	10.36	91.95	114	-22.05	Horizontal
2441	81.86	10.36	92.22	114	-21.78	Vertical
2480	82.33	10.41	92.74	114	-21.26	Horizontal
2480	82.02	10.41	92.43	114	-21.57	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.11	10.32	83.43	94	-10.57	Horizontal
2402	74.42	10.32	84.74	94	-9.26	Vertical
2441	74.46	10.36	84.82	94	-9.18	Horizontal
2441	74.87	10.36	85.23	94	-8.77	Vertical
2480	75.17	10.41	85.58	94	-8.42	Horizontal
2480	75.20	10.41	85.61	94	-8.39	Vertical

10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE

1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.


2Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

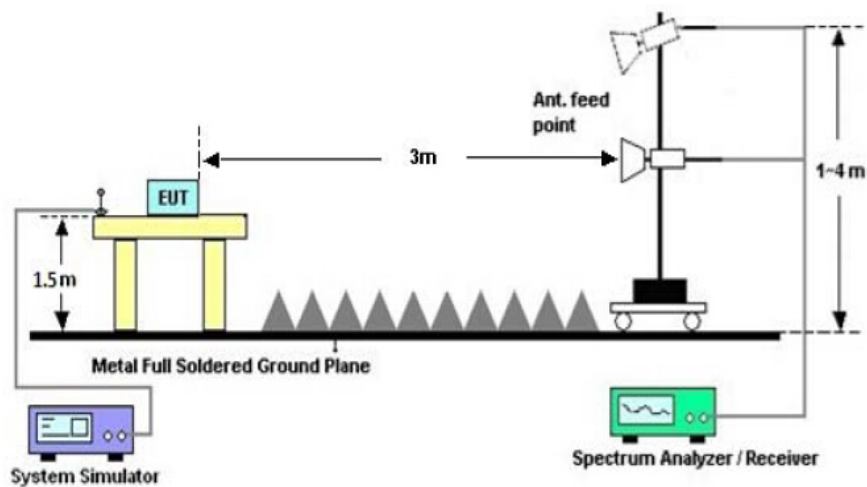


10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

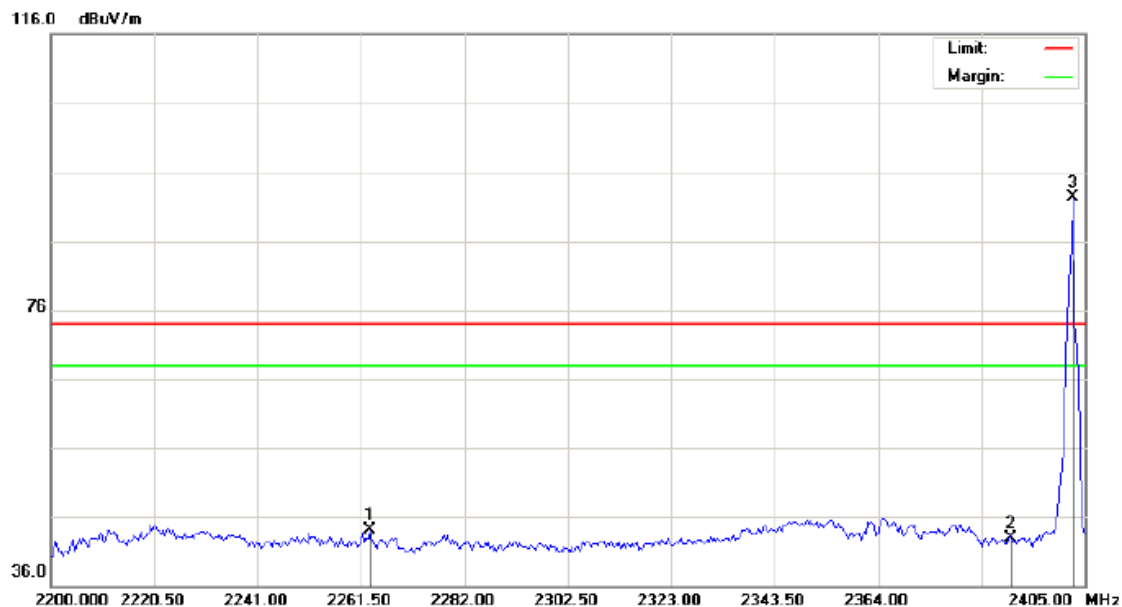

Site: site #1	Polarization: Horizontal	Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK)	Power:	Humidity: 60 %
EUT: Spin-It widget Bluetooth speaker	Distance:	
M/N: XO-9331		
Mode: Low Channel TX		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2263.208	33.89	10.17	44.06	74.00	-29.94	peak			
2		2390.308	32.50	10.31	42.81	74.00	-31.19	peak			
3	*	2402.000	81.98	10.32	92.30	74.00	18.30	peak			


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

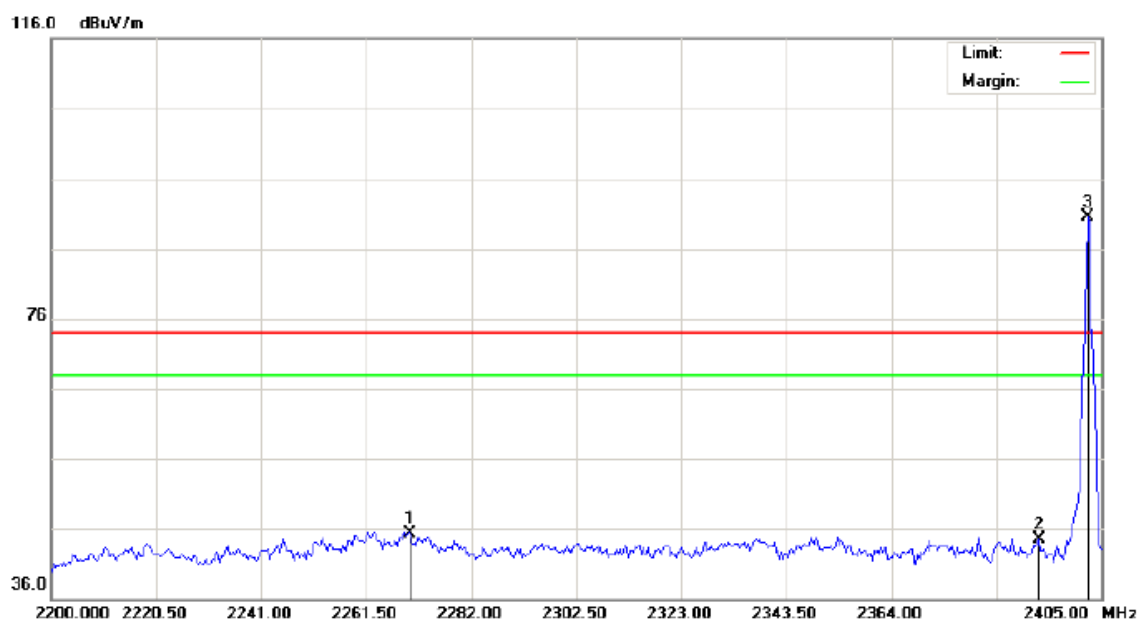

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %
EUT: Spin-It widget Bluetooth speaker Distance:
M/N: XO-9331
Mode: Low Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2270.042	35.06	10.18	45.24	74.00	-28.76	peak			
2		2392.700	34.18	10.31	44.49	74.00	-29.51	peak			
3	*	2402.000	80.09	10.32	90.41	74.00	16.41	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL –Horizontal

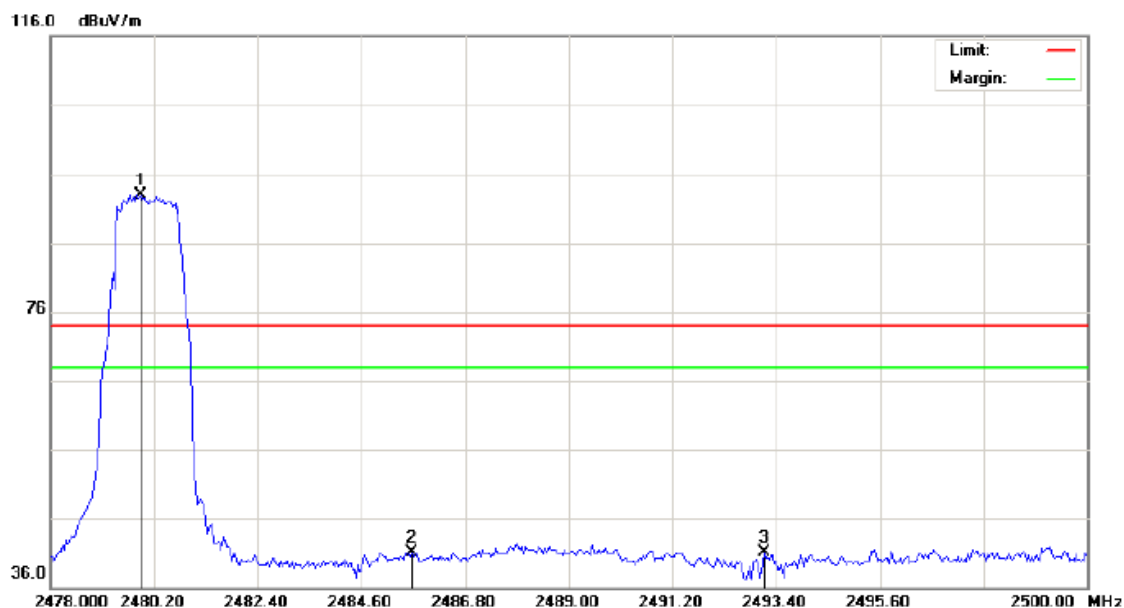

Site: site #1

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK)

Power:

Humidity: 60 %

EUT: Spin-It widget Bluetooth speaker

Distance:


M/N: XO-9331

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	82.51	10.41	92.92	74.00	18.92	peak			
2		2485.663	30.69	10.41	41.10	74.00	-32.90	peak			
3		2493.143	30.65	10.42	41.07	74.00	-32.93	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

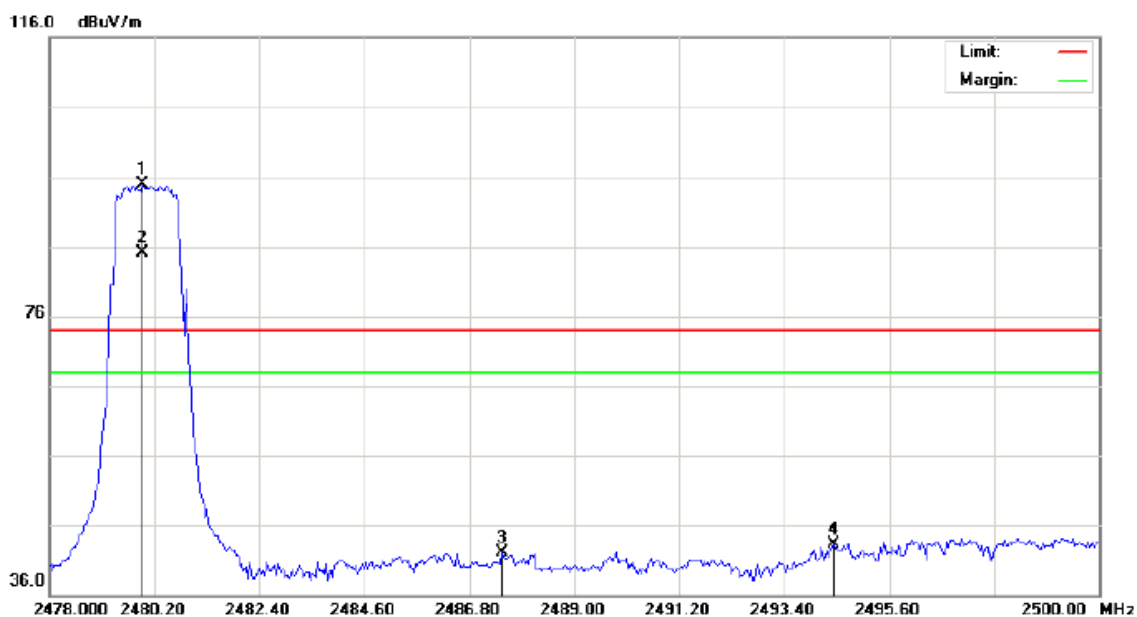

Site: site #1 Polarization: **Vertical** Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %
EUT: Spin-It widget Bluetooth speaker Distance:
M/N: XO-9331
Mode: High Channel TX
Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	84.45	10.41	94.86	74.00	20.86	peak			
2	X	2480.000	74.68	10.41	85.09	74.00	11.09	AVG	100	54	
3		2487.497	31.61	10.42	42.03	74.00	-31.97	peak			
4		2494.427	32.94	10.42	43.36	74.00	-30.64	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW $\geq$ 1% of the 20 dB bandwidth, VBW $\geq$ RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.


11.2. TEST SET-UP

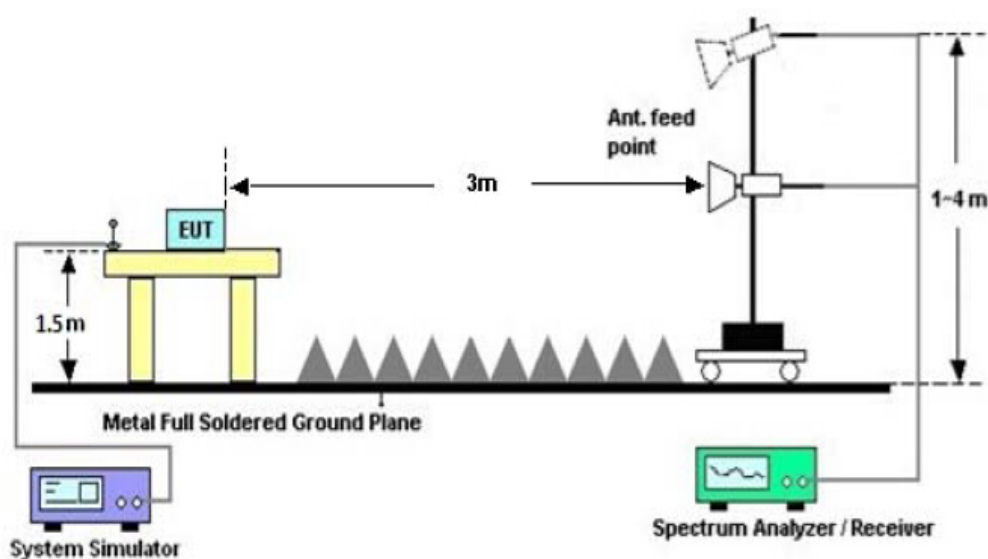


11.3. LIMITS AND MEASUREMENT RESULTS FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.971	1.117	PASS
	Middle Channel	0.979	1.170	PASS
	High Channel	0.977	1.128	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

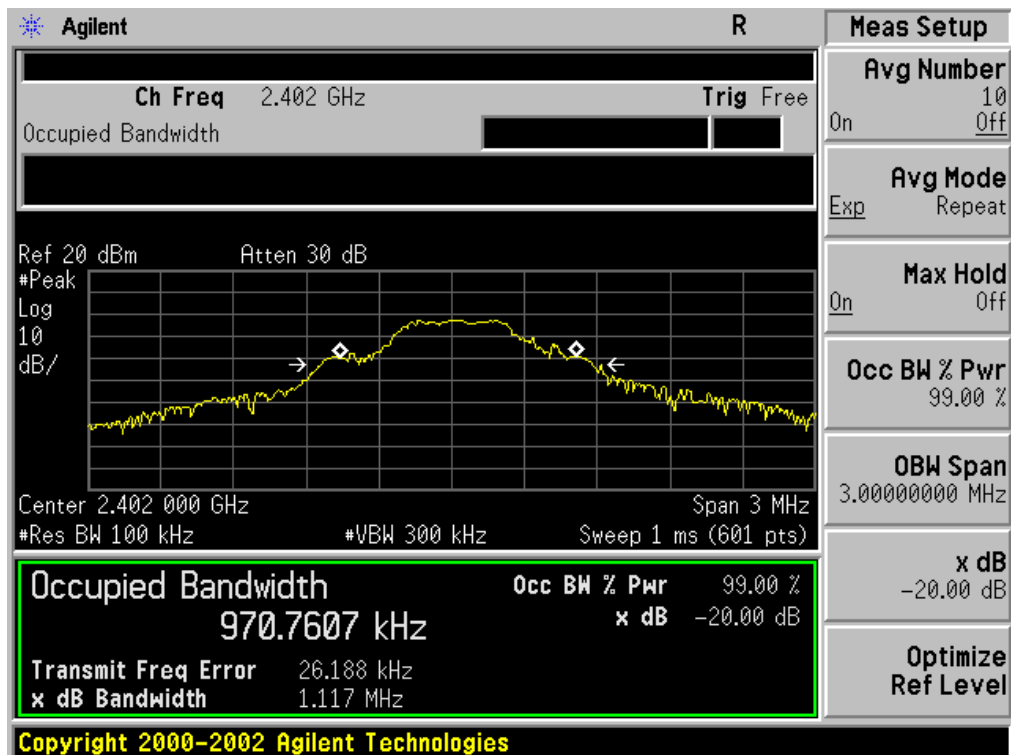

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

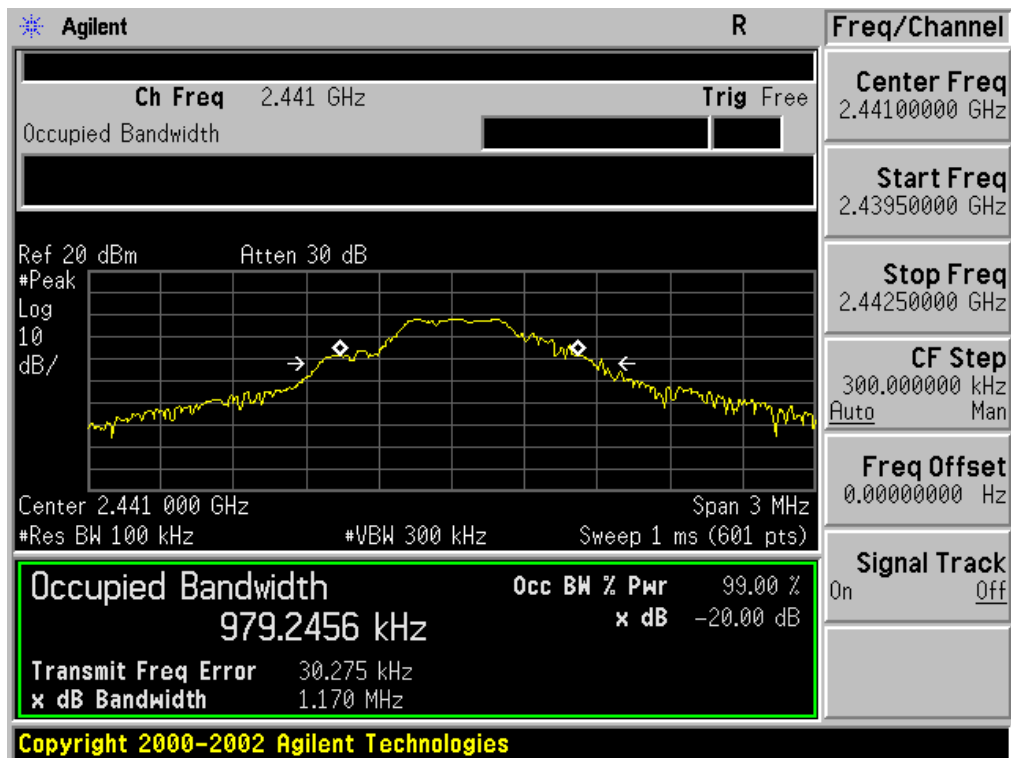


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.176	1.301	PASS
	Middle Channel	1.173	1.313	PASS
	High Channel	1.133	1.250	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

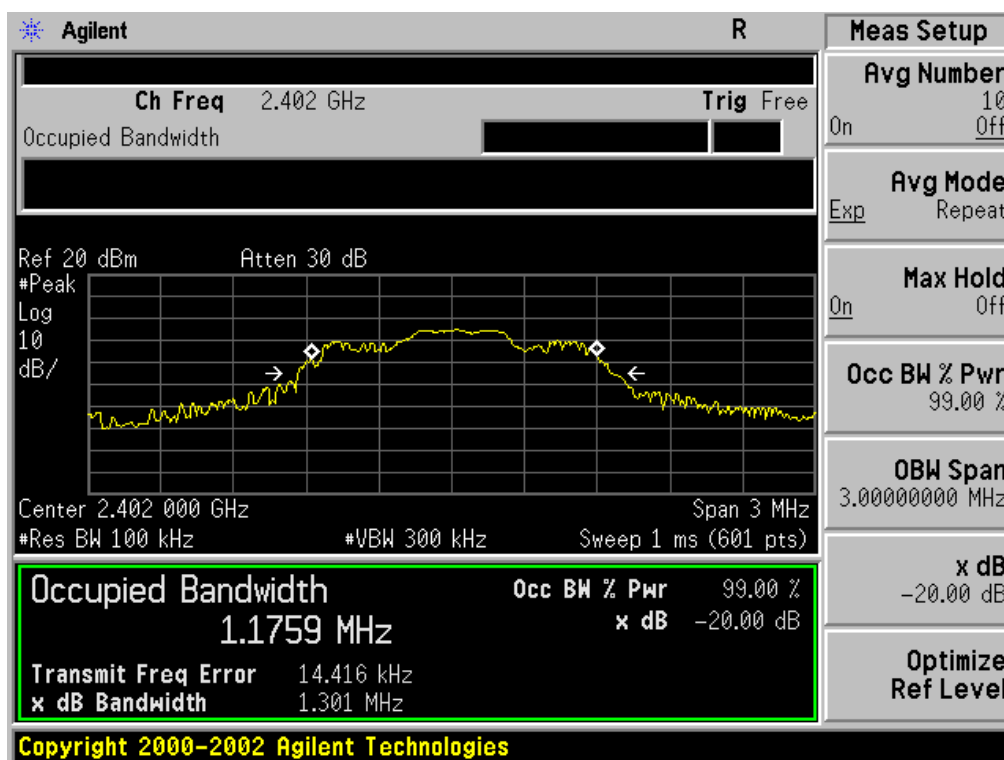

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

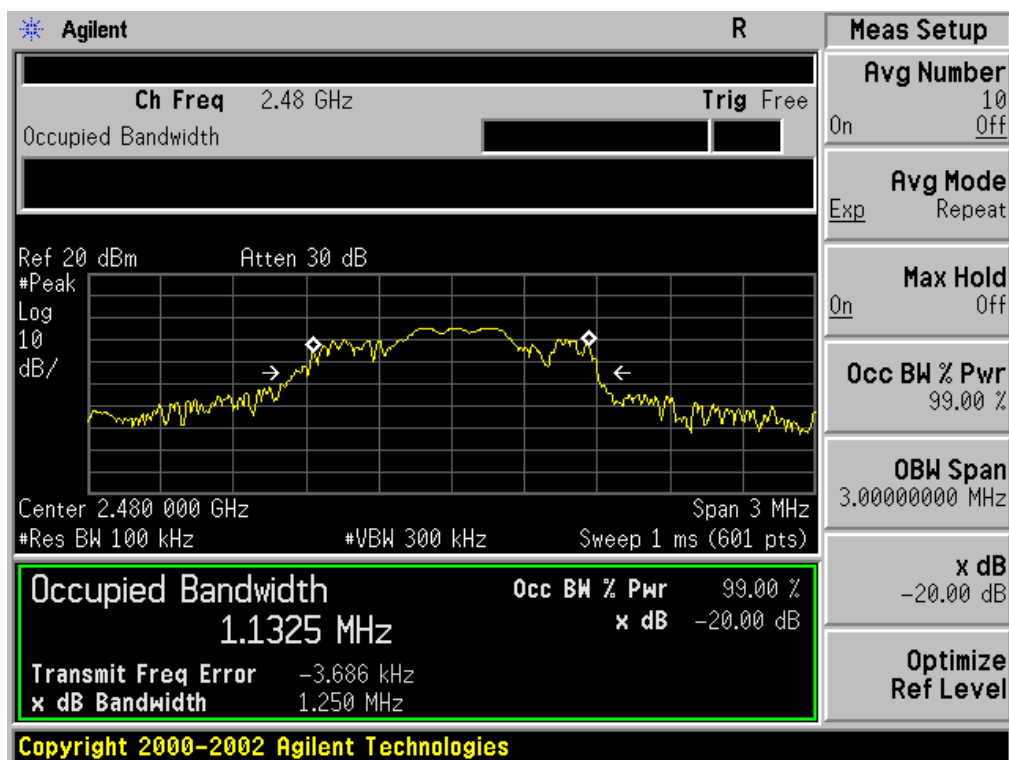




BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.197	1.324	PASS
	Middle Channel	1.197	1.312	PASS
	High Channel	1.211	1.326	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

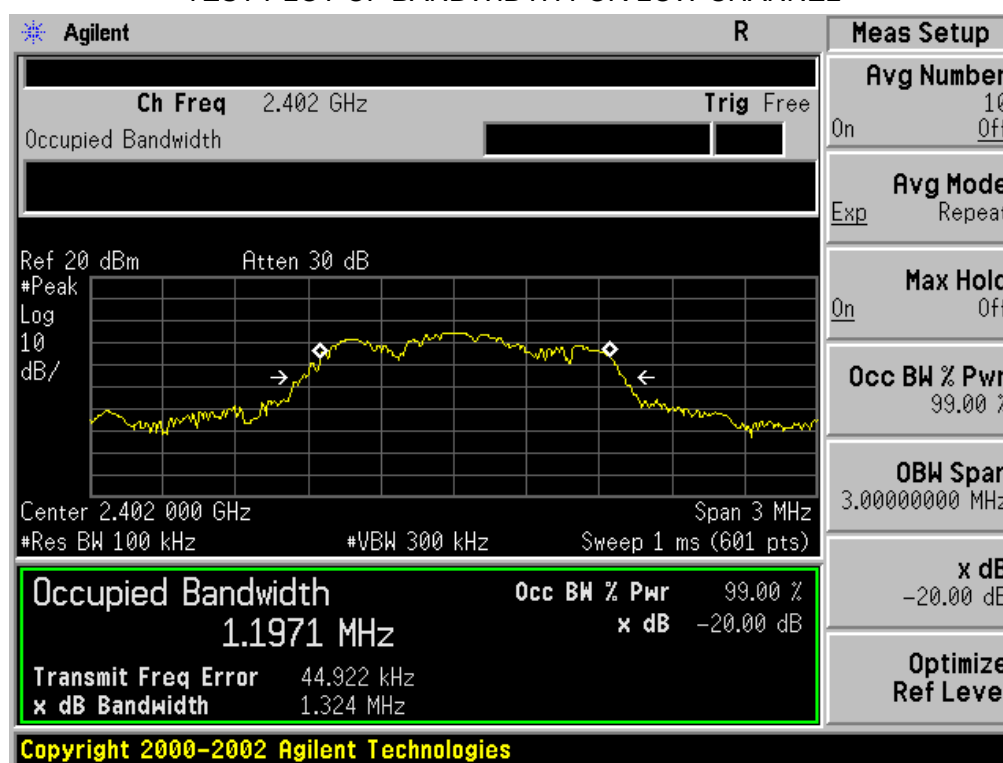

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

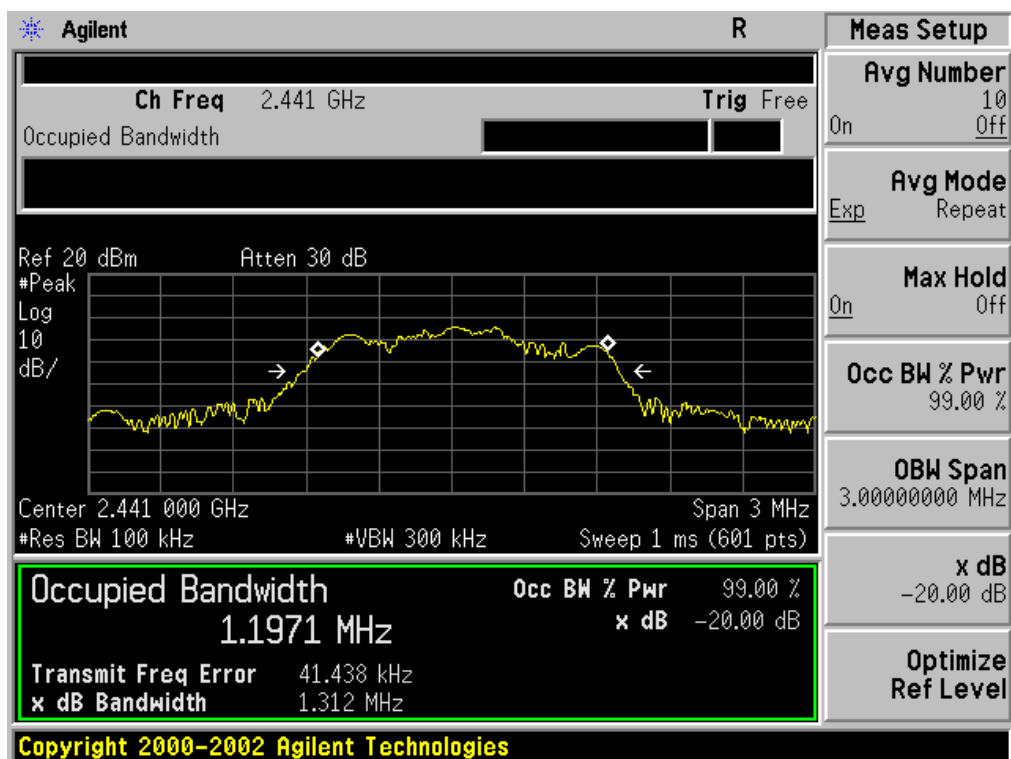

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

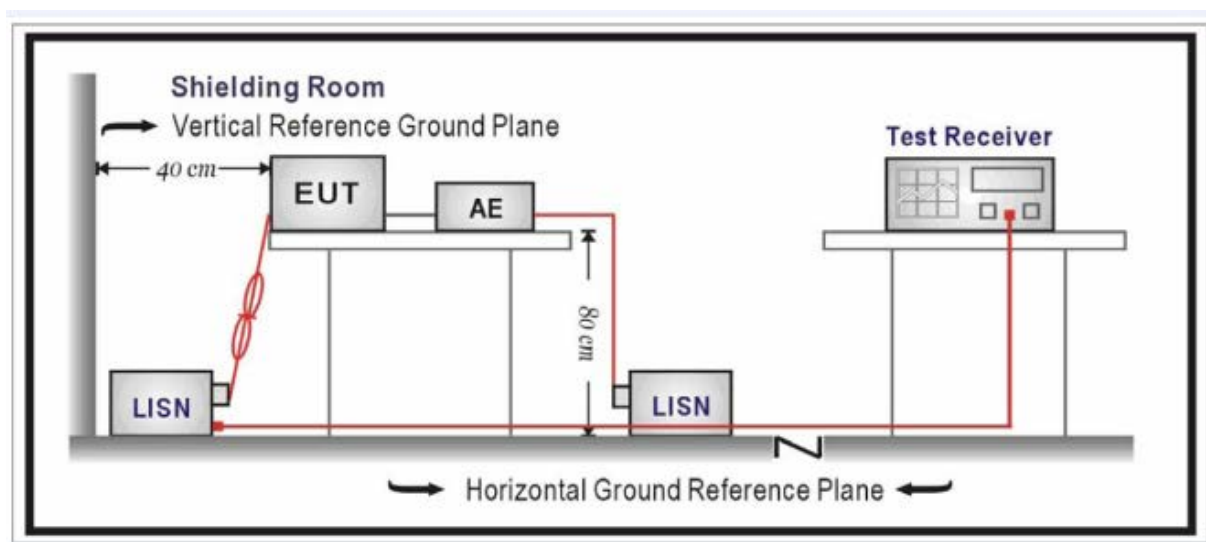

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

**12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST****By adapter(worst case)****FOR BR/EDR**

Line Conducted Emission Test Line 1-L

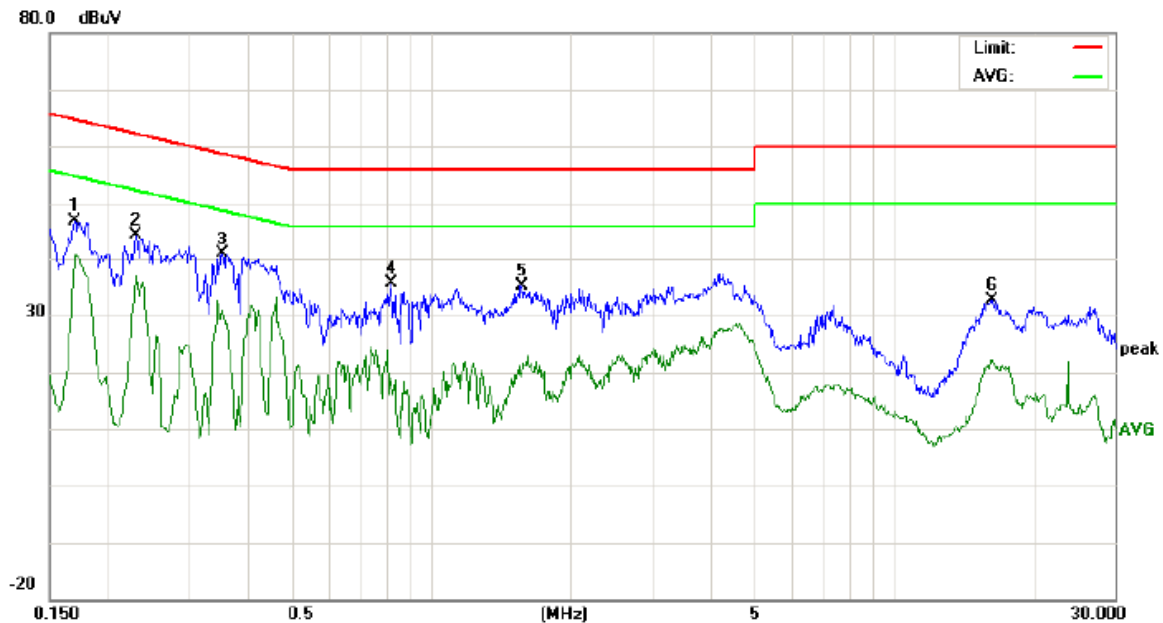

Site: Conduction

Phase: **L1**

Temperature: 26

Limit: FCC Class B Conduction(QP)

Power:

Humidity: 60 %

EUT: Spin-It Widget Bluetooth Speaker


M/N: XO-9331

Mode: BT Link with charging

Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	36.58		30.53	10.18	46.76		40.71	64.96	54.96	-18.20	-14.25	P	
2	0.2300	34.13		26.72	10.25	44.38		36.97	62.45	52.45	-18.07	-15.48	P	
3	0.3537	30.61		20.52	10.31	40.92		30.83	58.87	48.87	-17.95	-18.04	P	
4	0.8215	25.24		7.77	10.31	35.55		18.08	56.00	46.00	-20.45	-27.92	P	
5	1.5700	24.79		9.95	10.36	35.15		20.31	56.00	46.00	-20.85	-25.69	P	
6	16.3899	22.48		11.76	10.12	32.60		21.88	60.00	50.00	-27.40	-28.12	P	

Line Conducted Emission Test Line 2-N

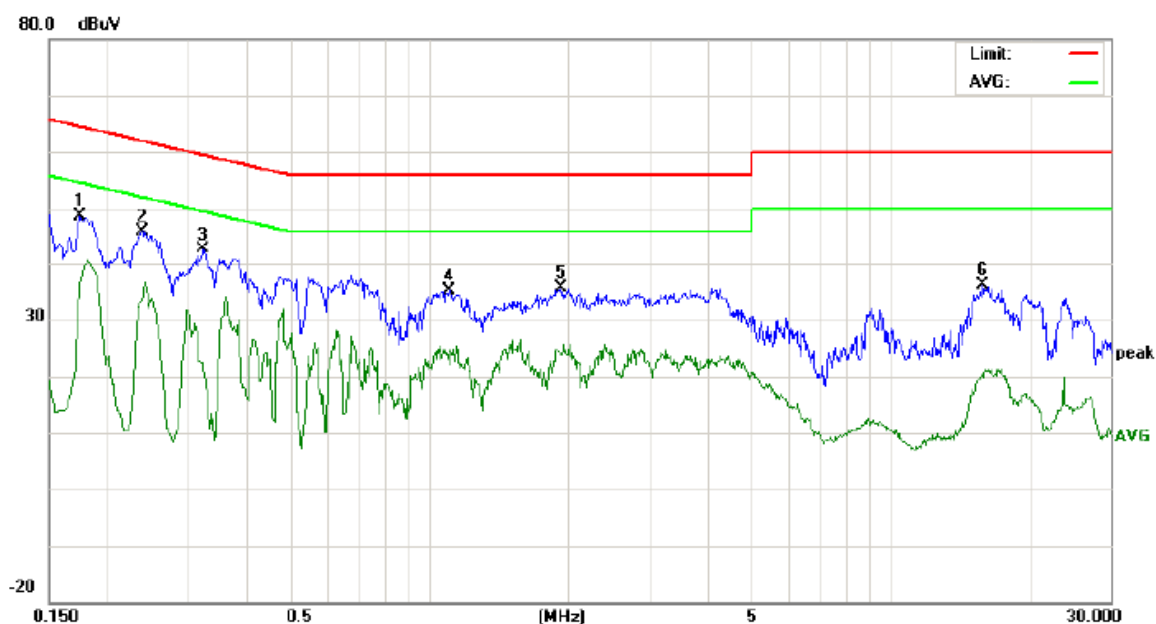

Site: Conduction Phase: **N** Temperature: 26
 Limit: FCC Class B Conduction(QP) Power: Humidity: 60 %
 EUT: Spin-It Widget Bluetooth Speaker
 M/N: XO-9331
 Mode: BT Link with charging
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1748	38.54		26.15	10.19	48.73		36.34	64.72	54.72	-15.99	-18.38	P	
2	0.2379	35.70		23.19	10.26	45.96		33.45	62.17	52.17	-16.21	-18.72	P	
3	0.3234	32.28		11.21	10.30	42.58		21.51	59.62	49.62	-17.04	-28.11	P	
4	1.1019	24.79		11.72	10.37	35.16		22.09	56.00	46.00	-20.84	-23.91	P	
5	1.9375	25.49		13.73	10.24	35.73		23.97	56.00	46.00	-20.27	-22.03	P	
6	15.8018	26.08		10.25	10.11	36.19		20.36	60.00	50.00	-23.81	-29.64	P	



APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP



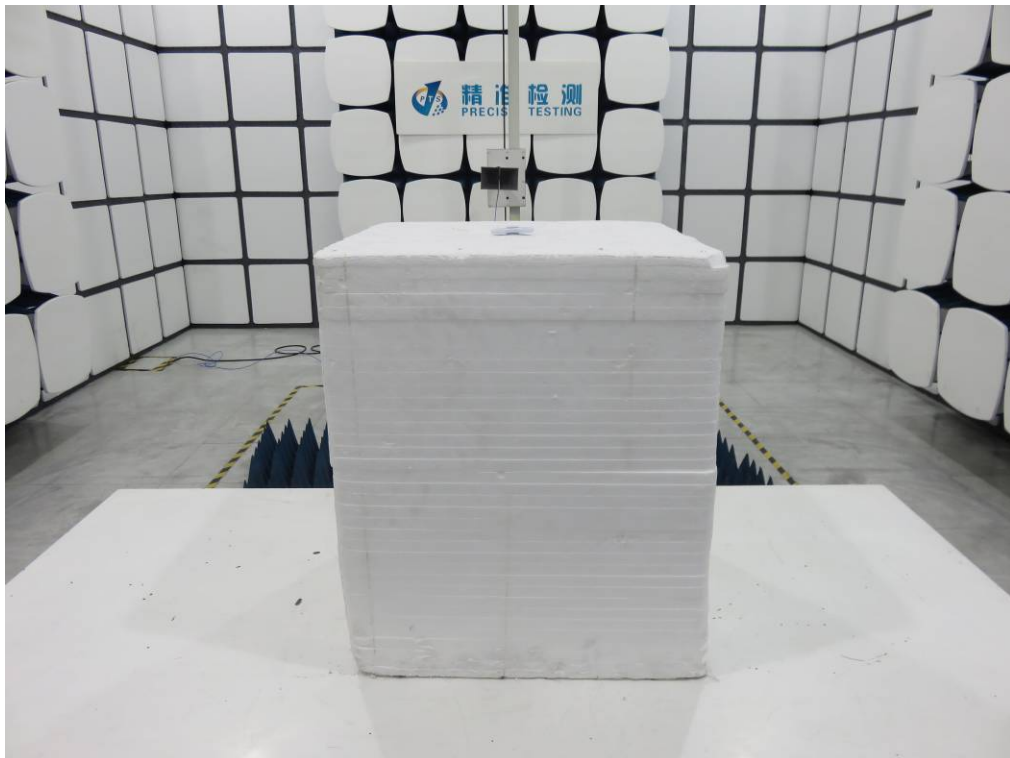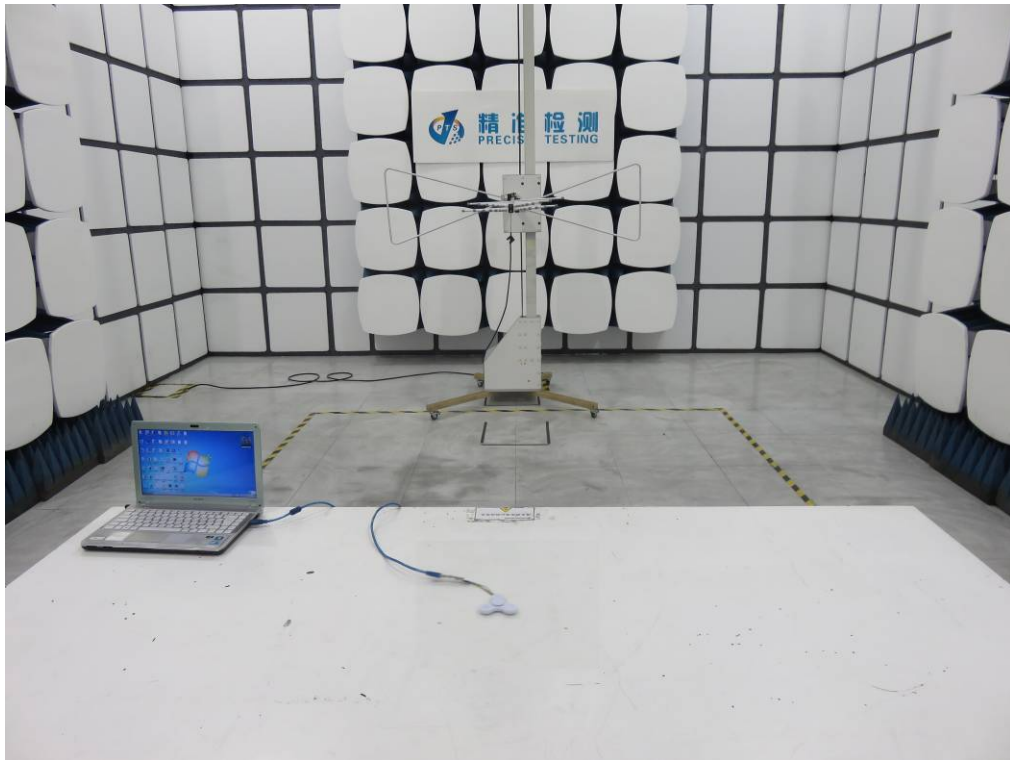

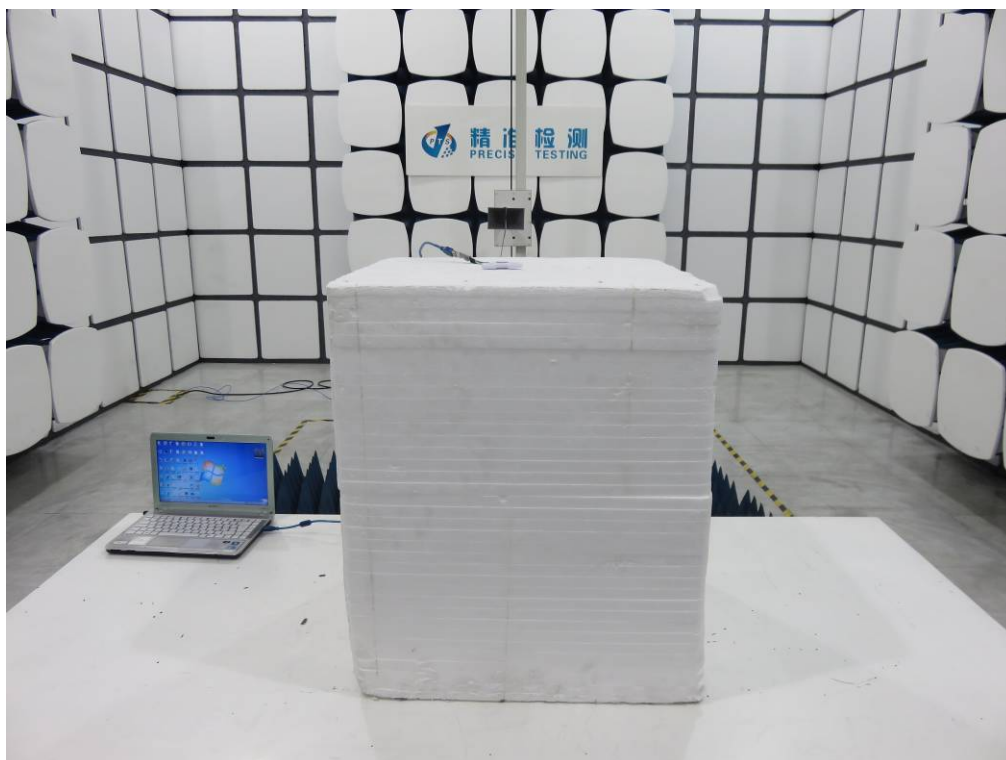

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT




FRONT VIEW OF EUT




BACK VIEW OF EUT



LEFT VIEW OF EUT

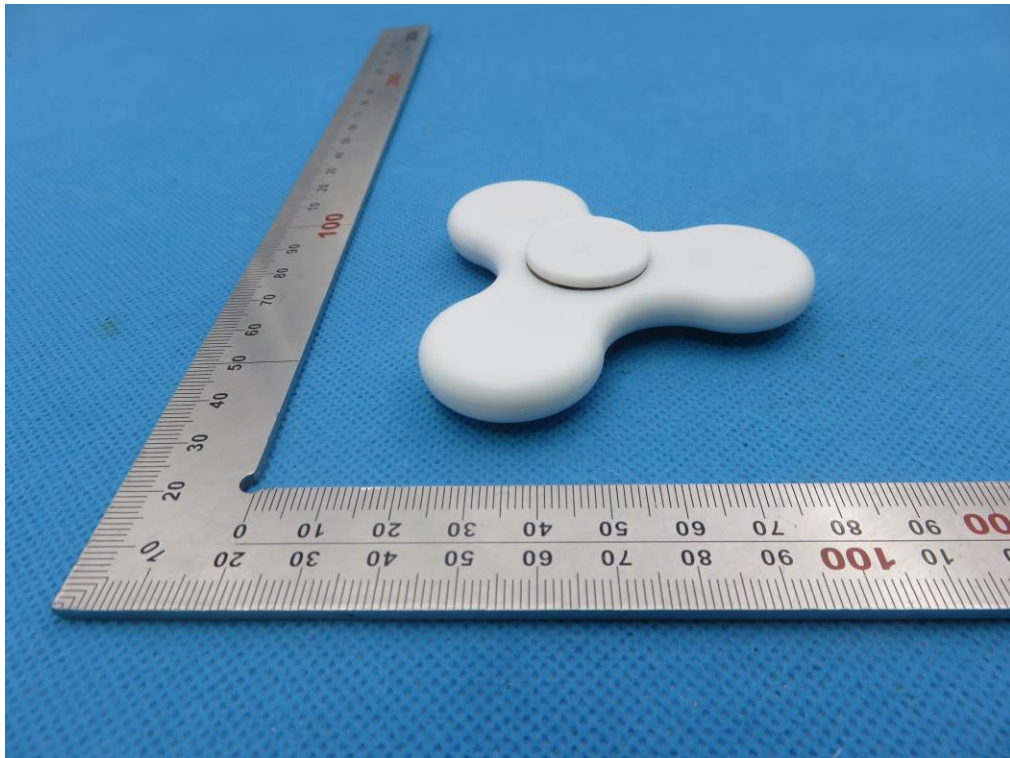

RIGHT VIEW OF EUT

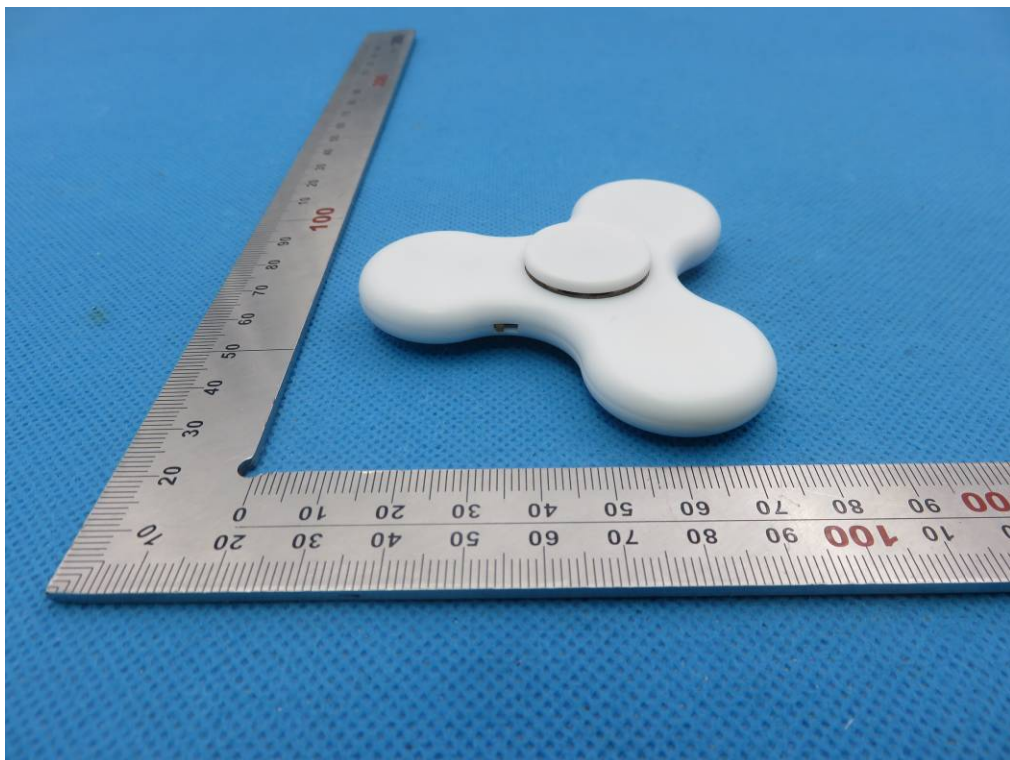


VIEW OF EUT (PORT)



OPEN VIEW OF EUT




INTERNAL VIEW OF EUT-1

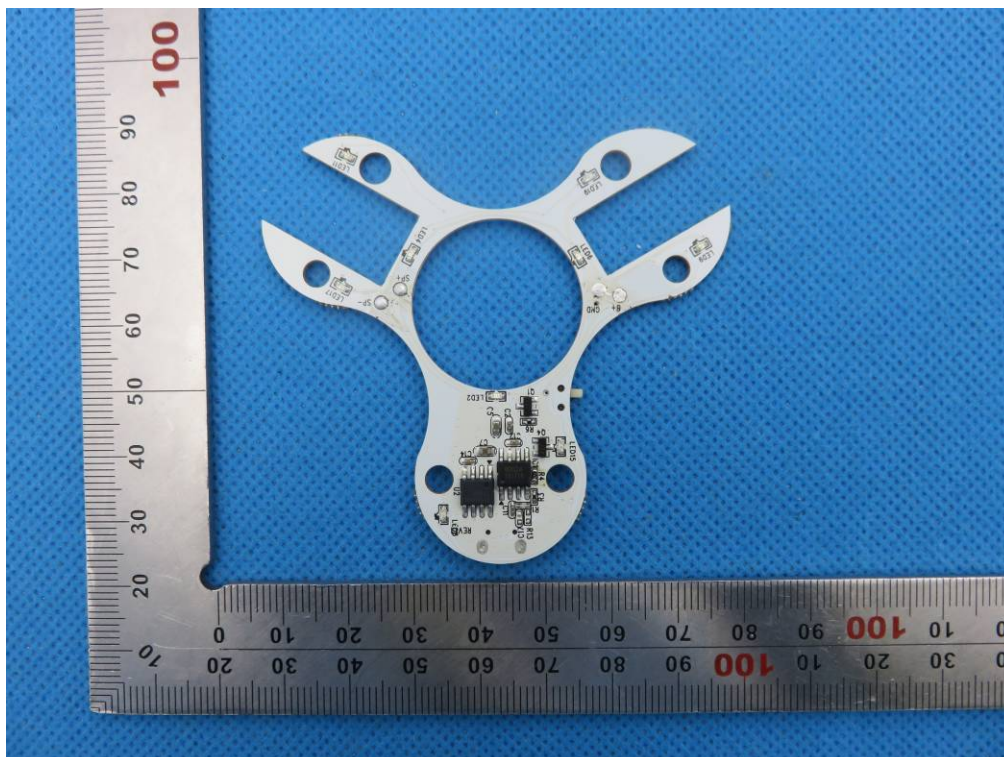

INTERNAL VIEW OF EUT-2



INTERNAL VIEW OF EUT-3

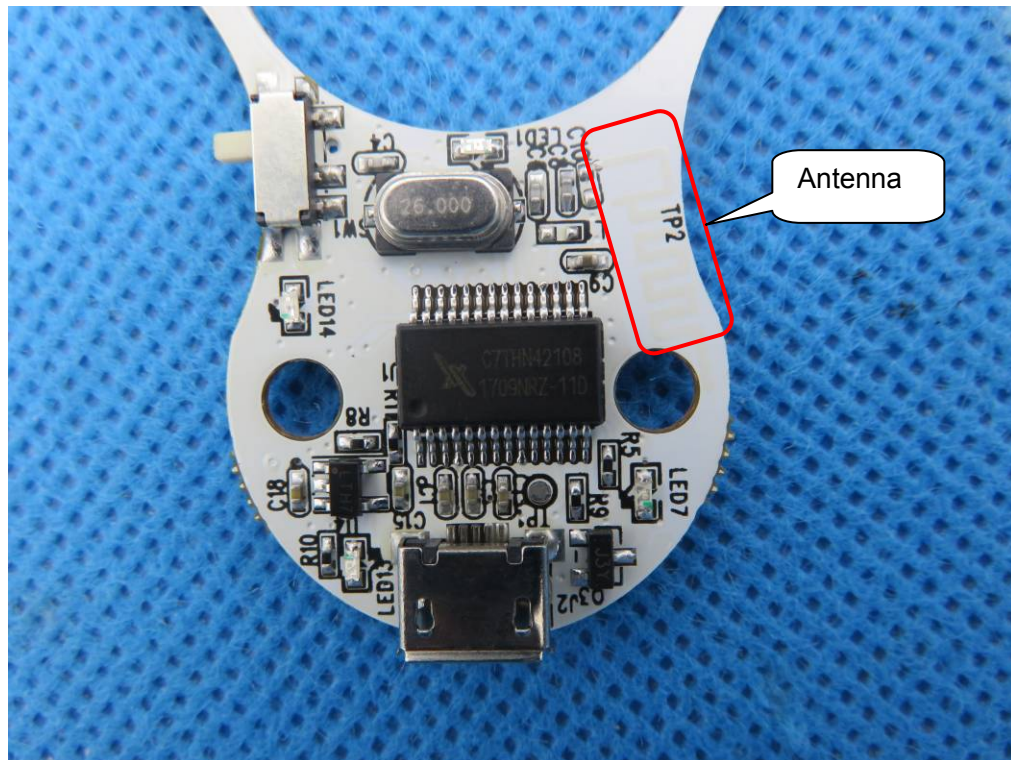

VIEW OF ADAPTER(AE)



The adapter was supplied by PTC

Other Color Sample

TOP VIEW OF EUT



BOTTOM VIEW OF EUT




FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT

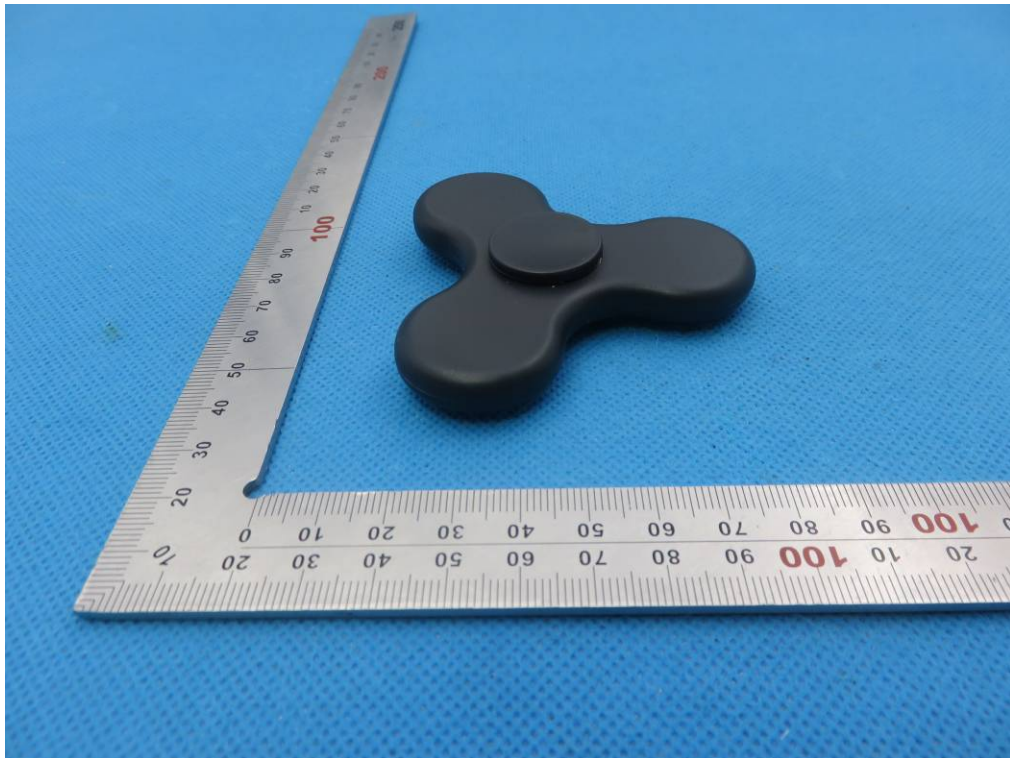

RIGHT VIEW OF EUT



VIEW OF EUT (PORT)



*****THE END REPORT*****