



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247 TEST REPORT

For

Dongguan Xing Yue Electronic co., Ltd

#98 LiWu Swan Industrial District, Qiao Tou Town, Dong Guan City, GuangDong, China

FCC ID: 2ALCFXO-9672

Report Type: Original Report	Product Type: Wooden Bluetooth Speaker w/Wireless Charging Pad
Test Engineer: Winnie Yang	<i>Winnie Yang</i>
Report Number: RSHA181109003-00B	
Report Date: 2018-11-29	
Reviewed By: RF Leader	<i>Oscar Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE	11
MEASUREMENT RESULT	11
FCC §15.203 – ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
CORRECTED FACTOR & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA	14
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST RESULTS SUMMARY	18
TEST DATA	19
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36

TEST DATA	36
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST DATA	45
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	61
APPLICABLE STANDARD	61
TEST PROCEDURE	61
TEST DATA	61
FCC §15.247(d) - BAND EDGES TESTING	67
APPLICABLE STANDARD	67
TEST PROCEDURE	67
TEST DATA	67

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Dongguan Xing Yue Electronic co., Ltd
Tested Model	XO-9672
Product Type	Wooden Bluetooth Speaker w/Wireless Charging Pad
Dimension	105 mm (L)* 65 mm (W)*81.5 mm(H)
Power Supply	DC 5.0V from adapter

**All measurement and test data in this report was gathered from production sample serial number: 20181109003.
(Assigned by the BACL. The EUT supplied by the applicant was received on 2018-11-09.*

Objective

This test report is prepared on behalf of Dongguan Xing Yue Electronic co., Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DCD submission with FCC ID:2ALCFXO-9672

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	77	2479
39	2441	78	2480

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF test tool: fcc_tool

GFSK Power level: 10

$\pi/4$ -DQPSK Power level: 10

8DPSK Power level: 10

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter1	LA65NS0-00	DF263
SHENZHEN TIANYIN	Adapter2	TPA-46B050100UU	/
Rohde & Schwarz	LISN-1	ESH3-Z5	862770/011
Rohde & Schwarz	LISN-2	ENV216	3560655016
Xing Yue	Debug Board	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	1.5	EUT	Adapter 2
Data Cable	0.3	EUT	Debug Board

Block Diagram of Test Setup


For Conducted Emissions:

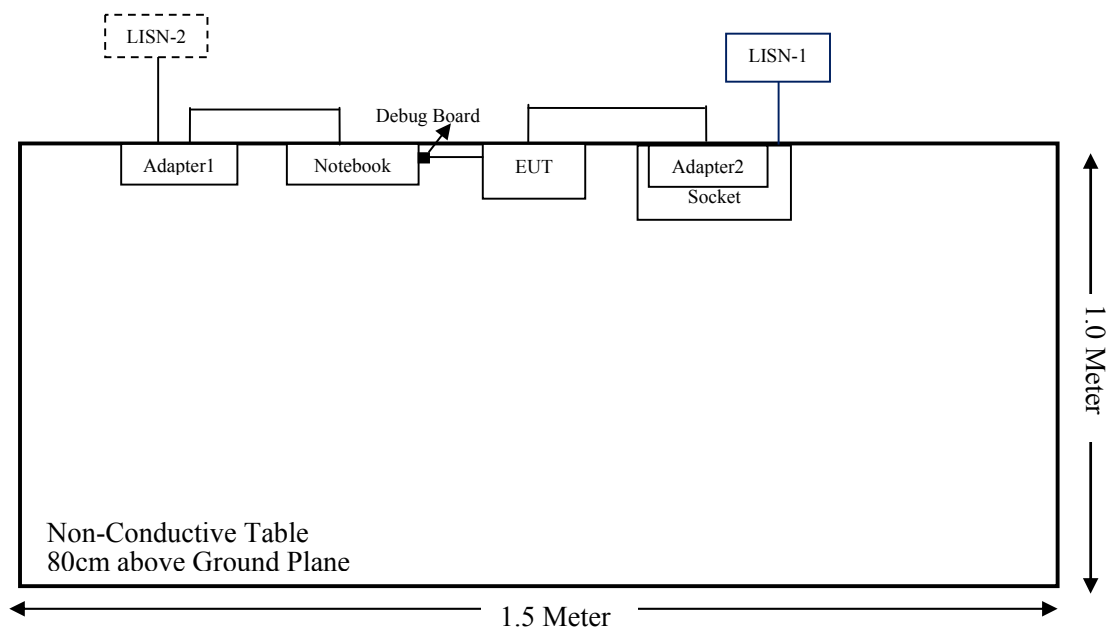

For Radiated Emissions(Below 1GHz):

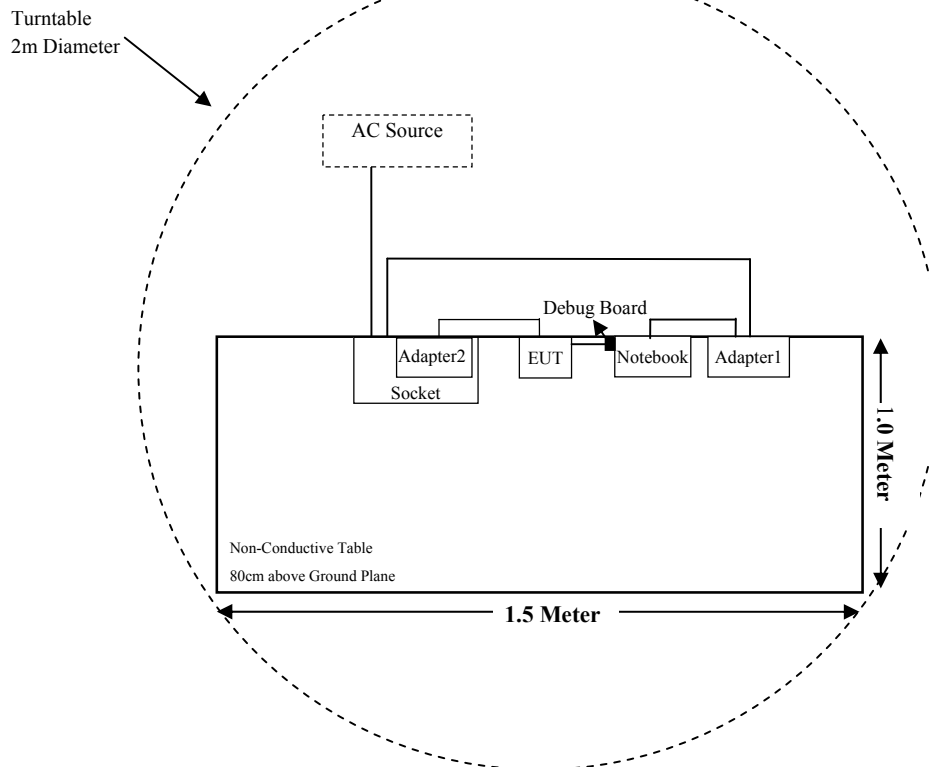

For Radiated Emissions(Above 1GHz):

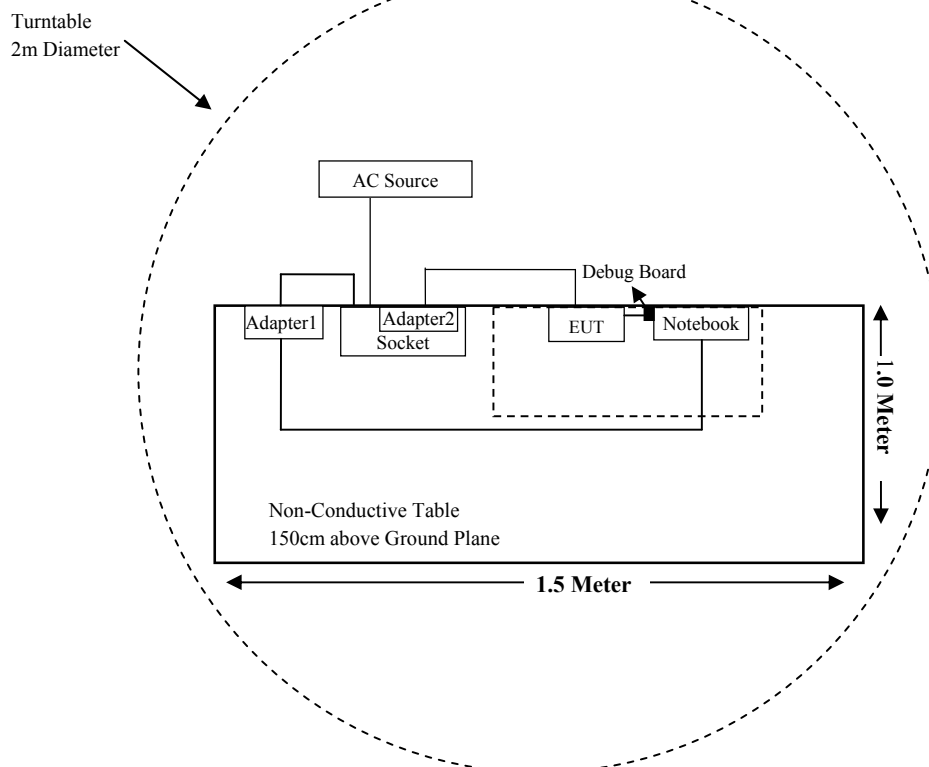

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-12	2019-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
Narda	Pre-amplifier	AFS42-00101800	2001270	2017-12-22	2018-12-21
EM Electronics Corporation	Amplifier	EM18G40G	060726	2018-03-22	2019-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	/	2018-08-05	2019-08-04
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSIQ26	836131/009	2018-09-21	2019-09-20
Narda	Attenuator/10dB	10dB	/	2018-08-15	2019-08-14
Dongguan Xing Yue	RF Cable	/	/	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-12	2019-11-11
Rohde & Schwarz	LISN	ENV216	3560655016	2017-11-25	2018-11-24
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (I) & §1.1310 & §2.1093 - RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

Frequency Range (MHz)	Target Output Power		Minimum test separation distance required for the exposure conditions (mm)
	(dBm)	(mW)	
2402-2480	3.65	2.32	5.00

Note: The target output power was declared by the manufacturer.

Result: $[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] = 2.32/5 \cdot \sqrt{2.48} = 0.73 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB antenna for Bluetooth and the antenna gain is 0dBi, which is permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

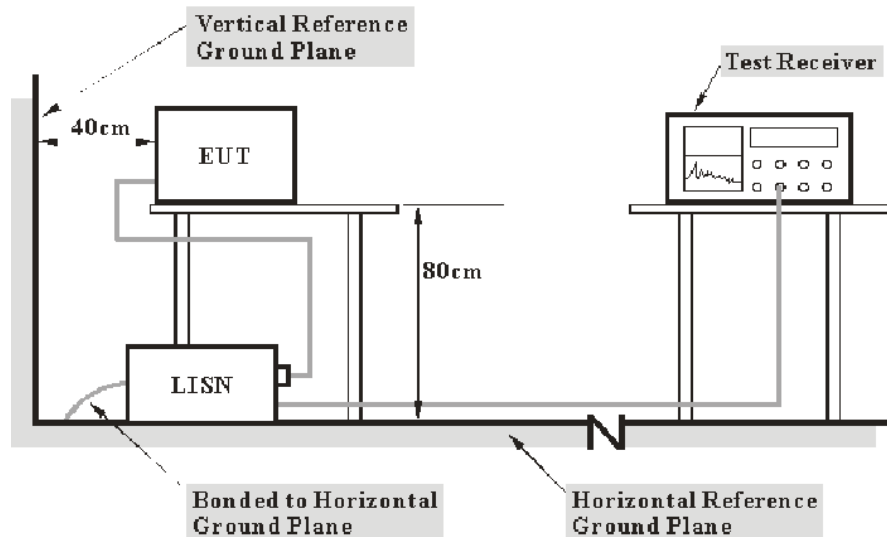

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa


The testing was performed by Winnie Yang on 2018-11-24.

EUT operation mode: Transmitting in high channel of 8DPSK mode(Worst case)

AC 120V/60 Hz, Line

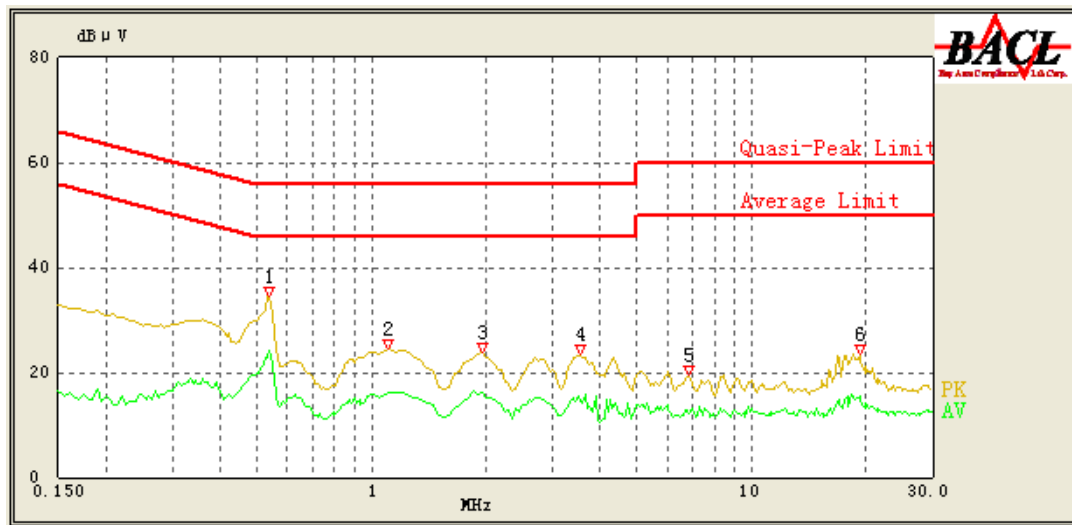

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.535	34.61	QP	9.000	L1	16.06	56.00	21.39	Compliance
0.540	24.28	AV	9.000	L1	16.05	46.00	21.72	Compliance
1.100	24.65	QP	9.000	L1	15.88	56.00	31.35	Compliance
1.100	16.07	AV	9.000	L1	15.88	46.00	29.93	Compliance
1.950	23.83	QP	9.000	L1	15.85	56.00	32.17	Compliance
1.950	16.05	AV	9.000	L1	15.85	46.00	29.95	Compliance
3.550	23.34	QP	9.000	L1	15.85	56.00	32.66	Compliance
3.550	14.86	AV	9.000	L1	15.85	46.00	31.14	Compliance
6.850	19.41	QP	9.000	L1	15.97	60.00	40.59	Compliance
6.850	12.29	AV	9.000	L1	15.97	50.00	37.71	Compliance
19.250	23.63	QP	9.000	L1	16.41	60.00	36.37	Compliance
19.250	15.35	AV	9.000	L1	16.41	50.00	34.65	Compliance

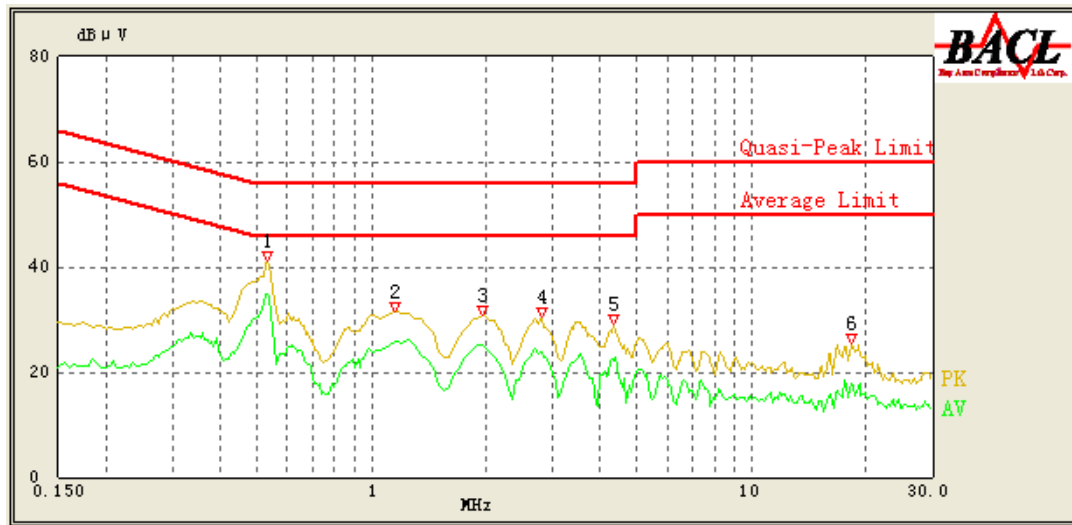AC 120V/60 Hz, Neutral



Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.530	41.11	QP	9.000	N	16.09	56.00	14.89	Compliance
0.530	34.94	AV	9.000	N	16.09	46.00	11.06	Compliance
1.150	31.55	QP	9.000	N	15.94	56.00	24.45	Compliance
1.150	25.90	AV	9.000	N	15.94	46.00	20.10	Compliance
1.950	30.79	QP	9.000	N	15.91	56.00	25.21	Compliance
1.950	25.11	AV	9.000	N	15.91	46.00	20.89	Compliance
2.800	30.55	QP	9.000	N	15.90	56.00	25.45	Compliance
2.800	23.69	AV	9.000	N	15.90	46.00	22.31	Compliance
4.350	29.08	QP	9.000	N	15.88	56.00	26.92	Compliance
4.350	22.17	AV	9.000	N	15.88	46.00	23.83	Compliance
18.400	25.43	QP	9.000	N	16.11	60.00	34.57	Compliance
18.550	17.45	AV	9.000	N	16.12	50.00	32.55	Compliance

Note:

- 1) Corrected Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 2) Margin = Limit – Reading

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

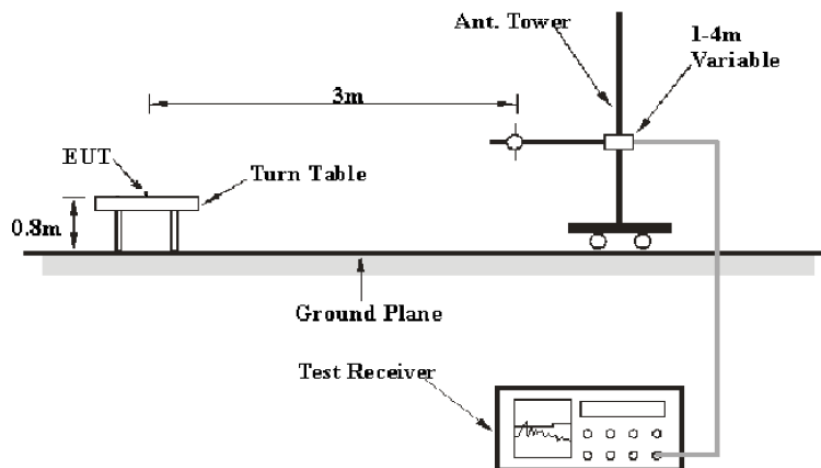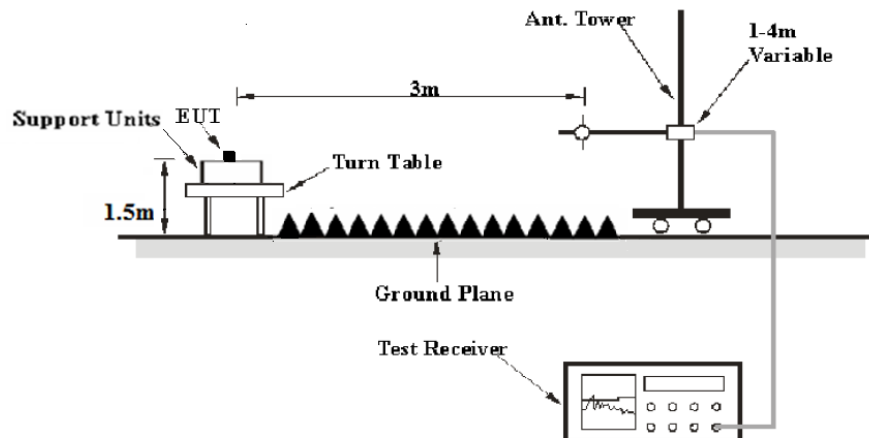EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	23.4-24.0 °C
Relative Humidity:	49-50 %
ATM Pressure:	101.1 kPa

The testing was performed by Winnie Yang on 2018-11-26&2018-11-27.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case **8DPSK Mode in X-axis of orientation** was recorded

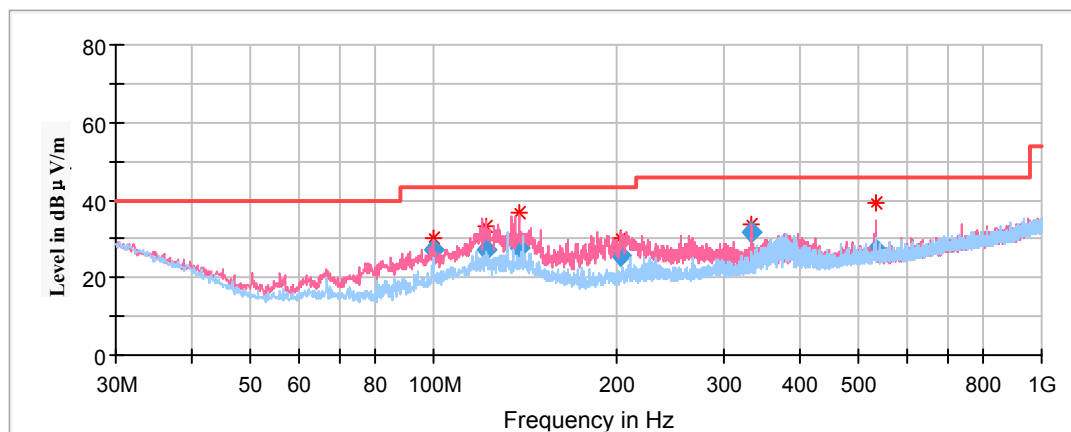

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
99.612200	27.28	101.0	V	289.0	-15.0	43.50	16.22
122.166250	27.31	101.0	V	310.0	-11.3	43.50	16.19
138.312850	27.88	101.0	V	294.0	-11.9	43.50	15.62
202.488700	25.83	101.0	V	310.0	-12.3	43.50	17.67
331.987850	31.91	101.0	V	1.0	-9.8	46.00	14.09
532.967200	27.07	101.0	V	300.0	-5.8	46.00	18.93

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case $\pi/4$ -DQPSK Mode in X-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
Corrected Amplitude = Corrected Factor + Reading
Margin = Limit - Corrected. Amplitude

Low Channel: 2402MHz


Full Spectrum

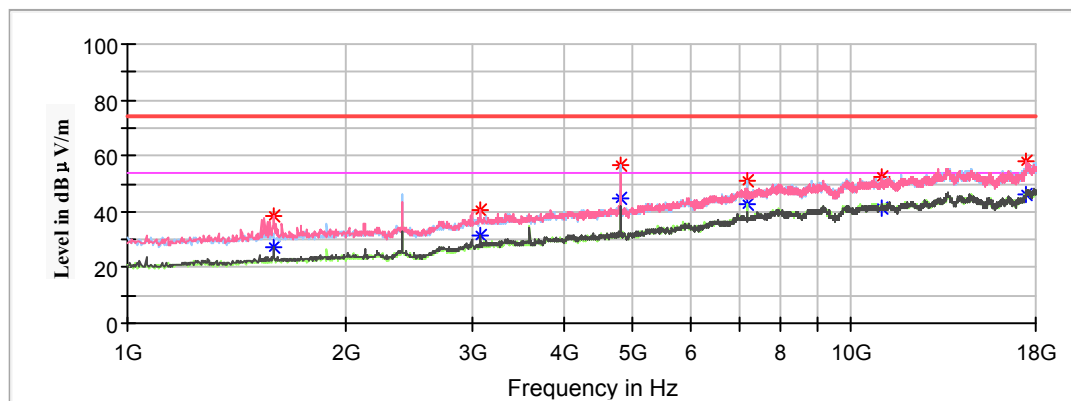

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1591.600000	---	27.52	100.0	V	163.0	-7.2	54.00	26.48
1591.600000	38.18	---	100.0	V	163.0	-7.2	74.00	35.82
3070.600000	---	31.54	200.0	V	195.0	-1.5	54.00	22.46
3070.600000	40.42	---	200.0	V	195.0	-1.5	74.00	33.58
4804.000000	---	44.89	150.0	H	146.0	1.8	54.00	9.11
4804.000000	56.34	---	150.0	H	146.0	1.8	74.00	17.66
7206.000000	---	42.89	150.0	H	157.0	8.9	54.00	11.11
7206.000000	50.71	---	150.0	H	157.0	8.9	74.00	23.29
11009.600000	---	41.55	100.0	H	207.0	13.5	54.00	12.45
11009.600000	52.33	---	100.0	H	207.0	13.5	74.00	21.67
17469.600000	---	46.11	100.0	V	131.0	17.0	54.00	7.89
17469.600000	57.97	---	100.0	V	131.0	17.0	74.00	16.03

Middle Channel: 2441MHz


Full Spectrum

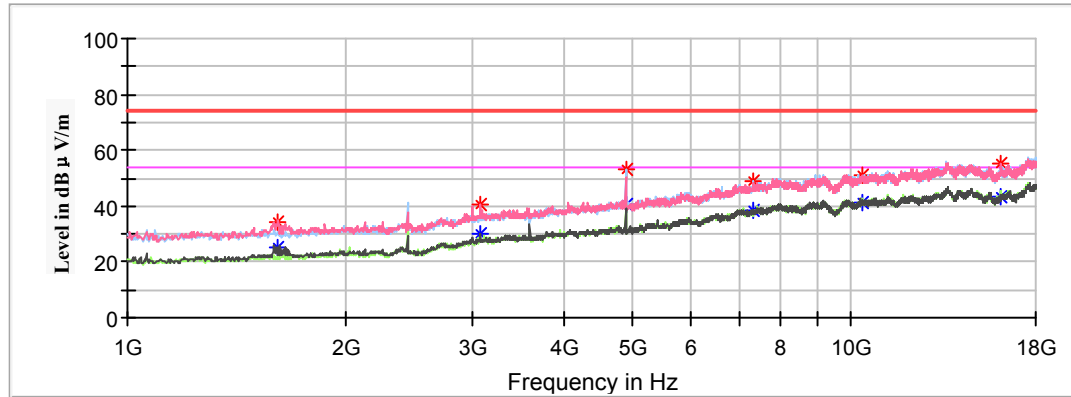

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1612.000000	---	25.05	200.0	V	192.0	-7.2	54.00	28.95
1612.000000	34.20	---	200.0	V	192.0	-7.2	74.00	39.80
3070.600000	---	30.26	200.0	V	181.0	-1.5	54.00	23.74
3070.600000	40.43	---	200.0	V	181.0	-1.5	74.00	33.57
4882.000000	---	40.53	200.0	H	318.0	1.9	54.00	13.47
4882.000000	53.34	---	200.0	H	318.0	1.9	74.00	20.66
7323.000000	49.29	---	100.0	H	295.0	9.2	74.00	24.71
7323.000000	---	38.65	100.0	H	295.0	9.2	54.00	15.35
10394.200000	---	41.42	200.0	V	202.0	12.7	54.00	12.58
10394.200000	51.39	---	200.0	V	202.0	12.7	74.00	22.61
16147.000000	---	43.15	150.0	V	312.0	13.1	54.00	10.85
16147.000000	55.02	---	150.0	V	312.0	13.1	74.00	18.98

High Channel: 2480MHz


Full Spectrum

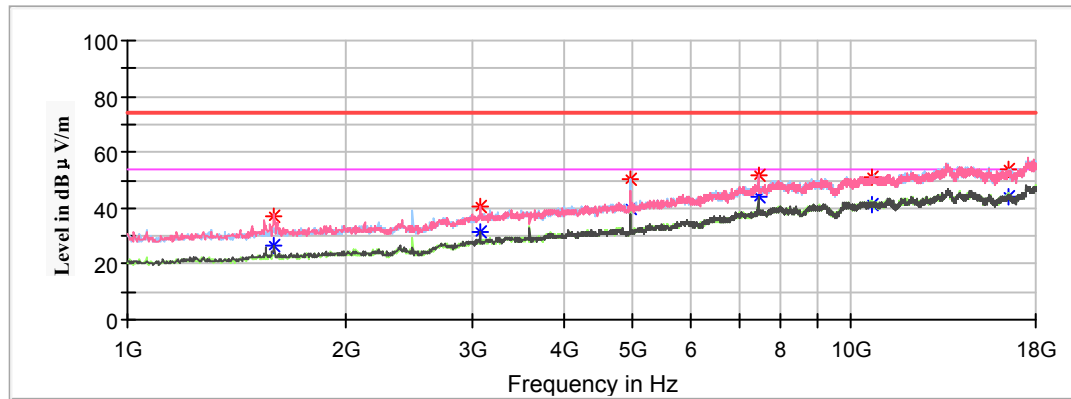


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V /m)	Average (dB μ V /m)	Height (cm)	Polar (H/V)				
1595.000000	---	26.47	200.0	V	181.0	-7.2	54.00	27.53
1595.000000	37.32	---	200.0	V	181.0	-7.2	74.00	36.68
3070.600000	---	31.60	200.0	V	181.0	-1.5	54.00	22.40
3070.600000	40.73	---	200.0	V	181.0	-1.5	74.00	33.27
4960.000000	---	39.98	100.0	H	157.0	2.0	54.00	14.02
4960.000000	50.03	---	100.0	H	157.0	2.0	74.00	23.97
7440.000000	---	44.00	200.0	V	0.0	9.6	54.00	10.00
7440.000000	51.42	---	200.0	V	0.0	9.6	74.00	22.58
10700.200000	---	41.38	200.0	H	56.0	13.0	54.00	12.62
10700.200000	51.37	---	200.0	H	56.0	13.0	74.00	22.63
16551.600000	---	44.33	150.0	H	261.0	13.7	54.00	9.67
16551.600000	53.71	---	150.0	H	261.0	13.7	74.00	20.29

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case 8DPSK Mode in X-axis of orientation was recorded

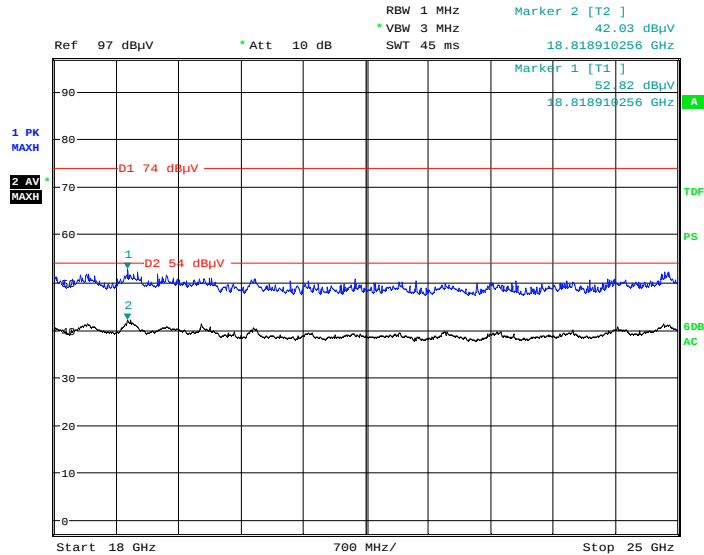Horizontal

Date: 27.NOV.2018 15:15:44

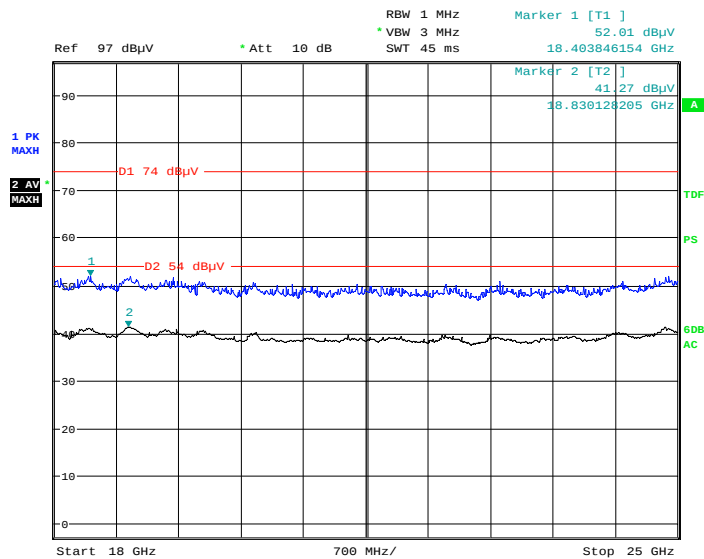Vertical

Date: 27.NOV.2018 15:45:52

Fundamental Test & Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case 8DPSK Mode in X-axis of orientation was recorded

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2402.000000	98.01	---	100.0	H	151.0	6.0	/	/
2402.000000	---	97.65	100.0	H	151.0	6.0	/	/
2402.000000	95.61	---	250.0	V	346.0	6.0	/	/
2402.000000	---	95.24	250.0	V	346.0	6.0	/	/
2387.558000	---	38.36	100.0	V	138.0	6.0	54	15.64
2387.948000	47.49	---	100.0	V	138.0	6.0	74	26.51
Middle Channel: 2441MHz								
2441.000000	97.49	---	150.0	H	191.0	6.2	/	/
2441.000000	---	97.08	150.0	H	191.0	6.2	/	/
2441.000000	95.38	---	200.0	V	268.0	6.2	/	/
2441.000000	---	94.78	200.0	V	268.0	6.2	/	/
High Channel: 2480MHz								
2480.000000	99.98	---	200.0	H	147.0	6.3	/	/
2480.000000	---	99.73	200.0	H	147.0	6.3	/	/
2480.000000	97.70	---	200.0	V	357.0	6.3	/	/
2480.000000	---	97.26	200.0	V	357.0	6.3	/	/
2483.968000	---	50.5	150.0	H	158.0	6.3	54	3.5
2484.064000	55.82	---	150.0	H	158.0	6.3	74	18.18



Conducted Spurious Emissions at Antenna Port



BDR (GFSK): Low Channel

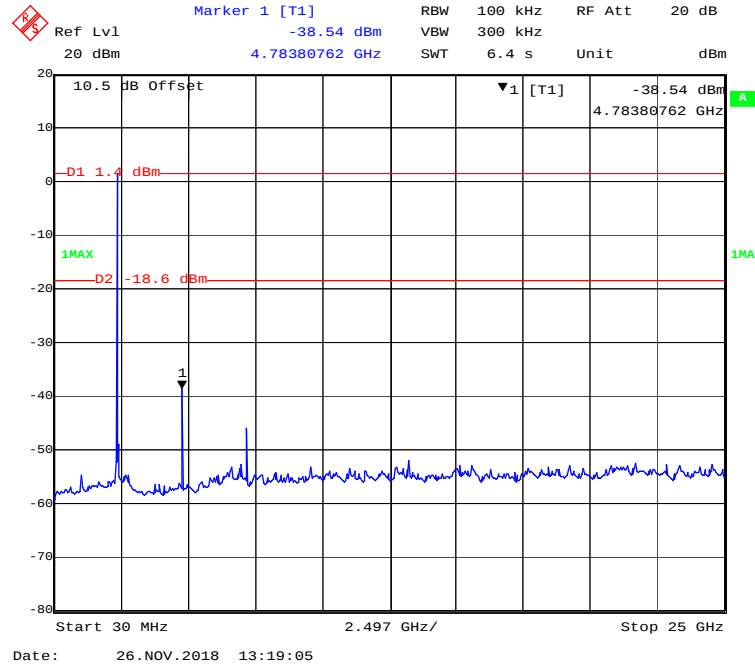


BDR (GFSK): Middle Channel

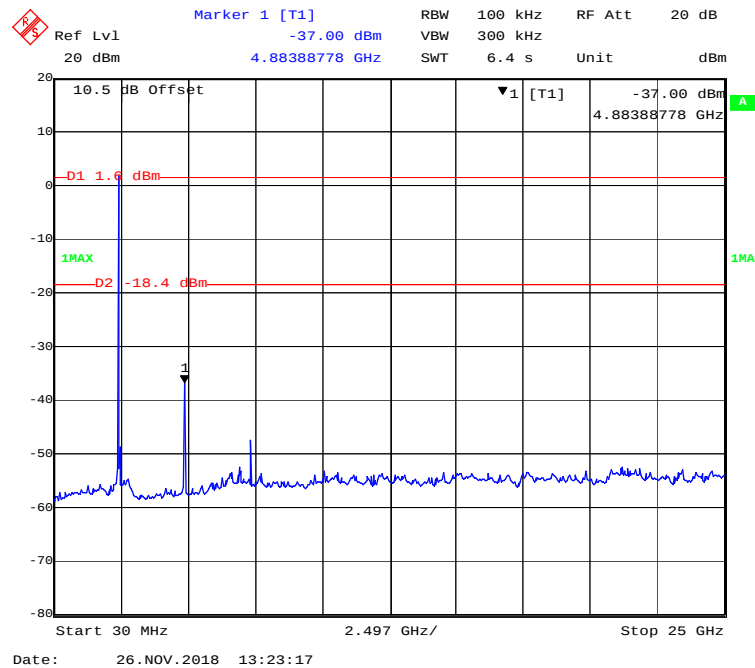

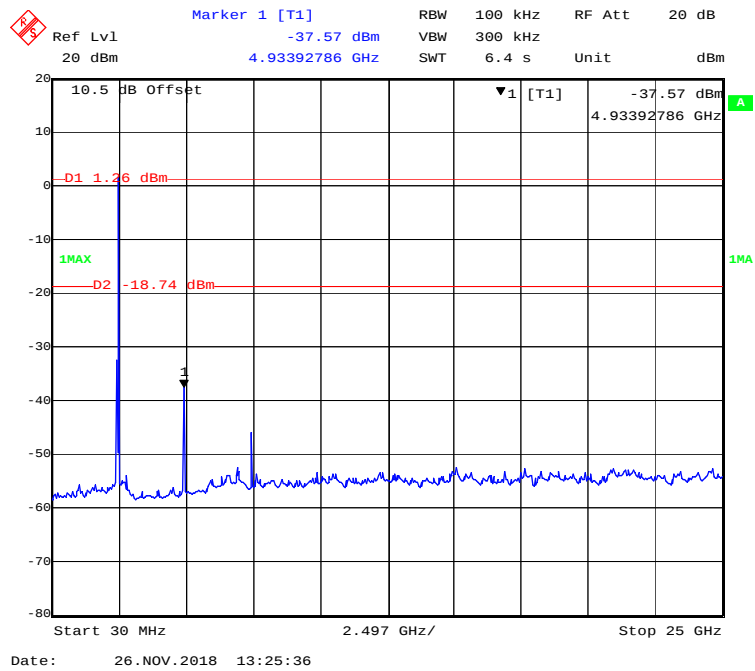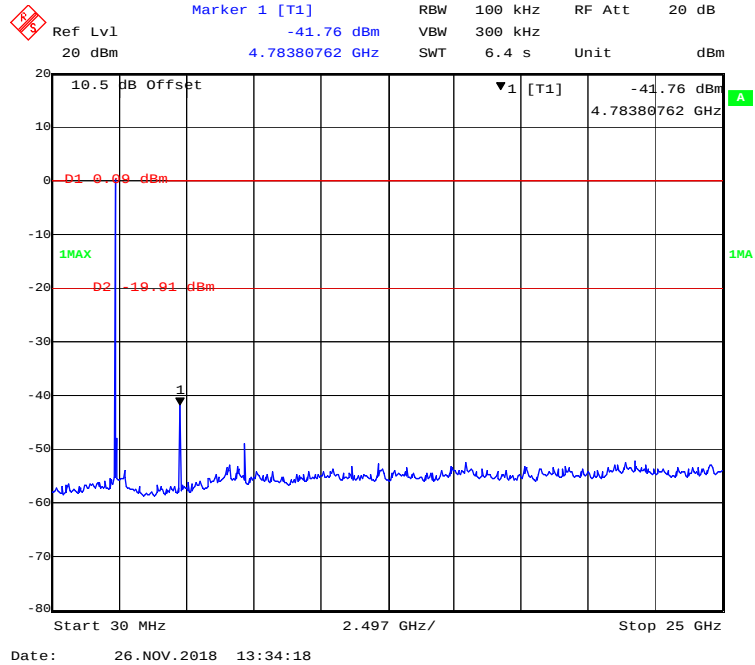
BDR (GFSK): High Channel**EDR ($\pi/4$ -DQPSK): Low Channel**

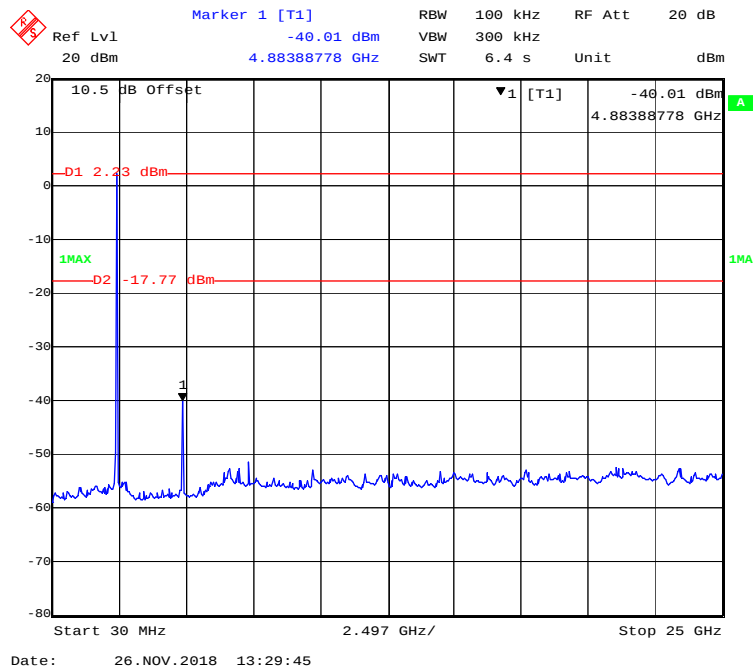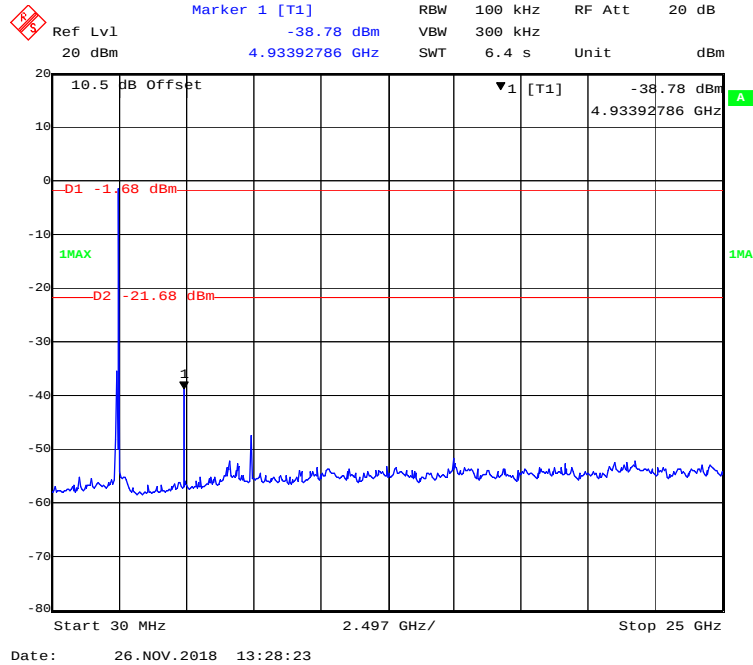EDR ($\pi/4$ -DQPSK): Middle Channel**EDR ($\pi/4$ -DQPSK): High Channel**


EDR (8DPSK): Low Channel

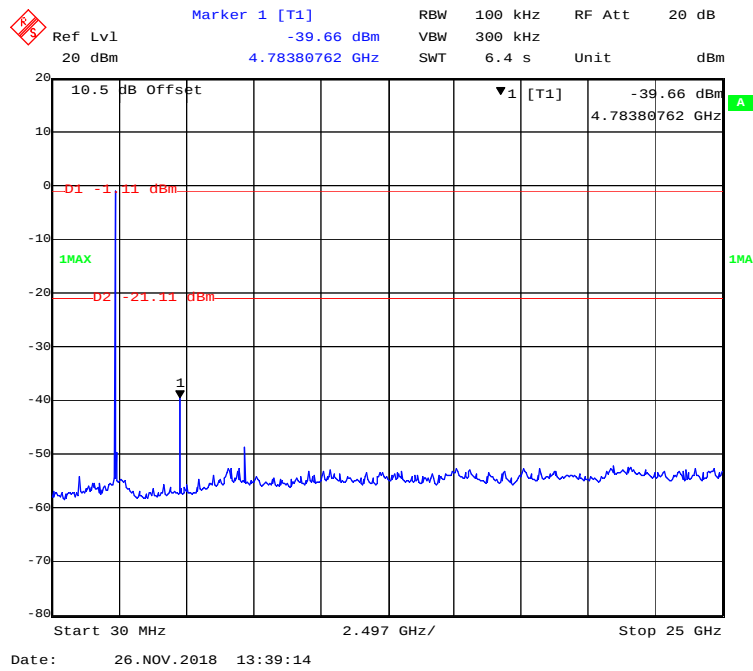

EDR (8DPSK): Middle Channel

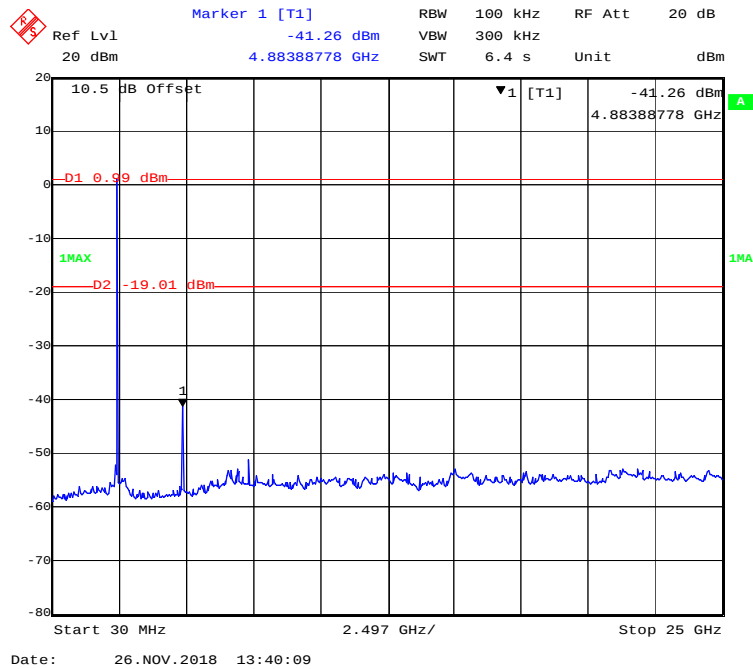

EDR (8DPSK): High Channel

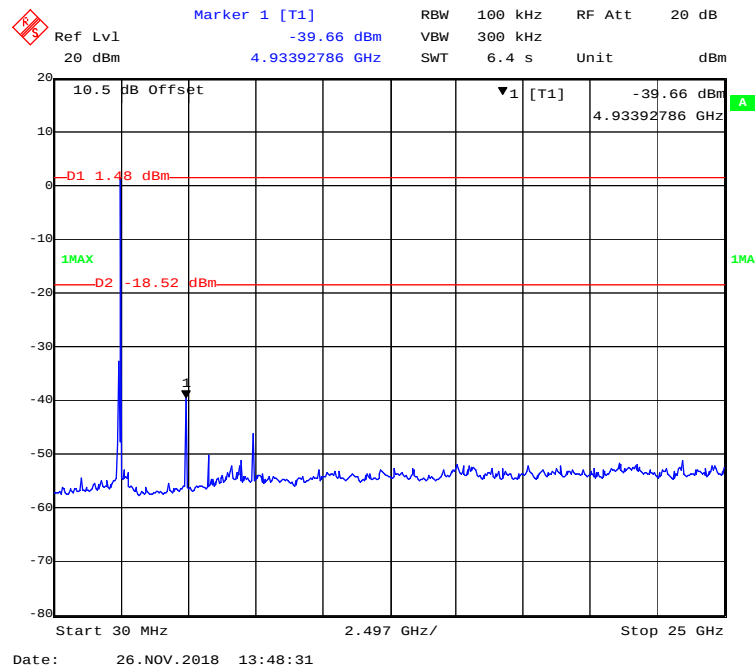

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	23.4 °C
Relative Humidity:	49 %
ATM Pressure:	101.1 kPa

The testing was performed by Winnie Yang on 2018-11-26.


EUT operation mode: Transmitting

Test Result: Compliance.

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.956	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.956	Pass
	Adjacent	2442			
	High	2480	1.004	0.962	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.004	0.866	Pass
	Adjacent	2403			
	Middle	2441	1.016	0.874	Pass
	Adjacent	2442			
	High	2480	0.992	0.878	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.870	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.874	Pass
	Adjacent	2442			
	High	2480	1.016	0.874	Pass
	Adjacent	2479			

Note: For BDR mode, Limit = 20 dB bandwidth; For EDR mode, Limit = 20 dB bandwidth*2/3.

BDR (GFSK): Low Channel

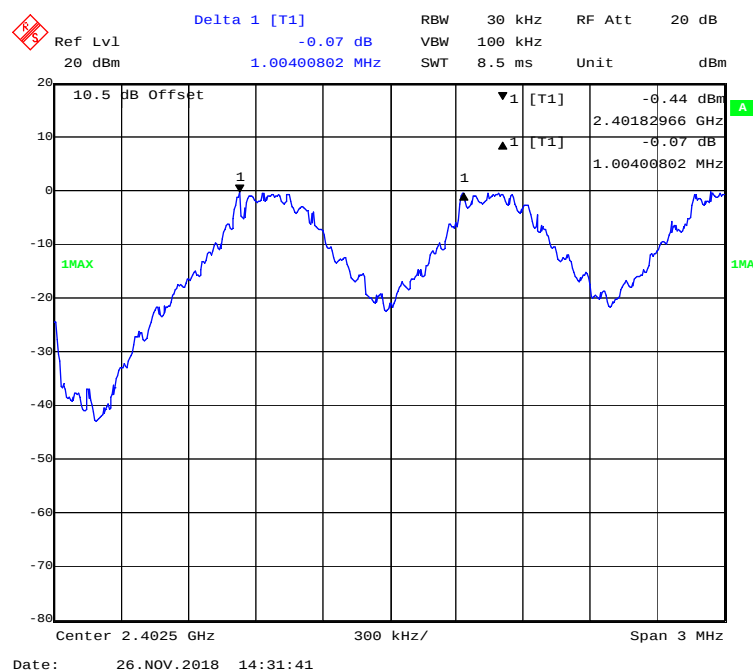

Delta 1 [T1] 0.09 dB RBW 30 kHz RF Att 20 dB
 Ref Lvl 20 dBm 1.00400802 MHz SWT 8.5 ms Unit dBm

10.5 dB Offset
 1MAX
 1
 1 [T1]
 1 [T1]
 -6.67 dBm
 2.44082365 GHz
 0.09 dB
 1.00400802 MHz
 Center 2.4415 GHz 300 kHz/ Span 3 MHz

Ref Lvl 20 dBm RBW 30 kHz RF Att 20 dB Unit dBm

Delta 1 [T1] 0.07 dB

10.5 dB Offset

▼1 [T1] -1.25 dBm

▲1 [T1] 0.07 dB

1.00400802 MHz


1MAX

1MA


Center 2.4795 GHz 300 kHz/ Span 3 MHz

Date: 26.NOV.2018 14:40:40


EDR ($\pi/4$ -DQPSK): Low Channel

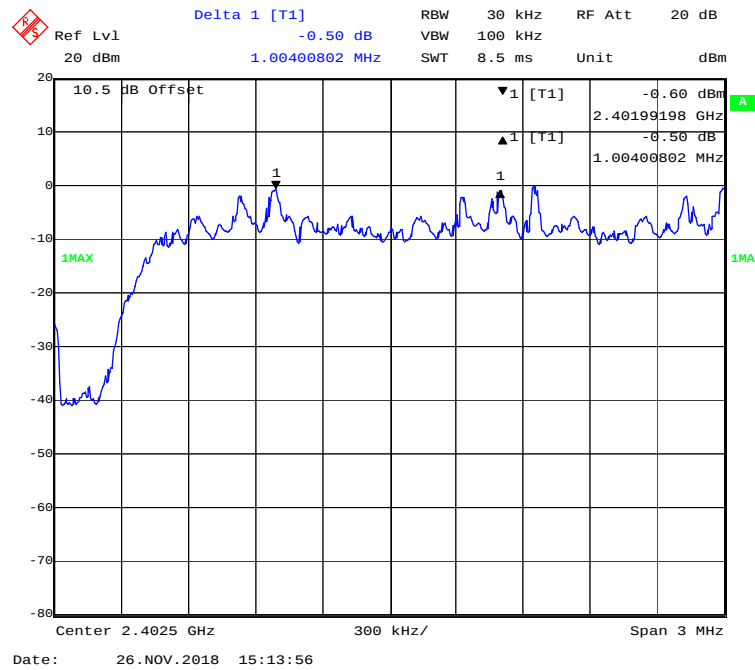


EDR ($\pi/4$ -DQPSK): Middle Channel

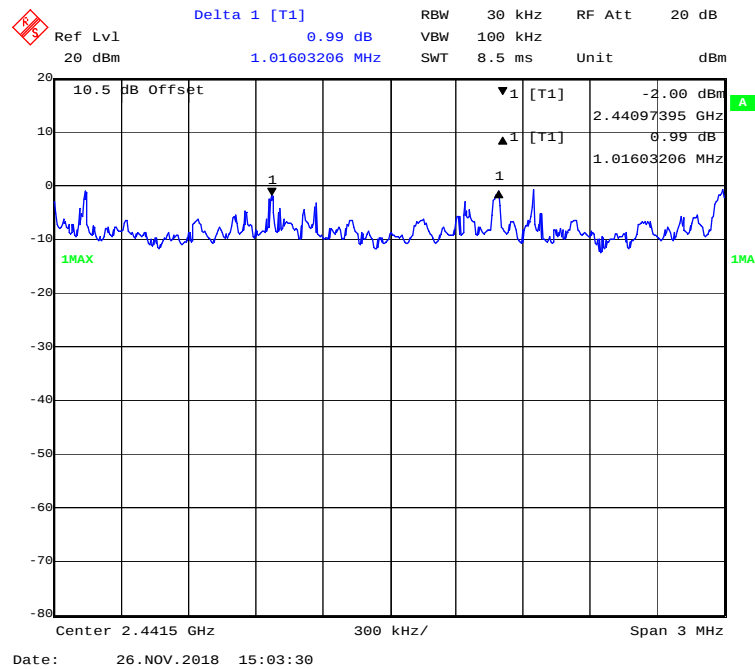


EDR ($\pi/4$ -DQPSK): High Channel

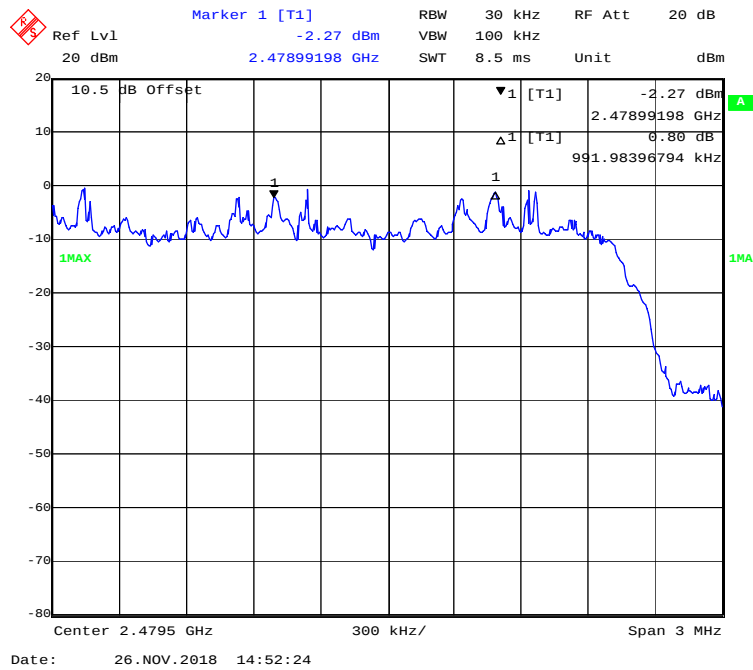


EDR (8DPSK): Low Channel

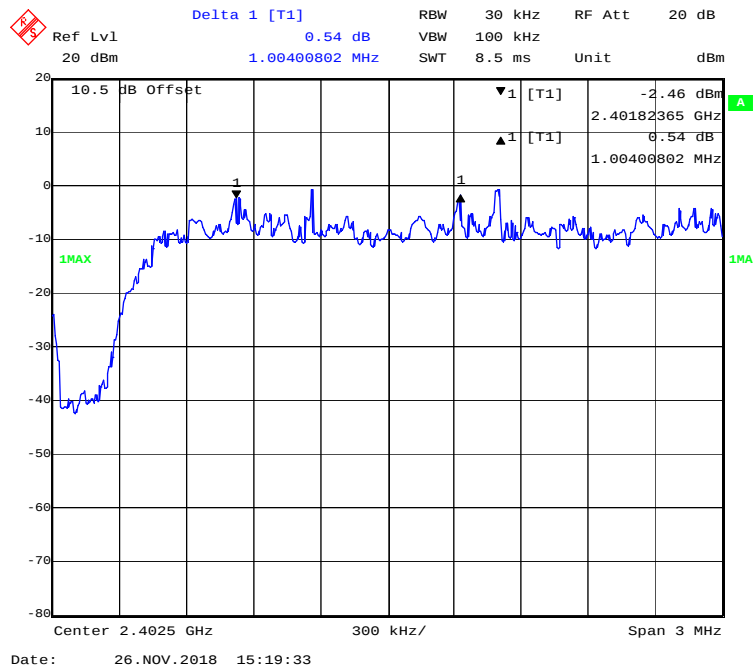

EDR (8DPSK): Middle Channel

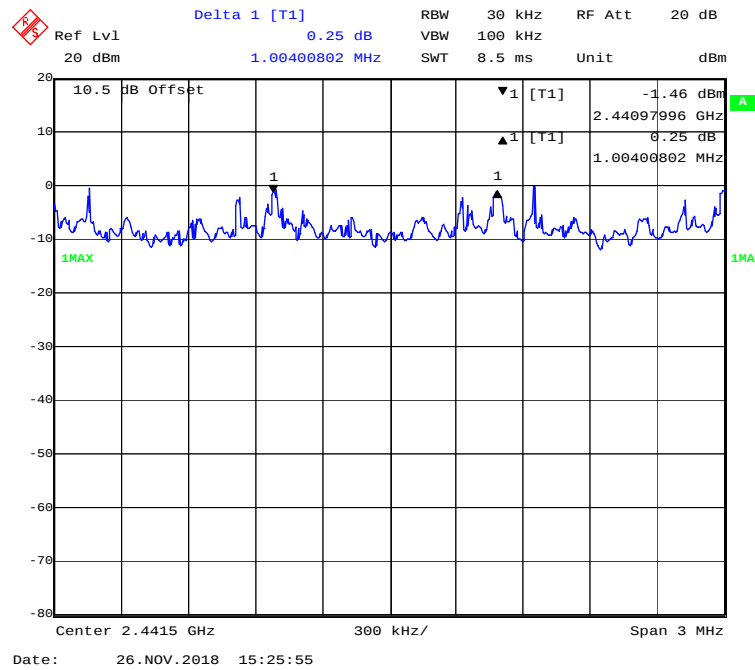

EDR (8DPSK): High Channel

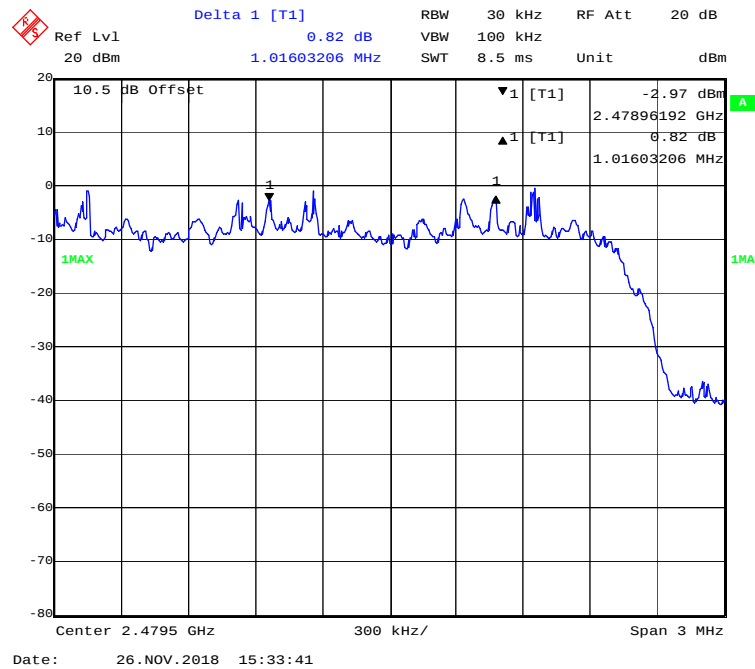

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**


Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Winnie Yang on 2018-11-26.


EUT operation mode: Transmitting

Test Result: Compliance.


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.956
	Middle	2441	0.956
	High	2480	0.962
EDR ($\pi/4$-DQPSK)	Low	2402	1.299
	Middle	2441	1.311
	High	2480	1.317
EDR (8DPSK)	Low	2402	1.305
	Middle	2441	1.311
	High	2480	1.311

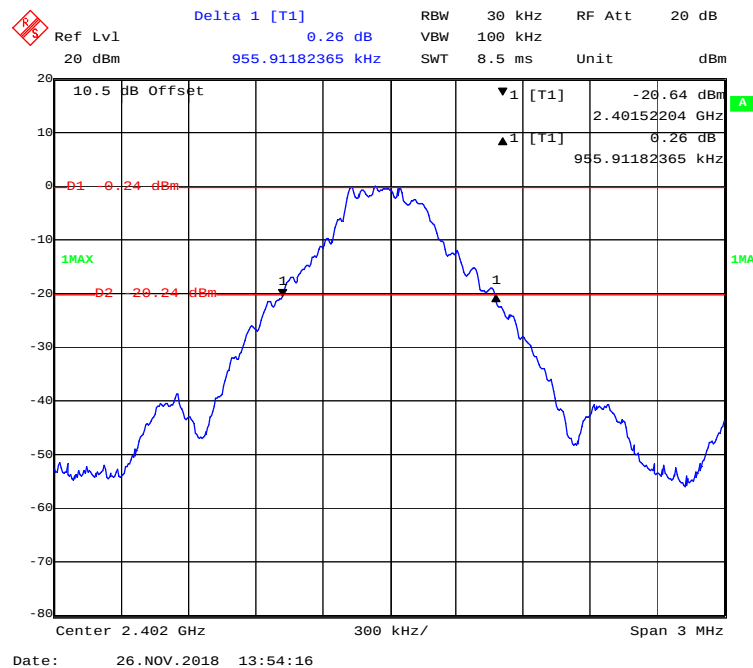BDR (GFSK): Low Channel

BDR (GFSK): Middle Channel

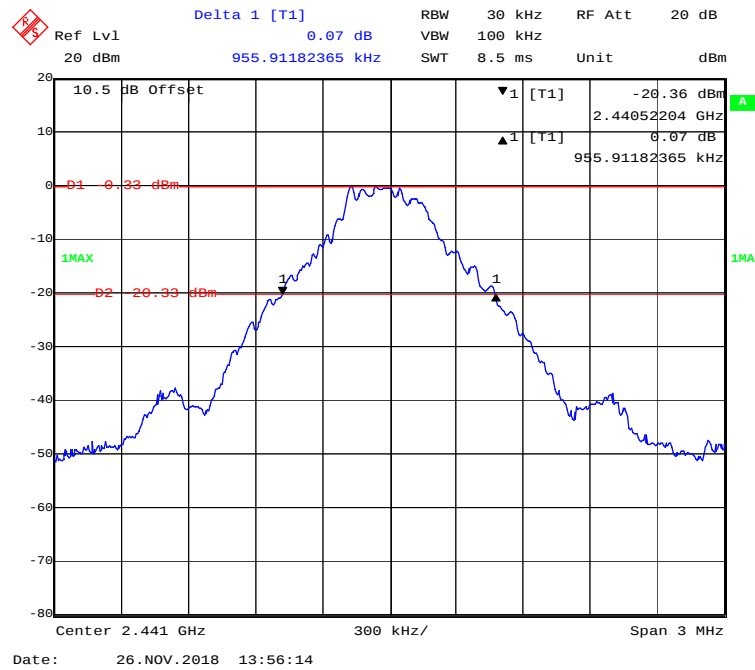

BDR (GFSK): High Channel

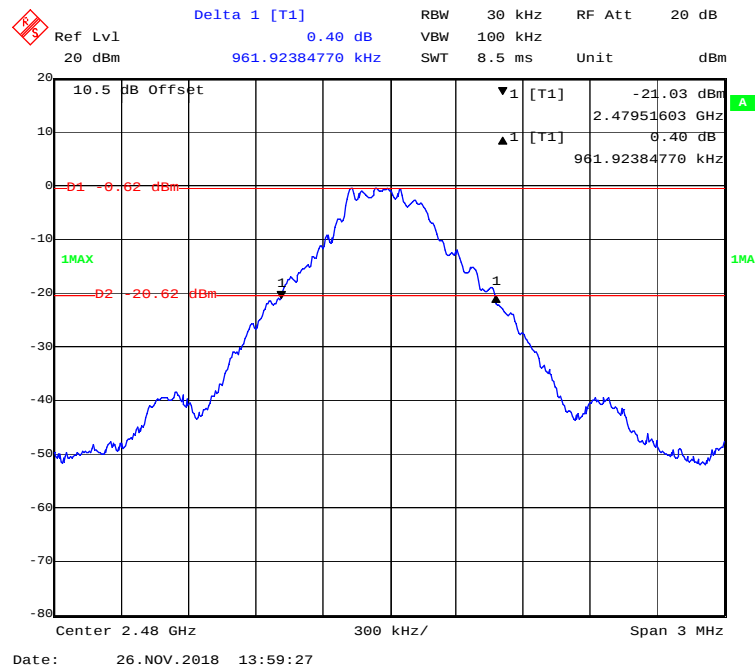

Delta 1 [T1] 0.35 dB
 Ref Lvl 20 dBm
 RBW 30 kHz
 VBW 100 kHz
 SWT 8.5 ms
 RF Att 20 dB
 Unit dBm
 1.29859719 MHz
 -20.20 dBm
 2.40133567 GHz
 0.35 dB
 1.29859719 MHz
 1MAX
 1
 1
 Center 2.402 GHz 300 kHz/ Span 3 MHz
 Date: 26.NOV.2018 14:07:28

Delta 1 [T1] -0.20 dB

Ref Lvl 20 dBm

1.31062124 MHz

RBW 30 kHz

SWT 8.5 ms

RF Att 20 dB

Unit dBm

10.5 dB Offset

▼1 [T1] -20.09 dBm

▲1 [T1] -0.20 dB

1.31062124 MHz

01 -0.20 dBm

1MAX

02 -20.20 dBm

1

1


Center 2.441 GHz

300 kHz/


Span 3 MHz

Date: 26.NOV.2018 14:05:36


EDR ($\pi/4$ -DQPSK): High Channel

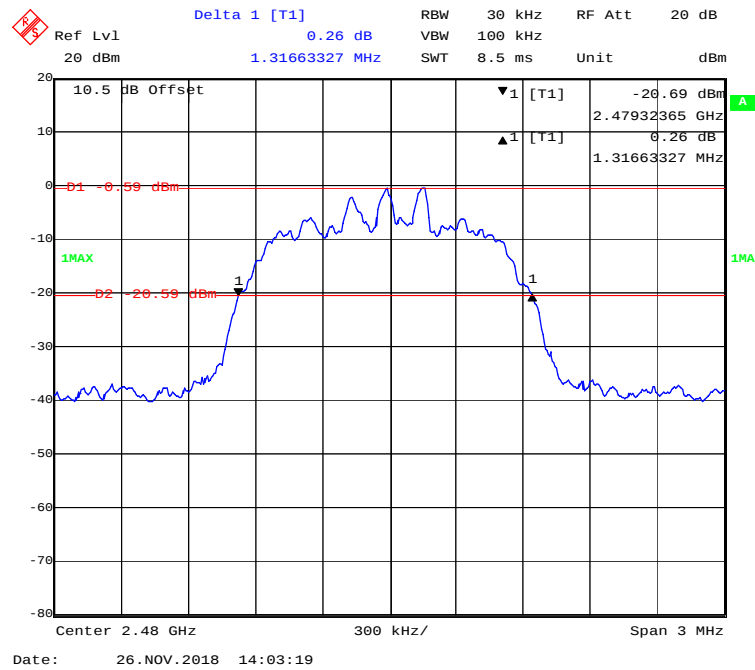


EDR (8DPSK): Low Channel

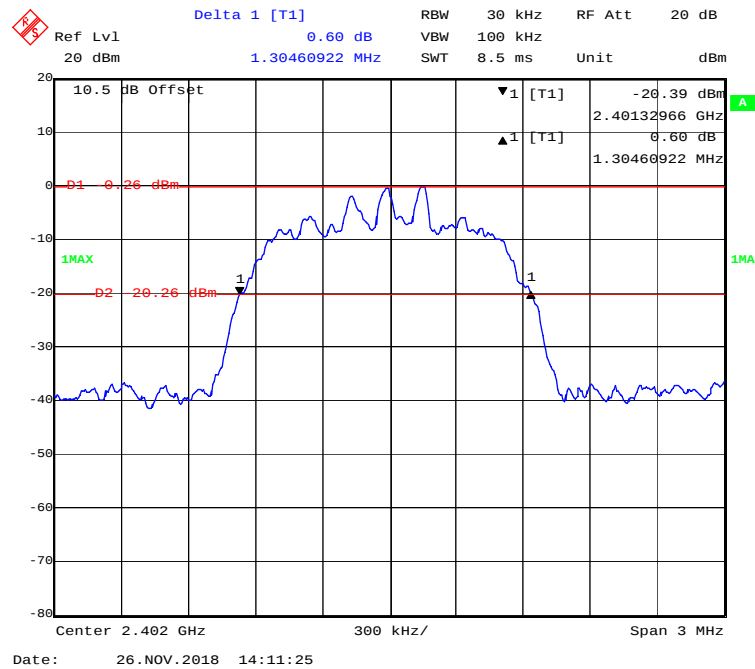

EDR (8DPSK): Middle Channel

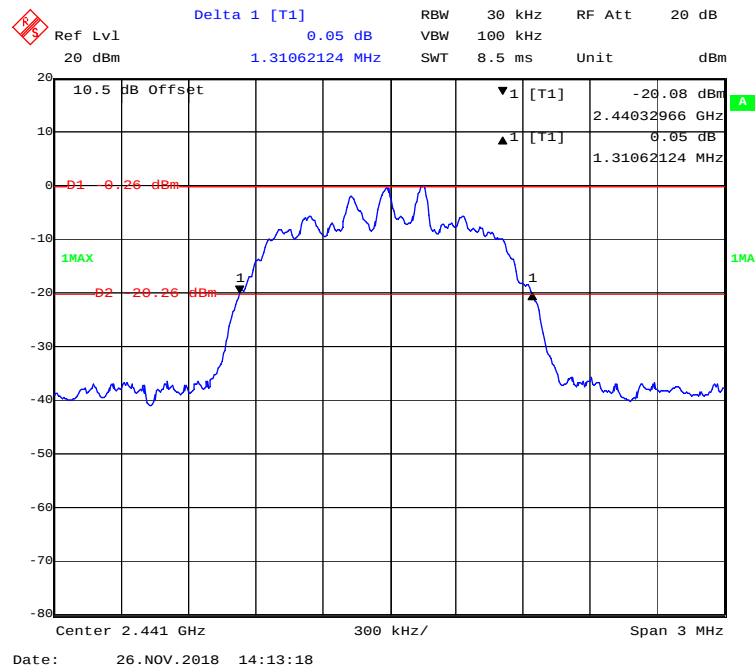

EDR (8DPSK): High Channel

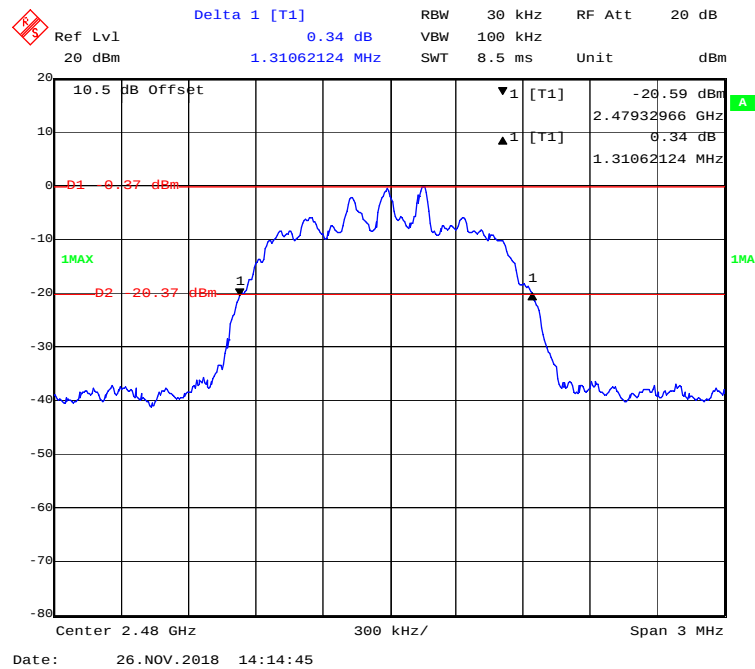

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Winnie Yang on 2018-11-26.

EUT operation mode: Transmitting


Test Result: Compliance.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥ 15
EDR (8DPSK)	2400-2483.5	79	≥ 15


BDR (GFSK): Number of Hopping Channels

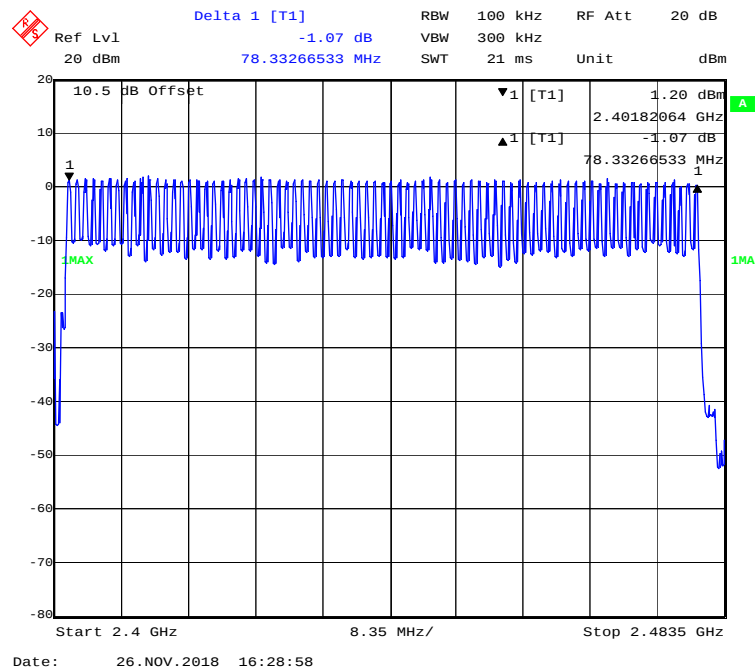

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

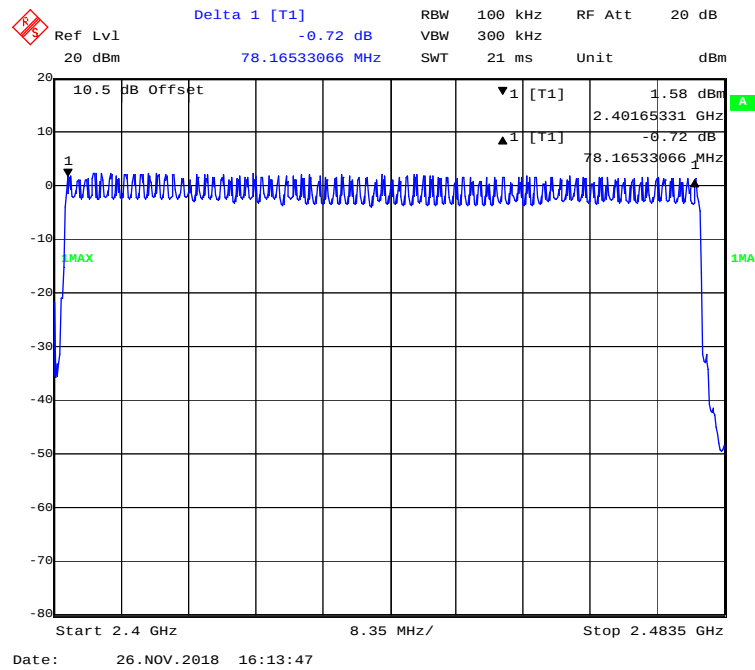

EDR (8DPSK): Number of Hopping Channels

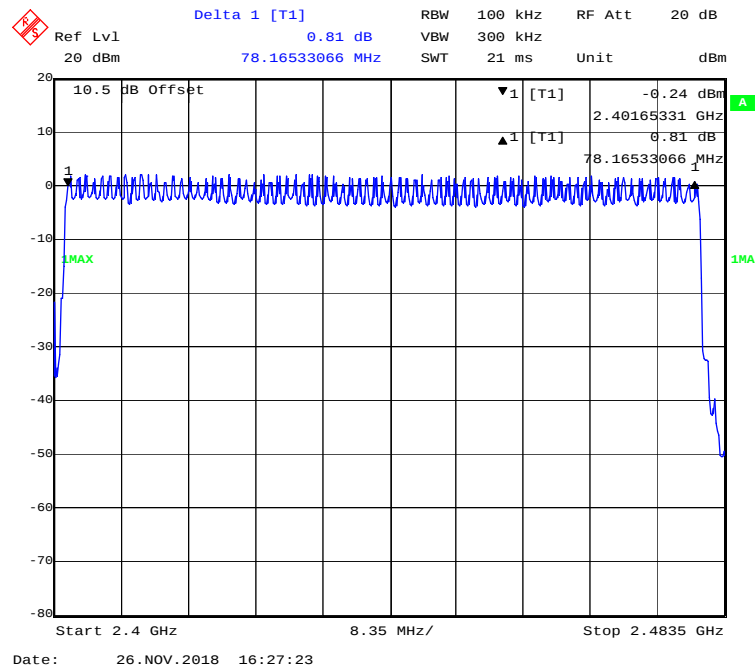

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1 Span: Zero span, centered on a hopping channel.

2 RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.

3 Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.

4 Detector function: Peak.

5 Trace: Max hold.

Test Data**Environmental Conditions**


Temperature:	23.4 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Winnie Yang on 2018-11-26.


EUT operation mode: Transmitting

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.385	0.123	0.4	Pass
		Middle	0.385	0.123	0.4	Pass
		High	0.385	0.123	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.653	0.264	0.4	Pass
		Middle	1.665	0.266	0.4	Pass
		High	1.653	0.264	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	2.920	0.311	0.4	Pass
		Middle	2.920	0.311	0.4	Pass
		High	2.912	0.311	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.395	0.126	0.4	Pass
		Middle	0.395	0.126	0.4	Pass
		High	0.395	0.126	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.655	0.265	0.4	Pass
		Middle	1.660	0.266	0.4	Pass
		High	1.660	0.266	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	2.922	0.312	0.4	Pass
		Middle	2.922	0.312	0.4	Pass
		High	2.906	0.310	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.395	0.126	0.4	Pass
		Middle	0.397	0.127	0.4	Pass
		High	0.399	0.128	0.4	Pass
		Note: 3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.662	0.266	0.4	Pass
		Middle	1.662	0.266	0.4	Pass
		High	1.662	0.266	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	2.908	0.310	0.4	Pass
		Middle	2.906	0.310	0.4	Pass
		High	2.906	0.310	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

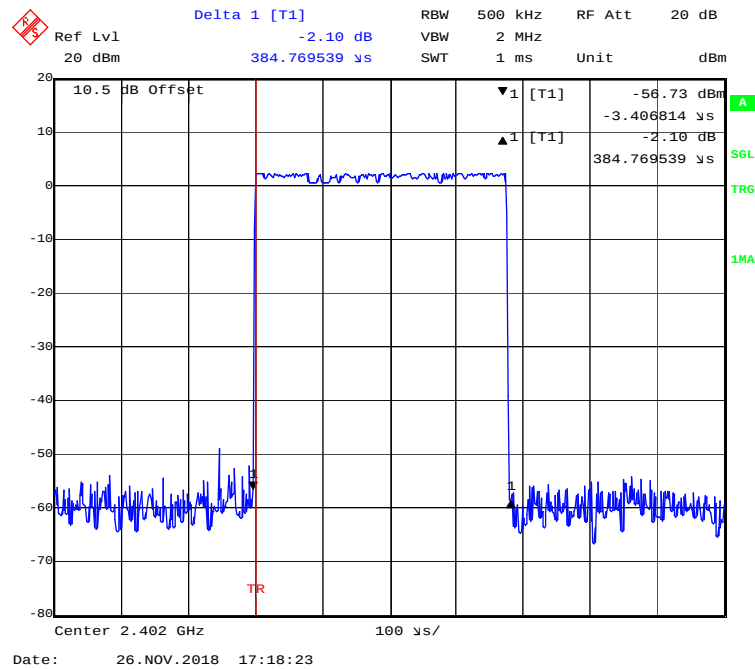


BDR (GFSK): Pulse time, Middle Channel, DH1

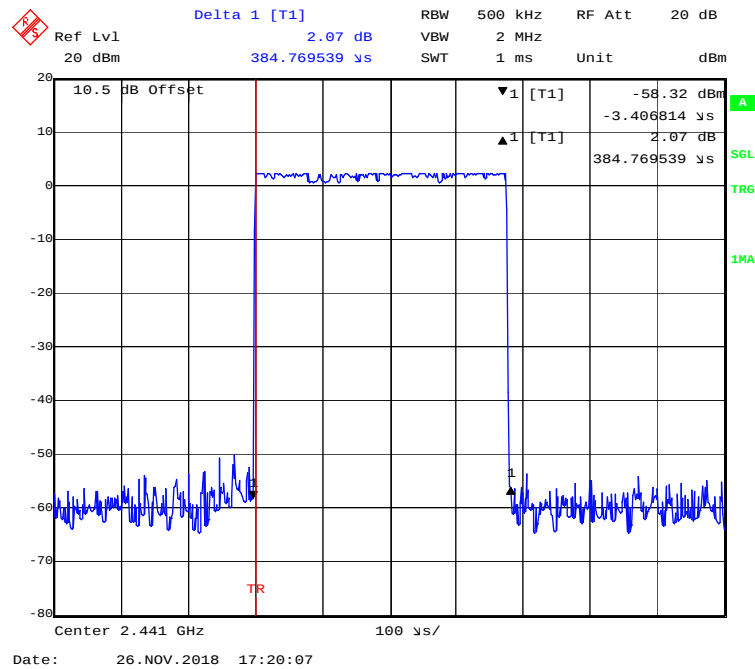


BDR (GFSK): Pulse time, High Channel, DH1

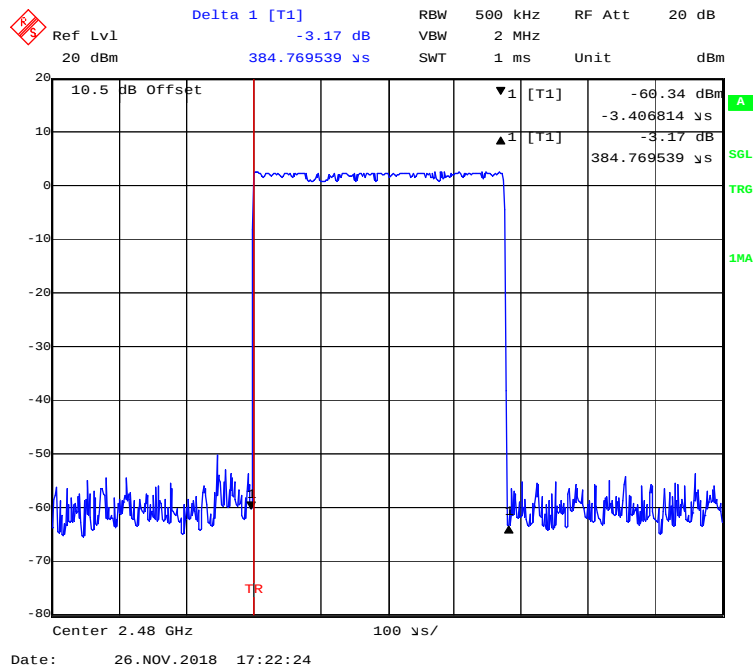


BDR (GFSK): Pulse time, Low Channel, DH3

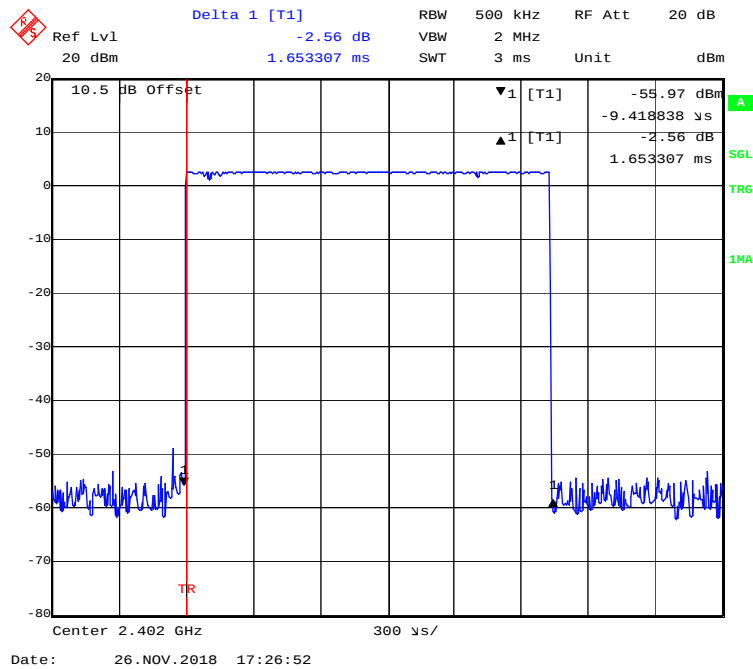


BDR (GFSK): Pulse time, Middle Channel, DH3

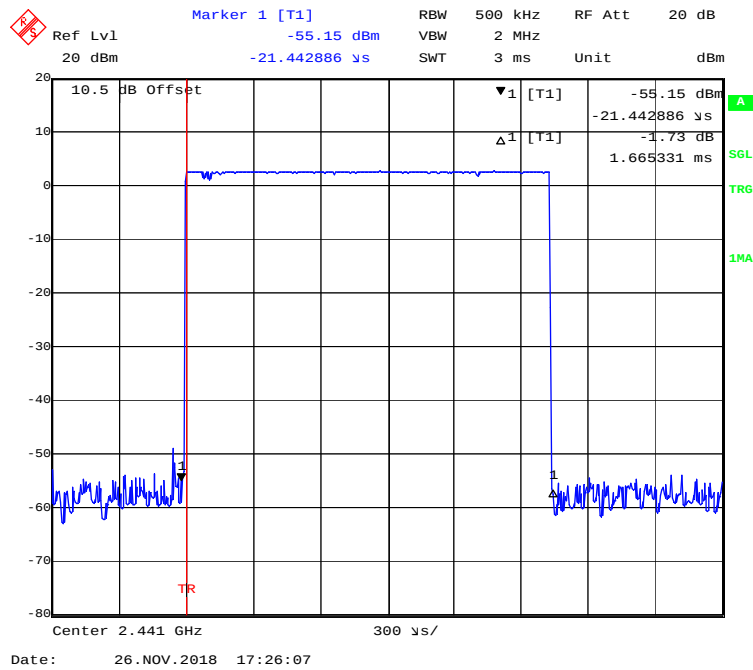


BDR (GFSK): Pulse time, High Channel, DH3

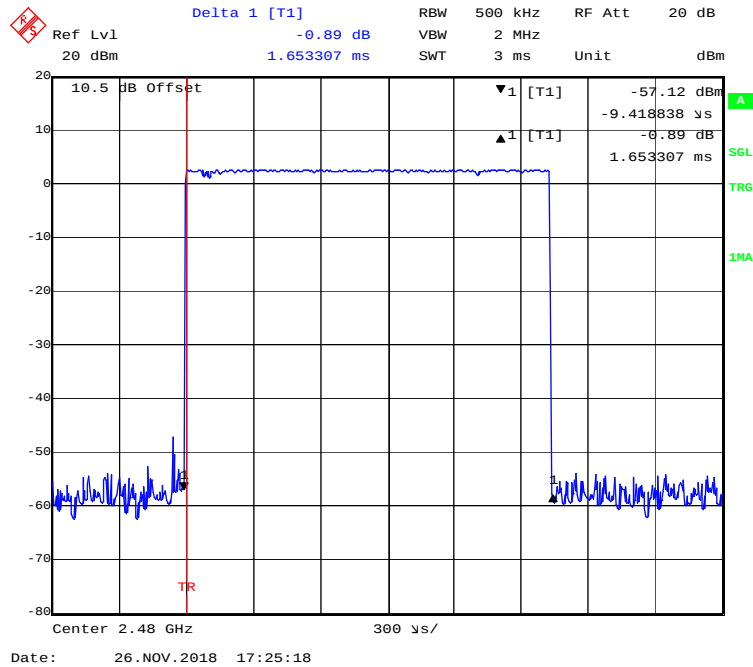

BDR (GFSK): Pulse time, Low Channel, DH5

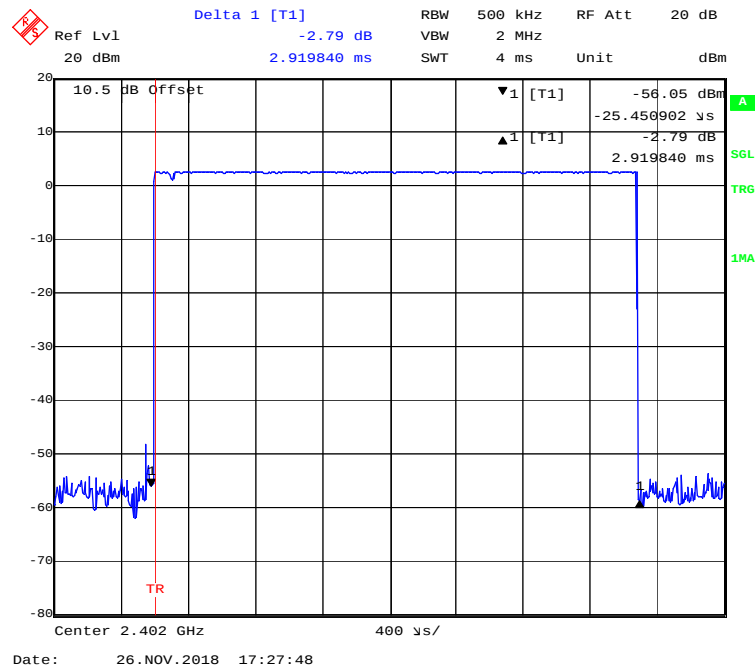

BDR (GFSK): Pulse time, Middle Channel, DH5

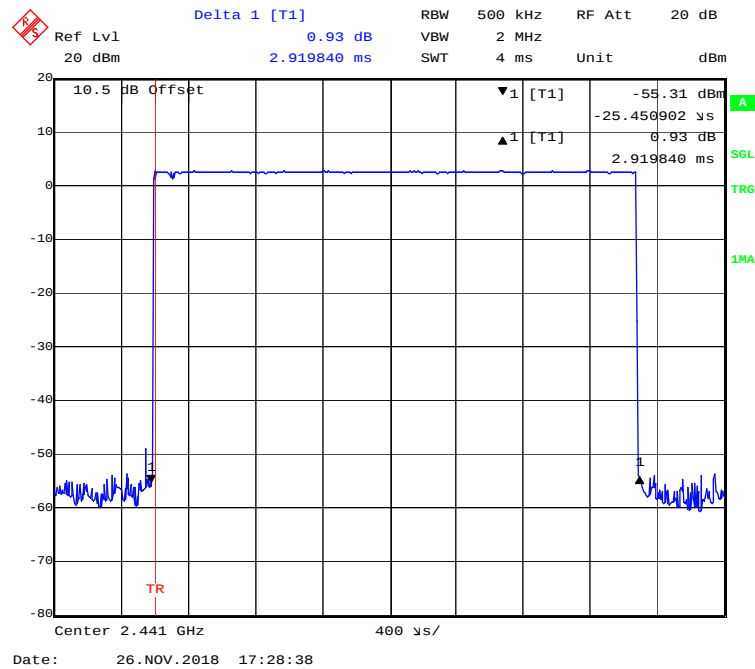

[illegible]

Delta 1 [T1]

Ref Lvl -2.18 dB

20 dBm 395.390782 μ s

RBW 500 kHz

VBW 2 MHz

SWT 1 ms

RF Att 20 dB

Unit dBm

10.5 dB Offset

▼1 [T1] -56.29 dBm

▲1 [T1] -2.18 dB

-3.406814 μ s

395.390782 μ s

TR

Center 2.402 GHz

100 μ s/

Date: 26. NOV. 2018 17:31:46

Delta 1 [T1]
 -2.53 dB
 RBW 500 kHz RF Att 20 dB
 Ref Lvl 20 dBm 395.390782 us Unit dBm

10.5 dB Offset

▼1 [T1] -59.31 dBm
 ▲1 [T1] -3.406814 us
 -2.53 dB
 395.390782 us

TR


Center 2.441 GHz 100 us/

Date: 26.NOV.2018 17:34:12


Delta 1 [T1] 1.26 dB
 RBW 500 kHz RF Att 20 dB
 Ref Lvl 20 dBm 395.390782 μ s
 VBW 2 MHz
 SWT 1 ms Unit dBm

10.5 dB Offset
 -58.63 dBm
 -3.406814 μ s
 1.26 dB
 395.390782 μ s
 TR
 Center 2.4 GHz 100 μ s/
 Date: 26. NOV. 2018 17:33:23


EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3

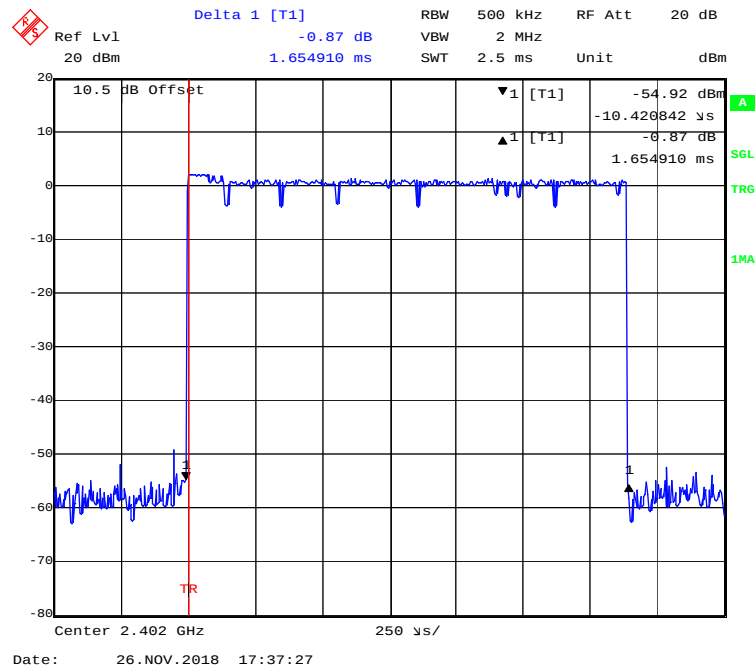


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3


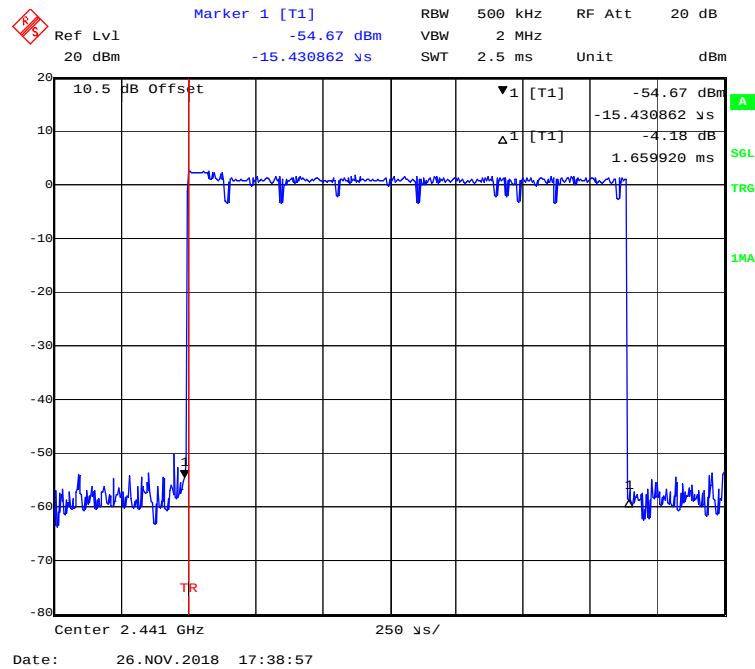


EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3

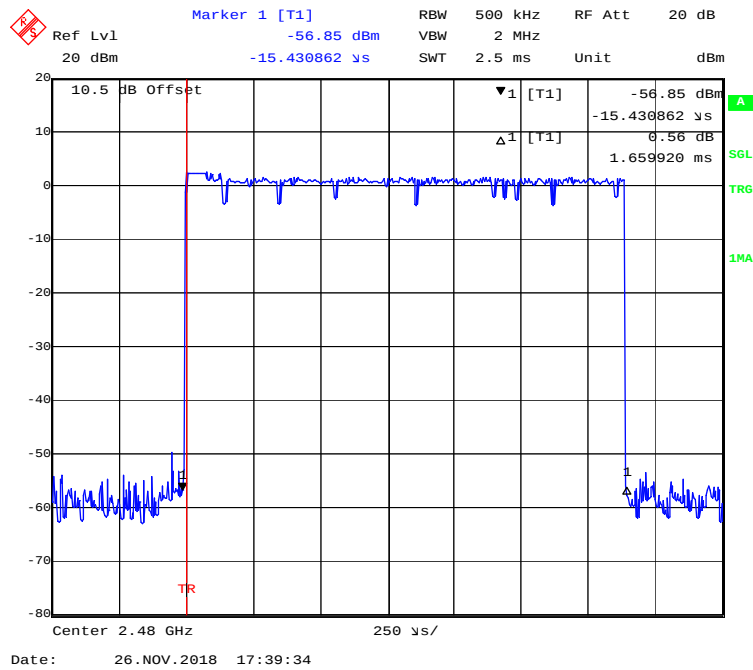


EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5

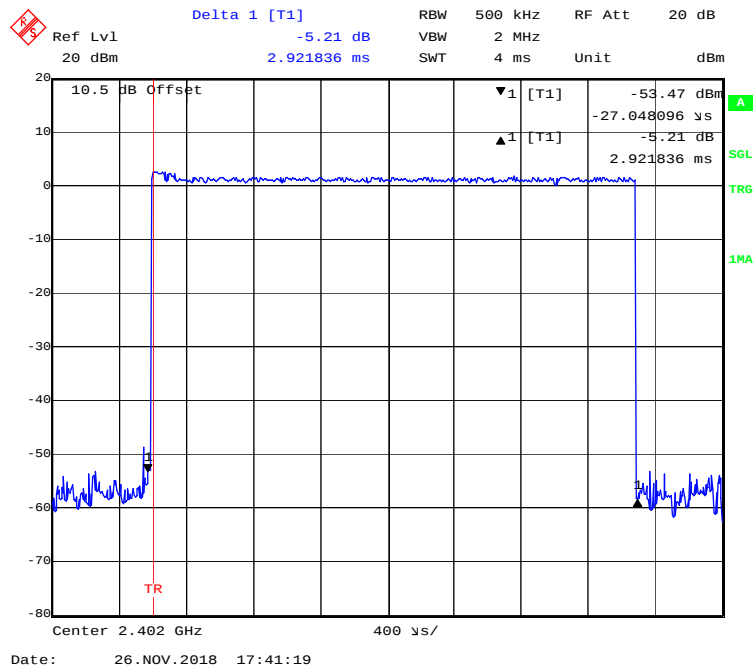


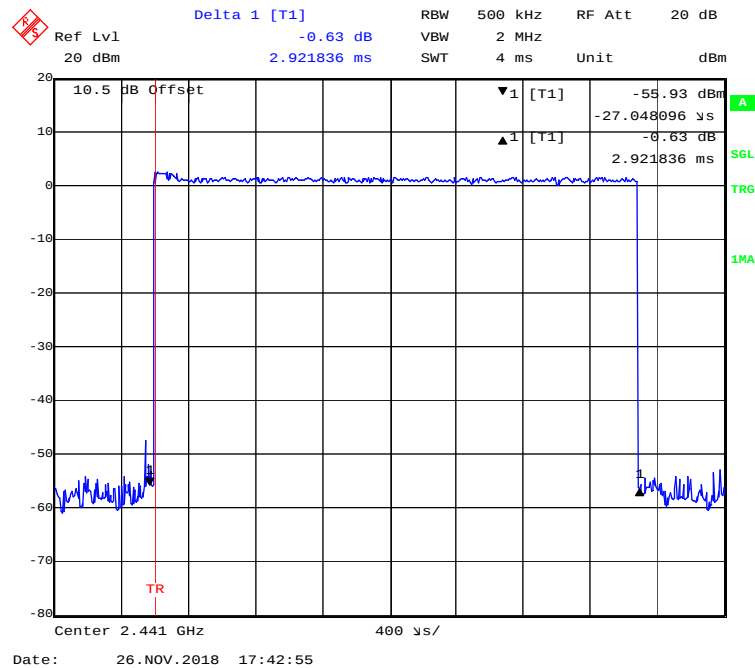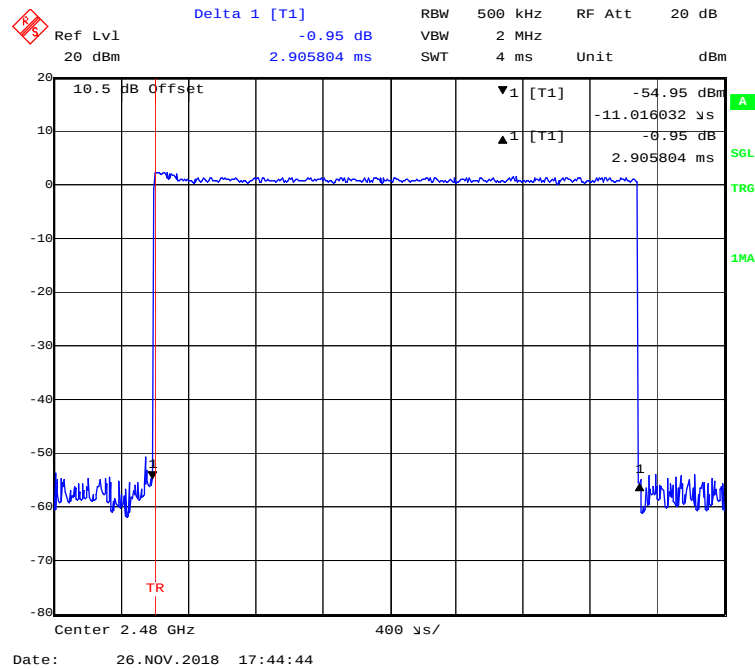EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5**EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5**


EDR (8DPSK): Pulse time, Low Channel, 3DH1

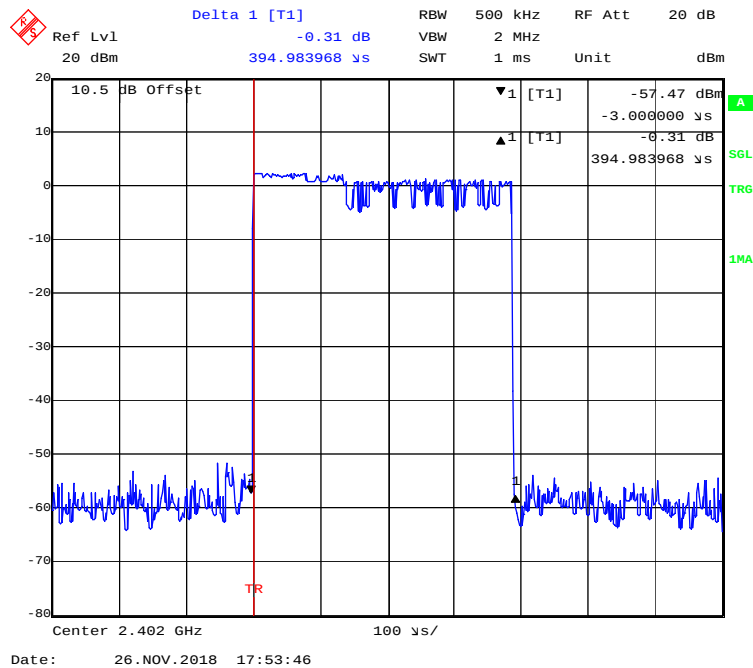


EDR (8DPSK): Pulse time, Middle Channel, 3DH1


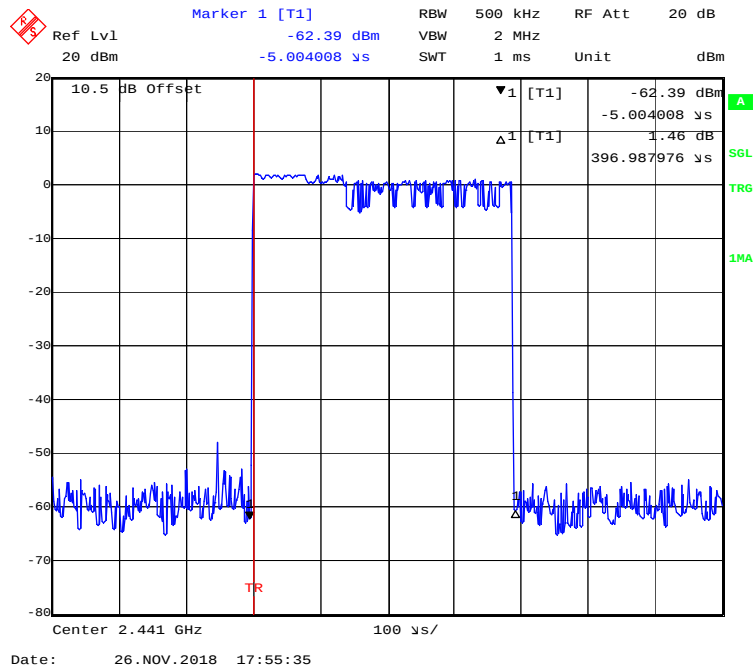




EDR (8DPSK): Pulse time, High Channel, 3DH1

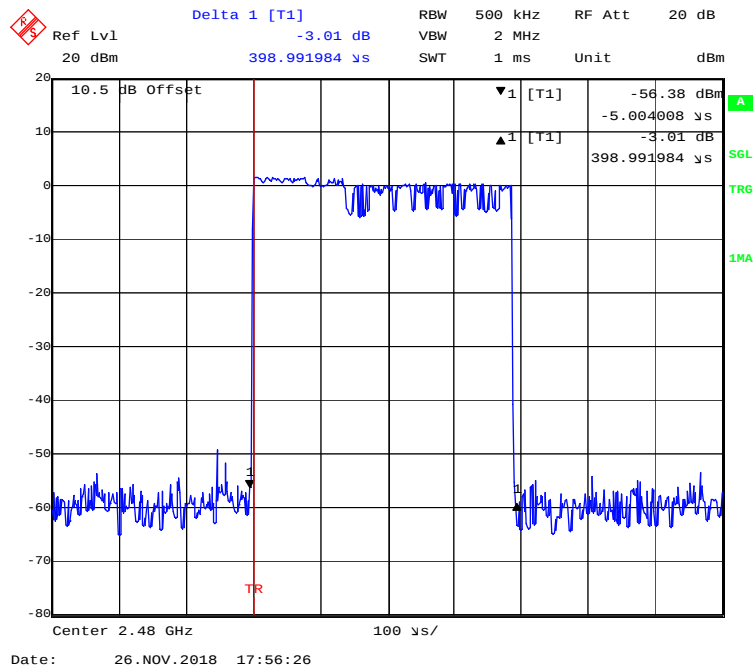


EDR (8DPSK): Pulse time, Low Channel, 3DH3

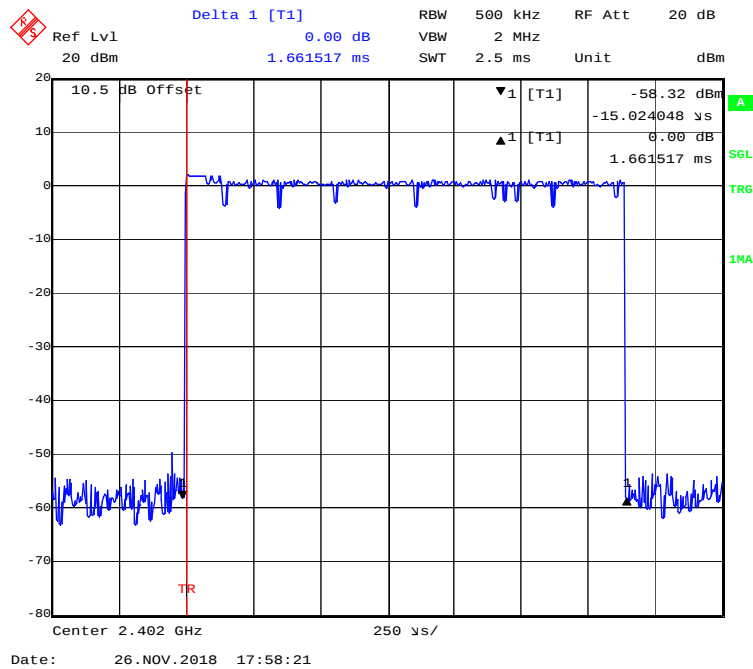

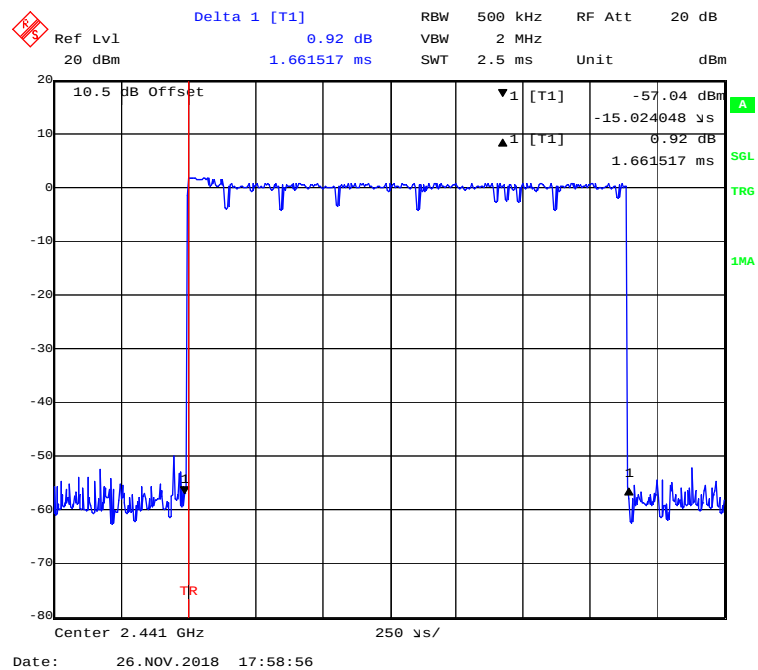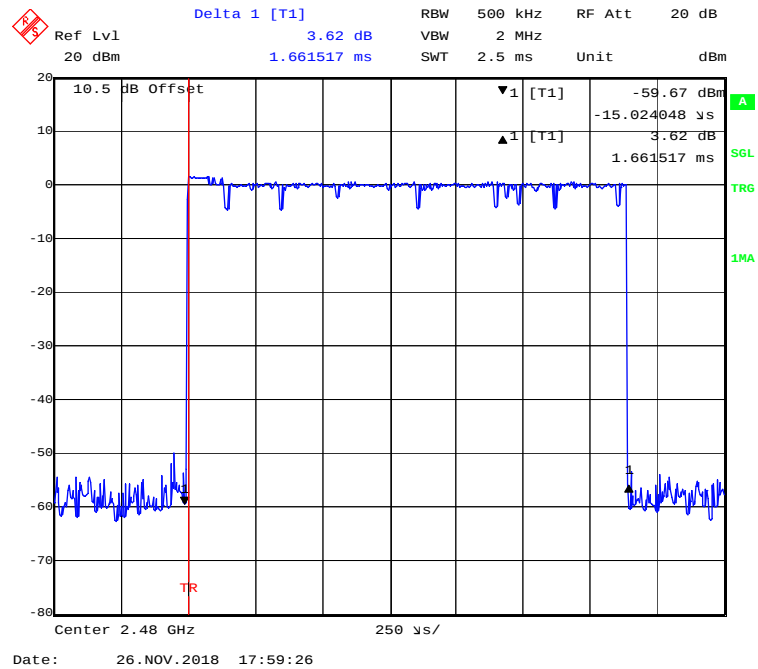EDR (8DPSK): Pulse time, Middle Channel, 3DH3**EDR (8DPSK): Pulse time, High Channel, 3DH3**

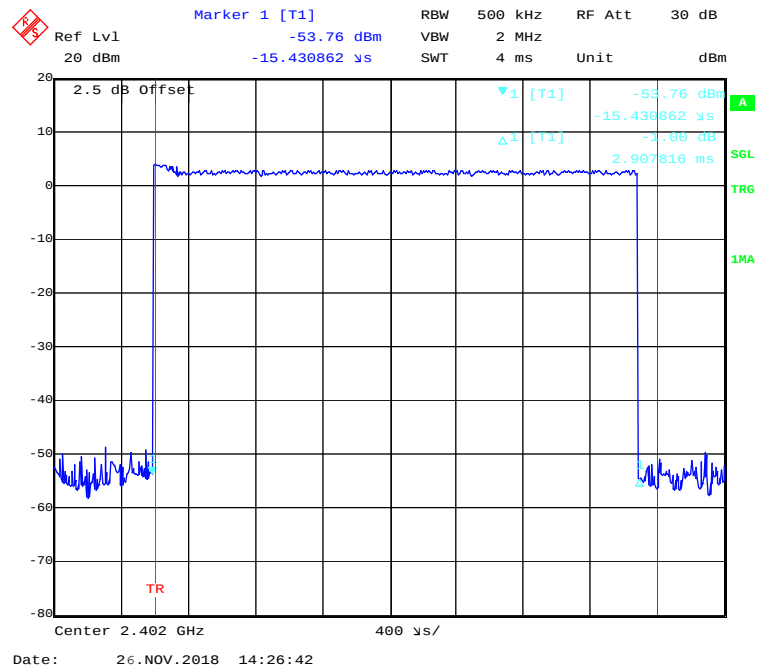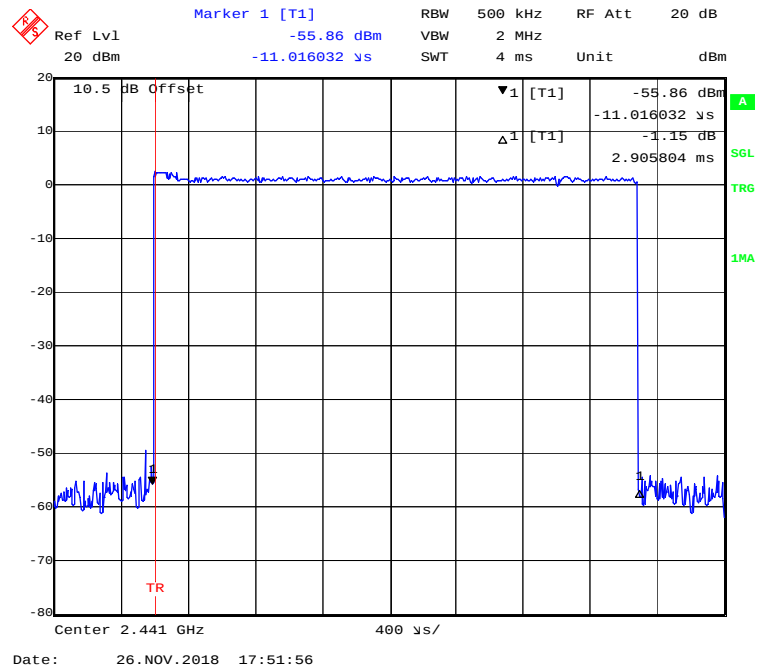EDR (8DPSK): Pulse time, Low Channel, 3DH5**EDR (8DPSK): Pulse time, Middle Channel, 3DH5**

EDR (8DPSK): Pulse time, High Channel, 3DH5

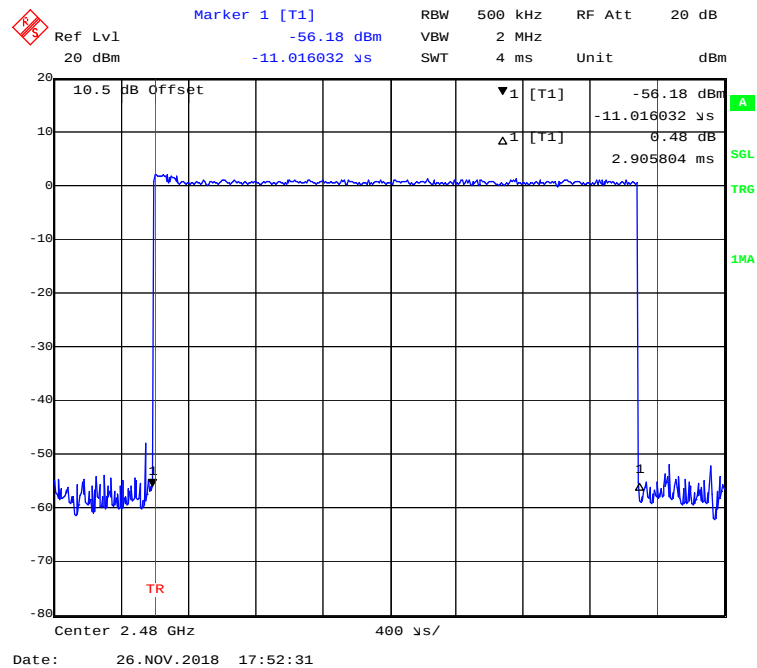

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data**Environmental Conditions**


Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by Winnie Yang on 2018-11-26.


EUT operation mode: Transmitting

Test Result: Compliance.


Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	2.74	1.88	125
	2441	2.20	1.66	125
	2480	1.64	1.46	125
EDR ($\pi/4$-DQPSK)	2402	3.49	2.23	125
	2441	3.12	2.05	125
	2480	2.50	1.78	125
EDR (8DPSK)	2402	3.62	2.30	125
	2441	3.12	2.05	125
	2480	2.14	1.64	125

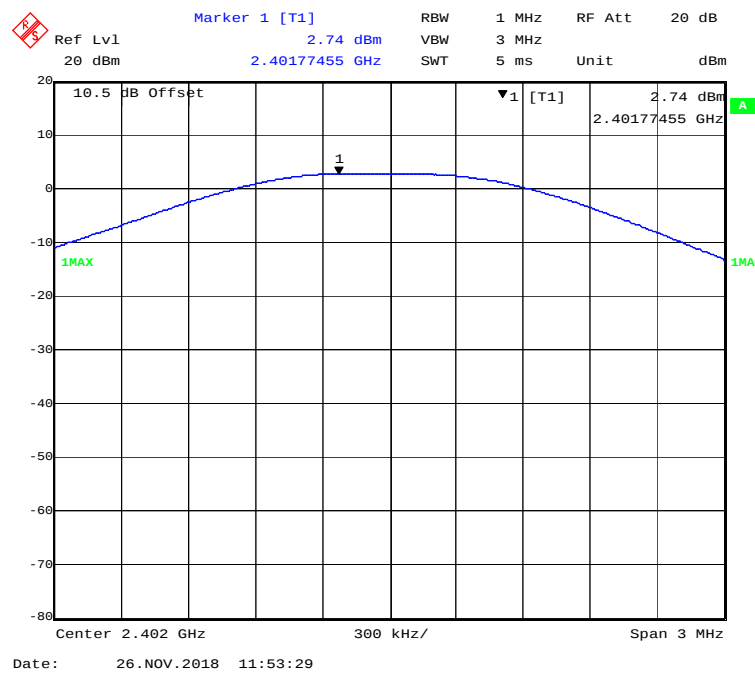BDR (GFSK): 2402MHz


BDR (GFSK): 2441MHz

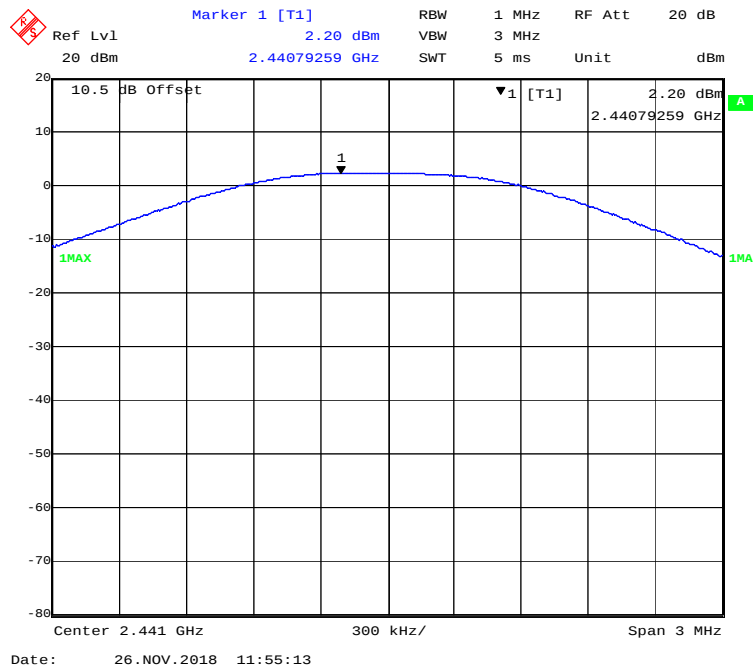


BDR (GFSK): 2480MHz

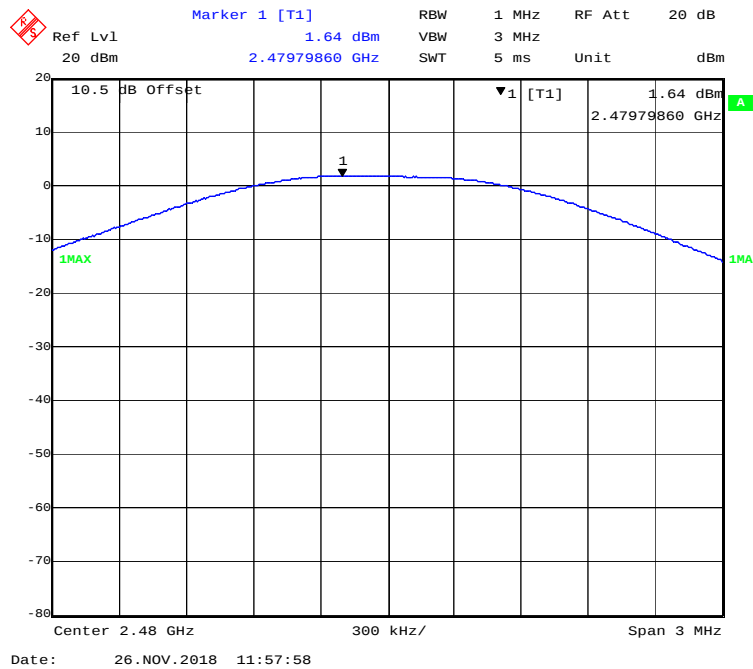


EDR($\pi/4$ -DQPSK): 2402MHz

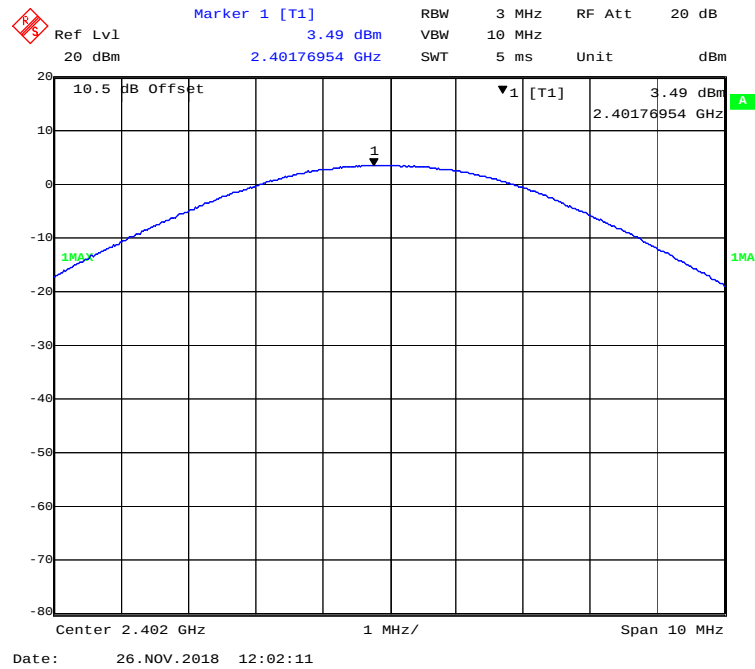


EDR($\pi/4$ -DQPSK): 2441MHz

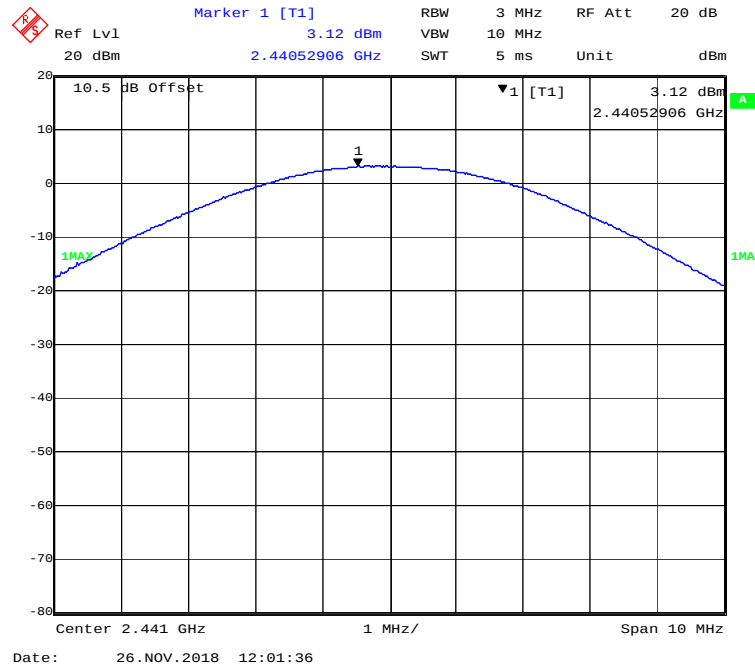


EDR($\pi/4$ -DQPSK): 2480MHz

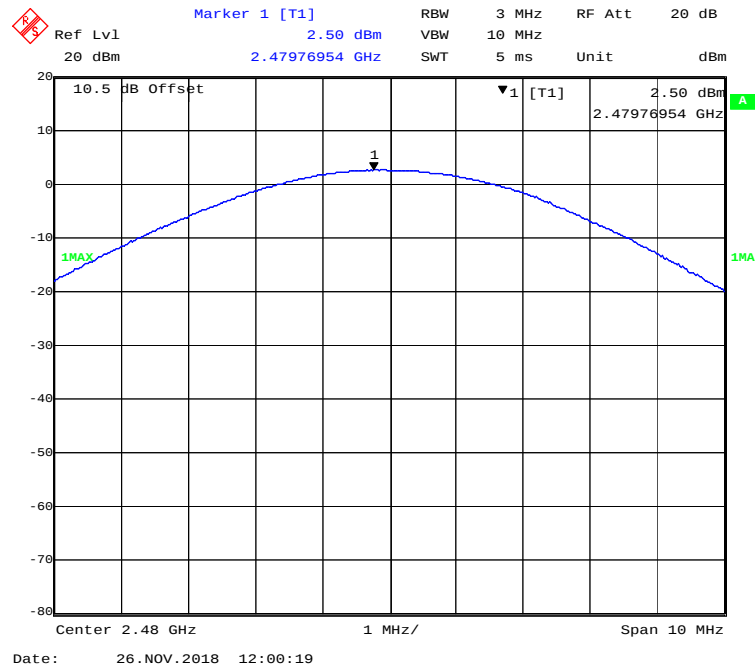


EDR(8DPSK): 2402MHz

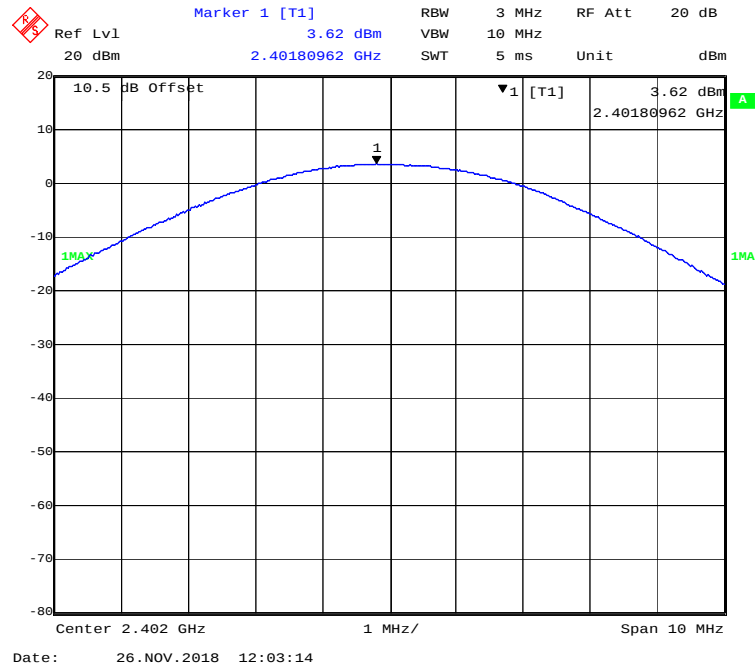

EDR(8DPSK): 2441MHz

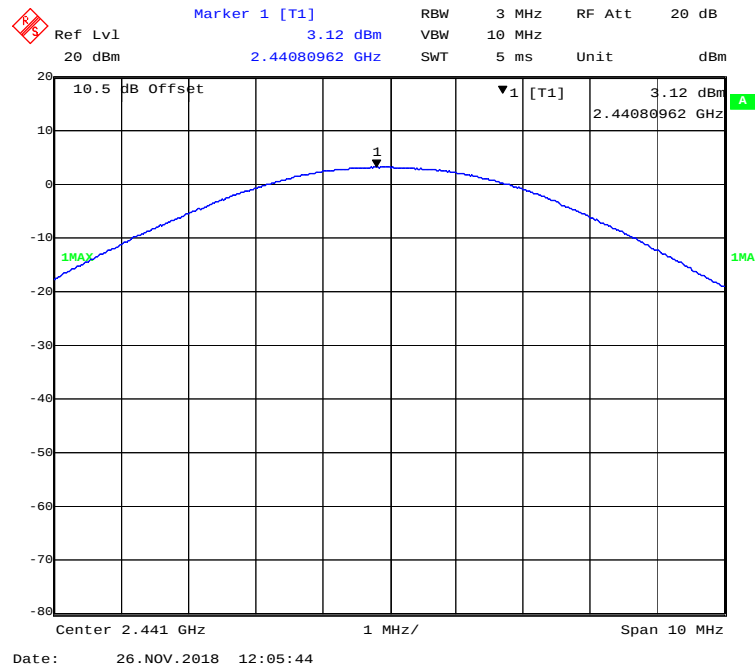

EDR(8DPSK): 2480MHz

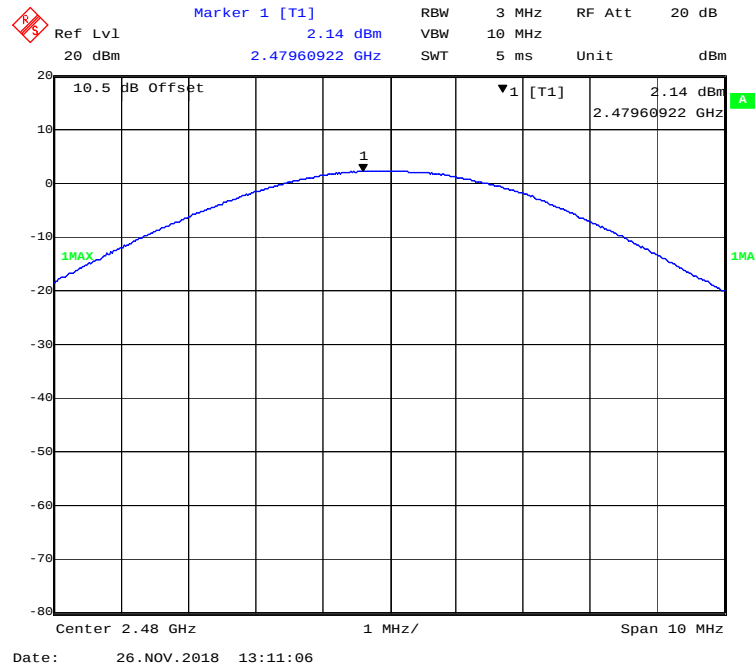

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by Winnie Yang on 2018-11-26.

EUT operation mode: Transmitting


Test Result: Compliance.

Band Edge


BDR (GFSK): Left Side

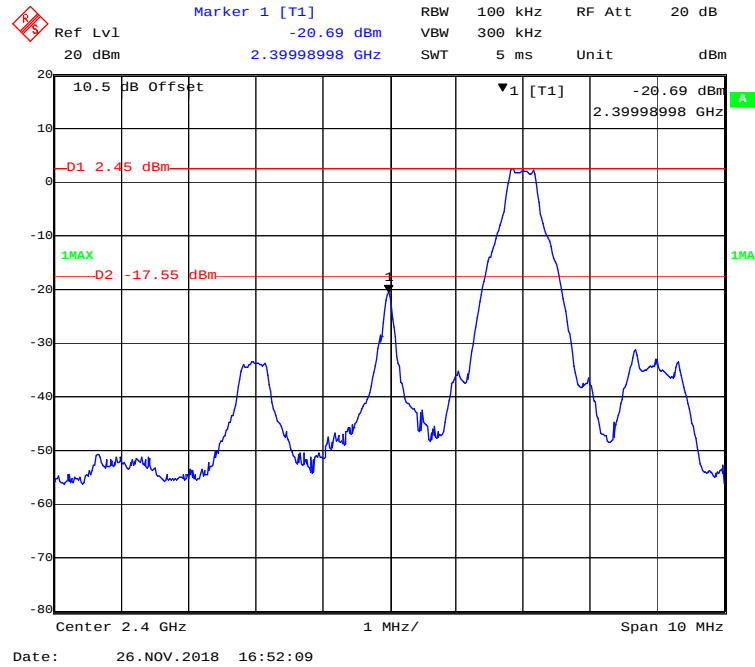


BDR (GFSK): Right Side

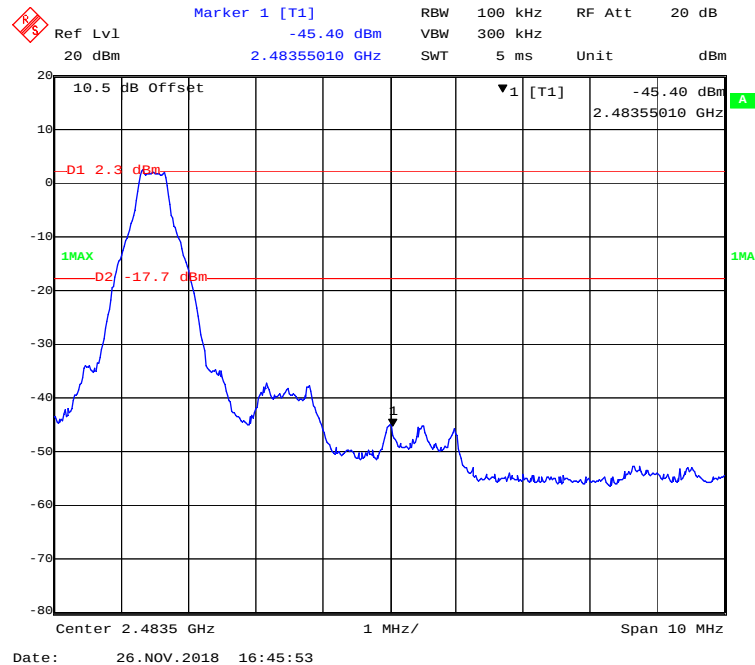


EDR ($\pi/4$ -DQPSK): Left Side

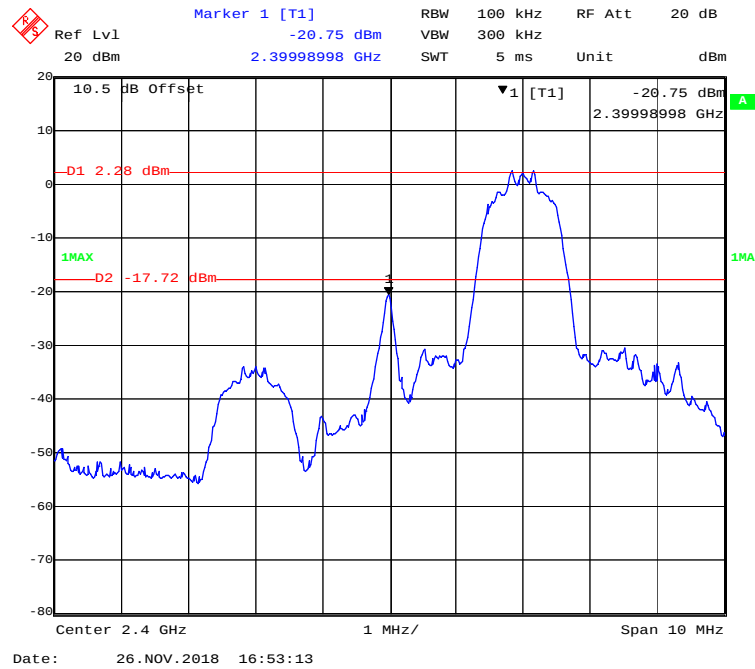


EDR ($\pi/4$ -DQPSK): Right Side

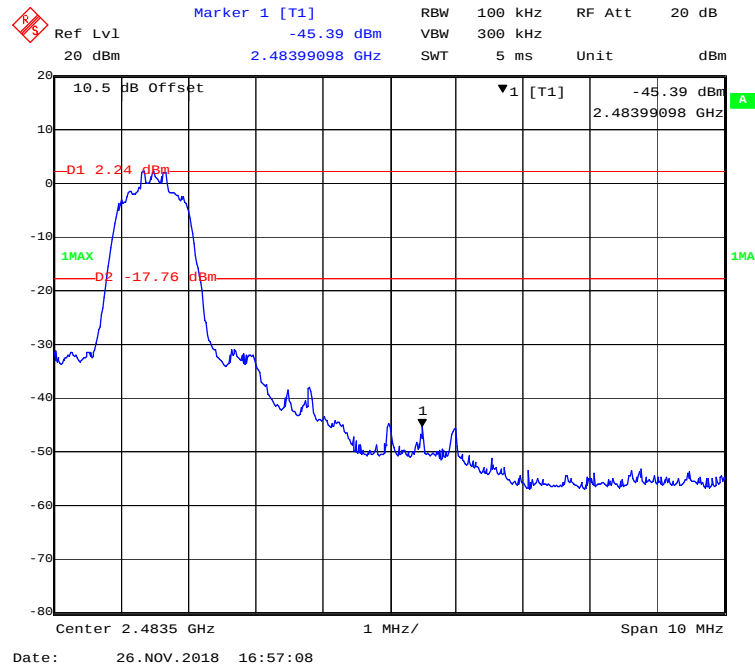


EDR (8DPSK): Left Side

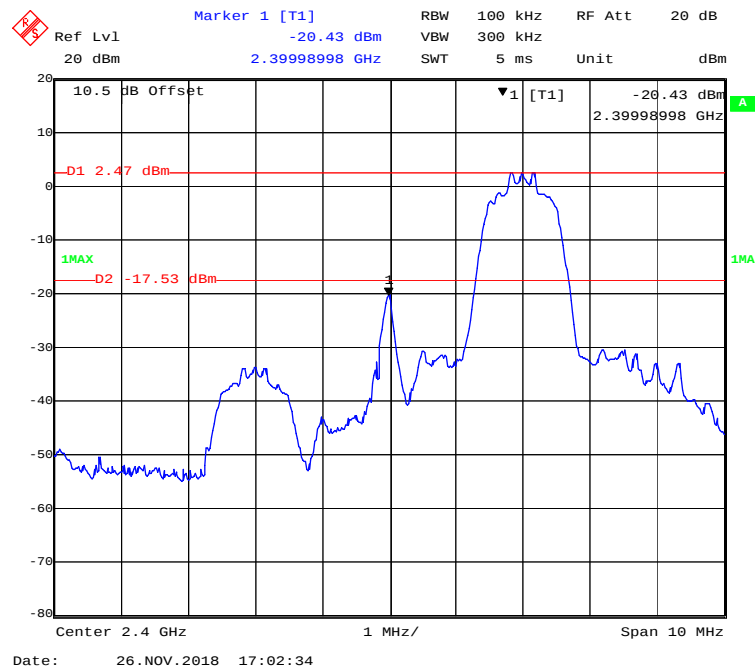


EDR (8DPSK): Right Side

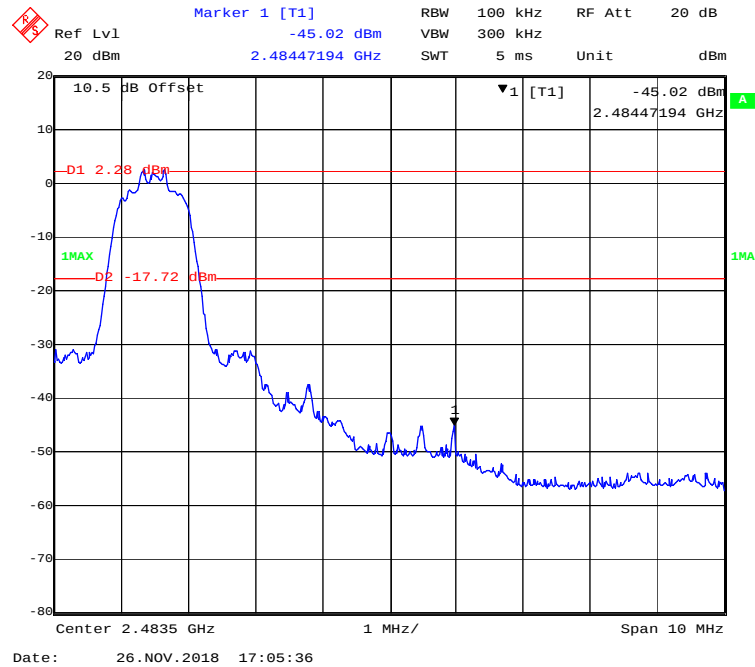


BDR (GFSK): Left Side - Hopping

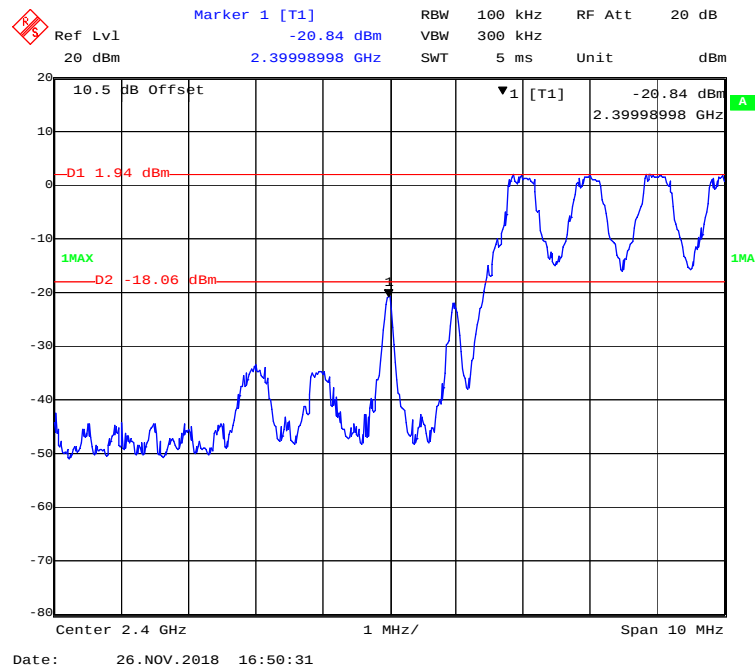


BDR (GFSK): Right Side- Hopping

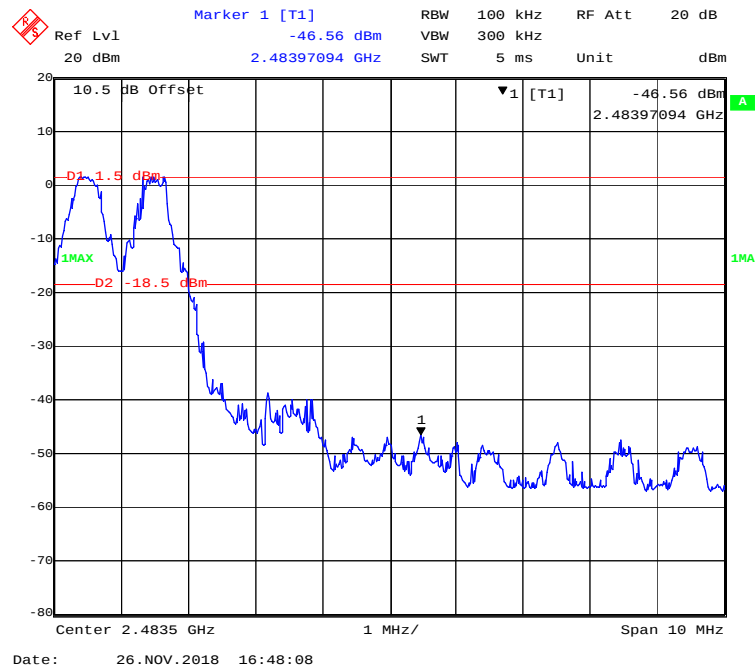


EDR ($\pi/4$ -DQPSK): Left Side- Hopping

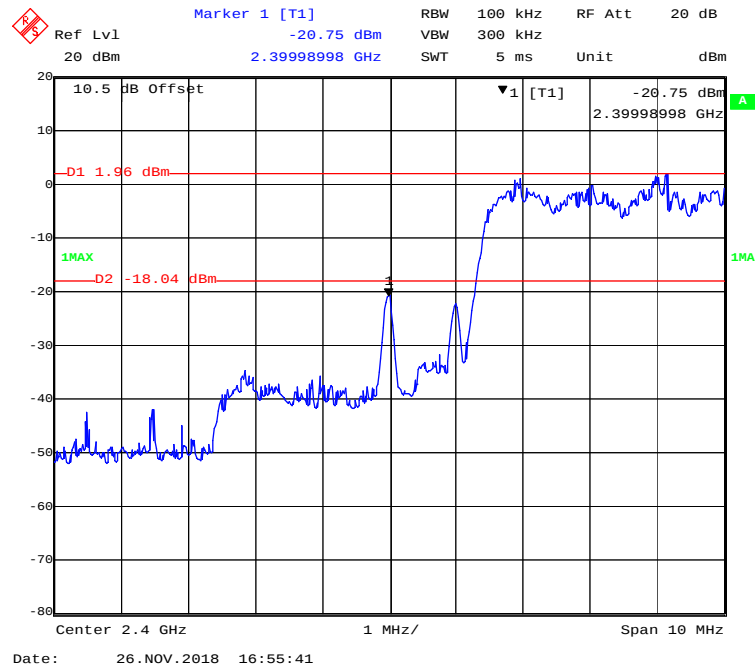

EDR ($\pi/4$ -DQPSK): Right Side- Hopping

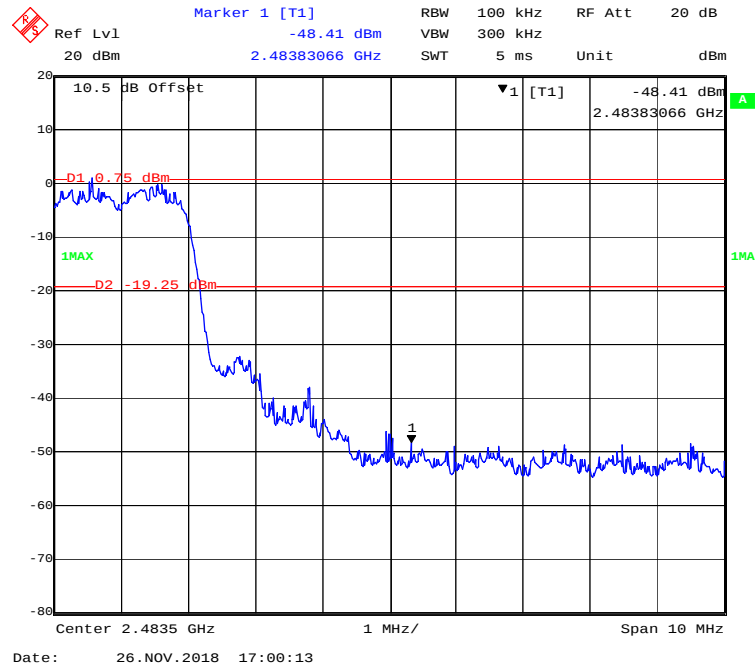

EDR (8DPSK): Left Side- Hopping

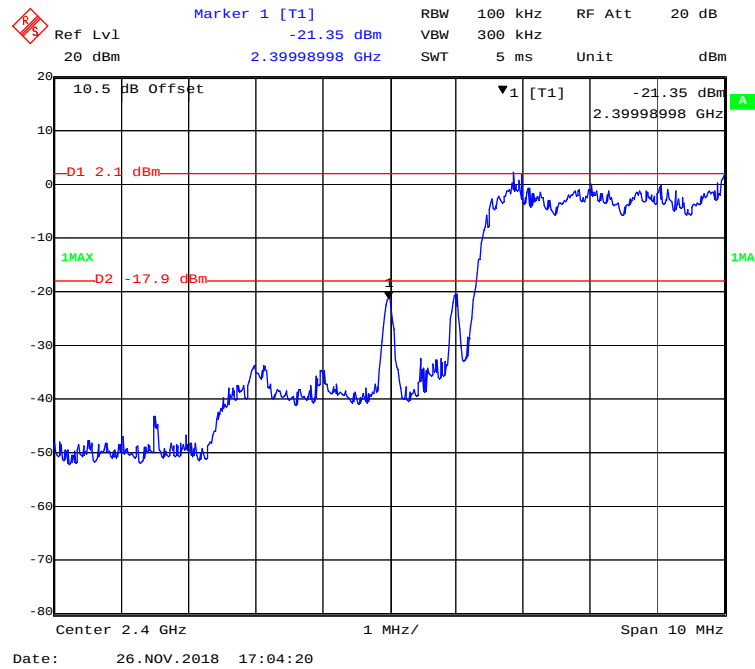

EDR (8DPSK): Right Side- Hopping



***** END OF REPORT *****